


A Followed by 16 users




This open source resume was generated with GitHub Metrics.

Summary: GitHub

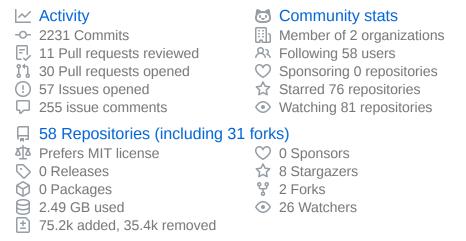

◆ Overall issues and pull requests status



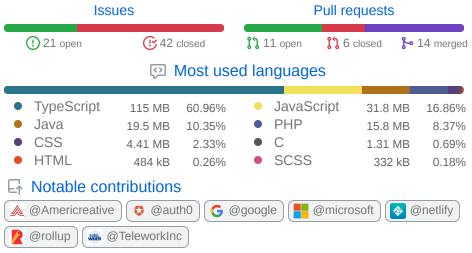

These metrics include private contributions Last updated Sat, 01 May 2021 12:28:08 GMT with lowlighter/metrics@3.8.0-beta

Contributions: GitHub

Recent activity

- Opened #24655 feat: add `-t, --typescript` option for `create-next-... in vercel/next.js

 15 files changed (++397 --26)
- ① Opened #24642 Add TypeScript option to `create-next-app` opened in vercel/next.js
- Opened #7219 fix: CloudFormation triggers should support asyn... in aws-amplify/amplify-cli
 22 files changed (++525 --156)
- ① Opened #159 Is there a way to update bidirectional connections ... opened in aws/aws-appsync-community

Contributions: StackOverflow

_ ₩	3053	ckoverflow metrics 3 reputation points estions comments	
		Recent answers Typescript: Index signature is ○ casting, typescript Resc TS wants us to define the type compiler that you can index the myobj['anystring'], changed interface myInterface { myVal: string; (1 more line was trimmed) 14	olved e of the index. For example, to tell the ne object with any string, e.g. e:
	Ç	Property 'value' does not exist ○ angular, typescript, properties In my case, I had: const handleOnChange = (e: doSomething(e.target.val (1 more line was trimmed) And the issue was that I did not changeEvent so that it knows 1 2	ChangeEvent) => { ue); ot provide a type argument to s e.target was an HTMLInputElement.
	Ç	closure compiler plugin	ation_mode IIFE . I ran into this when I with browser interfaces like Node .
	Ç	it will not detect £ ் javascript, arrays, for-loop, if If you don't want to use regex	, just check if the string includes a and return whether or not there was
	Ç	\$1 variable which refers to e back the top-level \$1 variable	and restoreDir() make use of the each function's first argument. You could be up to a global like FILE_LOCATION pass it to your functions as needed: