


Use Joined GitHub 9 years ago Ray Followed by 22 users




## Generated with GitHub Metrics.

# **Summary: GitHub**

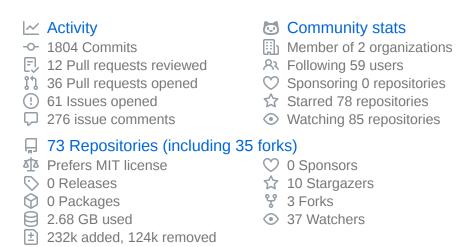

#### Most used languages

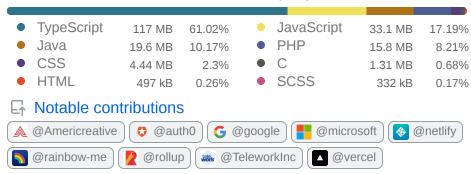

These metrics include private contributions, timezone America/Chicago Last updated Sat, 19 Jun 2021 00:58:43 GMT with lowlighter/metrics@3.10.0-beta

### **Contributions: GitHub**

- Recent activity
- ① Opened #15251 `@storybook/react` forces outdated `react-docg... opened in storybookjs/storybook
- Opened #3836 Use native `Array.isArray()` in `utils.js` in axios/axios
  1 file changed (++1 --1)
- ① Opened #230 Using `package-scripts.js` in ESM context? opened in sezna/nps
- ① Opened #125962 Editor will not open files for viewing/editing opened in microsoft/vscode
- ① Opened #125959 Linux integrated terminal broken: "bash is not ... opened in microsoft/vscode

# **Contributions: StackOverflow**

*	Stackoverflow metrics 3103 reputation points
	Recent answers  Typescript: Index signature is missing in type  casting, typescript Pescript
	Property 'value' does not exist on type 'EventTarget'  ⇒ angular, typescript, properties  Resolved  In my case, I had:  const handleOnChange = (e: ChangeEvent) => {     doSomething(e.target.value);     (1 more line was trimmed)  And the issue was that I did not provide a type argument to     ChangeEvent so that it knows e.target was an HTMLInputElement.  □ 4 □ 0 □ 1 □ 19/02/2021
	JSC_REDECLARED_VARIABLE_ERROR when using gulp closure compiler plugin  in javascript, typescript, gulp, google-closure-compiler  in Try (env custom) or (isolation_mode IIFE). I ran into this when compiling code that conflicted with browser interfaces like Node.  in 0 □ 0 □ 1 □ 24/12/2020
	My code should be detecting if a string has currency symbols, but it will not detect £  ignorpoonup javascript, arrays, for-loop, if-statement  ignorpoonup javascript, arrays, for-loop, if-statement  ignorpoonup Resolved  If you don't want to use regex, just check if the string includes a symbol, increment a counter, and return whether or not there was exactly 1 match:  let testA = "\$£50",
	Problem calling functions within case and if loop  linux, bash, unix  Per @vgersh99, overwrite() and restoreDir() make use of the  s1 variable which refers to each function's first argument. You could back the top-level \$1 variable up to a global like FILE_LOCATION  and reference that, or simply pass it to your functions as needed:  □ 0 □ 0 □ 1 ⊟ 28/07/2020