

```
package compte;
```

```
import java.util.Scanner;
```

```
public class Client {
```

```
    private String nom;
```

```
    private String prenom;    private
```

```
    long numeroTel;
```

```
    private Compte[] listComptes = new Compte[2];
```

```
    public Client(String nom, String prenom, long numeroTel) {
```

```
        this.nom = nom;
```

```
        this.prenom = prenom;
```

```
        this.numeroTel = numeroTel;
```

```
    }
```

```
    public long getNumeroTel() {
```

```
        return numeroTel;
```

```
    }
```

```
public void setNumeroTel(long numeroTel) {  
    this.numeroTel = numeroTel;  
}
```

```
public String getNom() {  
    return nom;  
}
```

```
public String getPrenom() {  
    return prenom;  
}
```

```
public Compte[] getListComptes() {  
    return listComptes;  
}
```

```
public void setListComptes(Compte[] list)  
{  
    listComptes = list;  
}
```

```
public void saisir() {
```



```
Scanner scann = new Scanner(System.in);
System.out.println("Saisissez le nom du client:");

    nom = scann.nextLine();

    System.out.println("Saisissez le prenom du client:");
    prenom = scann.nextLine();

    System.out.println("Saisissez le numero de telephone du client:");
numeroTel = scann.nextLong();

}

public void afficher(){
    System.out.println("Client : " + nom + " " + prenom);
    System.out.println("Tel : " + numeroTel);

    /*for (int i = 0; i < listComptes.length; i++) {
if(listComptes[i] != null)
        System.out.println("Compte: " + listComptes[i].getNumero() +
" , solde = " + listComptes[i].getSolde());
    }*/

}
```

```
public double calculerSoldeTotal() {  
  
    double soldeTotal = 0;  
  
    for (int i = 0; i < listComptes.length; i++) {  
soldeTotal +=listComptes[i].getSolde();  
    }  
  
    return soldeTotal;  
}  
}
```

```
package compte;
```

```
public class Compte{  
  
    long numero; double  
    solde;  
    Client client;  
    public Compte() {  
        solde = 100;  
    }  
}
```



```
public Compte(long numero, double solde) {  
    this.numero = numero;    this.solde =  
solde;  
}
```


```
public long getNumero() {  
    return numero;  
}
```

```
public double getSolde() {  
    return solde;  
}
```

```
public Client getClient() {  
return client;  
}
```

```
public void deposer(double montant) {  
    solde += montant;  
}
```

```
public void retirer(double mont) {  
    solde -= mont;
```

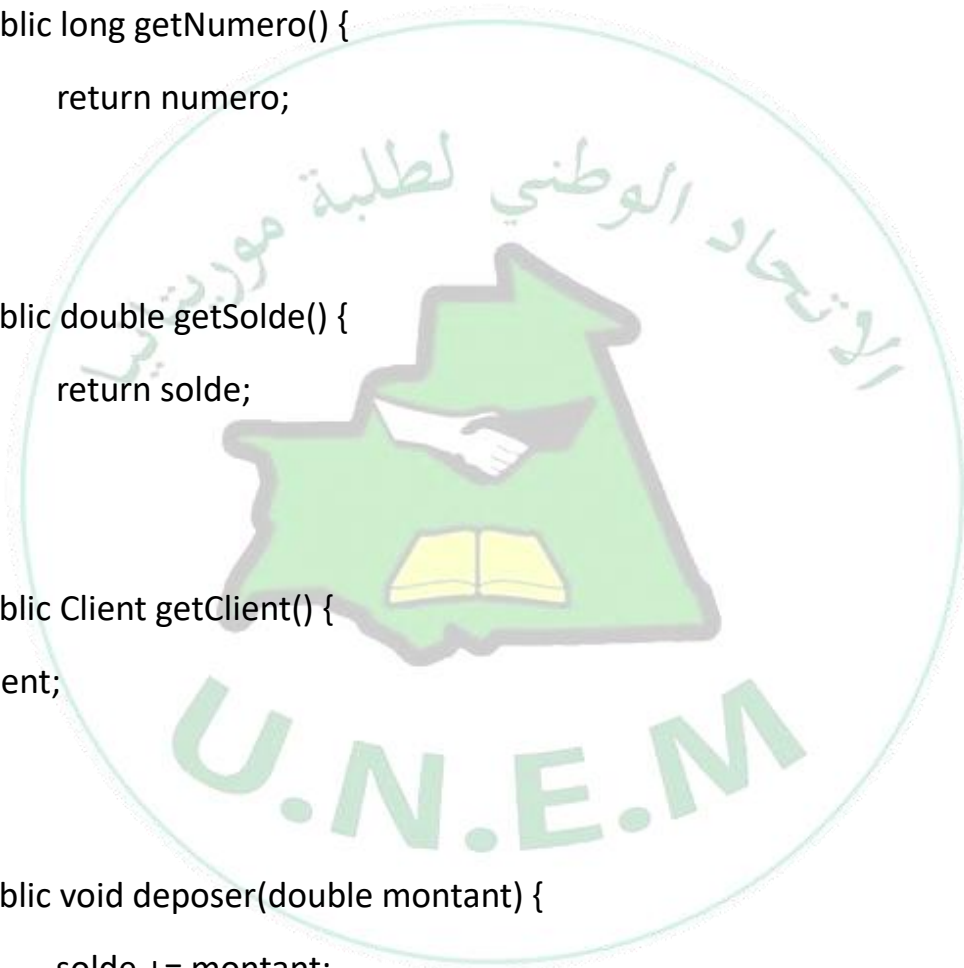

```
}
```

```
@Override
```

```
public String toString() {
```

```
    return "Compte [numero=" + numero + ", solde=" + solde + "];"
```

```
}
```

```
}
```

```
package compte;
```

```
public class TestExecution {
```

```
    public static void main(String[] args) {
```

```
        Client client1 = new Client("Mohamed", "Sidina", 36363334);
```

```
        Compte[] list = new Compte[2]; list[0]
```

```
        = new Compte(1001, 100);
```

```
        list[1] = new Compte(1002, 20000);
```

```
        client1.setListComptes(list);
```



```
        client1.getListComptes()[1].deposer(50000);  
client1.getListComptes()[1].retirer(30000);  
  
        client1.afficher();  
  
        System.out.println(client1.getListComptes()[0]);  
System.out.println(client1.getListComptes()[1]);  
  
        System.out.println("Solde Total =" + client1.calculerSoldeTotal());  
    }  
}
```

