


Watsonx Orchestrate

Level 4 lab prep guide – August 2026 version

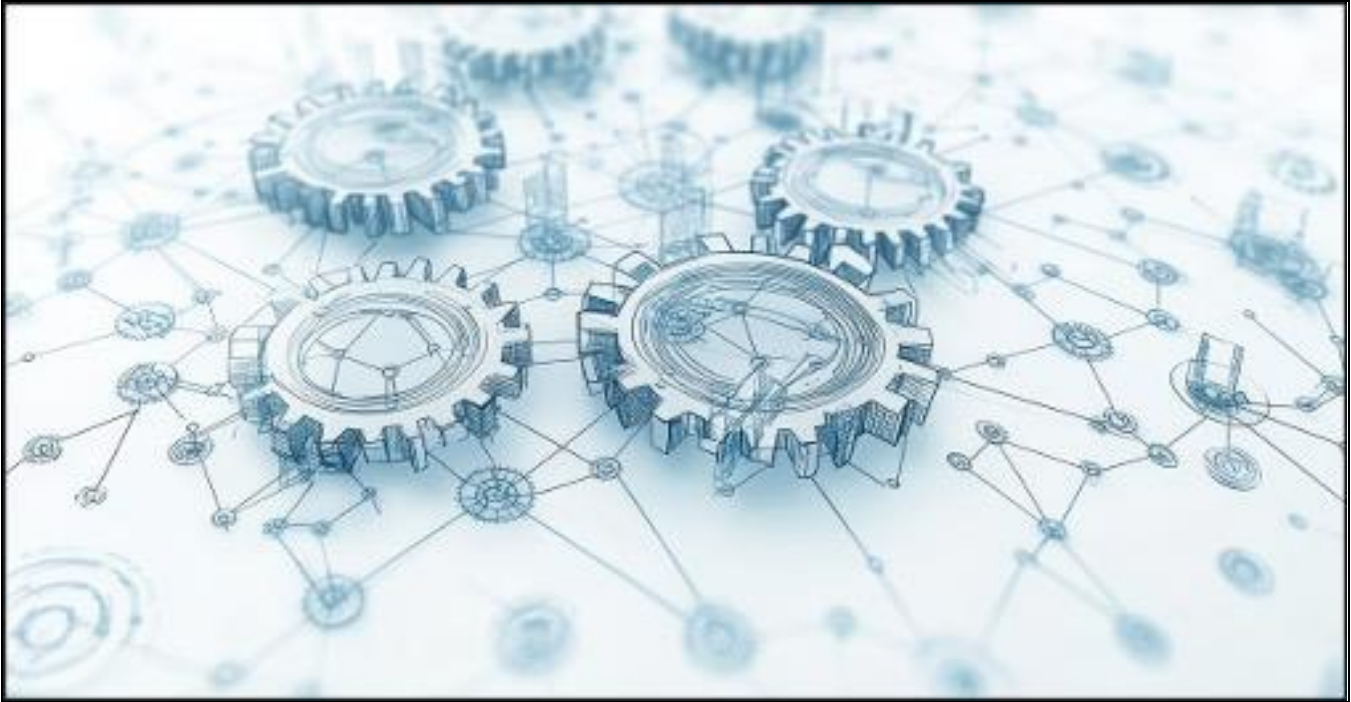

LEGAL NOTICES

This information was developed for products and services offered in the USA. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service. IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing IBM Corporation
North Castle Drive, MD-NC119 Armonk, NY 10504-1785
United States of America

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you. This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice. Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk. IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you. Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All names and references for organizations and other business institutions used in this deliverable's scenarios are fictional. Any match with real organizations or institutions is coincidental. All names and associated information for people in this deliverable's scenarios are fictional. Any match with a real person is coincidental.

TRADEMARKS

IBM, the IBM logo, and [ibm.com](https://www.ibm.com) are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the web at “Copyright and trademark information” at <https://www.ibm.com/legal/copyright-trademark>.

© Copyright International Business Machines Corporation 2025. This document may not be reproduced in whole or in part without the prior written permission of IBM.

Table of Contents

Introduction	4
About this lab	5
Pre-requisites.....	5
High level architecture.....	5
Lab credentials.....	6
Create an account to request your environment	7
Creating an IBMid	7
Creating an IBM Cloud Account (optional)	11
Prepare an ADK working directory	12
Download the required files.....	12
Reserve and prepare your SaaS environment	14
Watsonx Orchestrate SaaS.....	14
Reserve the environment.....	14
Join the IBM Account.....	20
Get your instance URL	22
Create a new API key	26
Install the ADK on your computer.....	29
Test your ADK environment	33
Additional orchestrate ADK commands:.....	37
Validate your environment.....	38
Install required tools and accounts	41
Bruno.....	41
Install Bruno on your computer	41
Configure Bruno.....	41
Tavily	48
Create a free Tavily account	48
Get your API key.....	52
Get the MCP server installation command	52
Bump your ADK resources (optional)	55
Getting help.....	56

Introduction

IBM lab environments are accessed directly from the course. Each course that includes a lab component has an activity within the course that allows you to easily access your own lab environments.

Each lab environment is specific to the product or use cases that are used in the course material. However, the basic steps for reserving and provisioning an environment are described in this document.

It can take some time for the lab environment to be ready for use. In some cases, it can be up to 90 minutes. In other cases, it might be less. After reserving your environment on TechZone, watch your mailbox. You will receive several emails about the status of your reservation (Provisioning / ready) or emails to activate IBM Cloud account.

The environments will be available to you for **5 days** from the time that you reserve it. Time can be extended one time following the IBM TechZone reservation policy.

About this lab

This preparation guide provides you with all the step-by-step instructions to get and configure the different environments or accounts that are required to run all the watsonx Orchestrate L4 lab activities.


Pre-requisites

Before starting this lab, please make sure you have the following components installed on your local machine:

- Python 3.11 or higher: You can install Python via python.org (Recommended for most users) or using homebrew on Mac or Winget on MS™ Windows (Best for developers). AI assistants (MS™ Copilot /IBM Project Bob/Chat GPT...) can help you to proceed with this install.

High level architecture

This diagram gives you a high-level overview of the required environments to perform the watsonx Orchestrate Level 4 learning plan. You will need to reserve A watsonx Orchestrate SaaS hosted on IBM Cloud from IBM TechZone:

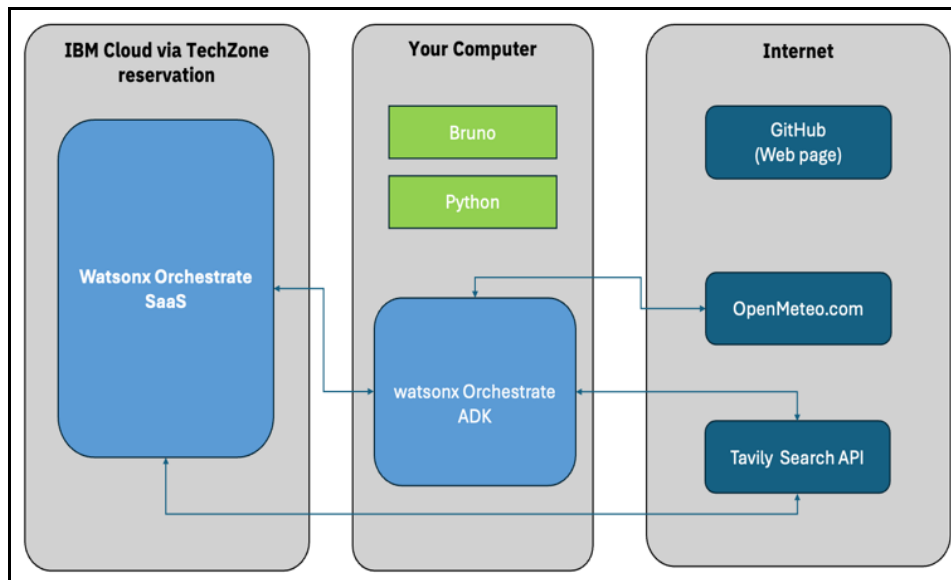

This guide will drive you through the different steps to provision these environments or create the 3rd party product accounts (Tavily in particular).

Lab credentials

During the watsonx Orchestrate L4 learning plan, you will navigate between different products, environments, accounts and services. This prep guide will help you to create this note to collect and reuse the different user/passwords, tokens and API keys you will need during the various lab activities.

This table summarizes the different items you will need to configure your lab environment. This guide will drive you through all the steps to collect them. Each item will be identified with its Item# to simplify the setup instruction in the different lab guides.

Environment	Credential	Value	Comments	Item #
Watsonx Orchestrate SaaS	Account name		The ibm cloud account name you have been onboarded onto.	Item 1
	Service URL		The service url of your watsonx Orchestrate SaaS instance	Item 2
	API KEY		The API key you have generated to access your watsonx Orchestrate SaaS tenant	Item 3
Tavily Web Search (Used to create an agentic tool)	Command line	<code>npx -y tavily-mcp@0.1.3</code>		Item 4
	TAVILIY_API_KEY			Item 5
Localhost user	username	wxo.archer@ibm.com		Item 6
	password	watsonx		Item 7

Create an account to request your environment

IBM employees can use their IBM credentials to access IBM Technology Zone or IBM Cloud.


Business Partners must use an IBMid for IBM Technology Zone. If you do not have an IBMid, you can create one by using steps in this document. There is no cost to creating an IBMid.

You might also require an IBM Cloud account for some lab environments.


Additionally, you might need to configure an OpenVPN connection to be able to access the lab environment.

Creating an IBMid

1. In your web browser, go to the IBM account page (<https://www.ibm.com/account/us-en/>).
1. Click **Log in to My IBM** (A).

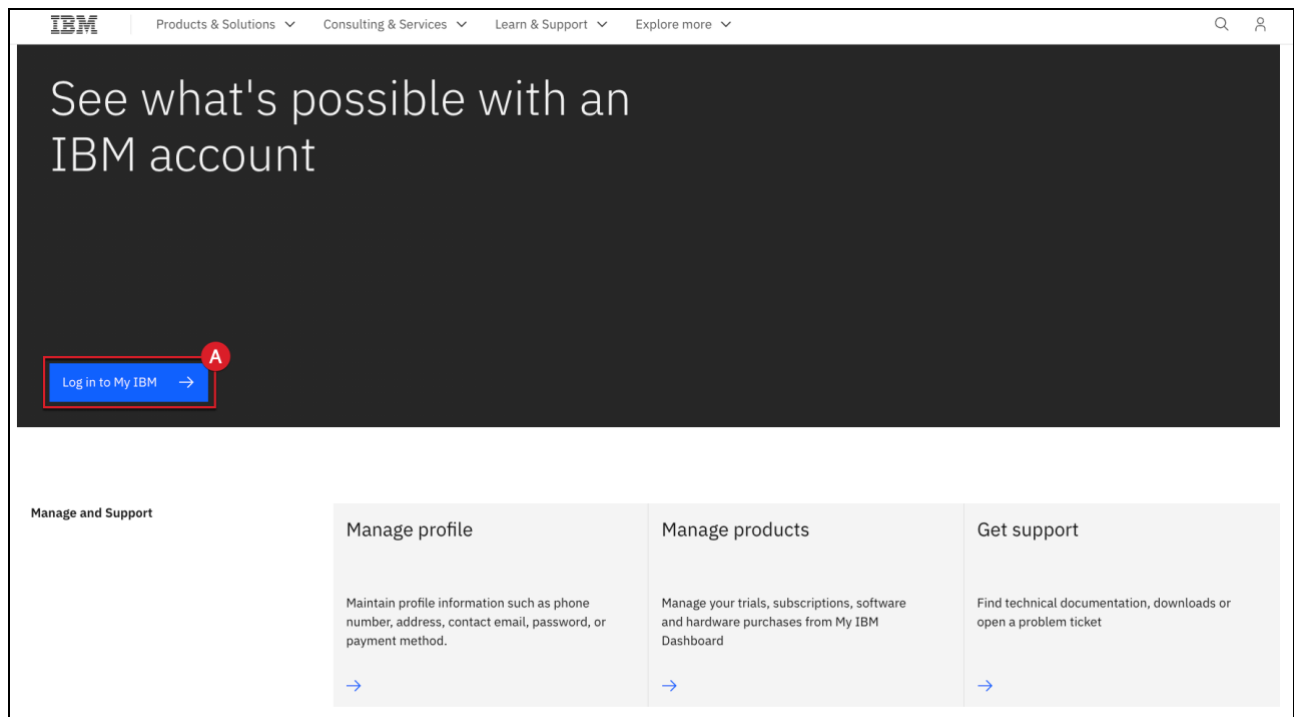

2. The Log in to IBM page is displayed. Click **Create an IBMid** (A).

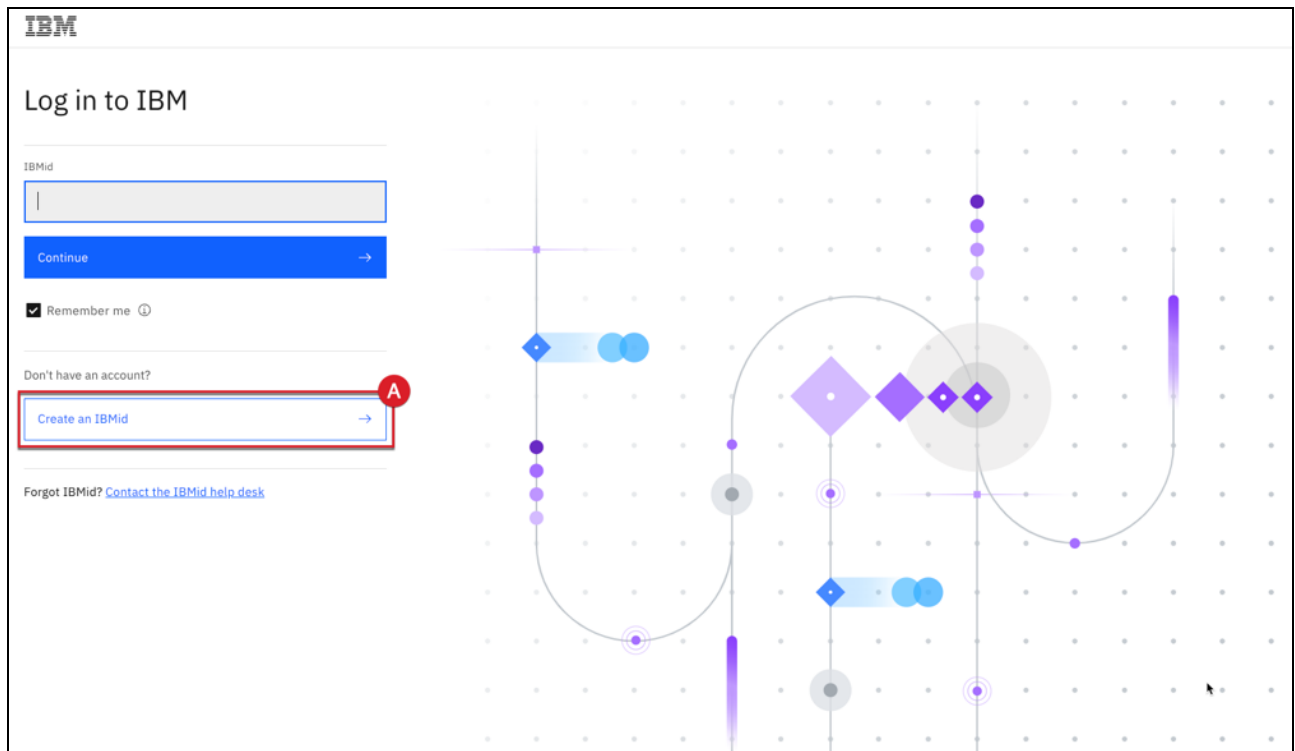

3. On the **Create an IBMid** page, enter the following information:

- Your email address (A)
- A password for your IBMid account (B)
- First name (C)
- Last name (D)
- Your country or region of residence (E) and state or province (F)
- If you select that you are not a student (G), then enter the name of your company (G)
- Click **Next** (I) to continue

The screenshot shows the 'Create an IBMid' page. On the left, a 'Welcome to IBM' section encourages account creation. The main form is titled 'Create an IBMid' and includes a link for existing users. The form is divided into sections: 'Account information' and 'Personal information'. Fields are labeled with red circles and letters: A (Business email), B (Password), C (First name), D (Last name), E (Country or region of residence), F (State or province), G (Are you a student? - No), H (Company), and I (Next button). The form is styled with a light blue background and a grid pattern.

Welcome to IBM

Create an account to access trials, demos and services.

Create an IBMid

Already have an IBM account? [Log in](#)

Account information

Business email ☒ We'll send you a 7 digit code that you'll use to verify your email in step 2.

Password ☒

First name

Last name

Country or region of residence

State or province

Are you a student? ☐ Yes ☒ No

Company

4. You are then prompted to verify your email and complete your account creation. Enter the code that was emailed to you in **Verification token** (A), and then click **Create account** (B).

Welcome to IBM

Create an account to access trials, demos and services.

Create an IBMid

Already have an IBM account? [Log in](#)

Account information

Verify email

We emailed a 7 digit code to [itzuser@email.com](#). This code will expire in 30 minutes.

Verification token

5548663

Didn't receive the email? Check your spam filter for an email from [ibmacct@iam.ibm.com](#).

You can resend the verification token in 43 seconds

I'd like IBM to use my contact details to keep me informed about products, services, and offers. More information on how IBM uses data and ways to [opt out](#) can be found in the [IBM Privacy Statement](#).

☒ Email

I accept the product [Terms and Conditions](#).

Create account

5. The **About your IBMid Account** page is shown. Click **Proceed** (A).

IBM

Welcome to IBM

Create an account to access demos and services.

About your IBMid Account

By creating, or using, an IBMid to access an IBM Web site or other service, you acknowledge that you have read, understand, and agree to be bound by the below terms, in addition to the terms in the IBM Terms of Use, the IBM Privacy Agreement and the "About your IBMid Account Privacy" section of this notice provide details on how IBM protects your personal data.

Most IBMid accounts are individual IDs, meaning you manage your own account information and access your account through the IBMid login service (i.e. IBMid is the authenticating agency).

If your account is created using an email address containing a domain owned by an organization which you are employed by, contracted to, or volunteer for, your organization can:

- inquire about the status of your ID
- request your account settings (including your personal information)
- at its option, convert it to an enterprise ID.

If your account was created as (or is converted to) an enterprise ID, your organization manages your account information. It is also the authenticating agency for your ID, meaning your access is controlled by your organization's login service.

About your IBMid Account Privacy

What data does IBM collect?

Why IBM needs your data

How your data is obtained

How IBM uses your data

How IBM protects your data

How long we keep your data

Your rights

I acknowledge that I understand how IBM is using my Basic Personal Data and (if applicable) how my organization may become the authenticating agency for my IBMid account. I certify that my age is at least 18 years old.

Cancel

Proceed

- After a few minutes, you will receive an email confirming that your IBMid has been activated.

Note: The first time that you log in using your IBMid you will be sent another code to verify your log in.

Creating an IBM Cloud Account (optional)

If you already have an IBM Cloud account, you can skip this task.

- Go to IBM Cloud (<https://cloud.ibm.com/registration>).
- Enter your email address (A) and a password (B), and then click **Next** (C).

The screenshot shows the IBM Cloud registration page. The main heading is "Create an IBM Cloud account". Below it, a link says "Already have an IBM Cloud account? [Log in](#)". The registration form is divided into sections: "Account information", "Verify email", "Personal information", and "Account notice". The "Account information" section contains an "Email" field (labeled A), a "Password" field (labeled B), and a "Next" button (labeled C). There is also a "Sign up with Google" button. To the right of the form, there are three benefits listed: "Unlock the full IBM Cloud Catalog", "200 USD Cloud Credit for free", and "Get started for free". At the bottom of the form, there is a "Create account" button.

After you complete the registration, you receive an email to activate your account. This can take a few hours to process. After you receive the confirmation email, follow the instructions provided in the email to activate your account.


Prepare an ADK working directory

Download the required files


In this step, you will get download all the files that are required to run the various ADK labs on your own computer.

It is strongly recommended to create the virtual environment directly from within this directory once un-archived on your computer.

1. Visit <https://ibm.seismic.com/Link/Content/DCqWGcVp2V34qGqG829PQFpf99cV>
2. Click the download link (A).

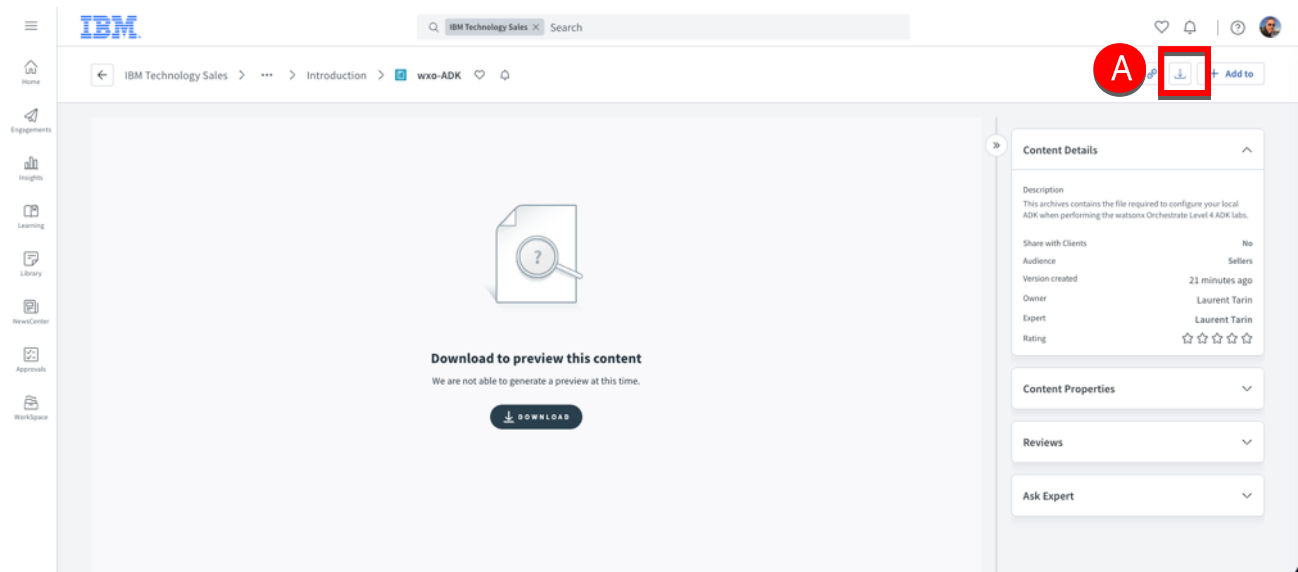

3. Extract the archive file on your computer. In this lab guide, the file has been extracted under the home directory (~).
4. Open your local **wxo-ADK** folder (A).

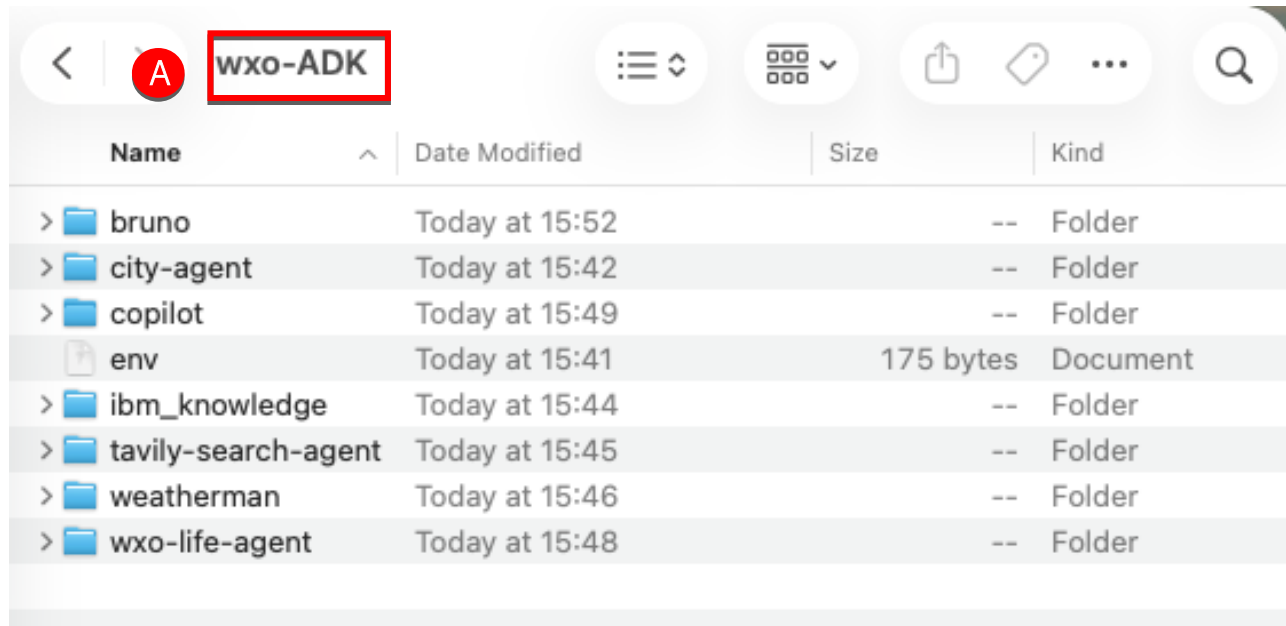

This folder contains:

- The **bruno** folder containing the workspace configuration file.
- The **city-agent** file used to test your ADK environment.
- An empty **copilot** folder to store the copilot generated agent files.
- An **env** file you will edit to specify your watsonx Orchestrate server credentials
- 4 folders containing the required files to run the ADK labs.

Reserve and prepare your SaaS environment

In this section you will reserve and configure two different environments (described in the architecture diagram) that you will use through the different labs in the watsonx Orchestrate L4.

Watsonx Orchestrate SaaS

During this L4 you will need a wxO SaaS trial to perform most of the labs contained in the new watsonx Orchestrate learning plan (September version). Follow these instructions to reserve and configure this SaaS environment.


Reserve the environment

The environment can be reserved from IBM TechZone.

1. Click the following link to access the TechZone collection.

<https://techzone.ibm.com/collection/techlcd-watsonx-orchestrate-level3-and-level-4-environments-learning/environments>

2. Click **Reserve it** in the **watsonx Orchestrate Dedicated Trial (Account Vending)** tile (A).

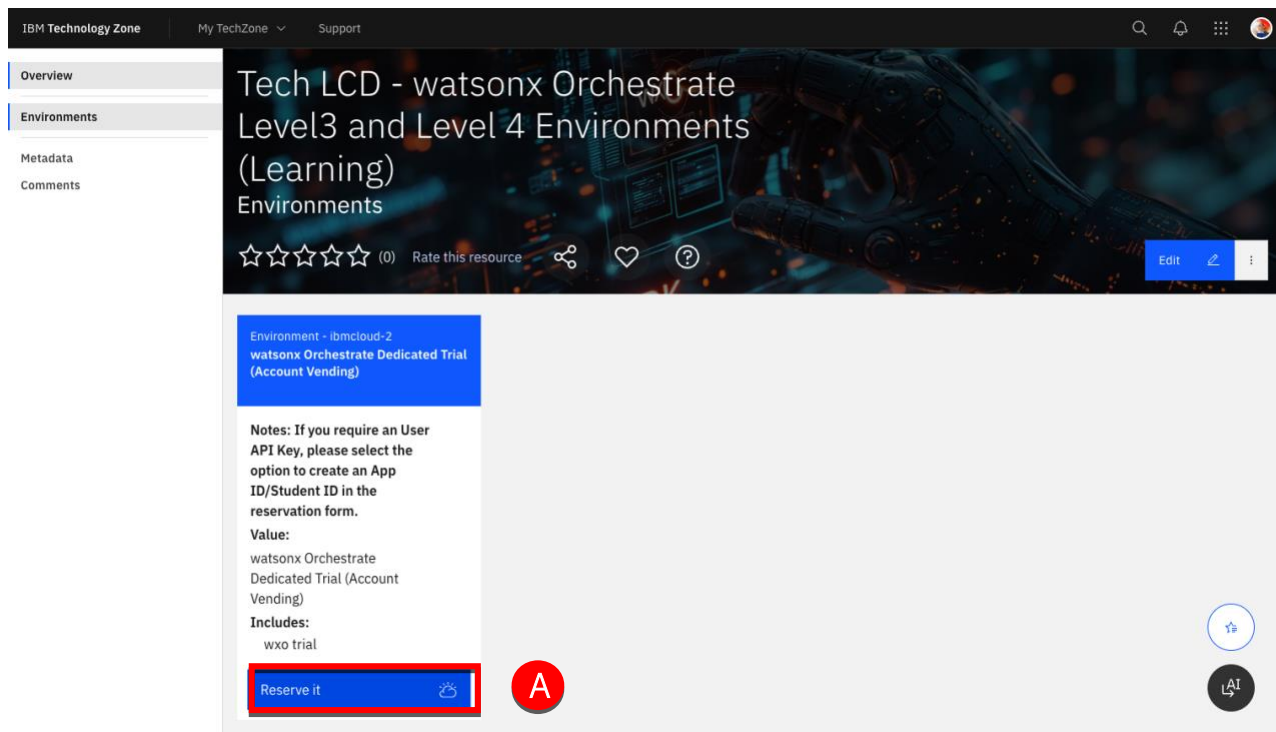

Note: You can also use alternative watsonx Orchestrate environments from this certified collection. If you decide to work with the **watsonx Orchestrate essentials plan** as an alternative, note the following differences from this documentation:

- You will use your IBM ID to join the assigned IBM Cloud account
- You will be assigned a Cloud account you will have to join after receiving an invitation email
- You will have to use the API key provided when starting watsonx Orchestrate from this account

3. Enter a **Name (A)**, a **Description (B)** and click **Next (C)**.

4. Select **Learning (A)** then click **Next (B)**.

5. Click the down arrow to expand the **Choose a region** menu (A).

IBM Technology Zone My TechZone Support

Create a request

watsonx Orchestrate Dedicated Trial (Account Vending)

Single request

- Step 1: General
- Step 2: Business purpose
- Step 3: Deployment
- Step 4: Scheduling
- Step 5: Configuration
- Step 6: Review and submit

Deployment

Provide details on deployment requirements and the planned dates for the intended request. Please do not finalize dates until the request is approved or until the resources are fully deployed and ready.

Geography ⓘ

Choose a region

Select your preferred geography for resource deployment to optimize performance.

Exit form

Back Next

6. Select **- americas – us south region** (A) in the **Preferred Geography** menu then click **Next** (B).

IBM Technology Zone My TechZone Support

Create a request

watsonx Orchestrate Dedicated Trial (Account Vending)

Single request

- Step 1: General
- Step 2: Business purpose
- Step 3: Deployment
- Step 4: Scheduling
- Step 5: Configuration
- Step 6: Review and submit

Deployment

Provide details on deployment requirements and the planned dates for the intended request. Please do not finalize dates until the request is approved or until the resources are fully deployed and ready.

Geography ⓘ

- ✓ Choose a region
- skip-scheduler - ap - jp-tok region - jp-tok-1 datacenter
- skip-scheduler - europe - eu-gb region - eu-gb-1 datacenter
- skip-scheduler - americas - us-south region - us-south-1 datacenter

Exit form

Back Next

7. Click **Next** (A)

The screenshot shows the 'Create a request' form for 'watsonx Orchestrate Dedicated Trial (Account Vending)'. The left sidebar lists steps: Step 1: General, Step 2: Business purpose, Step 3: Deployment, Step 4: Scheduling (selected), Step 5: Configuration, and Step 6: Review and submit. The main content area is titled 'Scheduling' and includes a 'Policy' section with usage limits. Below this, there are fields for 'Start date' and 'End date', both set to '06/25/2026 01:45 PM' and 'Europe/Paris'. At the bottom right, a red circle with the letter 'A' points to a red-bordered 'Next' button.

IBM Technology Zone My TechZone Support

Create a request

watsonx Orchestrate Dedicated Trial (Account Vending)

Single request

- Step 1: General
- Step 2: Business purpose
- Step 3: Deployment
- Step 4: Scheduling
- Step 5: Configuration
- Step 6: Review and submit

Scheduling

Provide details on scheduling requirements and the planned dates for the intended request. Please do not finalize dates until the request is approved or until the resources are fully deployed and ready.

Policy

How long you can use the environment?

You can request up to: **2 days**
After it's deployed: You can extend it **2 time(s)** for up to **2 days**
Total time you could have it: Up to **6 days**

Start date ⓘ

06/25/2026 01:45 PM Europe/Paris

End date ⓘ

06/27/2026 01:45 PM Europe/Paris

Exit form

Back Next

8. Click the **Customize** icon (A).

The screenshot shows the 'Create a request' form for 'watsonx Orchestrate Dedicated Trial (Account Vending)'. The left sidebar lists steps: Step 1: General, Step 2: Business purpose, Step 3: Deployment, Step 4: Scheduling, Step 5: Configuration (selected), and Step 6: Review and submit. The main content area is titled 'Configuration' and includes a 'Customize' link. Below this, there are fields for 'COMMA SEPARATED LIST OF ADDITIONAL ACCOUNT USER EMAILS' (Not set), 'CLOUD DIRECTORY USER COUNT' (0), and 'CLOUD DIRECTORY USER PREFIX' (Not set). At the bottom right, a red circle with the letter 'A' points to a red-bordered 'Customize' link.

IBM Technology Zone My TechZone Support

Create a request

watsonx Orchestrate Dedicated Trial (Account Vending)

Single request

- Step 1: General
- Step 2: Business purpose
- Step 3: Deployment
- Step 4: Scheduling
- Step 5: Configuration
- Step 6: Review and submit

Configuration

Enter clear and detailed configuration about the environment request. All fields are required.

Configuration

Enter clear and detailed configuration about the environment request. All fields are required.

COMMA SEPARATED LIST OF ADDITIONAL ACCOUNT USER EMAILS

Not set

CLOUD DIRECTORY USER COUNT

0

CLOUD DIRECTORY USER PREFIX

Not set

Exit form

Back Review


9. Click the + icon to set the user counter to 1 (A), click **Save** (B).

The screenshot shows the 'Create a request' form for 'watsonx Orchestrate Dedicated Trial (Account Vending)'. The left sidebar lists steps: Step 1: General, Step 2: Business purpose, Step 3: Deployment, Step 4: Scheduling, Step 5: Configuration (selected), and Step 6: Review and submit. The main area is titled 'Configuration' and contains a 'Configuration' section with a 'Save' button (labeled B) and a '+ icon' (labeled A) next to the 'CLOUD DIRECTORY USER COUNT' field, which is set to 1. The form also includes fields for 'CLOUD DIRECTORY USER PREFIX' and 'COMMA SEPARATED LIST OF ADDITIONAL ACCOUNT USER EMAILS'. At the bottom, there are 'Exit form', 'Back', and 'Review' buttons.


10. Click **Review** (A).

The screenshot shows the 'Create a request' form for 'watsonx Orchestrate Dedicated Trial (Account Vending)'. The left sidebar lists steps: Step 1: General, Step 2: Business purpose, Step 3: Deployment, Step 4: Scheduling, Step 5: Configuration, and Step 6: Review and submit (selected). The main area is titled 'Configuration' and contains a 'Configuration' section with a 'Review' button (labeled A) and a 'Customize' link. The form also includes fields for 'CLOUD DIRECTORY USER COUNT' (set to 1) and 'CLOUD DIRECTORY USER PREFIX' (set to 'Not set'). At the bottom, there are 'Exit form', 'Back', and 'Review' buttons.


11. Read and **Agree** the IBM Technology Zone conditions (A) then click **Submit** (B).

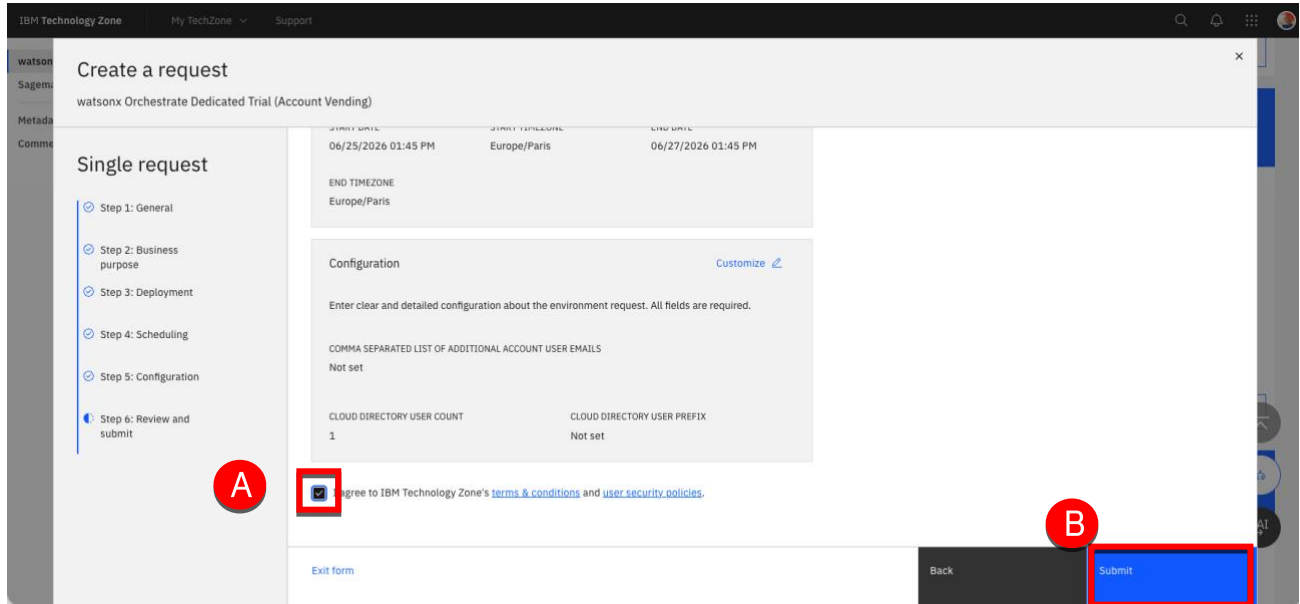

12. Check that your reservation has been created (A) then wait for the “reservation is ready” email.

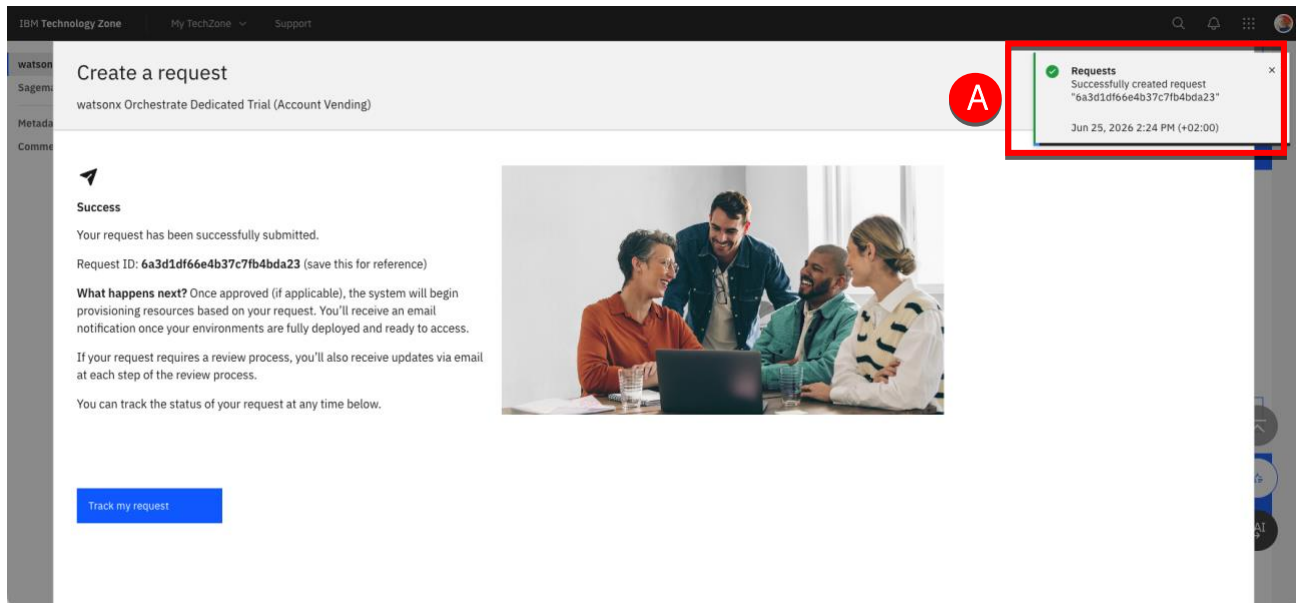


13. Wait for the READY confirmation email from IBM Technology zone (A). Click **View your request** (B).

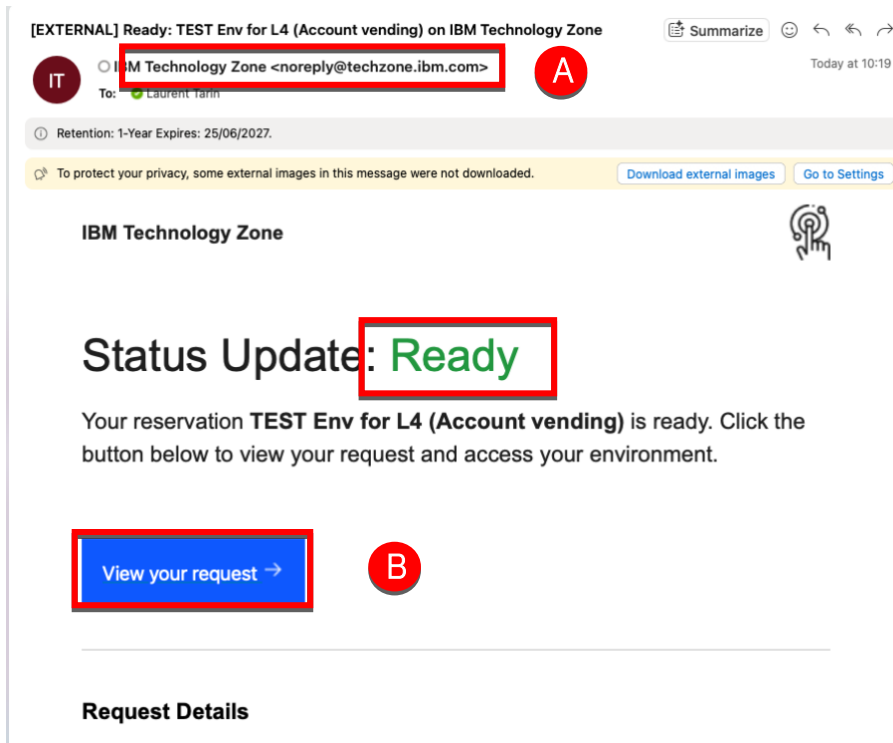


Join the IBM Account


Your watsonx Orchestrate instance is hosted on an IBM Cloud account. You will first need to join this account if you have never been invited to this account before. If you have received another email from IBM Cloud (A) inviting you to join an account, open this email.





1. Open the IBM Cloud invitation email received in your mailbox.
2. Note your IBM Cloud account name (A) in your note (Item 1). Click the **Join now** link (B).

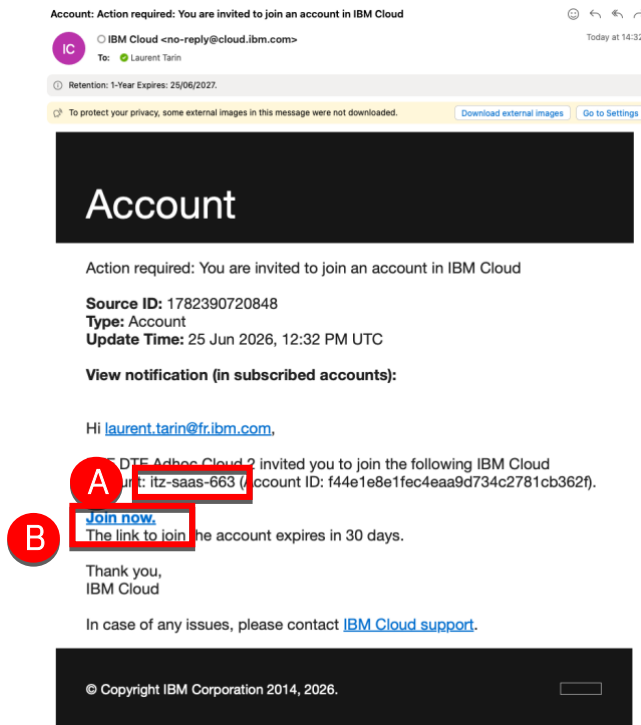

3. Log in IBM Cloud if you are asked for your IBM ID credentials.
4. Check the **Account notice** (A), accept the **product Terms and Conditions** (B) then click **Join account** (C).

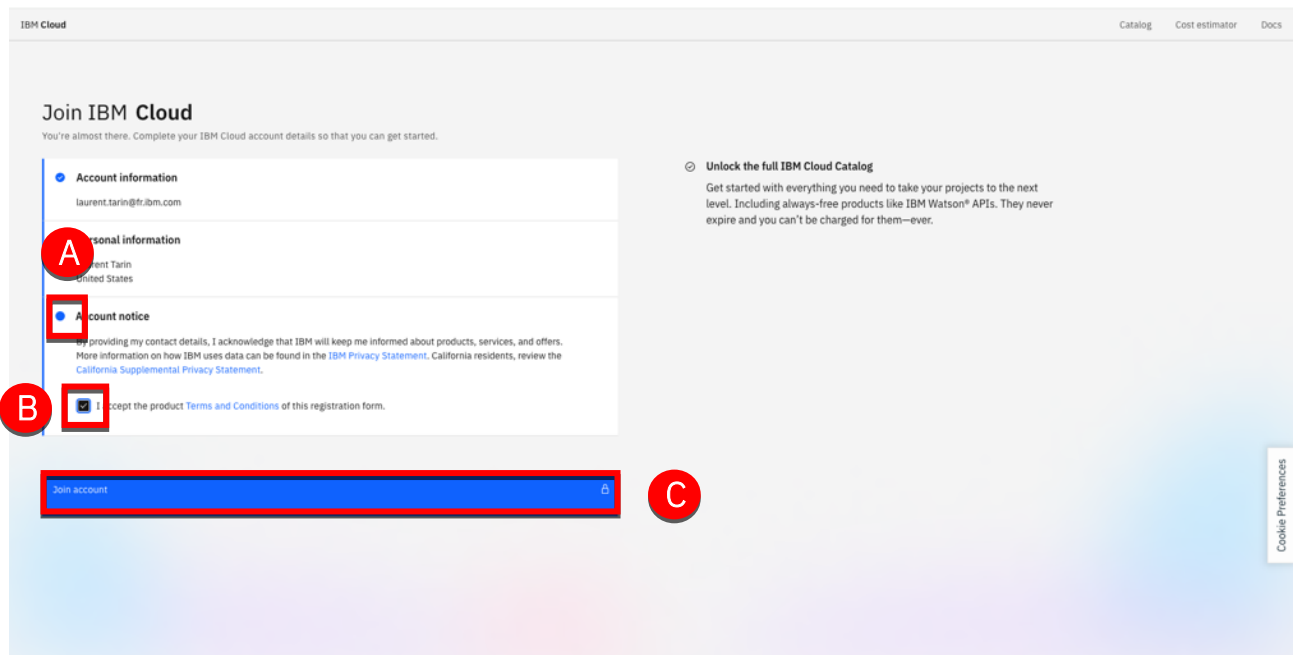

5. Click **Proceed** to switch to the new account on IBM Cloud (A). Note, you will not see this message if this is your only IBM Cloud account.

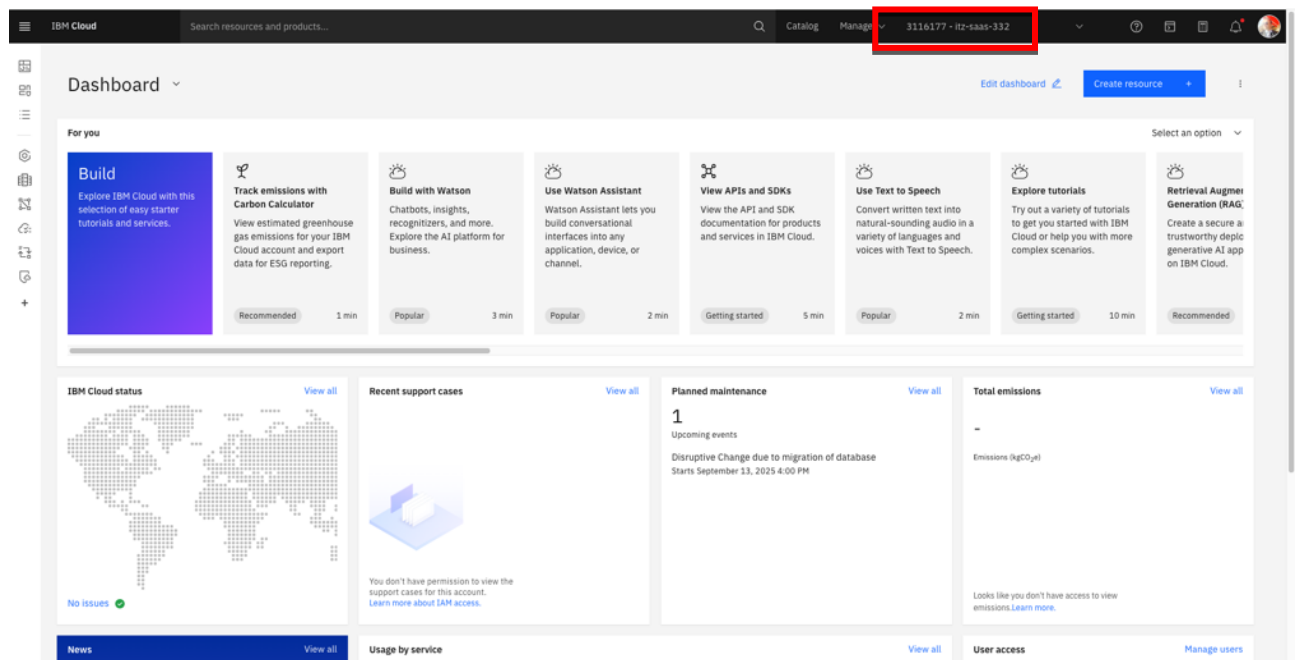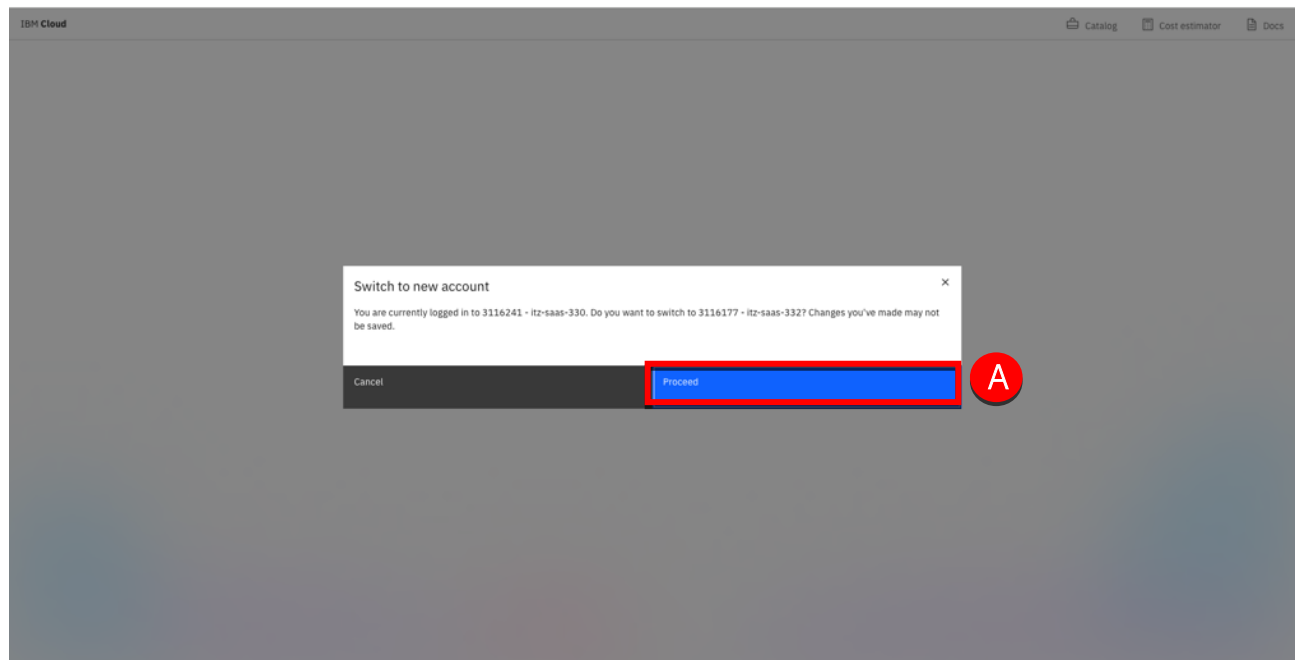


Get your instance URL

Next you will start your watsonx Orchestrate SaaS instance


- The screenshot shows the IBM Cloud Dashboard. At the top, there's a navigation bar with "IBM Cloud" on the left and search, catalog, manage, and account links on the right. Below the navigation bar is a sidebar with icons for various services, and a main content area titled "Dashboard". The dashboard features several cards for different services like Carbon Calculator, Watson Assistant, and APIs & SDKs. There are also sections for IBM Cloud status, recent support cases, planned maintenance, total emissions, news, and usage by service.

-
- The screenshot displays the IBM Cloud Resource list page. The page has a top navigation bar with the IBM Cloud logo, a search bar, and links for Catalog, Manage, and account information. The main content area is titled "Resource list" and includes a "Create resource" button. Below the title is a table with columns: Name, Group, Location, Product, Status, and Tags. The table is filtered by "Machine Learning" (4 resources). The resources listed are:
- | Name | Group | Location | Product | Status | Tags |
|---------------------|-----------------------------|-------------------|---------------------|--------|---------------|
| gov-270002541s | eid-68ac554c2fa556a351125f9 | Dallas (us-south) | watsonx.governance | Active | end:68a... +1 |
| wml-270002541s | eid-68ac554c2fa556a351125f9 | Dallas (us-south) | watsonx.ai Runtime | Active | end:68a... +1 |
| ml-270002541s | eid-68ac554c2fa556a351125f9 | Dallas (us-south) | watsonx.ai Studio | Active | end:68a... +1 |
| watsonx-orchestrate | eid-68ac554c2fa556a351125f9 | Dallas (us-south) | watsonx Orchestrate | Active | end:68a... +1 |
- The "Machine Learning" category is highlighted with a red box, and the "watsonx-orchestrate" resource is also highlighted with a red box. A red circle 'A' points to the "Machine Learning" category icon, and a red circle 'B' points to the "watsonx-orchestrate" resource icon.


3. Click **Launch watsonx Orchestrate** (A).

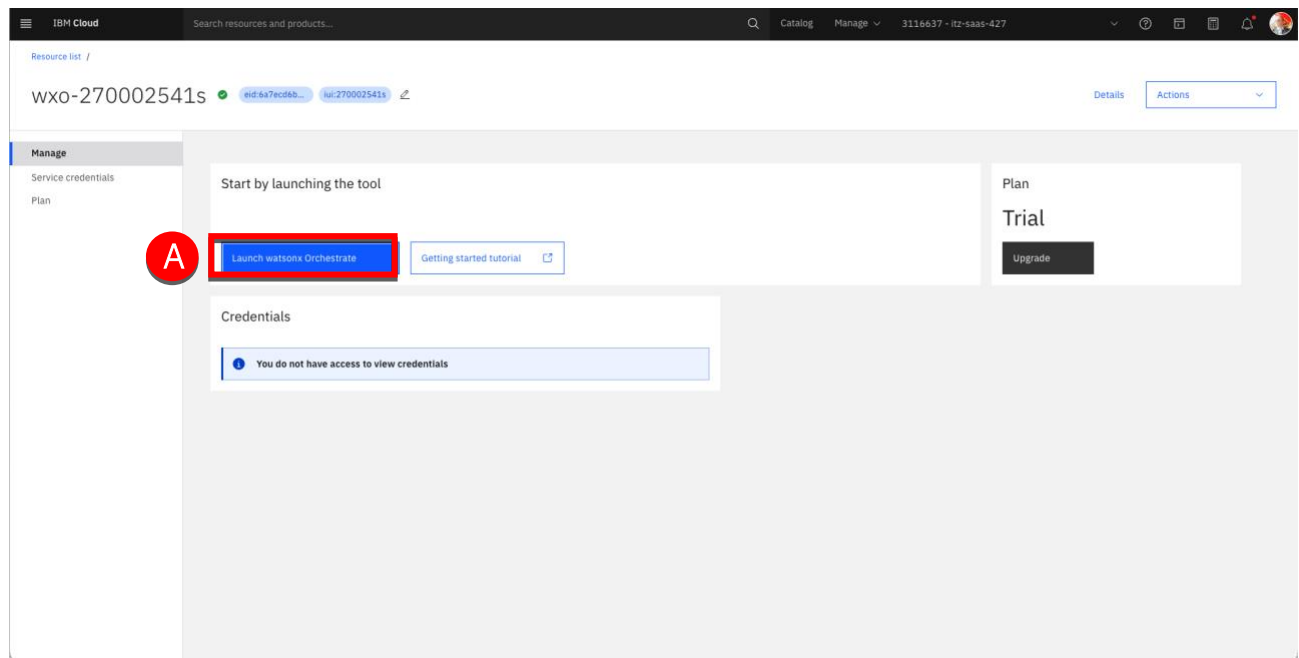


4. Click your profile icon (A) then select **Settings** (B).

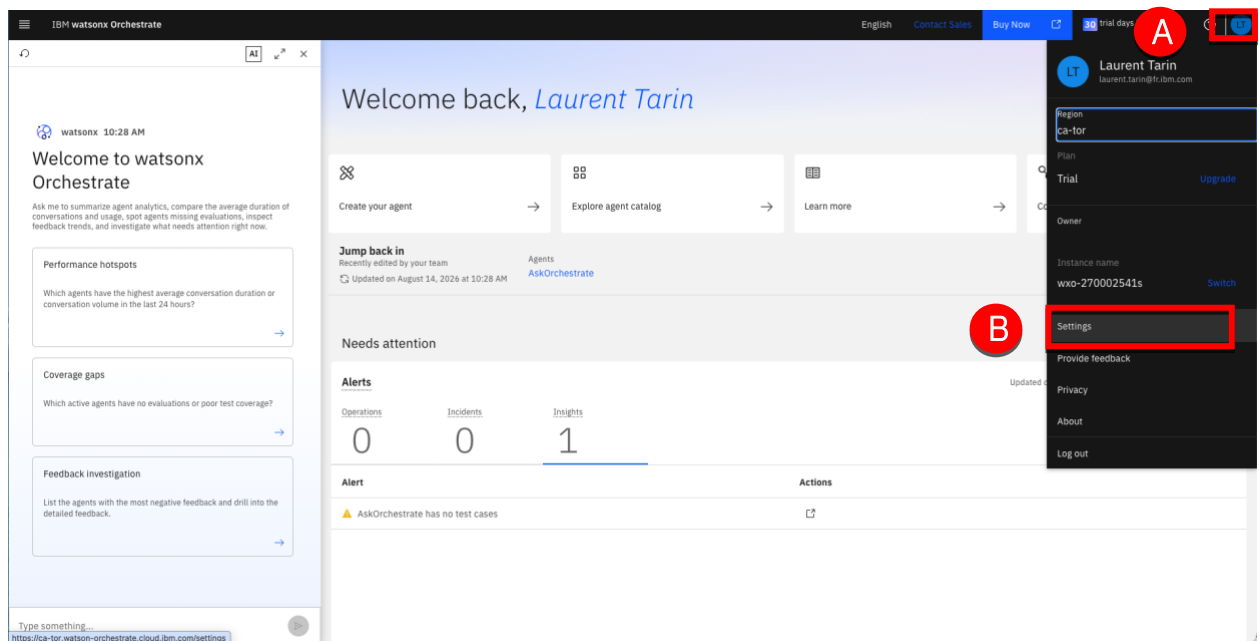

5. Select the **API details** tab (A).

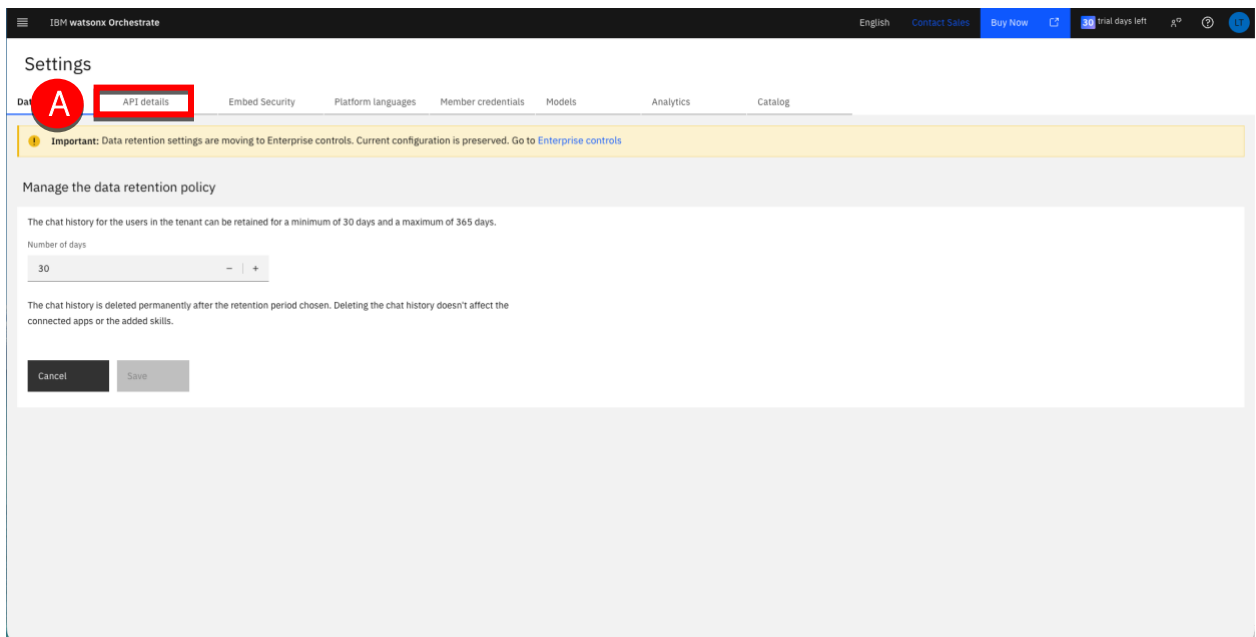


6. Copy your **Service instance URL** (item 2) in your note for a later use (A).

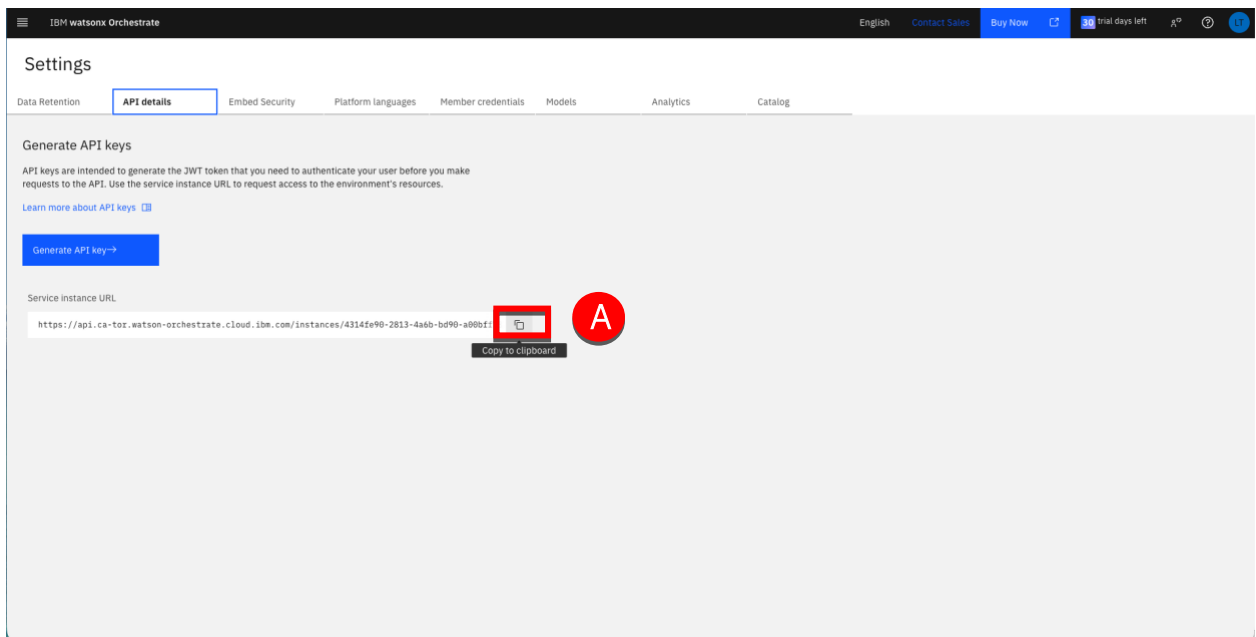


Create a new API key


1. Click Generate API key (A).

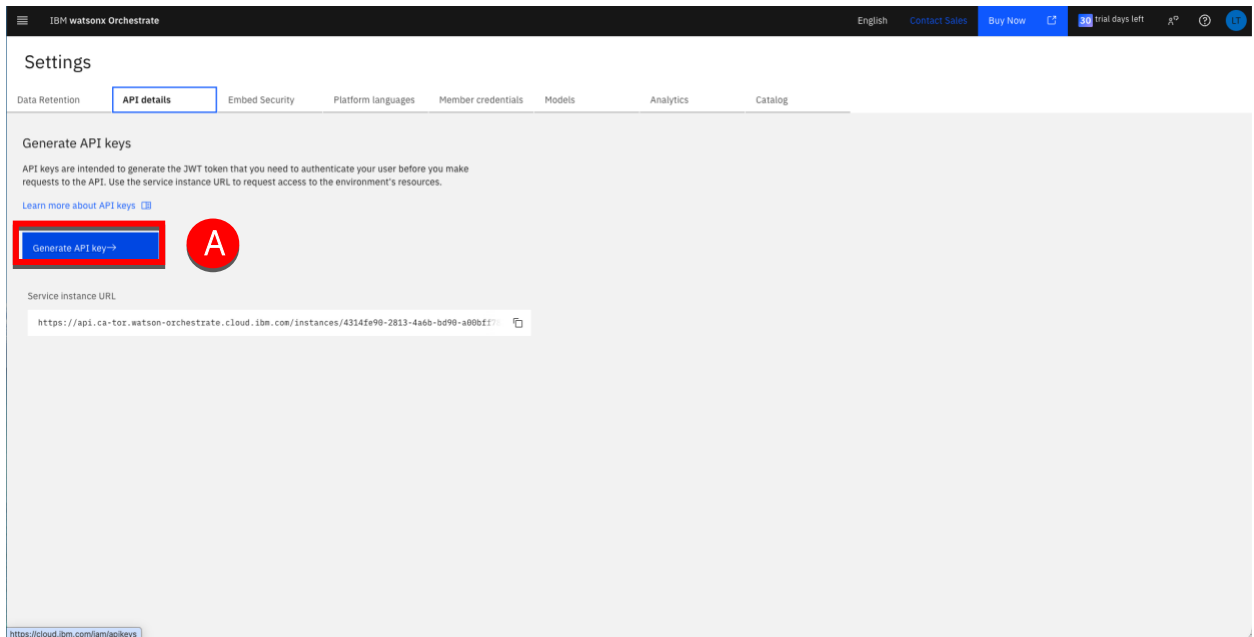


2. Click Create + (A).

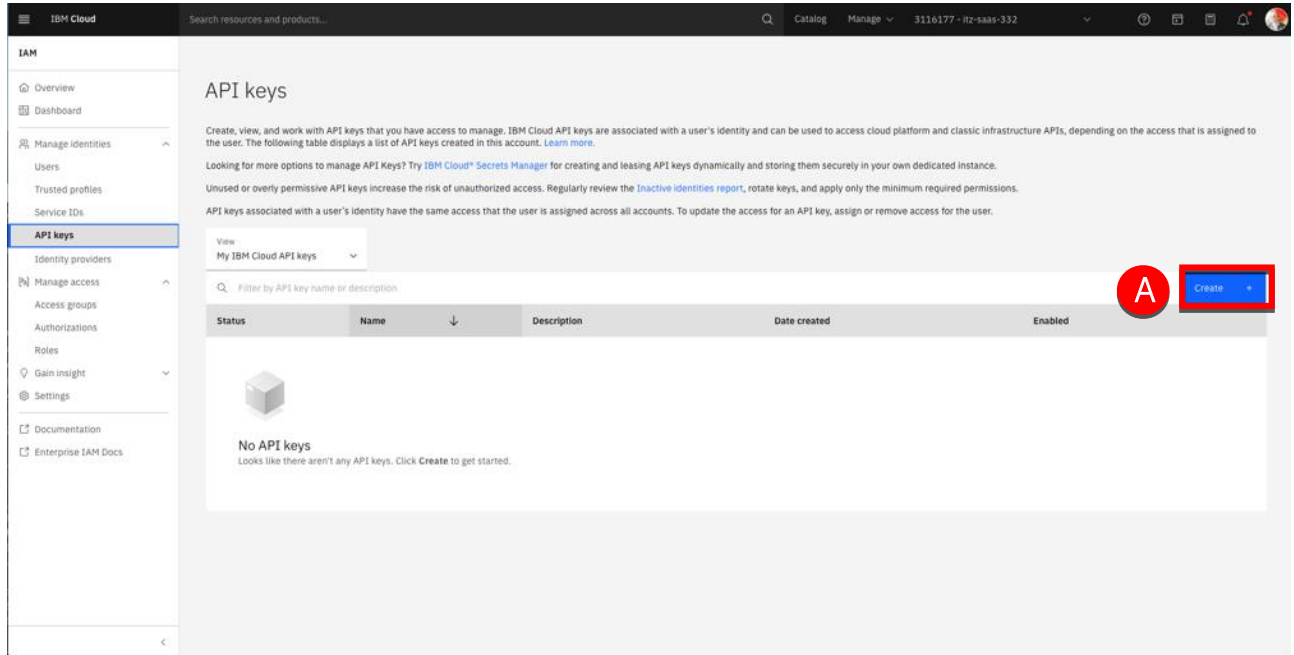


3. Enter any key name (A) then click **Create** (B).

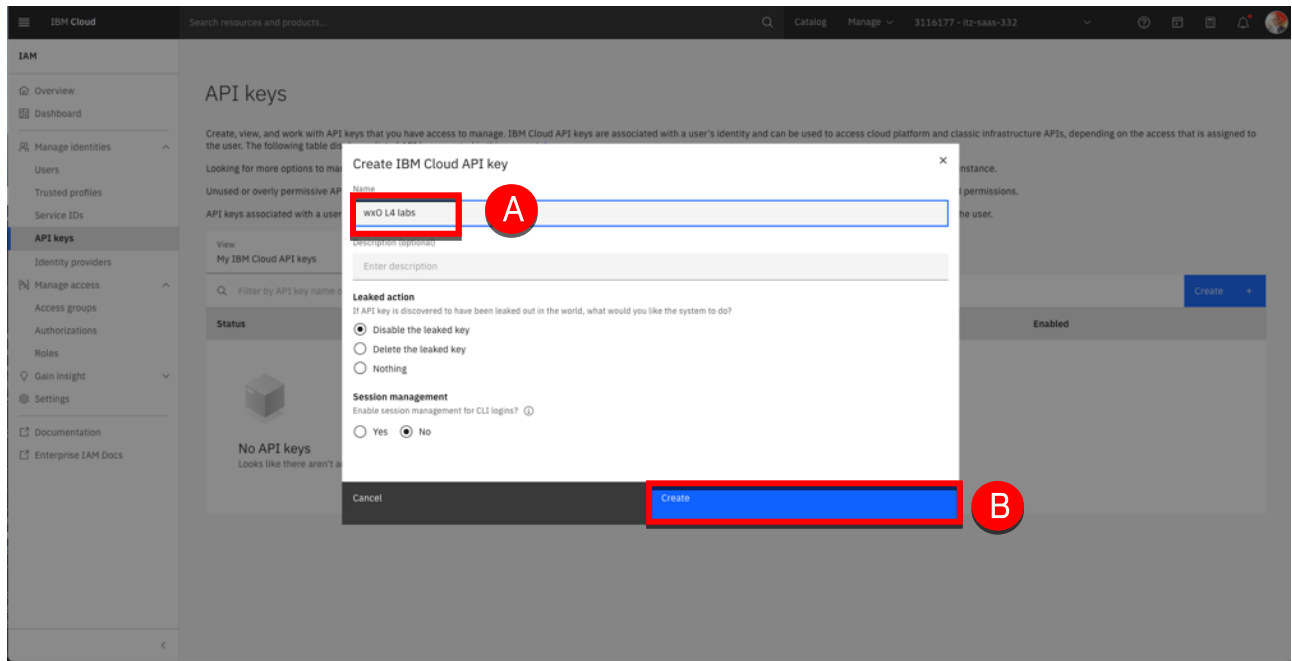

4. Click the **Copy** icon (A) then paste the API key value in item 3 from the lab credentials table you are referencing throughout this course. Click **Close** (B).

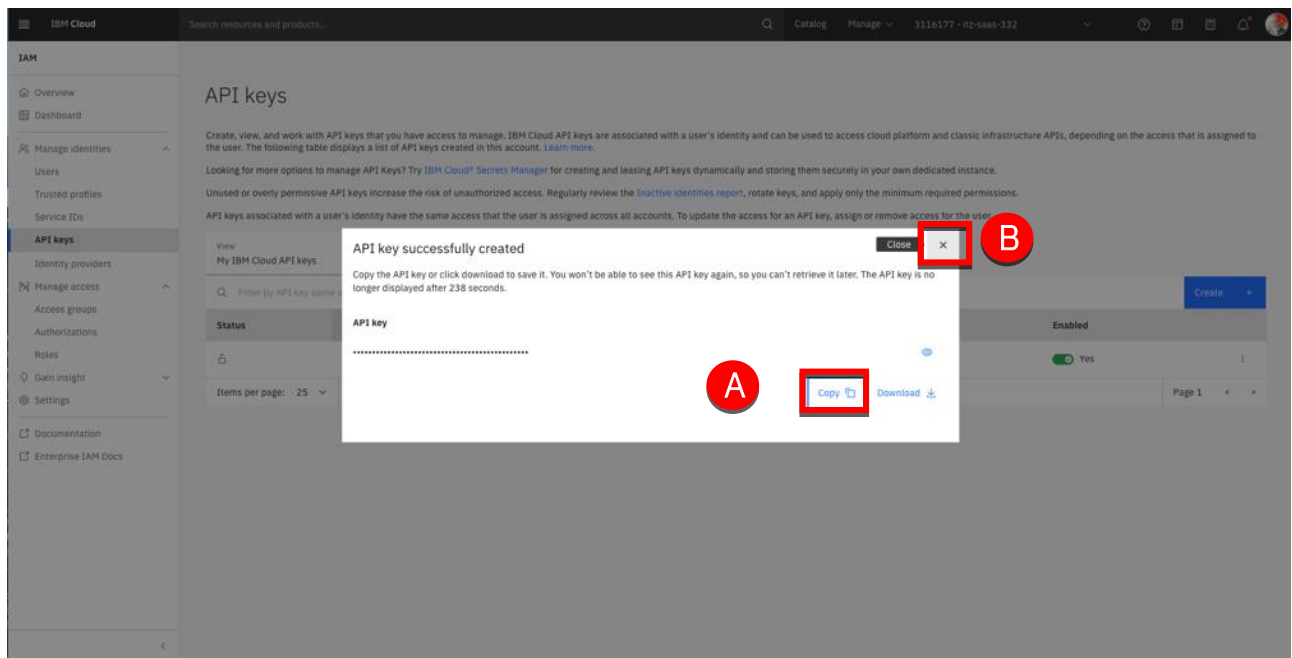

5. Check that your key has been created (A) then close the browser tab.

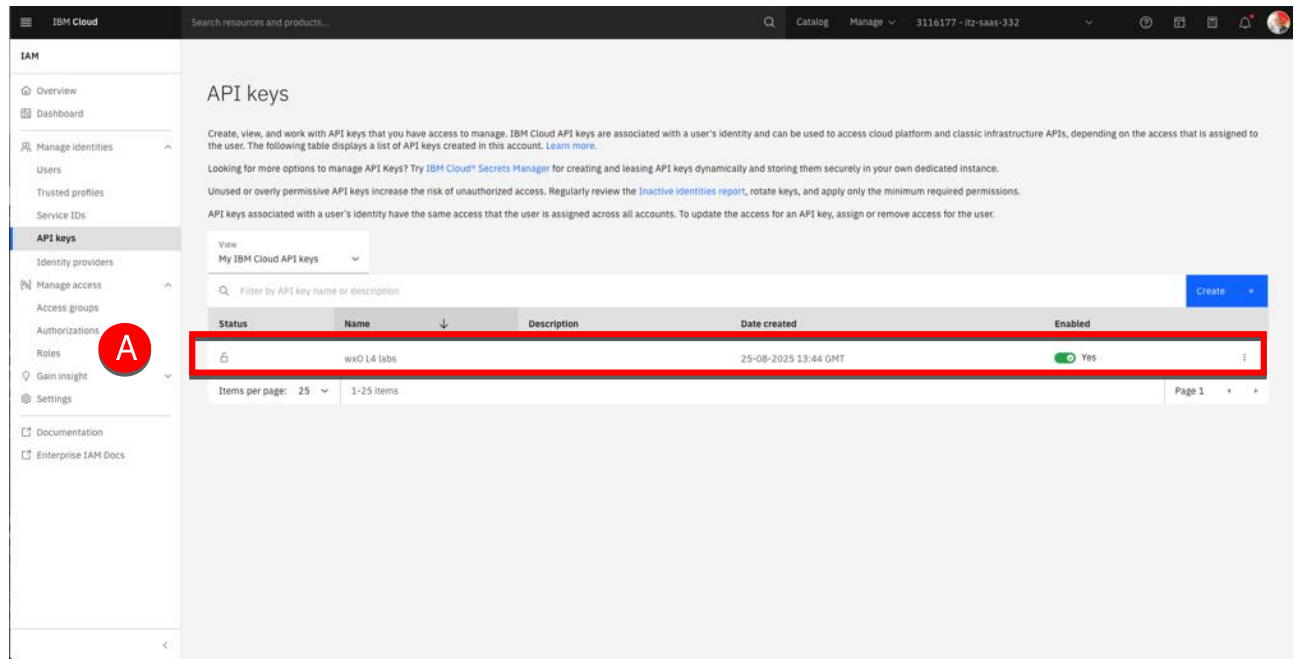


Let's now configure the watsonx Orchestrate ADK.

Install the ADK on your computer

Note: We have used a Mac to create this lab guide. Some Terminal instructions may have to be adapted should you be using a Windows terminal.


It is recommended to proceed with the ADK installation from the **wxo-ADK** folder you have created in the previous step. IT is strongly recommended to create the virtual environment (see next step) directly from this same folder. All the ADK required files are provided in this folder.

1. Open a new terminal window on your computer.
2. Type `cd ~/wxo-ADK` (A) to navigate to your local wxo-ADK folder.

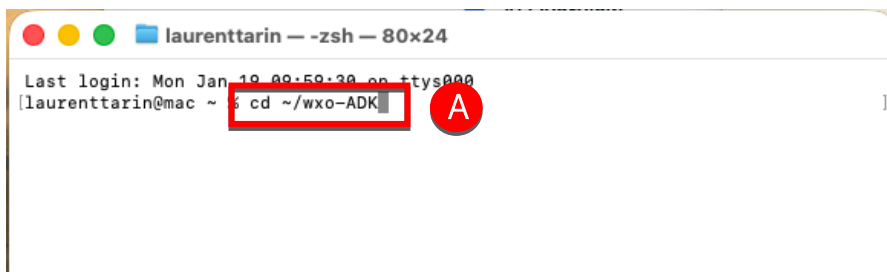


A terminal window titled "laurenttarin — zsh — 80x24". The prompt is "laurenttarin@mac ~". The command "cd ~/wxo-ADK" is entered and highlighted with a red box. A red circle with the letter "A" is next to the command.

3. Type `python --version` (A)

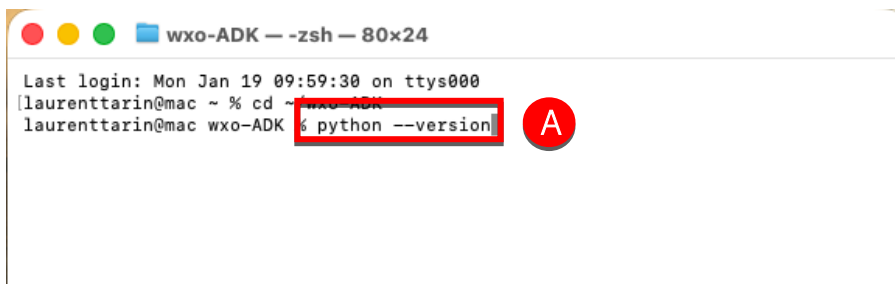


A terminal window titled "wxo-ADK — zsh — 80x24". The prompt is "laurenttarin@mac wxo-ADK". The command "python --version" is entered and highlighted with a red box. A red circle with the letter "A" is next to the command.

4. Check that you are running Python 3.11 or higher (A)

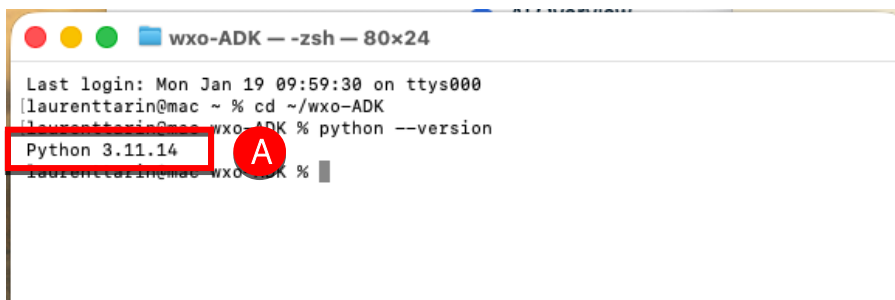

A terminal window titled "wxo-ADK — zsh — 80x24". The prompt is "laurenttarin@mac wxo-ADK". The command "python --version" is entered and highlighted with a red box. The output "Python 3.11.14" is displayed and highlighted with a red box. A red circle with the letter "A" is next to the output.

5. Edit the env file contained in the folder with the editor of your choice.

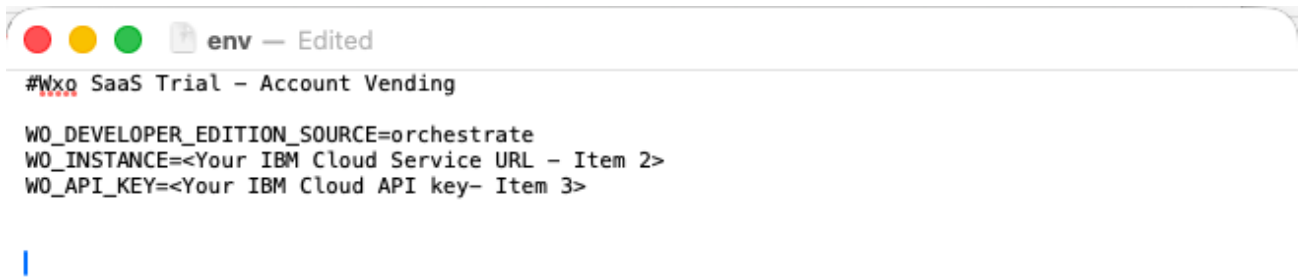


```
#Wxo SaaS Trial - Account Vending

WO_DEVELOPER_EDITION_SOURCE=orchestrate
WO_INSTANCE=<Your IBM Cloud Service URL - Item 2>
WO_API_KEY=<Your IBM Cloud API key- Item 3>
```

This file will be used to start the watsonx Orchestrate server. It provides your watsonx Orchestrate SaaS service URL and your API key to connect to your instance.


6. Edit and replace the WO_Instance with your own URL collected in item 2.

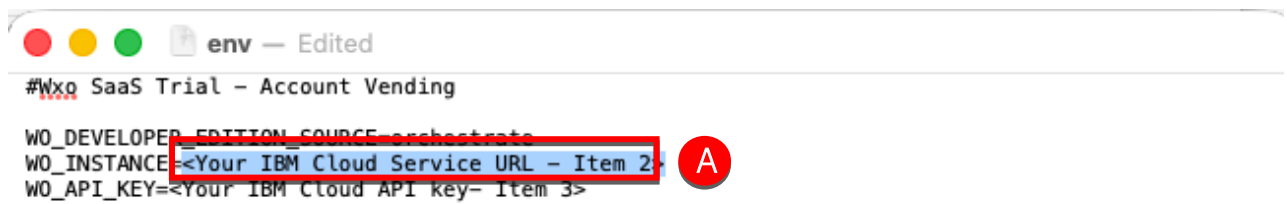

```
#Wxo SaaS Trial - Account Vending

WO_DEVELOPER_EDITION_SOURCE=orchestrate
WO_INSTANCE=<Your IBM Cloud Service URL - Item 2>
WO_API_KEY=<Your IBM Cloud API key- Item 3>
```


7. Edit and replace the WO_Instance with your own URL collected in item 2.

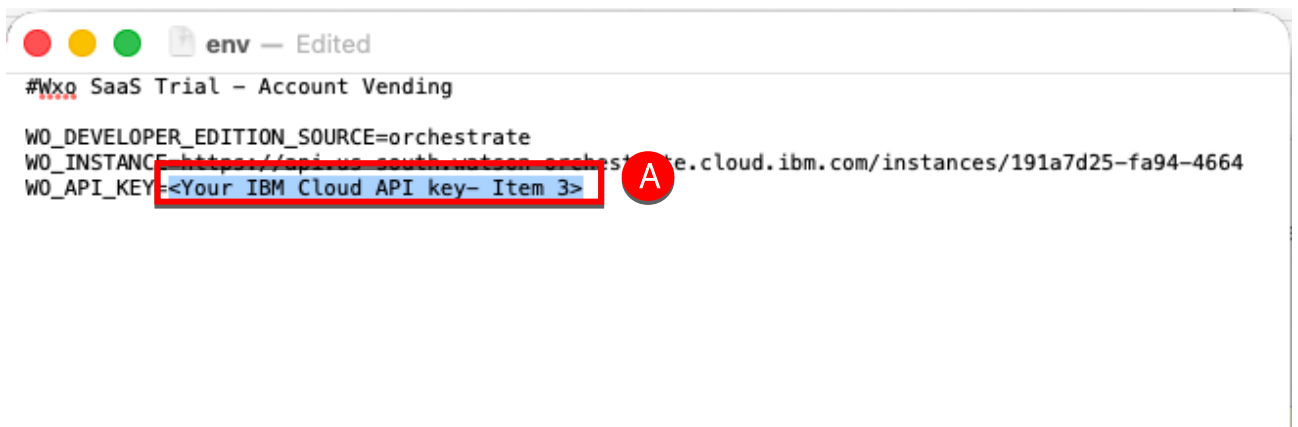

```
#Wxo SaaS Trial - Account Vending

WO_DEVELOPER_EDITION_SOURCE=orchestrate
WO_INSTANCE=https://api.us-south.watsonx-orchestrate.cloud.ibm.com/instances/191a7d25-fa94-4664
WO_API_KEY=<Your IBM Cloud API key- Item 3>
```

8. Save and exit when done (A).

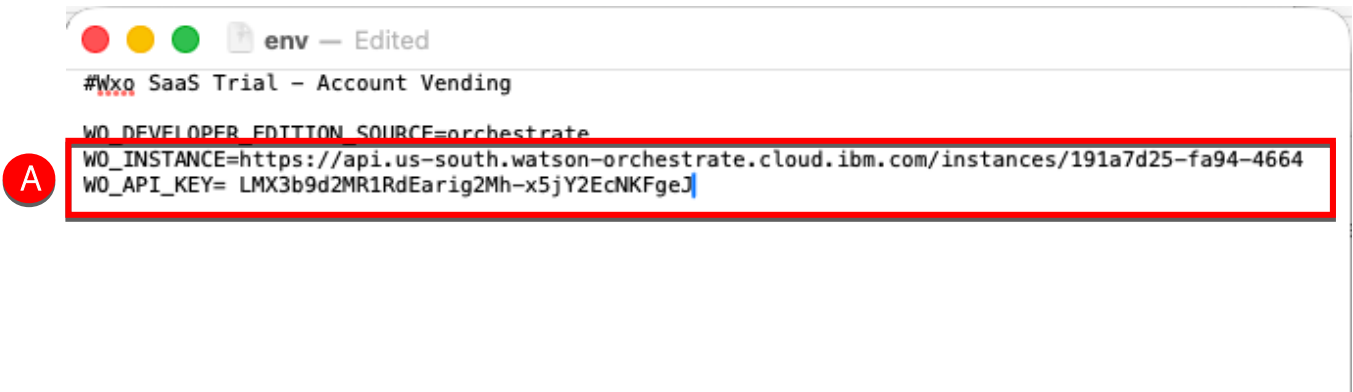

```
env - Edited
#Watsonx SaaS Trial - Account Vending
WO_DEVELOPER_EDITION_SOURCE=orchestrate
WO_INSTANCE=https://api.us-south.watson-orchestrate.cloud.ibm.com/instances/191a7d25-fa94-4664
WO_API_KEY= LMX3b9d2MR1RdEarig2Mh-x5jY2EcNKfgeJ
```

Note for MS Windows users: Some MS windows users have experimented issues with their Docker configuration preventing the ADK server to start correctly. The solution was to add docker specific setup instructions in the env file:

```
DOCKER_IMAGE_PULL_LAYERS_PARALLELISM=true
DOCKER_IMAGE_PULL_PARALLEL_WORKERS_COUNT=7
USE_RANGE_REQUESTS_IN_DOCKER_IMAGE_PULLS=true
WO_VERIFY_SSL=True
IGNORE_DOCKER_LAYER_CACHING=false
```

The value used may deferrer depending on your own configuration. Refer to the [product documentation](#) for more details.

9. Proceed with the **ADK 2.6.0** set-up instructions detailed in the product documentation:
https://developer.watson-orchestrate.ibm.com/getting_started/installing.

Note: Please make sure you have reserved your watsonx Orchestrate SaaS instance before proceeding with the ADK installation on your computer. Detailed instructions to book your watsonx Orchestrate SaaS instance are provided [here](#)

If you are facing an issue with the ADK install on your computer please open an IBM Support ticket at <https://www.ibm.com/mysupport>

10. In your terminal window, type 'orchestrate --version' (A) to validate your ADK version.



11. Check that you are running the ADK 2.6.X version (A).


```
[ADK] $ orchestrate --version
ADK Version: 2.6.0
Langflow Version: 1.0.1
Developer Edition Image Tags (if not overridden in env file)
SERVER_TAG: 27-02-2026-604973067
WORKER_TAG: 27-02-2026-604973067
AI_GATEWAY_TAG: 27-01-2026-6bb3df4
MCP_GATEWAY_TAG: 20260227-develop-98-3b26d70
AGENT_GATEWAY_TAG: 05-11-2025-91a7333
DBTAG: 27-02-2026-604973067
UITAG: 25-02-2026-56fc32
CM_TAG: 27-02-2026-809cbe5
CONNECTIONS_UI_TAG: 05-11-2025-91a7333
```

Note: If you are not running the right version, type 'pip install --upgrade ibm-watsonx-orchestrate==2.6.0' to install the ADK 2.6.

Test your ADK environment


Before starting this step, you must have successfully installed the ADK on your computer following the IBM watsonx Orchestrate Documentation. Refer to the [Install](#) section for more detailed instructions you are not yet done with the install.

1. Open a Terminal window on your **wxO-ADK** folder (A).

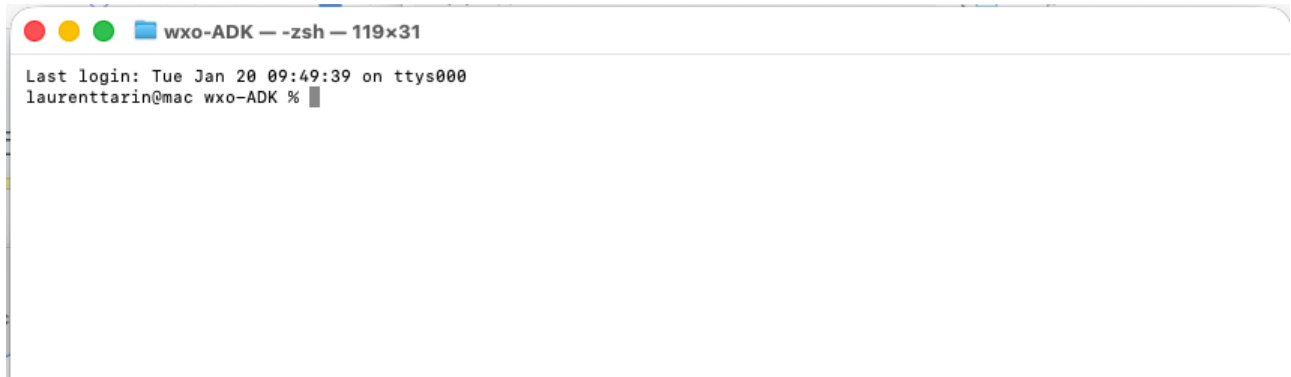


2. Enter the following command into the terminal to start your virtual environment:

```
source .venv/bin/activate
```

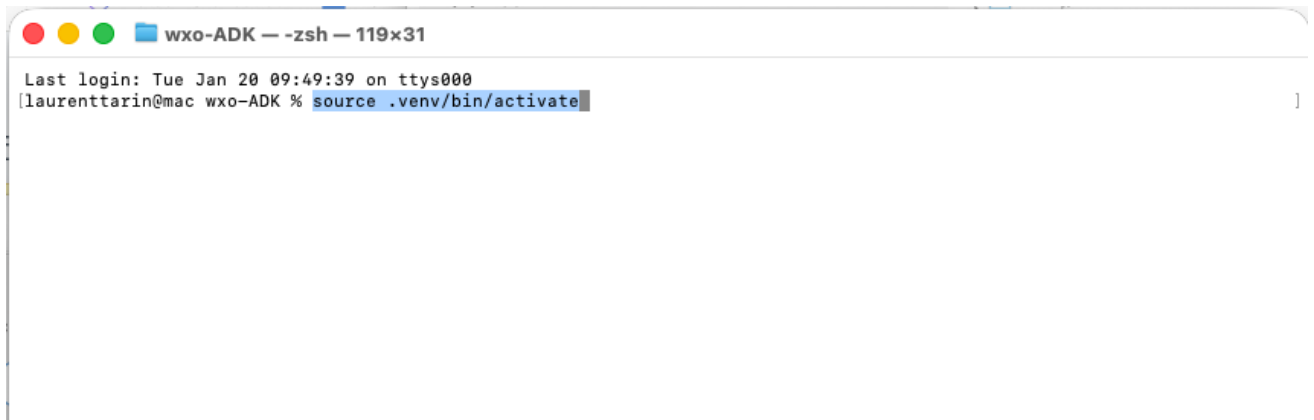

3. Check that the prompt starts with (.venv) (A) indicating that you are in your virtual environment.

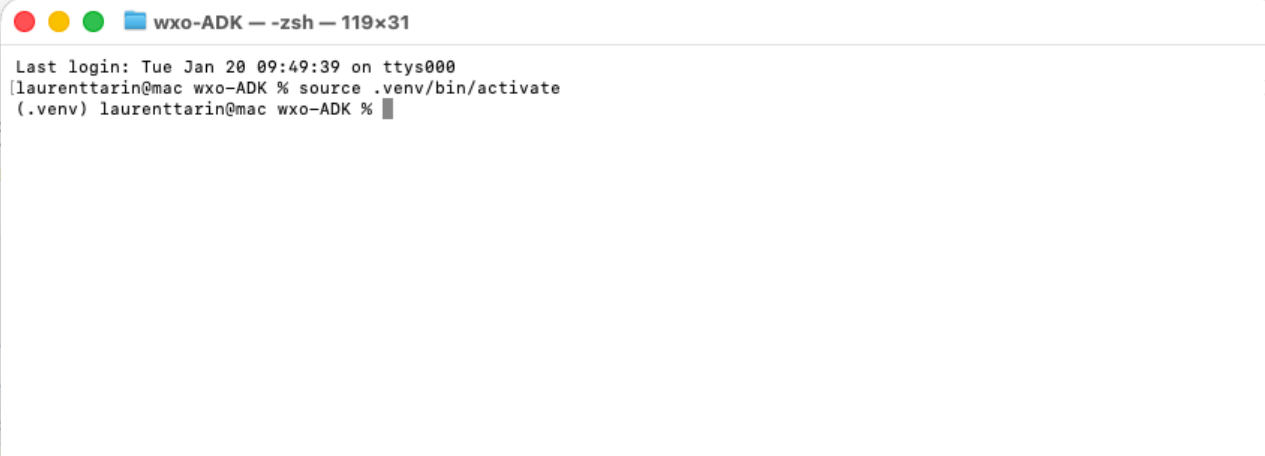


A terminal window titled "wxo-ADK — zsh — 119x31". The output shows the last login time and the execution of the command `source .venv/bin/activate`. The prompt has changed from `laurenttarin@mac wxo-ADK %` to `(.venv) laurenttarin@mac wxo-ADK %`, indicating the virtual environment is active.

```
Last login: Tue Jan 20 09:49:39 on ttys000
[laurenttarin@mac wxo-ADK % source .venv/bin/activate
(.venv) laurenttarin@mac wxo-ADK %
```

4. Enter the following command into the terminal to improve the command visibility, then press Enter:

```
MS Windows users: function prompt{"ADK>"}
Mac users: prompt="ADK >"
```

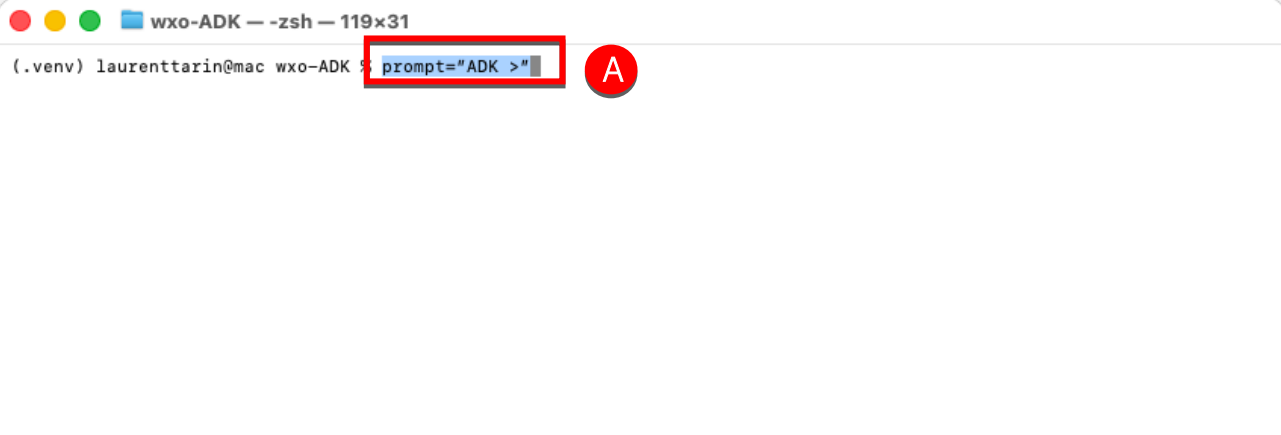

A terminal window titled "wxo-ADK — zsh — 119x31". The prompt is `(.venv) laurenttarin@mac wxo-ADK %`. The command `prompt="ADK >"` is being entered and is highlighted with a red box. A red circle with the letter 'A' is next to the command, indicating it is the correct command to enter.

```
(.venv) laurenttarin@mac wxo-ADK % prompt="ADK >"
```

5. Enter the following command into the terminal to start the server with your env configuration, then press Enter.

```
orchestrate server start -l -e env --with-ai-builder
```

```
wxo-ADK — laurenttarin@lima-ibm-watsonx-orchestrate: /Users/laurenttarin/wxo-ADK — zsh
ADK > orchestrate server start -l -e env --with-ai-builder
```

6. Enter a 18-character password (A) when prompted after the first server start command.

```
wxo-ADK — orchestrate server start -l -e env --with-ai-builder — 127x29

AI_GATEWAY_TAG: 27-01-2026-6bb3df4
MCP_GATEWAY_TAG: 20260227-develop-98-3b26d70
AGENT_GATEWAY_TAG: 05-11-2025-91a7333
DBTAG: 27-02-2026-604973067
UITAG: 25-02-2026-56fc32
CM_TAG: 27-02-2026-809cbe5
CONNECTIONS_UI_TAG: 25-11-2025-2129c31
TRM_TAG: 26-02-2026-398f7c3
TR_TAG: 26-02-2026-398f7c3
AR_TAG: 27-02-2026-55be48d
BUILDER_TAG: 05-03-2026-67c28fc
FLOW_RUNTIME_TAG: 09-03-2026-a527623
AGENT_ANALYTICS_TAG: 10-10-2025
JAEGER_PROXY_TAG: 09-10-2025
SOCKET_HANDLER_TAG: 06-02-2025-1bddb56
CPE_TAG: 26-11-2025-b6cb912
AGENT_ARCHITECT_TAG: 20251125-develop-60-a8ff9f8
VOICE_CONTROLLER_TAG: 12-01-2026-4df2a02
LANGFLOW_TAG: 1.7.1
WDU_TAG: 2.12.2
DOCPROC_DPS_TAG: 20260303-master-409-8d12c6d
DOCPROC_LLMSERVICE_TAG: 20260221-main-222-c633ed6
DOCPROC_CACHE_TAG: 20260224-master-194-2b3dcb3
DOCPROC_DPI_TAG: 20260304-master-440-299781bc
ETCD_TAG:
ELASTICSEARCH_TAG:
[ADK >
[ADK > orchestrate server start -l -e env --with-ai-builder
Set Master Password for Local Services: ?
```

Note: This password corresponds to the password for orchestrate@ibm.com that will be used to connect Langflow. It will be displayed after each start-up of the server.

7. Wait for the images to be pulled and the server to be started.

```
wxo-ADK — limactl • orchestrate server start -l -e env --with-ai-builder — 127x29

CM_TAG: 27-02-2026-809cbe5
CONNECTIONS_UI_TAG: 25-11-2025-2129c31
TRM_TAG: 26-02-2026-398f7c3
TR_TAG: 26-02-2026-398f7c3
AR_TAG: 27-02-2026-55be48d
BUILDER_TAG: 05-03-2026-67c28fc
FLOW_RUNTIME_TAG: 09-03-2026-a527623
AGENT_ANALYTICS_TAG: 10-10-2025
JAEGER_PROXY_TAG: 09-10-2025
SOCKET_HANDLER_TAG: 06-02-2025-1bddb56
CPE_TAG: 26-11-2025-b6cb912
AGENT_ARCHITECT_TAG: 20251125-develop-68-a8ff9f8
VOICE_CONTROLLER_TAG: 12-01-2026-4df2a02
LANGFLOW_TAG: 1.7.1
WDU_TAG: 2.12.2
DOCPROC_DPS_TAG: 20260303-master-409-8d12c6d
DOCPROC_LLMSERVICE_TAG: 20260221-main-222-c633ed6
DOCPROC_CACHE_TAG: 20260224-master-194-2b3dcb3
DOCPROC_DPI_TAG: 20260304-master-440-299781bc
ETCD_TAG:
ELASTICSEARCH_TAG:
[ADK >
[ADK >orchestrate server start -l -e env --with-ai-builder
[Set Master Password for Local Services:
[INFO] - Auto-detecting local IP address for async tool callbacks...
[INFO] - Auto-configured CALLBACK_HOST_URL to: http://9.83.134.220:4321
[INFO] - Found existing VM named ibm-watsonx-orchestrate
[INFO] - VM is not running, starting...
█
```

Note: Some services may fail to start on the first attempt, and you may encounter issues connecting to the docker repository. Retry the start command in this situation, depending on the volume of requests, it can take several attempts to connect.

When startup is complete the terminal output will resemble the example below, restart can take 2-3 minutes to complete. The local server will be ready when you will see this **INFO** in the terminal screen (A):

```
wxo-ADK — -zsh — 127x29

Applying observability migration: 00_init_db.sql
Applying observability migration: 01_create_tables.sql
Applying observability migration: 02_triggers_and_functions.sql
Applying observability migration: 03_security.sql
Applying observability migration: 04_rls_policies.sql
Applying observability migration: 20250116.sql
Applying observability migration: 20251201.sql
Applying observability migration: 20260210.sql
WARN[0000] The "WXO_AWS_IAM_URL" variable is not set. Defaulting to a blank string.
WARN[0000] The "SKILLS_CATALOG_ENDPOINT" variable is not set. Defaulting to a blank string.
WARN[0000] The "TEAM_SERVER_ENDPOINT" variable is not set. Defaulting to a blank string.
WARN[0000] The "WXO_API_KEY" variable is not set. Defaulting to a blank string.
Creating mcpgateway DB
WARN[0000] The "WXO_API_KEY" variable is not set. Defaulting to a blank string.
WARN[0000] The "WXO_AWS_IAM_URL" variable is not set. Defaulting to a blank string.
WARN[0000] The "TEAM_SERVER_ENDPOINT" variable is not set. Defaulting to a blank string.
WARN[0000] The "SKILLS_CATALOG_ENDPOINT" variable is not set. Defaulting to a blank string.
Creating architect DB
Applying architect migration: 20251107.sql
Applying architect migration: 20251125.sql
[INFO] - Waiting for architect server to be fully initialized and ready.
[INFO] - Orchestrate services initialized successfully
[INFO] - no local tenant found. A default tenant is created
[INFO] - You can run 'orchestrate env activate local' to set your environment or 'orchestrate chat start' to start the UI service and begin chatting.
[INFO] - You can access the observability platform Langfuse at http://localhost:8080 username: orchestrate@ibm.com, password: AZERTYUIOPQSDFGHJK
[INFO] - AI Builder feature has been enabled. You can now use AI assisted agent authoring features
```



You are now ready to work with watsonx Orchestrate ADK.

- Note:** Note the default localhost username/password that corresponds to the password you have set when starting the server for the first time.
- Note:** If you are failing to start the server due to some Docker errors, follow the following steps:
- 1- Re-launch the server start command several times. (Timeout issue)
 - 2- Generate a new API key in your SaaS Instance and try again. (API key issue)
 - 3- Delete your Techzone SaaS reservation and book a new one to be onboarded on a different cloud account (Techzone environment issue)

Additional orchestrate ADK commands:

If you need to stop, or reset your server, or stop the chat server, the following commands can be used. Note that these steps are for information only, and do not need to be performed here.

If you need to stop your server, enter the following command into the terminal, then press Enter. (Don't do this if you have just setup your environment as you will need the server running).

```
orchestrate server stop
```

To reset your server and stop it, enter the following command into the terminal, then press Enter.

```
orchestrate server reset
```

To stop your chat service, enter the following command into the terminal, then press Enter.

```
orchestrate chat stop
```

To delete all the orchestrate files and VM image Enter.

```
orchestrate server purge
```

Validate your environment

In this section you will deploy a simple agent and test it using the watsonx Orchestrate chat interface. This step is just to validate that your environment is correctly configured to perform the other labs. The configuration of the agent will not be explained in this section, it's only purpose is to validate that your environment has been configured correctly. These instructions assume your server is running.

1. Enter the following command into the terminal (A) to create an agent.

```
orchestrate agents import -f city-agent/city_agent.yaml
```

```
Skipping already applied migration: 20251023.sql
Skipping already applied migration: 20251029.sql
Skipping already applied migration: 20251101.sql
Skipping already applied migration: 20251103.sql
Skipping already applied migration: 20251104.sql
Skipping already applied migration: 20251107.sql
Skipping already applied migration: 20251110.sql
Skipping already applied migration: 20251111.sql
Skipping already applied migration: 20251112.sql
Existing wxo_observability DB found
Skipping already applied observability migration: 00_init_db.sql
Skipping already applied observability migration: 01_create_tables.sql
Skipping already applied observability migration: 02_triggers_and_functions.sql
Skipping already applied observability migration: 03_security.sql
Skipping already applied observability migration: 04_rls_policies.sql
Skipping already applied observability migration: 20250116.sql
[INFO] - Migration ran successfully.
[INFO] - Waiting for orchestrate server to be fully initialized and ready...
[INFO] - Orchestrate services initialized successfully
[INFO] - local tenant found
[INFO] - You can run 'orchestrate env activate local' to set your environment or 'orchestrate chat start' to start the
UI service and begin chatting.
[INFO] - You can access the observability platform Langfuse at http://localhost:3010, username: orchestrate@ibm.com, pa
ssword: orchestrate
ADK >orchestrate agents import -f city-agent/city_agent.yaml
```



2. Enter the following command into the terminal (A) to start the chat server.


```
orchestrate chat start
```

```


-----
Skipping already applied migration: 20251111.sql
Skipping already applied migration: 20251112.sql
Existing wxo_observability DB found
Skipping already applied observability migration: 00_init_db.sql
Skipping already applied observability migration: 01_create_tables.sql
Skipping already applied observability migration: 02_triggers_and_functions.sql
Skipping already applied observability migration: 03_security.sql
Skipping already applied observability migration: 04_rls_policies.sql
Skipping already applied observability migration: 20250116.sql
[INFO] - Migration ran successfully.
[INFO] - Waiting for orchestrate server to be fully initialized and ready...
[INFO] - Orchestrate services initialized successfully
[INFO] - local tenant found
[INFO] - You can run 'orchestrate env activate local' to set your environment or 'orchestrate chat start' to start the
UI service and begin chatting.
[INFO] - You can access the observability platform Langfuse at http://localhost:3010, username: orchestrate@ibm.com, pa
ssword: orchestrate
ADK >orchestrate agents import -f city-agent/city_agent.yaml
[INFO] - Agent 'city_agent' imported successfully
ADK >orchestrate chat start

```


- When the browser opens, select the city-agent (A).

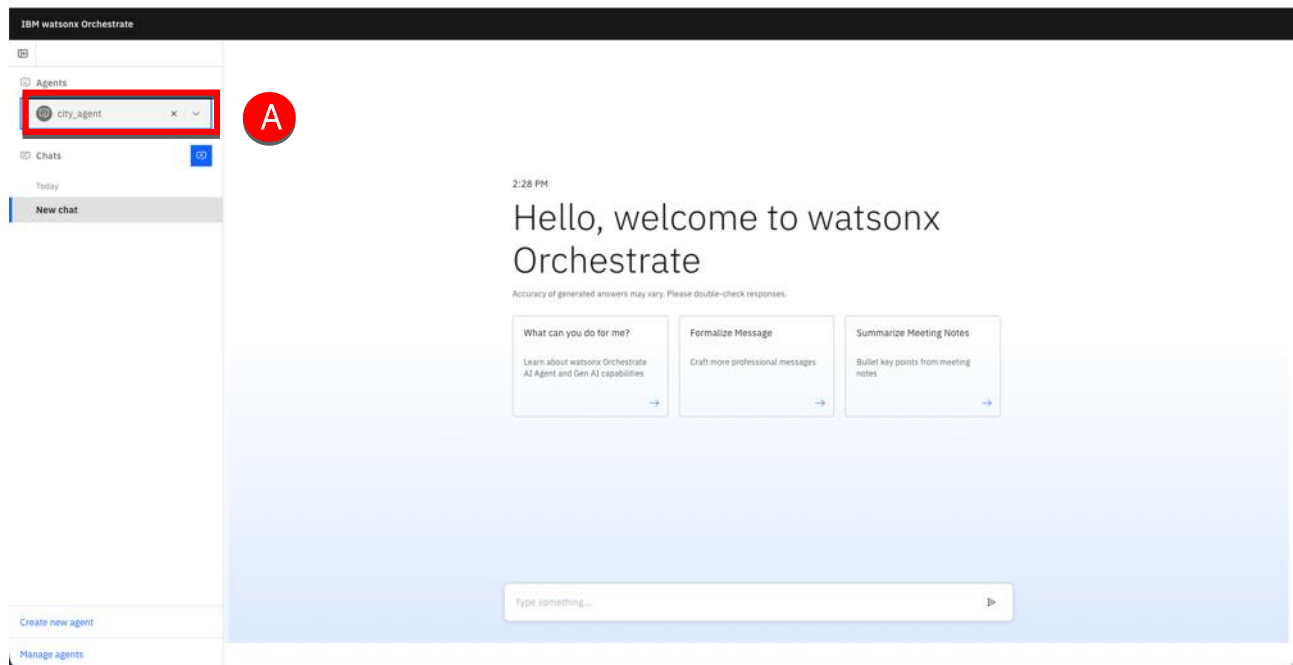

4. Enter “Is Paris a nice place to visit?” into the chat window (A), then press Enter.

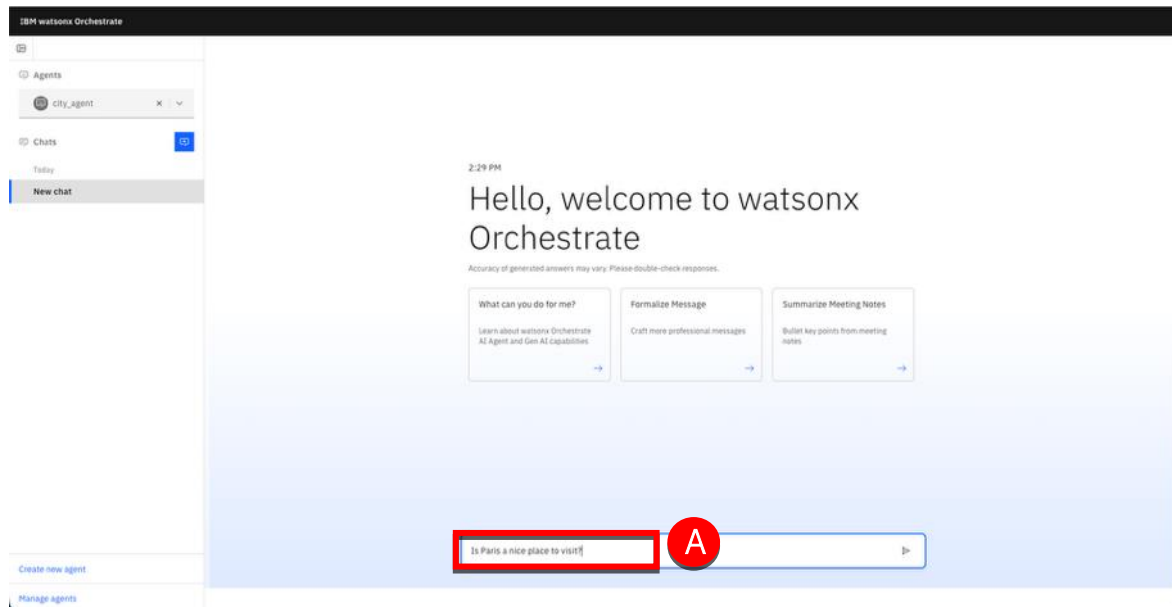

5. Wait for the answer (A).

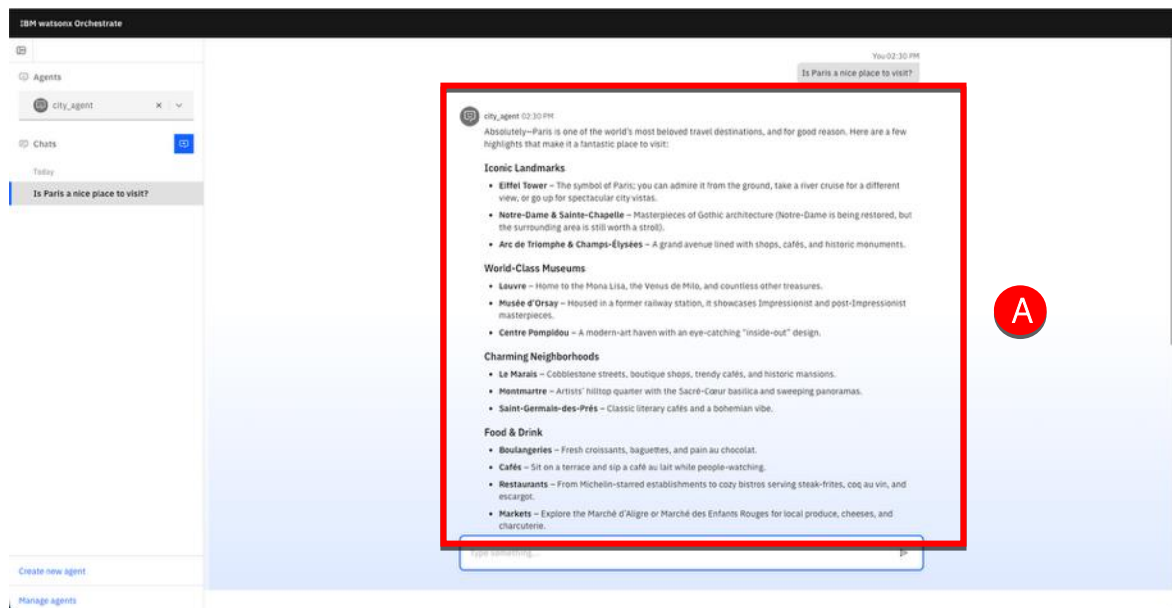

If the system responded with an answer, the agent is working correctly, and the system is configured correctly to work with the foundation models deployed in watsonx.ai.

Install required tools and accounts

Bruno

Bruno is a fast, open sources API client that you will use to interact with the watsonx Orchestrate APIs during this lab.


Install Bruno on your computer

To install Bruno, just visit <https://www.usebruno.com/downloads> and select the installer that corresponds to your operating system (Mac or Windows). Follow your corresponding operating system applications install procedure.


Configure Bruno

You will need to create a dedicated workspace in Bruno. The workspace definition is included in the wxO-ADK archive you have downloaded in the previous steps. These instructions will drive your through this process.


1. Start the Bruno application installed in the previous section.
2. Click **Import Collection** (A).

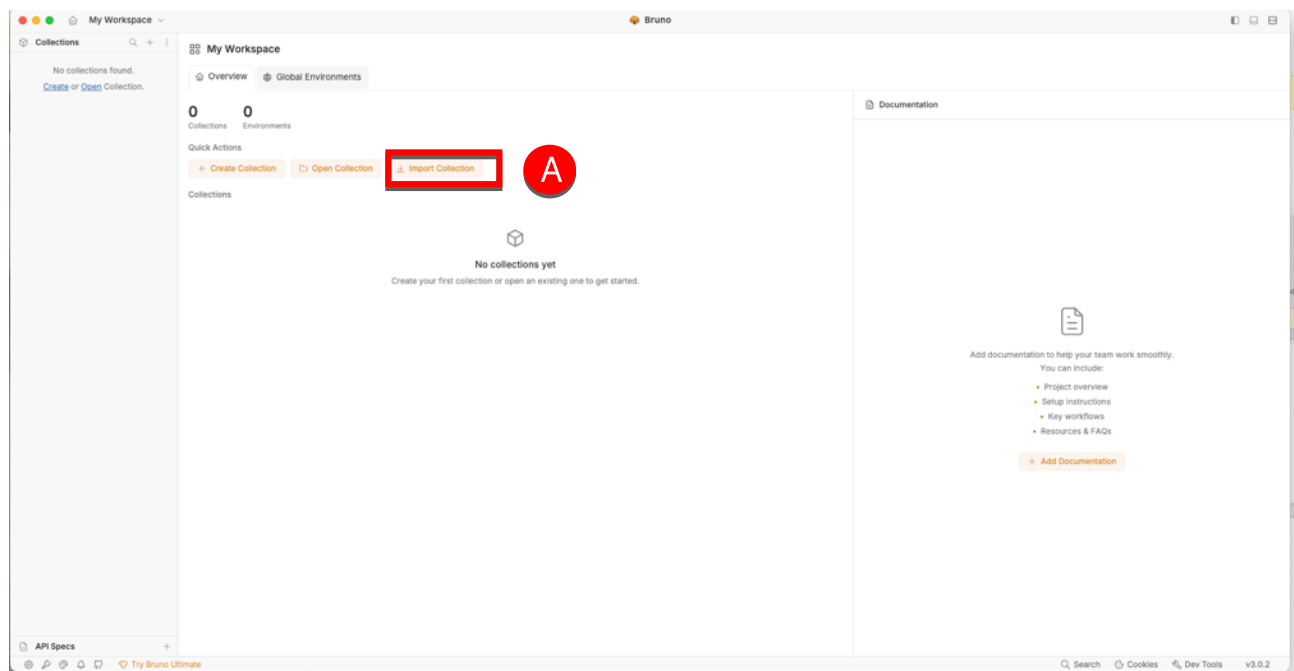


3. Click **Choose file(s)** (A).

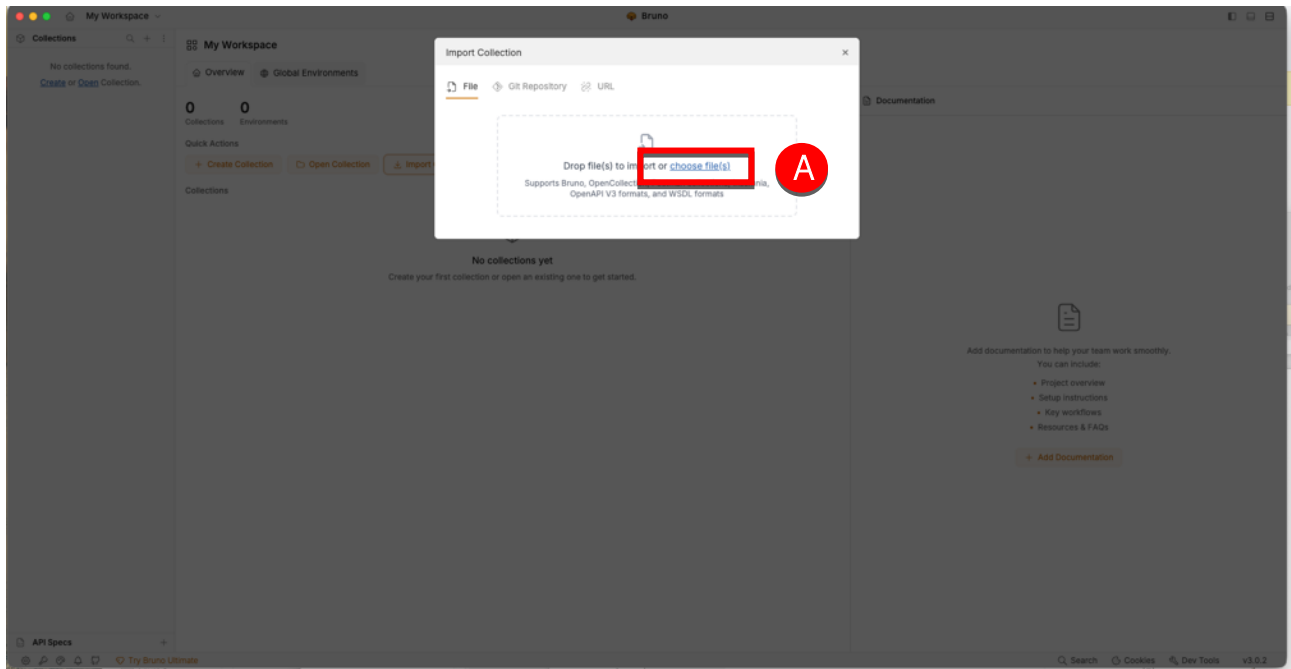


4. Go to your local **wxo-ADK** folder (A), open the **bruno** sub-folder (B) and select **wxo-api.json** file (C). Click **Open** (D).

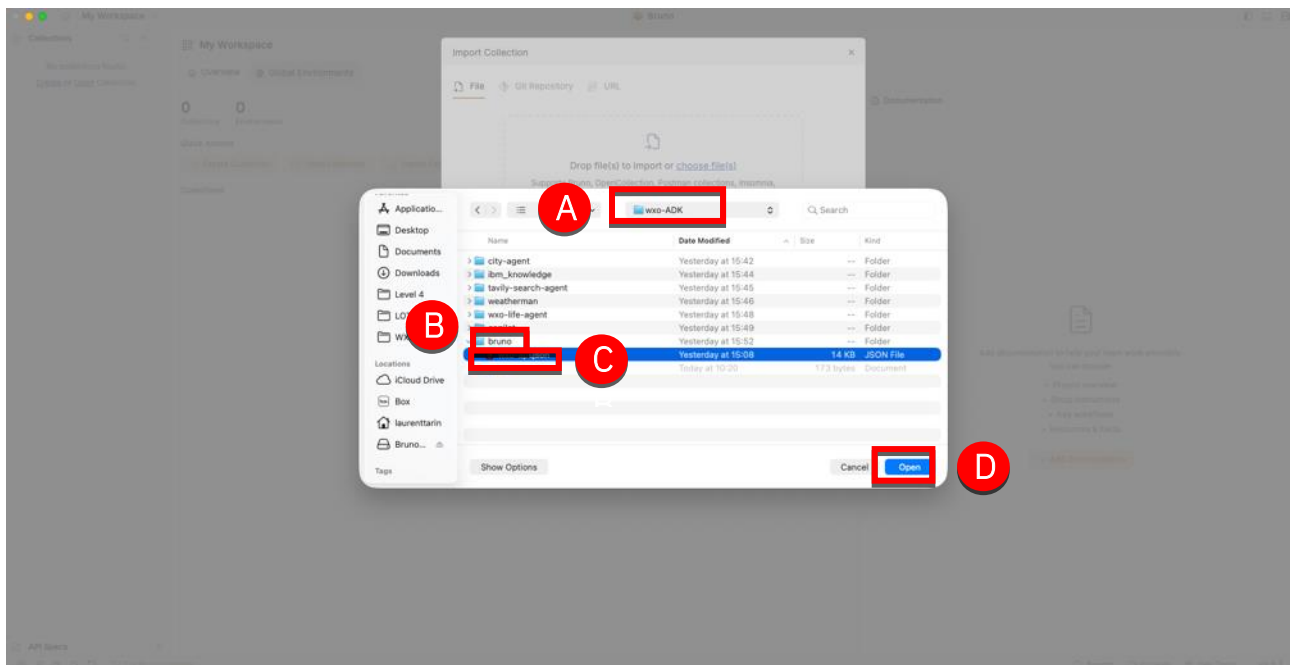


5. Click **Browse** (A) to select a file location.

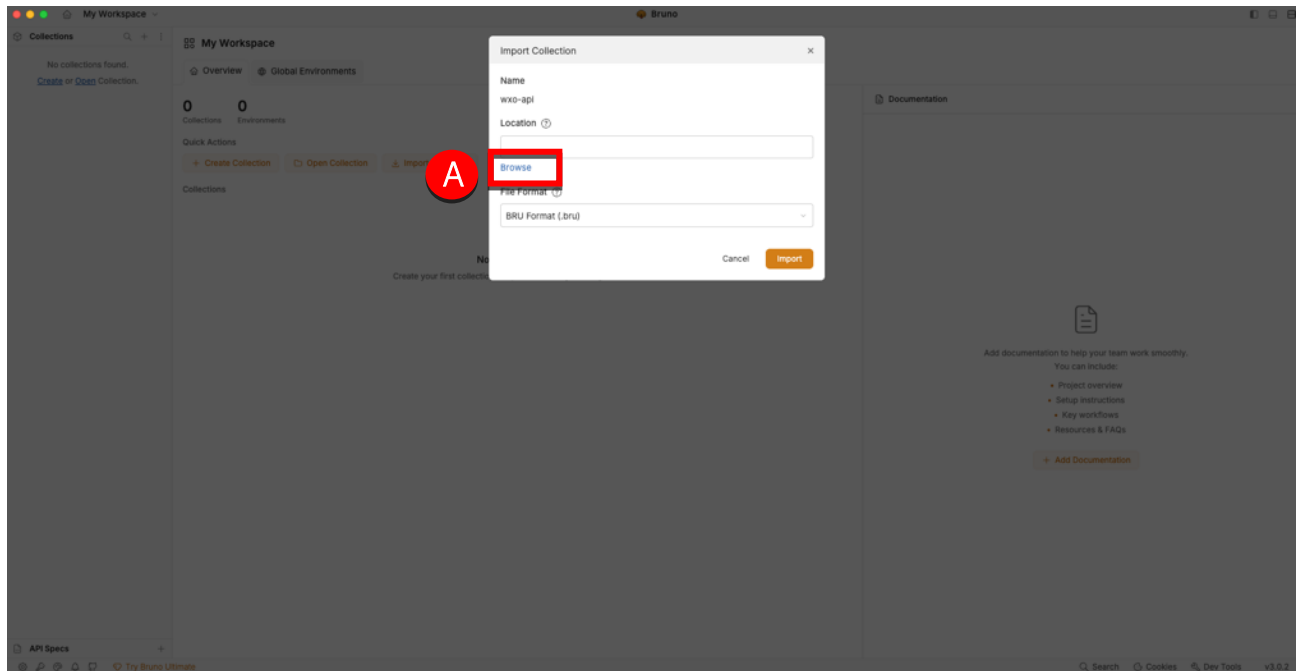


6. Select the **bruno** folder (A) and click **Open** (B).

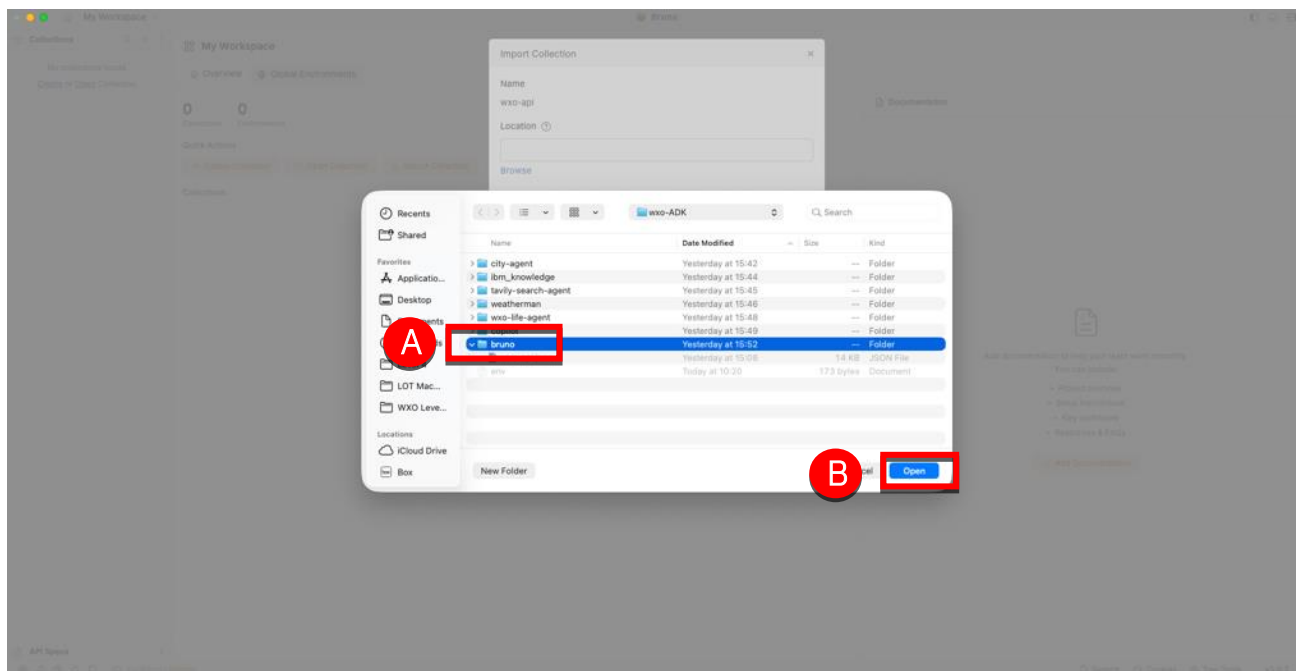


7. Click **Import** (A).

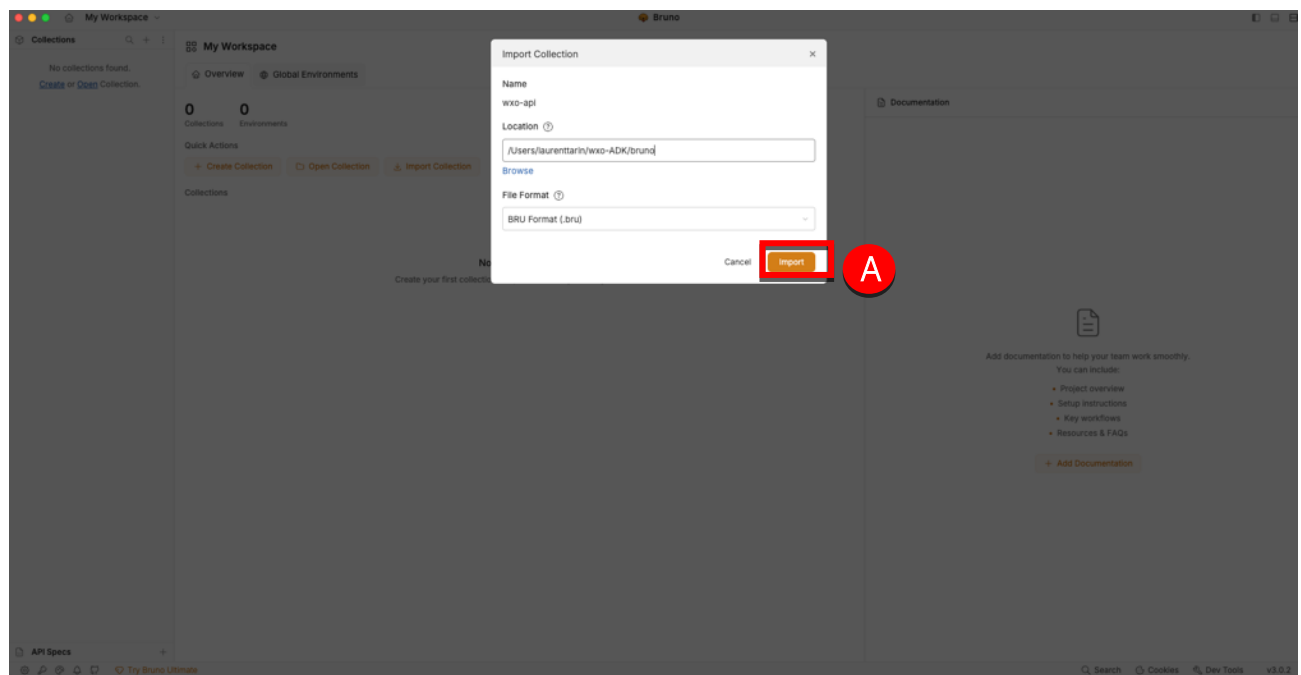


8. Expand the **wxo-api** folder (A).

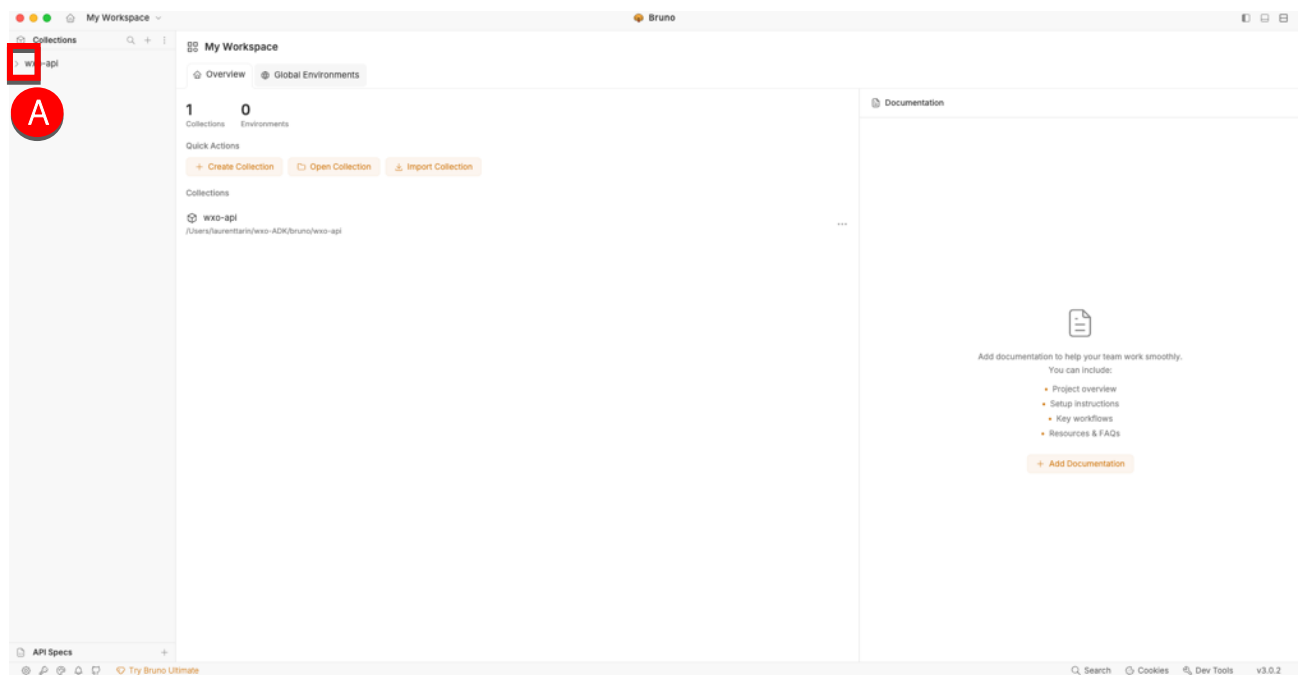


9. Expand the environment menu (A).

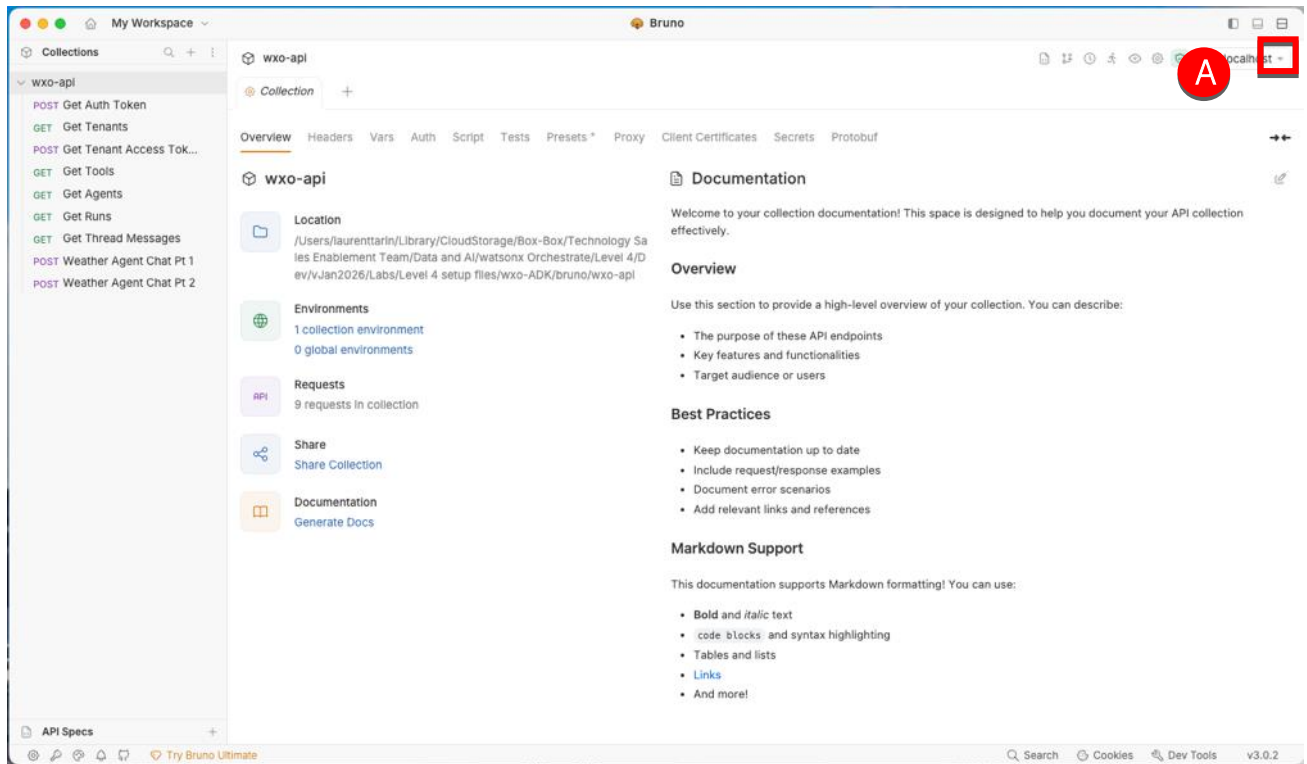


10. Select localhost (A).

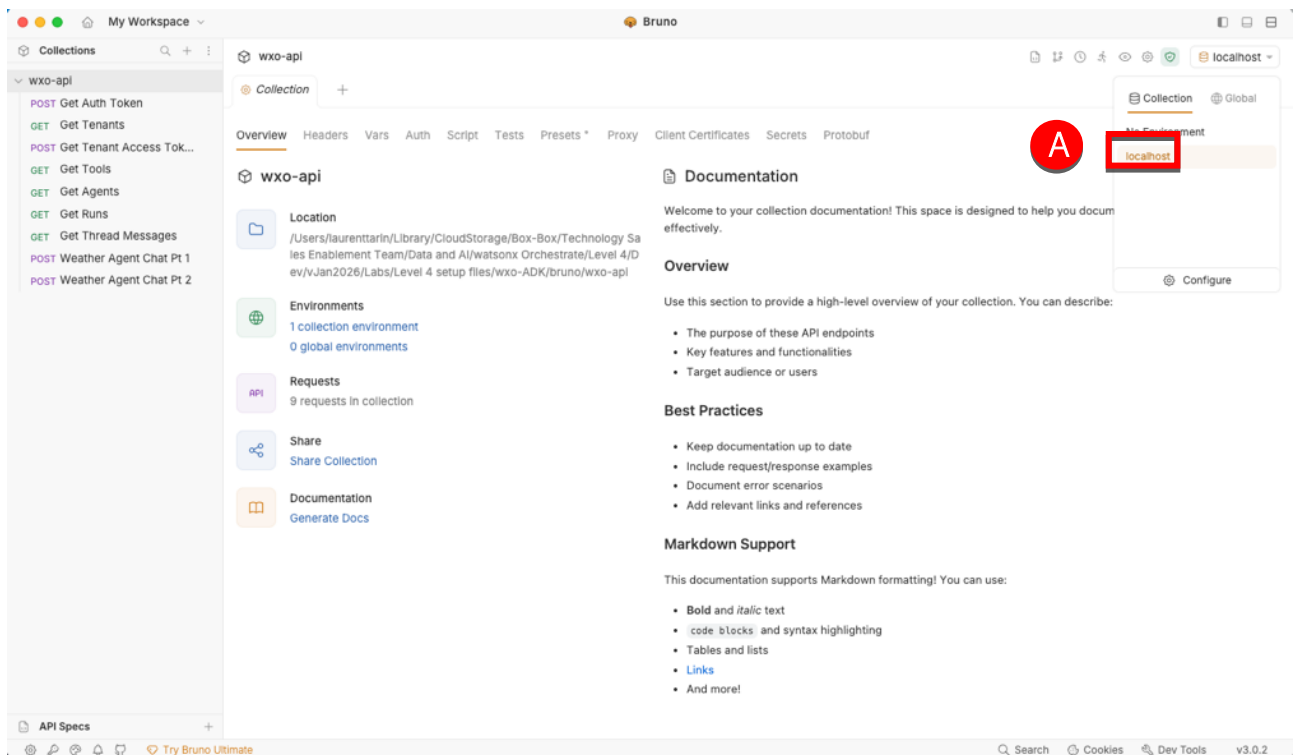


11. Click Get Auth Token (A).

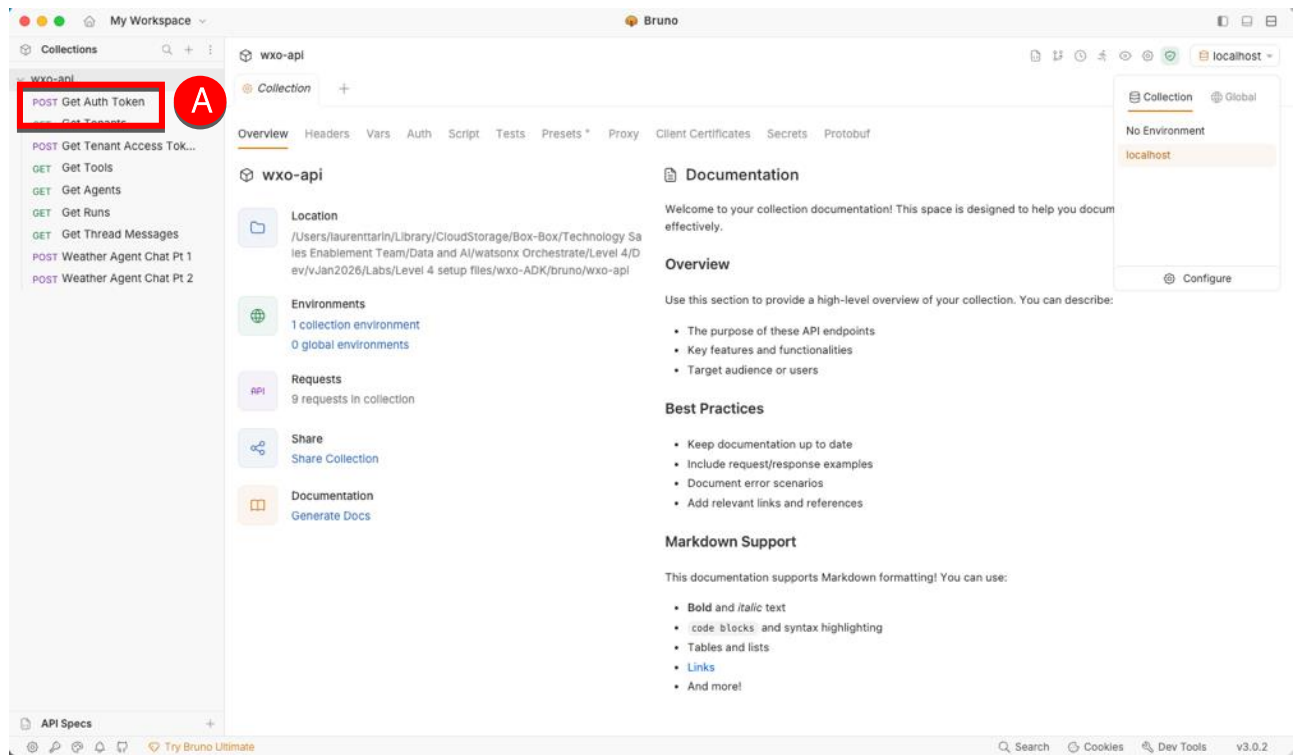

12. Click the Body tab (A).

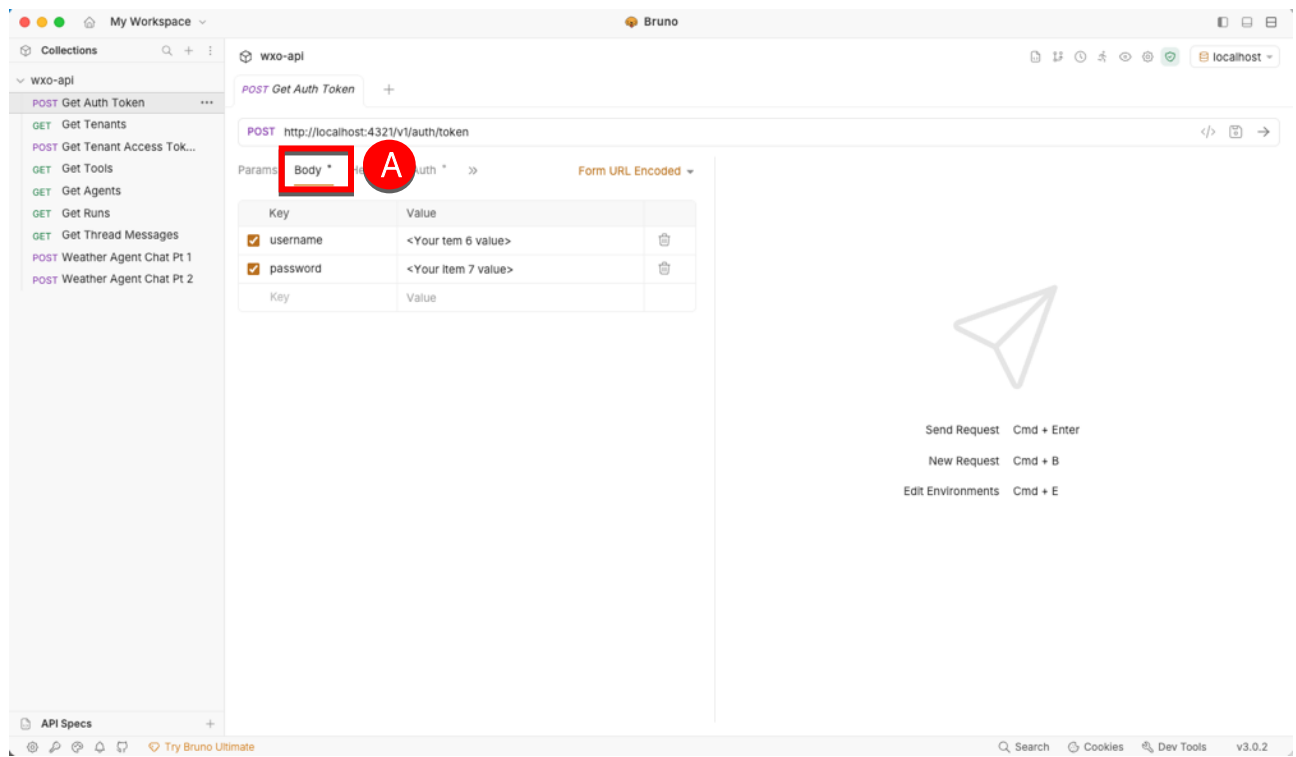


13. In the Value column, replace username with [Item 6](#) in your credentials (A) and password with [Item 7](#) in your credentials (B).

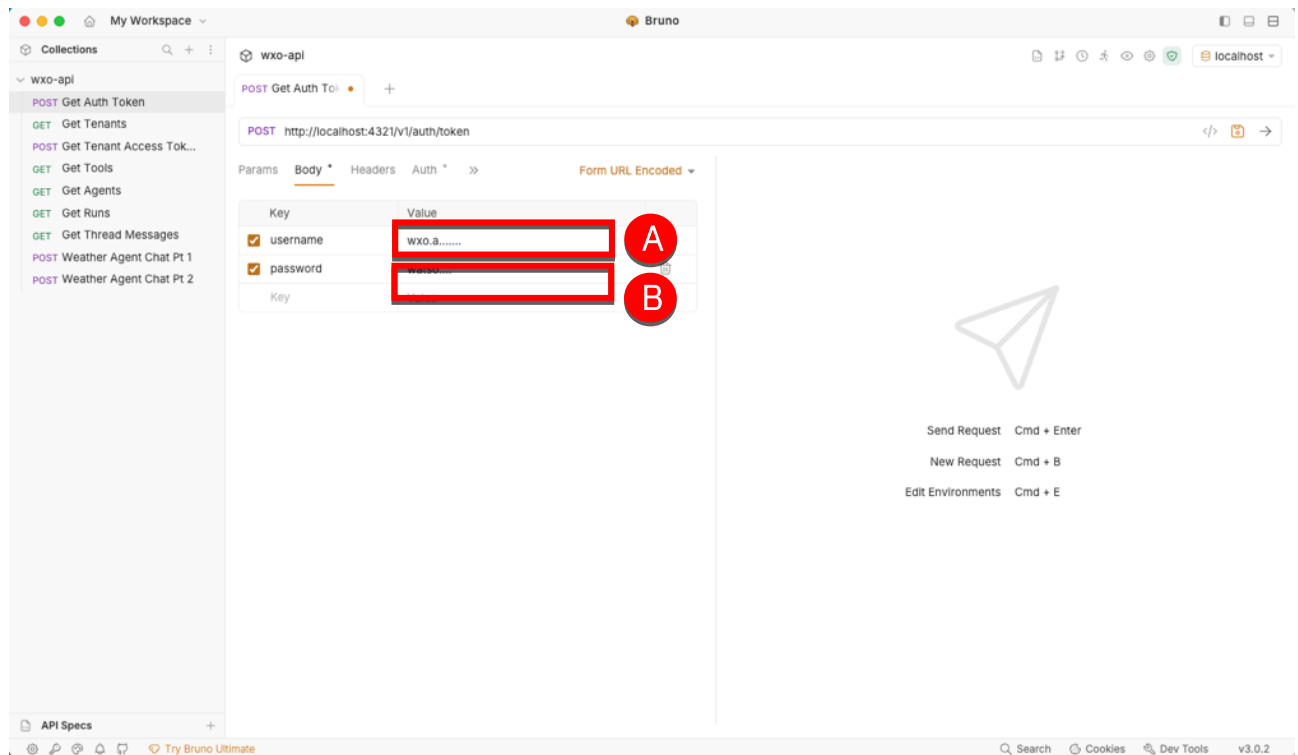


Note: the credential values have been truncated for the screenshot.

14. Click Get Tenant Access Token (A).

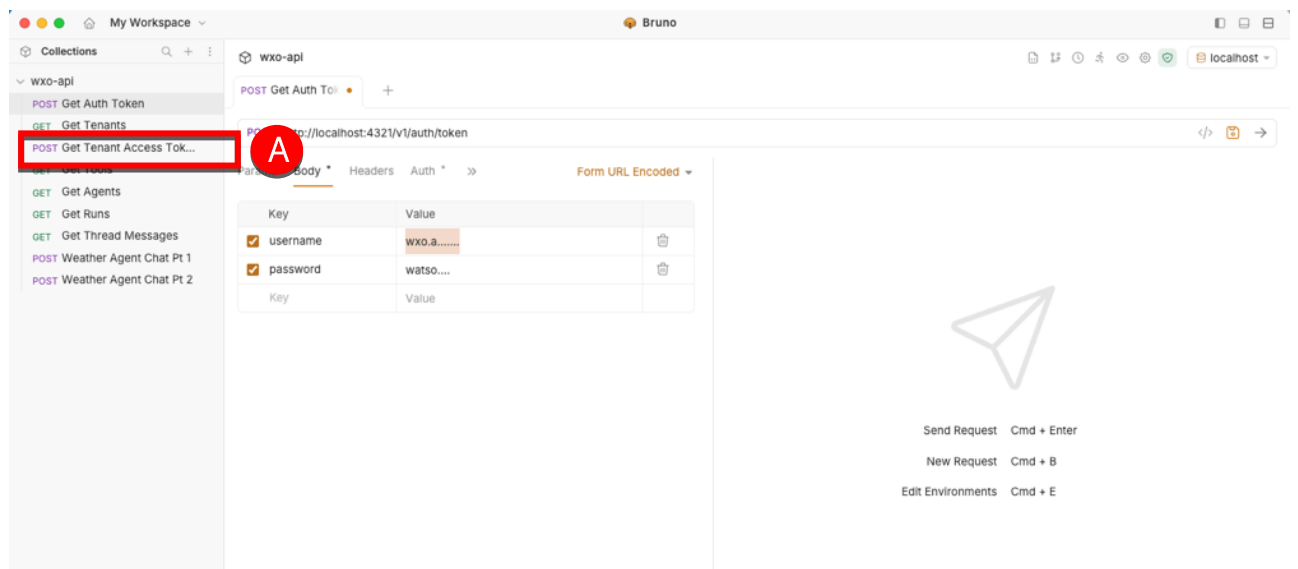

15. Repeat step 12-13 to set the username/password for this method (A).

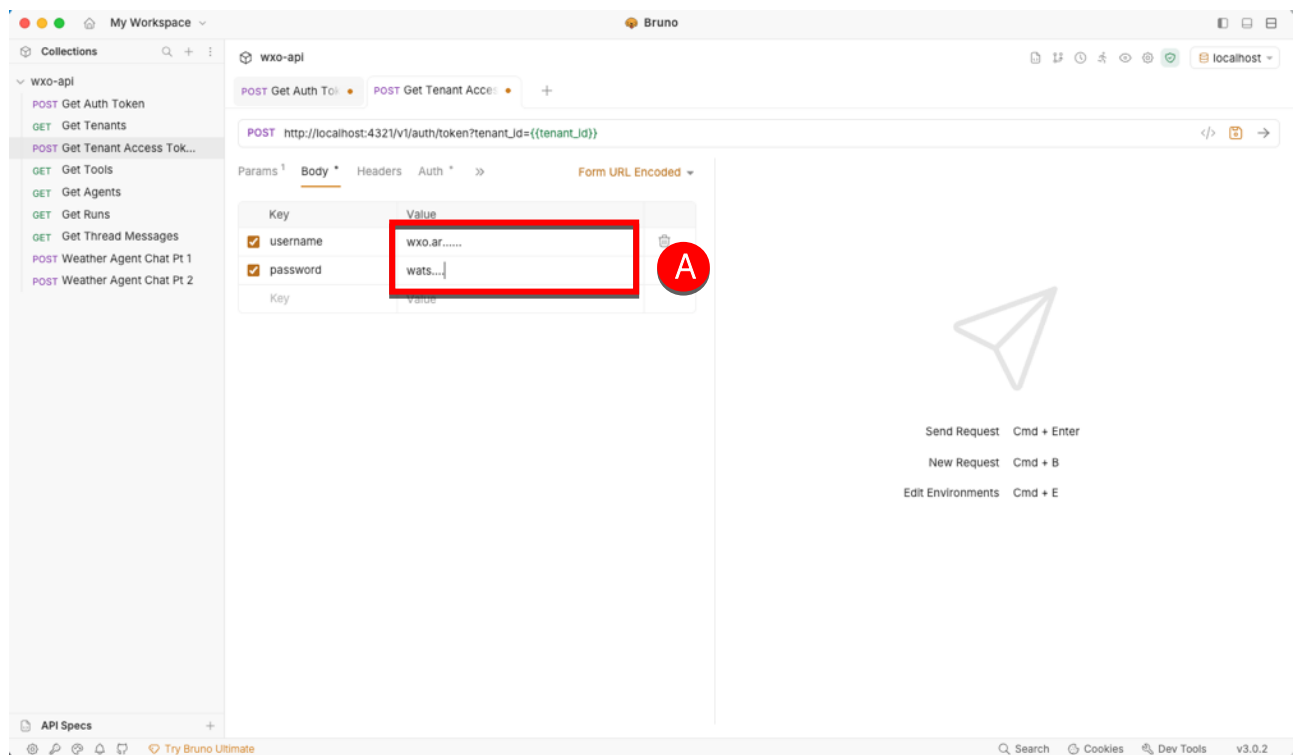


Tavily


Create a free Tavily account

Tavily MCP server requires API keys. To generate this API key, you must first create a free-of-charge account on tavily.com.

1. In your web browser, go to <https://www.tavily.com/>.
2. Click **Sign-Up** (A).

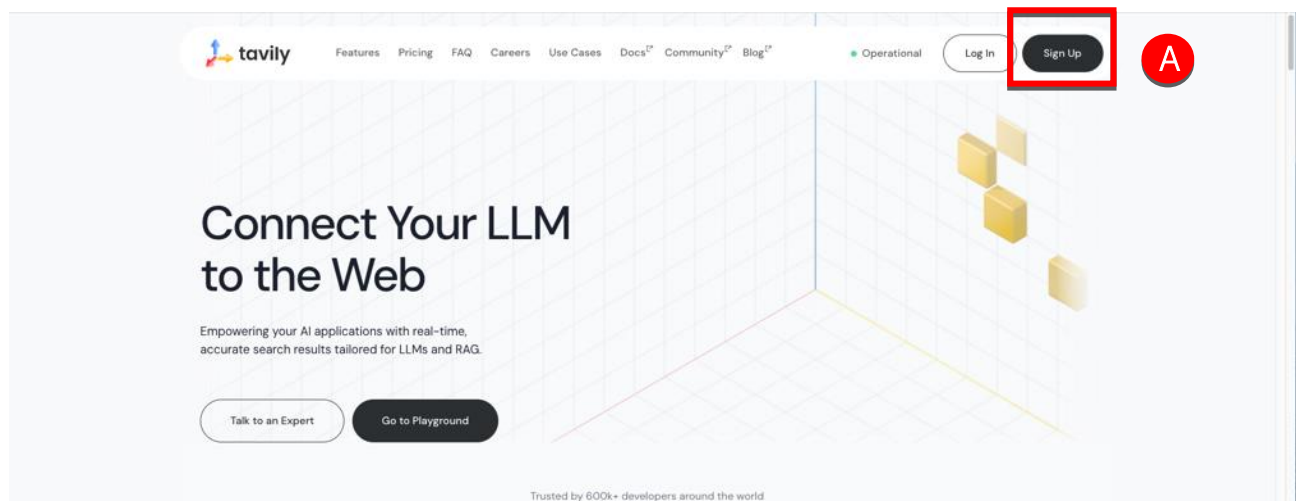


3. Enter your email address (A).

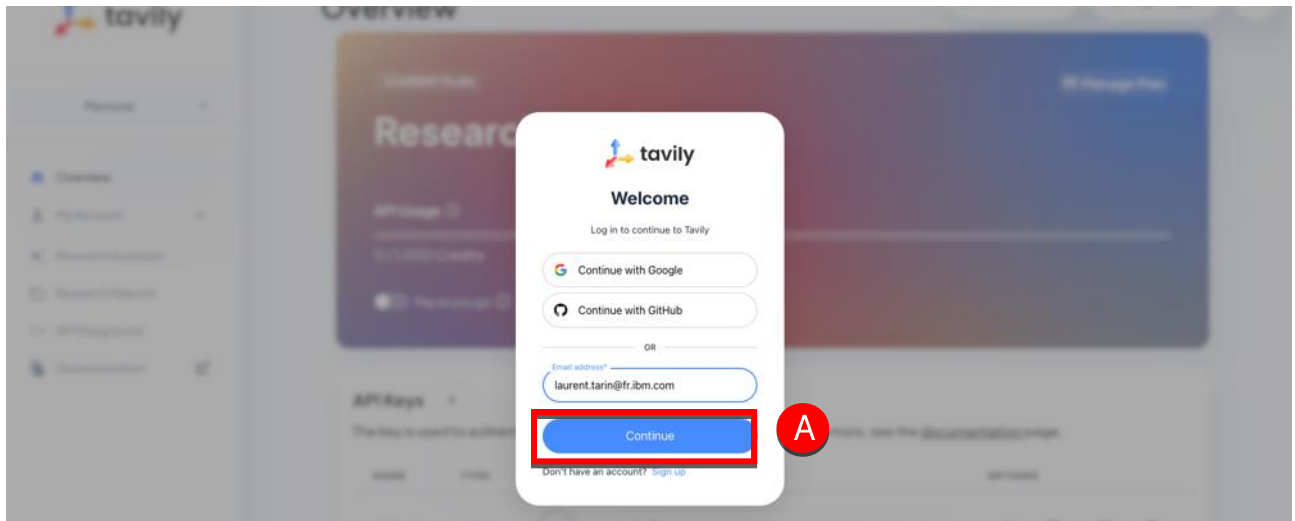


Note: If you have a google account, click Continue with google and follow the instructions to grant access from your google account.


4. Enter a password (A).

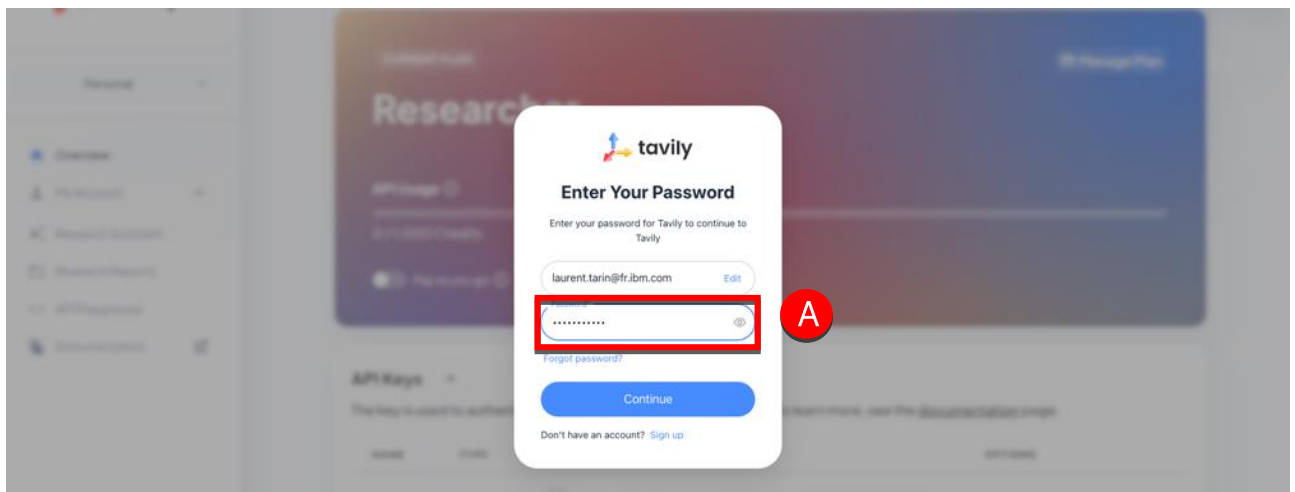

5. On this message (A), go to your corresponding email box to verify your email.

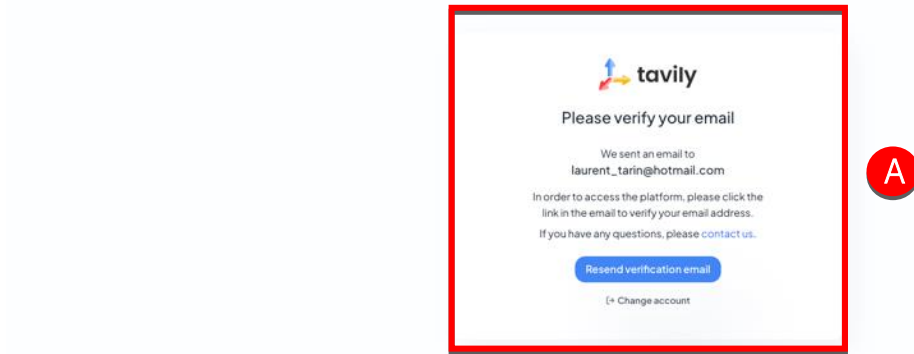

6. Open the **Verify Your Account** email received from Taviy and click **Verify Your account** (A).

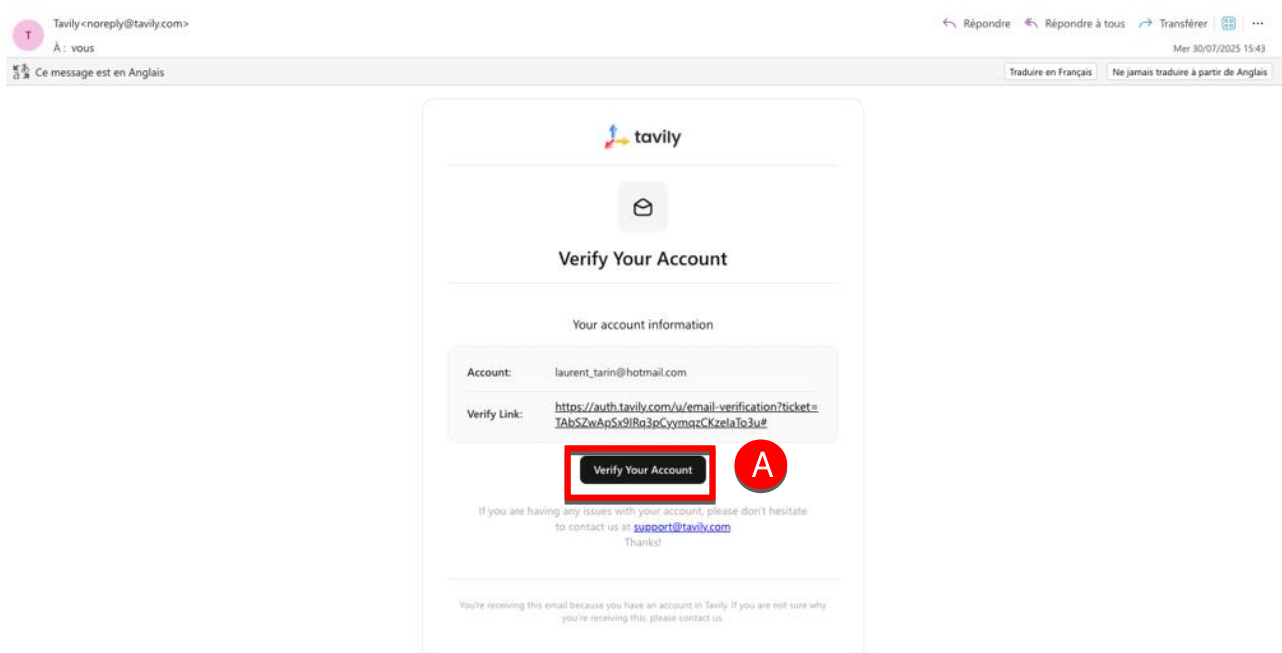

7. From the Tavily page close the **Welcome to Tavily** window if any.

The screenshot displays the Tavily 'Overview' page. On the left is a sidebar with the Tavily logo and a navigation menu including Overview, API Playground, Use Cases, Billing, Settings, Certification, Documentation, Tavily MCP, and Discord Community. The main content area features a 'CURRENT PLAN' section for the 'Researcher' plan, showing 'Monthly plan' usage at '0 / 1,000 Credits' and a 'Pay as you go' toggle. Below this is an 'API Keys' table with one key named 'Default' of type 'dev' and usage '0'. The 'KEY' column shows a masked key 'tvly-dev-*****'. At the bottom, there is a 'Coupon' section with a text input and an 'Apply' button, and a 'Remote MCP' section with descriptive text.

Pages / Overview

Overview

Operational

Official Tavily Agent Skills for Claude Code are now available - enabling real-time search, research, and content extraction directly in your terminal.

CURRENT PLAN

Manage Plan

Researcher

API Usage ⓘ

Monthly plan

0 / 1,000 Credits

☐ Pay as you go ⓘ

API Keys +

NAME	TYPE	USAGE	KEY	OPTIONS
Default	dev	0	tvly-dev-*****	

Coupon

Use your 1,000 free credits before redeeming an event coupon. You have 1,000 remaining.

Enter coupon code


Apply

Remote MCP

Connect directly to Tavily's remote MCP server for a seamless experience without local installation or configuration. Select your desired API key and click the button below to generate the MCP connection URL. For examples on how to use the remote MCP, click

Get your API key

8. A default API Key has been created for you. Click the copy to clipboard icon (A) and save the Tavily API key in your notes (Item 5).

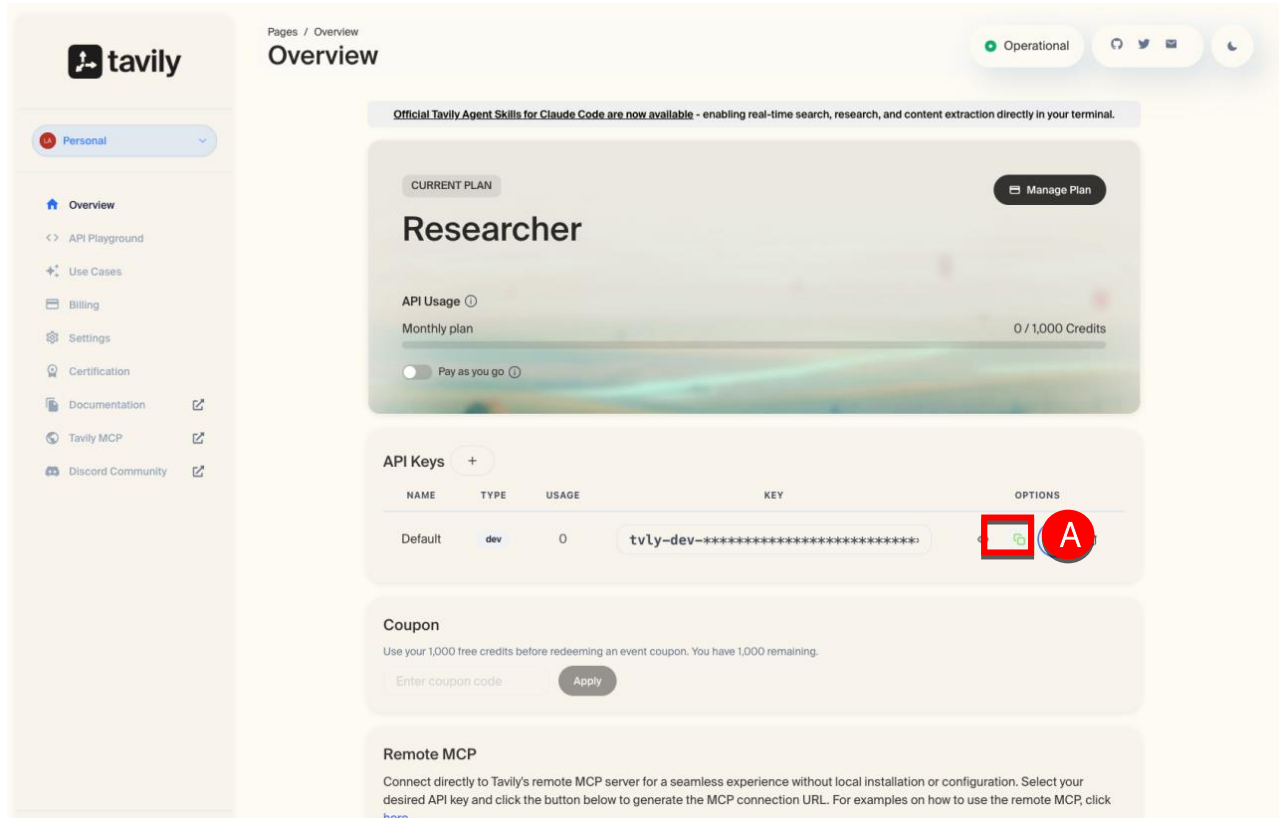

This API key you have saved will be used to configure the MCP Server in watsonx Orchestrate.

Get the MCP server installation command

Now that you have the API key, retrieve the command to install the MCP server from the MCP server documentation.

1. Click Tavily MCP (A).

The screenshot shows the Tavily web interface. On the left is a sidebar with a navigation menu. The 'Tavily MCP' option is highlighted with a red rectangle. To the right of this rectangle is a red circle containing the letter 'A'. The main content area is titled 'Overview' and includes a 'CURRENT PLAN' section for the 'Researcher' plan, showing 'API Usage' of 0 / 1,000 Credits. Below this is an 'API Keys' section with a table containing one key named 'Default' of type 'dev'. Further down are sections for 'Coupon' and 'Remote MCP'.

Pages / Overview

Overview

Operational

Official Tavily Agent Skills for Claude Code are now available - enabling real-time search, research, and content extraction directly in your terminal.

Personal

Overview

API Playground

Use Cases

Billing

Settings

Certification

Documentation

Tavily MCP

Discord Community

Manage Plan

Researcher

API Usage ⓘ

Monthly plan

0 / 1,000 Credits

Pay as you go ⓘ

API Keys +

NAME	TYPE	USAGE	KEY	OPTIONS
Default	dev	0	tvly-dev-*****	   

Coupon

Use your 1,000 free credits before redeeming an event coupon. You have 1,000 remaining.

Enter coupon code

Apply

Remote MCP

Connect directly to Tavily's remote MCP server for a seamless experience without local installation or configuration. Select your desired API key and click the button below to generate the MCP connection URL. For examples on how to use the remote MCP, click [here](#).

2. Click Local installation (A).

The screenshot shows the Tavily MCP Server documentation page. The main content area includes a title 'Tavily MCP Server', a description, and links to GitHub and NPM. A red box highlights the 'Local Installation' link in the right-hand sidebar, with a red circle and the letter 'A' next to it.

3. Click the command line **Copy** icon (A) and copy it in your notes (Item 4). You will use this command ('npx -y tavily -mcp@#.#.#') later to import the MCP tools inside your watsonx Orchestrate instance.

The screenshot shows the 'Local Installation' section of the Tavily MCP Server documentation. It includes a 'Prerequisites' section with a list of required tools and a 'Configuring MCP Clients' section. A red box highlights the 'Copy' icon next to the command line snippet, with a red circle and the letter 'A' next to it.

Bump your ADK resources (optional)

In some situations (small computers / lots of running applications etc), you may face resources issues running the AI builder in your virtual environment resulting in errors. To bump your ADK resources run the following command:

1. Type `orchestrate server edit --cpus 10 --memory 24`.

```
[ADK >orchestrate server edit --cpus 10 --memory 24] A
[INFO] - Editing the underlying VM settings...[INFO] - Stopping Lima VM...
[INFO] - Editing the underlying VM settings...[INFO] - Lima VM stopped.
[INFO] - Editing Lima VM...
[INFO] - Editing the underlying VM settings...[INFO] - Lima VM edited and server restarted successfully.
[INFO] - VM updated successfully.
```

Note: This new configuration should be persisted unless you run `orchestrate server purge`. Repeat this server edit command after any server purge.

Getting help

IBM employees can open an IBM Support ticket at <http://ibm.biz/support>.

Business Partners can request help at the [Partner Plus Support](#) website.

For environment provisioning issues, go to the IBM Technology Zone Help page (<https://techzone.ibm.com/help>).

Additionally, see the watsonx.ai documentation (<https://dataplatform.cloud.ibm.com/docs/content/wsi/getting-started/welcome-main.html?context=wx&audience=wdp>).

Or the watsonx Orchestrate DE documentation (https://developer.watson-orchestrate.ibm.com/getting_started/wxOde_setup)

Or the watsonx Orchestrate documentation (<https://www.ibm.com/docs/en/watsonx/watson-orchestrate/base?topic=getting-started-watsonx-orchestrate>)

