Automatic generated report CNET0015.

Author: Palomo Alonso, Alberto
Date of submission: October 18, 2022.

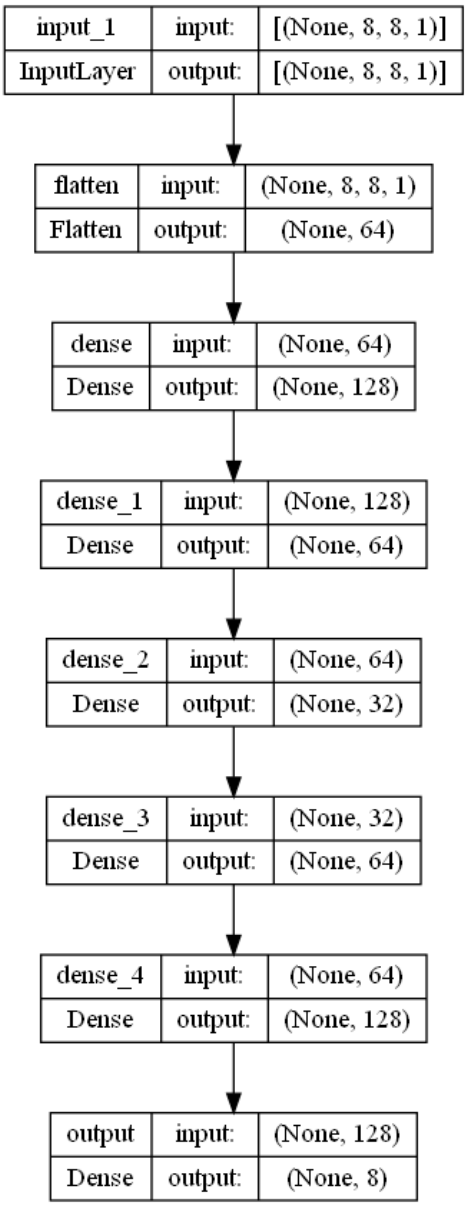

Fig. 1: Model visualization

1 Model

The model has been compiled successfully with the following parameters:

Layer	Shape	Attributes
Flatten	(None,)	
Dense	(128,)	
Dense	(64,)	
Dense	(32,)	
Dense	(64,)	
Dense	(128,)	

Tab. 1: Model architecture and attributes.

Model summary

```
Model: "model"
_________________________________________________________________
 Layer type                 Output Shape              Param #
=================================================================
 input_1 InputLayer         [None, 8, 8, 1]           0

 flatten Flatten            None, 64                  0

 dense Dense                None, 128                 8320

 dense_1 Dense              None, 64                  8256

 dense_2 Dense              None, 32                  2080

 dense_3 Dense              None, 64                  2112

 dense_4 Dense              None, 128                 8320

 output Dense               None, 8                   1032

=================================================================
Total params: 30,120
Trainable params: 30,120
Non-trainable params: 0
_________________________________________________________________
```

1.1 Compiler

- *Problem specifications.* The input shape mesh is *(8, 8, 1)*, while the output shape is *(8)*.
- *Compiling options.* The model makes use of the *mean squared error* loss function and the *adam* optimizer. The metrics taken into account are accuracy and loss.

- *Devices.* The model was trained with 1GPUs.

2 Database

The database **32k 8t 0w** was generated with *hypertrain*. The training - validation - test distribution is *'train': 70, 'validation': 20, 'test': 10* and the total size of the database is *(22938, 6554, 3276)*.

3 Performance

The obtained learning curve is shown below. With **maxloss**: 0.0977, and **minloss**: 0.0872.

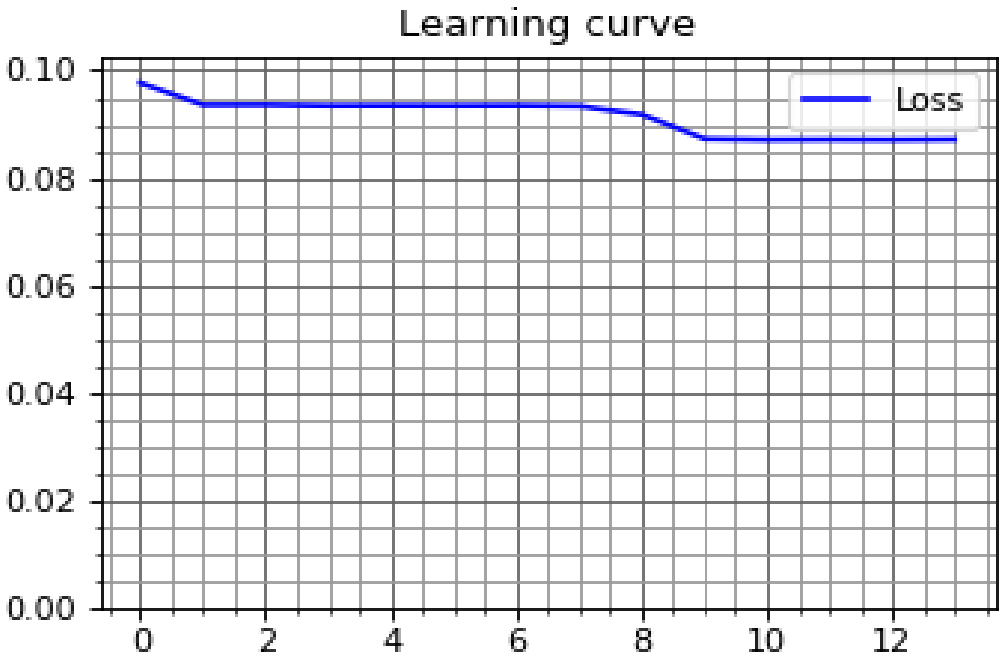

Fig. 2: Learning curve with the introduced database.