

Docker Panel Lite Worker

Launch and claim a remote worker from `cjarn/docker-panel-lite-worker:latest`.

v0-dpanel-c.vercel.app/dashboard

1 Docker Hub login

Authenticate to the private registry

```
docker login -u cjarn
# When prompted, paste your PAT instead of your password
# PAT: dckr_pat_<your-personal-access-token>
```

2 Create persistent folders

Keep repositories, identity and token

```
mkdir -p "$HOME/docker-panel-worker/repos" \
"$HOME/docker-panel-worker/data"
```

Keep data to preserve the worker name, ID and claim token.

3 Launch the worker


Run on the remote Docker host

```
docker run -d --pull always \
  --name docker-panel-lite-worker \
  --restart unless-stopped \
  -v /var/run/docker.sock:/var/run/docker.sock \
  -v "$HOME/docker-panel-worker/repos:/app/clones" \
  -v "$HOME/docker-panel-worker/data:/app/data" \
  cjarn/docker-panel-lite-worker:latest
```

4 Read and claim the Worker Token

Copy the token printed at startup

```
docker logs --tail 100 docker-panel-lite-worker
# Look for: Worker claim token for worker-default-...: <generated-worker-token>
```

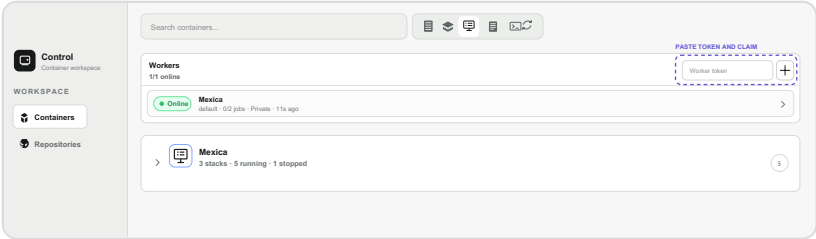

- 1. Open [the dashboard](#) and sign in.
- 2. Open **Containers** and select the Workers icon.
- 3. Paste the token in **Worker token**.
- 4. Select **+**, then choose Private, Shared or Public.

Essential operations

<code>docker logs -f docker-panel-lite-worker</code>	Follow worker activity; <code>Ctrl+C</code> exits the log stream.
<code>docker restart docker-panel-lite-worker</code>	Restart while preserving identity.
<code>docker rm -f docker-panel-lite-worker</code>	Remove only the container; persistent folders remain.
<code>rm -rf "\$HOME/docker-panel-worker"</code>	Permanent: deletes repositories, identity and token.

Never share Docker Hub PATs, Worker Tokens, Firebase credentials or encryption keys in logs or documentation.