



PHOTO SEQUENCE 24

Illustrated user manual

Studio 3.5 - Beta | English

PHOTO SEQUENCE 24 Studio 3.5 - Beta Save project Open project Accounts / API English

Stop motion AI image AI video

Project files

IMPORT ENTIRE FOLDER

Add images or videos

☒ Include subfolders

Sort by name Clear

0 files

Move up Move down Remove

AI generation

Image engine

OpenAI / ChatGPT

Video engine

Google - Gemini Omni Flash

Prompt / story (no app character limit)

Preview

Import a folder or generate your first image

Previous Next Play sequence

Timeline duration: 0.000 s

Editable final prompt

Update prompt with styles

Foocus / Colab

Find style

No style

Add style to mix

Choose a style to see its reference

277 available styles

Refresh catalog Import JSON / PDF

Bundled Foocus catalog + custom styles. Samples load online when selected.

Subtitles - Font, size and color

☐ Burn subtitles into video

Import SRT Draft from narration

Save and export

Output filename Destination folder FPS Frames / photo Aspect ratio Resolution

StopMotion.mp4 /root/Videos Choose folder... 24 1 16:9 1080p

Generation consumes tokens or credits. Cost estimate unavailable: check your provider. The app sets no duration limit.

GENERATE Cancel EXPORT MP4

Photo Sequence 24 Studio 3.5 — Beta · Windows / Linux

Photographs, stop motion, AI images and video, your own audio and subtitles.

Real desktop interface screenshots. Mobile hosts require additional testing. Windows: automated build and downloads listed in the release. iOS: source with compilation pending.

Contents

One task per chapter. Start with a small project without AI, then add audio, captions and styles.

01	What is delivered and what is pending	3
02	Your first video without AI	4
03	Finding your way around the screen	5
04	Importing, ordering and removing files	6
05	FPS and frames per photograph	7
06	Foocus styles and their references	8
07	Generating images	9
08	API accounts, models and costs	10
09	AI video and scene-based stories	11
10	Your narration and generated voices	12
11	Music and usage licences	13
12	SRT subtitles and timing	14
13	Fonts, size and colour	15
14	Name, destination and MP4 export	16
15	Saving projects and language	17
16	Windows 11: building both EXE files	18
17	Linux, Android and iOS	19
18	Common problems and diagnosis	20
19	Complete exercise and glossary	21
20	Privacy, verification and references	22

Run the Windows build package on your PC to produce the EXE files. APK/AAB are test releases and are not store-ready.

01 / What is delivered and what is pending

This manual covers Photo Sequence 24 Studio 3.5, a beta release. It describes the new Studio screen. The classic 3.4 copy retained in the source package uses a different interface and should not be confused with this edition.

Android: a development APK for testing and a bundle without production signing are provided. Compilation and lint have been checked; Studio exports still need testing on physical phones. This release has not been published to Play Store.

Linux: an x86_64 portable executable and install/uninstall scripts are provided. A graphical desktop and FFmpeg/FFprobe are required. It was built with glibc 2.39; compatibility with older distributions is not guaranteed.

Windows: a GitHub workflow builds the installer and standalone portable. Check release v3.5 to confirm the build has finished and downloads are available. Source code stays private. Chapter 16 covers usage and optional local compilation.


iOS: source code targets iPhone/iPad running iOS 16 or later. macOS, Xcode, compilation, testing and signing are required. There is no downloadable IPA in this release.

AI integrations require your own API accounts and have not been tested with real credentials. Visla and ComfyUI remain disabled. Instructions do not imply that pending features have been validated.

02 / Your first video without AI

1. Open Studio through its executable or, on Android, through the app. Do not open index.html directly: the native host is required.
 2. Choose English in the top language list and select Stop motion. You do not need an account or API key for this first exercise.
 3. Press IMPORT ENTIRE FOLDER and choose a small folder of photographs. Enable Include subfolders only if you also want their contents.
 4. Press Sort by name. Inspect the first and last image with Previous and Next. Select a file and use Move up/Move down to adjust its position.
 5. For a leisurely slideshow, use 24 FPS and 24 frames/photo: each image lasts one second. For genuine one-photo-per-frame stop motion, use 24 FPS and 1 frame/photo.
 6. Keep the style mix empty for this first test. Choose 16:9 and 720p. Enter Prueba_01 as the output name and choose your own destination folder.
 7. Optionally import music or narration that you already own. Generated speech is not required for export.
 8. Save the project and press EXPORT MP4. Wait for the verified export message, then open the reported file in your video player.
- Control exercise: 24 photographs at 24 FPS and 1 frame/photo produce one second of visual footage. Longer narration may extend the last frame. Do not start your first check with 417 photographs.

03 / Finding your way around the screen

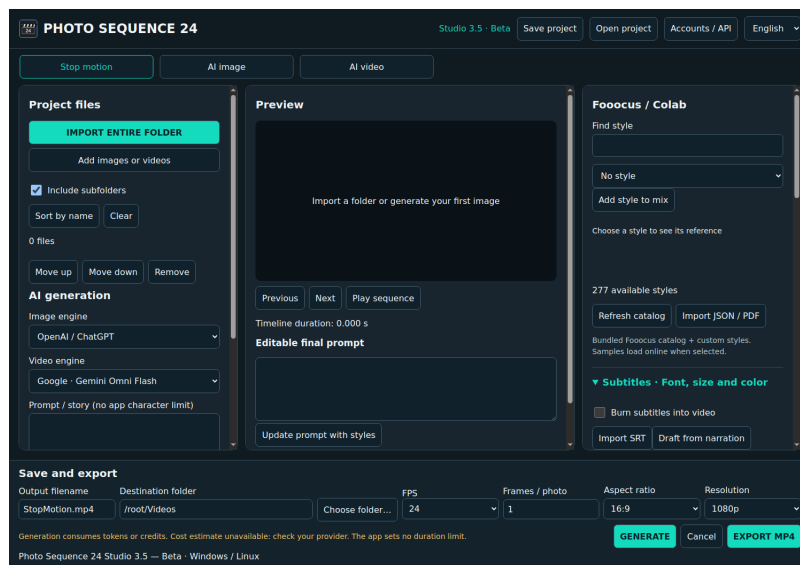

Top bar: program name, Save project, Open project, Accounts/API and the Spanish/English selector. Changing language changes interface labels; it does not translate your story, style names or provider messages.

Below it: Stop motion, AI image and AI video determine what GENERATE does. EXPORT MP4 assembles project media into a video.

Left panel: folder/file import, media list, ordering and engine selection. Scroll down for the prompt, image reference and requested scene duration.


Centre panel: preview, Previous/Next, Play sequence and calculated timeline duration. Editable final prompt displays the text combined with the selected styles.

Right panel: Foocus/Colab catalogue, search, style mix and references. Subtitles and Voice and music expand below it. Click their headings to show or hide their controls.

Bottom bar: output name, destination folder, FPS, frames/photo, aspect ratio and resolution. It also contains notices, GENERATE, Cancel and EXPORT MP4.

On desktop each panel scrolls independently. On small screens the panels stack vertically: scroll the page to the required area. The illustration is a real beta screenshot, not a generated-result mockup.

04 / Importing, ordering and removing files

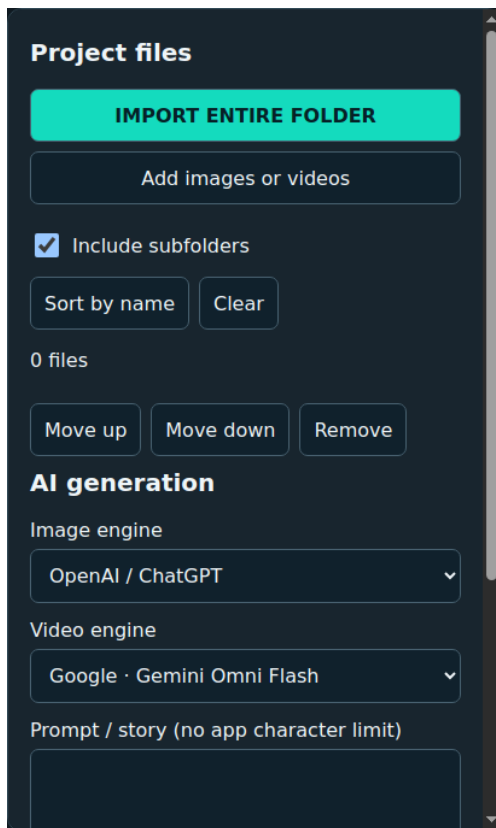

Scrollable beta interface panel.

IMPORT ENTIRE FOLDER adds supported media from the selected folder. Include subfolders also scans its nested folders. There is no voluntary photo-count cap; thousands of files still consume memory, time and storage.

Add images or videos opens a file picker for individual items. Photographs and clips can share a timeline. Importing the same file again attempts to avoid duplicates.

Sort by name uses natural numeric order: photo2 appears before photo10. Reliable sequence names include shot_0001.jpg and shot_0002.jpg. Selecting an item updates its preview; Move up/Move down changes its position.

Remove takes the selected item out of the project. Clear removes the entire list after confirmation. These actions do not delete the original disk files. An imported folder is not a grouped track: its files appear as individual items.

Desktop supports JPG/JPEG, PNG, WebP, BMP, TIFF and several RAW formats through rawpy. RAW support depends on the camera and decoder. On mobile it depends on the platform: if a RAW file cannot be opened, convert a copy to JPG/PNG before importing.

Corrupted files or unreadable codecs can interrupt an import. Test a small group to isolate the problem. On Android grant access to the chosen folder and preserve that permission when reopening a project.

05 / FPS and frames per photograph

FPS means output video frames per second. Frames/photo specifies how many frames each photograph occupies. These are different controls: choosing 24 FPS does not make each photograph last 24 seconds.

One-photo duration = frames/photo ÷ FPS. Total photo duration = photo count × frames/photo ÷ FPS. Clips contribute their own duration rather than the fixed photograph duration.

Example A: 417 photographs, 24 FPS, 1 frame/photo = 17.375 seconds. Example B: the same photographs, 24 FPS, 12 frames/photo = 208.5 seconds. Example C: 417 photographs, 4 FPS, 1 frame/photo = 104.25 seconds.


For five-second slides at 24 FPS, use 120 frames/photo. For one-photograph-per-frame animation, use 1. The beta offers FPS choices such as 4, 8, 12, 16, 18, 20, 24 and 30; choose an available dropdown option.

Frames/photo must be positive. A low FPS creates more visibly stepped motion; a higher FPS does not invent intermediate photographs.

The preview duration mainly represents the visual timeline. If imported narration is longer, export may hold the last image until narration ends. Check the final MP4 duration rather than treating the timeline indicator as a guarantee of audio duration.

There is no fixed application limit in minutes. Storage, device resources, codecs and external providers can still constrain long jobs.

06 / Fooocus styles and their references

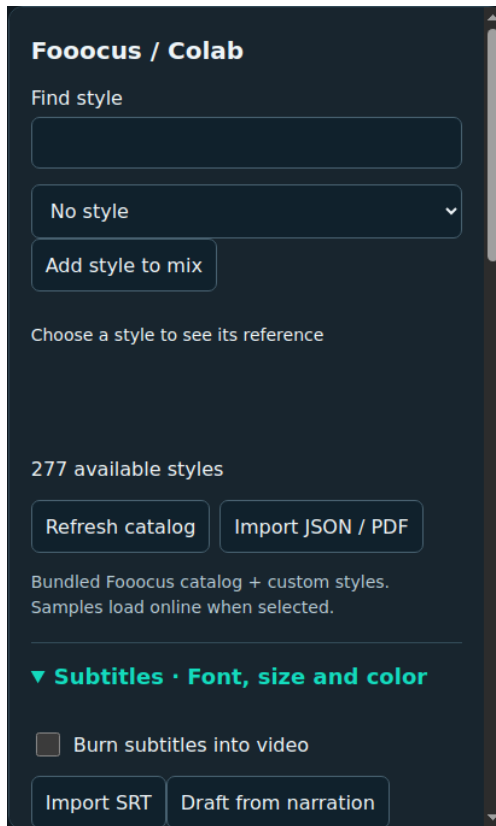

Scrollable beta interface panel.

The included catalogue contains 277 styles from official Fooocus sources. Sample images are loaded online when you select a style; its description remains available if the connection or sample fails.

1. Enter part of a name in Find style. 2. Choose an item in the dropdown to read its prompt and view its reference. 3. Press Add style to mix. Repeat to combine several styles.

Added styles appear as tags with an ×. Click a tag to remove it. Selecting an item in the dropdown only shows its reference: add it to the mix to apply it.

Update prompt with styles combines the original text and style mix into Editable final prompt. If you manually edited that field, the beta preserves your edit until you request an update. Read the combined result before generation.

Import JSON/PDF adds custom descriptions. JSON styles use name, prompt and optionally negative_prompt. A text PDF supplies a description; a scanned PDF may have no extractable text.

Desktop also reads the styles folder recognised by its host on your desktop. After adding files, use Refresh catalog. On mobile use the importer; the same desktop path does not exist.

Choosing styles does not apply a free local filter. In stop motion, an active mix can trigger AI transformation of every photograph using the selected image engine: a confirmation appears and multiple charges may result. Remove all style tags to preserve the photographs as imported.

07 / Generating images

Choose AI image and an Image engine. This beta includes connectors for OpenAI/ChatGPT, Gemini, Cloudflare Workers AI, Pollinations and an HTTPS Hugging Face endpoint. ComfyUI is disabled.

Write a concrete prompt describing subject, setting, composition, light and intended result. Example: "A red bicycle beside a brick wall, side view, soft evening light, no text." Then add the desired styles and inspect the final prompt.

For photo-based editing, import and select an image and enable Use selected image as reference. After confirmation, the image is sent to the provider. The host prepares a reference copy; it does not replace the original file.

This beta's Hugging Face endpoint path is designed for text-to-image and does not accept an image reference. Use a compatible connector or disable the reference. The endpoint type must match the response expected by the host.

Press GENERATE and read the transmission and usage notice. The result is added to the project for preview and assembly. GENERATE and EXPORT MP4 perform different tasks.

If the provider returns no image, Studio reports the error. It does not automatically switch to another paid provider. Check the model, key, permissions, quota and endpoint format before retrying.

These connectors have not been tested with real accounts in this release. Fooocus samples illustrate a style; they do not guarantee that a different engine will reproduce the same appearance.

08 / API accounts, models and costs

Accounts/API opens session configuration. Choose a provider, enter its key in the key field, check the model, fill additional fields if needed, then press Save to session.

OpenAI and Gemini require their API credentials. A ChatGPT subscription or access to the Gemini website does not automatically provide API credits. Check the provider account before generation.

Cloudflare also uses Account ID. ElevenLabs uses a Voice ID in the extra field. Hugging Face requires a valid HTTPS endpoint for the service you enabled or purchased. A generic model webpage is not an API endpoint.

The model name is editable because availability, permissions and capabilities may vary. A default value in the interface does not guarantee that your account can use it.

Keys remain in memory for the session and are excluded from project files. Configure them again after closing and reopening Studio. Do not share screenshots containing keys, account logs or projects with private information.

The screen warns that AI uses tokens, credits or quota. It does not calculate an exact price. Free access may depend on a plan, promotional credits or allowance; unlimited card-free access is not guaranteed.

Cancellation: stopping local tracking of a remote task does not guarantee cancellation of work already submitted. Charges may still apply. Avoid submitting a second request just because the first appears slow; check its state first.

09 / AI video and scene-based stories

Choose AI video and a video engine. Gemini Omni Flash and Veo have connectors in this beta, pending real-credential tests. Visla is disabled and does not yet generate videos from Studio.

Start from text and, for compatible engines, a selected reference image. Describe motion, camera movement, continuity, lighting and ending. Avoid contradictory instructions.

Requested scene duration is a request to the engine. It does not force the provider to deliver exactly that duration: provider limits on time, aspect ratio, resolution and quota still apply.


For multiple scenes, write one prompt per block and separate blocks with a line containing only three hyphens: --- . Example: first block “Wide shot of a bicycle at sunset”; second block “Slow camera move towards the handlebars.”

Styles are composed into each block. Inspect Editable final prompt. Generation can take time; some engines return a remote job that is polled before the output is downloaded.

Generated clips are added to the project. Order them, add narration and music, configure subtitles and then use EXPORT MP4. Generating a clip does not finish the montage or its attribution.

Text fields have no application character cap. Split long stories into scenes and save the project. Studio does not remove provider limits or guarantee perfect continuity between independently generated clips.

10 / Your narration and generated voices

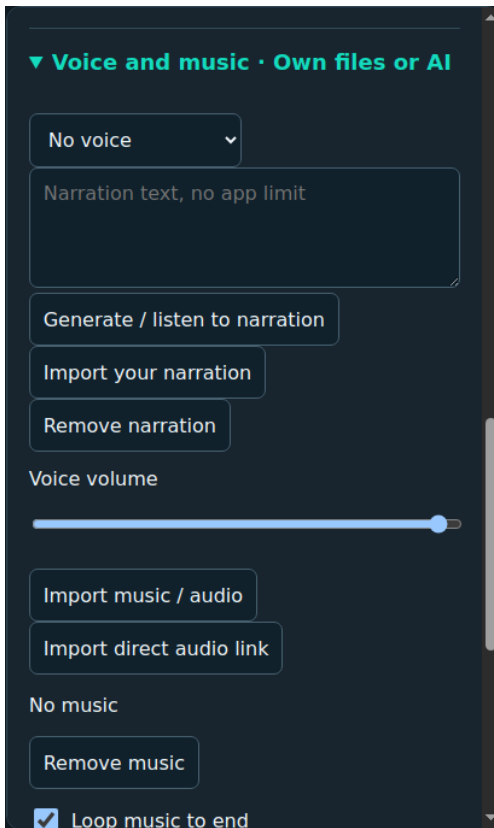

Scrollable beta interface panel.

Expand Voice and music. Import your narration selects audio you recorded or edited outside Studio. No AI platform is required. Listen using the audio control and adjust Voice volume.

Remove narration stops using the track in the montage; it does not delete your file. Studio uses one main narration track rather than a full multitrack editor. Combine interviews or multiple speakers into a single file beforehand.

For synthesised speech select Free local voice or ElevenLabs/API. Enter narration text and press Generate/listen to narration. Local speech uses available system voices; the same voice and quality are not guaranteed across platforms.

Windows uses system speech synthesis. Linux needs espeak/espeak-ng. Android and iOS depend on installed speech engines and voices; some voices require a system download before offline use.

ElevenLabs requires your own API key, model and Voice ID and uses account credits. The beta splits long text into chunks and joins the audio, but a provider may reject a voice or exhaust the quota.

If narration is longer than the visual sequence, export may extend the last image. It does not automatically add new scenes. Review duration before choosing music and subtitle timings.

The narration field does not automatically recognise words in imported audio. For captions, import a synchronised SRT file or write and review its timestamps. A draft is not automatic transcription.

11 / Music and usage licences

Import music/audio selects a local file separate from narration. Use your own composition or an authorised download. Studio does not require an AI subscription for this task.

Music volume controls the mix. Start with voice at 100% and music at 20-30%, then listen on headphones and speakers. The sliders do not replace professional loudness processing or guarantee that clipping is absent.

Loop music to end repeats the track if the montage is longer. Remove music excludes it without deleting the file. Keep clip audio also mixes the original sound from video clips.


Import direct audio link requests an HTTPS URL that returns an audio file. A page containing a player is usually not a direct download. If it fails, download the authorised file in your browser and import it locally.

Links to Free Music Archive, Incompetech and Wikimedia Commons open their websites. They are not an integrated library and do not guarantee identical permissions for every track. Read the individual track licence.

Fill in author, title, source, licence and attribution. Example: "Title: My track; author: Name; source: track URL; licence: name/version; changes: trimmed and looped." Keep the original licence document.

Credits are saved beside the exported video. They are not automatically inserted as a visual title card. Royalty-free does not always mean public domain or unrestricted commercial permission.

12 / SRT subtitles and timing

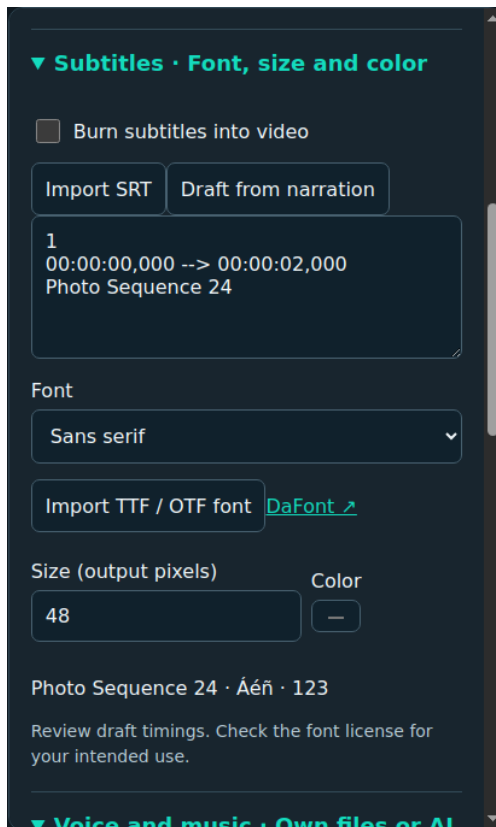

Scrollable beta interface panel.

Expand Subtitles and enable Burn subtitles into video. If it is unchecked, the text box contents are not burned into the MP4. Burned captions are part of the picture and cannot be disabled by the player.

Import SRT loads text with timestamps. Each block has a number, start time --> end time and text; a blank line separates blocks. The end time must be later than the start.

Minimal two-second example:

```
1
00:00:00,000 --> 00:00:02,000
```

Welcome to Photo Sequence 24

Timestamps use hours:minutes:seconds,milliseconds. Change only values appropriate to your timeline. Keep a backup of your SRT before editing.

Draft from narration distributes narration text approximately according to text length and available duration. It does not listen to the audio or identify spoken words. Review every timestamp, even when speech was generated in Studio.

For imported narration, enter equivalent narration text to create a draft or import an already synchronised SRT. If duration is unavailable, import a timeline or narration audio first.

Use short phrases, split long lines and avoid covering important picture information. Export a short test to check contrast, accents and timing. The screenshot contains sample data, not subtitles created through speech recognition.

13 / Fonts, size and colour

Font lists imported typefaces and a Sans serif option. After selecting one, the “Photo Sequence 24 · Áéñ · 123” sample helps check shapes, accents and numbers. Some systems do not render every dropdown option in its own font; use the preview as well.

For a DaFont typeface: 1. Open the link in Studio. 2. Read both the page and file licence. 3. Download the authorised ZIP. 4. Extract it. 5. Press Import TTF/OTF font and select the font file, not the ZIP or licence PDF.

Not all DaFont typefaces are freely licensed or permit commercial use. Free for personal use may prohibit a commercial video unless you buy a licence. Keep author, licence and download documentation.

Size is expressed in output pixels. A 48-pixel font has a different presence at 720p and 4K; adjust for final resolution. The on-screen sample caps its visual size to avoid overflow, but export uses your entered value.

Colour opens a picker and applies the chosen colour. Aim for good contrast, such as light text over dark areas. This beta does not provide position controls, word-by-word animation or a full karaoke editor.

If a font fails, try another valid TTF/OTF. Check accents in the export rather than only in the preview. Mobile font importing and persistence still need specific testing; reimporting after reopening may be necessary.

Start with a ten-second captioned test. Importing an external font does not itself grant permission to use that typeface.

14 / Name, destination and MP4 export

Save and export

Output filename: StopMotion.mp4 Destination folder: /root/Videos Choose folder... FPS: 24 Frames / photo: 1 Aspect ratio: 16:9 Resolution: 1080p

Generation consumes tokens or credits. Cost estimate unavailable: check your provider. The app sets no duration limit.

GENERATE Cancel **EXPORT MP4**

Photo Sequence 24 Studio 3.5 — Beta · Windows / Linux

Output name identifies the file, not the folder. Enter CASORIO or CASORIO.mp4: the extension is added when missing. Avoid reserved filename characters; Studio substitutes unsupported ones.

Choose folder selects the destination. Desktop displays its path. Android/iOS use their document pickers: a Windows disk path is not a valid destination there.

Aspect ratio sets the frame shape: 16:9 landscape, 9:16 portrait, 1:1 square, 4:3 analogue landscape, 3:4 analogue portrait, 3:2 standard landscape or 2:3 standard portrait.

Resolution offers 720p, 1080p, 2K and 4K. For 16:9, 1080p is 1920×1080; for 9:16 it is 1080×1920. Portrait 2K is 1440×2560 and 4K is 2160×3840. Other shapes adjust dimensions to preserve their ratio.

Hosts normalise photographs and clips to the output frame. Desktop photographs use a fitted image over a blurred background; clips may have margins. Mobile does not guarantee identical background styling. Changing shape does not invent detail or always mean cropping.

The Studio screen exports MP4/H.264 with compatible audio; it does not include the classic version's codec selector. Press EXPORT MP4, wait for the verified message and check the file in a player and your editor.

If a filename already exists, desktop creates an alternative such as CASORIO_2.mp4. Do not assume a fixed filename: read the returned path. Cancel requests termination; final output must not be reported valid before verification finishes.

15 / Saving projects and language

Save project creates a JSON project file containing media references, settings, style names, prompt, narration text, credits and subtitle configuration. It is not an MP4.

Open project restores that structure and locates media through the platform host. A project is not a universal package that always embeds all photographs, fonts and audio.

On desktop keep originals in a stable folder. Moving a photo or changing computers can invalidate a path. Back up the project and media together; do not assume automatic interchange between Windows, Android and iOS.

On Android preserve document-access grants. The iOS host works with copies and its application folder permissions. Reinstalling or clearing app data can remove resources needed by a project.

API keys are excluded from project files. Other fields can still contain private information, such as prompts, audio, filenames or music sources. Review what you share.

Use the top Spanish/English selector. It does not change the voice of imported audio or translate your story. Proper style names and some technical responses may remain in English.

Preview helps check photograph and clip order; it does not necessarily play every layer exactly as the exported MP4 will. Export a sample to check audio, mixing, subtitles and final duration.

Before a large change, save a copy under another project name using the dialog. Unlimited undo or automatic recovery of closed work is not promised.

16 / Windows 11: building both EXE files

For the Windows download choose Instalador_PHOTO_SEQUENCE_24_v3.5.exe or PHOTO-SEQUENCE-24-Windows-v3.5.exe (standalone portable). Open the portable directly; the installer registers the app and uninstall entry. Commercial signing and testing across different PCs remain pending.

1. Download and fully extract the Windows package. Do not run the CMD from inside the ZIP. 2. Double-click COMPILAR_WINDOWS.cmd. 3. Read console messages and any Windows prompts.

The script requires 64-bit Windows. It searches for Python 3.12 and Inno Setup 6, attempting installation through winget if missing. If winget is unavailable or fails, install those tools from python.org and jrsoftware.org and run the CMD again.

It downloads Python dependencies and FFmpeg/FFprobe from gyan.dev, checking the published SHA256 before use. Internet access, free storage and download/build time are required.

On success it creates a Windows-3.5-... subfolder inside C:\Users\Mariano\Desktop\photo sequence 2026_gpt. It does not automatically replace your projects. The build log remains in a compilacion-... folder created there.

Output includes standalone PHOTO-SEQUENCE-24-Windows-v3.5.exe, an optional portable folder and Instalador_PHOTO_SEQUENCE_24_v3.5.exe. Keep the entire folder if using that alternative. The installer contains a per-user uninstaller and the supplied icon.

The interface needs Microsoft Edge WebView2 Runtime. Results have no commercial code-signing certificate. Before distribution, test startup, folder import, fonts, audio, export and uninstall on Windows. A syntactically valid script is not the same as a tested Windows build.

17 / Linux, Android and iOS

Linux: extract the TAR.GZ and keep the complete folder. Open PhotoSequence24/PhotoSequence24 from a graphical desktop. Instalar.sh copies the app to a user location and adds a shortcut; Desinstalar.sh removes the app and shortcut while preserving projects and exports. The built portable does not require Python.

Linux needs FFmpeg and FFprobe on PATH; install espeak-ng for local speech. The binary is x86_64 and built with glibc 2.39: it does not support every distribution or ARM. If startup fails, check graphics libraries and platform compatibility.

Android: the APK is a development beta for Android 7 or later. Install only the file you identify as your test package and grant required document permissions. This does not replace tests across different phones.

Choose folders through the system picker. Keep Studio open during export; the new screen does not guarantee background jobs or recovery after process termination. Uninstall using system Settings.

The AAB is an Android distribution bundle, not an APK to open directly. It lacks production signing and needs your signing setup, testing and review before Play Store distribution.

iPhone/iPad: source code is provided, not an IPA. build-ios.sh needs macOS, Xcode and XcodeGen to build for the simulator. Device and App Store distribution require a development team and its signing configuration.

Android/iOS do not have a desktop-style portable mode. Removing an app can remove private app data too: keep external backups of media and projects before uninstalling.

18 / Common problems and diagnosis

“Open the app through its executable”: the HTML was opened without the native host. Close it and launch Studio through the executable/app. “FFmpeg required” or “FFprobe required”: install those tools on Linux or verify that the Windows portable folder is complete.

A photo or clip is missing: open it in another application. Test JPG/PNG and a short H.264 MP4. For RAW, check camera compatibility. Import small groups to isolate a failing file.

A style reference fails to load: it needs Internet. The style text may remain available. Selecting a reference does not add it to the mix or transform an image yet.

AI returns 401/403: check keys and permissions. A 429 often requires checking quota or request rate. An unavailable model requires a corrected name or access. Do not repeatedly resubmit paid requests.

Downloaded audio is missing: the URL may point to a webpage instead of a direct file. Use an authorised local file. If imported audio sounds wrong, listen to it separately before mixing.

Captions are missing: enable Burn subtitles, validate SRT and align timestamps with the video. Missing accents: choose a font supporting those characters and test export. Draft timings need manual adjustment.

The video will not open: retain the full message, check free storage and try a small 720p sequence. A failed verification must not be treated as valid export. Do not delete originals.

For a bug report record platform, version, steps, settings, formats and the exact message. Attach a sample without private information. Do not include API keys.

19 / Complete exercise and glossary

Exercise: choose 24 photographs with consecutive filenames. Create a test project, sort them and select 24 FPS, 12 frames/photo, 16:9 and 720p. The visual timeline should last 12 seconds.

Record about ten seconds of narration and import it as your own narration. Add authorised music, lower its volume and complete the credits. None of these tasks requires AI.

Prepare an SRT with three phrases and timestamps within those 12 seconds. Import it, enable Burn subtitles, select Sans serif or a valid imported font and try size 48 with a light colour. Check readability in the MP4 rather than only in a screenshot.

Save the project as Exercise_01.ps24.json and export Exercise_01.mp4 into a practice folder. Check picture, sound, subtitles, duration and credits. Close and reopen the project to confirm media is still accessible.

Personal pass criteria: correct order, 12 visual seconds without another extension, clear narration, synchronised text, complete credits and playable output. This beta does not issue certificates or publish your exercise.

Glossary: prompt = instructions to the model; API = programmatic provider connection; token/credit = usage or billing unit; FPS = frames per second; aspect ratio = frame shape; SRT = timed subtitle text; TTF/OTF = font files.

Portable = executable folder without app installation. Installer = program that copies the app and registers uninstall. APK = installable Android package. AAB = Android distribution bundle. IPA = signed iOS package. Project JSON = settings and references, not the completed video.

20 / Privacy, verification and references

Local assembly does not require sending photographs to an AI engine. When you choose generation, the app sends the prompt and enabled image reference to that provider. Style sample requests and music downloads also need network access.

Keys are stored in memory, not projects. This does not anonymise projects or audio. Keep private files in a suitable location and review permissions and terms for the selected provider.

Checked in this release: 82 classic backend tests; dimension, timing, Unicode, scene, SRT and secret-exclusion rules; three desktop FFmpeg export tests; Spanish/English interface and the Linux native bridge; compiled APK/AAB with zero lint errors and five warnings.

Pending: Windows testing across different PCs and commercial signing, iOS compilation/execution, Studio exports on physical phones, AI calls using real accounts, prolonged tests and store signing/publication. Swift and PowerShell parsers check syntax only, not full operation.

Licences: review every music track and font. The Fooocus catalogue includes its licence. Third-party components retain their own terms; review notices and corresponding source obligations before public distribution of a build.

Official installation and reference sites: pyinstaller.org (packaging); python.org (Python); jrsoftware.org (Inno Setup); gyan.dev/ffmpeg/builds and ffmpeg.org (FFmpeg); dafont.com/es (fonts and individual licences).

For AI support consult provider documentation and your account dashboard: platform.openai.com, ai.google.dev, developers.cloudflare.com, huggingface.co/docs and elevenlabs.io/docs. This manual describes the October 2026 beta; APIs and quotas may change.