Service start-up report

Generated: 2026-10-05 09:25:19
Target: ids (local)
Operation: **start** · Recorded window: 27s · compose exit code: **0**

Resource usage recorded while the stack was brought up. Each dashed red vertical line marks a major event (a container starting, going healthy or unhealthy, or stopping), numbered in a band above the graph; events within 1.5s of each other share one number, and the event key under the host graph says what each number covers. The largest CPU peak is called out with the marker it lines up with. **Figure 1** shows how these services fit together – the per-container graphs below track each box in it.

Reading the probability metrics. A **95% confidence interval (CI)** is the range the true value would fall in 95 times out of 100 if the measurement were repeated: a wide interval means few or noisy samples, a narrow one means the figure is well pinned down. A **p-value** is the probability of seeing a difference at least this large if there were really no effect; below 0.05 it is conventionally called *significant*, i.e. unlikely to be chance. Rates use the Wilson interval, which stays within 0–100% even for small samples or 0% / 100% results. Where a mean over a time series (CPU, memory) has a CI, it uses an effective sample size that discounts correlated neighbouring samples, so it is not over-confident. **P(≥x)** is the share of a recording spent at or above x: the chance that a randomly picked moment was that busy. **SD** (standard deviation) is the typical distance of a value from the mean.


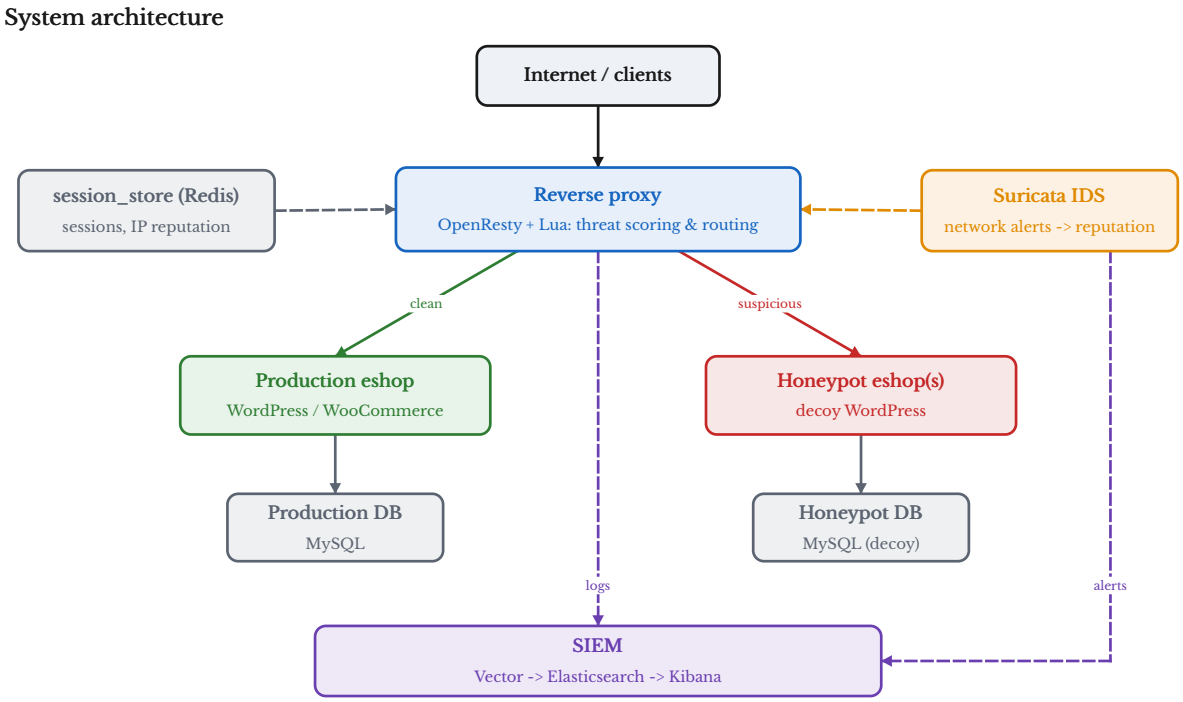


Figure 1. System architecture: the services whose CPU / memory the per-container charts below track as the stack is started.

1. Overall system (host)

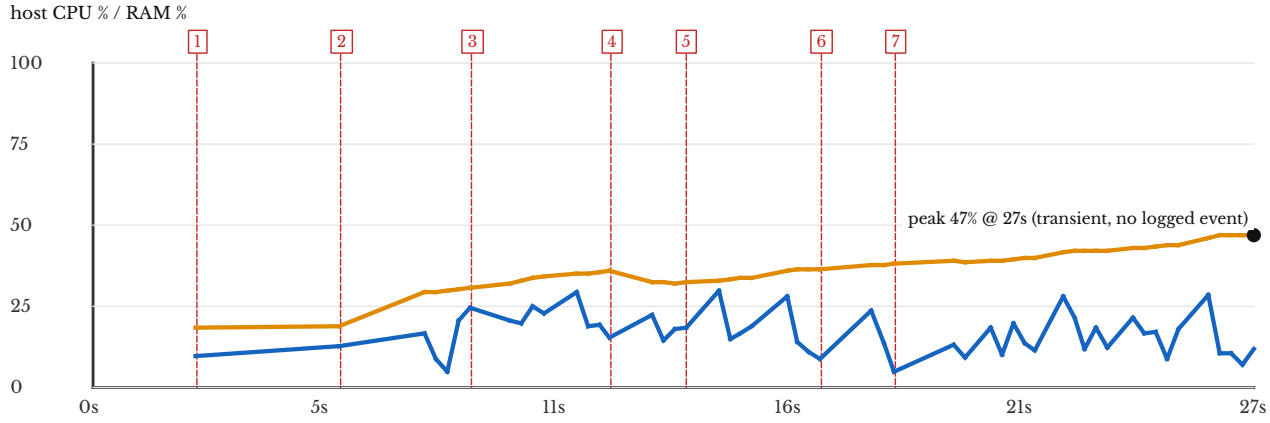

■ host CPU % ■ host RAM % used


Event key (marker numbers on all graphs)


Marker	Elapsed	What happened
1	2s	started: honeypot_database_1, honeypot_database_2, honeypot_database_3, honeypot_db_migration, honeypot_db_seed_1, init_setup, pool_manager, production_database, production_db_seed, session_store, suricata_ids, log_capper
2	6s	started: backup_service, honeypot_content_sync, honeypot_db_seed_2, honeypot_db_seed_3, honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3, production_eshop, reverse_proxy, vector_outbound; running, health pending: honeypot_database_1, honeypot_database_2, honeypot_database_3, production_database, session_store, suricata_ids
3	9s	healthy: honeypot_database_1, honeypot_database_2, honeypot_database_3, production_database, session_store, suricata_ids
4	12s	running, health pending: production_eshop
5	14s–15s	running, health pending: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3; healthy: production_eshop
6	17s	healthy: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3
7	18s	stopped: honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3, init_setup, production_db_seed

Probability metrics: host		
Host CPU, mean ± SD	**16.4% ± 6.4**	average over 52 samples; the SD is the typical swing around it
Host CPU, 95th percentile / peak	**28.0% / 29.7%**	95% of the time usage was at or below the first figure
Host CPU, how unusual the peak is	**2.1 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host CPU, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host CPU, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, mean ± SD	**36.7% ± 6.2**	average over 52 samples; the SD is the typical swing around it
Host RAM used, 95th percentile / peak	**46.6% / 46.7%**	95% of the time usage was at or below the first figure
Host RAM used, how unusual the peak is	**1.6 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host RAM used, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy

2. Per-container

CPU and memory were read from the containers' cgroup files every 0.25 s.

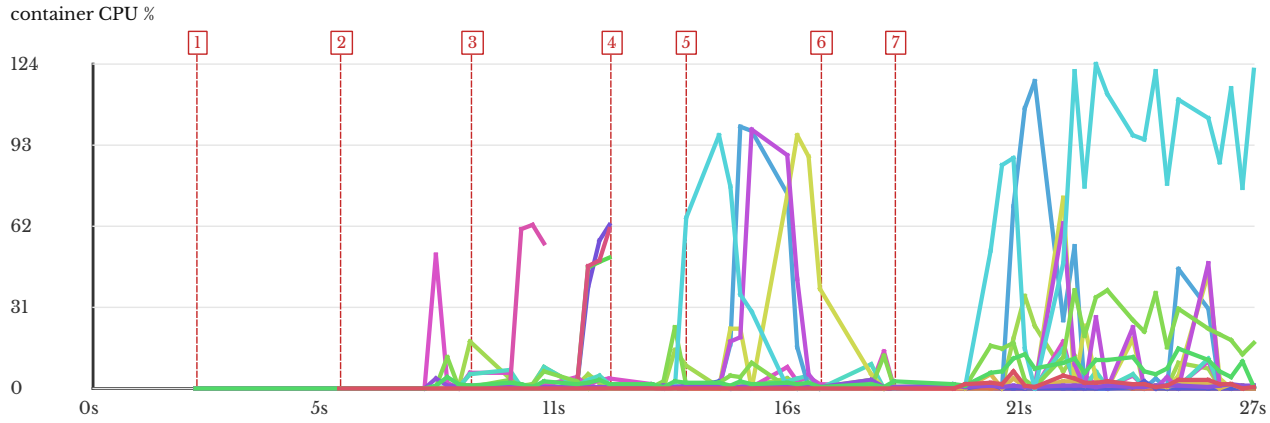

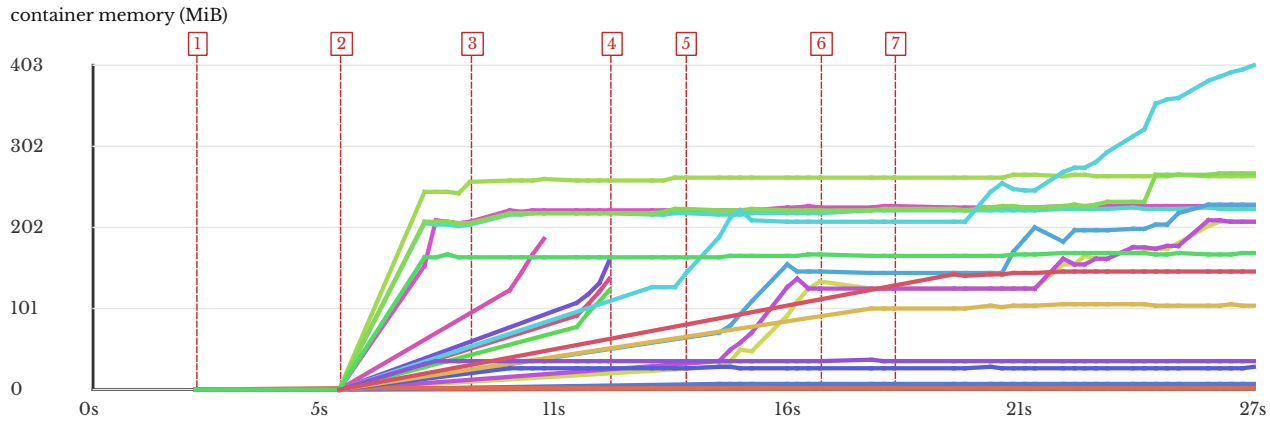

Legend: backup_service honeypot_content_sync honeypot_database_1 honeypot_database_2 honeypot_database_3 honeypot_db_migration honeypot_db_seed_1 honeypot_db_seed_2 honeypot_db_seed_3 honeypot_eshop_1 honeypot_eshop_2 honeypot_eshop_3 init_setup log_capper pool_manager production_database production_db_seed production_eshop reverse_proxy session_store suricata_ids vector_outbound


Probability metrics: per container					
Container	**CPU mean ± SD**	**CPU p95 / peak**	**P(CPU ≥ 50%)**	**Memory MiB, mean ± SD**	**Memory MiB, peak**
backup_service	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0	1
honeypot_content_sync	0.2% ± 0.8	1.0% / 3.6%	0.0%	6 ± 1	7
honeypot_database_1	3.7% ± 7.0	18.0% / 35.2%	0.0%	251 ± 51	267
honeypot_database_2	2.9% ± 7.7	11.8% / 50.7%	1.9%	213 ± 44	228
honeypot_database_3	1.8% ± 3.2	8.2% / 14.7%	0.0%	210 ± 43	225
honeypot_db_migration	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0	0
honeypot_db_seed_1	31.3% ± 29.8	60.8% / 62.0%	40.0%	103 ± 61	160
honeypot_db_seed_2	28.8% ± 26.3	49.4% / 49.7%	0.0%	81 ± 48	123
honeypot_db_seed_3	31.1% ± 28.8	58.0% / 60.3%	20.0%	91 ± 53	136

honeypot_eshop_1	22.3% ± 37.0	102.3% / 117.1%	20.6%	166 ± 53	229
honeypot_eshop_2	15.2% ± 27.7	78.9% / 96.6%	11.8%	134 ± 54	208
honeypot_eshop_3	13.1% ± 25.7	71.9% / 98.7%	8.8%	138 ± 51	209
init_setup	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0	0
log_capper	0.0% ± 0.2	0.0% / 1.2%	0.0%	1 ± 0	2
pool_manager	0.2% ± 0.6	1.3% / 2.5%	0.0%	26 ± 4	27
production_database	9.5% ± 11.5	35.1% / 37.3%	0.0%	220 ± 48	268
production_db_seed	35.6% ± 32.6	61.9% / 62.1%	60.0%	124 ± 73	187
production_eshop	53.3% ± 47.9	121.1% / 123.9%	52.6%	251 ± 89	403
reverse_proxy	1.0% ± 1.3	3.4% / 5.4%	0.0%	99 ± 20	106
session_store	0.6% ± 0.6	1.1% / 3.6%	0.0%	33 ± 7	36
suricata_ids	4.1% ± 4.1	11.5% / 14.9%	0.0%	159 ± 32	169
vector_outbound	1.7% ± 1.6	4.4% / 6.4%	0.0%	139 ± 30	147


P(CPU ≥ 50%) is the share of the recording the container spent at half a core or more, i.e. the chance of catching it that busy at a random moment. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load.

3. Health page as the stack changes state


Before: stack idle / not yet changed

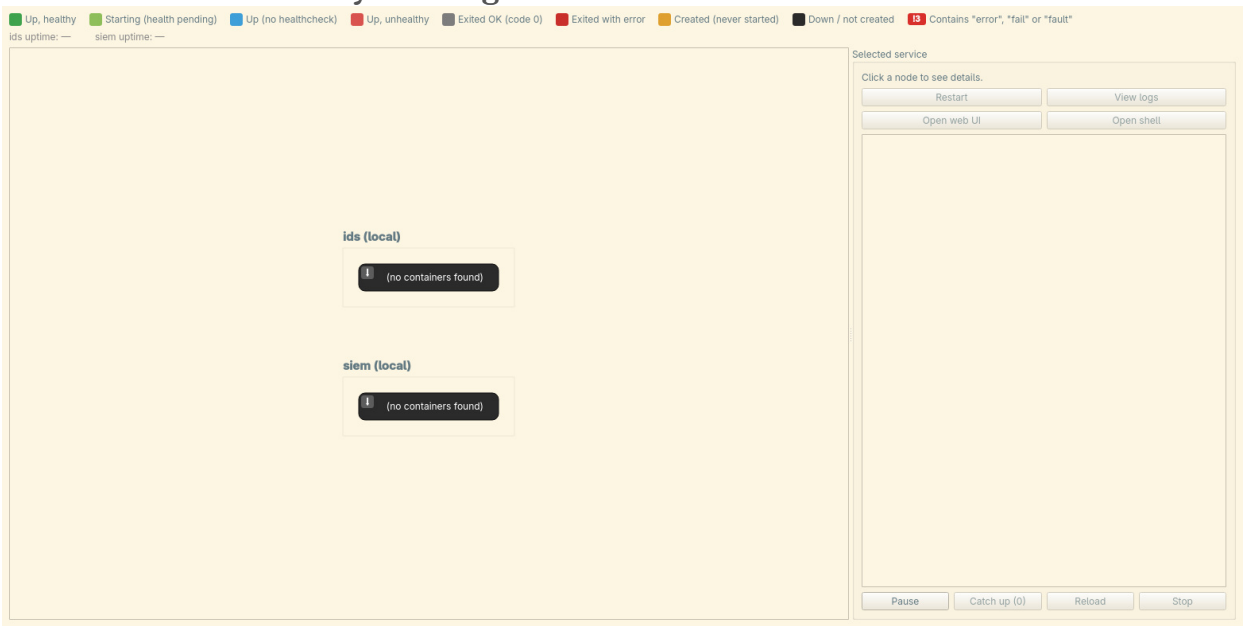

Starting: containers coming up

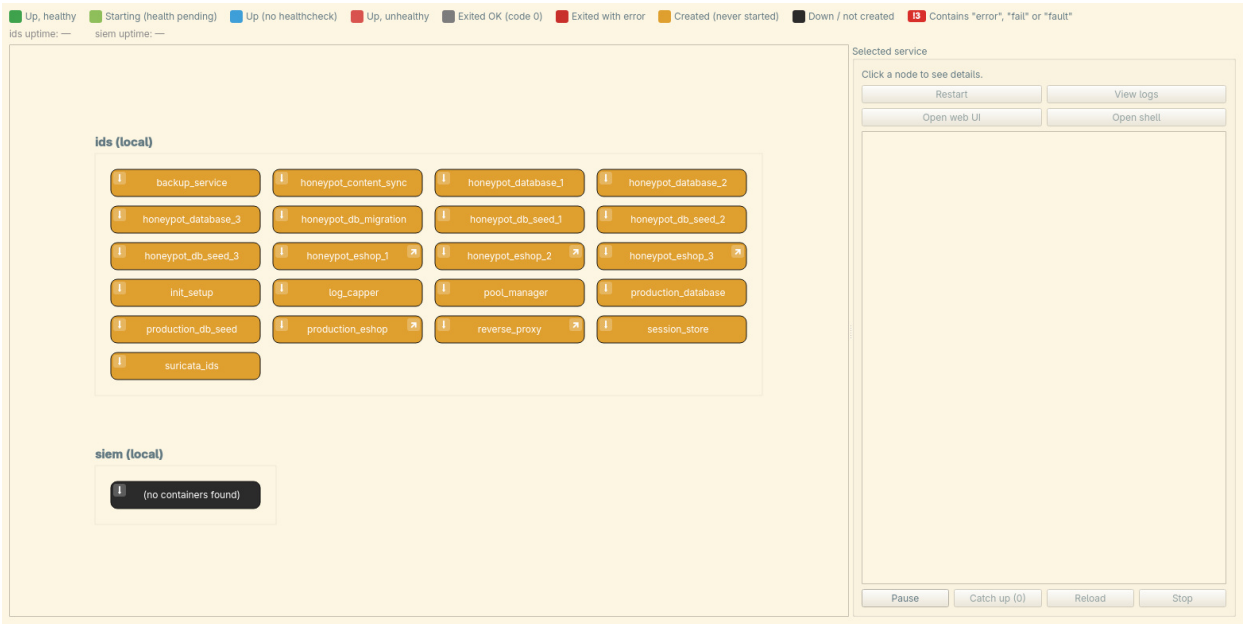

All containers healthy

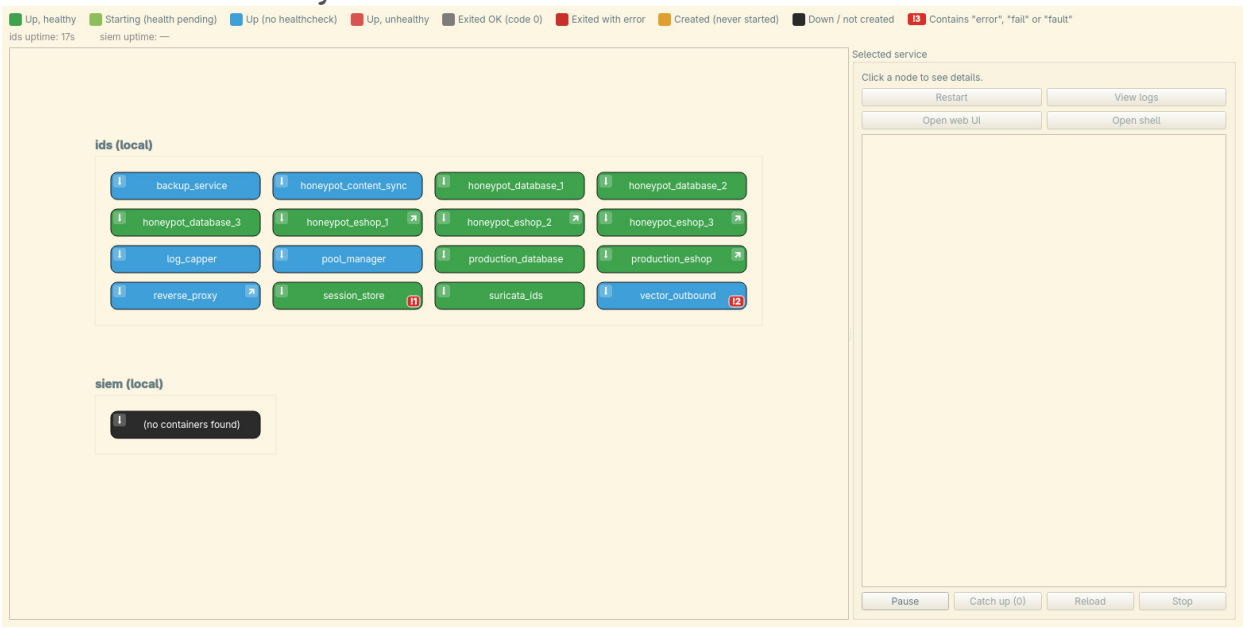

4. Event log

Marker	Elapsed	Event
1	2s	honeypot_database_1 started
1	2s	honeypot_database_2 started
1	2s	honeypot_database_3 started
1	2s	honeypot_db_migration started
1	2s	honeypot_db_seed_1 started
1	2s	init_setup started

1	2s	pool_manager started
1	2s	production_database started
1	2s	production_db_seed started
1	2s	session_store started
1	2s	suricata_ids started
1	2s	log_capper started
2	6s	backup_service started
2	6s	honeypot_content_sync started
2	6s	honeypot_database_1 running, health pending
2	6s	honeypot_database_2 running, health pending
2	6s	honeypot_database_3 running, health pending
2	6s	honeypot_db_seed_2 started
2	6s	honeypot_db_seed_3 started
2	6s	honeypot_eshop_1 started
2	6s	honeypot_eshop_2 started
2	6s	honeypot_eshop_3 started
2	6s	production_database running, health pending
2	6s	production_eshop started
2	6s	reverse_proxy started
2	6s	session_store running, health pending
2	6s	suricata_ids running, health pending
2	6s	vector_outbound started
3	9s	honeypot_database_1 healthy
3	9s	honeypot_database_2 healthy
3	9s	honeypot_database_3 healthy
3	9s	production_database healthy
3	9s	session_store healthy
3	9s	suricata_ids healthy
4	12s	production_eshop running, health pending
5	14s	honeypot_eshop_1 running, health pending
5	14s	honeypot_eshop_2 running, health pending
5	14s	honeypot_eshop_3 running, health pending
5	15s	production_eshop healthy
6	17s	honeypot_eshop_1 healthy
6	17s	honeypot_eshop_2 healthy
6	17s	honeypot_eshop_3 healthy
7	18s	honeypot_db_migration stopped
7	18s	honeypot_db_seed_1 stopped

7	18s	honeypot_db_seed_2 stopped
7	18s	honeypot_db_seed_3 stopped
7	18s	init_setup stopped
7	18s	production_db_seed stopped