Service start-up report

Generated: 2026-10-02 18:36:41
Target: siem (local)
Operation: **start** · Recorded window: 455s · compose exit code: **0**

Resource usage recorded while the stack was brought up. Each dashed red vertical line marks a major event (a container starting, going healthy or unhealthy, or stopping); the largest CPU peak is called out with the event it lines up with. **Figure 1** shows how these services fit together – the per-container graphs below track each box in it.

Reading the probability metrics. A **95% confidence interval (CI)** is the range the true value would fall in 95 times out of 100 if the measurement were repeated: a wide interval means few or noisy samples, a narrow one means the figure is well pinned down. A **p-value** is the probability of seeing a difference at least this large if there were really no effect; below 0.05 it is conventionally called *significant*, i.e. unlikely to be chance. Rates use the Wilson interval, which stays within 0–100% even for small samples or 0% / 100% results. Where a mean over a time series (CPU, memory) has a CI, it uses an effective sample size that discounts correlated neighbouring samples, so it is not over-confident. **P(≥x)** is the share of a recording spent at or above x: the chance that a randomly picked moment was that busy. **SD** (standard deviation) is the typical distance of a value from the mean.

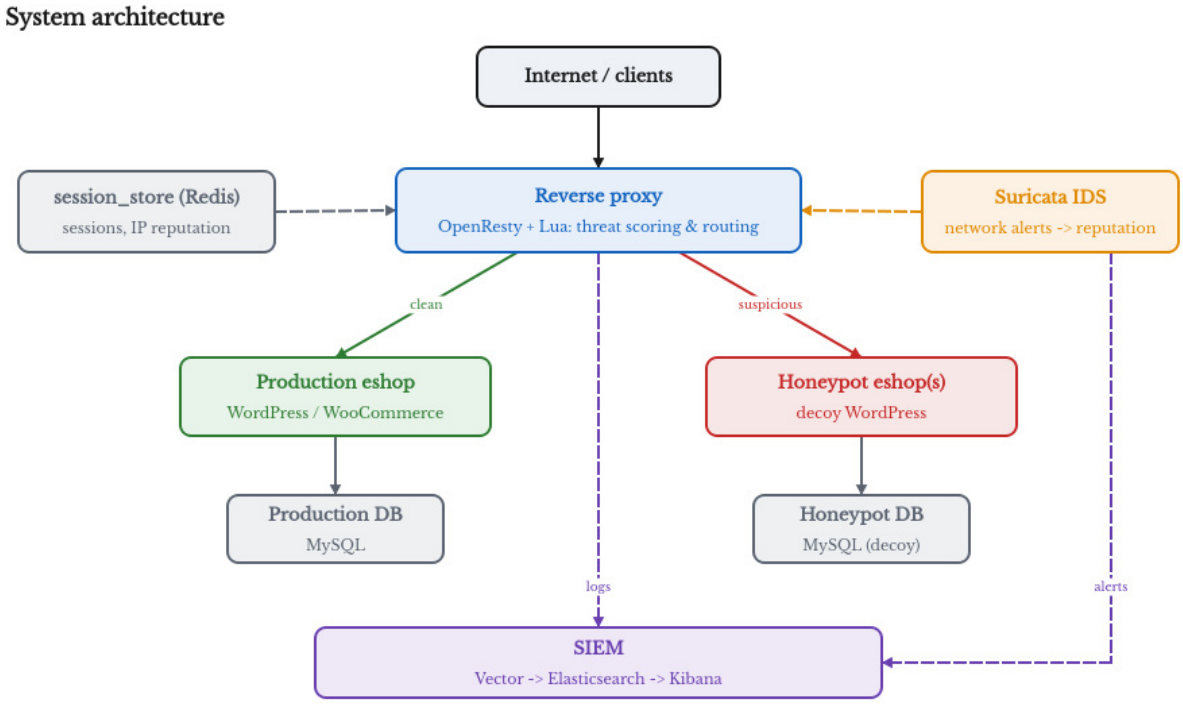


Figure 1. System architecture: the services whose CPU / memory the per-container charts below track as the stack is started.

1. Overall system (host)





■ host CPU % ■ host RAM % used

Probability metrics: host		
Host CPU, mean ± SD	**10.1% ± 7.6**	average over 346 samples; the SD is the typical swing around it
Host CPU, 95th percentile / peak	**25.8% / 48.0%**	95% of the time usage was at or below the first figure
Host CPU, how unusual the peak is	**5.0 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host CPU, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host CPU, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, mean ± SD	**54.8% ± 11.4**	average over 346 samples; the SD is the typical swing around it
Host RAM used, 95th percentile / peak	**71.7% / 72.1%**	95% of the time usage was at or below the first figure
Host RAM used, how unusual the peak is	**1.5 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host RAM used, P(≥50%)	**46.0%**	chance a random moment of this recording was at least this busy
Host RAM used, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy

2. Per-container

CPU and memory were read from the containers' cgroup files every 0.25 s.

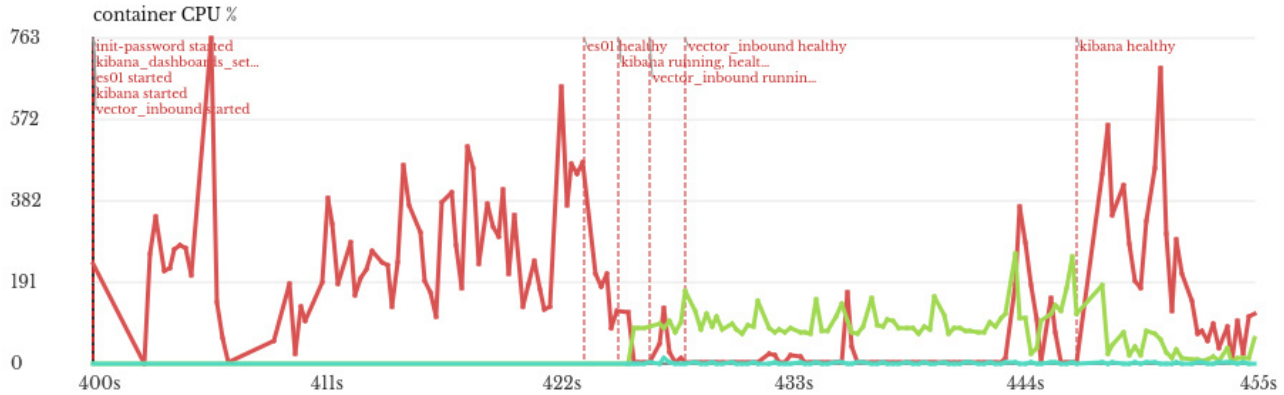

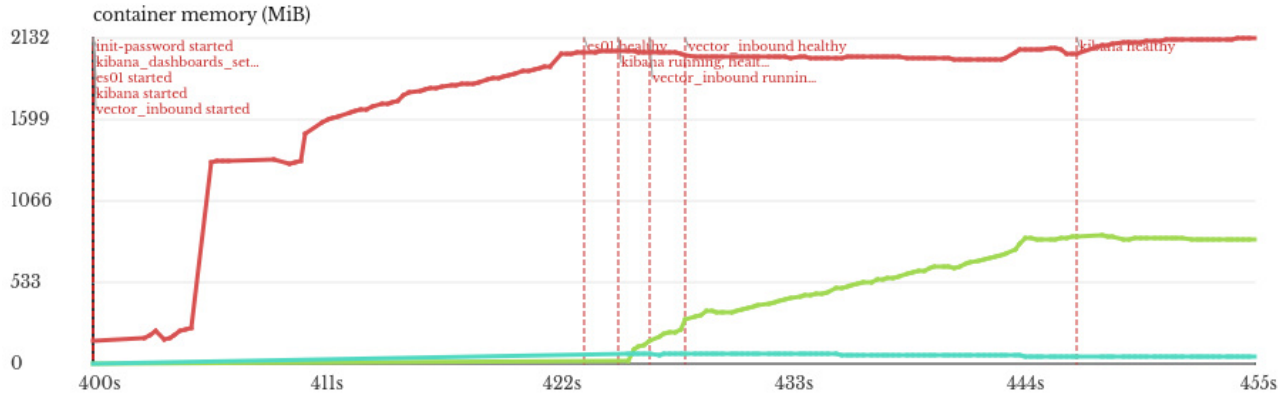


Legend: ■ es01 ■ init-password ■ kibana ■ kibana_dashboards_setup ■ vector_inbound

Probability metrics: per container				
Container	**CPU mean ± SD**	**CPU p95 / peak**	**P(CPU ≥ 50%)**	**Memory MiB, mean ± SD**
es01	146.1% ± 163.7	457.0% / 763.3%	57.4%	1833 ± 454
init-password	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0
kibana	79.2% ± 47.6	154.3% / 256.3%	76.7%	576 ± 232
kibana_dashboards_setup	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0
vector_inbound	0.1% ± 1.2	0.1% / 12.7%	0.0%	52 ± 8


P(CPU ≥ 50%) is the share of the recording the container spent at half a core or more, i.e. the chance of catching it that busy at a random moment. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load.

3. Health page as the stack changes state


Before: stack idle / not yet changed

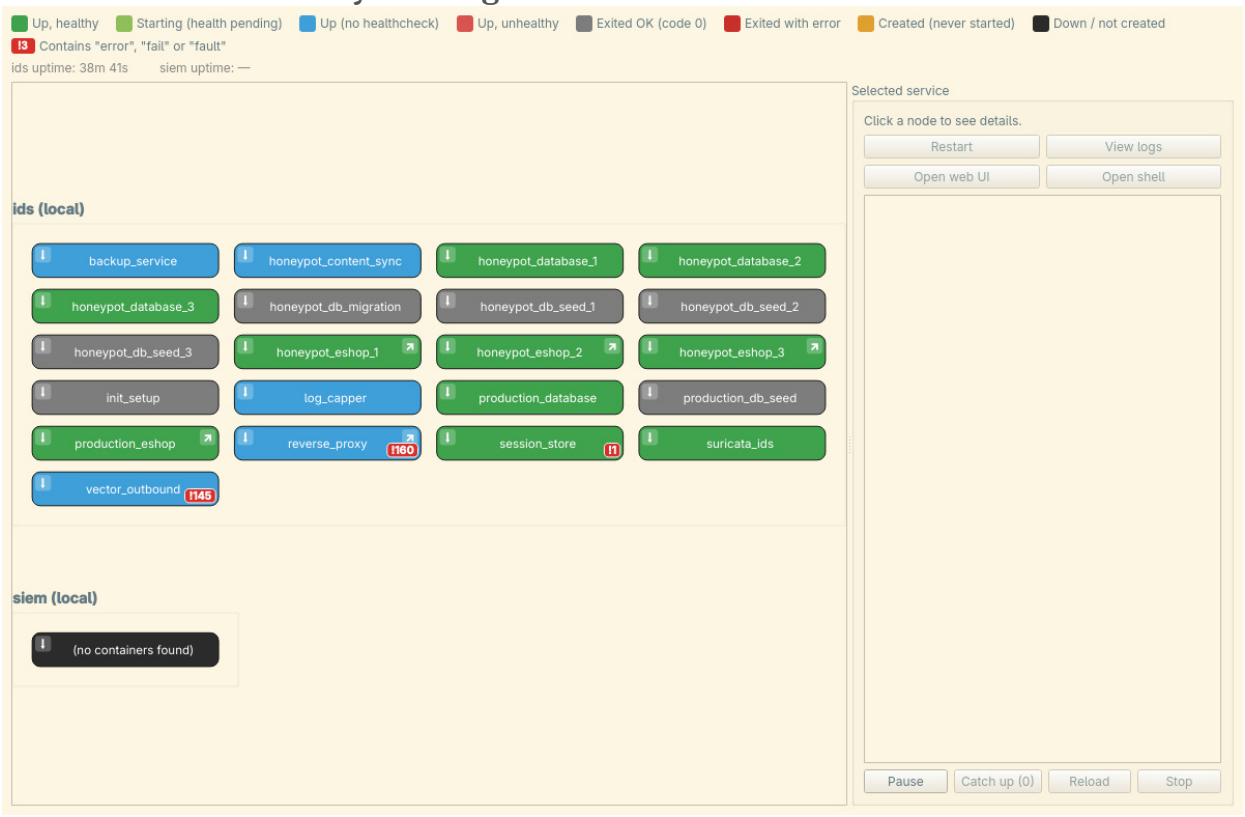

Starting: containers coming up

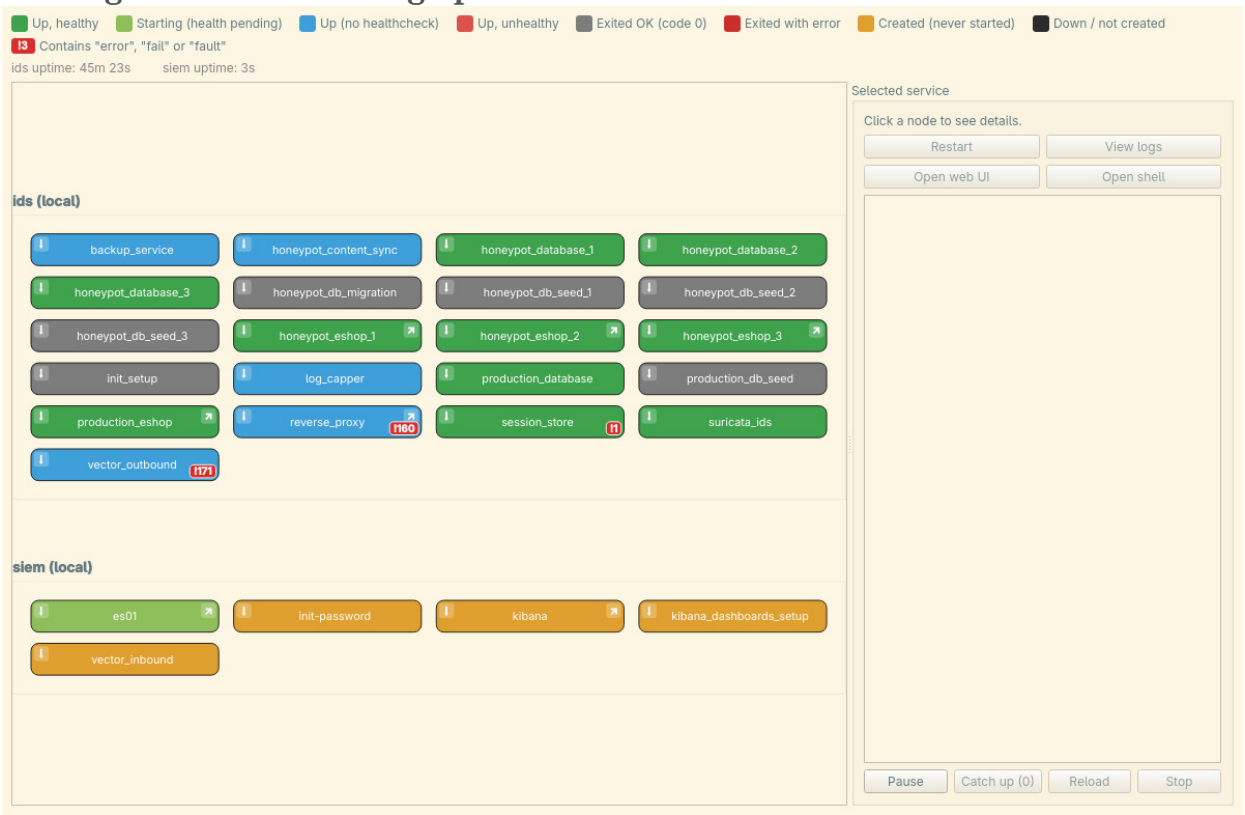

All containers healthy

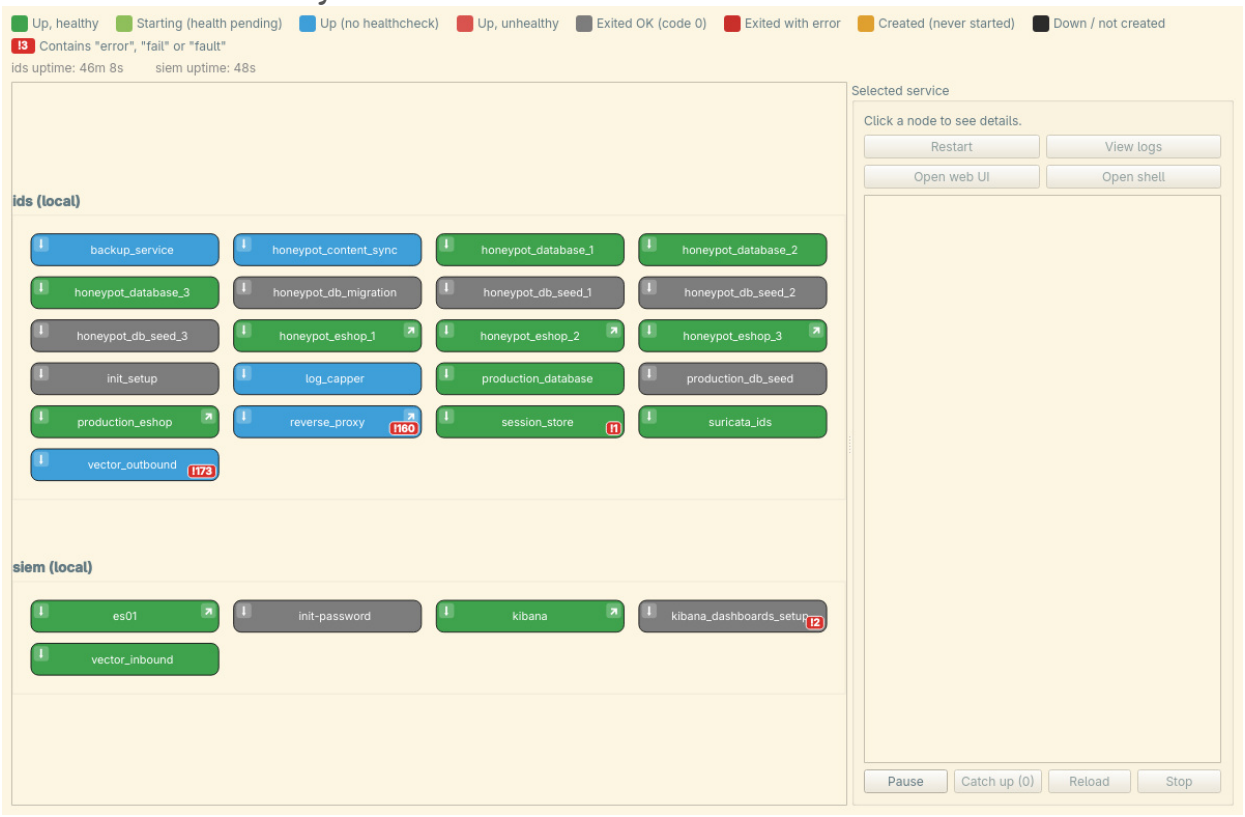

4. Event log

Elapsed	Event
400s	init-password started
400s	kibana_dashboards_setup started
400s	es01 started
400s	kibana started
400s	vector_inbound started
423s	es01 healthy
425s	kibana running, health pending
426s	vector_inbound running, health pending
428s	vector_inbound healthy
446s	kibana healthy