Service start-up report

Target: **ids (local)**
Recording started (t = 0): 2026-10-18 15:28:29 CEST (UTC+0200)
Report generated: 2026-10-18 15:29:33 CEST
Operation: **start** · Recorded window: 64s · compose exit code: **0**

Warnings

Found from *docker compose ps -a* after the start settled and the logs written during it, using the same test as the red error badges on the Global Visualization page. Timestamps inside quoted log lines are the service's own, usually UTC.

Service	Problem
vector_outbound	1 error line(s) in its log, e.g. “2026-10-18T13:28:49.815134Z ERROR vector::topology::builder: msg="Healthcheck failed." error=Request failed: status: Unavailable, message: "error trying to connect: tcp connect error: Connection refused (os error 111)", ”

A tile's red badge counts every log line with an error word ("error", "fail…", "fault…", whatever its level) since the dashboard's log tail last started, including the 50 lines of scrollback it replays, and it keeps counting after the report ends; the Warnings here count only the lines logged during the recording. So the two numbers can differ, and a line logged after a screenshot shows up in a later one.

Resource usage recorded while the stack was brought up. Each dashed red vertical line marks an event (a container created, started, going healthy or unhealthy, or a one-shot job finishing or being removed), numbered in a band above the graph. Container states come from *docker compose ps*, checked every ~1.5s, so event times are good to about a second. Events up to 1.5s after the first event of a number share it (in practice, the changes seen in one status check); the event key under the host graph lists what each number covers, with its time to a tenth of a second. The largest host CPU peak is called out with where it falls among the markers. **Figure 1** lists the containers of this stack, grouped as in the per-container graphs of section 2.

Host CPU and RAM were read from /proc every 0.25s, per-container CPU and memory were read from the containers' cgroup files every 0.25 s. A line is broken wherever no sample was taken for longer than a few sampling intervals, rather than drawn straight across, and a × marks where a container's line ends before the window does (it stopped, was removed, or a one-shot job exited). A container's line starts at its first sample, once it is really running.

Without a healthcheck, backup_service, honeypot_content_sync, log_capper, pool_manager, reverse_proxy, vector_outbound never get a “healthy” event: “started” is their last state, so a late “started” marker is that container being ready, not a missing event.

Reading the metrics. **SD** (standard deviation) is the typical distance of a value from the mean. The **95th percentile** is the level usage stayed at or below 95% of the time; a **peak** far above it is a short burst rather than sustained load. **P(≥x)** is the share of the recording spent at or above *x*: the chance that a randomly picked moment was that busy. “How unusual the peak is” counts SDs above the mean; more than about 3 is a rare spike.

Services: ids (local)

One-shot jobs
run once at start-up, then exit

honeypot_db_seed_1
honeypot_db_seed_2
honeypot_db_seed_3
init_setup
production_db_seed

Databases
MySQL pools / Elasticsearch

honeypot_database_1
honeypot_database_2
honeypot_database_3
production_database

Shops
production and honeypot WordPress


honeypot_eshop_1
honeypot_eshop_2
honeypot_eshop_3
production_eshop

Edge & monitoring
proxy, IDS, log shipping, support jobs

backup_service
honeypot_content_sync
log_capper
pool_manager
reverse_proxy
session_store
suricata_ids
vector_outbound

Figure 1. Containers of ids (local) grouped as in the per-container charts in section 2: each box lists exactly the containers those charts plot. The SIEM (Elasticsearch, Kibana) is a separate stack with its own report; here it only receives logs from vector_outbound.

1. Overall system (host)

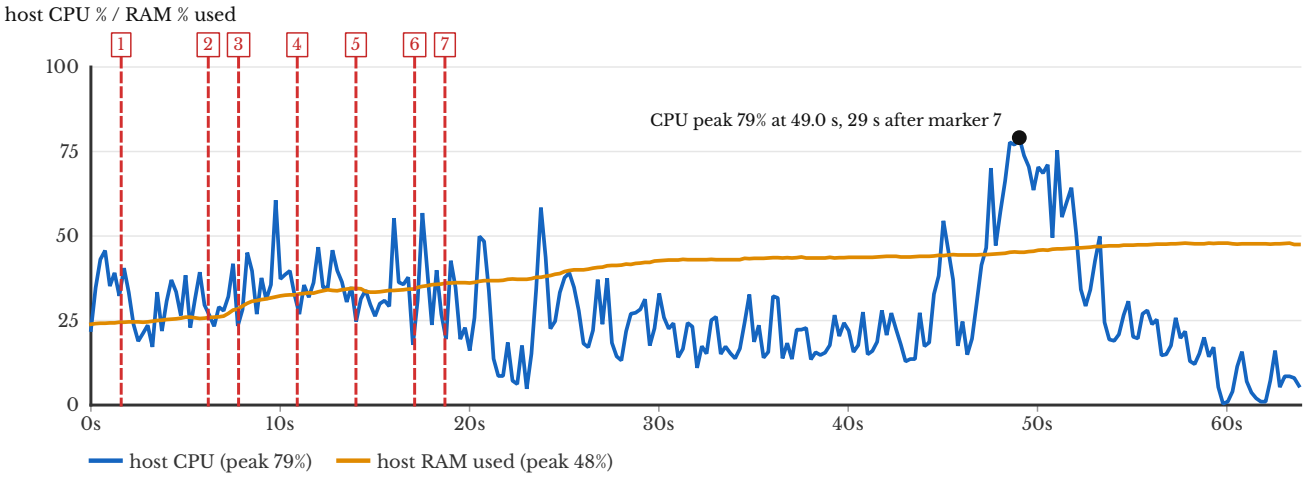

Event key (marker numbers on all graphs)

Marker	Elapsed	What happened
1	1.6 s–3.1 s	created: honeypot_database_1, honeypot_database_2, honeypot_database_3, init_setup, production_database, session_store, suricata_ids, log_capper, backup_service, honeypot_content_sync, honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3, honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3, pool_manager, production_db_seed, production_eshop, reverse_proxy, vector_outbound; started: init_setup, log_capper
2	6.2 s	finished: init_setup
3	7.8 s–9.3 s	healthy: production_database, honeypot_database_1, honeypot_database_2, honeypot_database_3, session_store, suricata_ids; started: pool_manager, production_db_seed
4	10.9 s–12.4 s	started: honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3; finished: honeypot_db_migration
5	14.0 s–15.5 s	finished: honeypot_db_seed_1, production_db_seed, honeypot_db_seed_2, honeypot_db_seed_3; running, health pending: production_eshop, honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3; started: honeypot_content_sync
6	17.1 s	healthy: production_eshop
7	18.7 s–20.2 s	started: backup_service, reverse_proxy, vector_outbound; healthy: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3


Probability metrics: host		
Host CPU, mean ± SD	**28.4% ± 15.6**	average over 256 samples; the SD is the typical swing around it
Host CPU, 95th percentile / peak	**61.4% / 79.1%**	95% of the time usage was at or below the first figure
Host CPU, how unusual the peak is	**3.2 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host CPU, P(≥50%)	**8.6%**	chance a random moment of this recording was at least this busy
Host CPU, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, mean ± SD	**39.6% ± 7.2**	average over 256 samples; the SD is the typical swing around it
Host RAM used, 95th percentile / peak	**47.7% / 47.9%**	95% of the time usage was at or below the first figure
Host RAM used, how unusual the peak is	**1.1 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host RAM used, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy

2. Per-container


Container CPU is in % of one core: 100% is one core fully busy, so a multi-threaded container goes above 100%. This host has 20 cores, so the ceiling is 2000%. Grouped by role, one CPU and one memory chart per group, so every line in a chart has a colour of its own; when one or two containers dwarf the rest, they get a chart of their own and the others are drawn on their own scale.

One-shot jobs

One-shot jobs: container CPU %

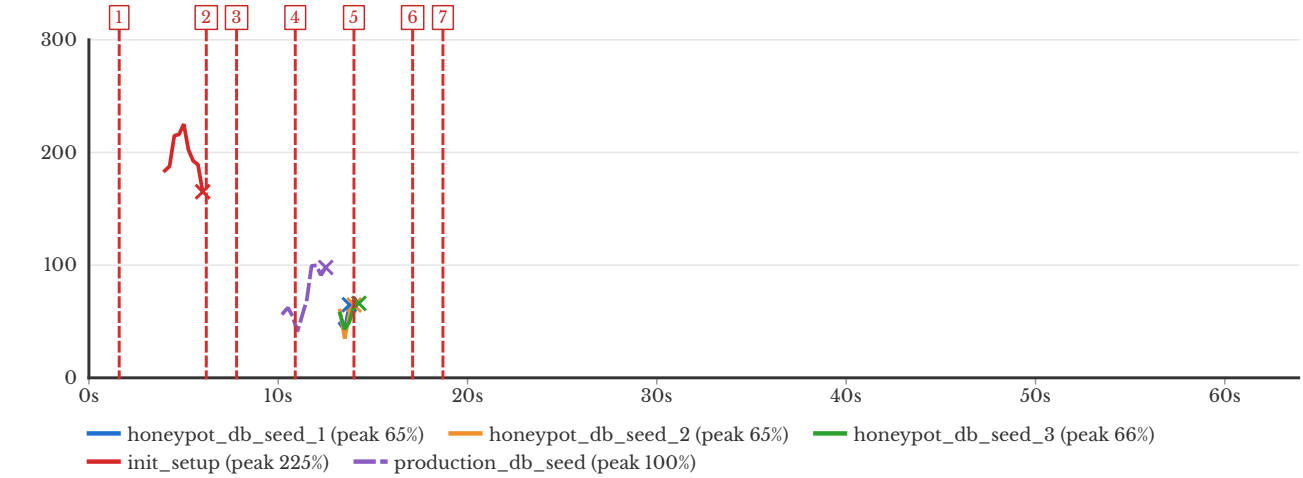


One-shot jobs: container memory (MiB)

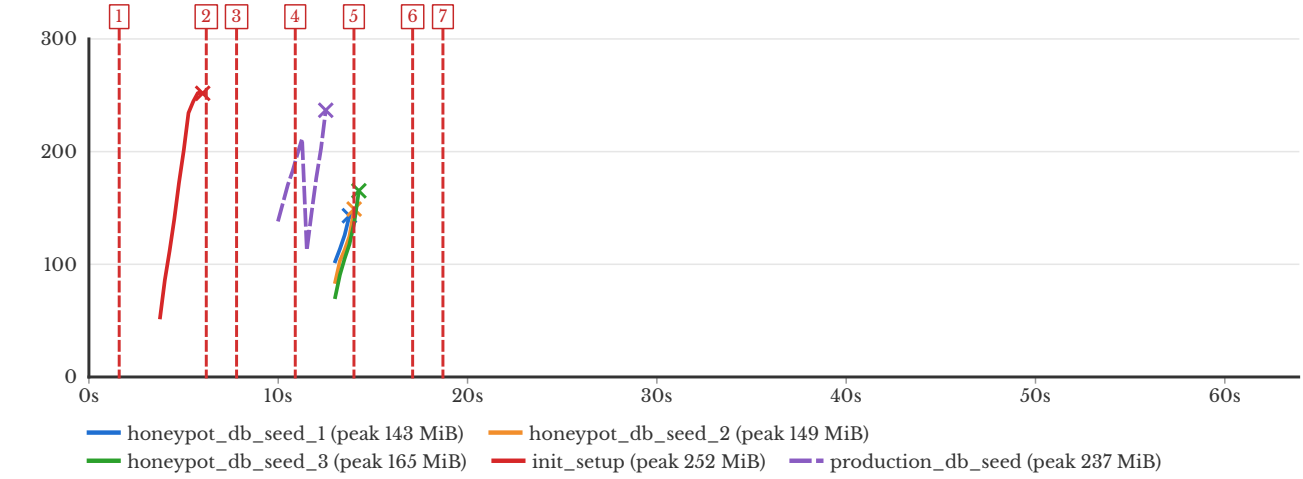


Databases

Databases: container CPU %

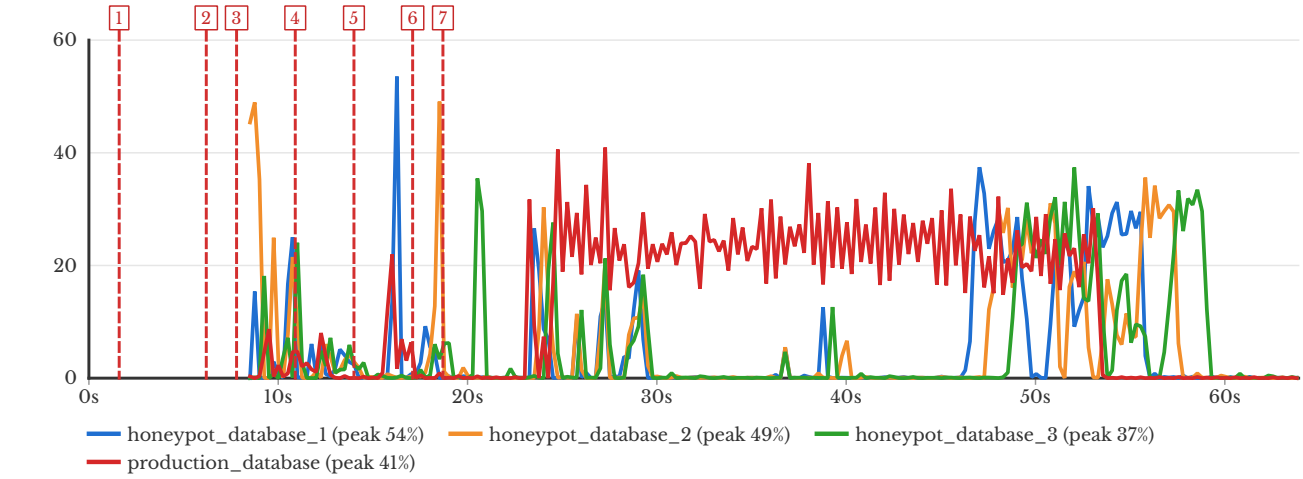


Databases: container memory (MiB)

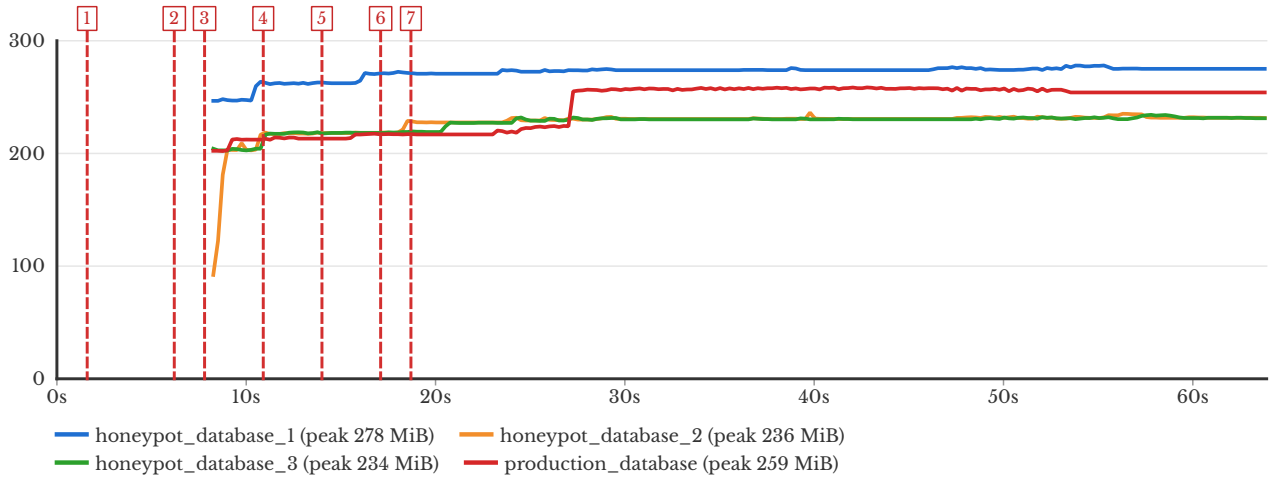


Shops

Shops: container CPU %

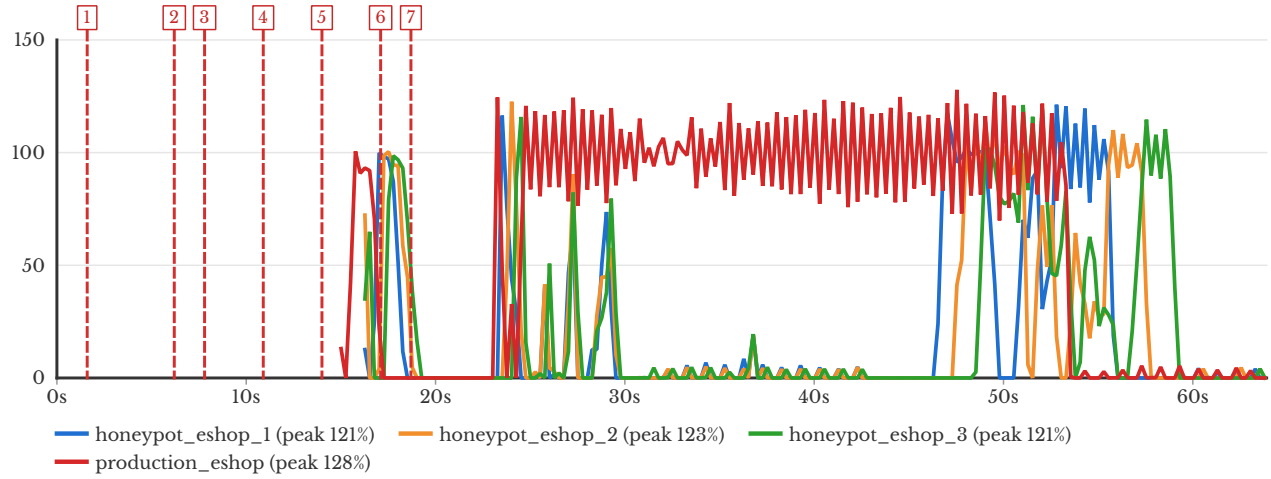


Shops: container memory (MiB)

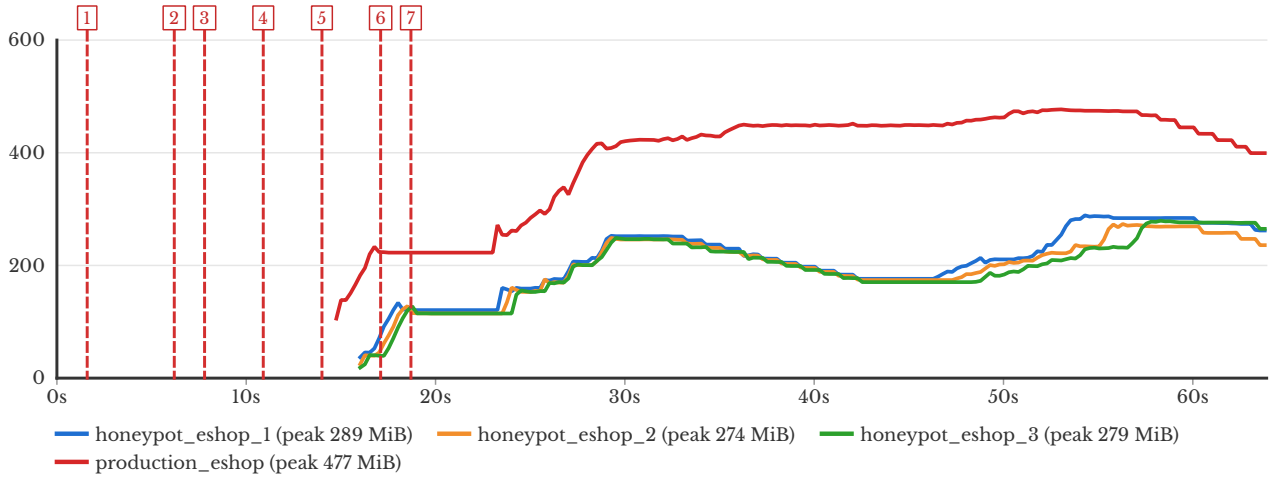


Edge & monitoring

Edge & monitoring: container CPU %

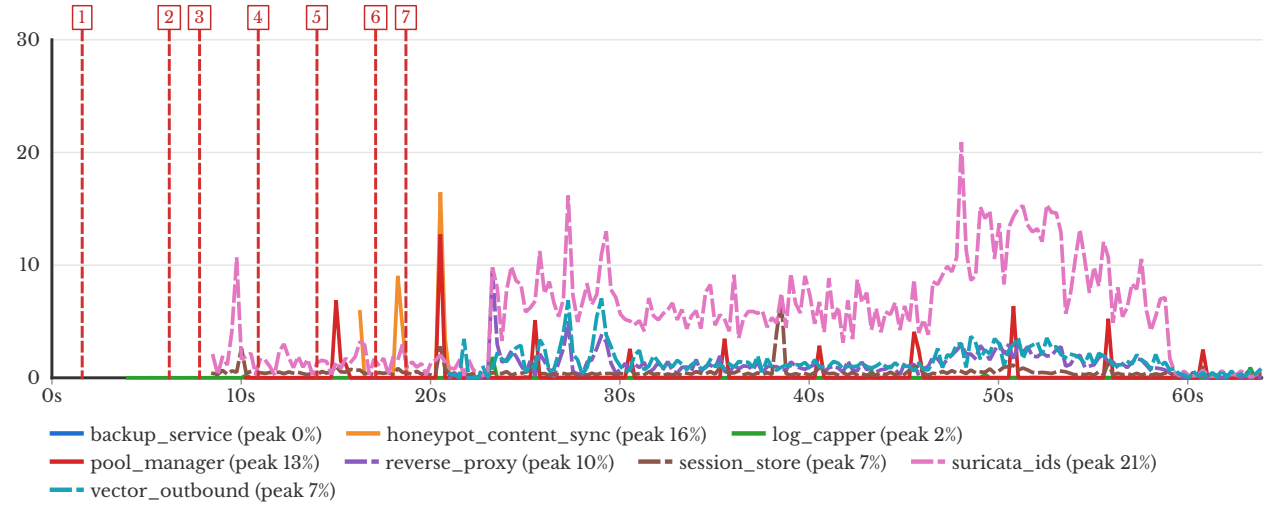

Edge & monitoring: container memory (MiB)

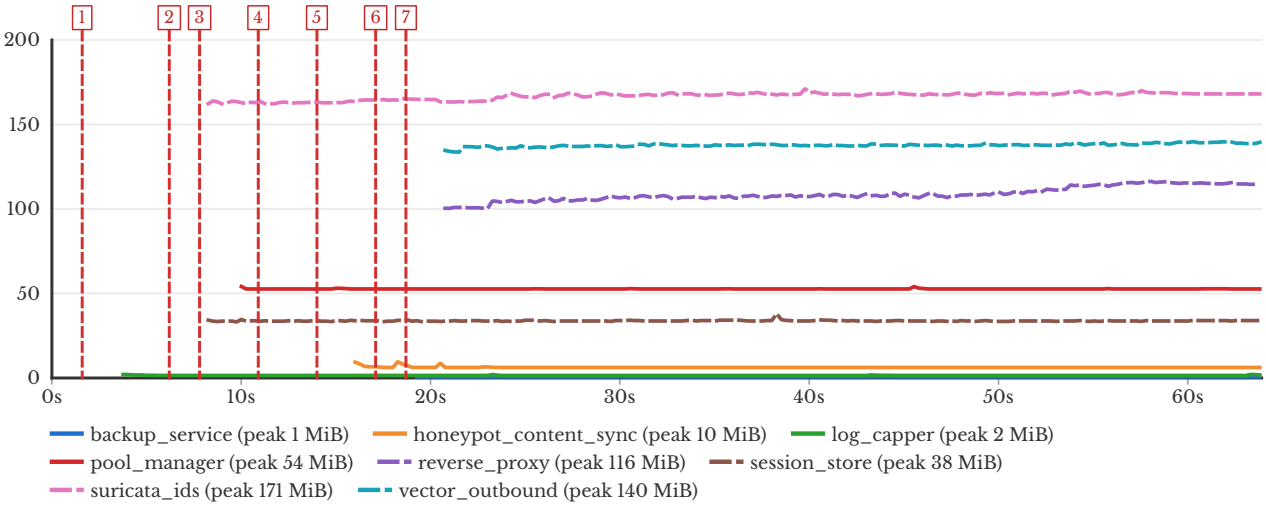


Probability metrics: per container						
Container	**Samples / over**	**CPU mean ± SD**	**CPU p95 / peak**	**P(CPU ≥ 50%)**	**Mem MiB mean ± SD**	**Mem MiB peak**
backup_service	179 / 44.5 s	0.0% ± 0.0	0.0% / 0.0%	0.0%	1 ± 0	1
honeypot_content_sync	192 / 47.8 s	0.2% ± 1.5	0.0% / 16.5%	0.0%	6 ± 0	10
honeypot_database_1	223 / 55.5 s	5.1% ± 9.7	27.7% / 53.5%	0.5%	272 ± 6	278
honeypot_database_2	223 / 55.5 s	5.5% ± 10.3	29.6% / 49.1%	0.0%	227 ± 14	236
honeypot_database_3	223 / 55.5 s	5.1% ± 9.4	29.2% / 37.4%	0.0%	227 ± 7	234
honeypot_db_seed_1*	4 / 0.8 s	51.8% ± 11.7	63.2% / 64.9%	33.3%	121 ± 17	143
honeypot_db_seed_2*	5 / 1.0 s	54.0% ± 13.1	63.9% / 64.6%	75.0%	115 ± 24	149
honeypot_db_seed_3*	6 / 1.2 s	56.0% ± 9.7	65.7% / 66.1%	60.0%	114 ± 34	165
honeypot_eshop_1	192 / 47.8 s	21.1% ± 37.1	101.0% / 121.3%	19.9%	208 ± 58	289
honeypot_eshop_2	192 / 47.8 s	21.0% ± 35.9	100.5% / 122.6%	18.3%	197 ± 55	274
honeypot_eshop_3	192 / 47.8 s	20.6% ± 34.9	97.7% / 121.2%	19.4%	194 ± 58	279
init_setup	10 / 2.2 s	197.4% ± 18.9	221.5% / 225.2%	100.0%	175 ± 74	252
log_capper	241 / 60.0 s	0.0% ± 0.1	0.0% / 1.8%	0.0%	2 ± 0	2
pool_manager	216 / 53.8 s	0.3% ± 1.3	1.7% / 12.7%	0.0%	53 ± 0	54
production_database	223 / 55.5 s	13.0% ± 12.2	31.2% / 40.9%	0.0%	243 ± 19	259
production_db_seed	11 / 2.5 s	72.8% ± 22.2	99.6% / 99.8%	90.0%	176 ± 36	237
production_eshop	197 / 49.0 s	62.9% ± 49.4	122.0% / 127.9%	62.2%	391 ± 97	477
reverse_proxy	173 / 43.0 s	1.2% ± 1.1	2.9% / 9.6%	0.0%	109 ± 4	116
session_store	223 / 55.5 s	0.5% ± 0.6	1.0% / 6.9%	0.0%	34 ± 0	38
suricata_ids	223 / 55.5 s	5.5% ± 4.2	13.7% / 20.9%	0.0%	167 ± 2	171
vector_outbound	173 / 43.0 s	1.5% ± 1.1	3.5% / 7.0%	0.0%	138 ± 1	140

Each row covers only the samples taken while that container was running (count and the time between its first and last one). P(CPU ≥ 50%) is the share of those samples at half a core or more, i.e. the chance of catching it that busy at a random moment of its run. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load. * fewer than 10 samples (the container ran only briefly while recorded): its figures describe a moment, not the whole run. **init_setup** sat at or near its 256 MiB memory limit for 20% of its samples. The cgroup memory figure includes the page cache, so a database or Elasticsearch filling its limit is normally cached files (released under pressure), not a leak.


3. Global Visualization page as the stack changes state

Only this target's tiles, drawn from the same *docker compose ps* result the report logged at that moment, so tile colours and the event log agree. Badges are explained under Warnings.

Before: stack idle / not yet changed (before t = 0)

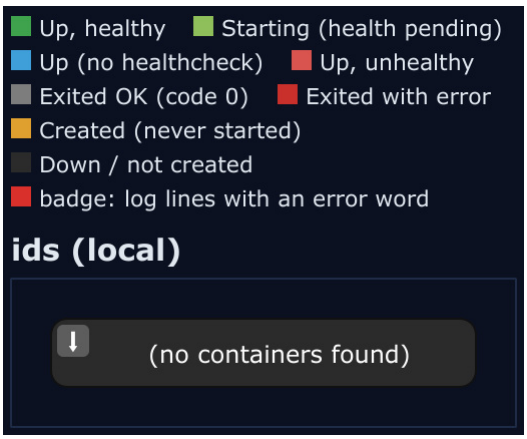

Starting: containers coming up (at 1.6 s)

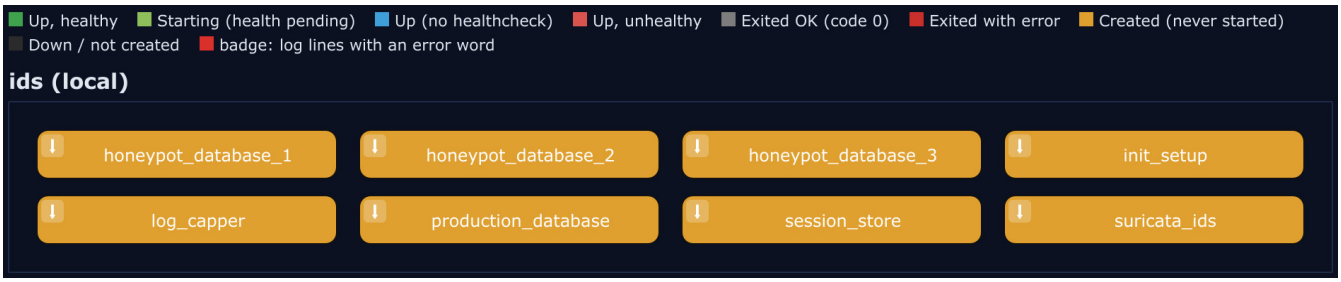

All containers healthy — but 1 warning(s), see Warnings (at 20.9 s)



Appendix: event log

The events behind the event key, one per row.

Marker	Elapsed	Event
1	1.6 s	honeypot_database_1 created
1	1.6 s	honeypot_database_2 created

Marker	Elapsed	Event
1	1.6 s	honeypot_database_3 created
1	1.6 s	init_setup created
1	1.6 s	production_database created
1	1.6 s	session_store created
1	1.6 s	suricata_ids created
1	1.6 s	log_capper created
1	3.1 s	backup_service created
1	3.1 s	honeypot_content_sync created
1	3.1 s	honeypot_db_migration created
1	3.1 s	honeypot_db_seed_1 created
1	3.1 s	honeypot_db_seed_2 created
1	3.1 s	honeypot_db_seed_3 created
1	3.1 s	honeypot_eshop_1 created
1	3.1 s	honeypot_eshop_2 created
1	3.1 s	honeypot_eshop_3 created
1	3.1 s	init_setup started
1	3.1 s	pool_manager created
1	3.1 s	production_db_seed created
1	3.1 s	production_eshop created
1	3.1 s	reverse_proxy created
1	3.1 s	vector_outbound created
1	3.1 s	log_capper started
2	6.2 s	init_setup finished
3	7.8 s	honeypot_database_1 running, health pending
3	7.8 s	honeypot_database_2 running, health pending
3	7.8 s	honeypot_database_3 running, health pending
3	7.8 s	production_database healthy
3	7.8 s	session_store running, health pending
3	7.8 s	suricata_ids running, health pending
3	9.3 s	honeypot_database_1 healthy
3	9.3 s	honeypot_database_2 healthy
3	9.3 s	honeypot_database_3 healthy
3	9.3 s	pool_manager started
3	9.3 s	production_db_seed started
3	9.3 s	session_store healthy
3	9.3 s	suricata_ids healthy
4	10.9 s	honeypot_db_migration started
4	12.4 s	honeypot_db_migration finished
4	12.4 s	honeypot_db_seed_1 started
4	12.4 s	honeypot_db_seed_2 started
4	12.4 s	honeypot_db_seed_3 started
5	14.0 s	honeypot_db_seed_1 finished
5	14.0 s	production_db_seed finished
5	14.0 s	production_eshop running, health pending

Marker	Elapsed	Event
5	15.5 s	honeypot_content_sync started
5	15.5 s	honeypot_db_seed_2 finished
5	15.5 s	honeypot_db_seed_3 finished
5	15.5 s	honeypot_eshop_1 running, health pending
5	15.5 s	honeypot_eshop_2 running, health pending
5	15.5 s	honeypot_eshop_3 running, health pending
6	17.1 s	production_eshop healthy
7	18.7 s	backup_service started
7	18.7 s	honeypot_eshop_1 healthy
7	18.7 s	honeypot_eshop_2 healthy
7	18.7 s	honeypot_eshop_3 healthy
7	20.2 s	reverse_proxy started
7	20.2 s	vector_outbound started