Service shutdown report

Generated: 2026-10-09 12:42:17
Target: ids (local)
Operation: **stop** · Recorded window: 31s · compose exit code: **0**

Resource usage recorded while the stack was taken down. Each dashed red vertical line marks a major event (a container starting, going healthy or unhealthy, or stopping), numbered in a band above the graph; events within 1.5s of each other share one number, and the event key under the host graph says what each number covers. The largest CPU peak is called out with the marker it lines up with. **Figure 1** shows how these services fit together – the per-container graphs below track each box in it.

Reading the probability metrics. A **95% confidence interval (CI)** is the range the true value would fall in 95 times out of 100 if the measurement were repeated: a wide interval means few or noisy samples, a narrow one means the figure is well pinned down. A **p-value** is the probability of seeing a difference at least this large if there were really no effect; below 0.05 it is conventionally called *significant*, i.e. unlikely to be chance. Rates use the Wilson interval, which stays within 0–100% even for small samples or 0% / 100% results. Where a mean over a time series (CPU, memory) has a CI, it uses an effective sample size that discounts correlated neighbouring samples, so it is not over-confident. **P(≥x)** is the share of a recording spent at or above x: the chance that a randomly picked moment was that busy. **SD** (standard deviation) is the typical distance of a value from the mean.


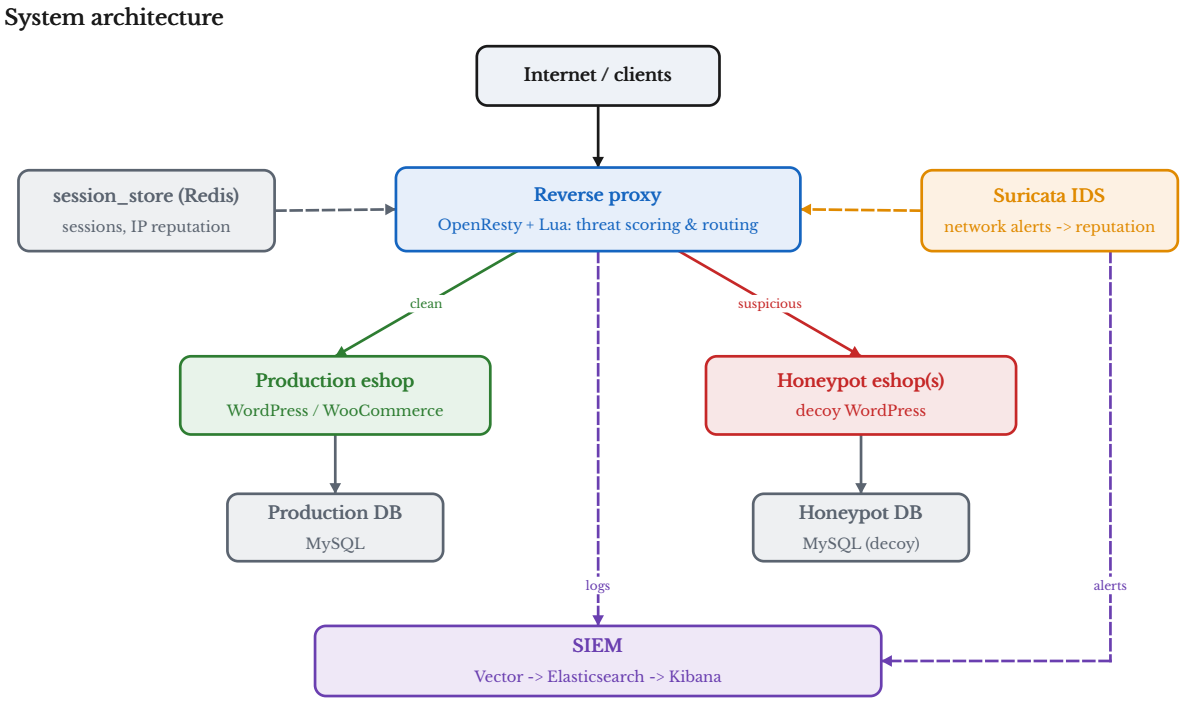


Figure 1. System architecture: the services whose CPU / memory the per-container charts below track as the stack is stopped.

1. Overall system (host)

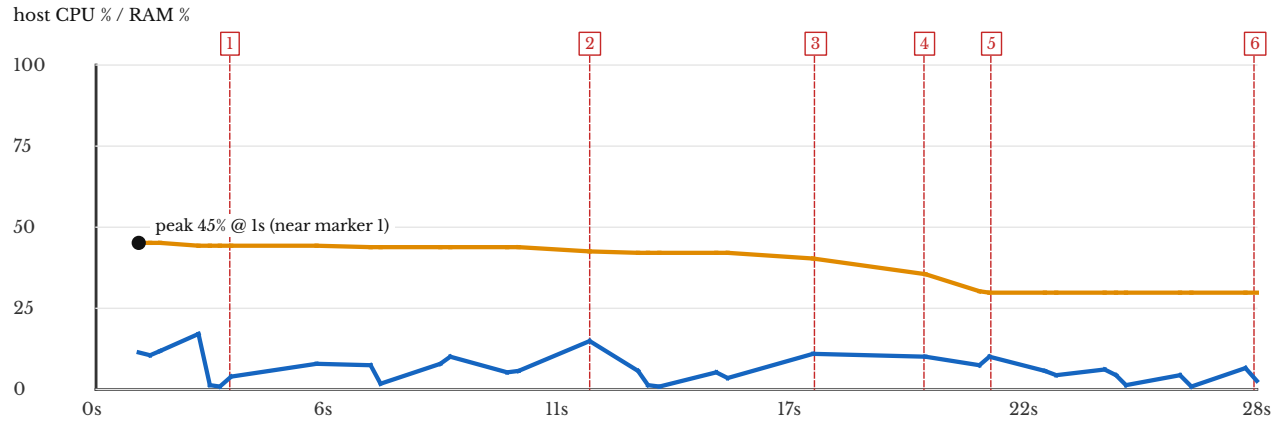


Event key (marker numbers on all graphs)


Marker	Elapsed	What happened
1	3s	stopped: suricata_ids
2	12s	stopped: backup_service, honeypot_content_sync, pool_manager, vector_outbound, log_capper
3	17s	stopped: reverse_proxy
4	20s	stopped: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3, production_eshop
5	21s	stopped: honeypot_database_1, honeypot_database_2, honeypot_database_3, production_database
6	28s	stopped: init_setup, session_store

Probability metrics: host		
Host CPU, mean ± SD	**6.2% ± 4.2**	average over 33 samples; the SD is the typical swing around it
Host CPU, 95th percentile / peak	**12.8% / 17.1%**	95% of the time usage was at or below the first figure
Host CPU, how unusual the peak is	**2.6 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host CPU, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host CPU, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, mean ± SD	**38.6% ± 6.6**	average over 33 samples; the SD is the typical swing around it
Host RAM used, 95th percentile / peak	**45.1% / 45.1%**	95% of the time usage was at or below the first figure
Host RAM used, how unusual the peak is	**1.0 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host RAM used, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy

2. Per-container

CPU and memory were read from the containers' cgroup files every 0.25 s.

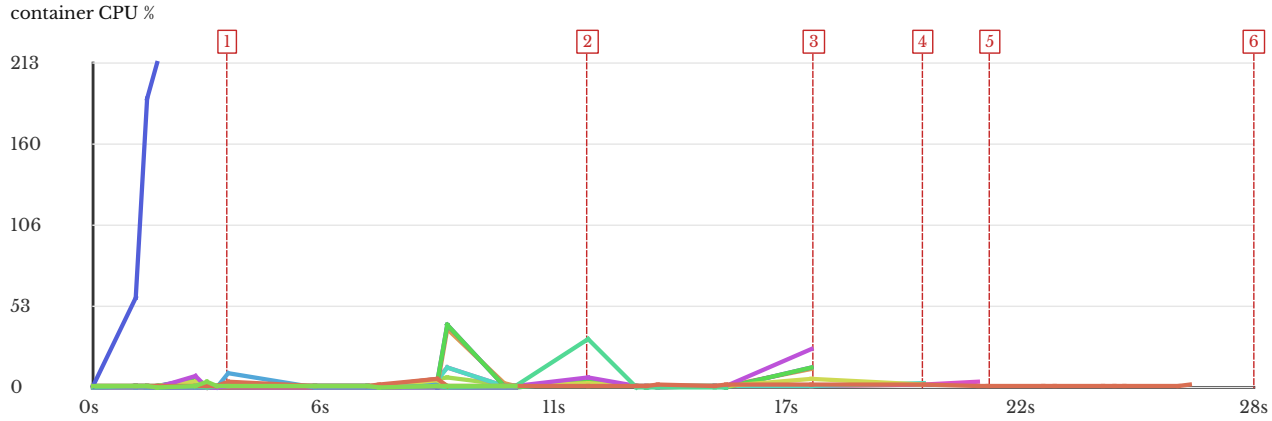

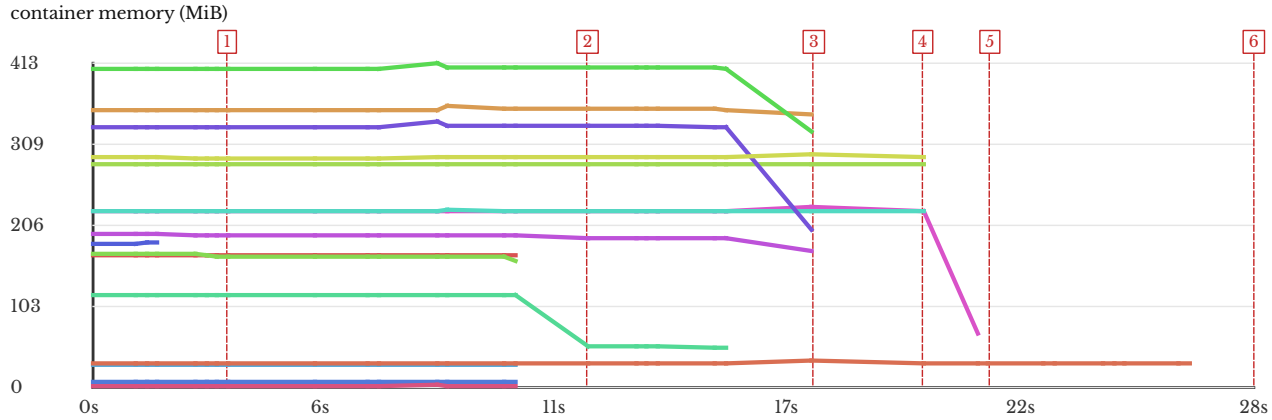

Legend: backup_service honeypot_content_sync honeypot_database_1 honeypot_database_2 honeypot_database_3 honeypot_eshop_1 honeypot_eshop_2 honeypot_eshop_3 log_capper pool_manager production_database production_eshop reverse_proxy session_store suricata_ids vector_outbound

Probability metrics: per container					
Container	**CPU mean ± SD**	**CPU p95 / peak**	**P(CPU ≥ 50%)**	**Memory MiB, mean ± SD**	**Memory MiB, peak**
backup_service	0.0% ± 0.0	0.0% / 0.0%	0.0%	168 ± 0	168
honeypot_content_sync	0.0% ± 0.0	0.0% / 0.2%	0.0%	6 ± 0	6
honeypot_database_1	0.9% ± 1.6	4.8% / 6.3%	0.0%	283 ± 0	284
honeypot_database_2	1.1% ± 2.6	4.6% / 12.2%	0.0%	217 ± 32	229
honeypot_database_3	1.0% ± 2.6	3.9% / 12.2%	0.0%	223 ± 0	224
honeypot_eshop_1	2.7% ± 8.2	11.4% / 37.5%	0.0%	353 ± 2	358
honeypot_eshop_2	2.9% ± 8.9	11.9% / 40.7%	0.0%	325 ± 28	338
honeypot_eshop_3	2.9% ± 9.0	12.6% / 40.8%	0.0%	402 ± 17	413
log_capper	0.0% ± 0.1	0.1% / 0.3%	0.0%	1 ± 0	2
pool_manager	0.7% ± 2.2	3.4% / 8.6%	0.0%	28 ± 0	28
production_database	0.8% ± 1.5	4.4% / 5.1%	0.0%	292 ± 1	296
production_esh	1.7% ± 5.4	6.6% / 24.5%	0.0%	192 ± 5	195

op					
reverse_proxy	1.5% ± 6.7	0.5% / 31.0%	0.0%	98 ± 31	118
session_store	1.0% ± 0.9	2.1% / 5.3%	0.0%	29 ± 1	34
suricata_ids	115.1% ± 102.4	209.4% / 213.0%	75.0%	182 ± 1	183
vector_outbound	0.3% ± 0.7	1.4% / 2.8%	0.0%	167 ± 2	170


P(CPU ≥ 50%) is the share of the recording the container spent at half a core or more, i.e. the chance of catching it that busy at a random moment. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load.

3. Global Visualization page as the stack changes state


Before: stack idle / not yet changed



Stopping: containers going down

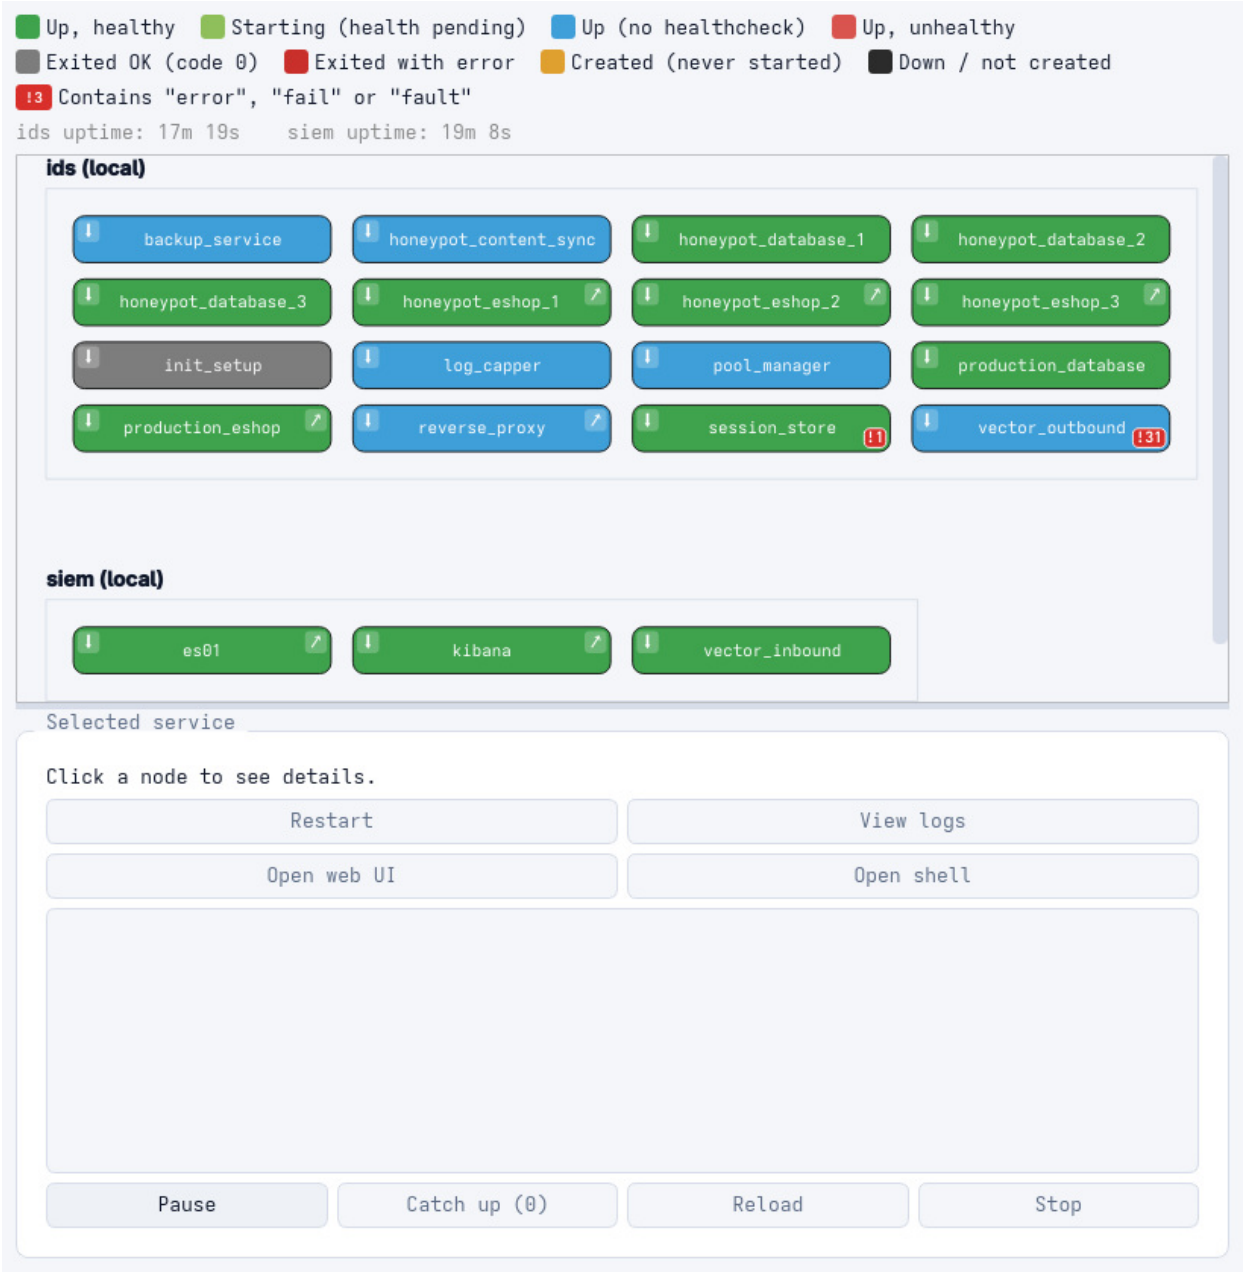

Stopped: down command finished

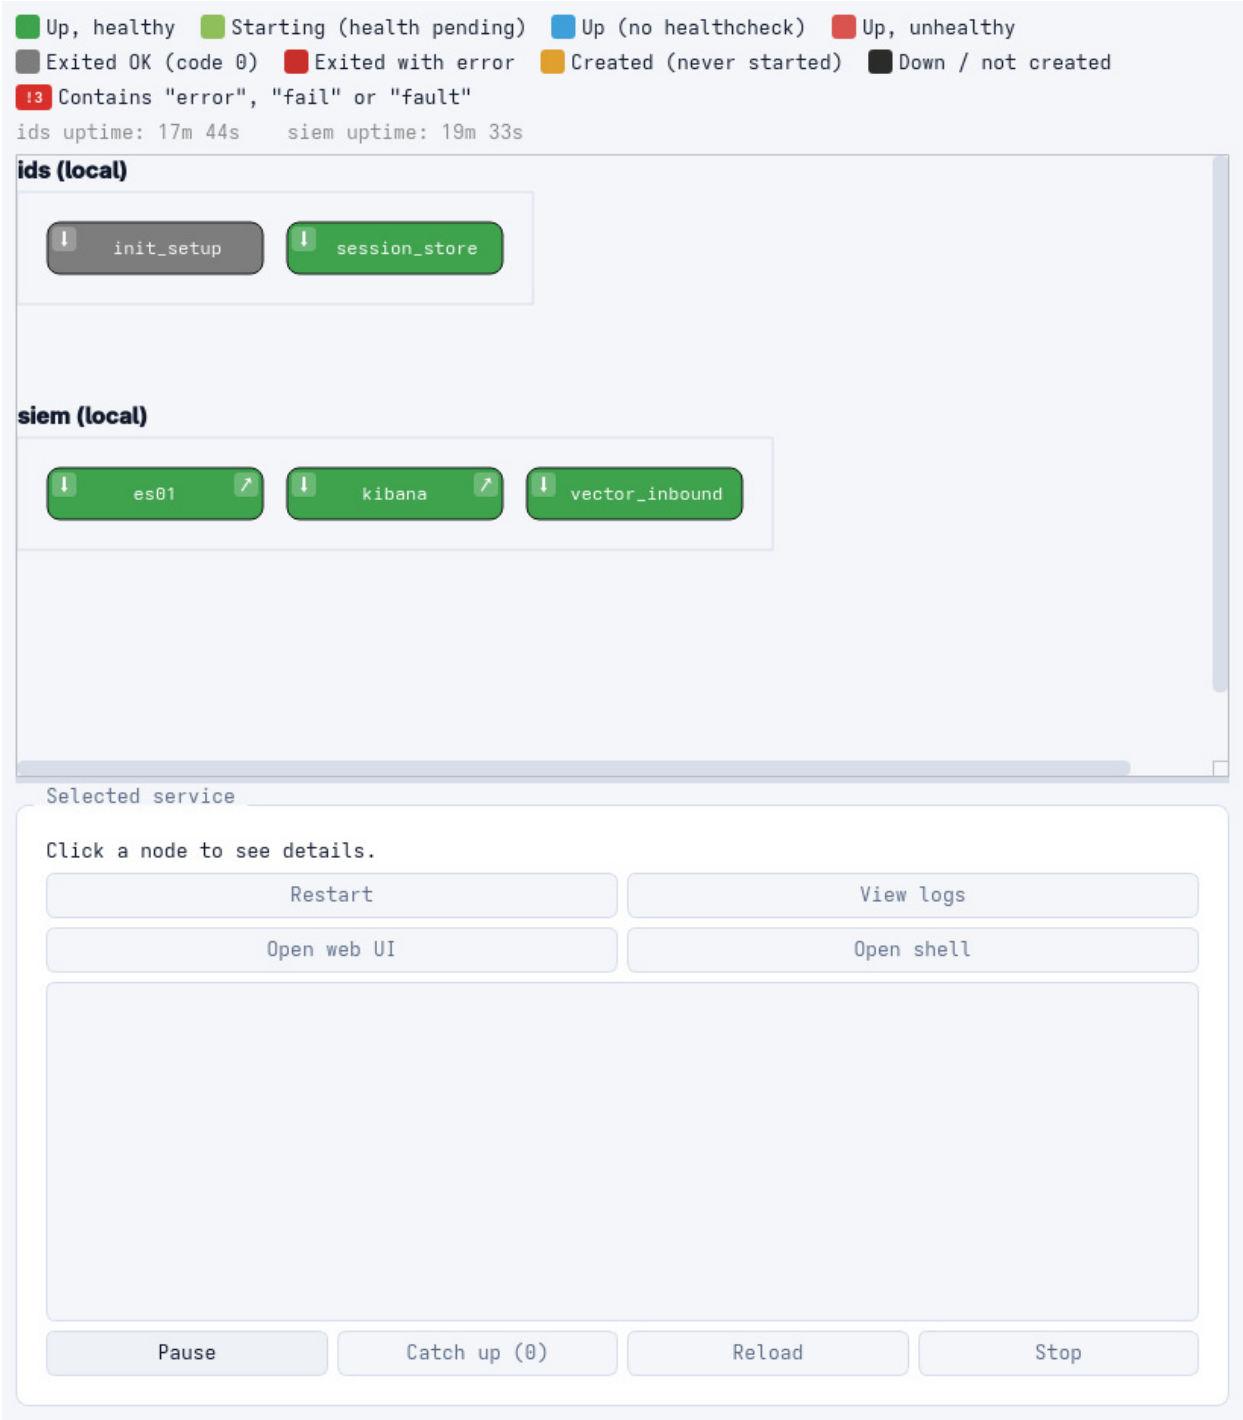

4. Event log

Marker	Elapsed	Event
1	3s	suricata_ids stopped
2	12s	backup_service stopped
2	12s	honeypot_content_sync stopped
2	12s	pool_manager stopped
2	12s	vector_outbound stopped
2	12s	log_capper stopped

3	17s	reverse_proxy stopped
4	20s	honeypot_eshop_1 stopped
4	20s	honeypot_eshop_2 stopped
4	20s	honeypot_eshop_3 stopped
4	20s	production_eshop stopped
5	21s	honeypot_database_1 stopped
5	21s	honeypot_database_2 stopped
5	21s	honeypot_database_3 stopped
5	21s	production_database stopped
6	28s	init_setup stopped
6	28s	session_store stopped