Service start-up report

Generated: 2026-10-09 12:48:00
Target: ids (local)
Operation: **start** · Recorded window: 107s · compose exit code: **0**

Resource usage recorded while the stack was brought up. Each dashed red vertical line marks a major event (a container starting, going healthy or unhealthy, or stopping), numbered in a band above the graph; events within 1.5s of each other share one number, and the event key under the host graph says what each number covers. The largest CPU peak is called out with the marker it lines up with. **Figure 1** shows how these services fit together – the per-container graphs below track each box in it.

Reading the probability metrics. A **95% confidence interval (CI)** is the range the true value would fall in 95 times out of 100 if the measurement were repeated: a wide interval means few or noisy samples, a narrow one means the figure is well pinned down. A **p-value** is the probability of seeing a difference at least this large if there were really no effect; below 0.05 it is conventionally called *significant*, i.e. unlikely to be chance. Rates use the Wilson interval, which stays within 0–100% even for small samples or 0% / 100% results. Where a mean over a time series (CPU, memory) has a CI, it uses an effective sample size that discounts correlated neighbouring samples, so it is not over-confident. **P(≥x)** is the share of a recording spent at or above x: the chance that a randomly picked moment was that busy. **SD** (standard deviation) is the typical distance of a value from the mean.


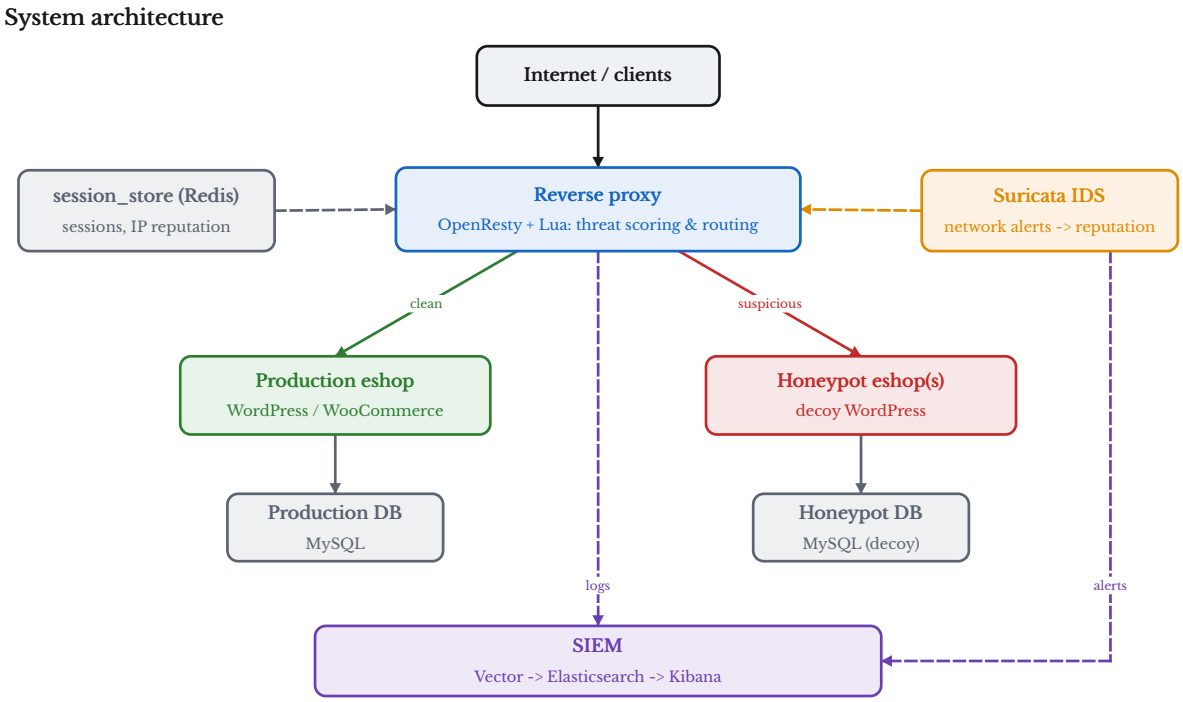


Figure 1. System architecture: the services whose CPU / memory the per-container charts below track as the stack is started.

1. Overall system (host)

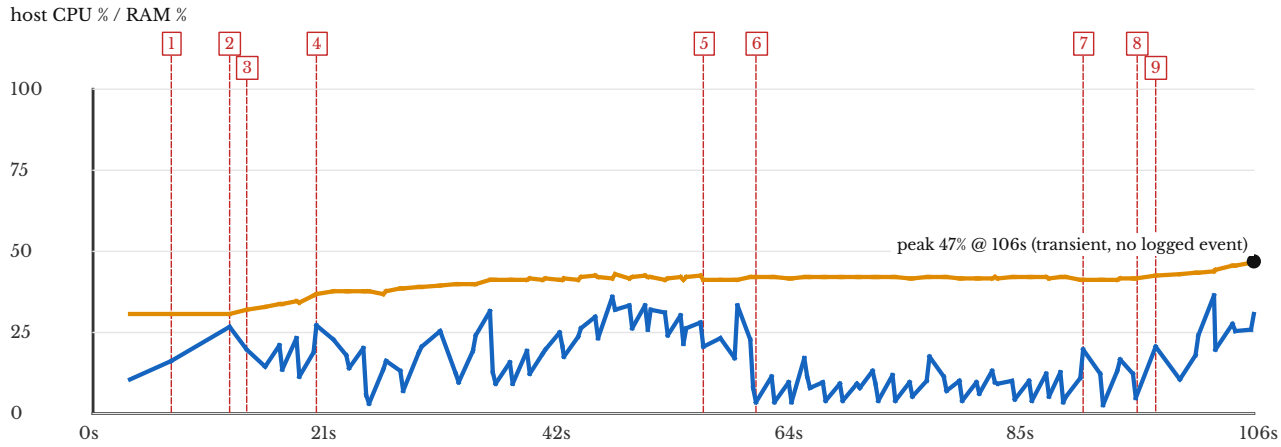


Event key (marker numbers on all graphs)


Marker	Elapsed	What happened
1	7s	started: backup_service, honeypot_content_sync, honeypot_database_1, honeypot_database_2, honeypot_database_3, honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3, honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3, init_setup, pool_manager, production_database, production_db_seed, production_eshop, reverse_proxy, session_store, suricata_ids, vector_outbound, log_capper
2	12s	running, health pending: honeypot_database_1, honeypot_database_2, production_database, suricata_ids
3	14s	running, health pending: honeypot_database_3; healthy: session_store, suricata_ids
4	20s	healthy: honeypot_database_1, honeypot_database_2, honeypot_database_3, production_database
5	56s–57s	running, health pending: honeypot_eshop_3, honeypot_eshop_1, honeypot_eshop_2
6	61s	healthy: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3
7	91s	running, health pending: production_eshop
8	96s	healthy: production_eshop
9	97s	stopped: honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3, init_setup, production_db_seed

Probability metrics: host		
Host CPU, mean ± SD	**15.9% ± 8.8**	average over 122 samples; the SD is the typical swing around it
Host CPU, 95th percentile / peak	**31.7% / 36.1%**	95% of the time usage was at or below the first figure
Host CPU, how unusual the peak is	**2.3 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host CPU, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host CPU, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, mean ± SD	**40.6% ± 2.9**	average over 122 samples; the SD is the typical swing around it
Host RAM used, 95th percentile / peak	**43.2% / 46.6%**	95% of the time usage was at or below the first figure
Host RAM used, how unusual the peak is	**2.1 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host RAM used, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy

2. Per-container

CPU and memory were read from the containers' cgroup files every 0.25 s.

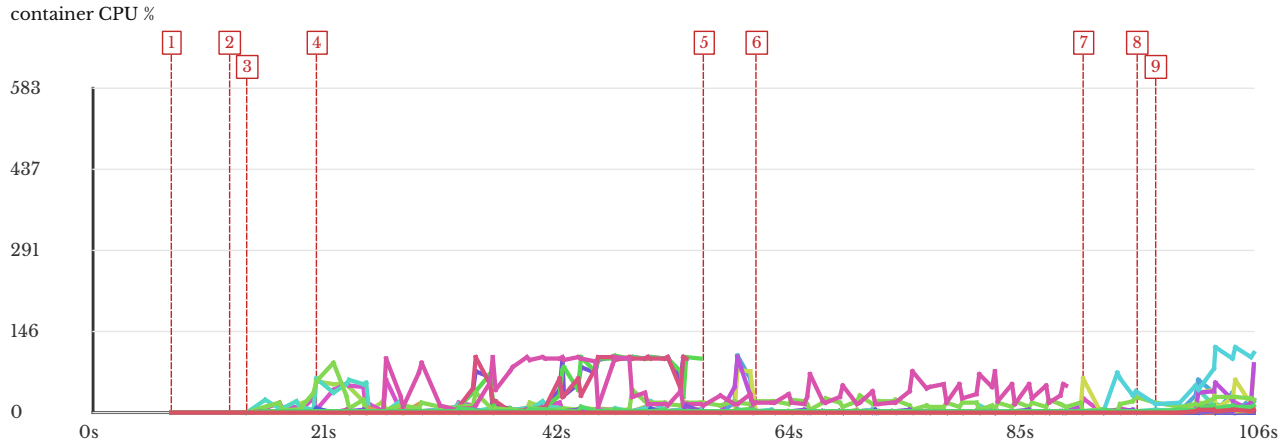

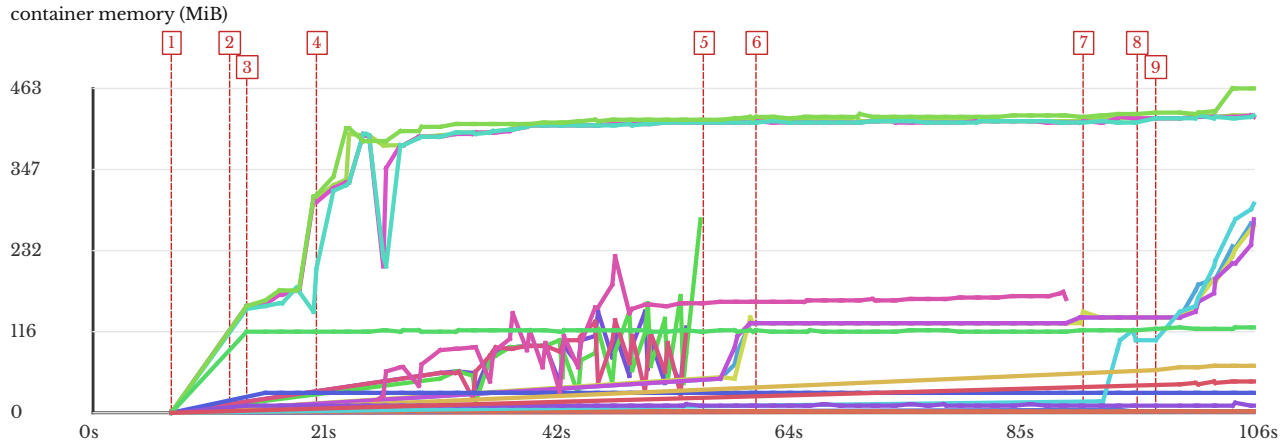

Legend: backup_service honeypot_content_sync honeypot_database_1 honeypot_database_2 honeypot_database_3 honeypot_db_migration honeypot_db_seed_1 honeypot_db_seed_2 honeypot_db_seed_3 honeypot_eshop_1 honeypot_eshop_2 honeypot_eshop_3 init_setup log_capper pool_manager production_database production_db_seed production_eshop reverse_proxy session_store suricata_ids vector_outbound


Probability metrics: per container					
Container	**CPU mean ± SD**	**CPU p95 / peak**	**P(CPU ≥ 50%)**	**Memory MiB, mean ± SD**	**Memory MiB, peak**
backup_service	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0	1
honeypot_content_sync	0.5% ± 0.9	2.1% / 2.6%	0.0%	2 ± 1	6
honeypot_database_1	4.9% ± 9.8	18.6% / 54.5%	2.5%	393 ± 67	424
honeypot_database_2	5.4% ± 10.4	23.2% / 57.0%	0.8%	389 ± 70	422
honeypot_database_3	5.9% ± 11.9	33.8% / 59.2%	2.5%	386 ± 76	423
honeypot_db_migration	2.0% ± 4.4	9.9% / 14.5%	0.0%	1 ± 1	5
honeypot_db_seed_1	53.3% ± 41.2	98.5% / 98.9%	52.9%	80 ± 31	143
honeypot_db_seed_2	53.2% ± 40.8	98.6% / 100.0%	51.4%	85 ± 49	276

honeypot_db_seed_3	51.7% ± 40.6	98.6% / 99.3%	47.1%	80 ± 31	131
honeypot_eshop_1	5.9% ± 17.3	34.5% / 100.7%	4.6%	134 ± 40	270
honeypot_eshop_2	7.9% ± 19.8	59.5% / 78.9%	7.7%	132 ± 39	264
honeypot_eshop_3	6.7% ± 19.0	42.5% / 98.9%	4.6%	133 ± 35	276
init_setup	583.0% ± 0.0	583.0% / 583.0%	100.0%	85 ± 0	85
log_capper	0.0% ± 0.1	0.0% / 1.3%	0.0%	1 ± 0	1
pool_manager	0.3% ± 1.0	1.6% / 7.4%	0.0%	27 ± 3	28
production_database	13.5% ± 11.5	28.5% / 88.8%	1.7%	400 ± 69	463
production_db_seed	38.2% ± 31.9	97.8% / 99.7%	27.7%	127 ± 52	222
production_eshop	54.7% ± 41.8	116.5% / 116.6%	47.1%	150 ± 96	297
reverse_proxy	1.3% ± 0.8	2.1% / 2.2%	0.0%	59 ± 20	67
session_store	0.8% ± 1.3	2.8% / 11.7%	0.0%	9 ± 1	14
suricata_ids	2.0% ± 2.2	7.0% / 11.1%	0.0%	115 ± 11	121
vector_outbound	2.3% ± 1.5	4.3% / 4.9%	0.0%	38 ± 13	44


P(CPU ≥ 50%) is the share of the recording the container spent at half a core or more, i.e. the chance of catching it that busy at a random moment. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load.

3. Global Visualization page as the stack changes state


Before: stack idle / not yet changed

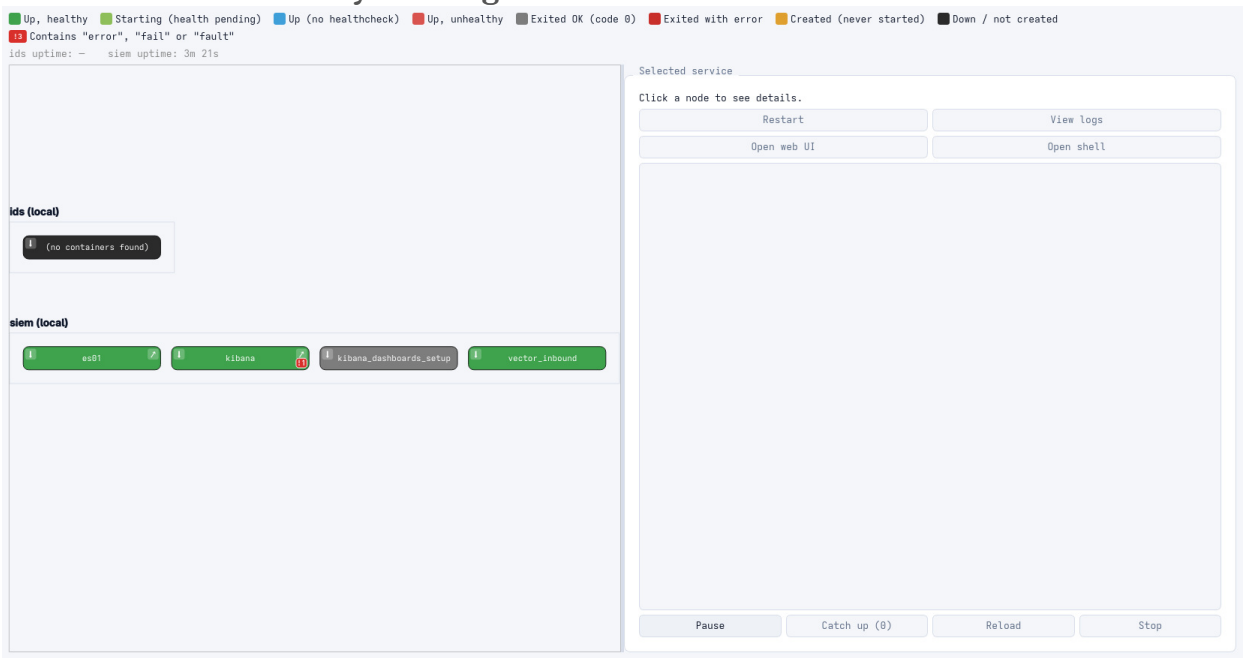

Starting: containers coming up

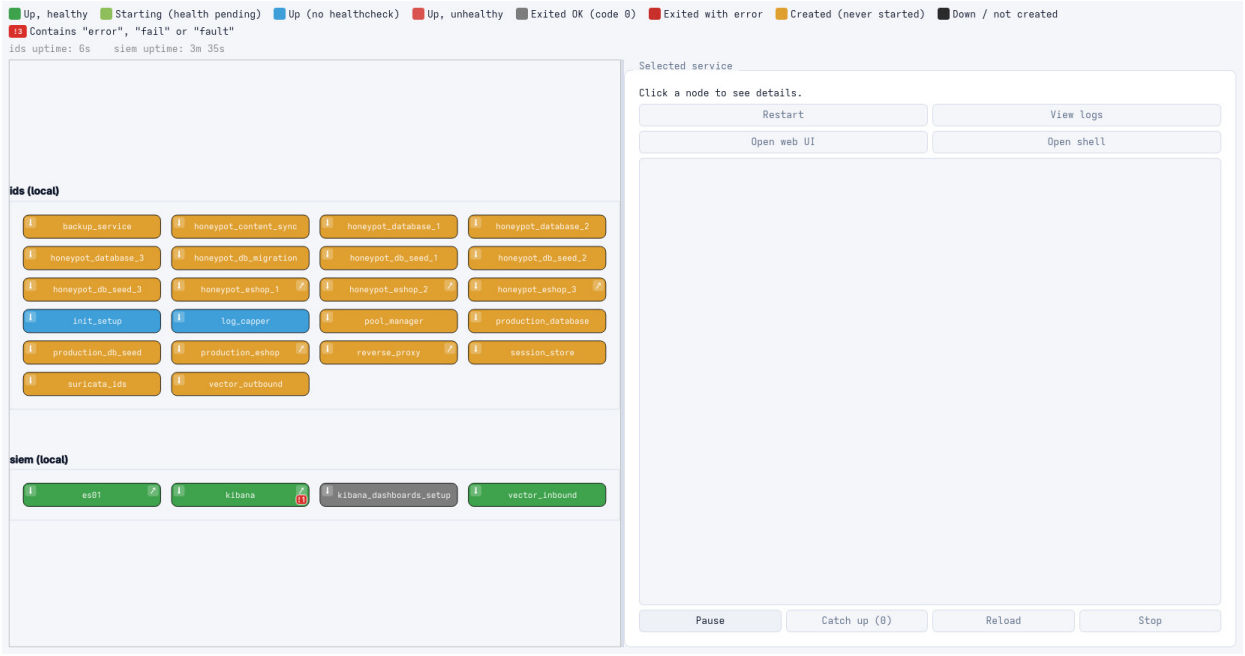

All containers healthy

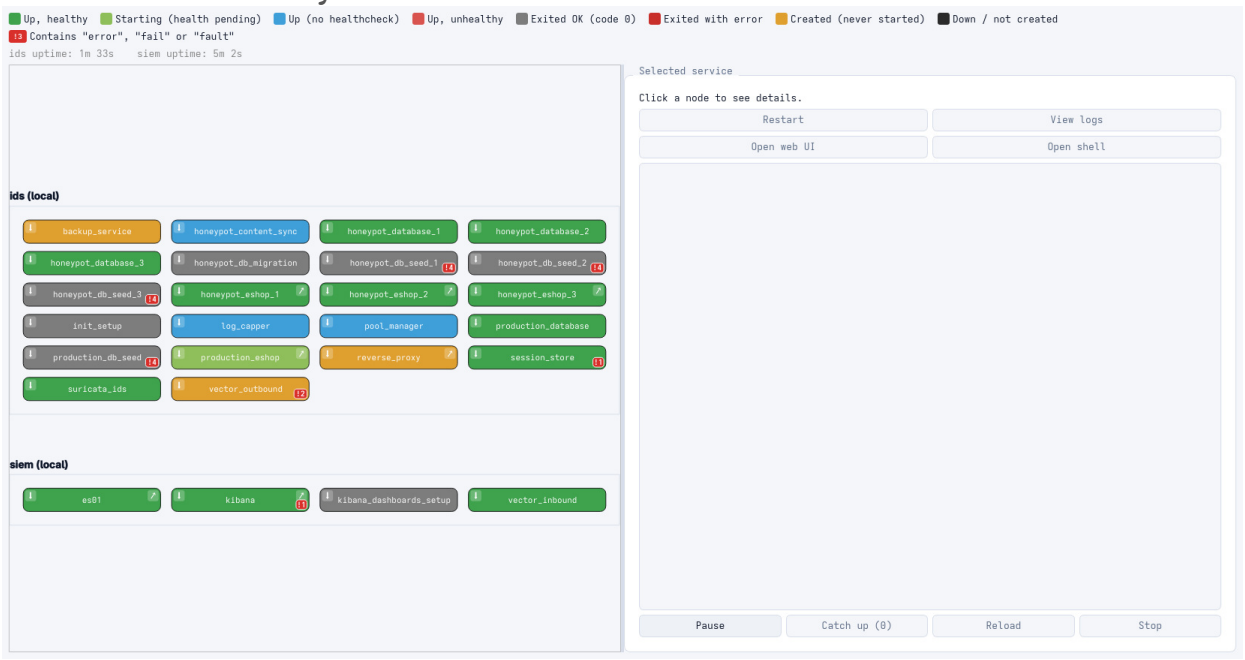

4. Event log

Marker	Elapsed	Event
1	7s	backup_service started
1	7s	honeypot_content_sync started
1	7s	honeypot_database_1 started
1	7s	honeypot_database_2 started
1	7s	honeypot_database_3 started

1	7s	honeypot_db_migration started
1	7s	honeypot_db_seed_1 started
1	7s	honeypot_db_seed_2 started
1	7s	honeypot_db_seed_3 started
1	7s	honeypot_eshop_1 started
1	7s	honeypot_eshop_2 started
1	7s	honeypot_eshop_3 started
1	7s	init_setup started
1	7s	pool_manager started
1	7s	production_database started
1	7s	production_db_seed started
1	7s	production_eshop started
1	7s	reverse_proxy started
1	7s	session_store started
1	7s	suricata_ids started
1	7s	vector_outbound started
1	7s	log_capper started
2	12s	honeypot_database_1 running, health pending
2	12s	honeypot_database_2 running, health pending
2	12s	production_database running, health pending
2	12s	suricata_ids running, health pending
3	14s	honeypot_database_3 running, health pending
3	14s	session_store healthy
3	14s	suricata_ids healthy
4	20s	honeypot_database_1 healthy
4	20s	honeypot_database_2 healthy
4	20s	honeypot_database_3 healthy
4	20s	production_database healthy
5	56s	honeypot_eshop_3 running, health pending
5	57s	honeypot_eshop_1 running, health pending
5	57s	honeypot_eshop_2 running, health pending
6	61s	honeypot_eshop_1 healthy
6	61s	honeypot_eshop_2 healthy
6	61s	honeypot_eshop_3 healthy
7	91s	production_eshop running, health pending
8	96s	production_eshop healthy
9	97s	honeypot_db_migration stopped
9	97s	honeypot_db_seed_1 stopped

9	97s	honeypot_db_seed_2 stopped
9	97s	honeypot_db_seed_3 stopped
9	97s	init_setup stopped
9	97s	production_db_seed stopped