Service start-up report

Generated: 2026-10-16 08:54:56
Target: ids (local)
Operation: **start** · Recorded window: 108s · compose exit code: **0**

Resource usage recorded while the stack was brought up. Each dashed red vertical line marks a major event (a container starting, going healthy or unhealthy, or stopping), numbered in a band above the graph; events within 1.5s of each other share one number, and the event key under the host graph says what each number covers. The largest CPU peak is called out with the marker it lines up with. **Figure 1** shows how these services fit together – the per-container graphs below track each box in it.

Reading the probability metrics. A *95% confidence interval (CI)* is the range the true value would fall in 95 times out of 100 if the measurement were repeated: a wide interval means few or noisy samples, a narrow one means the figure is well pinned down. A **p-value** is the probability of seeing a difference at least this large if there were really no effect; below 0.05 it is conventionally called *significant*, i.e. unlikely to be chance. Rates use the Wilson interval, which stays within 0–100% even for small samples or 0% / 100% results. Where a mean over a time series (CPU, memory) has a CI, it uses an effective sample size that discounts correlated neighbouring samples, so it is not over-confident. **P(≥x)** is the share of a recording spent at or above x: the chance that a randomly picked moment was that busy. **SD** (standard deviation) is the typical distance of a value from the mean.


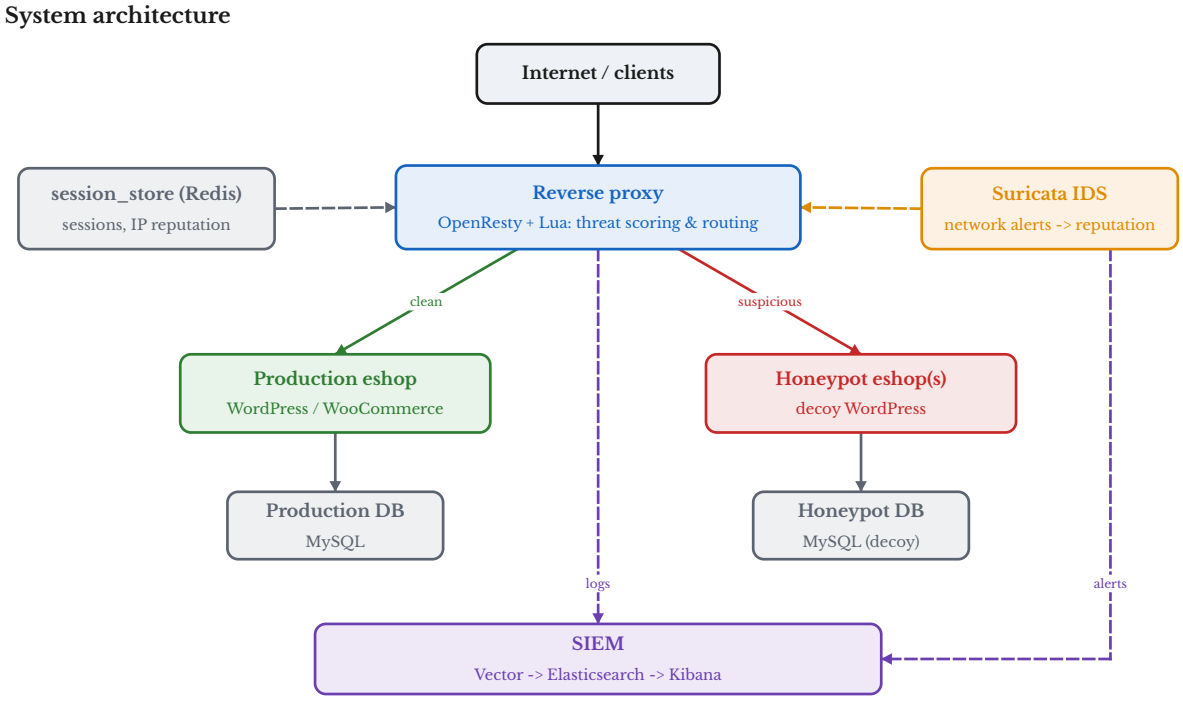


Figure 1. System architecture: the services whose CPU / memory the per-container charts below track as the stack is started.

1. Overall system (host)

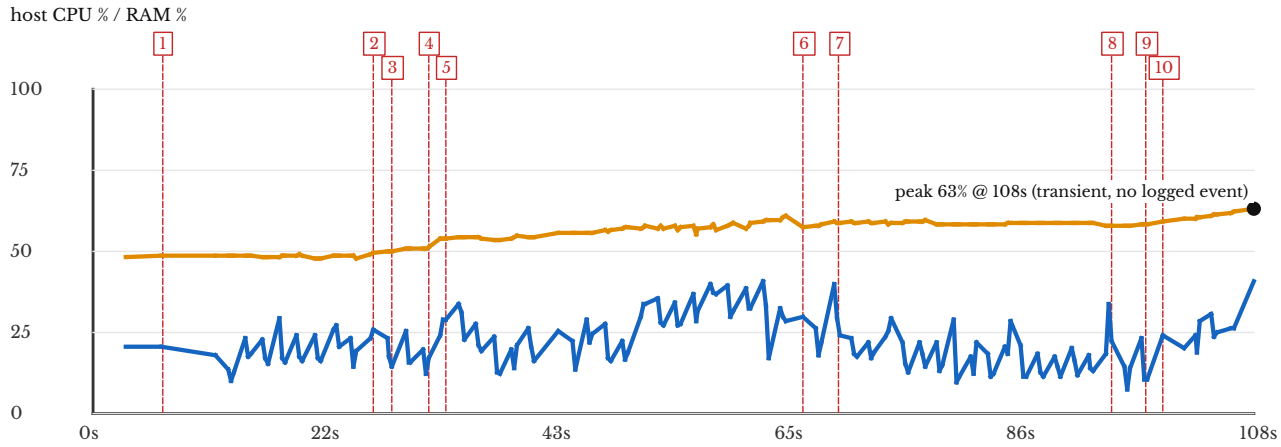

■ host CPU % ■ host RAM % used

Event key (marker numbers on all graphs)


Marker	Elapsed	What happened
1	6s	started: backup_service, honeypot_content_sync, honeypot_database_1, honeypot_database_2, honeypot_database_3, honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3, honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3, init_setup, pool_manager, production_database, production_db_seed, production_eshop, reverse_proxy, session_store, suricata_ids, vector_outbound, log_capper
2	26s	running, health pending: honeypot_database_1, honeypot_database_2, honeypot_database_3, production_database, session_store, suricata_ids
3	28s	healthy: session_store, suricata_ids
4	31s	healthy: honeypot_database_1
5	33s	healthy: honeypot_database_2, honeypot_database_3, production_database
6	66s	running, health pending: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3
7	69s	healthy: honeypot_eshop_1, honeypot_eshop_2, honeypot_eshop_3
8	95s	running, health pending: production_eshop
9	98s	healthy: production_eshop
10	99s	stopped: honeypot_db_migration, honeypot_db_seed_1, honeypot_db_seed_2, honeypot_db_seed_3, init_setup, production_db_seed


Probability metrics: host		
Host CPU, mean ± SD	**21.8% ± 7.5**	average over 167 samples; the SD is the typical swing around it
Host CPU, 95th percentile / peak	**36.2% / 40.6%**	95% of the time usage was at or below the first figure
Host CPU, how unusual the peak is	**2.5 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host CPU, P(≥50%)	**0.0%**	chance a random moment of this recording was at least this busy
Host CPU, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy
Host RAM used, mean ± SD	**55.6% ± 4.1**	average over 167 samples; the SD is the typical swing around it
Host RAM used, 95th percentile / peak	**60.2% / 63.0%**	95% of the time usage was at or below the first figure
Host RAM used, how unusual the peak is	**1.8 SD above the mean**	more than ~3 SD is a rare spike rather than normal fluctuation
Host RAM used, P(≥50%)	**82.6%**	chance a random moment of this recording was at least this busy

Host RAM used, P(≥80%)	**0.0%**	chance a random moment of this recording was at least this busy

2. Per-container

CPU and memory were read from the containers' cgroup files every 0.25 s.

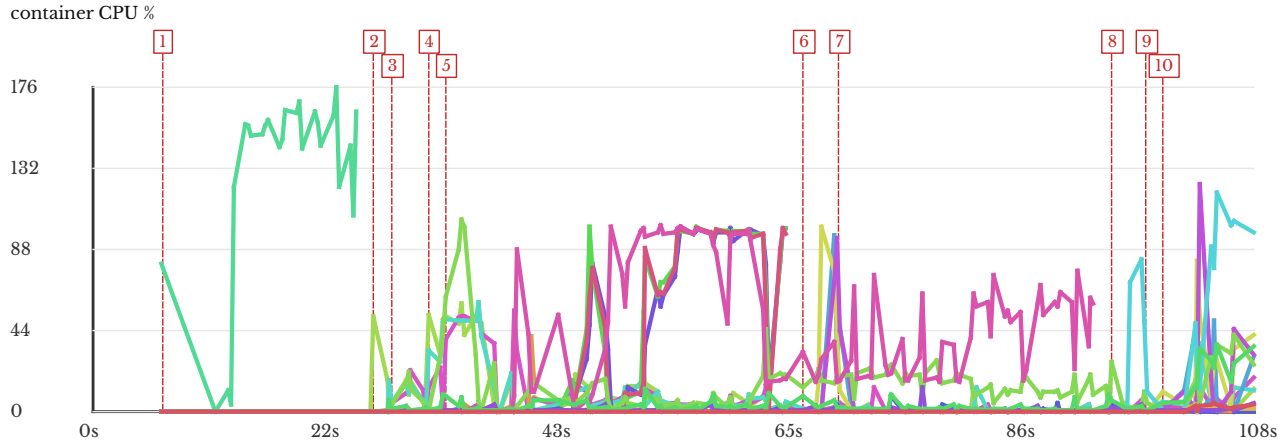

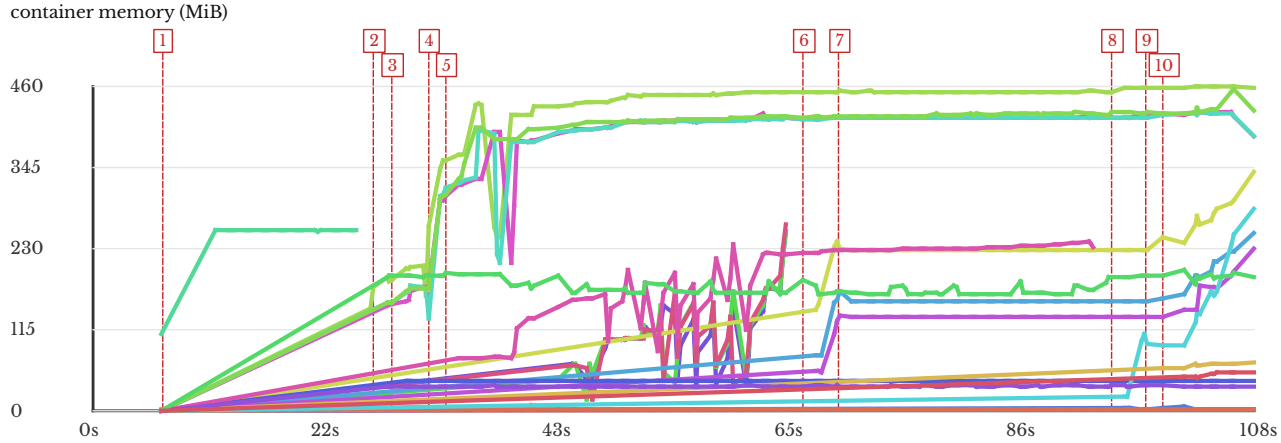

Legend: backup_service honeypot_content_sync honeypot_database_1 honeypot_database_2 honeypot_database_3 honeypot_db_migration honeypot_db_seed_1 honeypot_db_seed_2 honeypot_db_seed_3 honeypot_eshop_1 honeypot_eshop_2 honeypot_eshop_3 init_setup log_capper pool_manager production_database production_db_seed production_eshop reverse_proxy session_store suricata_ids vector_outbound

Probability metrics: per container


Container	CPU mean ± SD	CPU p95 / peak	P(CPU ≥ 50%)	Memory MiB, mean ± SD	Memory MiB, peak
backup_service	0.0% ± 0.0	0.0% / 0.0%	0.0%	0 ± 0	1
honeypot_content_sync	0.4% ± 0.9	2.4% / 3.3%	0.0%	2 ± 1	5
honeypot_database_1	6.9% ± 13.1	47.5% / 58.0%	3.5%	417 ± 84	460
honeypot_database_2	6.7% ± 12.5	40.1% / 56.0%	3.6%	384 ± 75	424
honeypot_database_3	6.4% ± 12.3	41.2% / 59.2%	0.7%	384 ± 75	423
honeypot_db_migration	4.0% ± 10.5	22.6% / 40.2%	0.0%	2 ± 2	7
honeypot_db_s	61.3% ± 38.3	99.0% / 100.1%	64.1%	104 ± 51	254

eed_1					
honeypot_db_seed_2	63.2% ± 39.4	99.3% / 99.7%	67.5%	106 ± 52	254
honeypot_db_seed_3	62.1% ± 39.6	98.7% / 99.3%	66.7%	108 ± 55	263
honeypot_eshop_1	4.5% ± 15.0	36.0% / 94.9%	1.4%	157 ± 32	251
honeypot_eshop_2	7.5% ± 19.7	45.8% / 100.0%	5.6%	229 ± 38	338
honeypot_eshop_3	6.3% ± 21.0	43.8% / 123.0%	4.2%	132 ± 29	229
init_setup	130.5% ± 50.5	166.5% / 175.7%	88.5%	250 ± 29	256
log_capper	0.0% ± 0.1	0.0% / 0.9%	0.0%	1 ± 0	1
pool_manager	0.3% ± 1.0	1.5% / 7.8%	0.0%	41 ± 4	42
production_database	14.4% ± 16.2	36.4% / 104.0%	2.9%	392 ± 73	455
production_db_seed	44.5% ± 33.6	98.5% / 100.3%	43.9%	185 ± 58	240
production_eshop	48.9% ± 43.4	105.4% / 118.4%	44.4%	123 ± 80	286
reverse_proxy	1.3% ± 1.3	3.4% / 3.9%	0.0%	59 ± 19	67
session_store	0.7% ± 1.3	2.8% / 12.9%	0.0%	34 ± 3	35
suricata_ids	3.7% ± 6.4	13.7% / 35.6%	0.0%	175 ± 18	200
vector_outbound	2.0% ± 1.6	3.8% / 3.9%	0.0%	46 ± 15	54


P(CPU ≥ 50%) is the share of the recording the container spent at half a core or more, i.e. the chance of catching it that busy at a random moment. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load.

3. Global Visualization page as the stack changes state


Before: stack idle / not yet changed

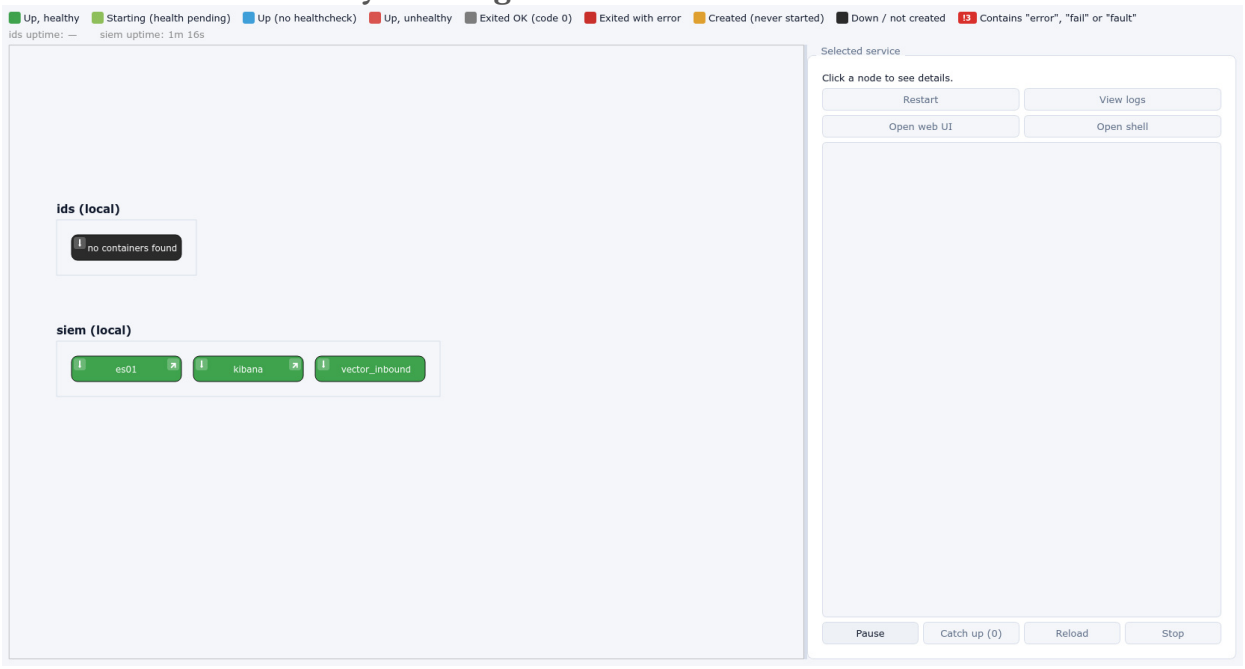

Starting: containers coming up

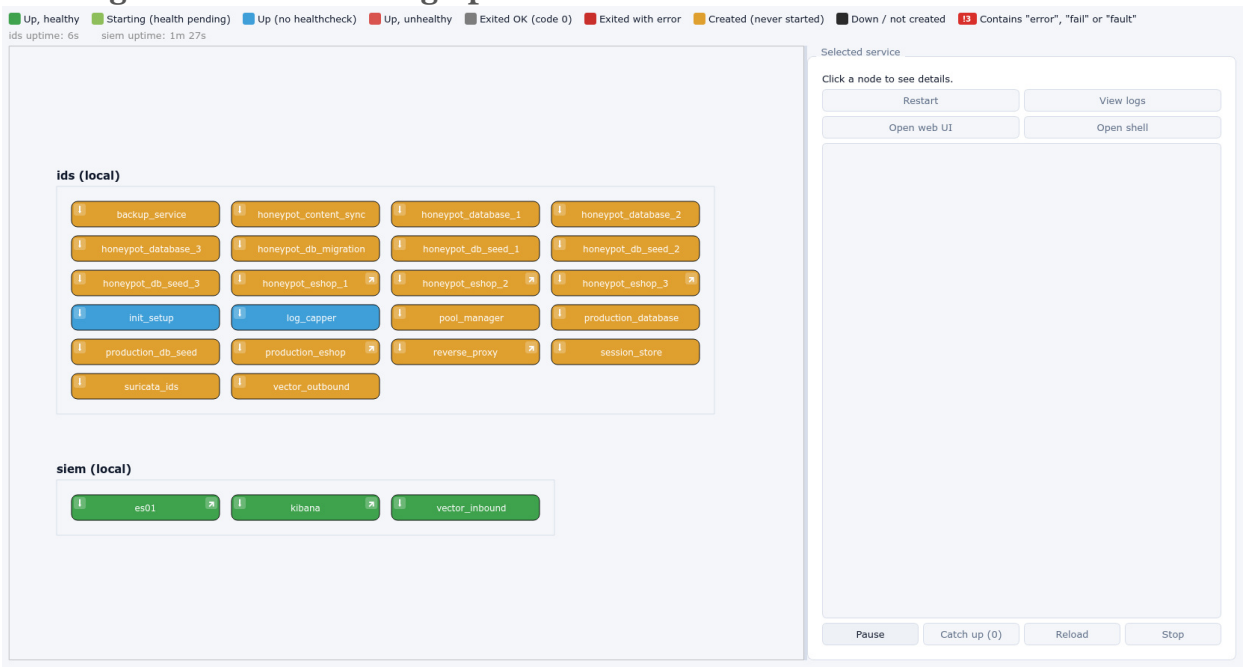

All containers healthy

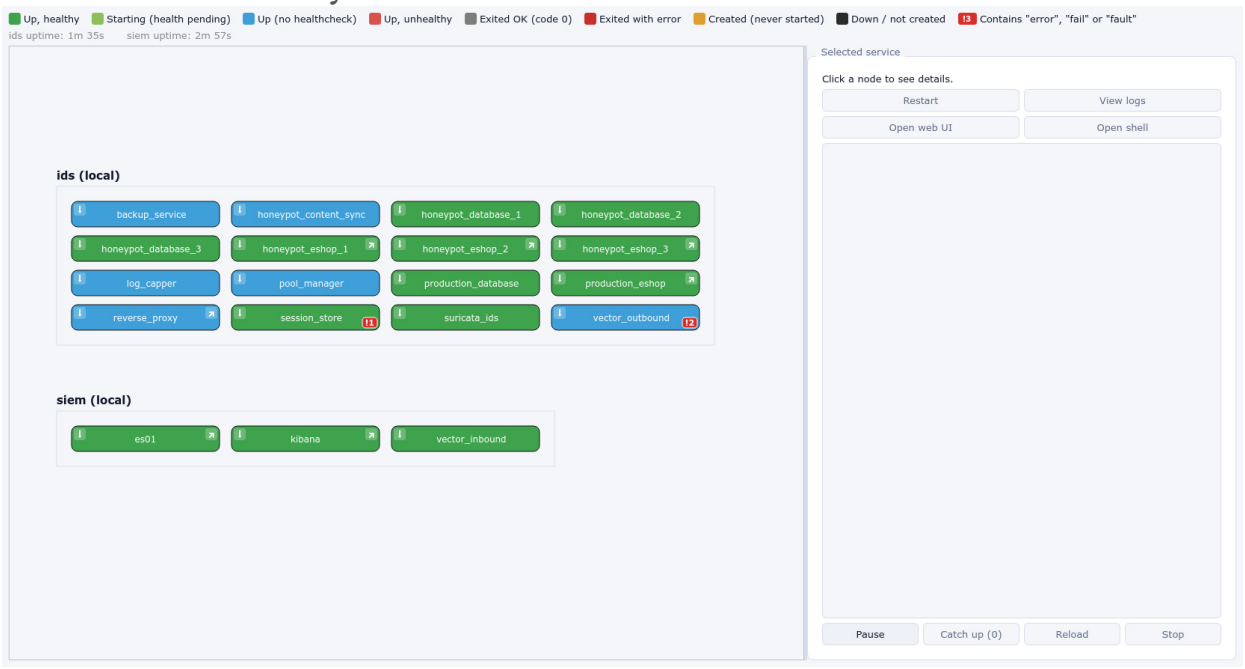

4. Event log

Marker	Elapsed	Event
1	6s	backup_service started
1	6s	honeypot_content_sync started
1	6s	honeypot_database_1 started

1	6s	honeypot_database_2 started
1	6s	honeypot_database_3 started
1	6s	honeypot_db_migration started
1	6s	honeypot_db_seed_1 started
1	6s	honeypot_db_seed_2 started
1	6s	honeypot_db_seed_3 started
1	6s	honeypot_eshop_1 started
1	6s	honeypot_eshop_2 started
1	6s	honeypot_eshop_3 started
1	6s	init_setup started
1	6s	pool_manager started
1	6s	production_database started
1	6s	production_db_seed started
1	6s	production_eshop started
1	6s	reverse_proxy started
1	6s	session_store started
1	6s	suricata_ids started
1	6s	vector_outbound started
1	6s	log_capper started
2	26s	honeypot_database_1 running, health pending
2	26s	honeypot_database_2 running, health pending
2	26s	honeypot_database_3 running, health pending
2	26s	production_database running, health pending
2	26s	session_store running, health pending
2	26s	suricata_ids running, health pending
3	28s	session_store healthy
3	28s	suricata_ids healthy
4	31s	honeypot_database_1 healthy
5	33s	honeypot_database_2 healthy
5	33s	honeypot_database_3 healthy
5	33s	production_database healthy
6	66s	honeypot_eshop_1 running, health pending
6	66s	honeypot_eshop_2 running, health pending
6	66s	honeypot_eshop_3 running, health pending
7	69s	honeypot_eshop_1 healthy
7	69s	honeypot_eshop_2 healthy
7	69s	honeypot_eshop_3 healthy
8	95s	production_eshop running, health pending

9	98s	production_eshop healthy
10	99s	honeypot_db_migration stopped
10	99s	honeypot_db_seed_1 stopped
10	99s	honeypot_db_seed_2 stopped
10	99s	honeypot_db_seed_3 stopped
10	99s	init_setup stopped
10	99s	production_db_seed stopped