# Service shutdown report

Generated: 2026-10-16 11:24:34
Target: siem (local)
Operation: **stop** · Recorded window: 12s · compose exit code: **0**

---

Resource usage recorded while the stack was taken down. Each dashed red vertical line marks a major event (a container created, started, going healthy or unhealthy, a one-shot job finishing, or a container stopping or being removed), numbered in a band above the graph; events within 1.5s of each other share one number, and the event key under the host graph says what each number covers. The largest host CPU peak is called out with the marker it lines up with. **Figure 1** shows how these services fit together – the per-container graphs below track each box in it.

**Reading the metrics.** **SD** (standard deviation) is the typical distance of a value from the mean. The **95th percentile** is the level usage stayed at or below 95% of the time; a **peak** far above it is a short burst rather than sustained load. **P(≥x)** is the share of the recording spent at or above *x*: the chance that a randomly picked moment was that busy. "How unusual the peak is" counts SDs above the mean; more than about 3 is a rare spike.


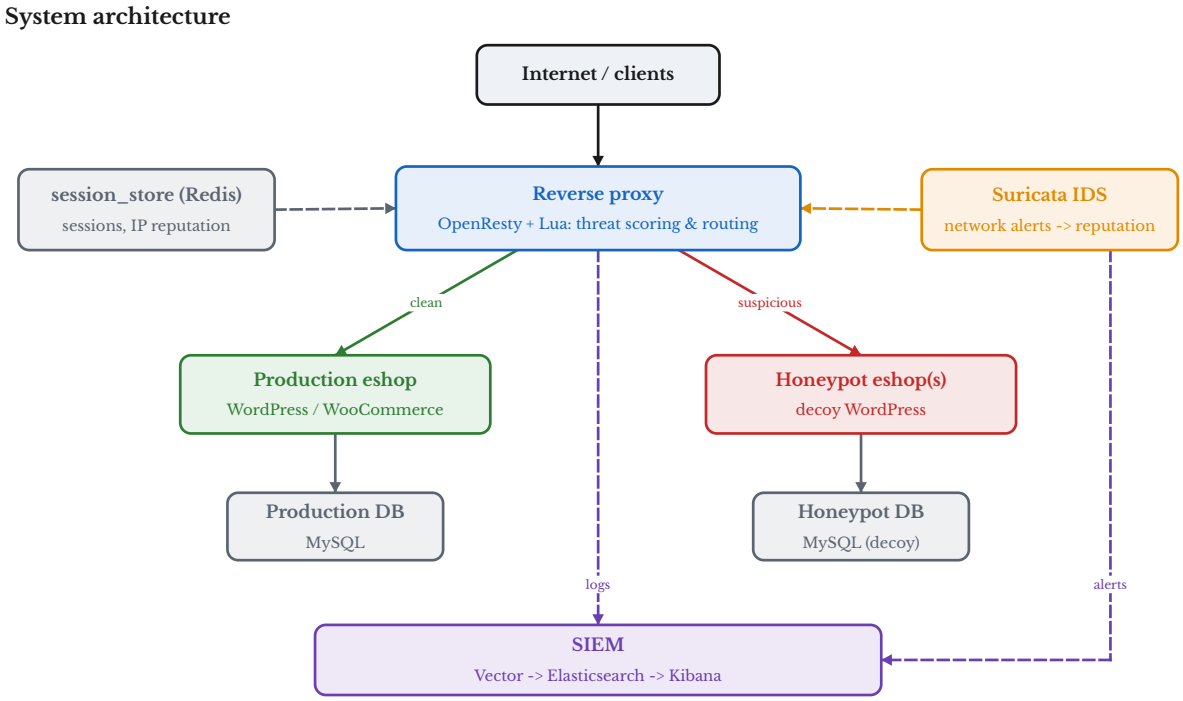



**Figure 1.** System architecture: the services whose CPU / memory the per-container charts below track as the stack is stopped.

# 1. Overall system (host)

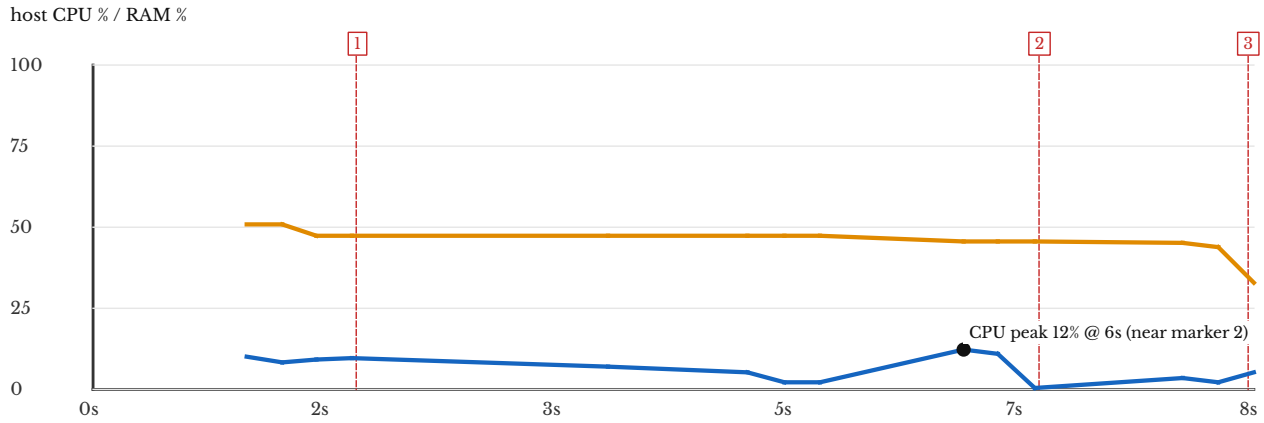


■ host CPU % ■ host RAM % used


## **Event key** (marker numbers on all graphs)


| Marker | Elapsed | What happened |
|---|---|---|
| 1 | 2s | removed: kibana_dashboards_setup; stopped: kibana |
| 2 | 7s | stopped: vector_inbound |
| 3 | 8s | stopped: es01 |

| **Probability metrics: host** | | |
|---|---|---|
| Host CPU, mean ± SD | **6.1% ± 3.9** | average over 14 samples; the SD is the typical swing around it |
| Host CPU, 95th percentile / peak | **11.3% / 12.1%** | 95% of the time usage was at or below the first figure |
| Host CPU, how unusual the peak is | **1.5 SD above the mean** | more than ~3 SD is a rare spike rather than normal fluctuation |
| Host CPU, P(≥50%) | **0.0%** | chance a random moment of this recording was at least this busy |
| Host CPU, P(≥80%) | **0.0%** | chance a random moment of this recording was at least this busy |
| Host RAM used, mean ± SD | **45.8% ± 4.3** | average over 14 samples; the SD is the typical swing around it |
| Host RAM used, 95th percentile / peak | **50.6% / 50.6%** | 95% of the time usage was at or below the first figure |
| Host RAM used, how unusual the peak is | **1.1 SD above the mean** | more than ~3 SD is a rare spike rather than normal fluctuation |
| Host RAM used, P(≥50%) | **14.3%** | chance a random moment of this recording was at least this busy |
| Host RAM used, P(≥80%) | **0.0%** | chance a random moment of this recording was at least this busy |

# 2. Per-container

CPU and memory were read from the containers' cgroup files every 0.25 s.

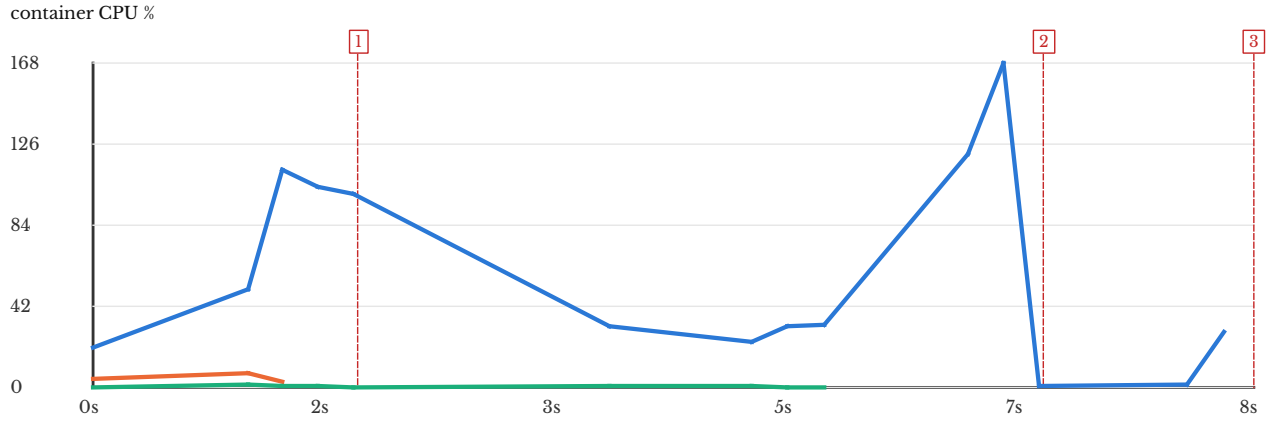

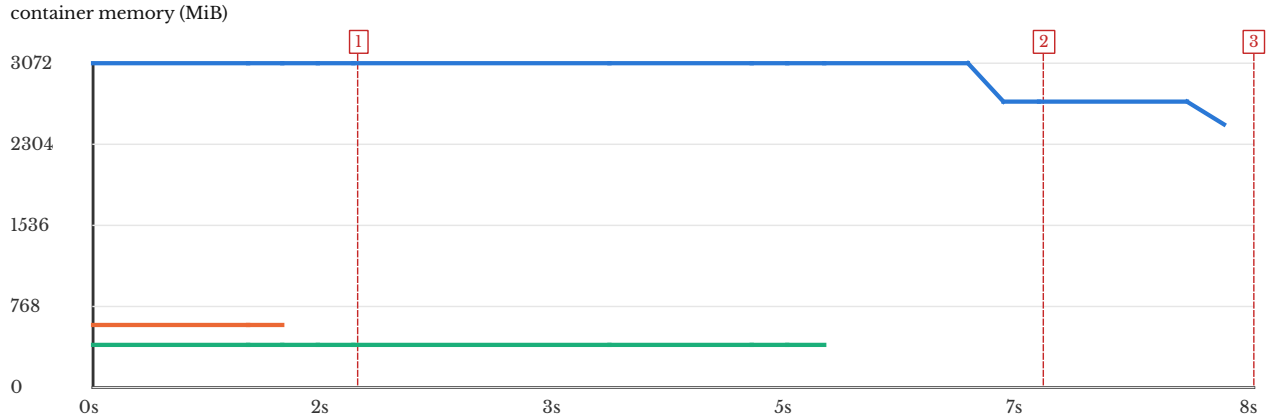

Legend: ■ es01 ■ kibana ■ vector_inbound

| Probability metrics: per container | | | | | |
|---|---|---|---|---|---|
| **Container** | **CPU mean ± SD** | **CPU p95 / peak** | **P(CPU ≥ 50%)** | **Memory MiB, mean ± SD** | **Memory MiB, peak** |
| es01 | 58.7% ± 51.8 | 137.1% / 167.9% | 42.9% | 2950 ± 204 | 3072 |
| kibana | 4.7% ± 2.1 | 6.7% / 7.0% | 0.0% | 580 ± 0 | 580 |
| vector_inbound | 0.2% ± 0.4 | 0.8% / 1.3% | 0.0% | 396 ± 3 | 404 |


P(CPU ≥ 50%) is the share of the recording the container spent at half a core or more, i.e. the chance of catching it that busy at a random moment. A peak far above the p95 means a short burst (typically start-up work or a first healthcheck) rather than sustained load.

# 3. Global Visualization page as the stack changes state


## Before: stack idle / not yet changed

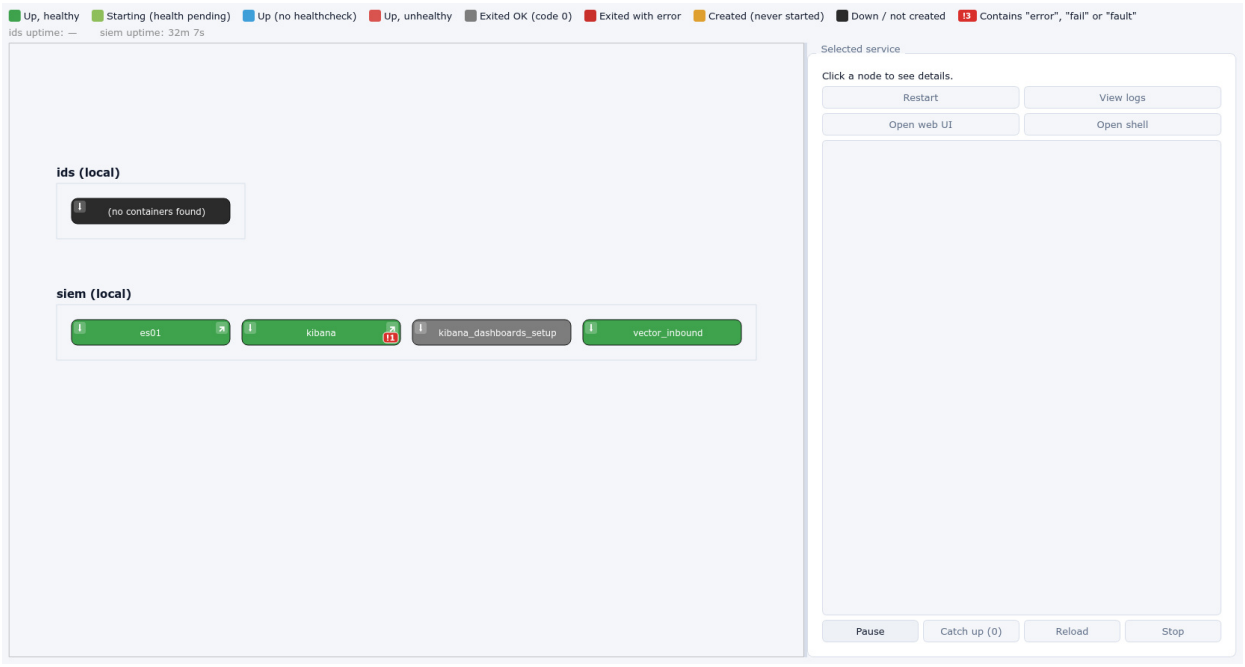


## Stopping: containers going down

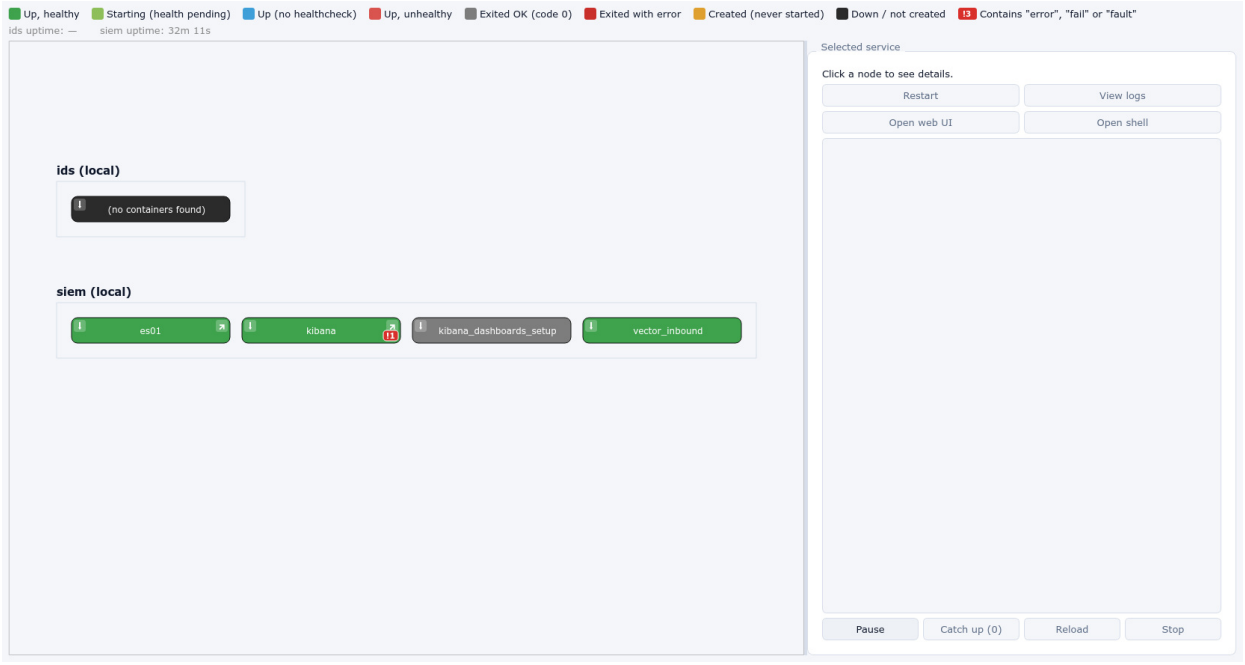


## Stopped: down command finished

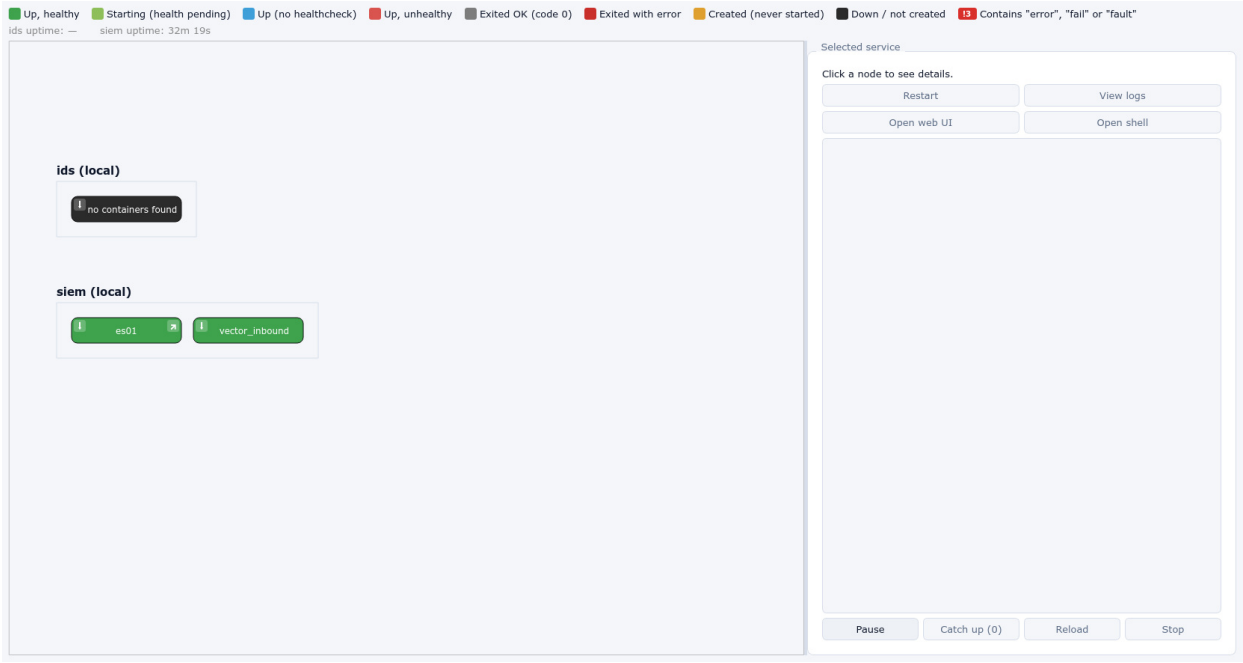


# 4. Event log

| Marker | Elapsed | Event |
|---|---|---|
| 1 | 2s | kibana_dashboards_setup removed |
| 1 | 2s | kibana stopped |
| 2 | 7s | vector_inbound stopped |
| 3 | 8s | es01 stopped |