1.
use lab_store
auto-suggest hints as you type
Restart the MongoDB Shell
Use legacy shell
Clear raw shell output
Pin new results
already on db lab_store

2. 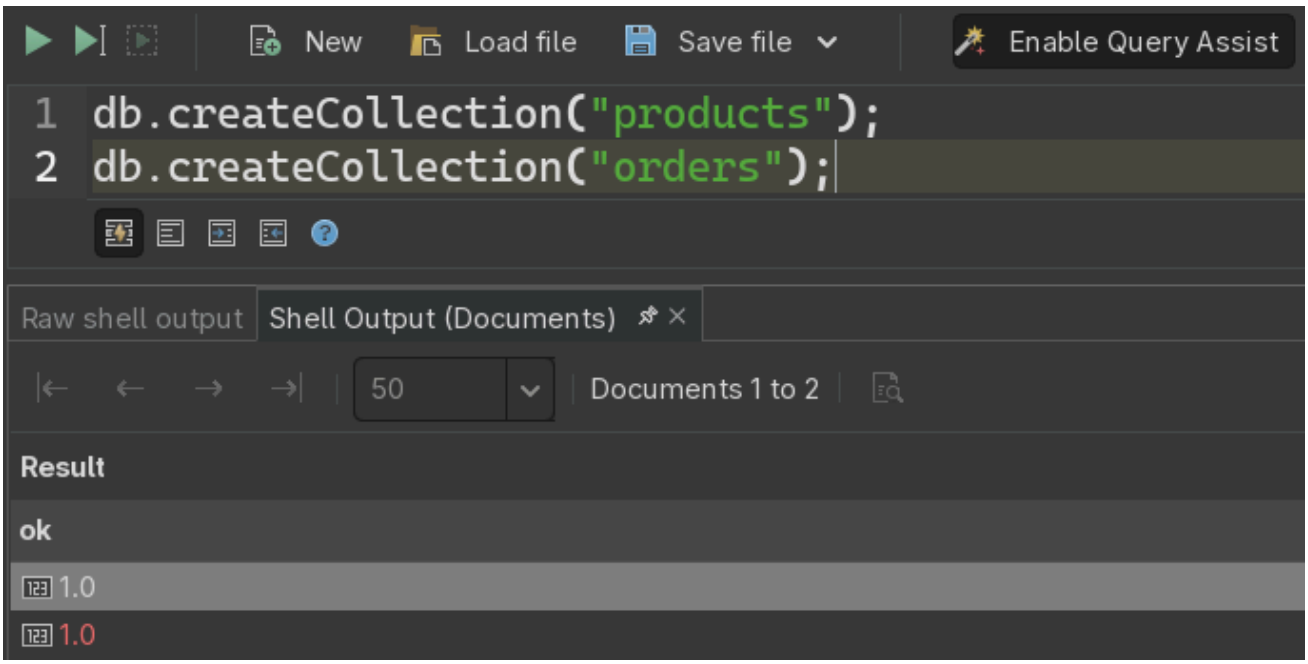
New
Load file
Save file
Enable Query Assist
db.createCollection("products");
db.createCollection("orders");
Raw shell output
Shell Output (Documents)
50
Documents 1 to 2
Result
ok
1.0
1.0

3. 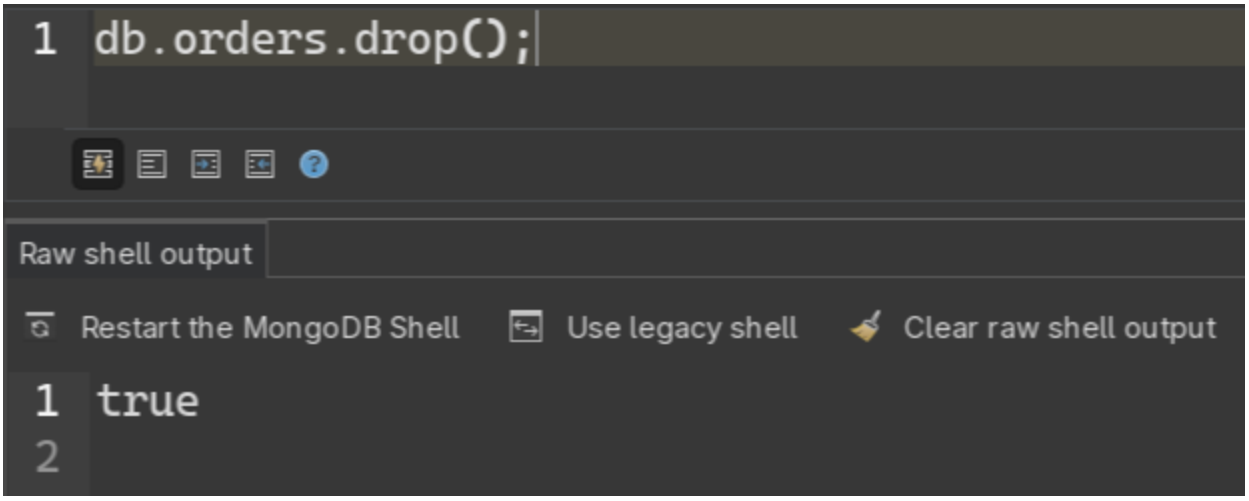
db.orders.drop();
Raw shell output
Restart the MongoDB Shell
Use legacy shell
Clear raw shell output
true

4.

New Load file Save file Enable Query Assist

```
db.products.insertOne({
  name: "USB-C Cable",
  category: "Accessories",
  price: 149,
  inStock: true,
  tags: ["cable", "usb-c"],
  createdAt: new Date()
})
```

Raw shell output | Shell Output (Documents)

Restart the MongoDB Shell | Use legacy shell | Clear raw shell output | Pin new re

```
true
{
  acknowledged: true,
  insertedId: ObjectId('69874762f6c2b28508b0834b')
}
```

5. 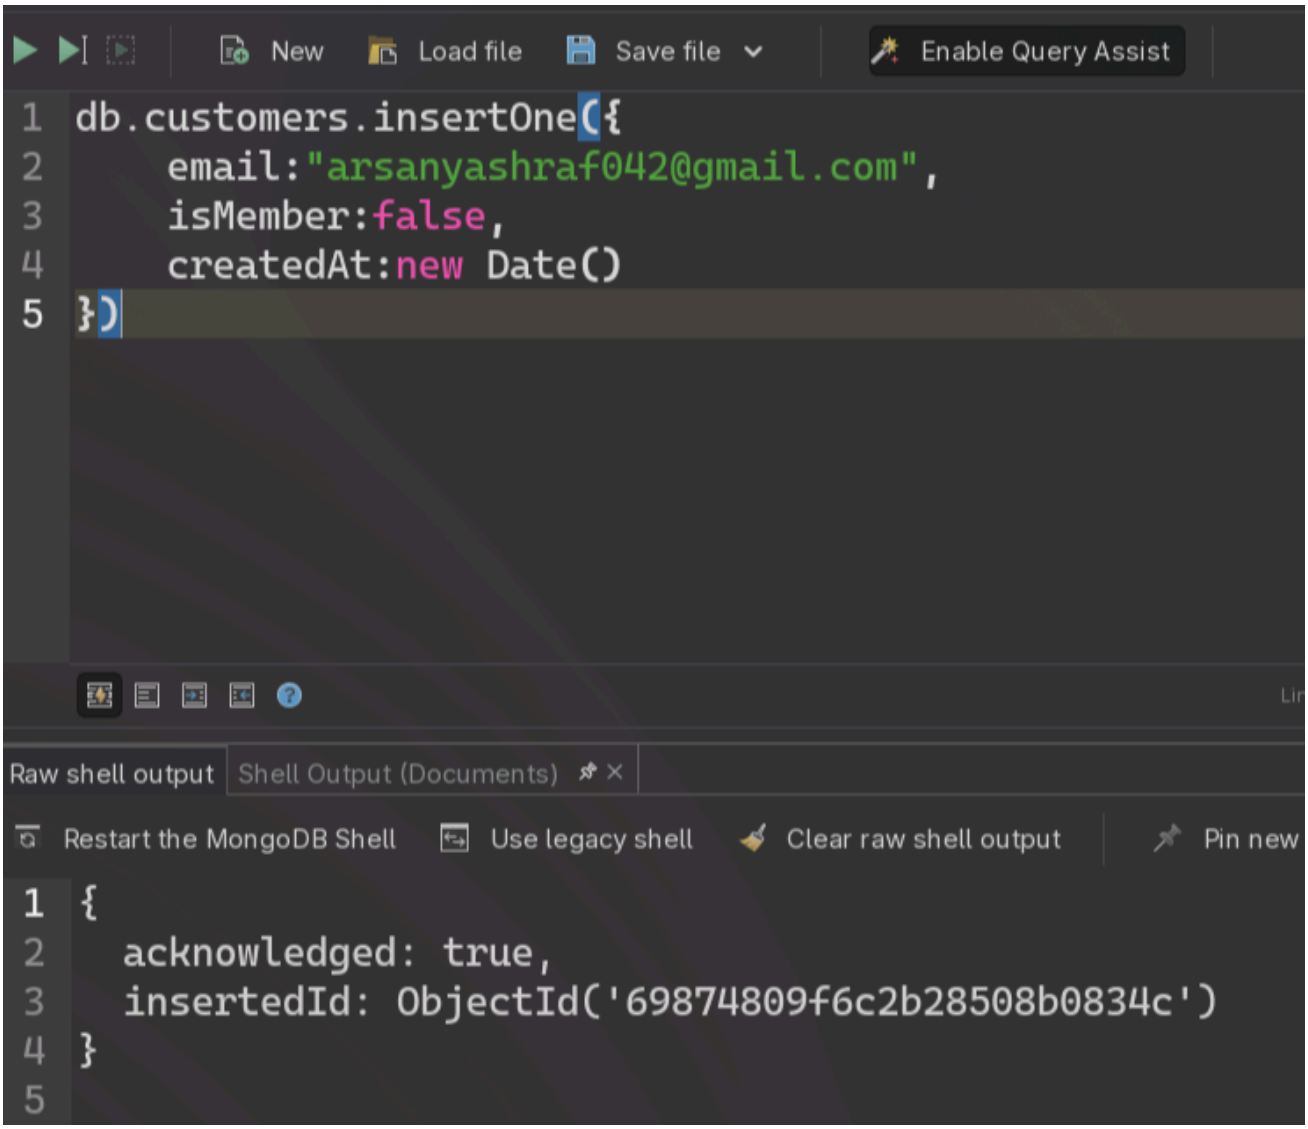
New
Load file
Save file
Enable Query Assist
db.customers.insertOne({
email:"arsanyashraf042@gmail.com",
isMember:false,
createdAt:new Date()
})
Raw shell output
Shell Output (Documents)
Restart the MongoDB Shell
Use legacy shell
Clear raw shell output
Pin new
{
acknowledged: true,
insertedId: ObjectId('69874809f6c2b28508b0834c')
}

6.

New | Load file | Save file | Enable Query Assist | Change vi

```
db.orders.insertOne({
  orderDate: new Date(),
  customerId: ObjectId("69874809f6c2b28508b0834c"),
  items: [
    {
      productId: ObjectId("69874762f6c2b28508b0834b"),
      quantity: 1,
      price: 10
    }
  ],
  totalAmount: 10,
})
```

Raw shell output | Shell Output (Documents)

Restart the MongoDB Shell | Use legacy shell | Clear raw shell output | Pin new results

```
{
  acknowledged: true,
  insertedId: ObjectId('69874a38f6c2b28508b0834d')
}
```

7.

```
db.products.insertMany([
  {
    name: "MacBook Pro 14",
    category: "Laptops",
    price: 1999,
    inStock: true,
    tags: ["apple", "m3", "work"],
    createdAt: new Date()
  },
  {
    name: "ThinkPad X1 Carbon",
    category: "Laptops",
    price: 1450,
    inStock: false,
    tags: ["lenovo", "business", "linux-friendly"],
    createdAt: new Date()
  },
  {
    name: "iPhone 15 Pro",
    category: "Phones",
    price: 999,
    inStock: true,
    tags: ["apple", "ios", "mobile"],
    createdAt: new Date()
  },
```

Raw shell output | Shell Output (Documents)

Restart the MongoDB Shell | Use legacy shell | Clear raw shell output

```
{
  acknowledged: true,
  insertedId: ObjectId('69874a38f6c2b28508b0834d')
}
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('69874b13f6c2b28508b0834e'),
    '1': ObjectId('69874b13f6c2b28508b0834f'),
    '2': ObjectId('69874b13f6c2b28508b08350'),
    '3': ObjectId('69874b13f6c2b28508b08351'),
    '4': ObjectId('69874b13f6c2b28508b08352')
  }
}
```

8.

9. 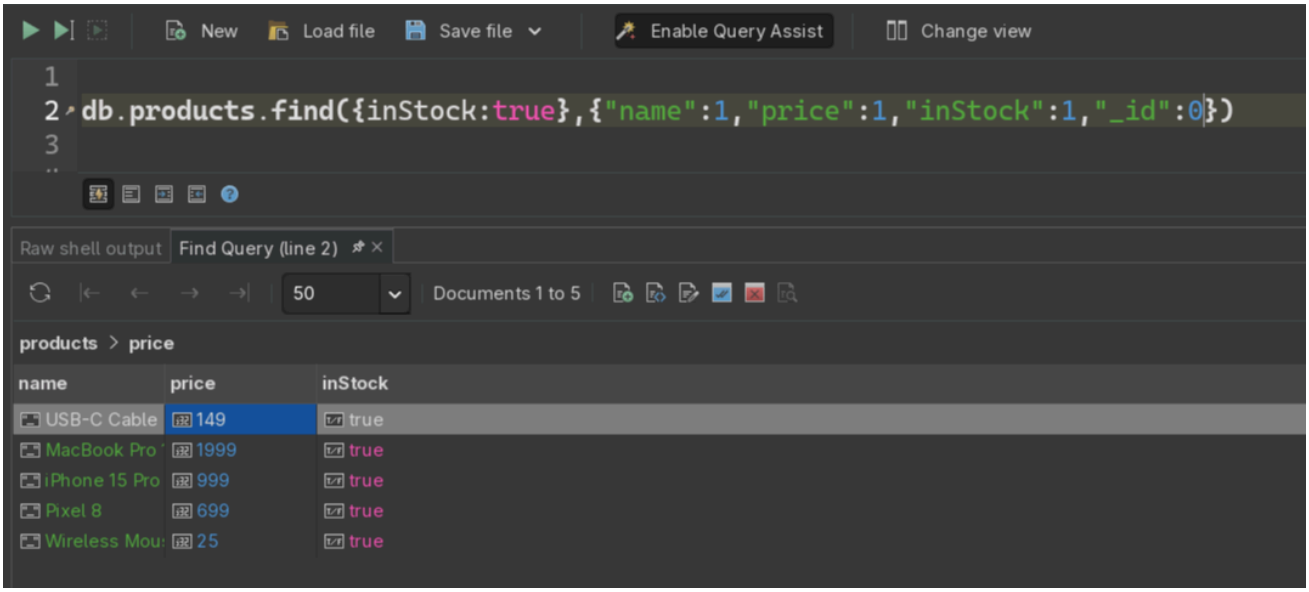

10. 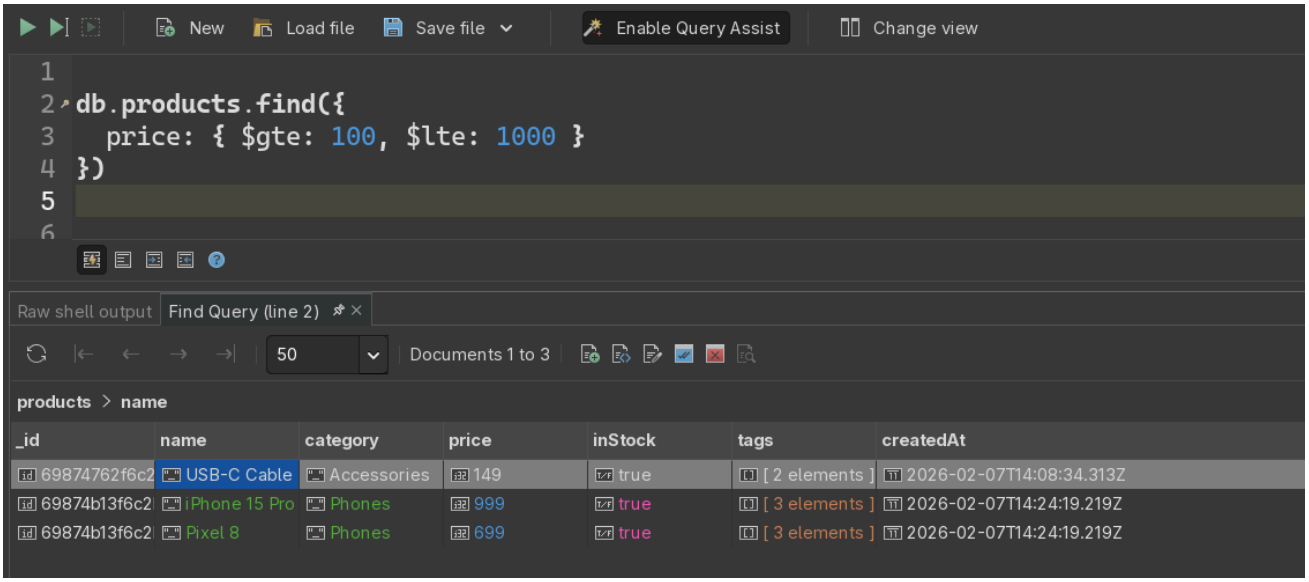

11. Cursor: it's a pointer to the data , it's used to iterate over some set of data and it helps save server or pc's resources by batching the data on batches and not dump all of it one time , this helps save the memory and make sure that the user is satisfied with the results based on what they need.