"a b c a b c"

a b c a b c

ans = a a a b c #

a	b	c	d	e	f	g	h	-	-	-
2	2	2	1	0	0	0	0			

26

(2) "a b a c d c b d"

ans | a a b b b b d # |

(1) Increase the freq of char!

(2) if char freq is 1, push it into queue,

(3) check the front of queue, if its from elem freq is 1, it will be part of my answer else pop it.

method

Deque [Data structure]

① Add karung middle mein karu
② Delete bhi middle hand
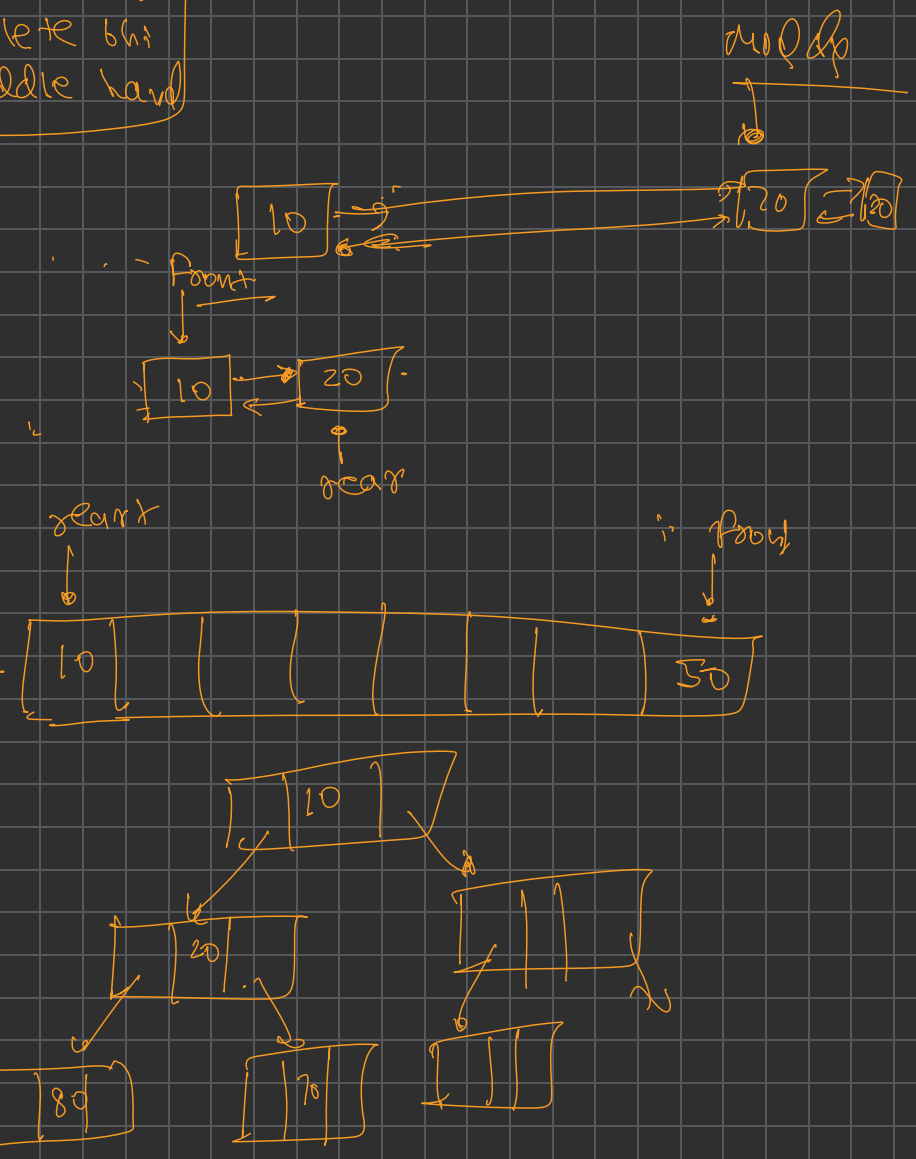
Himani