**Object Management**

**Laboratory Report**

| | |
|---|---|
| **Name** | Akinsola, Gideon Oluwaferanmi |
| **Student ID** | c11/26/CCSA/17099 |
| **Lab Title** | Lab 3, Object Management |
| **Course** | CCSA103, Check Point Certified Security Administrator (CCSA) R82 |
| **Completion date** | 4 November 2026 |
| **Management platform** | SmartConsole R82 |

## 1. Introduction

This report documents how I completed CCSA103 Lab 3, Object Management. The purpose of the lab is to practise managing SmartConsole objects: modifying an existing network object, creating a new host object, cloning a default service object instead of editing it, adding an object to a group, and then publishing and installing the database so the changes take effect.

I worked in SmartConsole on the Alpha Site Security Management Server (A-SMS, 10.1.1.101), logged in as cpadmin. The lab was done on 4 November 2026, and the date and time are visible in the screenshots.

**Lab environment note.** The lab brief lists A-SME as a second installation target but states that students who do not have it should proceed with A-SMS only. I did not have access to A-SME, so I followed that provision and installed the database on A-SMS only.


## 2. Practical Implementation

The five tasks are documented below in the order in which I performed them. Each task includes the screenshots taken during the lab.


### 2.1 Task 1: Modify the A-DMZ-NET Network Object

I opened the Object Explorer from the Objects menu, selected Network Objects > Networks and opened the A-DMZ-NET properties window (192.168.12.0, mask 255.255.255.0). In the colour menu I selected Orange. I also edited the comment field so that it ends with my name, keeping the existing description text. I then clicked OK.

| Setting | Value configured |
|---|---|
| Object | A-DMZ-NET |
| Colour | Orange |
| Comment | Alpha-Site Demilitarized Zone Network- Modified by Gideon Akinsola |

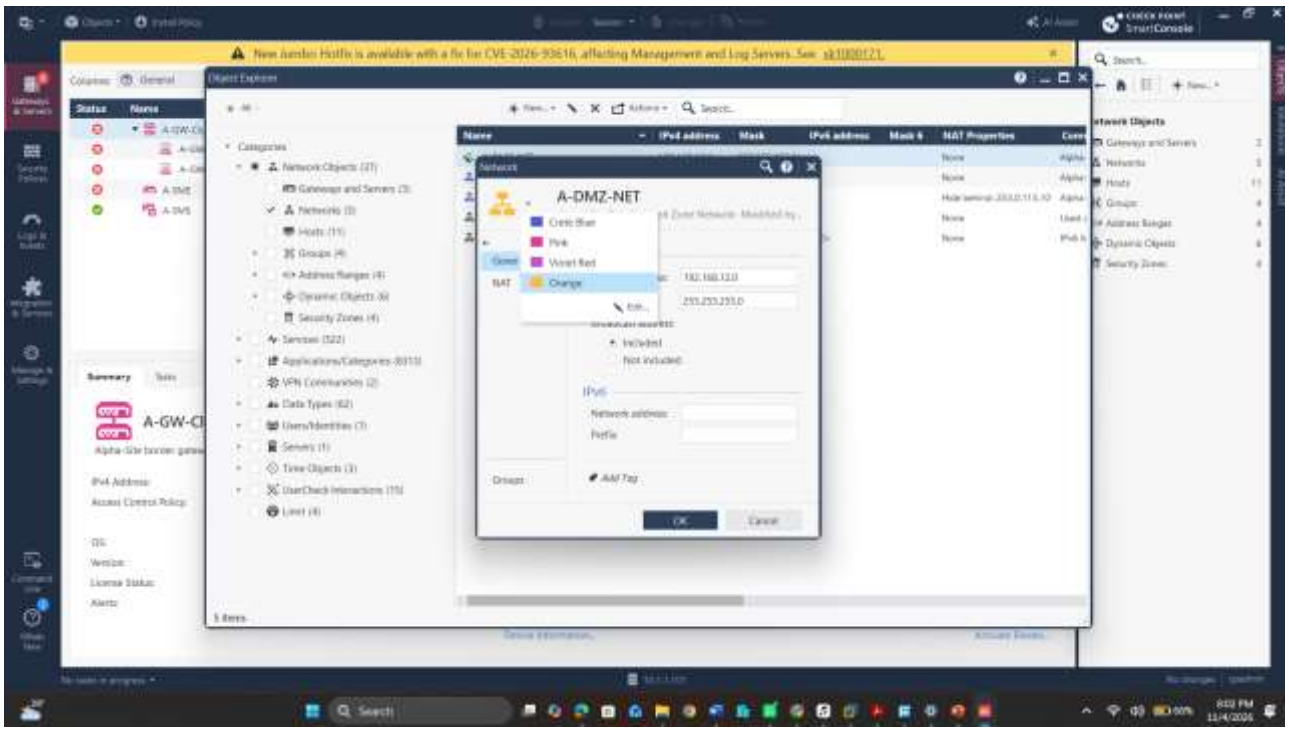


**Screenshot A (part 1 of 2).** *The A-DMZ-NET properties window with the Orange colour selected and the modified comment showing in the header, which proves the colour and comment were being changed on the correct object.*

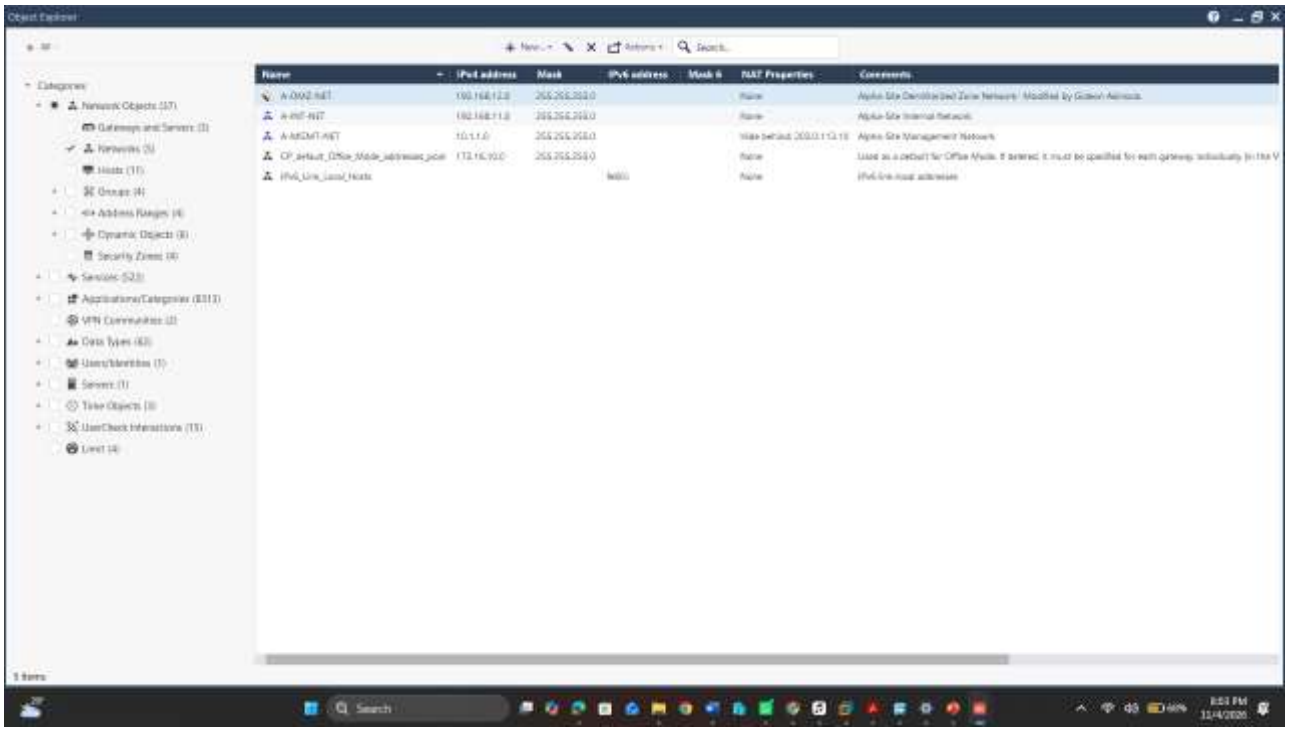


**Screenshot A (part 2 of 2).** *The Object Explorer after saving, showing A-DMZ-NET with an orange icon and the full comment "Alpha-Site Demilitarized Zone Network- Modified by Gideon Akinsola", which proves the change was applied.*


### 2.2 Task 2: Create the Student-Web-Server Host Object

From the Objects menu I opened the New Host window and entered the name Student-Web-Server, the IPv4 address 192.168.12.150 (inside the A-DMZ-NET range) and the comment “Internal Web Server for Lab”. I selected a green colour for the object and clicked OK.

| Setting | Value configured |
|---|---|
| Name | Student-Web-Server |
| IPv4 address | 192.168.12.150 |
| Comment | Internal Web Server for Lab |
| Colour | Sea Green (green icon shown; the colour name is not displayed in the screenshots) |

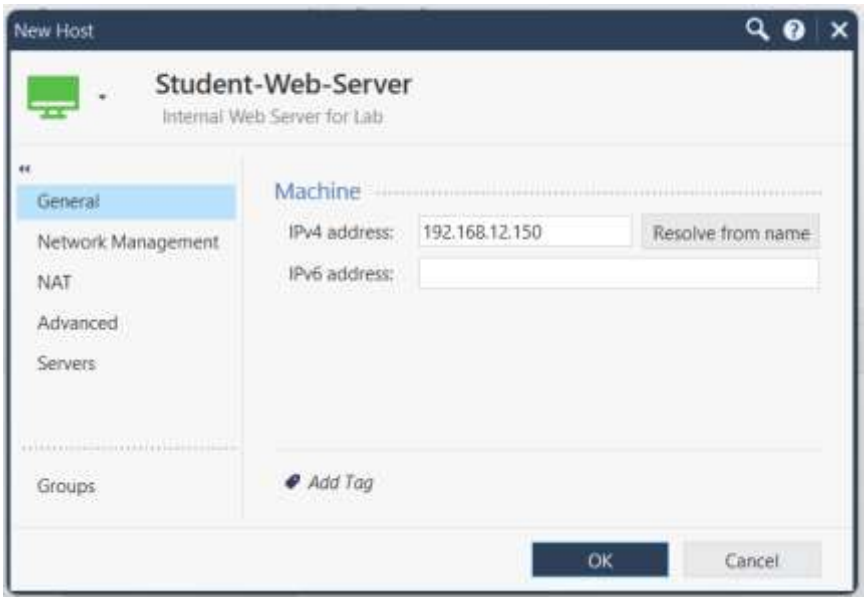


**Supporting Figure 1.** *The New Host window showing the name, comment and IPv4 address of Student-Web-Server, which proves the host object was defined with the required values.*

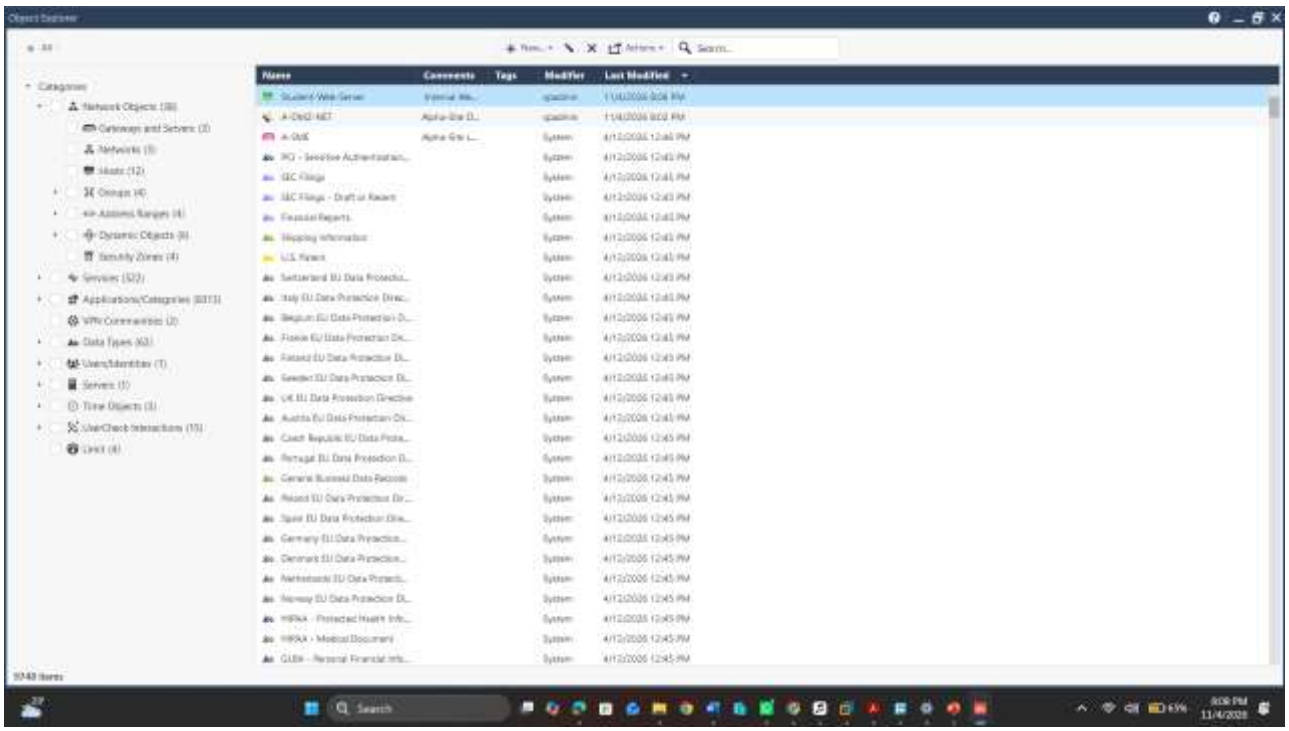


**Supporting Figure 2.** *The Object Explorer showing Student-Web-Server with a green icon at the top of the list, created by cpadmin at 8:06 PM, and the Hosts category count increased from 11 to 12, which proves the object was saved.*


### 2.3 Task 3: Clone the Standard HTTP Service

In the Object Explorer I expanded Services > TCP and located the default http service (port 80). Following the lab instruction, I cloned http and did not clone https. In the New TCP Service window I set the name to http_Student_Custom and the comment to “Custom HTTP for Lab”, and selected a violet red colour for the icon. On the General tab I changed the port from the standard port (80) to Customize and entered 8081. On the Advanced tab I set the Virtual session timeout to Specific and entered 120 seconds. I then clicked OK.

| Setting | Value configured |
|---|---|
| Name | http_Student_Custom |
| Comment | Custom HTTP for Lab |
| Colour | Violet Red (icon colour matches the Violet Red swatch) |
| Port | Customize: 8081 |
| Advanced > Session timeout after (in seconds) | Specific: 120 |

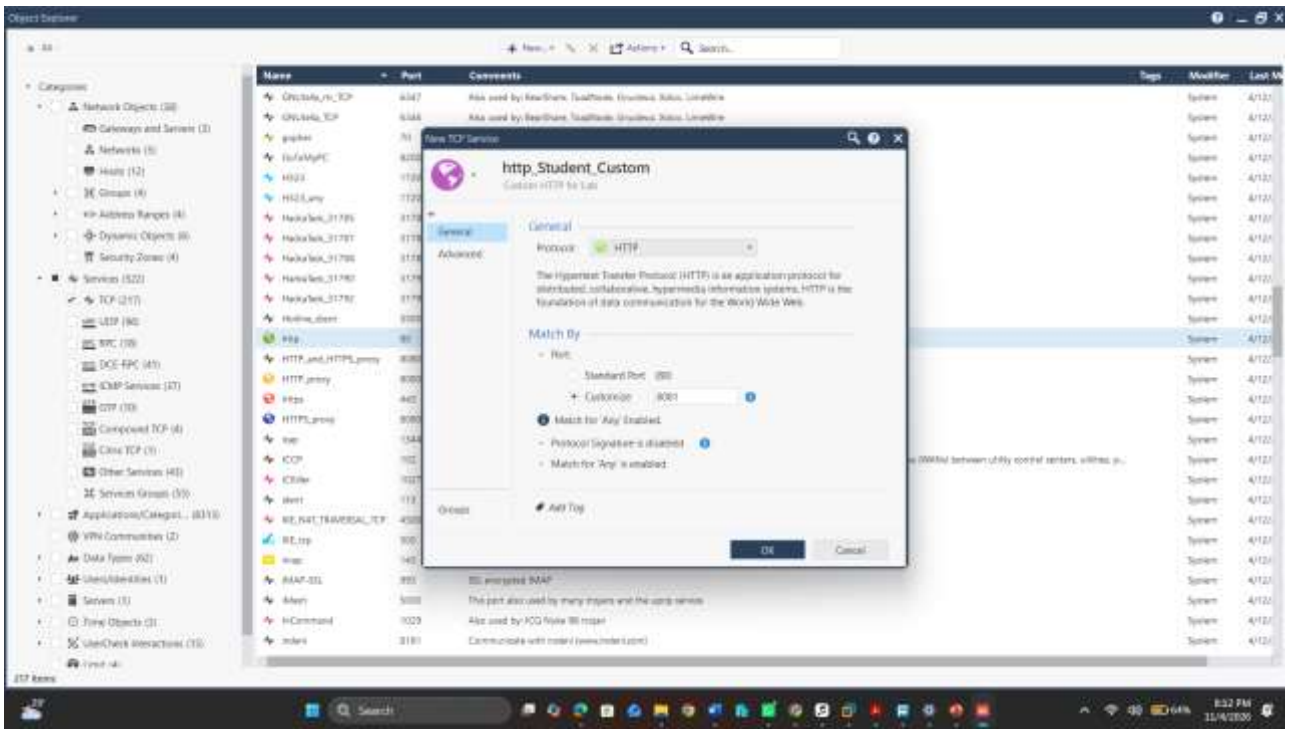


**Screenshot B (part 1 of 2).** *The General tab of the cloned service showing the name http_Student_Custom, the comment "Custom HTTP for Lab" and the port set to Customize with the value 8081, which proves the custom port was configured.*

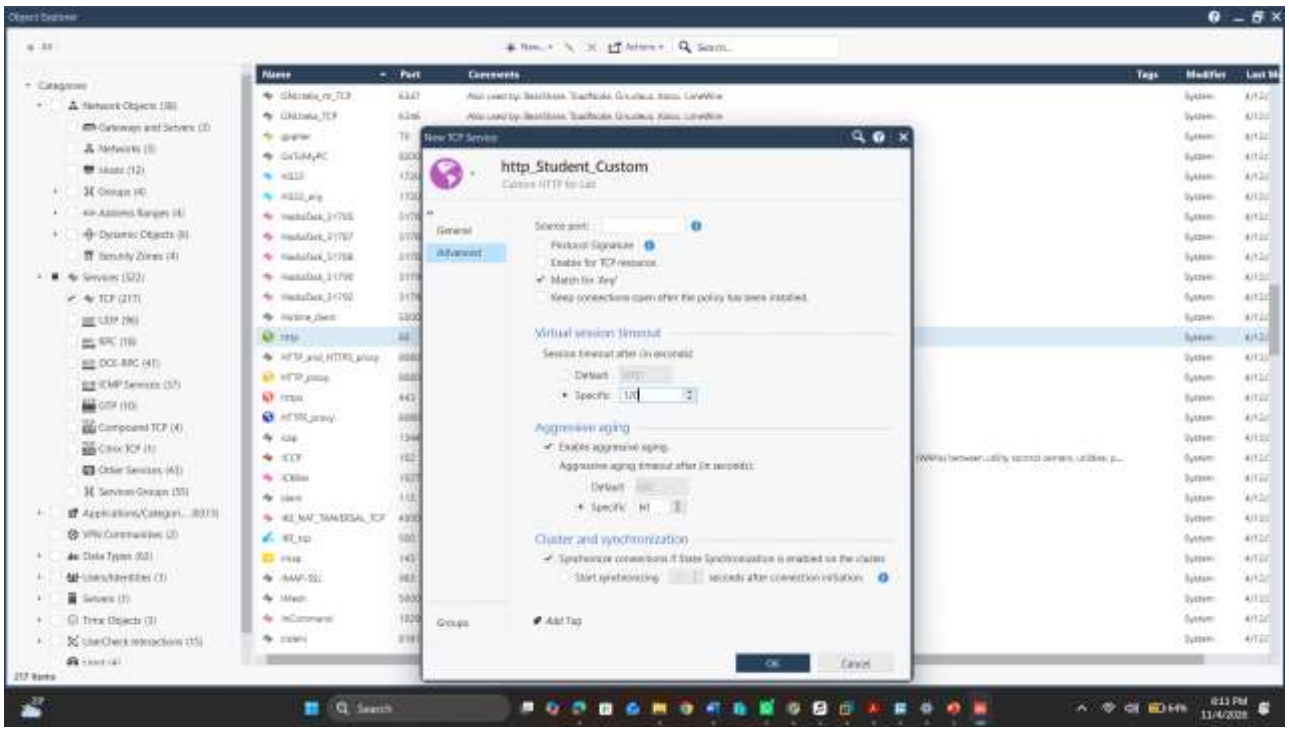



**Screenshot B (part 2 of 2).** *The Advanced tab of the same service showing the Virtual session timeout set to Specific with the value 120, which proves the 120-second session timeout was configured.*

**Original service.** In the service list in Screenshot B (part 1), the default http service is still listed with port 80 and System as the modifier, so it was not changed by the clone. The category counts also increased after the

clone was saved (TCP from 217 to 218 and Services from 522 to 523, compare Screenshot B with Screenshot C). I did not take a separate screenshot of the saved http_Student_Custom entry in the list.

### 2.4 Task 4: Modify the Alpha-Web Group


In the Object Explorer I went to Network Objects > Groups, opened the Alpha-Web group ("Alpha-Site DMZ Web Servers Group") and added Student-Web-Server using the plus (+) button. I then checked the member list in the group properties window.

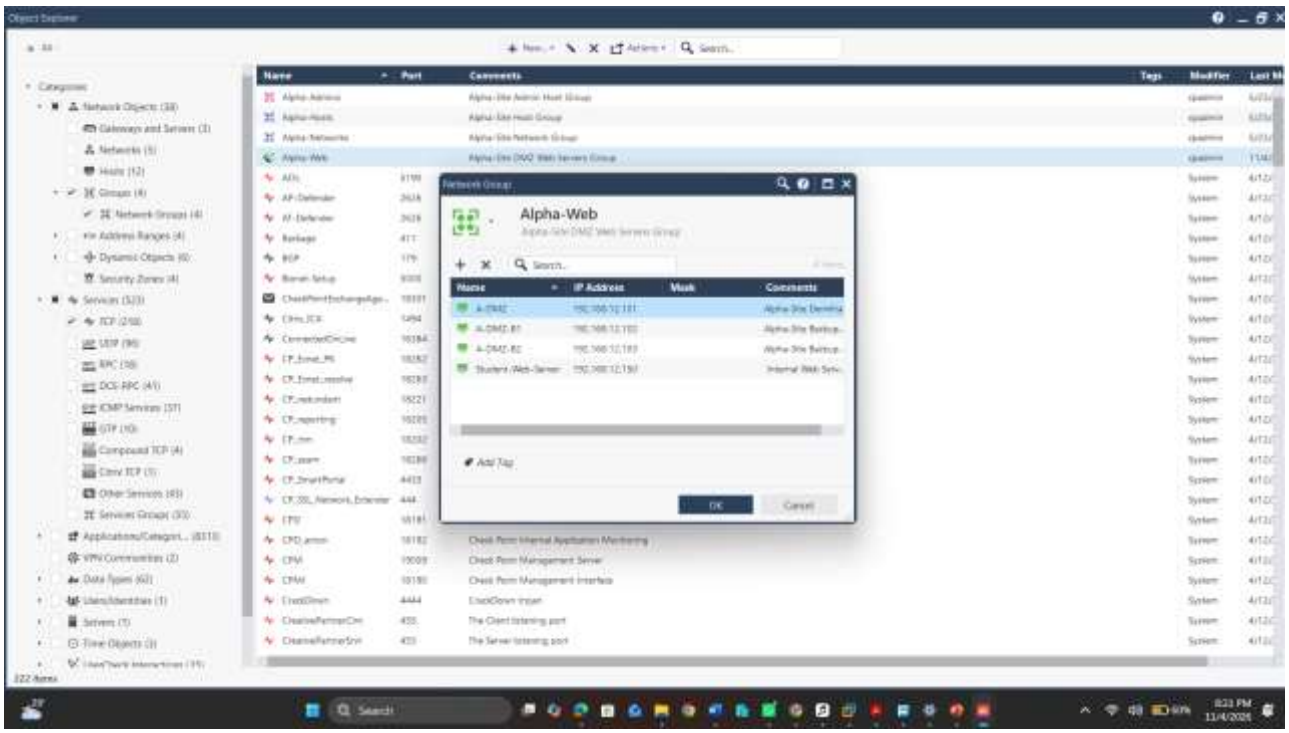


**Screenshot C.** *The Alpha-Web group properties window listing four items, A-DMZ, A-DMZ-B1, A-DMZ-B2 and Student-Web-Server (192.168.12.150), which proves the new host is now a member of the group.*


### 2.5 Task 5: Publish and Install the Database

I clicked Publish and entered the session name "Object Management Lab - GA". The publish window showed four total draft changes. After publishing, the status bar showed "Published".

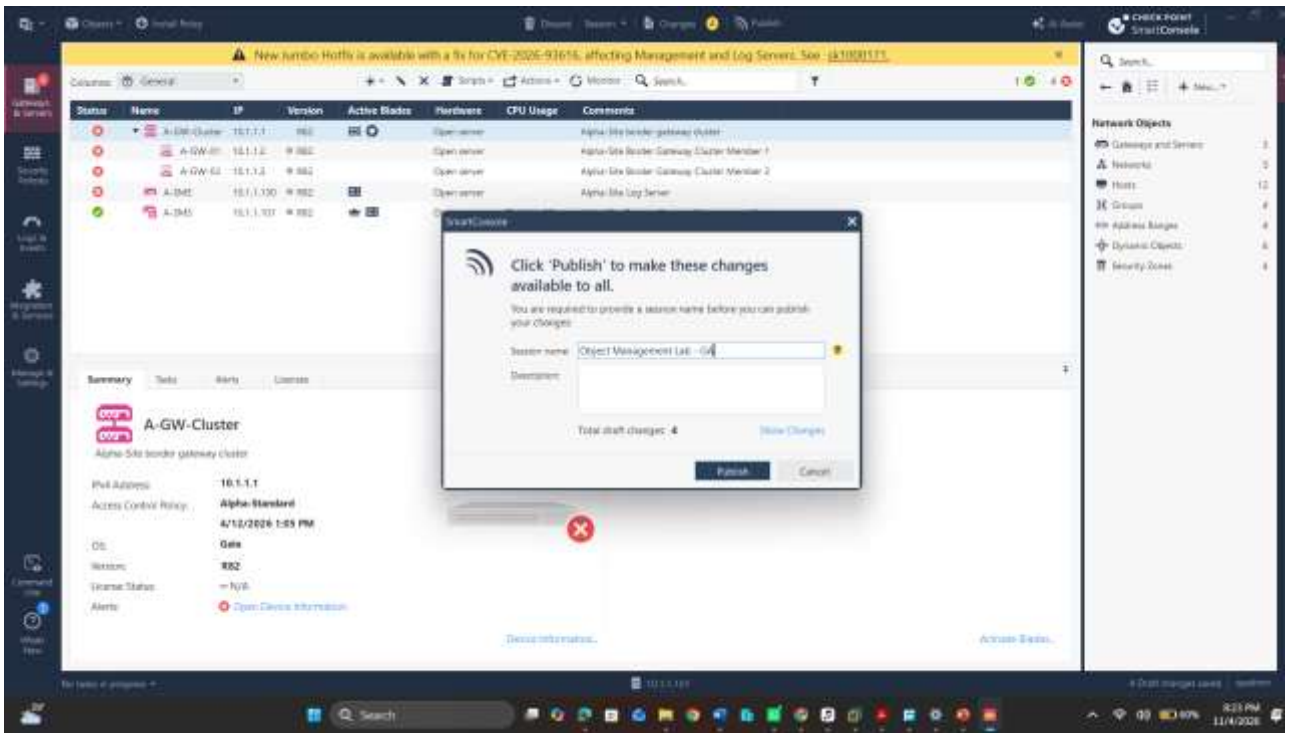


**Supporting Figure 3.** *The Publish window with the session name "Object Management Lab - GA" and four draft changes, which proves the changes were published under the required session name.*


I then opened the Install Database window from the main menu. Two candidates were listed, A-SME (10.1.1.130) and A-SMS (10.1.1.101). As explained in the environment note, A-SME was not available to me, so I followed the A-SMS-only provision in the lab brief, selected A-SMS only and clicked Install.

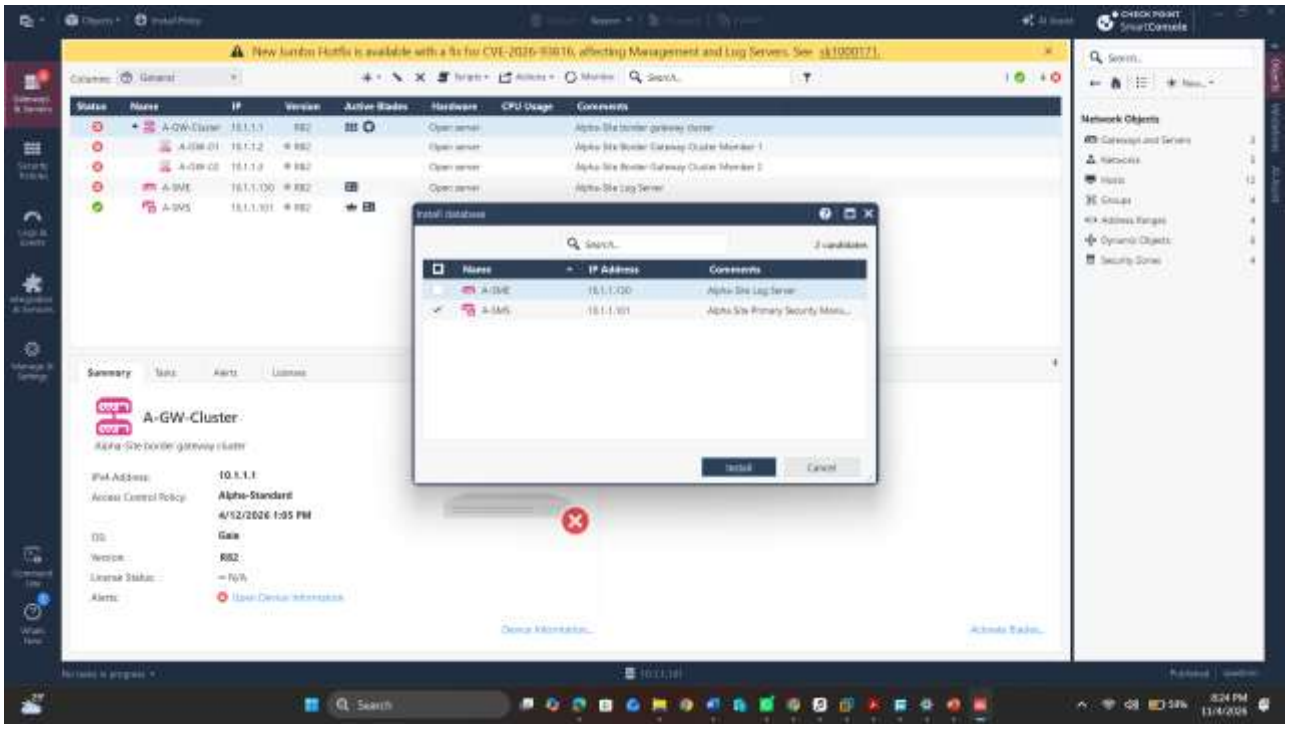


**Supporting Figure 4.** *The Install database window with only A-SMS selected, which proves the database installation was started for A-SMS only, as permitted by the lab brief.*

I opened Recent Tasks to verify the result. The task “Install Database on A-SMS” reported “Database installation succeeded for: A-SMS”, run by cpadmin on 04-Nov-26 at 20:25:05, and the status bar showed “Install Database on A-SMS Succeeded”.

| Setting | Value configured |
|---|---|
| Session name | Object Management Lab - GA |
| Install Database target | A-SMS only (A-SME was not available; A-SMS-only provision in the brief followed) |
| Result | Install Database on A-SMS: Succeeded |

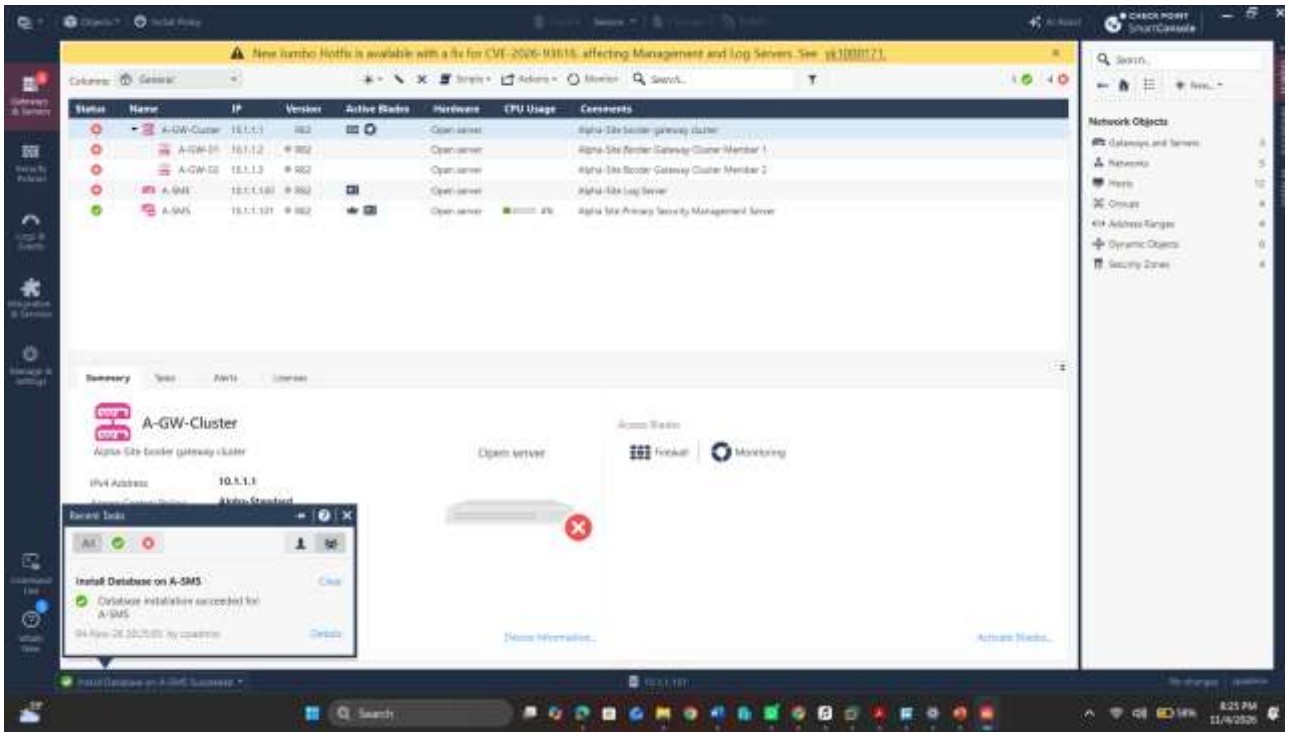


**Screenshot D.** *The Recent Tasks panel showing “Install Database on A-SMS” with the message “Database installation succeeded for: A-SMS” at 04-Nov-26 20:25:05, which proves the database installation on A-SMS completed successfully.*

### 3. Short-Answer Questions

**1. What is a recommended best practice when dealing with default objects in SmartConsole, rather than editing them directly?**

The best practice is to avoid editing default objects directly, because they are predefined when the site is deployed. Instead, I should clone the default object and edit the clone, using it as the starting point for a custom object. This is what I did in Task 3 by cloning the http service rather than changing it.

**2. Name at least three different ways (menus or locations) you can manage or create objects within SmartConsole.**

Objects can be managed from the New menu in the GATEWAYS & SERVERS view, from the Objects menu on the global toolbar (available in any view), and from the Object Explorer, which is opened from the Objects menu. They can also be managed from a rule in the SECURITY POLICIES rulebase by clicking the plus sign (+) on the rule. The New menu handles only limited types of objects, while the Objects menu and Object Explorer handle all types.

**3. What is the Object Explorer, and what is one unique capability it has that the standard New menu does not?**

The Object Explorer is a window opened from the Objects menu that organises all existing objects into categories and lets me add, edit, clone and delete them. One capability it has that the New menu does not is exporting one or more objects to a CSV file. It can also search the database and show whether an object is in use.

**4. According to best practices, why should you use Group Objects instead of adding individual objects directly to security rules?**

Using groups simplifies rule management and reduces the number of rules, because one group can represent many individual objects. It also makes changes easier and less error-prone: when a group's membership changes, the change applies to every rule that uses the group, so I edit one object instead of many rules. In Task 4, adding Student-Web-Server to the Alpha-Web group was a single change to one object, and any rule that uses Alpha-Web would include the new member without being edited.

**4. Conclusion**

In this lab I modified the A-DMZ-NET network object (Orange, with an updated comment), created the Student-Web-Server host object, cloned the default http service as http_Student_Custom with port 8081 and a 120-second session timeout, and added Student-Web-Server to the Alpha-Web group. I then published the changes in the session "Object Management Lab - GA" and installed the database on A-SMS, as permitted by the lab brief. The Recent Tasks panel confirmed that the installation succeeded.