


Lab 3 – Amazon S3 Security Responsibilities

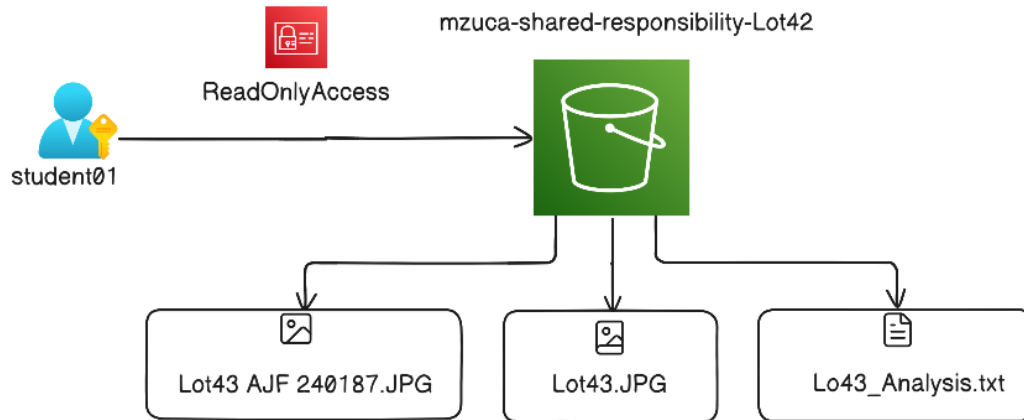

Task 1

Create an S3 Bucket

Name

- *mzuca-shared-responsibility-lot42*

Amazon S3 > Buckets > Create bucket

Create bucket Info

Buckets are containers for data stored in S3.

General configuration

AWS Region
US East (N. Virginia) us-east-1

Bucket type Info

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace
Choose the namespace where you want to create your bucket. [Learn more](#)

☒ **Global namespace**
By default, S3 creates general purpose buckets in the global namespace.

☐ **Account Regional namespace (recommended)**
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name Info

mzuca-shared-responsibility-lot42

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

Format: s3://bucket/prefix

Object Ownership Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ **ACLs disabled (recommended)**

☐ **ACLs enabled**

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ **ACLs disabled (recommended)**

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ **ACLs enabled**

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ **Block all public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☒ **Block public access to buckets and objects granted through new access control lists (ACLs)**

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☒ **Block public access to buckets and objects granted through any access control lists (ACLs)**

S3 will ignore all ACLs that grant public access to buckets and objects.

☒ **Block public access to buckets and objects granted through new public bucket or access point policies**

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☒ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ **Disable**

☐ **Enable**

Tags - optional

You can use bucket tags to analyze, manage and specify permissions for a bucket. [Learn more](#)

- ☐ You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. [Learn more](#)

No tags associated with this bucket.

[Add new tag](#)

You can add up to 50 tags.

Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the [Storage](#) tab of the [Amazon S3 pricing page](#).

☒ **Server-side encryption with Amazon S3 managed keys (SSE-S3)**

☐ **Server-side encryption with AWS Key Management Service keys (SSE-KMS)**

☐ **Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)**

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ **Disable**

☒ **Enable**

► Advanced settings

- ☐ After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

[Cancel](#)

[Create bucket](#)

[Amazon S3](#) > [Buckets](#) > mzuca-shared-responsibility-lot42

Successfully created bucket "mzuca-shared-responsibility-lot42"

mzuca-shared-responsibility-lot42 [Info](#)

[Objects](#) | [Metadata](#) | [Properties](#) | [Permissions](#) | [Metrics](#) | [Management](#) | [File systems - new](#) | [Access Points](#)

Objects (0)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

< 1 > [⌵](#)

☐	Name	Type	Last modified	Size	Storage class
--------------------------	------	------	---------------	------	---------------

No objects

You don't have any objects in this bucket.

[Upload](#)

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (1) Info

Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

< 1 >

Name

▲

AWS Region

▼

Creation date

▼

mzuca-shared-responsibility-lot42

US East (N. Virginia) us-east-1

July 21, 2026, 12:52:18 (UTC+02:00)

Task 2

Uploaded Files

- Lot43 AJF 240187.JPG
- Lot43.JPG
- Lo43_Analysis.txt



Lot 43 AJF
240187



Lot 43



Lot43_Analysis

Upload succeeded

For more information, see the Files and folders table.

Upload: status

Close

After you navigate away from this page, the following information is no longer available.

Summary

Destination

s3://mzuca-shared-responsibility-lot42

Succeeded

3 files, 240.1 KB (100.00%)

Failed

0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (3 total, 240.1 KB)

Find by name

< 1 >

Name

Folder

▼

Type

▼

Size

▼

Status

▼

Error

▼

Lot 43 AJF 240187.JPG

-

image/jpeg

182.2 KB

Succeeded

-

Lot 43.JPG

-

image/jpeg

56.5 KB

Succeeded

-

Lot43_Analysis.txt

-

text/plain

1.5 KB

Succeeded

-

Task 3 Review

Properties & Versioning

mzuca-shared-responsibility-lot42

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Bucket overview

AWS Region

US East (N. Virginia) us-east-1

Amazon Resource Name (ARN)

arn:aws:s3::mzuca-shared-responsibility-lot42

Creation date

July 21, 2026, 12:52:18 (UTC+02:00)

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

Disabled

Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#)

Disabled

Bucket ABAC

Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes. With ABAC, you can attach tags to your general purpose buckets and AWS Identity and Access Management (IAM) entities (users or roles), then scale access to objects in your S3 general purpose buckets using tag-based policies. [Learn more](#)

ABAC status

Disabled

Tags

You can use tags to track storage costs, organize general purpose buckets, and specify permissions for a general purpose bucket. AWS-generated tags are created by AWS and are read-only. [Learn more](#)

S3 Console now uses s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets by default. To use these APIs for tagging, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. [Learn more](#)

Encryption

Default encryption

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Server-side encryption with Amazon S3 managed keys (SSE-S3)

Bucket Key

When KMS encryption is used to encrypt new objects in this bucket, the bucket key reduces encryption costs by lowering calls to AWS KMS.

Enabled

Blocked encryption types

Server-Side Encryption with Customer-Provided Keys (SSE-C)

Permissions & Bucket Policy

mzuca-shared-responsibility-lot42

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Permissions overview

Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)

View analyzer for us-east-1

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access

On

Individual Block Public Access settings for this bucket

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Public access is blocked because Block Public Access settings are turned on for this bucket

To determine which settings are turned on, check your Block Public Access settings for this bucket. Learn more about [using Amazon S3 Block Public Access](#)

No policy to display.

Task 4 Enable

Default encryption

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)
Server-side encryption with Amazon S3 managed keys (SSE-S3)

Bucket Key
When KMS encryption is used to encrypt new objects in this bucket, the bucket key reduces encryption costs by lowering calls to AWS KMS. [Learn more](#) [↗](#)
Enabled

Blocked encryption types [Info](#)
Server-Side Encryption with Customer-Provided Keys (SSE-C)

Edit

Block Public Access

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#) [↗](#)

☒ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Versioning Enable

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#) [↗](#)

Bucket Versioning

☐ Suspend

This suspends the creation of object versions for all operations but preserves any existing object versions.

☒ Enable

After enabling Bucket Versioning, you might need to update your lifecycle rules to manage previous versions of objects.

Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#) [↗](#)

Disabled

✔ Successfully edited Bucket Versioning

To transition, archive, or delete older object versions, [configure lifecycle rules](#) [↗](#) for this bucket.

×

mzuca-shared-responsibility-lot42 [Info](#)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Bucket overview

AWS Region
US East (N. Virginia) us-east-1

Amazon Resource Name (ARN)
[↗](#) arn:aws:s3::mzuca-shared-responsibility-lot42

Creation date
July 21, 2026, 12:52:18 (UTC+02:00)

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#) [↗](#)

Bucket Versioning

Enabled

Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#) [↗](#)

Disabled

Edit