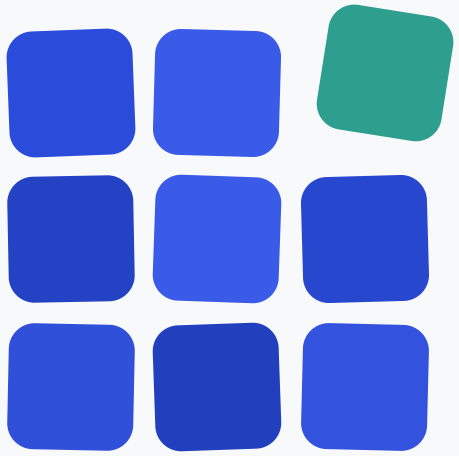


Your agent says done. Tessera checks.

Deterministic edit safety for every AI coding agent: what an edit reaches before it happens, and what it broke right after.

Local · No LLM · Any agent, any model · Apache-2.0

Agents edit code they have only partly read.

```
agent › grep, open 3 files, rename findById → findOne
agent › ✓ Done. All references updated.

ci, 40 minutes later › src/users/repo.ts:17 error TS2339: Property 'findById' does not
exist on type 'UserRepo'.
```

The break shows up in CI, in review, or in production, in the module or the service the agent never opened.

An exact local map, checked on every edit.

Before
`blast · context`

Every caller the change can reach, ranked, with the tests to run.

After
`verify + hooks`

Missing names, wrong argument counts, broken imports. The agent is held at "done" until fixed.

Across services
`map`

Routes, gRPC, Kafka topics and tables linked to the code on both sides.

On the PR
`GitHub Action · ui`

One comment: what breaks, who calls it, which tests to run.

```
$ tessera verify --changed
[V5] src/frontend/rpc.go:88 `ShippingService/GetQuote` is no longer served: the change removed it from
src/shippingservice/main.go, and this call still uses it
```

tree-sitter parses, SQLite stores. **Same code, same answer.** Nothing leaves the machine.

Measured, not claimed.

99.7%

of high-confidence references match compiler ground truth (TS, JS, Java)

49 / 49

gRPC servers and clients linked in microservices-demo, five languages, no wrong link

979 → 15

blocking findings left by a blind find-and-replace, before and after the fixes; all 15 real

< 50 ms

p95 lookups on 10,000 files; 45,000-file repositories index in under a minute

21

agents set up by one command; edit-checking hooks in 8 of them

12

languages; TypeScript, JavaScript and Java resolved through imports and types

Ground truth, scorers and adapters for other tools: github.com/iamsaquib8/tessera-bench. Accuracy method: docs/accuracy.md.

Try it on your repository.

```
# no setup: indexes on first use
npx tessera-codegraph blast <symbol>
# wire it into your agents
npx tessera-codegraph init
```

- Run it on a real change and tell us what it missed.
- Add a language, a framework pack, or an agent adapter.
- Star it if it saved your agent from a bad edit.

github.com/iamsaquib8/tessera

After 1.0

- Test selection in CI
- Architecture rules at every edit
- SCIP precise mode
- VS Code and JetBrains extensions
- Runtime traces over the static graph
- Data lineage and PII rules