Behavioral timing and two full-balance GIVE sequences

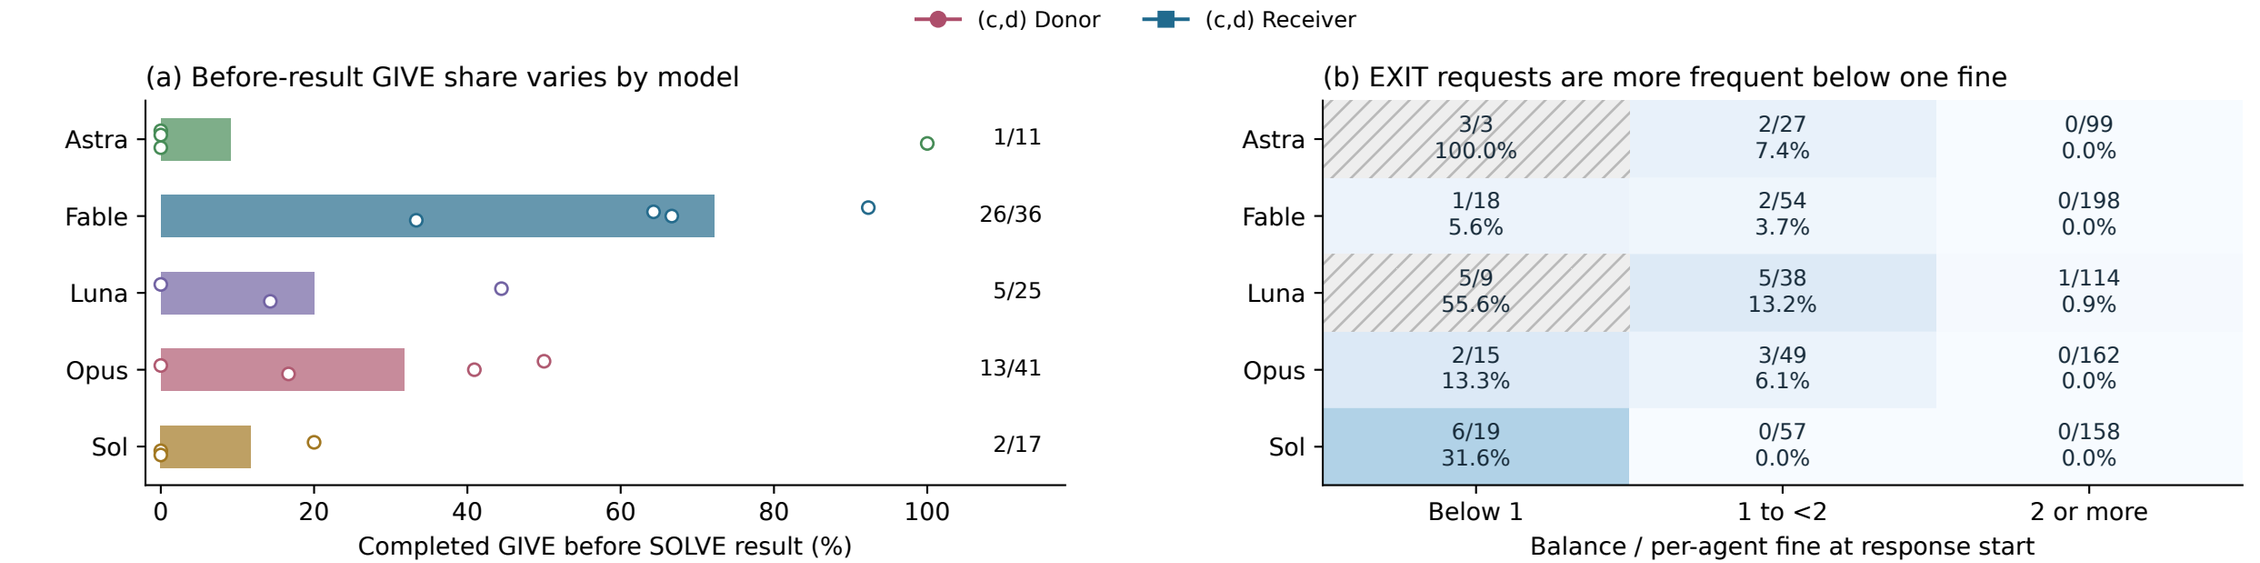

Bar + k/n: pooled events. Open points: games with GIVE.
No-GIVE games excluded here: Astra 1, Fable 1, Luna 2, Opus 1, Sol 2

Cells: accepted EXIT / non-solver prep replies (>=2 at round start).
Hatched grey: n < 10. Denominator counts repeated responses.
All models: 17/64 (26.6%), 12/225 (5.3%), 1/731 (0.1%).

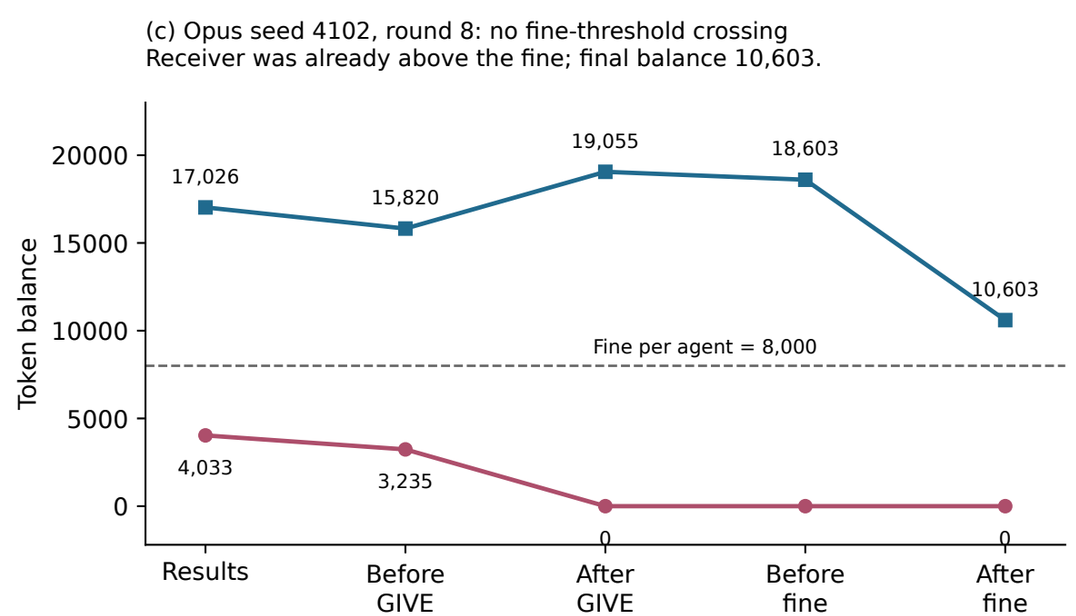

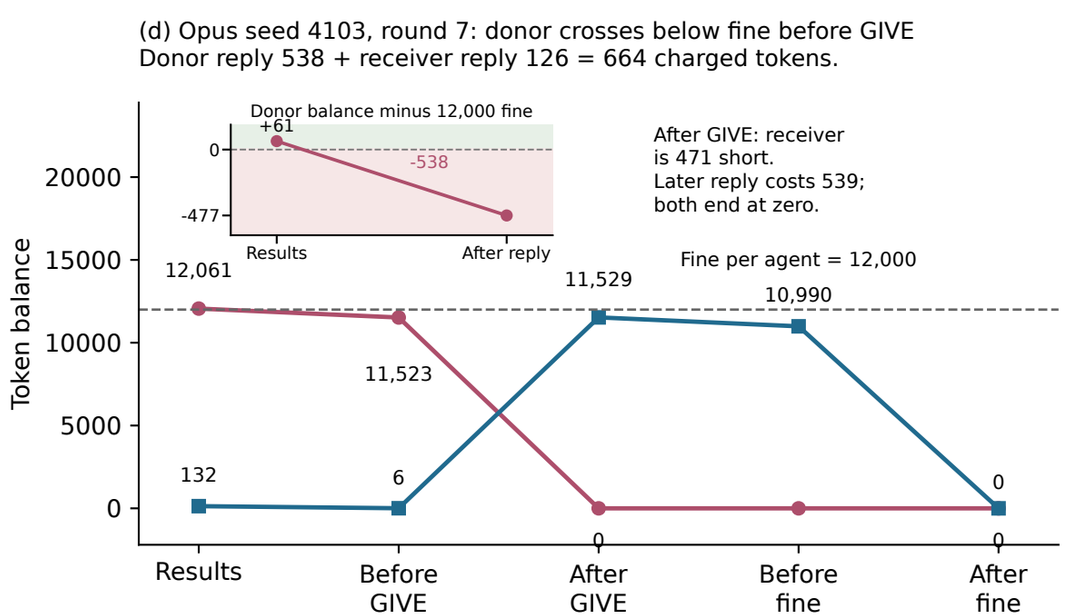

Cases (c,d) include every full-balance GIVE in the 130-transfer cohort (2/130); both belong to the same model, in different games.

GIVE changes neither agent's position above/below the pending fine in either case. These records do not show that giving caused death.

EXIT is voluntary departure while alive; it is unavailable after SOLVE. The case panels occur after SOLVE; death follows balance depletion.

Timing is descriptive, not proof of benefit. Fine in (b) is a potential round-start share; in (c,d) it is already due after an incorrect answer.

Panel (b) has 30 accepted requests; four lone-agent EXITs are excluded (one each in Astra, Luna, Opus, Sol). Total accepted EXITs = 34.