

**Response Type :** Alphanumeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Equal

**Answers Case Sensitive :** No

**Text Areas :** PlainText

**Possible Answers :**

NIL

**Deep Learning**

<b>Section Id :</b>	64065341442
<b>Section Number :</b>	4
<b>Section type :</b>	Online
<b>Mandatory or Optional :</b>	Mandatory
<b>Number of Questions :</b>	14
<b>Number of Questions to be attempted :</b>	14
<b>Section Marks :</b>	50
<b>Display Number Panel :</b>	Yes
<b>Section Negative Marks :</b>	0
<b>Group All Questions :</b>	No
<b>Enable Mark as Answered Mark for Review and Clear Response :</b>	Yes
<b>Maximum Instruction Time :</b>	0
<b>Sub-Section Number :</b>	1
<b>Sub-Section Id :</b>	64065388999
<b>Question Shuffling Allowed :</b>	No
<b>Is Section Default? :</b>	null

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 0**

Question Label : Multiple Choice Question

**THIS IS QUESTION PAPER FOR THE SUBJECT "DEGREE LEVEL : DEEP LEARNING (COMPUTER BASED EXAM)"**

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?**

**CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

**(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)**

**Options :**

6406532052228. ✓ YES

6406532052229. ✗ NO

<b>Sub-Section Number :</b>	2
<b>Sub-Section Id :</b>	64065389000
<b>Question Shuffling Allowed :</b>	Yes
<b>Is Section Default? :</b>	null

**Question Number : 75 Question Id : 640653614791 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

Which of the following threshold  $\theta$  value of MP neuron implements OR Boolean function denoted by  $f(\mathbf{x})$ ? Assume that the number of inputs  $x_i$  to the neuron is ten and the neuron does not have any inhibitory inputs.

$$f(\mathbf{x}) = \begin{cases} 1, & \text{if } \sum_{i=0}^9 x_i > \theta \\ 0, & \text{otherwise} \end{cases}$$

**Options :**

6406532052230. ✔ 0

6406532052231. ✖ 1

6406532052232. ✖ 9

6406532052233. ✖ 10

**Question Number : 76 Question Id : 640653614810 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

Consider the statement “the attention mechanism in RNN based Encoder- Decoder architecture helps the decoder to understand the context of words in a given sentence”. The statement is

**Options :**

6406532052270. ✔ True

6406532052271. ✖ False

<b>Sub-Section Number :</b>	3
<b>Sub-Section Id :</b>	64065389001
<b>Question Shuffling Allowed :</b>	Yes
<b>Is Section Default? :</b>	null

**Question Number : 77 Question Id : 640653614792 Question Type : MSQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3 Max. Selectable Options : 0**

Question Label : Multiple Select Question

Suppose that MP neuron takes in 8 Boolean inputs  $(x_0, \dots, x_7)$  and produces the Boolean output  $y$ . Assume none of the inputs is inhibitory. Select all true statements

**Options :**

6406532052234. ✓ There are  $2^{2^8}$  possible Boolean functions

6406532052235. ✗ There are  $2^8$  possible Boolean functions

6406532052236. ✗ The function  $y = \max(x_0, \dots, x_7)$  is not linearly separable


6406532052237. ✓ The function  $y = \max(x_0, \dots, x_7)$  is linearly separable

**Question Number : 78 Question Id : 640653614800 Question Type : MSQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3 Max. Selectable Options : 0**

Question Label : Multiple Select Question

The plot below shows the training loss (dark green curve) and validation loss (light red curve) of a model over 8 epochs ( $t$ ). Select all the correct statements about the bias and variance of the model.

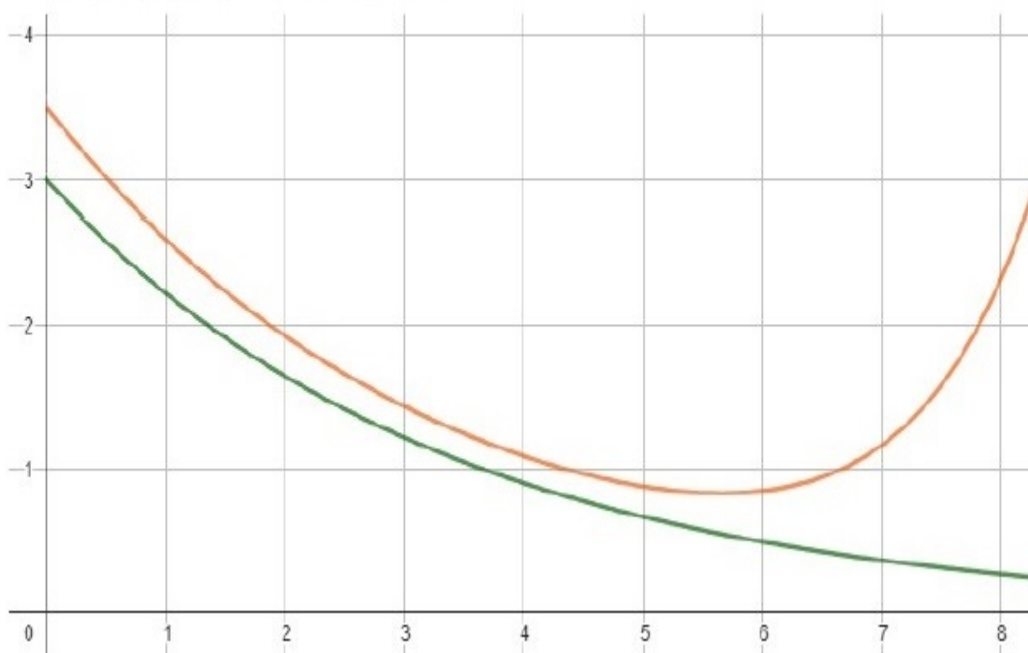

**Options :**

6406532052248. ✗ The model has a low bias and low variance at  $t = 1$  than at  $t = 8$

6406532052249.

✔ The model has a high bias and low variance at  $t = 1$  than at  $t = 8$

6406532052250. ✔ The model has low bias and high variance at  $t = 8$

6406532052251. ✖ The model has high bias and high variance at  $t = 8$

**Question Number : 79 Question Id : 640653614801 Question Type : MSQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3 Max. Selectable Options : 0**

Question Label : Multiple Select Question

Suppose that we have a deep Feed Forward Fully Connected Neural Network. The network is observed to have a high variance. Then, which of the following techniques regularize the parameter of the network to reduce the high variance?

**Options :**

6406532052252. ✔ Adding  $L2$  norm of weights to the loss function

6406532052253. ✔ Adding a noise to the input samples

6406532052254. ✔ Adding a noise to the output prediction

6406532052255. ✔ Adding more samples to the dataset by augmenting existing samples using some augmentation techniques

6406532052256. ✖ Dropping hidden layers in a neural network randomly during training

<b>Sub-Section Number :</b>	4
<b>Sub-Section Id :</b>	64065389002
<b>Question Shuffling Allowed :</b>	Yes
<b>Is Section Default? :</b>	null

**Question Number : 80 Question Id : 640653614793 Question Type : SA Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

Question Label : Short Answer Question

The logistic sigmoid function is defined as follows,

$$f(x) = \frac{1}{1 + \exp(-(wx + b))}$$

The parameters are initialized to  $w = 0.5$   $b = 0.5$ . Suppose the loss is defined as

$$L = \frac{1}{2}(f(x) - y)^2$$

where  $y$  is the true value. Compute the gradient of  $w$  for the following sample  
 $x = 1, y = 1$ .

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Range

**Text Areas :** PlainText

**Possible Answers :**

-0.065 to -0.045

**Question Number :** 81 **Question Id :** 640653614798 **Question Type :** SA **Calculator :** None

**Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

**Correct Marks :** 3

**Question Label :** Short Answer Question

Consider a training set that contains 10 samples to train a neural network.

Further, mini-batch GD algorithm has been chosen to update the parameters of the network with a batch size of 2. Suppose that we use an exponentially decaying learning rate scheme  $\eta_t = 1.5 \exp(-\frac{t}{2})$  and train the model for 2 epochs. What will be the value of the learning rate  $\eta_t$  at the end of the training? Assume,  $t$  starts from zero.

Enter the answer to 3 decimal points (that is, if your answer is -0.12145, then enter it as -0.121)

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Range

**Text Areas :** PlainText

**Possible Answers :**

0.01 to 0.02

**Question Number : 82 Question Id : 640653614802 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

Question Label : Short Answer Question

Consider an input image of size  $100 \times 100 \times 3$ , where 3 is the number of channels. Suppose we apply a set of convolution kernels on the input image that generates the output feature maps of size  $96 \times 96 \times 62$ . How many parameters (including bias) do the kernels have (that is, aggregate the parameters in the kernels)? Assume stride ( $s = 1$ ) and padding  $p = 1$ .

**Response Type : Numeric**

**Evaluation Required For SA : Yes**

**Show Word Count : Yes**

**Answers Type : Equal**

**Text Areas : PlainText**

**Possible Answers :**

9176


**Question Number : 83 Question Id : 640653614809 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

Question Label : Short Answer Question

Consider a simple RNN for a binary sequence classification problem.

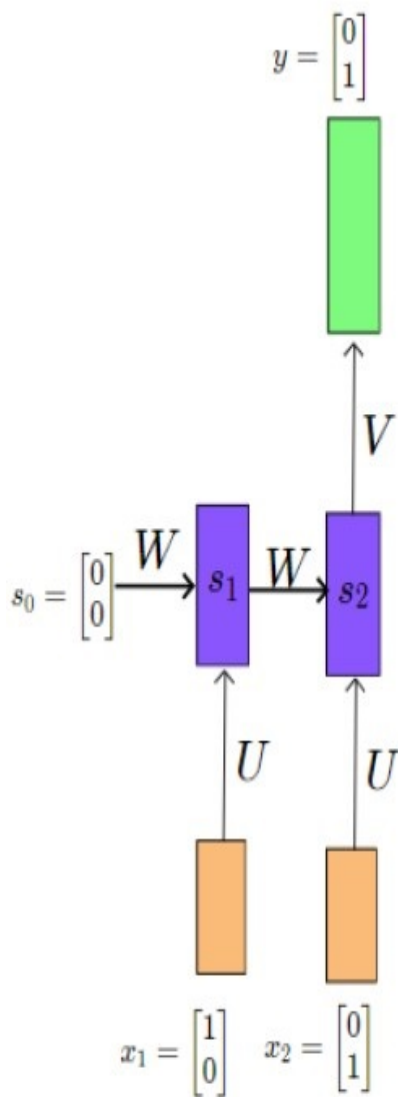

Suppose the weight matrices  $U, V, W$  are initialized as follows

$$W = U = V = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$$

The state vector  $s_t$  is computed as follows

$$s_t = \tanh(Ux_t + Ws_{t-1})$$

What is the loss value? Use cross entropy loss with natural logarithm. **Note:** In all your calculations, consider only the first two decimal places of any number (such as inputs, intermediate results..). That is, if the number is -1.0234, take it as -1.02.

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Range

**Text Areas :** PlainText

**Possible Answers :**



1.95 to 2.15

Sub-Section Number :	5
Sub-Section Id :	64065389003
Question Shuffling Allowed :	No
Is Section Default? :	null

**Question Id : 640653614794 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Question Pattern Type : NonMatrix Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0 Question Numbers : (84 to 86)**

Question Label : Comprehension

Consider a fully connected feed forward neural network with 3 hidden layers. The weight matrix  $W_1$  connecting the input layer to the first hidden layer is of shape  $10 \times 100$ , similarly the shape of other weight matrices are as follows  $W_2 : 100 \times 50$ ,  $W_3 : 50 \times 10$ , and the weight  $W_4$  connecting the final hidden layer and the output layer is of shape  $10 \times 3$ . The network solves the multi-class classification problem by using the cross entropy loss function.

Based on the above data, answer the given subquestions.

**Sub questions**

**Question Number : 84 Question Id : 640653614795 Question Type : SA Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0 Correct Marks : 2**

Question Label : Short Answer Question

How many neurons are there in the network. Every neuron in the network has bias associated with it?

Note: A neuron is a computation unit that takes in some inputs and produce an output.

**Response Type : Numeric**  
**Evaluation Required For SA : Yes**  
**Show Word Count : Yes**  
**Answers Type : Equal**

**Text Areas :** PlainText

**Possible Answers :**

163

**Question Number : 85 Question Id : 640653614796 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 2**

Question Label : Short Answer Question

How many learnable parameters (including bias) does the network have? Assume dropout regularization is applied.

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Equal

**Text Areas :** PlainText

**Possible Answers :**

6693

**Question Number : 86 Question Id : 640653614797 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 1**

Question Label : Multiple Choice Question

The statement that, in general, the activation function of neurons in the network are not necessarily be the same across the network is

**Options :**

6406532052241. ✓ True

6406532052242. ✗ False

**Question Id : 640653614803 Question Type : COMPREHENSION Sub Question Shuffling**

**Allowed : No Group Comprehension Questions : No Question Pattern Type : NonMatrix**

**Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Question Numbers : (87 to 88)**

Question Label : Comprehension

Consider a sentence inside the quote “I may be wrong, and you may be right, and by an effort, we may get nearer to the truth”

Based on the above data, answer the given subquestions.

**Sub questions**

**Question Number : 87 Question Id : 640653614804 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 2**

Question Label : Short Answer Question

What is the size of the vocabulary,  $|V|$ ?

**Response Type : Numeric**

**Evaluation Required For SA : Yes**

**Show Word Count : Yes**

**Answers Type : Equal**

**Text Areas : PlainText**

**Possible Answers :**

16

**Question Number : 88 Question Id : 640653614805 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

Question Label : Short Answer Question

Suppose all words in the vocabulary are represented using one-hot-encoded vector of size  $|V|$ . Then compute the ordered pair-wise (that is, Cartesian product of  $V \times V$ ) cosine similarity between two word representations and enter their sum.

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Equal

**Text Areas :** PlainText

**Possible Answers :**

16

<b>Sub-Section Number :</b>	6
<b>Sub-Section Id :</b>	64065389004
<b>Question Shuffling Allowed :</b>	Yes
<b>Is Section Default? :</b>	null

**Question Number : 89 Question Id : 640653614799 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 5**

Question Label : Multiple Choice Question

The update rule for the ADAM (Adaptive Moments) optimization algorithm is given below,

$$\begin{aligned}m_t &= \beta_1 m_{t-1} + (1 - \beta_1) \nabla w_t \\v_t &= \beta_2 v_{t-1} + (1 - \beta_2) (\nabla w_t)^2 \\w_{t+1} &= w_t - \frac{\eta}{\sqrt{\hat{v}_t} + \epsilon} \hat{m}_t\end{aligned}$$

Here,  $0 \leq \beta_1 < 1$  and  $0 \leq \beta_2 < 1$  and  $t$  starts from zero (that is,  $t = 0, 1, 2, \dots$ ). Both  $m_t$  and  $v_t$  are initialized to zero. However, the update rule uses the bias corrected version of  $m_t$  and  $v_t$ . Which of the following is the bias corrected version of  $m_t$ ?

Helper:

$$m_t = (1 - \beta_1) \sum_{\tau=0}^t \beta_1^{t-\tau} \nabla w_\tau$$

and assume that  $E[\nabla w_\tau] = E[\nabla w] \quad \forall \tau$ , if required.

Options :

6406532052244. ✖  $\hat{m}_t = \frac{m_t}{1-\beta_1^t}$

6406532052245. ✔  $\hat{m}_t = \frac{m_t}{1-\beta_1^{t+1}}$

6406532052246. ✖  $\hat{m}_t = m_t$

6406532052247. ✖  $\hat{m}_t = \frac{m_t}{1-t\beta_1^t}$

Sub-Section Number :

7

Sub-Section Id :

64065389005

Question Shuffling Allowed :

No

Is Section Default? :


null

Question Id : 640653614806 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Question Pattern Type : NonMatrix

Question Numbers : (90 to 91)

Question Label : Comprehension

Consider a model shown below that learns the distributed vector representation of words by learning to predict the target word  $v_w$  given the context word  $u_c$ . Here,  $v_w$  and  $u_c$  are the vector representation of target word at index  $w$  of the output vocabulary and context word at index  $c$  of the input vocabulary, respectively.

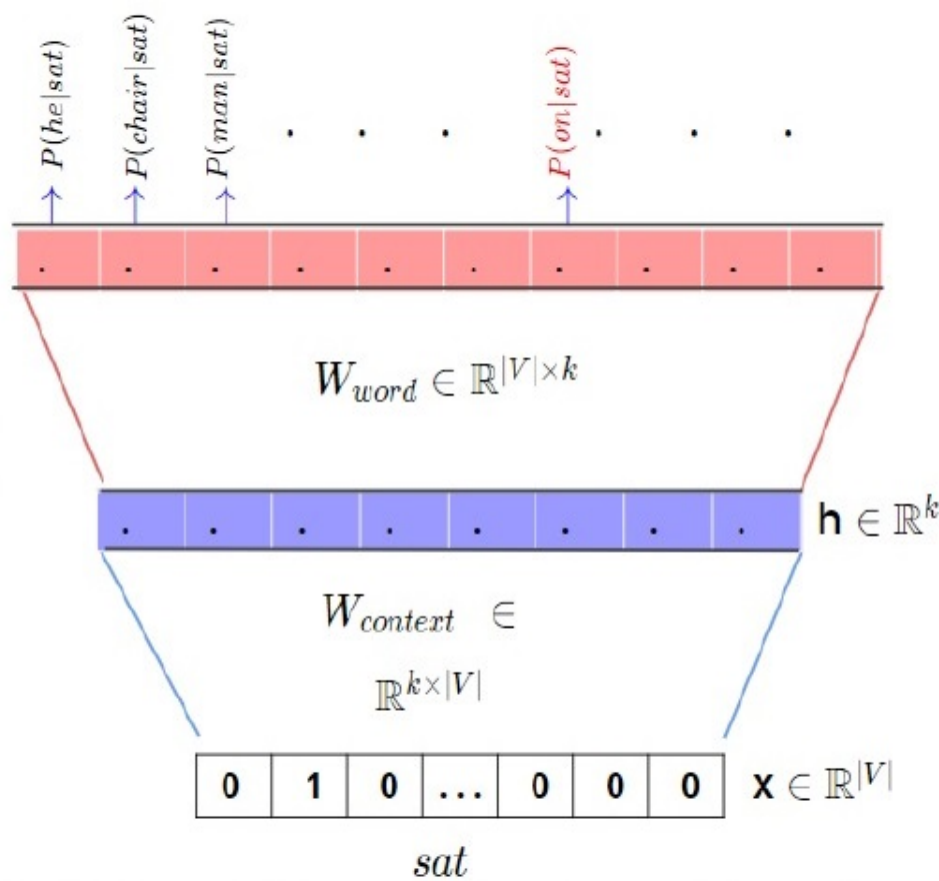

In the diagram,  $|V|$  denotes the size of the vocabulary,  $W_{context}$  and  $W_{word}$  are learnable parameters. The vector representation for all context words are arranged as columns of  $W_{context}$  and the vector representation for all target words are arranged as row vectors in  $W_{word}$ . The parameters are initialized randomly. The input  $x$  is one-hot-representation of a word in the input vocabulary. Assume that the size of both input and output vocabulary are equal.

Based on the above data, answer the given subquestions.

Sub questions



**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 5**

Question Label : Multiple Choice Question

Suppose the input is  $x$  (one hot representation of context word) and the corresponding label is  $y$  (one hot representation of target word). The quantities  $h, u_c, \hat{y}$  are computed as follows,

$$h = u_c = W_{context} x, \quad z = W_{word} u_c$$

$$\hat{y} = \text{softmax}(z)$$

Choose the expression that the model has to minimize using cross entropy loss (Assume natural logarithm where required).

**Options :**

6406532052260. ✓  $-v_w u_c + \log \left( \sum_{w' \in V} \exp(v_{w'} u_c) \right)$

6406532052261. ✗  $-u_c v_w^T + \log \left( \sum_{w' \in V} \exp(u_c v_{w'}^T) \right)$

6406532052262. ✗  $-u_c v_w^T - \log \left( \sum_{w' \in V} \exp(u_c v_{w'}^T) \right)$

6406532052263. ✗  $-v_w^T u_c - \log \left( \sum_{w' \in V} \exp(v_{w'}^T u_c) \right)$

**Question Number : 91 Question Id : 640653614808 Question Type : MSQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 5 Max. Selectable Options : 0**

Question Label : Multiple Select Question

Suppose we compute the gradients  
and update the representations with  
 $\eta = 1$ . Choose the correct statement(s)

Options :

6406532052264. ✓ Suppose the model predicts target word  $v_w$  with probability score of 1 (that is,  $\hat{y}_w = 1$ ). Then no elements in  $v_w$  will get modified after one iteration (i.e, parameter update).

6406532052265. ✓ Suppose the model predicts target word  $v_w$  with probability score of 1 (that is,  $\hat{y}_w = 1$ ). Then no elements in  $v_{w'}, (w' \neq w)$  will get modified after one iteration (i.e, parameter update).

6406532052266. ✓ Suppose the model predicts target word  $v_w$  with probability score of 0.5 (that is,  $\hat{y}_w = 0.5$ ). Then the elements of  $v_w$  will be modified as  $v_w = v_w + 0.5u_c^T$

6406532052267. ✓ Suppose the model predicts target word  $v_w$  with probability score of 0.5 (that is,  $\hat{y}_w = 0.5$ ). Then the elements of  $v_{w'}$  will be modified as  $v_{w'} = v_{w'} - \hat{y}_{w'}u_c^T$

6406532052268. ✖



Suppose the model predicts target word  $v_w$  with probability score of 0.5 (that is,  $\hat{y}_w = 0.5$ ). Then the elements of  $v_{w'}$  will be modified as  $v_{w'} = v_{w'} + \hat{y}_{w'} u_c^T$

## SPG

Section Id :	64065341443
Section Number :	5
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	33
Number of Questions to be attempted :	33
Section Marks :	40
Display Number Panel :	Yes
Section Negative Marks :	0
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065389006
Question Shuffling Allowed :	No
Is Section Default? :	null

Question Number : 92 Question Id : 640653614811 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0