

Pseudocode-Map Substitution Grows with Expertise

Razieh Fathi and Ian Handy

Abstract—This study examined how novice and experienced programmers attended to Pseudocode and maps presented simultaneously while viewing video tutorials about breadth-first search (BFS) and depth-first search (DFS) graph traversals. Using eye tracking technology, we recorded where each of our 62 participants directed their gaze toward the Pseudocode or the Map during each of the 117 trials they completed. As programming knowledge increased from novice to intermediate to advanced, the correlations between how much time was spent gazing at the Pseudocode versus the Map became significantly more negative. This represents a type of Expertise Reversal Effect. While there was a similar trend in terms of how many times each area of interest was viewed, the trend did not reach statistical significance. Therefore, although these findings support the idea that a design intended to be optimal for novice learners might be suboptimal for expert learners, they also suggest caution regarding generalizing results based upon findings obtained from a limited number of novice learners.

Index Terms—eye-tracking, algorithm visualization, expertise reversal effect, dual representation, representation substitution

1 INTRODUCTION

The ability to combine multiple representations has been shown to enhance learning [4]. However, the extent to which such combinations are effective will depend upon the prior experiences of those who receive instruction. Both Cognitive Load Theory (CLT) [7] and the Expertise Reversal Effect (ERE) [3] propose that instructional aids, which are beneficial for novices, do not provide additional benefits for experienced learners. CLT states that the primary source of cognitive load is due to the complexity of the content being learned. When an experienced learner receives instruction via an aid designed for novices, ERE suggests that the added load created by the aid will outweigh its potential benefits. ERE proposes that as learners gain experience and form a schema related to the subject matter being taught, aids that previously supported the learning process become unnecessary.

Therefore, in order to determine whether such a trade-off occurs and whether the trade-off varies depending upon the level of expertise of a given learner, we calculated the Spearman correlation coefficient between the total amount of time spent gazing at the Pseudocode and the total amount of time spent gazing at the Map. These calculations allowed us to assess the degree to which learners substituted one representation for another.

Contributions: (1) we found significant evidence that the amount of time experienced learners spend gazing at Pseudocode and/or a Map decreases as they begin to substitute one for the other; (2) we provided a correlation-based method for quantifying representation substitution; and (3) we suggested implications for designing split-panel visualizations that cater specifically to certain levels of expertise.

2 LITERATURE REVIEW

CTML (Cognitive Theory of Multimedia Learning), developed by Mayer [4], posits that presenting verbal and pictorial information via separate pathways into working memory allows for better integration than when both types of information are combined. Visualizations involving split panels apply this concept directly to the presentation of algorithms. CLT provides a theoretical basis for understanding why adding a second representation to an existing representation would increase cognitive load. Specifically, CLT states that when the intrinsic difficulty of a task is already high, a secondary representation will result in greater cognitive load than a single representation [7, 8]. Finally, ERE expands on CLT by proposing that instructional aids that assist

novices become redundant once learners have formed a schema related to the subject matter being studied [3].

A meta-analysis conducted by Gegenfurtner [2] revealed that intermediate learners tend to focus more than both novice and expert learners, which challenges the traditional view that as prior knowledge increases so too does focused attention. Bednarik [1] demonstrated that experts and novices differ in their attentional strategies when debugging algorithms. Experts verify their mental models whereas novices oscillate back-and-forth between panels without relying upon a strategic approach to problem solving. Similarly, Richter and Scheiter [6] discovered that low-prior-knowledge learners use signals to coordinate text and picture areas-of-interest (AOI) when providing cues; however, high-prior-knowledge learners do not benefit from cues.

Neither Bednarik nor Richter and Scheiter tested three levels of expertise. Furthermore, neither study measured correlation between dwell times as a metric. To demonstrate a substitution gradient requires both measures.

3 METHODS

3.1 Using METAL as an Interactive Algorithm Visualization

Transfer of learning occurs when learners apply previously acquired knowledge to new problems or contexts [5]. Moving beyond surface-level schemas often requires additional instructional support, so that learners can attend to the reasoning behind each step of a solution rather than its form alone. Interactive visualizations embedded in example-based hypermedia have been suggested as one possible support [10].

We use the Map-based Educational Tools for Algorithmic Learning (METAL) project [9] as our visualization platform. METAL renders algorithm execution on Leaflet-based geographic maps alongside color-coded data-structure tables, and has been reported to increase student engagement in coursework that uses it [9]. For the present study we use METAL's visualizations for breadth-first search (BFS) and depth-first search (DFS) applied to a single map dataset—the Delaware road network (henceforth DE; 735 vertices, 879 edges; August 2022 TMG snapshot). Figure 1 shows a representative frame from one trial.

3.2 Design of the Study

The study employed a two-factor between/within design. The between-subject factor was prior programming experience (three groups: novice, intermediate, advanced; see Section 3.3). The within-subject factor was algorithm (BFS, DFS); every participant viewed both algorithms in the same session. Both BFS and DFS are standardly covered in introductory data-structures curricula, and are discoverable, if not always comprehended, by computer-science majors and non-majors alike. Trial order and other counterbalancing of BFS vs. DFS presentation are [CONFIRM].

• Razieh Fathi is with [CONFIRM: institution]. E-mail: [CONFIRM].

• Ian Handy is with [CONFIRM: institution]. E-mail: [CONFIRM].

Manuscript received xx xxx. 202x; accepted xx xxx. 202x. Date of Publication xx xxx. 202x; date of current version xx xxx. 202x. For information on obtaining reprints of this article, please send e-mail to: reprints@ieee.org. Digital Object Identifier: xx.xxx/TVCG.202x.xxxxxx

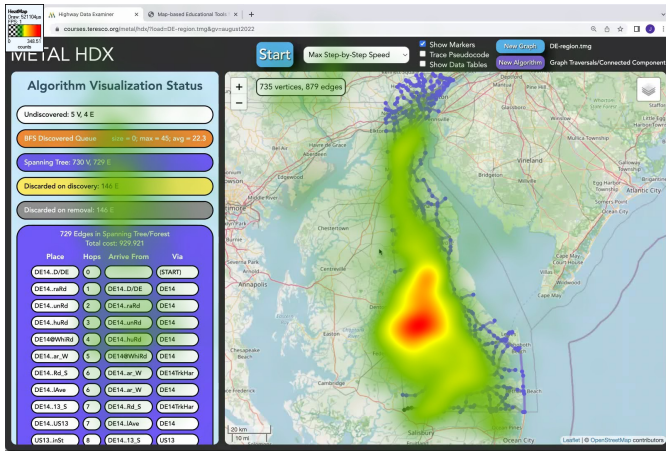


Fig. 1: The METAL HDX interface running a BFS traversal on the Delaware (DE) road network. The left panels show the algorithm-visualization status (including the BFS discovered queue and partial spanning tree) and the per-edge traversal table; the right panel shows the geospatial map. Warm colors overlaid on the map denote aggregated gaze density across Group 1 participants (darker red = more fixations).

3.3 Subjects

Sixty-two participants were recruited at [CONFIRM: institution]; the study was approved under IRB protocol [CONFIRM: number]. Gaze was recorded with a Tobii eye tracker sampled at 60 Hz as participants viewed animated BFS and DFS traversals in the METAL AV system.

We assigned each participant to one of three prior-knowledge groups, according to [CONFIRM: measurement method]:

- **G1 — novice:** no background in computer science.
- **G2 — intermediate:** brief exposure to computer science (e.g., preceding module of coursework).
- **G3 — advanced:** multiple years of formal computer-science coursework.

Every participant viewed both the BFS and DFS animations. With exclusions for quality control, the analyzable set comprised 117 trials ($n=59$ BFS, $n=58$ DFS), with counts per group for analyzable set G1=19, G2=21, G3=20. All the results reported below are conditioned on the DE stimulus rendered in the METAL style; the IRN stimulus present in the aggregate dataset is not included in this analysis.

3.4 Stimuli and AOIs

Each trial consisted of a split-screen METAL stimulus: a Pseudocode panel on the left, showing the algorithm's current step, and a geospatial Map on the right, showing what nodes and edges light up as the algorithm traverses through them. Two AOIs were defined on the DE stimulus—Pseudocode and Map. All participants viewed the BFS animation (DE-bft.wmv) and the DFS animation (DE-dft.wmv); length of each trial was [CONFIRM: number].

For each AOI we made two primary measurements—Fixation Count (FC), and Total Fixation Duration (TFD) across all fixations in that AOI. We derived from these the ratio $TFD_{\text{pseudocode}}/TFD_{\text{map}}$ of TFD for Pseudocode to TFD for Map, scanner index $VC_{\text{pseudocode}}/TFD_{\text{pseudocode}}$, average depth $TFD_{\text{pseudocode}}/FC_{\text{pseudocode}}$, and switching rate $((VC_{\text{pseudocode}} + VC_{\text{map}})/(TFD_{\text{pseudocode}} + TFD_{\text{map}}))$.

3.5 Procedure

Participants completed the study individually in a single session conducted at [CONFIRM: location] between October and November 2022. After signing an informed consent form, each participant was seated in front of the eye-tracking display and completed a [CONFIRM: calibration procedure]. Then, participants viewed both their BFS and DFS animations [CONFIRM: order]—each shown once, per participant. Either as part of, or following this task,

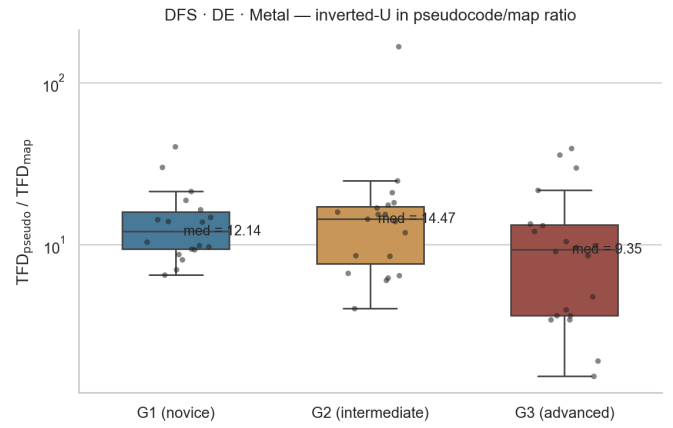


Fig. 2: Pseudocode/Map TFD ratio per participant on the DFS DE Metal stimulus, log-scaled. G2 sits at the apex of the inverted-U; G3 drops below G1 as advanced learners pull dwell off the pseudocode panel.

we also [CONFIRM: if additional practice trials, comprehension checks, or other post-task questionnaires were administered]. Sessions took approximately [CONFIRM: number] minutes per participant. [CONFIRM: compensation]. We recorded data using [CONFIRM: Tobii software and version] and exported data per-AOI aggregated, for offline analysis.

4 RESULTS

4.1 A Non-Monotonic Pattern of Engagement in Pseudocode

G2 viewed the pseudocode panel longer than G1 and G3. The median pseudocode-to-map ratio was 12.33 in G2. G1 and G3 showed medians of 9.57 and 6.12 respectively. This represents an inverse U relationship with respect to both Total Fixation Duration (TFD) and average fixation depth. Only G1 was different ($p=.040$) when comparing BFS and DFS. However, there was no difference ($p>.50$) when comparing G2 and G3. Thus, prior knowledge appears to override the impact of visual organization in determining where participants allocate their gaze. The same shape persists when conditioning on the DFS stimulus alone, with G2 highest and G3 lowest (Figure 2).

4.2 Monotonic Substitution with Respect to Expertise

As expertise increased, the Spearman rank order correlation coefficient (ρ) between pseudocode view TFD and map view TFD became more negative. $\rho(G1)=-.034$, NS, $n=19$; $\rho(G2)=-.457$, $p<.050$, $n=21$; $\rho(G3)=-.631$, $p=.003$, $n=20$. Fisher z supported the end point comparison (G1 vs G3, $p<.050$); however, neither of the middle comparisons reached statistical significance (G1 vs G2 $p=.180$; G2 vs G3 $p=.470$).

Similarly, the rank order correlation between pseudocode view fixation count and map view fixation count followed the same trend but had lower values. $\rho(G1)=+.042$, NS; $\rho(G2)=+.326$, NS; $\rho(G3)=-.161$, NS. All three correlations failed to reach statistical significance ($p>.100$). Similarly, pairwise Fisher z on FC failed to reach significance ($p>.10$): G2 vs G3 ($p=.130$); G1 vs G3 ($p=.550$); G1 vs G2 ($p=.380$). Partial Spearman controlling for group and algorithm yielded directional relationships similar to those found for TFD. Figure 3 shows the lead TFD scatter on the DFS stimulus; Figure 4 compresses the TFD and FC results into a single side-by-side view; Figure 5 shows the participant-level FC scatter combined across BFS and DFS for reference.

The TFD findings match the predictions of ERE regarding visual search behavior. Novices use both panels as separate units of information processing space; intermediates begin to substitute one unit for another; and experts substitute most heavily. As a result, time devoted to viewing one unit becomes time that is subtracted from

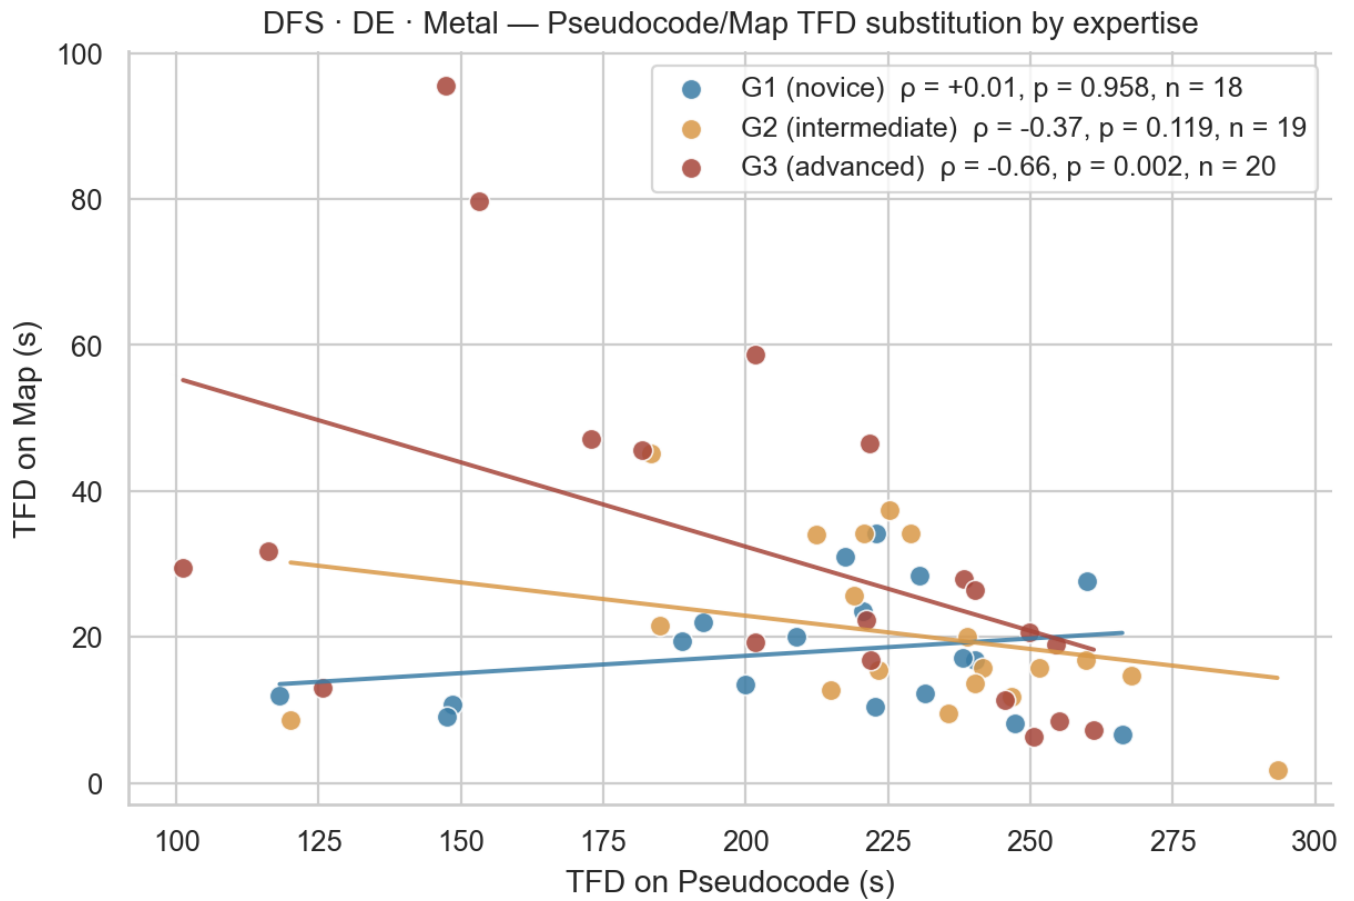


Fig. 3: Primary result, on the DFS DE Metal stimulus: per-participant TFD on pseudocode vs. TFD on map. G3 (advanced) shows a significant negative substitution ($\rho = -.66$, $p = .002$); G1 (novice) is flat. Lines are OLS fits per group.

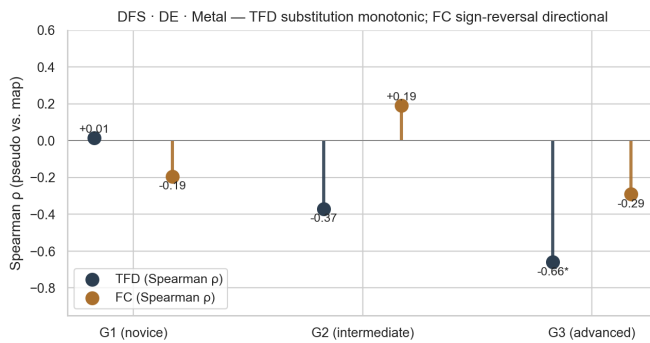


Fig. 4: DFS DE Metal: Spearman ρ between pseudocode and map for TFD (lead) and FC (secondary). The TFD column moves monotonically from 0 to $-.66$; the FC column shows the directional sign reversal reported in the paper. Asterisk marks $p < .05$.

viewing another unit. The predicted coordination effect of CTML due to the dual channel nature of the layout is absent in every group's dwell time measures.

4.3 Attentional Coupling Increases with Increasing Expertise

Attentional coupling increases with increasing expertise. The mean absolute value of Spearman's rank order correlation coefficient (ρ) across all possible metric pairs: G1=.294; G2=.330; G3=.369.

Participants without prior experience with visual representations of algorithms demonstrated the least coupled metric pairs. For example, the ratio to scanner index pair ranged from $r = -.04$ in G1 to $r = -.67$ in G3. Figure 7 shows the same effect restricted to the DFS Metal corpus, where the gradient is sharper (mean $|\rho| = .368, .483, .605$ for G1, G2, G3). A participant-level distributional view of every metric used in this matrix is provided in Figure 8.

5 DISCUSSION

5.1 Mechanisms

There is evidence consistent with CLT and ERE in support of a monotonic increase in the magnitude of negative correlation in TFD as expertise increases among the three groups.

G1 had no schema. Memory usage for working memory is consumed by learning a new algorithm and learning a new format for visualizing that algorithm. Therefore, dwell time for each view is generally unrelated to dwell time for the other view.

G2 had a partial schema. There are predictable steps available for reading from each individual panel separately, therefore, dwell time on one view begins to inversely relate to dwell time on the other view. The positive trend observed in fixation counts indicates that although confirmatory visits occur frequently as individuals develop expertise with a particular problem domain, this coordination weakens as dwell times become more interdependent between panels.

G3 has learned the algorithm. Each panel provides sufficient predictive information about the next action required for solving the task. Therefore, dwell time for one view reduces dwell time for the other view.

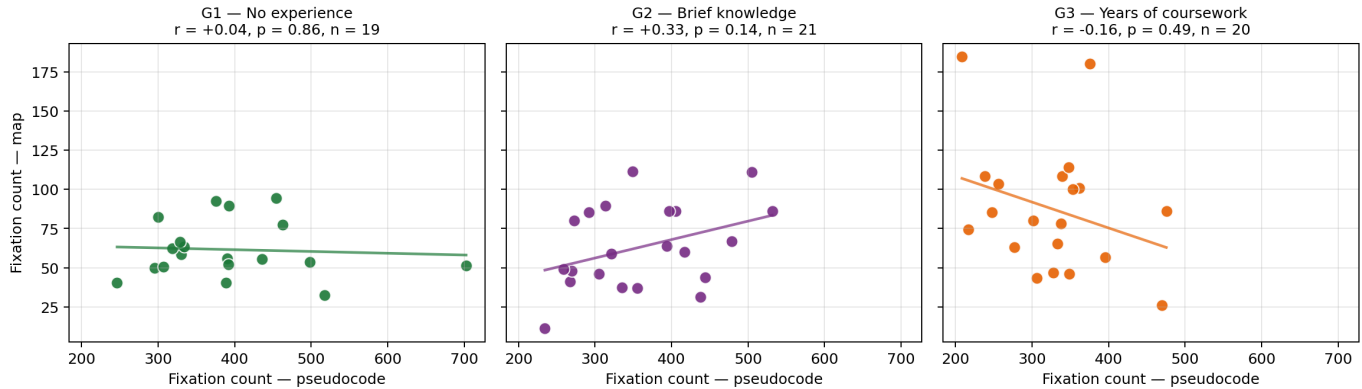


Fig. 5: Participant-level fixation counts on pseudocode vs. geospatial map for each expertise group (one point per participant, averaged across BFS and DFS trials). FC shows a directional sign reversal across groups; the TFD-based primary result is reported numerically.

Both the inverted-U curve for the total dwell time ratio between pseudocode and map views (Section 4.1) and the monotonic relationship for substitution in terms of dwell time (Section 4.2) represent the same process at two different levels: overall attentional distribution and moment-by-moment dwell trade-offs.

5.2 Design Implications

Since substitution varies with respect to expertise level, each group of learners uses the split-panel design differently than others. G1: Both panels are used independently. Scaffolding (e.g., line highlighting, annotation, staged display) may be necessary to facilitate coordination between panels.

G2: Panels are partially substitutable with respect to each other while still being engaged simultaneously. This profile fits well with the split-panel format.

G3: The pseudocode panel serves as a verification check for either representation alone.

Metrics related to attention aggregated across all levels of expertise provide average values that characterize none of the groups accurately.

5.3 Limitations

It is expected that roughly five of the 105 Fisher z tests would reach $p < .05$ by chance alone. While the main TFD contrast (G1 vs G3, $p = .04$) survives that threshold with some modest correction applied, neither of the FC sign reversals reached statistical significance at the participant level. Learner expertise groups were not randomly assigned, thus group-level differences may be reflective of either general cognitive ability or learner motivation. All visualizations utilized Metal style. Group sizes of 19 to 21 limited power for detecting small effects.

5.4 Conclusion

Time allocated to viewing pseudocode versus maps trades off positively with programming expertise level. Time allocations are essentially independent for novice programmers; intermediate and advanced programmers substitute one for the other increasingly with greater expertise level. Layouts validated at one level of expertise may not generalize; aggregating attentional metrics across levels of expertise hides this substitution gradient.

REFERENCES

- [1] R. Bednarik. Expertise-dependent visual attention strategies develop over time during debugging with multiple code representations. *International Journal of Human-Computer Studies*, 70(2):155–168, 2012. doi: [10.1016/j.ijhcs.2011.10.002](https://doi.org/10.1016/j.ijhcs.2011.10.002) 1
- [2] A. Gegenfurtner, E. Lehtinen, and R. Saljo. Expertise differences in the comprehension of visualizations: A meta-analysis. *Educational Psychology Review*, 23(4):523–552, 2011. doi: [10.1007/s10648-011-9174-7](https://doi.org/10.1007/s10648-011-9174-7) 1
- [3] S. Kalyuga, P. Ayres, P. Chandler, and J. Sweller. The expertise reversal effect. *Educational Psychologist*, 38(1):23–31, 2003. doi: [10.1207/S15326985EP3801_4](https://doi.org/10.1207/S15326985EP3801_4) 1
- [4] R. E. Mayer. *Multimedia Learning*. Cambridge University Press, 2001. doi: [10.1017/CBO9781139164603](https://doi.org/10.1017/CBO9781139164603) 1
- [5] C. A. I. Olson. [confirm: full title of olson 2015 reference on transfer of learning], 2015. Reference details pending confirmation. 1
- [6] J. Richter and K. Scheiter. Studying the expertise reversal of the multimedia signaling effect at a process level. *Instructional Science*, 47(5):555–580, 2019. doi: [10.1007/s11251-019-09491-4](https://doi.org/10.1007/s11251-019-09491-4) 1
- [7] J. Sweller. Cognitive load during problem solving: Effects on learning. *Cognitive Science*, 12(2):257–285, 1988. doi: [10.1207/s15516709cog1202_4](https://doi.org/10.1207/s15516709cog1202_4) 1
- [8] J. Sweller. Cognitive load theory, learning difficulty, and instructional design. *Learning and Instruction*, 4(4):295–312, 1994. doi: [10.1016/0959-4752\(94\)90003-5](https://doi.org/10.1016/0959-4752(94)90003-5) 1
- [9] J. D. Teresco and C. CO-AUTHORS]. [confirm: full title of metal project publication], 2018. Reference details pending confirmation; project website: courses.teresco.org/metal/. 1
- [10] J. J. G. van Merriënboer, P. A. Kirschner, and L. Kester. Taking the load off a learner’s mind: Instructional design for complex learning. *Educational Psychologist*, 38(1):5–13, 2003. [CONFIRM: verify this is the intended Van Merriënboer 2003 reference]. doi: [10.1207/S15326985EP3801_2](https://doi.org/10.1207/S15326985EP3801_2) 1

DFS reveals the expertise gradient; BFS forces substitution at every expertise level

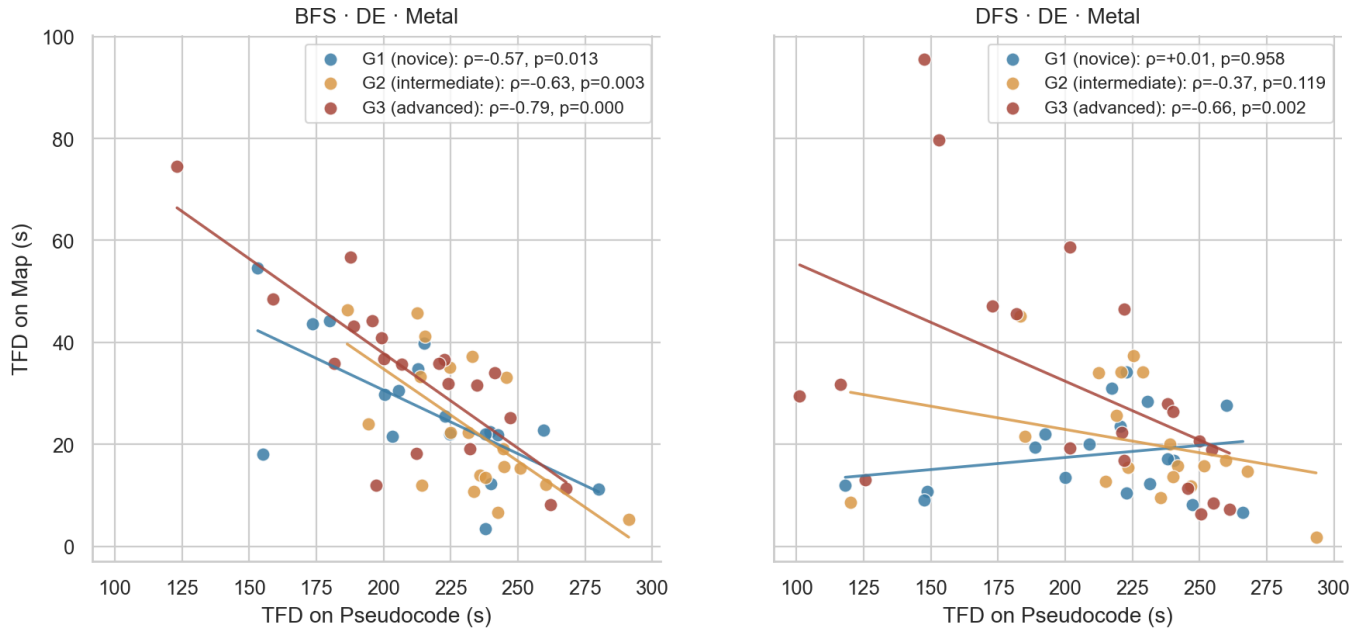


Fig. 6: Substitution split by algorithm reveals an interaction with stimulus difficulty. On BFS, every group substitutes strongly (ρ ranges $-.58$ to $-.79$, all $p < .05$); the expertise gradient is compressed because even novices are already pulled into trade-off mode. On DFS, the gradient is monotonic from a flat G1 baseline ($\rho = +.01$) to a strongly negative G3 ($\rho = -.66$, $p = .002$). The expertise effect of interest is therefore most clearly isolated by DFS.

DFS · DE · Metal — attentional coupling grows with expertise ($|\rho|$ matrix)

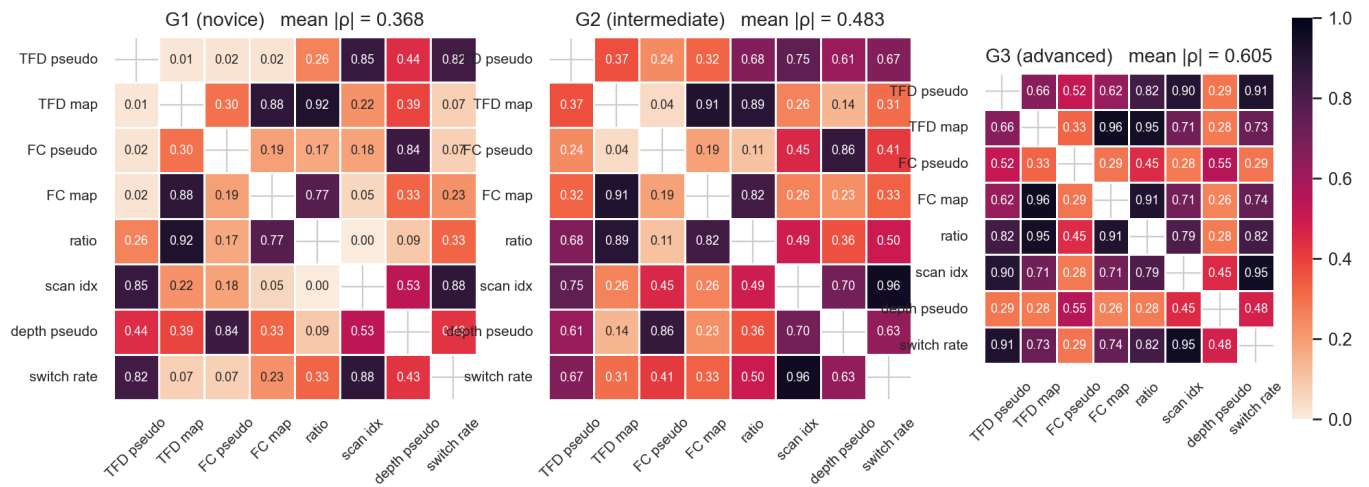


Fig. 7: Pairwise $|\rho|$ between eight gaze metrics on the DFS DE Metal stimulus, per expertise group. Mean $|\rho|$ rises from .368 (G1) to .483 (G2) to .605 (G3); cells in the G3 panel are visibly darker, evidencing tighter inter-metric coupling at higher expertise.

DFS · DE · Metal — per-participant metric distributions by expertise

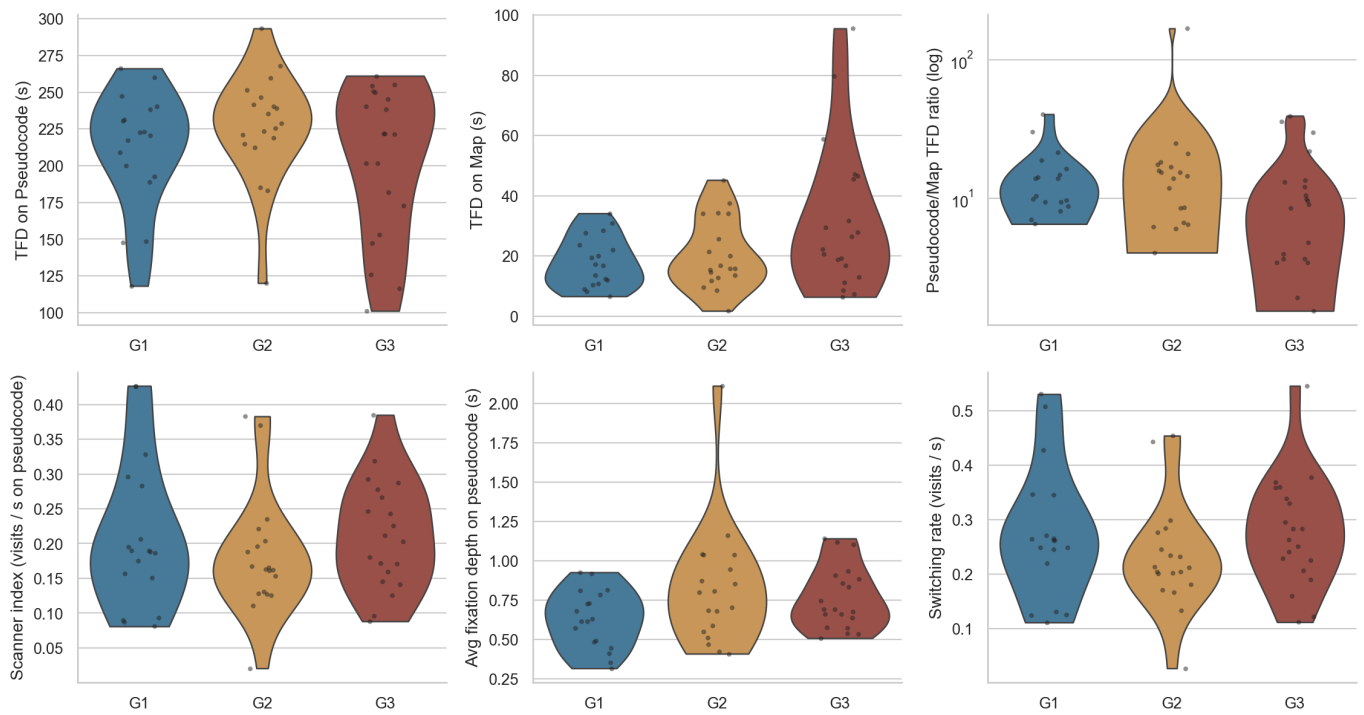


Fig. 8: Participant-level distributions of the six metrics that drive the coupling matrix, on the DFS DE Metal stimulus. The TFD-on-map panel shows G3's elongated upper tail; the pseudocode/map ratio panel shows G3's downward shift; scanner index, fixation depth, and switching rate are stable across groups, indicating the substitution effect is not driven by a global pacing change.