| Dunning head: CONFIDENCE INTERVALS FOR IDAD D SCORES SLIDDI EMENTARY | |
|---|---|
| Running head: CONFIDENCE INTERVALS FOR IRAP D SCORES - SUPPLEMENTARY | - |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| The Implicit Relational Assessment Procedure is not suitable for individual use | |
| Supplementary materials | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Figure 1S. Highest probability (MAP) IRAP D score 95% Confidence Interval calculated for each domain and trial type

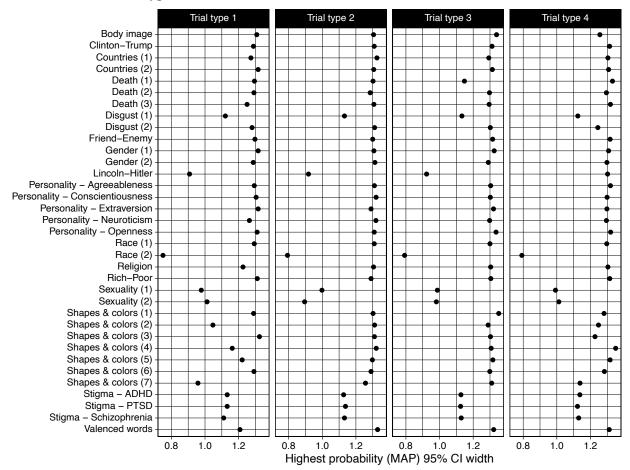


Figure 2S. Caterpillar plot of IAT D scores and 95% Confidence Intervals for each domain

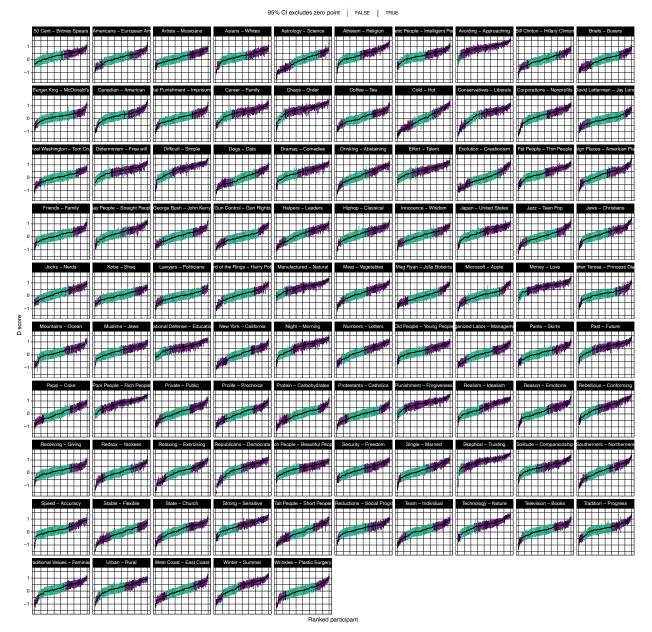


Figure 3S. Highest probability (MAP) IAT *D* score 95% Confidence Interval calculated for each domain

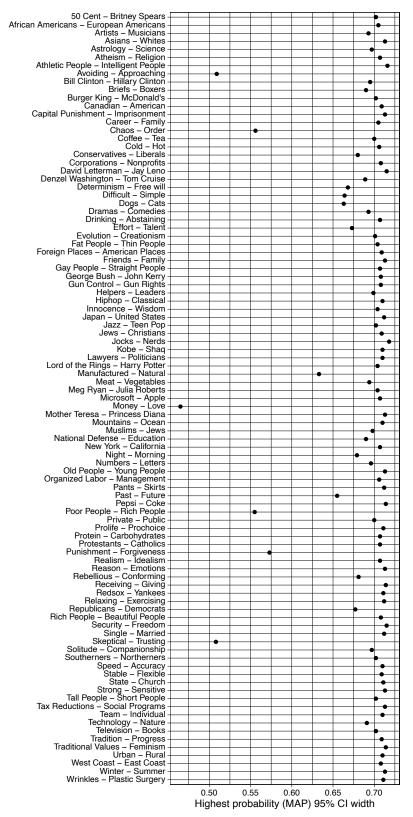


Figure 4S. Proportion of IAT D scores that exclude the zero point within each domain

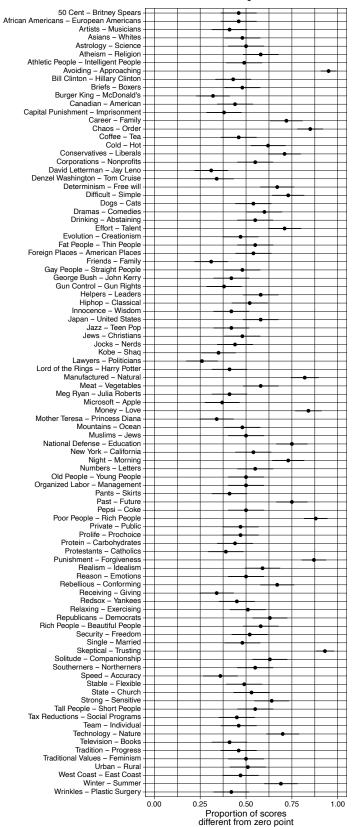


Figure 5S. Proportion of IAT *D* scores that can be discriminated from one another within each domain

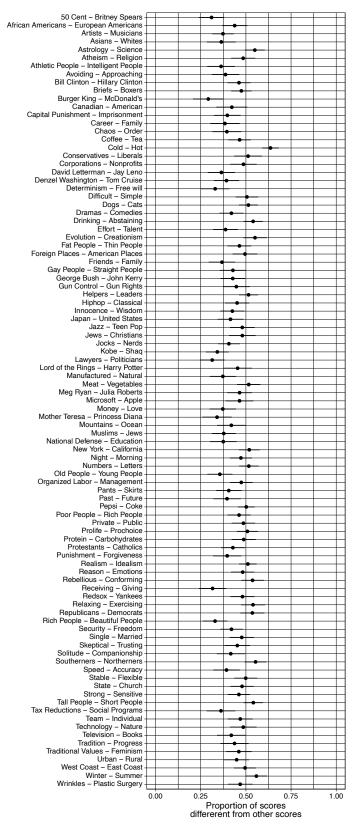


Figure 6S. Proportion of the observed range covered by individual participants' IAT *D* scores' 95% Confidence Intervals within each domain.

