



(<https://cognitiveclass.ai>)

Generating Maps with Python

Introduction

In this lab, we will learn how to create maps for different objectives. To do that, we will part ways with Matplotlib and work with another Python visualization library, namely **Folium**. What is nice about **Folium** is that it was developed for the sole purpose of visualizing geospatial data. While other libraries are available to visualize geospatial data, such as **plotly**, they might have a cap on how many API calls you can make within a defined time frame. **Folium**, on the other hand, is completely free.

Exploring Datasets with *pandas* and Matplotlib

Toolkits: This lab heavily relies on *pandas* (<http://pandas.pydata.org/>) and *Numpy* (<http://www.numpy.org/>) for data wrangling, analysis, and visualization. The primary plotting library we will explore in this lab is **Folium** (<https://github.com/python-visualization/folium/>).

Datasets:

1. San Francisco Police Department Incidents for the year 2016 - [Police Department Incidents](https://data.sfgov.org/Public-Safety/Police-Department-Incidents-Previous-Year-2016-/ritf-b9ki) (<https://data.sfgov.org/Public-Safety/Police-Department-Incidents-Previous-Year-2016-/ritf-b9ki>) from San Francisco public data portal. Incidents derived from San Francisco Police Department (SFPD) Crime Incident Reporting system. Updated daily, showing data for the entire year of 2016. Address and location has been anonymized by moving to mid-block or to an intersection.
2. Immigration to Canada from 1980 to 2013 - [International migration flows to and from selected countries - The 2015 revision](http://www.un.org/en/development/desa/population/migration/data/empirical2/migrationflows.shtml) (<http://www.un.org/en/development/desa/population/migration/data/empirical2/migrationflows.shtml>) from United Nation's website. The dataset contains annual data on the flows of international migrants as recorded by the countries of destination. The data presents both inflows and outflows according to the place of birth, citizenship or place of previous / next residence both for foreigners and nationals. For this lesson, we will focus on the Canadian Immigration data

Downloading and Prepping Data

Import Primary Modules:

```
In [3]: import numpy as np # useful for many scientific computing in Python
import pandas as pd # primary data structure library
```

Introduction to Folium

Folium is a powerful Python library that helps you create several types of Leaflet maps. The fact that the Folium results are interactive makes this library very useful for dashboard building.

From the official Folium documentation page:

Folium builds on the data wrangling strengths of the Python ecosystem and the mapping strengths of the Leaflet.js library. Manipulate your data in Python, then visualize it in on a Leaflet map via Folium.

Folium makes it easy to visualize data that's been manipulated in Python on an interactive Leaflet map. It enables both the binding of data to a map for choropleth visualizations as well as passing Vincent/Vega visualizations as markers on the map.

The library has a number of built-in tilesets from OpenStreetMap, Mapbox, and Stamen, and supports custom tilesets with Mapbox or Cloudmade API keys. Folium supports both GeoJSON and TopoJSON overlays, as well as the binding of data to those overlays to create choropleth maps with color-brewer color schemes.

Let's install Folium

Folium is not available by default. So, we first need to install it before we are able to import it.

```
In [4]: !conda install -c conda-forge folium=0.5.0 --yes
import folium

print('Folium installed and imported!')
```

```
Collecting package metadata (current_repodata.json): done
Solving environment: done
```

```
# All requested packages already installed.
```

```
Folium installed and imported!
```

Generating the world map is straightforward in **Folium**. You simply create a **Folium Map** object and then you display it. What is attractive about **Folium** maps is that they are interactive, so you can zoom into any region of interest despite the initial zoom level.

```
In [5]: # define the world map
world_map = folium.Map()

# display world map
world_map
```

Out[5]:



Leaflet (<http://leafletjs.com>)

Go ahead. Try zooming in and out of the rendered map above.

You can customize this default definition of the world map by specifying the centre of your map and the initial zoom level.

All locations on a map are defined by their respective *Latitude* and *Longitude* values. So you can create a map and pass in a center of *Latitude* and *Longitude* values of **[0, 0]**.

For a defined center, you can also define the initial zoom level into that location when the map is rendered. **The higher the zoom level the more the map is zoomed into the center.**

Let's create a map centered around Canada and play with the zoom level to see how it affects the rendered map.

```
In [6]: # define the world map centered around Canada with a low zoom level
world_map = folium.Map(location=[56.130, -106.35], zoom_start=4)

# display world map
world_map
```

Out[6]:




Leaflet (<http://leafletjs.com>)

Let's create the map again with a higher zoom level

```
In [7]: # define the world map centered around Canada with a higher zoom leve
1
world_map = folium.Map(location=[56.130, -106.35], zoom_start=8)

# display world map
world_map
```

Out[7]:



Leaflet (<http://leafletjs.com>)

As you can see, the higher the zoom level the more the map is zoomed into the given center.


Question: Create a map of Mexico with a zoom level of 4.

```
In [8]: ### type your answer here
mexico_latitude = 23.6345
mexico_longitude = -102.5528

mexico_map = folium.Map(location=[mexico_latitude, mexico_longitude],
zoom_start=4)

mexico_map
```

Out[8]:



Leaflet (<http://leafletjs.com>)

Double-click **here** for the solution.

Another cool feature of **Folium** is that you can generate different map styles.

A. Stamen Toner Maps


These are high-contrast B+W (black and white) maps. They are perfect for data mashups and exploring river meanders and coastal zones.

Let's create a Stamen Toner map of canada with a zoom level of 4.

```
In [9]: # create a Stamen Toner map of the world centered around Canada
world_map = folium.Map(location=[56.130, -106.35], zoom_start=4, tiles='Stamen Toner')

# display map
world_map
```

Out[9]:



Leaflet (<http://leafletjs.com>)

Feel free to zoom in and out to see how this style compares to the default one.

B. Stamen Terrain Maps


These are maps that feature hill shading and natural vegetation colors. They showcase advanced labeling and linework generalization of dual-carriageway roads.

Let's create a Stamen Terrain map of Canada with zoom level 4.

```
In [10]: # create a Stamen Toner map of the world centered around Canada
world_map = folium.Map(location=[56.130, -106.35], zoom_start=4, tiles='Stamen Terrain')

# display map
world_map
```

Out[10]:



Leaflet (<http://leafletjs.com>)

Feel free to zoom in and out to see how this style compares to Stamen Toner and the default style.


C. Mapbox Bright Maps

These are maps that quite similar to the default style, except that the borders are not visible with a low zoom level. Furthermore, unlike the default style where country names are displayed in each country's native language, *Mapbox Bright* style displays all country names in English.

Let's create a world map with this style.


```
In [12]: # create a world map with a Mapbox Bright style.  
world_map = folium.Map(tiles='Mapbox Bright')  
  
# display the map  
world_map
```

Out[12]:



Leaflet (<http://leafletjs.com>)

Zoom in and notice how the borders start showing as you zoom in, and the displayed country names are in English.


Question: Create a map of Mexico to visualize its hill shading and natural vegetation. Use a zoom level of 6.

```
In [13]: ### type your answer here
mexico_latitude = 23.6345
mexico_longitude = -102.5528

mexico_map = folium.Map(location=[mexico_latitude, mexico_longitude],
zoom_start=6, tiles='Stamen Terrain')

mexico_map
```

Out[13]:



Leaflet (<http://leafletjs.com>)

Double-click **here** for the solution.

Maps with Markers

Let's download and import the data on police department incidents using `pandas read_csv()` method.

Download the dataset and read it into a *pandas* dataframe:

```
In [15]: df_incidents = pd.read_csv('https://s3-api.us-geo.objectstorage.softl
ayer.net/cf-courses-data/CognitiveClass/DV0101EN/labs/Data_Files/Police_Department_Incidents_-_Previous_Year__2016_.csv')

print('Dataset downloaded and read into a pandas dataframe!')
```

Dataset downloaded and read into a pandas dataframe!

Let's take a look at the first five items in our dataset.

```
In [16]: df_incidents.head()
```

```
Out[16]:
```

	IncidentNum	Category	Descript	DayOfWeek	Date	Time	PdDistrict	Resol
0	120058272	WEAPON LAWS	POSS OF PROHIBITED WEAPON	Friday	01/29/2016 12:00:00 AM	11:00	SOUTHERN	ARR BOC
1	120058272	WEAPON LAWS	FIREARM, LOADED, IN VEHICLE, POSSESSION OR USE	Friday	01/29/2016 12:00:00 AM	11:00	SOUTHERN	ARR BOC
2	141059263	WARRANTS	WARRANT ARREST	Monday	04/25/2016 12:00:00 AM	14:59	BAYVIEW	ARR BOC
3	160013662	NON-CRIMINAL	LOST PROPERTY	Tuesday	01/05/2016 12:00:00 AM	23:50	TENDERLOIN	N
4	160002740	NON-CRIMINAL	LOST PROPERTY	Friday	01/01/2016 12:00:00 AM	00:30	MISSION	N

So each row consists of 13 features:

1. **IncidentNum**: Incident Number
2. **Category**: Category of crime or incident
3. **Descript**: Description of the crime or incident
4. **DayOfWeek**: The day of week on which the incident occurred
5. **Date**: The Date on which the incident occurred
6. **Time**: The time of day on which the incident occurred
7. **PdDistrict**: The police department district
8. **Resolution**: The resolution of the crime in terms whether the perpetrator was arrested or not
9. **Address**: The closest address to where the incident took place
10. **X**: The longitude value of the crime location
11. **Y**: The latitude value of the crime location
12. **Location**: A tuple of the latitude and the longitude values
13. **PdId**: The police department ID

Let's find out how many entries there are in our dataset.

```
In [17]: df_incidents.shape
```

```
Out[17]: (150500, 13)
```

So the dataframe consists of 150,500 crimes, which took place in the year 2016. In order to reduce computational cost, let's just work with the first 100 incidents in this dataset.

```
In [18]: # get the first 100 crimes in the df_incidents dataframe  
limit = 100  
df_incidents = df_incidents.iloc[0:limit, :]
```

Let's confirm that our dataframe now consists only of 100 crimes.

```
In [19]: df_incidents.shape
```


```
Out[19]: (100, 13)
```

Now that we reduced the data a little bit, let's visualize where these crimes took place in the city of San Francisco. We will use the default style and we will initialize the zoom level to 12.

```
In [20]: # San Francisco latitude and longitude values  
latitude = 37.77  
longitude = -122.42
```

```
In [21]: # create map and display it  
sanfran_map = folium.Map(location=[latitude, longitude], zoom_start=12)  
  
# display the map of San Francisco  
sanfran_map
```

```
Out[21]:
```




Now let's superimpose the locations of the crimes onto the map. The way to do that in **Folium** is to create a *feature group* with its own features and style and then add it to the `sanfran_map`.

```
In [22]: # instantiate a feature group for the incidents in the dataframe
incidents = folium.map.FeatureGroup()

# loop through the 100 crimes and add each to the incidents feature group
for lat, lng, in zip(df_incidents.Y, df_incidents.X):
    incidents.add_child(
        folium.features.CircleMarker(
            [lat, lng],
            radius=5, # define how big you want the circle markers to be
            color='yellow',
            fill=True,
            fill_color='blue',
            fill_opacity=0.6
        )
    )

# add incidents to map
sanfran_map.add_child(incidents)
```

Out[22]:

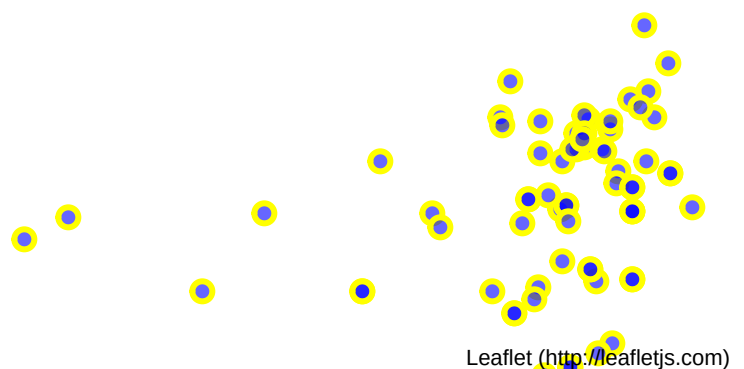

You can also add some pop-up text that would get displayed when you hover over a marker. Let's make each marker display the category of the crime when hovered over.

```
In [23]: # instantiate a feature group for the incidents in the dataframe
incidents = folium.map.FeatureGroup()

# loop through the 100 crimes and add each to the incidents feature group
for lat, lng, in zip(df_incidents.Y, df_incidents.X):
    incidents.add_child(
        folium.features.CircleMarker(
            [lat, lng],
            radius=5, # define how big you want the circle markers to be
            color='yellow',
            fill=True,
            fill_color='blue',
            fill_opacity=0.6
        )
    )

# add pop-up text to each marker on the map
latitudes = list(df_incidents.Y)
longitudes = list(df_incidents.X)
labels = list(df_incidents.Category)

for lat, lng, label in zip(latitudes, longitudes, labels):
    folium.Marker([lat, lng], popup=label).add_to(sanfran_map)

# add incidents to map
sanfran_map.add_child(incidents)
```

Out[23]:



Isn't this really cool? Now you are able to know what crime category occurred at each marker.


If you find the map to be so congested with all these markers, there are two remedies to this problem. The simpler solution is to remove these location markers and just add the text to the circle markers themselves as follows:

```
In [24]: # create map and display it
sanfran_map = folium.Map(location=[latitude, longitude], zoom_start=12)

# loop through the 100 crimes and add each to the map
for lat, lng, label in zip(df_incidents.Y, df_incidents.X, df_incidents.Category):
    folium.features.CircleMarker(
        [lat, lng],
        radius=5, # define how big you want the circle markers to be
        color='yellow',
        fill=True,
        popup=label,
        fill_color='blue',
        fill_opacity=0.6
    ).add_to(sanfran_map)

# show map
sanfran_map
```

Out[24]:

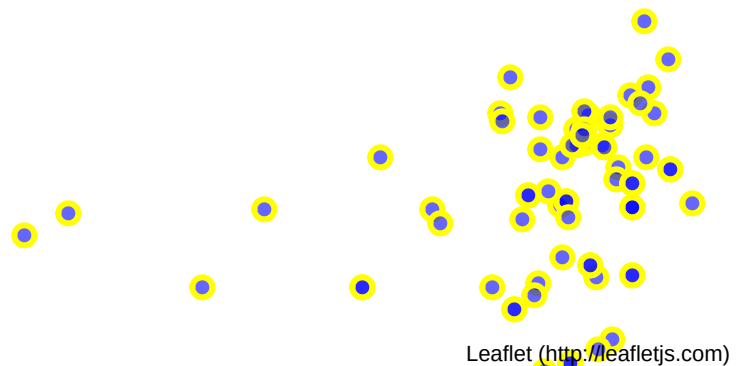

The other proper remedy is to group the markers into different clusters. Each cluster is then represented by the number of crimes in each neighborhood. These clusters can be thought of as pockets of San Francisco which you can then analyze separately.

To implement this, we start off by instantiating a *MarkerCluster* object and adding all the data points in the dataframe to this object.

```
In [25]: from folium import plugins


# let's start again with a clean copy of the map of San Francisco
sanfran_map = folium.Map(location = [latitude, longitude], zoom_start
= 12)

# instantiate a mark cluster object for the incidents in the dataframe
incidents = plugins.MarkerCluster().add_to(sanfran_map)

# loop through the dataframe and add each data point to the mark cluster
for lat, lng, label, in zip(df_incidents.Y, df_incidents.X, df_incidents.Category):
    folium.Marker(
        location=[lat, lng],
        icon=None,
        popup=label,
    ).add_to(incidents)

# display map
sanfran_map
```

Out[25]:



2

5

60


4

Leaflet (<http://leafletjs.com>)

Notice how when you zoom out all the way, all markers are grouped into one cluster, *the global cluster*, of 100 markers or crimes, which is the total number of crimes in our dataframe. Once you start zooming in, the *global cluster* will start breaking up into smaller clusters. Zooming in all the way will result in individual markers.

Choropleth Maps

A Choropleth map is a thematic map in which areas are shaded or patterned in proportion to the measurement of the statistical variable being displayed on the map, such as population density or per-capita income. The choropleth map provides an easy way to visualize how a measurement varies across a geographic area or it shows the level of variability within a region. Below is a Choropleth map of the US depicting the population by square mile per state.

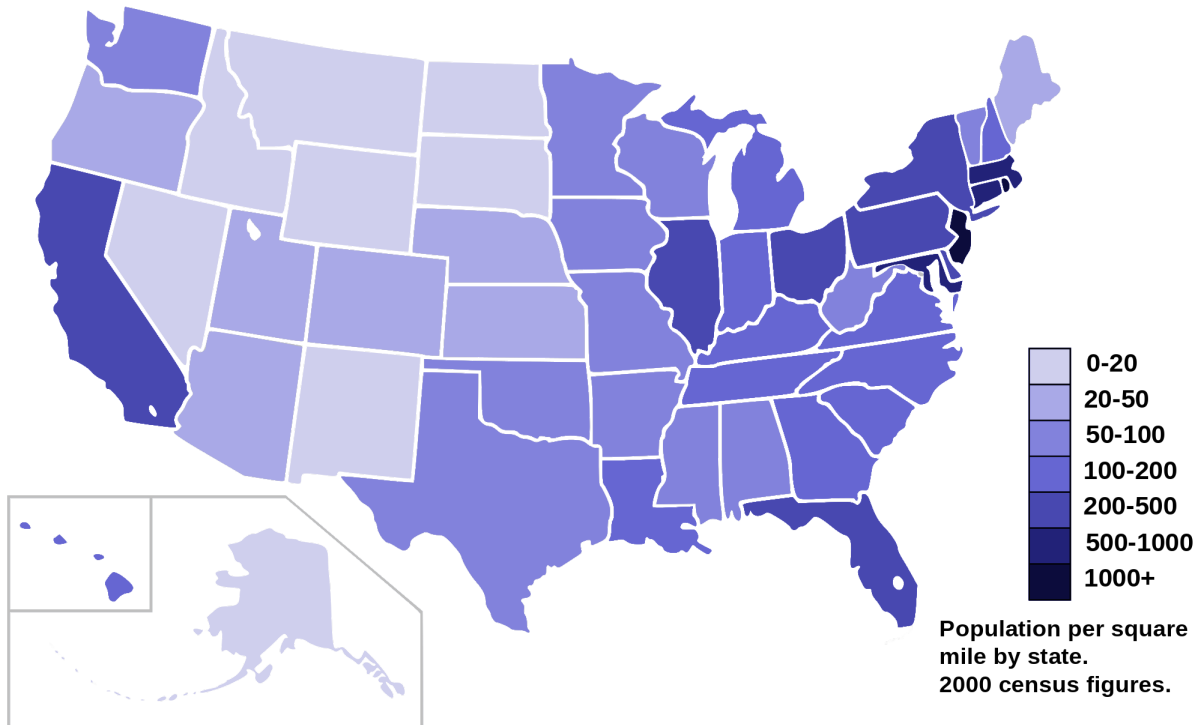

Now, let's create our own Choropleth map of the world depicting immigration from various countries to Canada.

Let's first download and import our primary Canadian immigration dataset using `pandas.read_excel()` method. Normally, before we can do that, we would need to download a module which `pandas` requires to read in excel files. This module is `xlrd`. For your convenience, we have pre-installed this module, so you would not have to worry about that. Otherwise, you would need to run the following line of code to install the `xlrd` module:

```
!conda install -c anaconda xlrd --yes
```

Download the dataset and read it into a `pandas` dataframe:

```
In [26]: df_can = pd.read_excel('https://s3-api.us-geo.objectstorage.softlayer.net/cf-courses-data/CognitiveClass/DV0101EN/labs/Data_Files/Canada.xlsx',
                                sheet_name='Canada by Citizenship',
                                skiprows=range(20),
                                skipfooter=2)

print('Data downloaded and read into a dataframe!')
```

Data downloaded and read into a dataframe!

Let's take a look at the first five items in our dataset.

```
In [27]: df_can.head()
```

Out[27]:

	Type	Coverage	OdName	AREA	AreaName	REG	RegName	DEV	DevName	19
0	Immigrants	Foreigners	Afghanistan	935	Asia	5501	Southern Asia	902	Developing regions	:
1	Immigrants	Foreigners	Albania	908	Europe	925	Southern Europe	901	Developed regions	
2	Immigrants	Foreigners	Algeria	903	Africa	912	Northern Africa	902	Developing regions	}
3	Immigrants	Foreigners	American Samoa	909	Oceania	957	Polynesia	902	Developing regions	
4	Immigrants	Foreigners	Andorra	908	Europe	925	Southern Europe	901	Developed regions	

5 rows × 43 columns



Let's find out how many entries there are in our dataset.

```
In [28]: # print the dimensions of the dataframe
print(df_can.shape)
```

(195, 43)

Clean up data. We will make some modifications to the original dataset to make it easier to create our visualizations. Refer to *Introduction to Matplotlib and Line Plots* and *Area Plots, Histograms, and Bar Plots* notebooks for a detailed description of this preprocessing.

```
In [29]: # clean up the dataset to remove unnecessary columns (eg. REG)
df_can.drop(['AREA', 'REG', 'DEV', 'Type', 'Coverage'], axis=1, inplace=True)

# let's rename the columns so that they make sense
df_can.rename(columns={'OdName': 'Country', 'AreaName': 'Continent', 'RegName': 'Region'}, inplace=True)

# for sake of consistency, let's also make all column labels of type string
df_can.columns = list(map(str, df_can.columns))

# add total column
df_can['Total'] = df_can.sum(axis=1)

# years that we will be using in this lesson - useful for plotting later on
years = list(map(str, range(1980, 2014)))
print('data dimensions:', df_can.shape)
```

data dimensions: (195, 39)


Let's take a look at the first five items of our cleaned dataframe.

```
In [30]: df_can.head()
```

Out[30]:

	Country	Continent	Region	DevName	1980	1981	1982	1983	1984	1985	...	2005
0	Afghanistan	Asia	Southern Asia	Developing regions	16	39	39	47	71	340	...	3436
1	Albania	Europe	Southern Europe	Developed regions	1	0	0	0	0	0	...	1223
2	Algeria	Africa	Northern Africa	Developing regions	80	67	71	69	63	44	...	3626
3	American Samoa	Oceania	Polynesia	Developing regions	0	1	0	0	0	0	...	0
4	Andorra	Europe	Southern Europe	Developed regions	0	0	0	0	0	0	...	0

5 rows × 39 columns



In order to create a Choropleth map, we need a GeoJSON file that defines the areas/boundaries of the state, county, or country that we are interested in. In our case, since we are endeavoring to create a world map, we want a GeoJSON that defines the boundaries of all world countries. For your convenience, we will be providing you with this file, so let's go ahead and download it. Let's name it **world_countries.json**.

```
In [31]: # download countries geojson file
!wget --quiet https://s3-api.us-geo.objectstorage.softlayer.net/cf-courses-data/CognitiveClass/DV0101EN/labs/Data_Files/world_countries.json -O world_countries.json

print('GeoJSON file downloaded!')
```

GeoJSON file downloaded!

Now that we have the GeoJSON file, let's create a world map, centered around **[0, 0]** *latitude* and *longitude* values, with an initial zoom level of 2, and using *Mapbox Bright* style.

```
In [33]: world_geo = r'world_countries.json' # geojson file


# create a plain world map
world_map = folium.Map(location=[0, 0], zoom_start=2, tiles='Mapbox Bright')
```

And now to create a `Choropleth` map, we will use the *choropleth* method with the following main parameters:

1. `geo_data`, which is the GeoJSON file.
 2. `data`, which is the dataframe containing the data.
 3. `columns`, which represents the columns in the dataframe that will be used to create the `Choropleth` map.
 4. `key_on`, which is the key or variable in the GeoJSON file that contains the name of the variable of interest.
- To determine that, you will need to open the GeoJSON file using any text editor and note the name of the key or variable that contains the name of the countries, since the countries are our variable of interest. In this case, **name** is the key in the GeoJSON file that contains the name of the countries. Note that this key is `case_sensitive`, so you need to pass exactly as it exists in the GeoJSON file.

```
In [34]: # generate choropleth map using the total immigration of each country
to Canada from 1980 to 2013
world_map.choropleth(
    geo_data=world_geo,
    data=df_can,
    columns=['Country', 'Total'],
    key_on='feature.properties.name',
    fill_color='YlOrRd',
    fill_opacity=0.7,
    line_opacity=0.2,
    legend_name='Immigration to Canada'
)

# display map
world_map
```

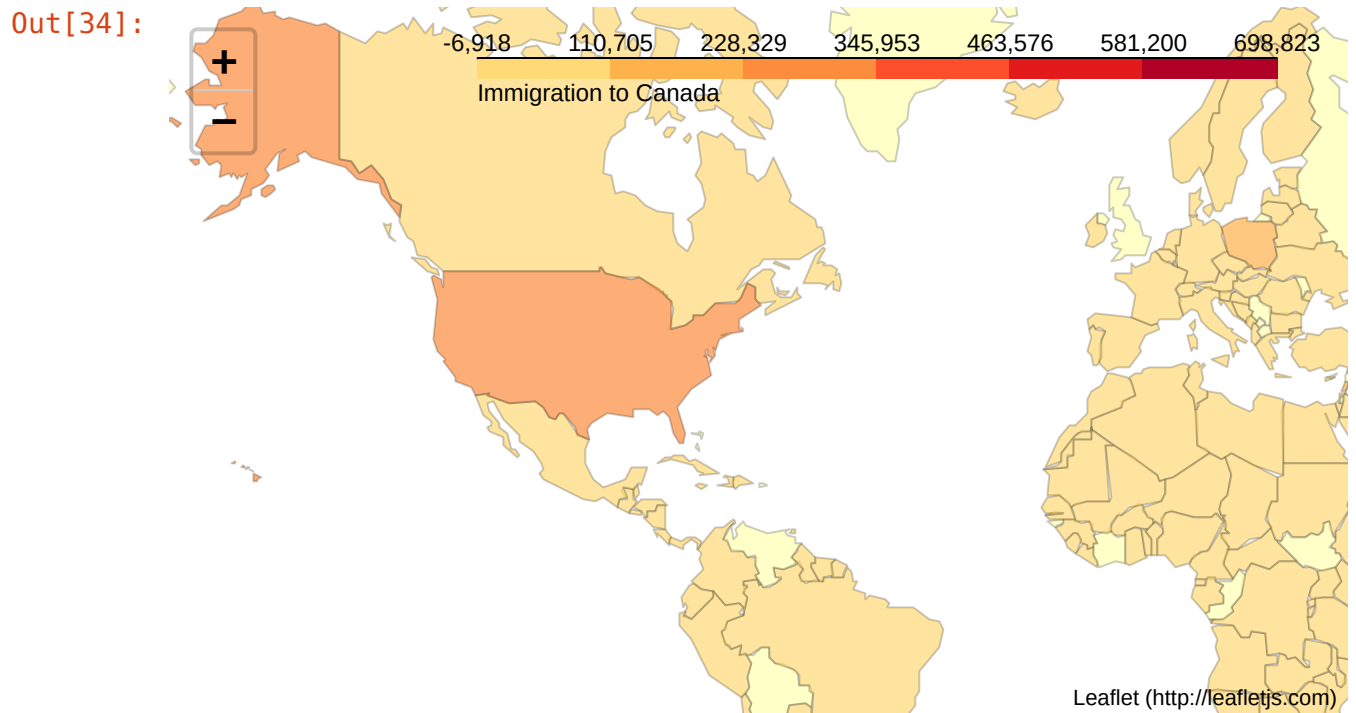

As per our Choropleth map legend, the darker the color of a country and the closer the color to red, the higher the number of immigrants from that country. Accordingly, the highest immigration over the course of 33 years (from 1980 to 2013) was from China, India, and the Philippines, followed by Poland, Pakistan, and interestingly, the US.

Notice how the legend is displaying a negative boundary or threshold. Let's fix that by defining our own thresholds and starting with 0 instead of -6,918!


```
In [35]: world_geo = r'world_countries.json'

# create a numpy array of length 6 and has linear spacing from the minimum total immigration to the maximum total immigration
threshold_scale = np.linspace(df_can['Total'].min(),
                              df_can['Total'].max(),
                              6, dtype=int)

threshold_scale = threshold_scale.tolist() # change the numpy array to a list
threshold_scale[-1] = threshold_scale[-1] + 1 # make sure that the last value of the list is greater than the maximum immigration

# let Folium determine the scale.
world_map = folium.Map(location=[0, 0], zoom_start=2, tiles='Mapbox Bright')
world_map.choropleth(
    geo_data=world_geo,
    data=df_can,
    columns=['Country', 'Total'],
    key_on='feature.properties.name',
    threshold_scale=threshold_scale,
    fill_color='YlOrRd',
    fill_opacity=0.7,
    line_opacity=0.2,
    legend_name='Immigration to Canada',
    reset=True
)
world_map
```

Out[35]:

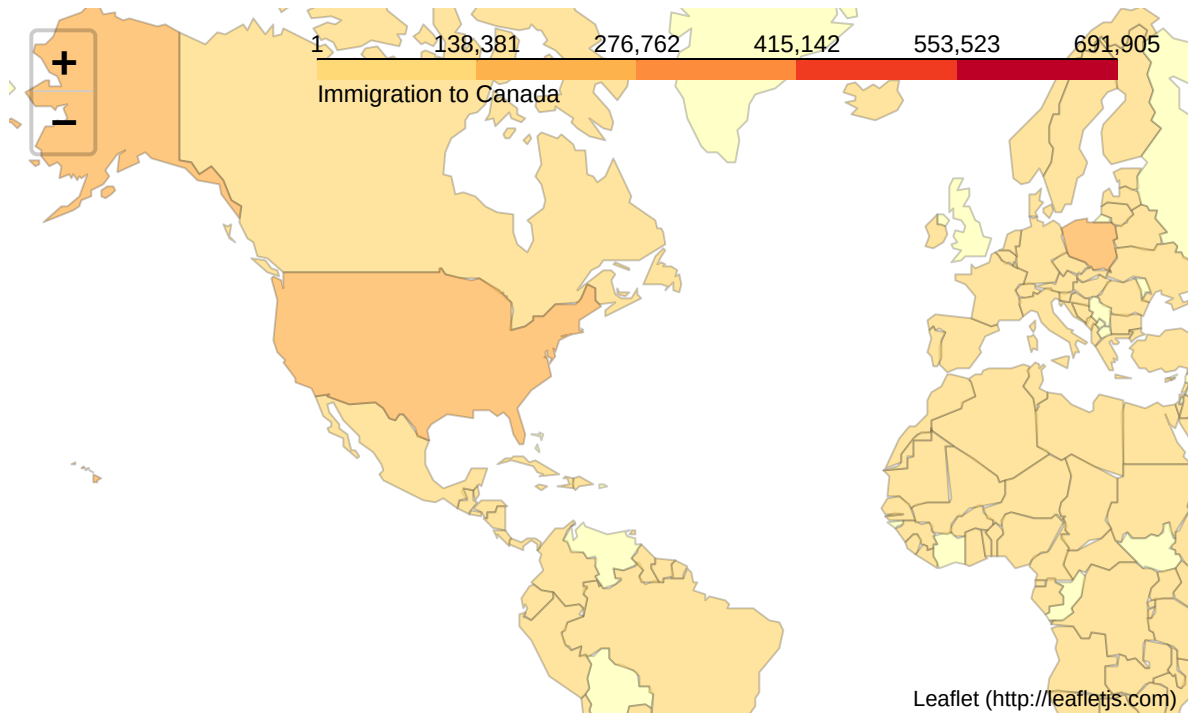

Much better now! Feel free to play around with the data and perhaps create Choropleth maps for individuals years, or perhaps decades, and see how they compare with the entire period from 1980 to 2013.

Thank you for completing this lab!

This notebook was created by [Alex Aklson](https://www.linkedin.com/in/aklson/) (<https://www.linkedin.com/in/aklson/>). I hope you found this lab interesting and educational. Feel free to contact me if you have any questions!

This notebook is part of a course on **Coursera** called *Data Visualization with Python*. If you accessed this notebook outside the course, you can take this course online by clicking [here](http://cocl.us/DV0101EN_Coursera_Week3_LAB2) (http://cocl.us/DV0101EN_Coursera_Week3_LAB2).

Copyright © 2019 [Cognitive Class](https://cognitiveclass.ai/?utm_source=bducopyrightlink&utm_medium=dswb&utm_campaign=bdu) (https://cognitiveclass.ai/?utm_source=bducopyrightlink&utm_medium=dswb&utm_campaign=bdu). This notebook and its source code are released under the terms of the [MIT License](https://bigdatauniversity.com/mit-license/) (<https://bigdatauniversity.com/mit-license/>).