



ORACLE
NetSuite

Custom Transactions



2025.2

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

Custom Transactions	1
Benefits of Custom Transaction Types	1
Custom Transaction Type Naming Enables Better Organization	2
Custom Transaction Types Support Key NetSuite Features	2
Multiple Custom Transaction Styles Supported	4
Sales and Purchase Transaction Types Overview	5
Sales and Purchase Functionality Available in Custom Transactions	6
Sales and Purchase Custom Transaction Types in Integrations	8
Custom Transaction Type Setup	11
Enabling the Custom Transactions Feature	12
Granting a Role Permission to Manage Custom Transaction Types	12
Creating and Editing Custom Transaction Types	12
Custom Transaction Styles Overview	13
Creating a Custom Transaction Type	16
Editing a Custom Transaction Type	19
Locked Custom Transaction Types	21
Custom Transaction Type Classification Fields	21
Custom Fields in Custom Transaction Types	23
Numbering for a Custom Transaction Type	24
Account Field Setup for Custom Transaction Types	33
Statuses for a Custom Transaction Type	35
Creating Links for a Custom Transaction Type	41
Adding Custom Forms for a Custom Transaction Type	42
Permissions for Custom Transaction Instances	44
Adding Translations for a Custom Transaction Type	46
Custom Transaction Type Association with a Custom GL-Lines Plug-in Implementation	46
Custom Transaction Type Association with a SuiteTax Plug-in	47
Deleting Custom Transaction Types	48
Deleting Individual Custom Transaction Types	48
Deleting Custom Transaction Types with a Bundle	48
Creating Sales and Purchase Custom Transaction Instances	49
Creating a Sales Custom Transaction Instance	49
Creating a Purchase Custom Transaction Instance	55
Printing Custom Transaction Instances	59
Custom Transaction Types in Workflows	59
Referencing Status in a Transaction Type Workflow Action	60
Using Status as a Transaction Type Workflow Condition	61
Sales Custom Transaction Transform Action Workflow Example	61
Using Workflows with SuiteScript for Custom Transaction Transformations	65

Custom Transactions

The Custom Transactions feature lets Administrators and users with the Custom Transaction Types permission create customized transaction types to your business needs.

 **Note:** Processed lines for custom transaction types contribute to the Monthly Transaction Lines metric that counts toward maximum limits for your NetSuite service tier. For more information, see the help topic [Transaction Types Included in Monthly Transaction Lines Metric](#).

This feature, along with Custom GL Lines and Custom Segments, is part of the SuiteGL feature set. For more about the SuiteGL feature set, see the help topics [SuiteGL Features Overview](#), [Custom Segments](#), and [Custom GL Lines Plug-in](#).

 **Important:** SuiteScript doesn't support direct access to the NetSuite UI through the Document Object Model (DOM). You should access the NetSuite UI only by using SuiteScript APIs. For information about using SuiteScript APIs to customize the UI, see the help topic [SuiteScript 2.x Custom Pages](#).

Custom transactions are supported in SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SDF SuiteApps, or to customize NetSuite accounts, using an integrated development environment (IDE) on your local computer. SuiteCloud projects are file-based and use XML definitions of custom NetSuite objects. For more information, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

For information about custom transactions, see the following topics:

- [Benefits of Custom Transaction Types](#)
- [Sales and Purchase Transaction Types Overview](#)
- [Custom Transaction Type Setup](#)
- [Creating and Editing Custom Transaction Types](#)
- [Custom Transaction Type Association with a Custom GL-Lines Plug-in Implementation](#)
- [Deleting Custom Transaction Types](#)
- [Creating Sales and Purchase Custom Transaction Instances](#)
- [Printing Custom Transaction Instances](#)
- [Custom Transaction Types in Workflows](#)

Custom transaction instances support CSV Import Assistant, SuiteScript, and SOAP and REST web services.

- Use the CSV Import Assistant to interact with custom transaction instances. For details, see the help topic [Custom Transactions Import](#).
- Use SuiteScript to interact with custom transaction instances. For details, see the help topic [Custom Transaction](#).
- Use SOAP web services to interact with custom transaction instances. For details, see the help topic [Custom Transaction](#).
- Use REST web services to interact with custom transaction instances. REST web services support basic, journal, and header only custom transactions. For details, see the help topic [Using CRUD Operations on Custom Records, Custom Lists, and Custom Transactions v1](#).

Benefits of Custom Transaction Types


The Custom Transactions feature offers several advantages, including:

- You can name your custom transaction types in a way that reflects your business logic. For details, see [Custom Transaction Type Naming Enables Better Organization](#).
- Like standard transactions, each custom transaction type can have its own numbering scheme, permissions, and workflow logic. For details, see [Custom Transaction Types Support Key NetSuite Features](#).
- You can create custom transaction types in multiple styles. For example, you can model your custom transaction type after a journal entry or an expense report. For details, see [Multiple Custom Transaction Styles Supported](#).

Custom Transaction Type Naming Enables Better Organization

Your business may have many different events that require adjusting your general ledger. For example, you may need to record adjustments for nonoperational income, such as interest income that your company receives through investments. Conversely, you may need to record debits for rewards you give customers through customer loyalty programs. Without the Custom Transactions feature, your options for recording these various adjustments may be limited. One strategy is to record all adjustments as journal entries. However, when you rely solely on the journal entry record, all of these varying transactions are grouped in a single list view. Additionally, employees have limited ways to tell journal entries apart when they enter them.

By contrast, with the Custom Transactions feature, you can create custom transaction types that are clearly labeled for specific purposes. With this approach, each custom transaction type has its own list view and its own menu path, which you can customize. In the following example, three custom transaction types have been added to the Accounting Center's Financial tab.

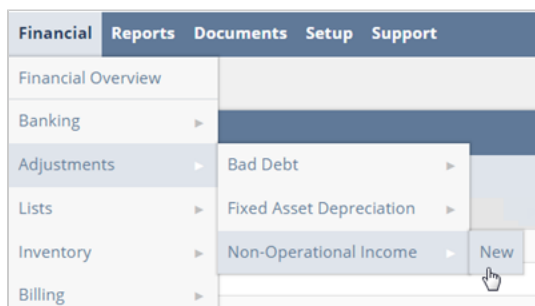

These enhancements make it possible for employees to automatically classify each transaction when they create it. And if they want to view a list of all transactions of a particular type, they can do so using that type's list view.

Custom Transaction Types Support Key NetSuite Features

When you use custom transaction types, you can leverage many of the same features that are available with standard NetSuite transaction types. For example:

- Each custom transaction type can have its own numbering, permissions, and workflows.
- Custom transaction types can include custom transaction fields that you define.
- You can create multiple custom entry forms for each transaction type.
- You can see what changes have been made to the custom transaction type configuration. For more information, see [System Notes v2 for Custom Transaction Types](#).
- You can interact with custom transaction instances using SuiteScript. For details, see the help topic [Custom Transaction](#).

- You can interact with custom transaction instances by using SOAP web services. For details, see the help topic [Custom Transaction](#).
- You can interact with custom transaction instances by using REST web services. REST web services support basic, journal, and header only custom transactions. For details, see the help topic [Using CRUD Operations on Custom Records, Custom Lists, and Custom Transactions v1](#).
- You can interact with custom transaction instances by using the CSV Import Assistant. For details, see the help topic [Custom Transactions Import](#).
- You can reference your custom transaction types when creating saved searches. To find custom transaction types, use the Transaction search type. In the Types list, your custom transaction types are listed with standard transaction types.
- You can use global search or SuiteAnalytics Workbook to find a custom transaction.
- You can review system notes for custom transaction type configuration changes. Use the System Notes v2 workbook to view changes to the configuration of custom transaction types. For more information, see the help topic [System Notes v2 Workbook](#).
- You can interact with custom transaction instances by using SuiteAnalytics Connect. To reference your custom transaction types, use the Transaction table. Use the transaction_type column to identify your custom transaction type. For more details, see the help topic [Connect Schema](#).
- Custom transaction types can be included in SuiteApps packaged with SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SuiteApps from an integrated development environment (IDE) on your local computer. For more information, see the help topic [Custom Transaction Types in Bundles](#).
- Deploy custom transaction types to other accounts using SuiteCloud Development Framework, with some limitations. For more information, see [Custom Transaction Record Types as XML Definitions](#).
- Custom transaction types can be used in conjunction with the Custom GL Lines plug-in. With the Custom GL Lines plug-in, you can create logic that automatically creates a GL impact. For more information, see [Custom Transaction Type Association with a Custom GL-Lines Plug-in Implementation](#).

Support for these features makes it possible for each transaction type to have its own unique behavior and processing. These advantages can be critical as you develop a series of discrete transaction types to meet various needs.

Note: Custom transactions appear on the Deposits and Credits subtab of the Reconcile Bank Statement if the Show All Transaction Types in Reconciliation box is checked on the Accounting Preferences page. For more information, see the help topic [General Accounting Preferences](#).

Let's say you create a custom transaction type called Bad Debt to track debts that aren't collectible. You might want to limit access to this custom transaction type to certain users. You can manage access on the Permissions subtab using the Level sublist for this transaction type.

The screenshot shows the 'Permissions' subtab in NetSuite. At the top, there are tabs for Accounting, Document Numbers, Transaction Numbers, Statuses, Links, Permissions (selected), and Translation. Below the tabs, there is a table with two columns: 'Role' and 'Level'. The first row shows 'Administrator' with 'Full' access. Below this, there is a search bar containing 'Bad-Debt Approvers'. To the right of the search bar is a dropdown menu for 'View'. Below the search bar are buttons: 'Add', 'Cancel', 'Insert', and 'Remove'. At the bottom left are 'Save' and 'Cancel' buttons. The dropdown menu is open, showing options: 'View', 'Create', 'Edit', and 'Full'.

You may also want to create a custom workflow for this type. On the New Workflow page, custom transaction types are listed with standard transaction types.

You can reference custom statuses in your workflow if you've defined them for this transaction type. Custom statuses are a unique feature of custom transaction types and aren't available with standard transaction types. You create statuses by using the transaction type's Statuses subtab.

Description *	Internal ID	Posting	Translation
Pending Approval		Yes	
Approved		☒	

Multiple Custom Transaction Styles Supported

The Custom Transactions feature supports multiple transaction formats. That is, you can create transaction types in any of the following styles:

- **Basic** – Lets users record credit or debit lines to specified accounts. The corresponding account to be adjusted for balancing purposes is defined on the transaction type record. This approach is similar to the expense report transaction, which always debits the same predefined account.
- **Journal** – Lets users record sets of debits and credits to accounts that a user manually specifies when entering the transaction. As with a standard journal entry record, the total value of credits must equal the total balance of debits.
- **Header only** – Relies on a GL plug-in implementation to calculate the GL impact. That is, the transaction does not include a Lines sublist for users to manually enter debits and credits to specific accounts. Rather, the plug-in implementation calculates the impact based on other data. This data can consist of values that users enter on the transaction header or of values they enter on a custom form created by using SuiteScript objects.
- **Sales** – Provides functionality similar to a sales transaction, including the Item sublist, taxes (SuiteTax only), and inventory impact. Sales custom transactions behave similar to invoices, cash sales, or credit memos.

- **Purchase** – Provides functionality similar to a purchase transaction, including the Item and Expenses sublists, inventory impact, taxes (SuiteTax only), and amortization. Purchase custom transactions behave similar to vendor bills.

For full details on the various transaction styles, see [Custom Transaction Styles Overview](#).

Sales and Purchase Transaction Types Overview

Sales and purchase custom transaction types provide behavior similar to sales and purchase transactions, enabling you to create custom transaction types that use the Item sublist and define the GL impact of transactions. The behavior of sales custom transactions is similar to invoices, whereas purchase custom transactions are similar to vendor bills.

Note: Sales and purchase transaction types support SuiteTax only, not legacy tax.

A sales custom transaction provides sales transaction functionality that you can incorporate into your sales workflow. For example, Large and Associates, a nonprofit company, relies on donations. They need to record cash donations in NetSuite with payment options like check or credit card. They want to exclude this transaction from accounts receivable. When creating the transaction, users select items on the Items subtab and choose a payment method (cash, check, or credit card) to post the payment. A sales custom transaction meets these requirements.

CC1-Custom Sales Transaction

Save Cancel Auto Fill Actions

Primary Information

Document # To Be Generated

Customer * 47 Dynasty, Ltd. : Acme, Inc.

Date * 9/5/2025

Start Date

End Date

Posting Period * May 2025

Due Date

PO #

Memo

Summary

Subtotal	0.00
Discount Item	0.00
Shipping Cost	0.00
Handling Cost	0.00
Gift Certificate	0.00
Total	0.00

Classification

Department *

Class

Location *

Items Shipping Billing **Accounting** Relationships Sales Team Communication

Account Information

Accounts * 11000 Accounts Receivable

Exchange Rate * 1.00

Currency * USA

Revenue

☐ Rev Rec on Rev Commit.

Gross Profit

Est. Extended Cost

Est. Gross Profit

Est. Gross Profit Percent

A purchase custom transaction provides purchase transaction functionality that you can incorporate into your purchase workflow. For example, when Acme Medical Supply in Brazil imports goods, the company is responsible for issuing a Nota Fiscal to be able to carry the goods from customers at the port of arrival, to its own premises. A purchase custom transaction can meet these requirements.

CC-Custom Purchase Transaction

Save Cancel Auto Fill Recalc Actions

Primary Information

Transaction Number To Be Generated

Reference No.

Vendor * Acme Medical Supply

Account * 20000 Accounts Payable

Exclude from GL Audit Numbering

Available Vendor Credit

Currency * USA

Exchange Rate * 1.00

Payment Hold

Due Date 8/7/2025

Date * 9/5/2025

Posting Period * May 2025

Memo

Expenses and Items Billing Landed Cost Relationships Communication

Landed Cost per Line

Expenses 0.00 Items 0.00

Clear All Lines

Item	Vendor Name	Quantity	Units	Inventory Detail	Description	Rate	Landed Cost	Amount	Options	Department	Class	Landed Cost Category	Location	Customer	Project task	Billable	Amort. Schedule	Amort. Start	Amort. End
Bandages and Dressings - 10 Person-First-Aid Kit	10 Person-First-Aid Kit	5			This comprehensive 10-person first aid kit is designed to provide you and your family with all the essential supplies needed to handle common injuries and emergencies. From cuts and scrapes to minor burns and blisters, this kit has you covered. It in(more...)	9.35		46.75		Marketing			East						

For information about available sales and purchase functionality in custom transactions, see [Sales and Purchase Functionality Available in Custom Transactions](#).

Sales and Purchase Functionality Available in Custom Transactions

Generally, sales and purchase custom transactions function the same as standard transactions, for example, invoice or vendor bill. Currently, the following features are supported by sales and purchase custom transactions:

- **Items Subtab Support** - Sales and purchase custom transactions support the Items subtab, where you can include details of items for sale and for purchase. For more information, see the help topic [Adding Items on a Sales Transaction](#).
- **Expenses Subtab Support** - Purchase custom transactions support the Expenses subtab, where you can include expense details related to purchases. For more information, see the help topic [Vendor Bills](#).
- **Tax** - Sales and purchase custom transactions support SuiteTax only, not legacy tax. For more information, see the help topic [SuiteTax](#).

The Standard Tax Report includes sales and purchase custom transaction details. For more information, see the help topic [Generating a Standard Tax Report in SuiteTax](#).

- **Apply Subtab Support** - Sales custom credit transactions support the Apply subtab, where you can apply transformed custom transactions to the source transaction. The Apply subtab has the same fields as the Apply subtab for credit memo and displays the same set of transactions. For more information see the help topic [Applying a Customer Credit Memo](#).
- **Inventory impact and costing** - Sales and purchase transactions can increase or decrease your stock level. If you purchase an inventory item using a posting credit custom purchase transaction, your stock level increases. Your last purchase price and average inventory price are updated. If you sell an inventory item using a posting debit custom sales transaction, your stock level decreases. Cost of Goods Sold accounting lines are automatically posted to the transaction, depending on your inventory valuation method. For more information, see the help topic [Setting Inventory Costing Preferences](#).
- **Revenue Recognition** - You can use both revenue recognition and advanced revenue management features with sales custom transactions. Revenue recognition and advanced revenue management

work the same with sales custom transactions as they do when created from an invoice or credit memo. For more information, see the help topic [Revenue and Expense Recognition Overview](#).

- Amortization – You can attach amortization schedules to your purchase custom transactions in the same way as you do it for vendor bills. For more information, see the help topic [Expense Amortization](#).
- Currency Revaluation – You can enter your transaction in various currencies. They get revalued at the end of the month or at the time of their payment. For more information, see the help topic [Currency Revaluation Transactions](#).
- Multi-Subsidiary Customer and Vendor – You can use multi-subsidiary customers and vendors on sales and purchase custom transactions. For more information, see the help topic [Transactions Available for Multi-Subsidiary Vendors](#).
- Elimination – With Automated Intercompany Management enabled, intercompany transactions are automatically eliminated at the end of the month.. For more information, see the help topic [Automated Intercompany Management Overview](#).
- Promotions, SuitePromotions, and Discounts – You can apply promotions, SuitePromotions, and discounts to sales custom transactions. For more information, see the help topic [Promotions Overview](#).
- Shipping – You can use the shipping feature with sales custom transactions to manage your company's shipping needs. For more information, see the help topic [Shipping](#). When an eligible SuitePromotion is added, the shipping discount is applied after you calculate the shipping costs. For more information, see the help topic [Shipping Promotions and Multiple Shipping Routes](#).
- Gift Certificates – You can sell gift certificates on sales custom transactions. Then you can apply those gift certificates toward payments of future transactions. For more information, see the help topic [Gift Certificates](#).
- Installments – You can use the installment feature with sales custom transactions (debit type) and purchase custom transactions (credit type). Installments on sales custom transactions work the same as they do with creating the installment from an invoice. Installments on purchase custom transactions work the same as they do with vendor bills. For more information, see the help topics [Creating Installments](#) and [Vendor Payment Installments](#).
- Landed Costs – You can calculate landed costs for purchase custom transactions. Landed costs work the same for purchase custom transactions as they do for vendor bills. For more information, see the help topic [Landed Cost Overview](#).

Additionally, you can create transformation workflows to support your business transaction flows. Sales and purchase custom transactions support the following transformations:

- Sales custom transaction type to sales custom transaction type
- Purchase custom transaction type to purchase custom transaction type
- Invoice to sales custom transaction type
- Sales custom transaction type to invoice
- Sales order to sales custom transaction type
- Sales custom transaction type to customer payment
- Sales custom transaction type to customer refund
- Sales custom transaction to cash sale
- Cash sale to sales custom transaction
- Purchase order to purchase custom transaction
- Return authorization to sales custom transaction
- Vendor bill to purchase custom transaction
- Purchase custom transaction to vendor bill

- Vendor return authorization to purchase custom transaction
- Sales custom transaction to cash refund
- Sales custom transaction to credit memo
- Purchase custom transaction to vendor credit
- Purchase custom transaction to vendor payment

For more information, see the help topic [Supported Transformation Types](#).

To view a sample of a sales and purchase transaction workflow, see [Sales Custom Transaction Transform Action Workflow Example](#). For more information about workflows, see the help topic [SuiteFlow Overview](#).

Taxation for sales and purchase custom transactions is calculated the same way as it is for standard transactions. The following table shows the relationship between sales and purchasing custom transactions and the standard transactions that calculate tax the same way.

Custom Transaction	Standard Transaction
Debit sales custom transaction	Invoice
Credit sales custom transaction	Credit
Debit purchase custom transaction	Bill
Credit purchase custom transaction	Bill Credit

For more information, see [Custom Transaction Type Association with a SuiteTax Plug-in](#).

Sales and Purchase Custom Transaction Types in Integrations

Sales and purchase custom transaction types can be used in CSV imports and are available in various areas of NetSuite. To learn more about sales and purchase custom transaction types in integrations, see the following sections.

Sales and Purchase Custom Transaction Types CSV Import

You can use the CSV Import Assistant to import sales and purchase custom transactions. For more information about how to import custom transactions, see the help topic [Custom Transactions Import](#).

Sales and Purchase Custom Transaction Types in SuiteScript

You can also access sales and purchase custom transactions in SuiteScript. For more information about custom transactions through SuiteScript, see the help topic [Custom Transaction](#).

Sales and Purchase Custom Transaction Types in SOAP Web Services

You can use sales and purchase custom transactions in SOAP web services. As sales and purchase custom transactions in SOAP web services differ in a few things from other custom transaction types, it's important to read through the whole topic.

You can also find more information in [Sales and Purchase Transaction Types Overview](#).

You can find more information about Custom Transactions in SOAP web services in [Custom Transaction](#).

Supported Operations

You can perform the following operations with sales and purchase custom transaction types:

[add](#) | [addList](#) | [attach / detach](#) | [delete](#) | [deleteList](#) | [get](#) | [getCustomizationId](#) | [getDeleted](#) | [getList](#) | [getSavedSearch](#) | [getSelectValue](#) | [initialize / initializeList](#) | [search](#) | [update](#) | [updateList](#) | [upsert](#) | [upsertList](#) |



Note: You can also use the asynchronous equivalents of SOAP web services list operations. For information about asynchronous operations, see the help topic [SOAP Web Services Asynchronous Operations](#). For more information about request processing, see the help topic [Synchronous Versus Asynchronous Request Processing](#).

Field Definitions

The SuiteTalk Schema Browser includes definitions for all body fields, sublist fields, search filters, and search joins available to this record. For details, see the Schema Browser's [CustomSale](#) and [CustomPurchase](#) reference pages.



Note: For information about using the SuiteTalk Schema browser, see the help topic [SuiteTalk SOAP Schema Browser](#).

Usage Notes

Consider the following information when you work with sales and purchase custom transactions:

- When working with the add, update and upsert operations you must specify a custom transaction type in the tranType field. You can use either the scriptId or the internalId of the specific custom transaction type. Sales and purchase custom transaction types have dedicated classes customSale and customPurchase respectively.
- For the get, getList, delete, deleteList and attach / detach operations, you must use CustomTransactionRef.
- When using any search operation, you must search as for any other custom transaction and then set the criteria to sale or purchase.
- The initialize operation lets you to perform the following transformations:
 - CustomSale transaction type to another customSale transaction type.
 - CustomSale transaction type to customerPayment.
 - CustomSale transaction type to customerRefund.
 - Invoice to customSale transaction type.
 - SalesOrder to customSale transaction type.
 - CustomPurchase transaction type to another customPurchase transaction type.
- When using the get operation for a record created through the initialize operation, the returned record does not contain the createdFrom field.



Note: The createdFrom field is usually returned with a record created by the initialize operation and contains the internal id of the source record specified by the element reference

Code Sample

In the following example the add operation is used for a sales custom transaction.

Java

```
1 CustomSaleItem item = new CustomSaleItem();
2 item.setItem(createRecordRef("39"));
3
4 CustomSaleItemList itemList = new CustomSaleItemList();
5 itemList.setItem(new CustomSaleItem[] {item});
6
7 CustomSale record = new CustomSale();
8 record.setTranType(createRecordRef("105"));
9 record.setEntity(createRecordRef("84"));
10 record.setLocation(createRecordRef("2"));
11 record.setItemList(itemList);
12
13 c.addRecord(record);
```

SOAP Request

```
1 <add xmlns="urn:messages_2019_2.platform.webservices.netsuite.com">
2   <record xsi:type="ns7:CustomSale" xmlns:ns7="urn:customization_2019_2.setup.webservices.netsuite.com">
3     <ns7:tranType internalId="105" xsi:type="ns8:RecordRef" xmlns:ns8="urn:core_2019_2.platform.webservices.netsuite.com"/>
4     <ns7:entity internalId="84" xsi:type="ns9:RecordRef" xmlns:ns9="urn:core_2019_2.platform.webservices.netsuite.com"/>
5     <ns7:location internalId="2" xsi:type="ns10:RecordRef" xmlns:ns10="urn:core_2019_2.platform.webservices.netsuite.com"/>
6     <ns7:itemList replaceAll="false" xsi:type="ns7:CustomSaleItemList">
7       <ns7:item xsi:type="ns7:CustomSaleItem">
8         <ns7:item internalId="39" xsi:type="ns11:RecordRef" xmlns:ns11="urn:core_2019_2.platform.webservices.netsuite.com"/>
9       </ns7:item>
10    </ns7:itemList>
11  </record>
12 </add>
```

SOAP Response

```
1 <addResponse xmlns="urn:messages_2019_2.platform.webservices.netsuite.com">
2   <writeResponse>
3     <platformCore:status isSuccess="true" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com">
4       <platformCore:statusDetail>
5         <platformCore:afterSubmitFailed>false</platformCore:afterSubmitFailed>
6       </platformCore:statusDetail>
7     </platformCore:status>
8     <baseRef internalId="176" type="customSale" xsi:type="platformCore:RecordRef" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"/>
9   </writeResponse>
10 </addResponse>
```

In the following example the initialize operation is used to transform a purchase custom transaction type 76 to a purchase custom transaction type 105.

Java

```
1 InitializeRef reference = new InitializeRef(); reference.setInternalId("76"); reference.setType(InitializeRefType.customPurchase);
  InitializeAuxRef auxReference = new InitializeAuxRef(); auxReference.setType(InitializeAuxRefType.tranType); auxReference.setScriptId("custompurchase105"); // or auxReference.setInternalId("105"); InitializeRecord initializeRecord = new InitializeRecord(); initializeRecord.setType(InitializeType.customPurchase); initializeRecord.setReference(reference); initializeRecord.setAuxReference(auxReference); CustomPurchase recordToAdd = (CustomPurchase) c.initialize(initializeRecord);
```

SOAP Request

```

1 <initialize xmlns="urn:messages_2019_2.platform.webservices.netsuite.com"> <initializeRecord> <ns7:type xmlns:n
s7="urn:core_2019_2.platform.webservices.netsuite.com">customPurchase</ns7:type> <ns8:reference internalId="76" type="customPur
chase" xmlns:ns8="urn:core_2019_2.platform.webservices.netsuite.com"/> <ns9:auxReference scriptId="custompurchase105" type="tran
sactionType" xmlns:ns9="urn:core_2019_2.platform.webservices.netsuite.com"/> </initializeRecord>
2 </initialize>

```

SOAP Response

```

1 <readResponse> <platformCore:status isSuccess="true" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuit
e.com"/> <record xsi:type="setupCustom:CustomPurchase" xmlns:setupCustom="urn:customization_2019_2.setup.webservices.net
suite.com"> <setupCustom:createdDate>2019-09-10T07:08:00.000-07:00</setupCustom:createdDate> <setupCustom:lastModified
Date>2019-09-10T07:08:00.000-07:00</setupCustom:lastModifiedDate> <setupCustom:tranType internalId="105" xmlns:platform
Core="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>my Purchase B</platformCore:name> </setupCustom:tran
Type> <setupCustom:billAddressList internalId="38" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <plat
formCore:name>Default Billing</platformCore:name> </setupCustom:billAddressList> <setupCustom:account internalId="6" xmlns:plat
formCore="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>Fees Receivable</platformCore:name> </setupCus
tom:account> <setupCustom:entity internalId="105" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <plat
formCore:name>Acme Medical Supply</platformCore:name> </setupCustom:entity> <setupCustom:subsidiary internalId="1" xmlns:platform
Core="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>Parent Company</platformCore:name> </setupCustom:sub
sidiary> <setupCustom:postingPeriod internalId="353" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <plat
formCore:name>Sep 2019</platformCore:name> </setupCustom:postingPeriod> <setupCustom:tranDate>2019-09-10T00:00:00.000-07:00</
setupCustom:tranDate> <setupCustom:currencyName>US USD</setupCustom:currencyName> <setupCustom:billingAddress xmlns:platformCom
mon="urn:common_2019_2.platform.webservices.netsuite.com"> <platformCommon:country>unitedStates</platformCommon:country> <plat
formCommon:addresssee>Acme Medical Supply</platformCommon:addresssee> <platformCommon:addr1>1234 Sepulveda Blvd</platformCom
mon:addr1> <platformCommon:city>Los Angeles</platformCommon:city> <platformCommon:state>CA</platformCommon:state> <platform
Common:zip>94321</platformCommon:zip> <platformCommon:addrText>Acme Medical Supply1234 Sepulveda BlvdLos Angeles CA 94321</
platformCommon:addrText> <platformCommon:override>false</platformCommon:override> </setupCustom:billingAddress> <setupCus
tom:exchangeRate>1.0</setupCustom:exchangeRate> <setupCustom:dueDate>2019-09-10T00:00:00.000-07:00</setupCustom:dueDate> <se
tupCustom:paymentHold>false</setupCustom:paymentHold> <setupCustom:memo>tralala memo</setupCustom:memo> <setupCustom:curren
cy internalId="1" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>US USD</platform
Core:name> </setupCustom:currency> <setupCustom:transactionNumber>To Be Generated</setupCustom:transactionNumber> <setupCus
tom:expenseList> <setupCustom:expense> <setupCustom:line>1</setupCustom:line> <setupCustom:category internalId="2" xmlns:plat
formCore="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>Entertainment</platformCore:name> </setupCus
tom:category> <setupCustom:account internalId="59" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <plat
formCore:name>Advertising</platformCore:name> </setupCustom:account> <setupCustom:amount>123.0</setupCustom:amount> <setupCus
tom:isBillable>false</setupCustom:isBillable> </setupCustom:expense> </setupCustom:expenseList> <setupCustom:accountingBookDetail
List xmlns:platformCommon="urn:common_2019_2.platform.webservices.netsuite.com"> <platformCommon:accountingBookDetail> <platform
Common:accountingBook internalId="2" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>Se
condary accounting book</platformCore:name> </platformCommon:accountingBook> <platformCommon:currency internalId="1" xmlns:plat
formCore="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>US USD</platformCore:name> </platformCommon:curren
cy> <platformCommon:exchangeRate>1.0</platformCommon:exchangeRate> </platformCommon:accountingBookDetail> <platformCommon:ac
countingBookDetail> <platformCommon:accountingBook internalId="3" xmlns:platformCore="urn:core_2019_2.platform.webservices.net
suite.com"> <platformCore:name>Third accounting book</platformCore:name> </platformCommon:accountingBook> <platformCommon:curren
cy internalId="1" xmlns:platformCore="urn:core_2019_2.platform.webservices.netsuite.com"> <platformCore:name>US USD</platform
Core:name> </platformCommon:currency> <platformCommon:exchangeRate>1.0</platformCommon:exchangeRate> </platformCommon:accounting
BookDetail> </setupCustom:accountingBookDetailList> </record>
2 </readResponse>

```

Custom Transaction Type Setup

For help getting started with the Custom Transactions feature, see the following topics:

- [Enabling the Custom Transactions Feature](#) (required)
- [Granting a Role Permission to Manage Custom Transaction Types](#) (optional)

After you've enabled the feature, authorized users can create custom transaction types, as described in [Creating and Editing Custom Transaction Types](#). After custom transaction types have been created, authorized users can enter transaction instances by going to Customization > Lists, Records, & Fields > Transaction Types, and clicking the New Transaction link for the required transaction type.

If appropriate, you can also configure other menu paths for entering custom transactions. This process is described in [Creating Links for a Custom Transaction Type](#).

Enabling the Custom Transactions Feature

Before you can create custom transaction types, you must enable the feature. To enable the feature, go to Setup > Company > Enable Features. On the **SuiteCloud** subtab, check the **Custom Transactions** box, and click **Save**.

After you enable the feature, you can begin creating custom transaction types, as described in [Creating a Custom Transaction Type](#).

Granting a Role Permission to Manage Custom Transaction Types

By default, only account administrators have permission to create custom transaction types. However, account administrators can give access to other roles. The available access levels are described in the following table.

Level	Users can:	Users can't:
View	View transaction type definitions.	Edit, create, or delete transaction types.
Create	View and create transaction types.	Edit or delete transaction types.
Edit	View, create, and edit transaction types.	Delete transaction types.
Full	View, create, edit, and delete transaction types.	—

To grant a role permission to manage custom transaction types:

1. Go to Setup > Users/Roles > Manage Roles.
2. Locate the role you want to modify, and click **Edit** or **Customize**.
3. On the **Permissions** subtab, click the **Setup** subtab.
4. Do one of the following:
 - To grant the role access, add a line to the sublist. In the **Permission** column, set the list to **Custom Transaction Types**. In the **Level** column, select the appropriate access level, and then click **Add**.
 - To make changes to the role's existing access, locate the Custom Transaction Types permission and edit the corresponding value in the **Level** column. Then click **OK**.
 - To remove a role's access, locate the Custom Transaction Types permission and click it to enable a series of buttons. Then click **Remove**.
5. Click **Save**.

Note: Giving a role permission to manage custom transaction types does not give the role permission to enter transaction instances. For information about permitting a role to work with transaction type instances, see [Permissions for Custom Transaction Instances](#).

Creating and Editing Custom Transaction Types

After you've enabled the Custom Transactions feature, you can create custom transaction types.

For help creating and updating custom transaction types, see the following topics.

- [Custom Transaction Styles Overview](#)
- [Creating a Custom Transaction Type](#)
- [Editing a Custom Transaction Type](#)
- [Locked Custom Transaction Types](#)
- [Custom Transaction Type Classification Fields](#)
- [Account Field Setup for Custom Transaction Types](#)
- [Custom Fields in Custom Transaction Types](#)
- [Numbering for a Custom Transaction Type](#)
- [Account Field Setup for Custom Transaction Types](#)
- [Statuses for a Custom Transaction Type](#)
- [Creating Links for a Custom Transaction Type](#)
- [Adding Custom Forms for a Custom Transaction Type](#)
- [Permissions for Custom Transaction Instances](#)
- [Adding Translations for a Custom Transaction Type](#)



Note: For help enabling the Custom Transactions feature, see [Enabling the Custom Transactions Feature](#).

Custom Transaction Styles Overview

For each custom transaction type you create, you must choose a transaction style. The style determines how instances of the transaction type will appear and behave, how users will interact with transaction instances, and how they will affect your general ledger. After a transaction type has been saved, you can't change its style. For this reason, you may find it useful to review this section prior to creating your custom transaction types.

The available transaction styles include the following:

- [Basic](#)
- [Journal](#)
- [Header Only](#)
- [Sales](#)
- [Purchase](#)

Basic

Users entering instances of a Basic style transaction type can enter either a series of credits or a series of debits. Users specify the accounts to be credited (or debited) in each transaction's Lines sublist. The corresponding account to be adjusted for balancing purposes is defined on the transaction type's definition. This account is sometimes called the offset account.

With this approach, the custom transaction is similar to the expense report transaction, which always debits the same predefined account. However, one unique feature of the Basic style is that you can

choose whether the offset account named on the transaction type is to be credited or debited. You make this choice using the transaction type's Credit box. If the Credit box is checked, the offset account is credited, and the accounts that the user identifies in the Lines sublist are debited. If the Credit box is cleared, the behavior is reversed.

After a transaction type has been created, you can't change the value of the Credit box.

Journal

The Journal transaction style lets users record sets of debits and credits to accounts they specify when entering the transaction. As with a standard journal entry record, the total value of credits must equal the total value of debits.

Non-Operational Income Entry

NOIE2

Edit

Back

Actions

Primary Information

Entry No.
NOIE2

Date
6.11.2024

Currency
USA

Posting Period

Exchange Rate
1.00

Memo

Lines

Communication

System Information

Custom

GL Impact

E-Document

Account	Debit	Credit	Memo	Name	History
14200 Pre-Paid Postage		325.00			History
10050 Petty Cash	325.00				History

Edit

Back

Actions

Line item entries on journal style custom transactions are treated as main line entries. This behavior is consistent with the behavior of standard journal entry transaction types.

Journal style custom transactions permit postings to elimination subsidiaries. Basic and Header Only styles don't permit postings to elimination subsidiaries.

Header Only

With the Header Only transaction style, the system uses a Custom GL Lines plug-in implementation to determine the GL impact of transactions that users enter. That is, the transaction instances don't include a Lines sublist for users to manually enter debits or credits to specific accounts. Rather, the plug-in implementation calculates the impact based on other data that users enter. This data can originate from standard or custom fields on the transaction instance entry form. It can also originate from values entered in a custom UI created by using SuiteScript objects.

For example, you may want to create a Header Only transaction that uses SuiteScript objects to create a sublist based on a saved search. With this approach, you could configure the transaction type to display a list of transactions on which the system can take some action, depending on choices the user makes when entering each transaction instance. The plug-in implementation could then create GL lines based on those choices.

The following screenshot illustrates this approach. In this example, a Bad Debt Accrual transaction instance shows a list of overdue invoices. The user can select those invoices which should be designated as bad debt.

Bad Debt Accrual

Save

Cancel

Reset

Primary Information

CUSTOM FORM *
Custom Bad Debt Accrual Form

EXCHANGE RATE *
1.00

ENTRY NO.
To Be Generated

DATE *
1/20/2015

CURRENCY *
USA

Classification

SUBSIDIARY *
Parent Company

CLASS

DEPARTMENT

Communication
Transactions

USE	NAME	NUMBER	DAYS OVERDUE	DATE	DUE DATE
☒	Invoice #3	3	71		11/10/2014
☐	Invoice #1	1	66		11/15/2014
☐	Invoice #2	2	56		11/25/2014

Save

Cancel

Reset

Note: When using custom transactions with the Custom GL Lines Plug-in, a posting must have at least one transaction line.

A Header Only transaction instance has no GL impact until it's associated with a plug-in implementation. However, you can create Header Only transaction types prior to enabling the Custom GL Plug-in Lines feature. Similarly, users can enter Header Only transaction instances before the corresponding transaction type is linked to a plug-in implementation, if the type does not have a posting status.

For more information, see the following topics.

- Custom GL Lines Plug-in Overview
- Custom Transaction Type Association with a Custom GL-Lines Plug-in Implementation

Sales

A sales custom transaction provides sales transaction functionality that you can incorporate into your sales workflow. With sales custom transactions, you can use the Item sublist and define the GL impact of the transaction. Inventory impact, taxes (SuiteTax only), and revenue recognition are also supported. The behavior of sales custom transactions is similar to invoices, cash sales, or credit memo transactions.

The following transaction transformations are supported:

- Sales transaction type to sales transaction type
- Sales order to sales transaction type
- Invoice to sales transaction type
- Sales transaction type to payment
- Sales transaction type to refund

For instance, consider Large and Associates, a nonprofit that relies on donations. They need to record cash donations in NetSuite with payment options like check or credit card. This transaction shouldn't be recorded in accounts receivable. Users should be able to select items on the Items subtab and choose a revenue account to post the transaction. A sales custom transaction meets these requirements.

Purchase

A purchase custom transaction provides purchase transaction functionality that you can incorporate into your purchase workflow. You can use purchase custom transactions to use the Item and Expenses sublists and define the GL impact of the transaction. Amortization, taxes (SuiteTax only), and inventory impact are also supported. The behavior of purchase custom transactions is similar to vendor bills.

For example, when Seven Company in Brazil imports goods, the company is responsible for issuing a Nota Fiscal to be able to carry the goods from customers at the port of arrival, to its own premises. A purchase custom transaction can meet these requirements.

Creating a Custom Transaction Type

When you create a custom transaction type, you must choose a name and a transaction style for the type. If appropriate, you can also define other qualities, such as the numbering style the type will use, the menu paths that will provide access to the transaction form, and more. After you save your new type, you can also add custom fields and create custom entry forms.

Note: Custom transactions appear on the Deposits and Credits subtab of the Reconcile Bank Statement if the Show All Transaction Types in Reconciliation box is checked on the Accounting Preferences page. For more information, see the help topic [General Accounting Preferences](#).

To create a custom transaction type:

1. Go to Customization > Lists, Records & Fields > Transaction Types > New.
2. In the **Name** field, enter a unique name for the type. As a best practice, enter a singular noun, because for certain locales the system uses the plural form of the name on the transaction type's List view.
3. In the **ID** field, enter a unique alphanumeric ID for the transaction type. For information about best practices and naming conventions, see the help topic [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see the help topic [Changing the ID of a Custom Object](#).
4. In the **Transaction Style** field, specify a value for transaction style. This choice determines how users will interact with instances of this type. Your choices are:
 - **Basic** – Users entering transaction instances can use a Lines sublist to enter either a series of credits or a series of debits to accounts that they specify. With this style, you must also identify the corresponding account to be adjusted for balancing purposes in the transaction type's **Account** field. For more information, see [Account Field Setup for Custom Transaction Types](#).
 - **Journal** – Users record sets of credits and debits to accounts that they manually specify when entering the transaction. This is the only style that permits postings to elimination subsidiaries.
 - **Header only** – With this style, users don't manually identify accounts to credit or debit. Instead, this style relies on a Custom GL Lines plug-in implementation to calculate the GL impact.
 - **Sales** – Provides functionality similar to a sales transaction, including the Item sublist, inventory impact, taxes (SuiteTax only), and revenue recognition. Sales custom transactions provide functionality similar to invoice, cash sale or credit memo transactions.
 - **Purchase** – Provides functionality similar to a purchase transaction, including the Item and Expenses sublists, amortization, taxes (SuiteTax only), and inventory impact. Purchase custom transactions provide functionality similar to vendor bills.

For more details on the available transaction styles, see [Custom Transaction Styles Overview](#).



Important: After you save your custom transaction type, you can't change the Transaction Style.

5. If appropriate, check the **Allow Void Transactions Using Reversing Journals** box. This option enables users to create reverse journal entries for posting transactions. This box is active only when the global Void Transactions Using Reversing Journals preference is enabled. You can view and set the global preference at Setup > Accounting > Accounting Preferences, on the General subtab.



Note: For sales and purchase transaction types, users can void only transactions that don't use inventory items.

6. If the transaction should close the sales order, check the **Ability to Close Sales Order** box. The sales custom transaction can close a sales order only if the transaction is of debit type and if it's posting. For more information, see [Ability to Close Sales Order](#).
7. If appropriate, use the **Class**, **Department**, and **Location** lists to specify that these fields appear on instances of this transaction type. For each field, you can specify that it's displayed either on the transaction header or as a column in the Lines sublist. For each classification, you can also check the corresponding **Mandatory** box to make the field required. For more information about these fields, see [Custom Transaction Type Classification Fields](#).



Note: The Class, Department, and Location fields aren't available for sales and purchase transaction types because they're available under the same conditions as standard sales and purchase transactions. You can specify class, department, and location by customizing the form for the sales or purchase custom transaction.

8. Specify any custom segments as appropriate. For more information, see the help topic [Custom Segments](#).
9. If you chose a Transaction Style of Basic, Sales, or Purchase, click the **Accounting** subtab and configure the account details for the type. For more information, see [Account Field Setup for Custom Transaction Types](#).
10. By default, a new custom transaction type has a nonposting status. If you want instances of the transaction to post, go to the **Statuses** subtab and do one of the following:
 - Check the **Posting** box. With this choice, every instance of the transaction posts when it's saved.
 - Create statuses for the transaction type. Each status can be configured to be either posting or nonposting. For help creating statuses, see [Statuses for a Custom Transaction Type](#).
11. (Optional) Use any of the following subtabs to further define your custom transaction type:
 - **Document Numbers** – Configure external numbers for transaction types. For more information, see [Numbering for a Custom Transaction Type](#) and [Defining Numbering for a Custom Transaction Type](#).
 - **Transaction Numbers** – Configure autogenerated transaction numbering for the type. For more information, see [Numbering for a Custom Transaction Type](#) and [Records and Transactions Available for Auto-Numbering](#).
 - **Statuses** – Create statuses for the type. For more information, see [Statuses for a Custom Transaction Type](#).
 - **Links** – Create menu paths for the transaction type. For more information, see [Creating Links for a Custom Transaction Type](#).
 - **Permissions** – Select the roles that should be permitted to work with instances of this custom transaction type.

For more information, see [Permissions for Custom Transaction Instances](#).

- **Translation** – Define translations for the custom transaction type's name. This subtab appears only if the Multi-Language option is enabled at Setup > Company > Enable Features, on the Company subtab. For more information, see [Adding Translations for a Custom Transaction Type](#).

12. Click **Save**.

The system saves your new custom transaction type and assigns full-level permission to the role of the user who created the custom transaction type. The permission lets users search for custom transaction instances in the global search.

NetSuite also creates an advanced template to print custom transaction instances.

After you save, two additional subtabs are available to further define the custom transaction type, as follows:

- **Custom Fields** – Create custom fields and automatically add them to the transaction type. Be aware that any custom field you create is available to be added to any standard or custom transaction type that exists in your system. For details, see [Custom Fields in Custom Transaction Types](#).
- **Forms** – Create custom forms for entering instances of the transaction type. For details, see [Adding Custom Forms for a Custom Transaction Type](#).

You can use SuiteCloud Development Framework (SDF) to manage custom transaction types as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom transaction type to another of your accounts. Each custom transaction type page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Ability to Close Sales Order

Sales custom transactions can close the sales order. When setting up a sales custom transaction, you have two options

Check the Ability to Close Sales Order Box

Uses the custom transaction in the sales workflow instead of the invoice. Sales custom transactions can close the sales order only if the transaction is of debit type and if it's posting. To specify that the Sales custom transaction is of debit type and is posting:

- On the Accounting subtab, clear the Credit box.
- On the Statuses subtab, check the Posting box, or add a status and check the related Posting box.

When you transform the standard sales order transaction to a custom transaction, the results are as follows:

- The sales order transactions are marked as billed, which effectively closes the sales order.
- A standard link of type Order Bill/Invoice is created between the two transactions. The relationship between the order bill and invoice transactions is, therefore, the same as the relationship between a standard sales order and standard invoice.
- A standard item fulfillment transaction is created as part of this flow to cover the Cost of Goods Sold (COGS) impact for the inventory items sold. The custom transaction does not handle the COGS impact.
- For revenue recognition on the sales order transaction, the custom transaction is considered as a billing event for recognizing the revenue.

Clear the Ability to Close Sales Order Box

The custom transaction should be a stand-alone transaction or an additional transaction to be used within the existing sales workflow. The results are as follows:

- A generic **Transformation** link type is created between sales orders and custom transactions. This link recognizes only the **created from** relationship. In this case, the custom transaction behaves as a stand-alone transaction.
- If you sell an inventory item, COGS is covered on the custom transaction because there's no link to the item fulfillment.

System Notes for Custom Transaction Type Configuration

 **Note:** This topic applies to System Notes v2 only. For information about System Notes, see the help topic [System Notes Overview](#).

NetSuite logs system notes for changes to custom transaction type configuration. Use the System Notes v2 Workbook to view changes to the configuration of custom transaction types. For more information, see the help topic [System Notes v2 Workbook](#).

You can also access system notes for custom transactions types using the System Notes link on the Custom Transaction Types page.

Editing a Custom Transaction Type

Use the following procedure to make changes to an existing custom transaction type. Some fields, such as the Transaction Style field, can't be changed after you've saved the type. Also, after transaction instances have been created, you can't change the Credit box.

You can change key fields such as Account, Filter Account Type, and Posting. When you edit those fields, the changed settings aren't applied automatically to historical transactions. However, if you edit a historical transaction, the changes are applied and the GL impact of the transaction can change.

 **Note:** In some cases, a transaction type that was installed from a bundle may be locked to editing. If the transaction type is locked, you can't directly edit it as described in this topic. But you can still make some changes to the transaction type's behavior. For details, see [Locked Custom Transaction Types](#).

To edit a custom transaction type:

1. Go to Customization > Lists, Records & Fields > Transaction Types.
2. In the **Edit** column, click the name of the transaction type you want to edit.
3. Change any of the following values, as appropriate:
 - **Name** – This value must be unique. As a best practice, enter a singular noun. (For certain locales, the system uses the plural form of the name in the transaction type's List view.) When you make a change to the type's name, the old name is no longer used, even for existing transaction instances.
 - **Account** – The system displays the Account field only if the transaction type has a Transaction Style of Basic, Sales, or Purchase. In these cases, you can use the list to modify the offset account, which is the account to be debited or credited each time a user enters an instance of the transaction type. Any change you make to the Account field affects only those transaction instances created or edited after you save your change.

The way this account is used varies depending on whether the Credit box is checked. For more information about the Account field and Credit box, see [Account Field Setup for Custom Transaction Types](#).

- **Allow Void Transactions Using Reversing Journals** – This option enables users to create reverse journal entries for posting transactions. To use this option, you must have enabled the global Void Transactions Using Reversing Journals preference, which is available at Setup > Accounting > Accounting Preferences.



Note: For sales and purchase transaction types, users can void only transactions that don't use inventory items.

- **Class, Department, and Location** – Use these fields to make changes to whether class, department, and location can be set on instances of this transaction type. Any changes you make affect existing transaction instances as well as new ones. For more details on these fields, see [Custom Transaction Type Classification Fields](#).

4. The ID field is used to reference this transaction type during scripting. All IDs have a prefix that can't be changed:

- Basic, Journal, and Header Only styles have a prefix of **customtransaction**.
- Purchase styles have a prefix of **custompurchase**.
- Sales styles have a prefix of **customsale**.

For information about best practices and naming conventions, see the help topic [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see the help topic [Changing the ID of a Custom Object](#).

5. (Optional) To further define your custom transaction type, make changes on any of the following subtabs:

- **Custom Fields** – Create custom fields and automatically add them to the transaction type (and to any transaction type). Be aware that any custom field you create is available to be added to any standard or custom transaction type that exists in your system. For more information, see [Custom Fields in Custom Transaction Types](#).
- **Document Numbers** – Configure autonumbering for the type. For more information, see [Numbering for a Custom Transaction Type](#).
- **Transaction Numbers** – Configure autogenerated transaction numbering for the type. For more information, see [Numbering for a Custom Transaction Type](#) and [Records and Transactions Available for Auto-Numbering](#).
- **Accounting** – Configure account details for the type. The fields on the Accounting subtab apply to Basic, Sales, and Purchase Transaction Styles. In these cases, you can use the list to modify the offset account, which is the account to be debited or credited each time a user enters an instance of the transaction type. Any change you make to the Account field affects only those transaction instances created or edited after you save your change.

The way this account is used varies depending on whether the Credit box is checked. For more information about the Account field and Credit box, see [Account Field Setup for Custom Transaction Types](#).

- **Statuses** – Create posting and nonposting for statuses the type. When editing existing statuses, some limits exist. For more information, see [Statuses for a Custom Transaction Type](#).
- **Links** – Create menu paths for the transaction type. For more information, see [Creating Links for a Custom Transaction Type](#).
- **Forms** – Create custom entry forms for the transaction type. For more information, see [Adding Custom Forms for a Custom Transaction Type](#).
- **Permissions** – Select the roles that should be permitted to work with instances of this custom transaction type. For more information, see [Permissions for Custom Transaction Instances](#).
- **Translation** – Define translations for the custom transaction type's name. This subtab is displayed only if the Multi-Language option is selected at Setup > Company > Enable Features,

on the Company subtab. For more information, see [Adding Translations for a Custom Transaction Type](#).

6. Click **Save**.

System Notes v2 for Custom Transaction Types

To access System Notes from the Custom Transaction types page, click System Notes located in the upper right of the page.

Custom Transaction configuration changes are logged using System Notes v2. For more information, see the help topic [Viewing System Notes v2](#).

Locked Custom Transaction Types

In some cases, you may be working with a custom transaction type that has been locked to editing. For example, transaction types that were imported by a bundle are sometimes locked. If a transaction type is locked, you can't directly edit its definition. But you can still refine some of the transaction type's behavior using other NetSuite UI options. For more details, see the following:

- [Account Field Setup for Custom Transaction Types](#)
- [Permissions for Custom Transaction Instances](#)
- [Numbering for a Custom Transaction Type](#)
- [Adding an Existing Custom Field to a Custom Transaction Type](#)
- [Adding Custom Forms for a Custom Transaction Type](#)
- [Creating Links for a Custom Transaction Type](#)

Custom Transaction Type Classification Fields

Note: Classification fields, including the Mandatory boxes, aren't available for the sales and purchase custom transaction types. For sales and purchase transaction types, class, department, and location are determined automatically based on the features and preferences enabled in your account. You can use form customization to configure whether classification fields are available for sales and purchase custom transactions.

Custom classification fields in custom transaction types provide flexibility for tracking class, department, and location values. Specific behaviors and settings, such as global preference impacts, numbering implications, and how changes affect existing records, are described in the following topics:

- [Impact of Global Preferences on a Custom Transaction Type](#)
- [Classification Fields in Numbering for a Custom Transaction Type](#)
- [Behavior of Classification Fields Following Edits to a Custom Transaction Type](#)

For each transaction type, you can decide whether instances of the type include fields for class, department, and location.

Your choices for each of these fields are as follows:

- **None** – (Default choice) The field isn't used.

- **Header** – The field is displayed on the transaction's body.
- **Lines** – The field is a column in the transaction's Lines sublist.

For each field, you can also check a Mandatory box. If you check this box, users entering transaction instances are required to enter a value for the field.

Your choices about these fields are all reflected on the standard form for the transaction type. Your choices are also reflected in the default configuration of any custom forms you create, although you can make changes to the custom forms. For example, on a custom form, you can hide any of the classification fields, even if the transaction type was configured to make the field visible and required. In this manner, you can bypass the transaction type's settings.



Important: Your custom transaction type can be associated with a plug-in implementation. If it is, consider the logic of the plug-in implementation before setting these fields. Specifically, the plug-in implementation may set line values for class, department, or location. If it does, you must set the Class, Department, or Location list to **Lines**. If you don't, the values provided by the plug-in aren't used.

You can set values for the classification fields both when you create a custom transaction type and when you edit one. For details, see [Creating a Custom Transaction Type](#) and [Editing a Custom Transaction Type](#).

Impact of Global Preferences on a Custom Transaction Type

This topic describes how global accounting preferences interact with custom classification fields in custom transaction types. For an introduction to classification fields, see [Custom Transaction Type Classification Fields](#).

The choices that you make on the custom transaction type for class, department, and location override your global accounting preferences. These preferences are set at Setup > Accounting > Accounting Preferences. However, if your transaction type's Mandatory setting is less restrictive than your global accounting preferences, the system displays a warning. In this case, you can dismiss the warning and save the less-restrictive setting.

Classification Fields in Numbering for a Custom Transaction Type

This topic explains how you can incorporate classification fields, such as location and subsidiary, into the numbering scheme for custom transaction types. For an introduction to classification fields, see [Custom Transaction Type Classification Fields](#).

If you configure your transaction type to include the Location field on the transaction header, you may also want to refer to location in the autonumbering scheme for instances of this transaction type. If you have a OneWorld account, you can also include the subsidiary in the autonumbering sequence. For details, see [Numbering for a Custom Transaction Type](#).

Behavior of Classification Fields Following Edits to a Custom Transaction Type

This topic describes how edits to classification field settings affect both existing and new instances of a custom transaction type. For an introduction to classification fields, see [Custom Transaction Type Classification Fields](#).

When you edit an existing custom transaction type, you can change the settings related to class, department, and location. Any changes you make affect existing instances of the transaction type, as well as new ones. If you make changes, note the following:

- If you move a field from the Lines sublist to the header, the new header field is populated only if all of the fields on the transaction instance's Lines sublist shared the same value. Otherwise, the field's value isn't defined. If you change the location back to Lines, the former values are restored.
- If you choose to make a field mandatory that was not previously required, existing transaction instances may not have the required value. However, a user editing one of these instances is required to enter a value before being permitted to save changes.

Custom Fields in Custom Transaction Types

If appropriate, you can add custom fields to your custom transaction type. For more details, see the following sections:

- [Creating a Custom Field and Adding it to a Custom Transaction Type](#)
- [Adding an Existing Custom Field to a Custom Transaction Type](#)

Creating a Custom Field and Adding it to a Custom Transaction Type

If appropriate, you can create new custom fields and automatically add them to your custom transaction type. However, be aware of the following:

- When you create a custom field, it becomes available for **all** transaction types, including all standard and custom types. Custom fields aren't exclusive to the transaction type you're working on. However, custom fields created for custom transactions are hidden on standard transaction forms even if they're available for scripts and searches.
- When you add a custom field to your transaction type, you add it to **all** forms that exist for the type, including the standard form and any custom forms that exist. However, if appropriate, you can customize the field on your custom forms. For example, you can change the field's label, make it read-only, or hide it. For help working with custom forms, see [Configuring Custom Forms for a Custom Transaction Type](#).

If your transaction type has been locked to editing and you want to add custom fields to it, see [Adding an Existing Custom Field to a Custom Transaction Type](#).



Note: You create and maintain custom fields by using the transaction type's Custom Fields subtab. The Custom Fields subtab is only available when editing an existing transaction type. You can't access the subtab when creating a new transaction type.

For more information, see the help topics [Creating Custom Transaction Body Fields](#) and [Creating Custom Transaction Line Fields](#).

To create a custom field and add it to your custom transaction type:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type. The **Custom Fields** subtab should be displayed by default.
2. Do one of the following:

- To add to the body of transaction records, click **New Body Field**, or
- To add to the line items of transaction records, click **New Column Field**.

The system displays a page that lets you create the new field. On the **Applies To** subtab, the custom transaction type is already selected. If you want to apply your new field to additional transaction types, you can select the types on this subtab.

3. Configure the field as appropriate. For more details on configuring a custom field, see the help topic [Creating a Custom Field](#).
4. Click **Save**.

The system saves your custom field and adds it to your transaction type.

Adding an Existing Custom Field to a Custom Transaction Type

Every custom transaction field you create is available to be added to all transaction types, both custom and standard types. This procedure explains how to add one of these fields to your custom transaction type.

Note that adding a custom field adds it to **all** forms for the transaction type, including standard and custom forms. However, you can customize the field on your custom forms if needed. For example, you can change the field's label, make it read-only, or hide it. For help working with custom forms, see [Configuring Custom Forms for a Custom Transaction Type](#).

For help creating a custom field, see the help topic [Creating a Custom Field](#).

To add an existing custom field to a custom transaction type:

1. Do one of the following:
 - To add an existing body field, go to Customization > Lists, Records, & Fields > Transaction Body Fields.
 - To add an existing column field, go to Customization > Lists, Records, & Fields > Transaction Column Fields.
2. Click the name of the required field.
3. On the **Applies to** subtab, locate the **Custom Transactions** box, which lists all of the existing custom transaction types. Select the name of the appropriate type.
4. Click **Save**.

Numbering for a Custom Transaction Type

All NetSuite transactions are autonumbered. Autonumbering helps you determine the sequence in which transactions were entered. Numbering also helps you find transaction instances.

All transaction types, including custom transaction types, use document numbers and transaction numbers.

For more information, see the following topics:

- [Document Numbers for a Custom Transaction Type](#)
- [Transaction Numbers for a Custom Transaction Type](#)

Document Numbers for a Custom Transaction Type

This topic describes document numbers for a custom transaction type. For general information, see [Numbering for a Custom Transaction Type](#).

Numbers for document types are external numbers, such as the number that an external vendor uses on a bill, or account-based numbers such as a check number. Document numbers can also store a number for type-based transactions. Type-based numbers are available as custom columns in searches and lists.



Note: The Document Numbers subtab isn't relevant for Purchase custom transaction types. Purchase custom transactions use external numbering, similar to that used for vendor bills, where users specify the number themselves. If an automated numbering sequence is needed for a purchase custom transaction type, use Transaction Numbers.

For external numbering sequences such as vendor bill, the document number is unique for each vendor, which permits the same document number to be assigned to more than one vendor. NetSuite prevents a vendor from having a duplicated document number on the same transaction type.

Document numbers are useful in transactions where the account field has special significance. These types of transactions must have numbering that's unique to the account named on the transaction. For example, if five individual transactions are drawing money from the same account, then their document numbers are part of a single sequence even if they're not the same types.

Document numbers can also be required because of government numbering requirements. In those cases, NetSuite customers may want to use the document numbering system to meet the government requirements and transaction numbering to satisfy their own internal needs and requirements.

Transaction Numbers for a Custom Transaction Type

This topic describes transaction numbers for a custom transaction type. For general information, see [Numbering for a Custom Transaction Type](#).

Autogenerated numbers are internal, gapless numbers that can't be overwritten. They're generated when a transaction record is saved. These internal numbers are generated for each transaction type.

If autogenerated numbering isn't set up in your account, transaction numbers begin at 1. For more information about the records and transactions available for autonumbering, see the help topic [Records and Transactions Available for Auto-Numbering](#).



Important: Historical transaction records can have duplicate internal numbering. NetSuite prohibits overwriting transaction type numbering sequences but permits the overwriting of document numbers. NetSuite does not renumber historical internal transaction numbers.

For more information about setting up autogenerated document numbers and transaction numbers, see the help topic [Set Auto-Generated Numbers](#).

For each of your custom transaction types, you can customize the way these entry numbers are created. These options are described in [Components of a Custom Transaction Type's Entry Number](#). You may want to review these options before configuring numbering.

The process of configuring numbering includes the following tasks:

- [Defining Numbering for a Custom Transaction Type](#) – Set the main values that define your numbering scheme.


- [Defining Numbering Preferences for Subsidiaries and Locations](#) – (Optional) Tie some aspect of numbering to subsidiary or location.

Components of a Custom Transaction Type's Entry Number

At a minimum, the entry number for a transaction instance includes an autogenerated number. However, you can customize the way the numbers are generated. For example, for each transaction type, you can do any of the following:

- Define a static prefix, to be used for all instances of this type.
- Add a prefix derived from the subsidiary or the location record with which the transaction instance is associated. When you choose this configuration, NetSuite ties the numbering sequence to the transaction instance's subsidiary or location value. In this way, you can have multiple numbering sequences for each transaction type: one sequence for each subsidiary (or one sequence for each location).
- Define a static suffix, to be used for all instances of this type.

The following illustration shows a sample entry number that uses all of these options.



Each component, along with information about configuring it, is described in the following table.

Callout	Description
1	This value corresponds with the transaction type's Prefix field. This static value is used for all instances of the transaction type. For help setting this value, see Defining Numbering for a Custom Transaction Type .
2	This value corresponds with the Transaction Number Prefix field of either the subsidiary or location record with which the transaction instance is associated. This value appears only if the following conditions are met: ■ The transaction type's Use Subsidiary or Use Location option is enabled. For help setting this field, see Defining Numbering for a Custom Transaction Type. ■ The transaction instance includes a value in the relevant field (Subsidiary or Location). ■ The relevant subsidiary or location record includes a value in its Transaction Number Prefix field. For more details, see Defining Numbering Preferences for Subsidiaries and Locations.
3	This value is the autogenerated number. In some cases, all instances of a transaction type are numbered as part of a single sequence. In other cases, there can be multiple sequences. The system follows these rules: ■ If the entry number does not include a Transaction Number Prefix value derived from a subsidiary or location record, the system uses a generic numbering sequence not tied to any classification. The initial number of this sequence is the value saved in the transaction type's Initial Number field. For help setting this field, see Defining Numbering for a Custom Transaction Type. ■ In some cases, the entry number of the transaction instance does include a Transaction Number Prefix value derived from a subsidiary or location record. In these situations, the system uses numbering specific to that combination of subsidiary and transaction type (or the combination of location and transaction type). The initial number for each sequence is taken from the location or subsidiary record. For more details, see Defining Numbering Preferences for Subsidiaries and Locations.
4	This value corresponds with the transaction type's Suffix field. This static value is used for all instances of the transaction type. For help setting this value, see Defining Numbering for a Custom Transaction Type .

Defining Numbering for a Custom Transaction Type

You can set most of the fields relevant to custom transaction numbering by using the following procedure.

If you decide to enable the Use Subsidiary or Use Location option as described in the second step of this procedure, afterward you may want to complete the steps described in [Defining Numbering Preferences for Subsidiaries and Locations](#).

For information about the components of a custom transaction type's entry number, see [Components of a Custom Transaction Type's Entry Number](#).

To define numbering for a custom transaction type:

1. Go to one of the pages that lets you configure numbering, as follows:
 - Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type. Then click the **Transaction Numbers** subtab.
 - Go to Setup > Company > Auto-Generated Numbers. Then click the **Transaction Numbers** subtab and locate the transaction type in the list.

Both of these pages offer a view into the same set of fields, so a change made on one page is visible on the other.

2. If appropriate, add a prefix tied to the transaction instance's subsidiary or location field:
 - **Use Subsidiary** – This option is available only in OneWorld accounts.
 - **Use Location** – If you choose this option, you may want to make sure that the transaction type definition is configured to include the Location field on the transaction header (not the Lines sublist). For help, see [Custom Transaction Type Classification Fields](#). If you're using a custom entry form, ensure it makes the Location field visible. For help with custom forms, see [Adding Custom Forms for a Custom Transaction Type](#).

When a subsidiary or location prefix is used, the system also uses a unique numbering sequence for transaction instances that have that prefix.

3. (Optional) Enter numbers or letters in the **Prefix** field. This prefix is displayed before each autogenerated number. It also occurs before the subsidiary or location prefix, which you may have enabled in the previous step.
4. (Optional) Enter numbers or letters in the **Suffix** field. The suffix is displayed after each autogenerated number.
5. If appropriate, enter a value from 1 to 20 in the **Minimum Digits** field. This minimum applies only to the autogenerated number, not to the characters in the prefix and suffix. To meet the minimum for generated numbers that are too short, the system prepends zeroes to the number. For example, if Minimum Digits is set to 4, an autogenerated number of 1 becomes 0001.
6. If appropriate, check **Update Initial Number** and then enter a value in the **Initial Number** field. This number does not apply to sequences associated with subsidiary or location. Additionally, this number is used only if it's higher than the value in the **Current Number** field.

If you don't enter a value in the **Initial Number** field, NetSuite (in most cases) starts the sequence at 1. There's one exception: if the **Current Number** field is displayed and has a value, the numbering begins with the number that follows the value in that field.

Note: The Current Number field isn't shown when creating a new transaction type. If the field is shown, it has a value only if a transaction instance exists. This field shows the highest entry number of existing transaction instances. Usually, this field shows the number of the most recent transaction instance.

7. If you want to let users override an autogenerated number, check the **Allow Override** box.

 **Warning:** Overriding transaction numbers permits users to create duplicate numbers and gaps in the sequence. Additionally, when a transaction number is overridden with a higher value, future autogenerated numbers begin at the next number. Each number can be manually set to a lower value, but autogenerated numbering always follows the highest number that has been used so far. Use this option carefully. Ensure that you understand the risks associated with overriding transaction numbers.

8. Click **Save**.

For examples of how to set up transactions to use transaction type and location prefixes, see [Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples](#).

Defining Numbering Preferences for Subsidiaries and Locations

As described in [Components of a Custom Transaction Type's Entry Number](#), you can configure transaction instance entry numbers to include a prefix defined on the subsidiary or location record.

When the entry number includes this type of prefix, the autogenerated number sequence used is specific to the unique combination of subsidiary and transaction type (or the unique combination of location and transaction type). In these cases, the initial number is taken from the subsidiary or location record. The subsidiary or location records in your account include fields where you can set initial numbers for all custom transaction types that have the Use Subsidiary or Use Location option enabled.

This procedure describes how to create both of the values specific to this configuration: the transaction prefix and the initial number.

You may have to complete these steps multiple times, depending on how many subsidiaries and locations exist.

To define numbering preferences for a subsidiary or location:

1. Go to one of the following pages, as appropriate:

- Setup > Company > Classifications > Subsidiaries
- Setup > Company > Classifications > Locations

Click **Edit** for the appropriate subsidiary or location.

2. The **Transaction Number Prefix** field includes the prefix for this record. Make any necessary changes.

 **Important:** The value in the Transaction Number Prefix field is used for **all** transaction types configured to include a subsidiary or location prefix, including standard transaction types, so proceed with caution when making changes.

3. Configure the initial numbering sequence for your transaction type, for this subsidiary or location:
 - a. Click the **Transaction Numbers** subtab. If the subtab isn't shown, you haven't created a transaction type with the Use Subsidiary or Use Location option. For more information, see [Creating a Custom Transaction Type](#).
 - b. In the **Type** column, locate the name of your transaction type.
 - c. If you want to update the initial number used for transaction numbering, check **Update Initial Number**.
 - d. In the **Initial Number** field, enter the number that should be used for the first transaction instance. If you don't enter a value, NetSuite (in most cases) starts the sequence at 1. There's

one exception: if there's a value in the **Current Number** column, the numbering begins with the number that follows the value in that field. For example, if the Initial Number field is set to 100 and the value in the current Number column is 105, then the numbering begins at 106.



Important: If the Transaction Number Prefix field (in the location or subsidiary record) does not include a value, the system ignores the value in the Initial Number field. In these cases, the system numbers the instance as part of a sequence not specific to subsidiary or location. The initial number for this sequence is defined in the transaction type's Initial Number field. For help setting that value, see [Defining Numbering for a Custom Transaction Type](#). Additionally, consider adding a value to the custom transaction type's Prefix field to distinguish instances of this type from those of other transaction types.

4. Click **Save**.

For examples of how to set up transactions to use transaction type and location prefixes, see [Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples](#).

Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples

A custom transaction instance can have a predefined transaction type prefix and a location or subsidiary prefix. The following example demonstrates how to set up a custom purchase type transaction to include both a transaction type prefix and a location prefix. It also describes how to set the initial number NetSuite uses for the autogenerated number.

The examples in this topic are specific to custom transaction types. For information about numbering on standard transactions, see the help topic [Set Auto-Generated Numbers](#).



Note: Setting up transaction numbers that use a subsidiary (available in OneWorld accounts) prefix is similar to setting up transaction numbers that use a location prefix.

See the following topics:

- [Transaction Type Prefix on a Custom Transaction Type Record](#)
- [Location Prefix on a Location Record](#)
- [Prefixes and Autogenerated Transaction Numbering on a Transaction Instance](#)
- [Autogenerated Transaction Number Examples](#)

Transaction Type Prefix on a Custom Transaction Type Record

This topic explains how to set up a transaction type prefix for custom transaction types, enabling you to prepend an identifier to autogenerated transaction numbers. For an overview and related examples, see [Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples](#).

You set up the transaction type prefix on the custom transaction type record. In the following example, on the Transaction Number sublist:

- The Use Location box is checked. With this box checked, the resulting transaction number includes the location prefix if one is defined on the location record.
- The Prefix field has a transaction type prefix of PURCH. This prefix is added to the transaction numbers of all instances of this transaction type. In the generated transaction number, this prefix precedes the location (or subsidiary) prefix if one is used.
- The Update Initial Number box is checked, and an initial number is defined in the Initial Number field. This setting is optional and defines the number that should be used for the first transaction instance.

If you don't enter a value, NetSuite (in most cases) starts the sequence at 1. This initial number is used for transactions that don't use a location (or subsidiary) prefix. If a location (or subsidiary) prefix is used, this number is ignored and the initial number setting on the location (or subsidiary) record is used instead.

The screenshot shows the 'Custom Transaction Type' configuration page in NetSuite. The 'Transaction Numbers' subtab is active. The 'NAME' field is 'ABC Cust Purchase Type Trans'. The 'ID' is 'custompurchase_jl2_cust_purch_trans' and the 'INTERNAL ID' is '111'. The 'TRANSACTION STYLE' is 'Purchase'. The 'CLASS' is 'None', 'DEPARTMENT' is 'None', and 'LOCATION' is 'None'. The 'ALLOW VOID TRANSACTIONS USING REVERSING JOURNALS' checkbox is unchecked. The 'USE LOCATION' checkbox is checked, and the 'PREFIX' is 'PURCH'. The 'UPDATE INITIAL NUMBER' checkbox is checked, and the 'INITIAL NUMBER' is '35'. The 'CURRENT NUMBER' is '31'. The 'MINIMUM DIGITS' field is empty. The 'Save', 'Cancel', 'Change ID', and 'Actions' buttons are at the bottom.

For more information, see [Creating a Custom Transaction Type](#).

Location Prefix on a Location Record

This topic describes how to configure a location prefix on the location record so that autogenerated transaction numbers reflect specific location identifiers. For an overview and related examples, see [Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples](#).

You set up the location prefix on the location record.

Note: If you're using a custom entry form, make sure it shows the Location field. For help with custom forms, see [Adding Custom Forms for a Custom Transaction Type](#).

On the location record in the following example:

- The Transaction Number Prefix has a location prefix of KWLOC. prefix is added to the transaction numbers of all instances that are associated with this location. In the generated transaction number, this prefix follows the location (or subsidiary) prefix if one is used.
- The Transaction Numbers subtab, the Update Initial Number box is checked for the transaction type, and an initial number is defined in the Initial Number field. This setting is optional and defines the initial number that should be used for the first transaction instance that uses the location. If you don't enter a value, NetSuite (in most cases) starts the sequence at 1. If a value is entered here, it overrides the initial number on the custom transaction type record, if one is defined.

ActivitiesTransactionsListsReportsAnalyticsDocumentsSetupCustomization

Location

← → List Search Customize More

SaveCancelSearchActions

☐ LOCATION IS INACTIVE

NAME *
Warehouse 1

PARENT LOCATION

LOCATION TYPE
Warehouse

TIME ZONE
(GMT-05:00) Eastern Time (US & Canada)

LATITUDE

LONGITUDE

DOCUMENT NUMBER PREFIX

TRANSACTION NUMBER PREFIX
KWLOC

LOGO

LOCATION COSTING GROUP

☒ USE BINS

DEFAULT ALLOCATION PRIORITY

☒ MAKE INVENTORY AVAILABLE

☒ MAKE INVENTORY AVAILABLE IN WEB STORE

☐ INCLUDE IN SUPPLY PLANNING

☐ INCLUDE IN CONTROL TOWER

BUSINESS AREA

AddressUser Entry Predicted RiskDocument NumbersTransaction NumbersAutomatic Location AssignmentStore Fulfillment

TYPE ▲	UPDATE INITIAL NUMBER	INITIAL NUMBER	CURRENT NUMBER
ABC Cust Purchase Type Trans	☒	110	102
Meal	☐		
Rewards Credit	☐		

SaveCancelSearchActions

For more information, see [Defining Numbering Preferences for Subsidiaries and Locations](#).

Prefixes and Autogenerated Transaction Numbering on a Transaction Instance

This topic illustrates how the configured transaction type and location prefixes appear in a custom transaction instance, based on your setup. For an overview and related examples, see [Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples](#).

The following screenshot of a custom transaction instance shows the results of the first custom purchase transaction instance that uses prefixes and autogenerated transaction numbering, based on the preceding setup examples.

The generated transaction number is PURCHKWLOC110:

- **PURCH** is the transaction type prefix defined on the custom transaction type record.
- **KWLOC** is the location prefix defined on the location record.
- **110** is the initial number defined on the location record.

ActivitiesTransactionsListsReportsAnalyticsDocumentsSetupCustomizationCommerceSuiteAppsSupport

ABC Cust Purchase Type Trans

Acme Medical Supply

EditBackActions

Primary Information

TRANSACTION NUMBER
PURCHKWLOC110

REFERENCE NO.

VENDOR
Acme Medical Supply

ACCOUNT
Petty Cash

CURRENCY
USA

EXCHANGE RATE
1.00

☐ PAYMENT HOLD

DUE DATE
13.2.2022

DATE
15.12.2021

POSTING PERIOD
Dec 2021

MEMO

Classification

LOCATION
Warehouse 1

☐ EXCLUDE FROM GL AUDIT NUMBERING

Expenses and ItemsBillingLanded CostRelationshipsCommunicationRelated RecordsSystem InformationCustomGL ImpactE-Document

☐ LANDED COST PER LINE

Expenses 175.00Items 0.00

CATEGORY	ACCOUNT	AMOUNT	MEMO	DEPARTMENT	CLASS	LOCATION	CUSTOMER	PROJECT TASK	BILLABLE	AMORT. SCHEDULE
Lodging	63500 Travel & Ent	175.00		Marketing		Warehouse 1				

Autogenerated Transaction Number Examples

This topic provides sample autogenerated transaction numbers that demonstrate the different prefix combinations that can be used. For an overview and related examples, see [Autogenerated Transaction Number with Transaction Type and Location Prefixes Examples](#).

The following examples show the results of autogenerated transaction numbers based on prefixes used.

No Prefixes Used

If no transaction or location (or subsidiary) prefix is used, the transaction number is based on the initial number in the transaction type record. No prefixes are added to the transaction number.

The following screenshot shows a transaction number that does not use prefixes.

ABC Cust Purchase Type Trans

TR Fictious Company 1

EditBackActions

Primary Information

Transaction Number
30

Reference No.

Vendor
TR Fictious Company 1

Location Prefix Used

If a location prefix is used (either alone or with a transaction type prefix) the transaction number is based on the initial number on the location record.

The following screenshot shows a transaction number that uses a location prefix only.

ABC Cust Purchase Type Trans

ACME Shipping Co.

Edit

Back

Actions

▼ Primary Information

Transaction Number
KWLOC111

Reference No.

Vendor
ACME Shipping Co.

The following screenshot shows a transaction number that both a transaction prefix and a location prefix.

ABC Cust Purchase Type Trans

Acme Medical Supply

Edit

Back

Actions ▼

Primary Information

TRANSACTION NUMBER
PURCHKWLOC110

CURRENCY
USA

REFERENCE NO.

EXCHANGE RATE
1.00

VENDOR
Acme Medical Supply

☐ PAYMENT HOLD

DUE DATE

Transaction Type Prefix Used

If a transaction type prefix is used without a location (or subsidiary) prefix, the transaction number is based on the transaction number on the transaction type record.

ABC Cust Purchase Type Trans

Acme Medical Supply

Edit

Back

Actions

▼ Primary Information

Transaction Number
PURCH31

Reference No.

Vendor
Acme Medical Supply

Account Field Setup for Custom Transaction Types

The behavior of the Account field varies depending on the value of the transaction type's Credit box. If the Credit box is checked, the offset account is credited when an instance of the transaction type posts. The accounts that the user identifies on the transaction instance's Lines sublist are debited. If the Credit box is cleared, the behavior is reversed.

The value of the Credit box value can't be changed after a transaction is created. However, you can change the offset account. If you do change a transaction type's Account field, existing instances aren't

affected. If you edit existing instances, the new settings are applied and the account is changed for that specific instance.

To set up the account field for a custom transaction type, select one of the following:

- [Entering the Account for a Basic Transaction Type](#)
- [Entering the Account for Sales and Purchase Transaction Types](#)

Entering the Account for a Basic Transaction Type

This topic explains how to set or change the offset account for a custom transaction type that uses the Basic style. For an overview of account field options and behavior for custom transaction types, see [Account Field Setup for Custom Transaction Types](#).

When a transaction type has a style of basic, you must specify an offset account. The offset account shows the account to be debited (or credited) each time an instance of the transaction type is saved. You define this value by using the Account field for the transaction type.

To enter the account for a basic transaction type:

1. Go to one of the pages that lets you configure the Account field, by doing one of the following:
 - Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type. Then, click the **Accounting** subtab.
 - Go to Setup > Accounting > Accounting Preferences, and click the **Items/Transaction** subtab. On this page, under **Accounts**, the system lists several transaction types. This list includes all custom transaction types that use the Basic style.

Both of these pages provide a view of the same set of fields, so a change made on one page is visible on the other.
2. Use the **Account** list to select an account. This account is debited or credited each time users enter instances of this transactions type.
3. If you want this account to be credited when users enter instances of this transaction type, check the **Credit** box. In this case, the account named in the **Account** field is credited each time an instance of this transaction type is saved. The accounts that the user identifies in each transaction instance's Lines sublist are debited. If you want the reverse behavior, leave the box cleared.



Important: The value of the Credit box can't be changed after creating a transaction instance.

4. Click **Save**.

Entering the Account for Sales and Purchase Transaction Types

This topic explains how to configure the account field for custom transaction types with a Sales or Purchase style. For an overview of account field options and behavior for custom transaction types, see [Account Field Setup for Custom Transaction Types](#).

When the transaction type list style is sales or purchase, account information is required when you configure the custom transaction type. You can specify account settings that apply to all custom transaction instances, or you can give users the ability to enter account information when they create a transaction of that type.

To enter the account for sales and purchase transaction types:

1. If you want this account to be credited when users enter instances of this transaction type, check the **Credit** box. In this case, the account specified is credited each time an instance of this

transaction type is saved. The accounts that the user identifies in each transaction instance's Lines sublist are debited. If you want the reverse behavior, leave the box cleared.



Important: The value of the Credit box can't be changed after creating a transaction instance.

2. Choose an option:

- To let users to specify the account when creating a transaction, check the **Specify Account on Transaction** box.

The **Filter Account Type**, **All**, and **Default Account** fields are available only when the **Specify Account on Transaction** box is checked.

1. To restrict the accounts available to the user when creating a transaction, select the account types in the **Filter Account Type** field. Or, to make all accounts available, check **All**.
 2. To specify a default account to be used for transactions of this type, select the account from the **Default Account** list.
- To specify one account to be used for all transactions of this type, select an account from the **Account** list. This account is debited or credited each time users enter instances of this transaction type.

3. Click **Save**.

Statuses for a Custom Transaction Type

If appropriate, you can create statuses for each transaction type. You use statuses to represent the various stages of business processing required for instances of your transaction type. Benefits of using statuses include:

- By using statuses, you can keep track of each instance's progress in the context of your required business processing.
- You can designate each status as either posting or nonposting.
- You can choose to make the Status field visible and available to users, or you can hide it.
- You can create workflows and scripting solutions that use and set the Status field.

For more information about statuses, see the following topics:

- [Custom Transaction Type Statuses Overview](#)
- [Creating Statuses for Custom Transaction Types](#)
- [Modifying or Deleting a Custom Transaction Type Status](#)
- [Displaying or Hiding the Status Field for a Custom Transaction Type](#)
- [Referencing Custom Transaction Type Status in a Workflow](#)

Custom Transaction Type Statuses Overview

As described in [Statuses for a Custom Transaction Type](#), there are many advantages to creating statuses. However, before you create statuses, you should review the following:

- [When Statuses Exist, All Instances Must Have a Status](#)
- [When Statuses Exist, the Posting Body Field is Ignored](#)
- [Statuses Are User-Facing, Even When the Status Field is Hidden](#)

When Statuses Exist, All Instances Must Have a Status

When you create statuses for a transaction type, you also create a requirement that every instance of the transaction type have a status.

Because every transaction instance must have a status, you may want to consider how statuses should be assigned to transaction instances, both at the time they're created and at other key points. You have the following choices:

- You can expose the Status field on the transaction instance form. With this approach, a user entering or editing the transaction in the UI can manually assign a status to the instance. For more details about this choice, see [Displaying or Hiding the Status Field for a Custom Transaction Type](#).
- You can create a workflow or SuiteScript that sets the status. For details, see [Referencing Custom Transaction Type Status in a Workflow](#).

You can also use a combination of these approaches. However, be aware that it's best to have some method of assigning statuses, particularly to new transaction instances. If you don't actively assign a status to a new transaction instance, the system automatically assigns one. Specifically, the system assigns the first status that was created.

Note: There's only one exception to the rule that every transaction must have a status. If instances of a transaction were created before statuses were set up, they have an undefined status. They keep this undefined status unless someone edits and saves the transaction. At that point, a status is assigned.

When Statuses Exist, the Posting Body Field is Ignored

The Statuses subtab includes a Posting box, situated above the Statuses sublist. This box indicates whether instances of the transaction post – but only if no statuses exist for the transaction type.

Custom Fields Accounting Document Numbers Transaction Numbers **Statuses** Links Forms Permissions Translation

☐ Show Status Field ☒ Posting

Description *	Internal ID	Posting	Translation

✓ Add ✕ Cancel

Save Cancel Change ID Actions

If statuses **are** defined for the transaction type, the system ignores the Posting box. In this case, for each transaction, the system uses the Posting value associated with the appropriate status. These values are shown in the Posting column.

Custom Fields Accounting Document Numbers Transaction Numbers **Statuses** Links Forms Permissions Translation

☐ Show Status Field ☒ Posting

Description *	Internal ID	Posting	Translation
awaiting approval			
Approved		Yes	
Rejected			

✓ Add ✕ Cancel

Note: There's only one exception to this rule. If a transaction was entered before the statuses were created, in general, the posting status depends on the value of the body field. However, if the transaction is opened or edited following the creation of the statuses and then saved, a status is assigned to the transaction. After that, the system uses the Posting value associated with the status.

Statuses Are User-Facing, Even When the Status Field is Hidden

Users can see the status of a transaction instance by referring to a label displayed in the upper left corner of the page. This label is displayed both when the transaction instance is in edit mode and in view mode.

The screenshot shows the 'Fixed Asset Depreciation Entry' form. In the top left, there is a status label 'Awaiting Approval' which is highlighted with a red rectangle. Below this are buttons for 'Edit', 'Back', and 'Actions'. Under the 'Primary Information' section, the following details are visible: 'Entry No. 1', 'Amount 1,050.00', and 'Currency USA'.

Note that you can hide the Status field but not the status label. Choose status names carefully, as they'll be visible to all users with permission to view transaction instances.

Creating Statuses for Custom Transaction Types

Two statuses, Open and Fully Applied, are available automatically if the following conditions are met:

- The header line posts to an Accounts Receivable or Accounts Payable account
- The transaction is a posting sales or purchase transaction.

The Open and Fully Applied statuses aren't searchable.

Use the following procedure to create statuses for your custom transaction types. Note that you can create no more than 24 statuses for any type.

Important: After an instance of a transaction type has been created, your options for changing any of the type's statuses are limited to changing its name and the translations of its name. So proceed with caution when creating statuses.

To create statuses for a custom transaction type:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type.
2. Click the **Statuses** subtab.
3. To create a status, add a line to the sublist:
 - a. In the **Description** field, enter a name for the status.

- b. (Optional) Enter values in any of the following columns:
 - **Posting** – If you want the transaction instance to post to the GL when this status is reached, designate the status as posting. Click in the Posting column, and then check the box.
 - **Translation** – If your site uses the Multi-Language feature, enter translations for the name of the status. Click in the Translation column to display a popup window. In this window, you can enter a translation for each language your account uses. (The available languages are set at Setup > Company > Preferences > General Preferences, on the Languages subtab.) When you're finished entering translations, click **Done**.

 **Note:** The **ID** field is populated with an A-Z value that's automatically generated when the transaction type is saved. You can't enter a value in this column.

- c. After you've entered values for all needed fields, click **OK** to add the status to the list.
- 4. If you want the Status field to be visible and available on transaction instances in the UI, check the **Show Status Field** box. For more information about this field, see [Displaying or Hiding the Status Field for a Custom Transaction Type](#).
- 5. Click **Save**.

Modifying or Deleting a Custom Transaction Type Status

After you create statuses for your custom transaction type, you may want to make changes. Your ability to make changes varies, as follows:

- Before users have created transaction instances, you can change any field's value except ID. You can also delete statuses. Note that when you delete a status, its ID value is never reused.
- After an instance of a transaction type has been created, your options are limited to changing the name of the status and changing the translations of the name. You can't make other changes or delete statuses after transactions are created.

 **Note:** You can add new statuses at any time, as described in [Creating Statuses for Custom Transaction Types](#).

To modify or delete a status:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type.
2. Click the **Statuses** subtab.
3. If you want to edit an existing status, do any of the following:
 - To change the status name, edit the value in the **Description** column.
 - To change whether the status is posting, click in the **Posting** column and check or clear the box. If you can't display the box, it's because an instance of the transaction type already exists, and you can't change the field.
 - To change or add translations of the status name, click in the **Translation** column. The system displays a popup window that lists all the existing translations. Make changes as needed. When you're finished, click **Done**.
4. If you want to delete a status, complete the following steps:
 - a. Click in the row that represents the status you want to delete. The system displays several buttons.

- b. Click **Remove**. If you don't see a Remove button, it's because an instance of the transaction type already exists, and you can't delete the status.
- 5. Click **Save**.

Displaying or Hiding the Status Field for a Custom Transaction Type

If you've created statuses, you can display the Status field on transaction instances. When available, the Status field appears on the standard entry form as a list that the user can set.

Be aware that when you display the Status field, you make it available to anyone who has permission to edit instances of the transaction type using the standard entry form. However, you may want to limit access to the Status field. You may have users who need to create and edit transaction instances but shouldn't be permitted to change the Status field. In these situations, you should complete two tasks:

- Make the field available for the transaction type, as described in [Configuring the Transaction Type to Include the Status Field in the UI](#).
- Use custom forms and permissions to refine how and for which roles the field is available, as described in [Controlling User Access to the Status Field for Custom Transactions](#).

Configuring the Transaction Type to Include the Status Field in the UI

This topic explains how to display or hide the Status field on a standard entry form of a custom transaction type. For an overview of displaying or hiding the Status field, see [Displaying or Hiding the Status Field for a Custom Transaction Type](#).

To show the Status field, you need to configure it for the transaction type. This configuration makes the field viewable on the standard entry form for the type.

To configure the transaction type to include the Status field in the UI:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type.
2. Click the **Statuses** subtab.
3. If you want the **Status** field to be displayed on the transaction, check the **Show Status Field** box. If you want to hide the **Status** field, clear the box.
4. Click **Save**.

Controlling User Access to the Status Field for Custom Transactions

This topic describes how to use custom forms and role permissions to control which users can view or edit the Status field on transaction instances. For an overview of displaying or hiding the Status field, see [Displaying or Hiding the Status Field for a Custom Transaction Type](#).

If you have configured a transaction type so that the Status field is visible, you may want to restrict access to the field for certain roles. For example, you may prefer that, for some users, the field is either hidden or read-only. To create these restrictions, use the following procedure.

To refine the availability of the status field:

1. Create a custom form, and modify the settings for the Status field:
 - a. Create the form by opening the transaction type and clicking the **Forms** subtab. Locate the standard entry form for the type and click **Customize**. In response, the system displays details about a new custom entry form, which you can configure.
 - b. Click the **Screen Fields** subtab. Locate the row that represents the Status field, and make one of the following changes:
 - To hide the field from view, clear the box in the **Show** column.
 - To make the field read-only, change the **Display Type** field by doing one of the following: To gray out and disable the field, select **Disabled**. To make the field's current setting display as on-screen text, select **Inline Text**.



Note: For more details about working with custom forms, see [Adding Custom Forms for a Custom Transaction Type](#).

- c. To create the form, click **Save**.
2. Configure the role to permit access to the custom form that you created:
 - a. Open the role for editing by going to Setup > Users/Roles > Manage Roles. Identify the role you want to modify and click **Edit** or **Customize**.
 - b. Click the **Forms** subtab. The system displays a list of transactions that the role has permission to work with. This list includes one row for each of the transaction's available entry forms.
 - c. To remove the role's ability to use the standard entry form, locate the row that represents the form. Clear the box in the **Enabled** column.
 - d. To verify that the role has permission to use the new custom form, locate the row that represents the custom form. Make sure that the box in the **Enabled** column is checked.
 - e. Click **Save**.

Permissions Restrictions Forms Searches Users Preferences Dashboard Translation History						
Transaction	Item	Custom Record	Bill of Materials	Time	Entity	CRM
Other Record	Inventory Detail					
Enabled	Restricted	Type	Form Name		Preferred	
☒	☐	ABC Cust Purchase Type Trans	Custom Jen's Cust Purch Type Trans Form		☐	
☒	☐	ABC Cust Purchase Type Trans	Standard ABC Cust Purchase Type Trans Form		☐	
☒	☐	Assembly Build	Standard Assembly Build		☐	
☒	☐	Assembly Unbuild	Standard Assembly Unbuild		☐	
☒	☐	Bad Debt Accrual	Standard Bad Debt Accrual Form		☐	
☒	☐	Bill	Custom Vendor Bill		☐	
☒	☐	Bill	Non Location Bill		☐	



Note: Before the role can work with **any** entry form for the transaction type, the role must also have permission to view or use the transaction type. For details, see [Permissions for Custom Transaction Instances](#).

Referencing Custom Transaction Type Status in a Workflow

After you create statuses, a common next step is to create a workflow. As described in [Custom Transaction Type Statuses Overview](#), a workflow offers a useful way to set statuses for transactions instances.

For more details about working with workflows, see [Custom Transaction Types in Workflows](#).

You can also manipulate statuses using SuiteScript. For details on scripting with custom transaction types, see the help topic [Custom Transaction](#) in the SuiteScript Reference section.

Creating Links for a Custom Transaction Type


For each of your custom transaction types, you can create links, or menu paths, in the NetSuite UI. People in your organization can use these menu paths to access the transaction type's list view and entry form. For more details, see the following:

- [Planning for Custom Transaction Type Links](#)
- [Creating Links for a Custom Transaction Type by Editing the Transaction Type](#)
- [Creating Links for a Custom Transaction Type by Using the Customization Menu](#)

Planning for Custom Transaction Type Links

When you create a link to a custom transaction type, first you should consider the center that will host the link. A center is a view of NetSuite. Each role is linked to one center only. The center determines which tabs and menus display when a user logs in to NetSuite with the associated role. Before you begin creating links, you should identify which roles need to access the transaction type, and the centers that are associated with these roles. For more information about centers, see the help topic [Centers Overview](#).

For each link you create, you specify a **section**, **category**, and **label**. The following illustration shows how each of these elements appears in the UI.

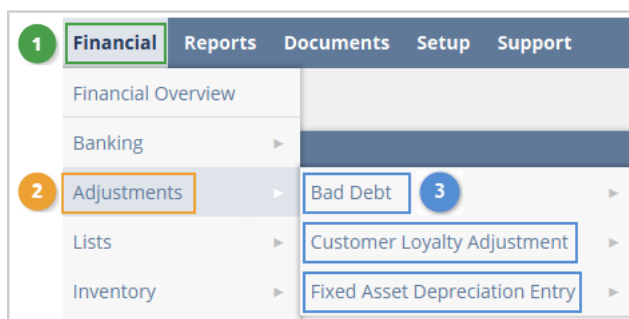

In the preceding illustration, the highlighted areas are defined as follows:

- 1 – A section. Sections are sometimes called tabs.
- 2 – A category
- 3 – Labels

When creating links, you can use standard NetSuite centers, sections, and categories, or you can create your own.

Note: Before members of a role can use links to a transaction type, the role must also have permission to view or use the transaction type. For details on granting these permissions, see [Permissions for Custom Transaction Instances](#).

Creating Links for a Custom Transaction Type by Editing the Transaction Type

If appropriate, you can create links for a custom transaction type by directly editing the custom transaction type.

Note: In these cases, you can't directly edit the transaction type as described in this topic. But you can still add links for the type. For details, see [Creating Links for a Custom Transaction Type by Using the Customization Menu](#).

To create links for a custom transaction type:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type.
2. Click the **Links** subtab.
3. Create a link by adding a line to the sublist, as follows:
 - a. Use the **Center** list to select a center.
 - b. Use the **Section** list to select the appropriate section, or tab. The available tabs vary depending on the center you selected. If you did not select a center, no tabs are listed.
 - c. Use the **Category** list to select the appropriate menu category.
 - d. (Optional) In the **Label** column, enter the label text you want to use. If you don't enter label text, the system uses the name of the transaction type.
 - e. (Optional) Enter translations for the link. Click in the **Translation** column to display a popup window. In this window, you can enter a translation for each language your account uses. (The available languages are set at Setup > Company > Preferences > General Preferences, on the Languages subtab.) When you're finished entering translations, click **Done**.
 - f. (Optional) Specify where the label will appear in relation to other labels in the category. Click in the **Insert Before** column to display a list, and select the appropriate label.
 - g. Click **Save**.
4. Create additional links as needed.
5. Click **Save**.

For full details on creating and editing custom transaction types, see [Creating a Custom Transaction Type](#) and [Editing a Custom Transaction Type](#).

Creating Links for a Custom Transaction Type by Using the Customization Menu

If you installed your custom transaction type from a bundle and the type has been locked to editing, you can't update the transaction type to include new links. Instead, you can use the Customization menu. With this method, you can update a custom category to include links to your custom transaction type. For details on creating custom categories, see the help topic [Creating Center Categories](#). For details on updating your custom category to include a link to your custom transaction type, see the help topic [Creating Center Links](#).

Adding Custom Forms for a Custom Transaction Type

When you create a custom transaction type, the system automatically creates a standard form for the type. People in your organization can use this form to enter instances of the transaction.

The standard form can be modified in some ways. For example, you can add custom fields to the standard form. However, you may prefer to make further changes, such as defining some fields as read-only, or changing the placement of fields. If you want to make these kinds of changes, you should create a custom form for the transaction type. For details, see the following:

- [Configuring Custom Forms for a Custom Transaction Type](#)
- [Designating a Custom Form as Preferred](#)

Note: One of the ways you can access custom forms is by using the transaction type's Forms subtab. The Forms subtab is available only when editing an existing transaction type. You won't see the Forms subtab when creating a new transaction type.

Configuring Custom Forms for a Custom Transaction Type

When you create a custom form, you create an alternative to the standard form. With your custom form, you can do any of the following:

- Change the names, visibility, and placement of subtabs, field groups, fields, sublists, and actions.
- Make fields read-only or editable.
- Add custom actions that process client SuiteScripts.
- Associate custom code (existing client SuiteScripts) with the form.
- Set the form as preferred for one or more roles.
- Choose whether to store the form with the record.

To add or modify a form for a custom transaction type:

1. Display a list of the existing forms by doing one of the following:
 - Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type. Then click the **Forms** subtab. In response, the system displays a list of the existing forms for this transaction type. The list includes the standard form for the transaction type and any custom forms that have been created.
 - Go to Customization > Forms > Transaction Forms. A list of all existing transaction forms appears.
2. Do one of the following:
 - To create a form based on the standard form for the type, click **Customize** beside the standard form.
 - To edit an existing custom form, click **Edit**.
3. Customize the form as needed. For more details about working with custom forms, see the help topic [Creating Custom Entry and Transaction Forms](#).
4. Click **Save**.

For information about making a form preferred, see [Designating a Custom Form as Preferred](#).

Designating a Custom Form as Preferred

Every custom transaction type has a default preferred form, which is displayed for roles without a set preference.

To set a default form for roles that don't have their own preference, use the following procedure. For help designating a form as preferred for a particular role, see the help topic [Defining Preferred Forms](#).

To set a custom form as preferred:

1. Display a list of the existing forms by doing one of the following:

- Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type. Then click the **Forms** subtab. The system displays a list of the existing forms for this transaction type. The list includes the standard form for the transaction type and any custom forms that have been created.
 - Go to Customization > Forms > Transaction Forms. The system displays a list of all existing transaction forms.
2. Locate the form that you want to designate as preferred. In the **Preferred** column, check the box.
 3. Click **Save**.

For information about configuring custom forms, see [Configuring Custom Forms for a Custom Transaction Type](#).

For full details about editing and creating custom transaction types, see [Creating a Custom Transaction Type](#) and [Editing a Custom Transaction Type](#).

Permissions for Custom Transaction Instances

For each custom transaction type, you can specify which roles can work with instances of the transaction type. When users create a new custom transaction type, NetSuite automatically adds a full-level permission for the role of the current user. The permission is added so that users can use the global search to find and work with the new custom transaction type.

When you grant a role access to transaction type instances, you can choose from several access levels. These levels are described in the following table.

Level	Users can:	Users can't:
View	View instances of the transaction type.	Edit, create, or delete transaction instances.
Create	View and create instances of the transaction type.	Edit or delete transaction instances.
Edit	View, create, and edit instances of the transaction type.	Delete transaction instances.
Full	View, create, edit, and delete instances of the transaction type.	—

There are two ways to configure permissions:

- [Configuring Permissions by Editing the Custom Transaction Type](#)
- [Configuring Permissions by Editing the Role](#)

The ability of a role to interact with custom transaction instances can be further refined by restricting the role's access to particular forms for the transaction type. For details on creating forms, see [Adding Custom Forms for a Custom Transaction Type](#). For details on disabling a role's access to a particular form, see the help topic [Setting Default Forms for Roles](#).

Note: For help giving a role permission to create and edit custom transaction types, see [Granting a Role Permission to Manage Custom Transaction Types](#).

Configuring Permissions by Editing the Custom Transaction Type

Use this procedure to grant a role permission to work with instances of a custom transaction type. You can also use these steps to modify or remove the role's access.

Note: Some transaction types installed from bundles may be locked and can't be edited. If a transaction type is locked, you can't directly edit it as described in this topic. But you can still configure permissions for the type. For details, see [Configuring Permissions by Editing the Role](#).

To grant a role access by editing the custom transaction type:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type.
2. Click the **Permissions** subtab. If any roles have previously been granted access to this transaction type, they're listed on this subtab.

As of 2019.2, the role of the user who created the custom transaction type is automatically assigned full-level permission. The permission level lets users search for custom transaction types in the global search.

3. To give a role access, add a line to the sublist, as follows:
 - a. Use the **Role** list to select the appropriate role.

Note: The Employee Center role isn't available for transaction types that use a Sales or Purchase transaction style.

- b. The default access level is **View**. If you want to change this level, click in the column to display a list. Use the list to select the appropriate level.
 - c. Click **Add**.
4. Add lines to the sublist to grant access to additional roles.
 5. If you want to make changes to any existing role's access, edit the appropriate Level value, then click **OK**.
 6. If you want to remove a role's access, click the name of the role to enable a series of buttons, then click **Remove**.
 7. Click **Save**.

For full details on editing and creating custom transaction types, see [Creating a Custom Transaction Type](#) and [Editing a Custom Transaction Type](#).

System Notes v2 for Custom Transaction Types

To access system notes from the Custom Transaction Type page, click System Notes located in the upper right of the page.

Custom Transaction configuration changes are logged using System Notes v2. For more information, see the help topic [Viewing System Notes v2](#).

Configuring Permissions by Editing the Role

Use this procedure to grant a role permission to work with instances of a custom transaction type. You can also use these steps to modify the role's access or remove the role's access.

If you installed your custom transaction type from a bundle and the type has been locked to editing, this method is the only one you can use to configure permissions.

To grant a role access by editing the role:

1. Go to Setup > Users/Roles > Manage Roles. Locate the role that needs access to the transaction type, and click the corresponding **Edit** or **Customize** link. The system displays a page that lets you edit the role.
2. Locate the Transactions subtab on the Permissions subtab, which should be displayed by default. Do one of the following:
 - If you want to grant the role access to the transaction type, add a line to the sublist:
 1. In the **Permission** column, use the list to select the appropriate transaction type.
 2. In the **Level** column, select the appropriate access level.
 3. Click **Add**.
 - If the role already has access, and you want to make a change, modify the value in the **Level** column as appropriate. Then click **OK**.
 - If the role already has access, and you want to remove the role's access, click the name of the transaction type to enable a series of buttons. Click **Remove**.
3. Click **Save**.

System Notes v2 for Roles and Permissions

To access System Notes from the Role page, click System Notes located in the upper right of the page.

For more information, see the help topic [Viewing System Notes v2](#).

Adding Translations for a Custom Transaction Type

If your account uses the Multi-Language feature, you can add translations for your transaction type's name.

 **Note:** For help entering translations for link labels, see [Creating Links for a Custom Transaction Type](#).

To add translations for a custom transaction type:

1. Go to Customization > Lists, Records, & Fields > Transaction Types, and click the name of the appropriate transaction type.
2. Click the **Translations** subtab.
The system displays a list of the languages configured for your account. These languages are configured at Setup > Company > Preferences > General Preferences, on the Languages subtab.
3. In the **Name** column, enter the appropriate translation for each language, as needed.
4. Click **Save**.

For full details on editing and creating custom transaction types, see [Creating a Custom Transaction Type](#) and [Editing a Custom Transaction Type](#).

Custom Transaction Type Association with a Custom GL-Lines Plug-in Implementation

With the Custom GL Lines plug-in, you can create logic that automatically creates a GL impact. A plug-in implementation can calculate GL impact based on data that users enter in the standard or custom fields

on the transaction instance entry form. GL impact can also originate from values entered in a custom UI created by using SuiteScript objects. For more information, see the help topic [Custom GL Lines Plug-in Overview](#).

To use a plug-in implementation, you can configure the implementation to apply to one or more transaction types.

You can associate any custom transaction type with a Custom GL Lines plug-in implementation. If a custom transaction type has a list style of Header Only, it **must** be associated with a plug-in implementation before it'll have any accounting impact.

After you complete the setup, configure the plug-in the same way you would for a standard transaction type. On the configuration page for the plug-in implementation, custom transaction types are listed with standard types.

For more information, see the help topic [Configuring the Custom GL Lines Plug-in Implementation](#).

Custom Transaction Type Association with a SuiteTax Plug-in

With the SuiteTax plug-in, you can create logic that automatically calculates various tax amounts on individual sales or purchase custom transaction types. A plug-in implementation can calculate tax based on data that users enter in the standard or custom fields on the transaction instance entry form. Calculated tax can also originate from values entered in a custom UI created by using SuiteScript objects. For more details, see the SuiteTax documentation available to SuiteTax providers.

To use a plug-in implementation, you can configure the implementation to apply to one or more sales or purchase transaction types. After you complete the setup, configure the plug-in the same way you would for a standard transaction type. On the configuration page for the plug-in implementation, custom transaction types are listed with standard types.

In the SuiteTax plug-in, use the hidden customtype field to obtain information about a specific sales or purchase custom transaction type.

For example, you can use the customtype field to get the custom transaction script ID with the following code (which uses the SuiteScript [N/record Module](#)):

```
1 | customTransactionTypeID = customTransaction.getValue('customtype')
2 | customTransactionType = record.load({ type: 'customtransactiontype', id: customTransactionTypeID
3 | })
4 | customTransactionType.getValue('scriptid')
```

Deleting Custom Transaction Types

You might need to delete a custom transaction type in some cases. You can delete individual custom transaction types or those installed with a bundle.

See the following topics:

- [Deleting Individual Custom Transaction Types](#)
- [Deleting Custom Transaction Types with a Bundle](#)

Deleting Individual Custom Transaction Types

If needed, you can delete custom transaction types. However, note that you can't delete a custom transaction type in any of the following situations:

- If instances of the type exist.
- If other dependent records exist (for example, a custom workflow that references the transaction type).
- If the transaction type was created by a bundle and was locked to editing.

If you're permitted to delete the transaction type, follow these steps to remove the type.

To delete a custom transaction type:

1. Go to Customization > Lists, Records, & Fields > Transaction Types.
2. In the **Edit** column, click the name of the transaction type you want to delete.
3. To display a popup menu, click **Actions**. Then click **Delete**.
The system will ask if you're sure you want to delete the transaction type.
4. Click **OK**.

The custom transaction type and any printing templates associated with the transaction type are deleted from your account.

Deleting Custom Transaction Types with a Bundle

Custom transaction types can be removed as part of a bundle removal or a bundle update.

 **Note:** Deleting custom transaction types applies only to bundle operations. If a custom transaction type was created manually in the UI and a transaction instance exists, you can't delete the transaction type.

When a bundle operation is used to delete a transaction type, the system takes the following actions with any existing instances of that transaction type:

- The transactions are migrated to a new transaction type called Deprecated Custom Transaction.
- The transactions are locked to editing, although they can still be voided.
- If the transactions are in open periods, they can be deleted.
- Body fields are added to the transaction showing:
 - The name of the custom transaction type that was deleted.
 - The status of the transaction at the time it was deleted.

- Associated printing templates are deleted.
- Custom fields are discarded unless they're related to a custom segment that has GL impact.

To see a list of transactions that were instances of deleted custom transaction types, use the Transaction search type. Set the Type field to Deprecated Transaction Type.

Creating Sales and Purchase Custom Transaction Instances

After a sales or purchase transaction type has been created, authorized users can create transaction instances.

To create a custom sales or purchase transaction instance:

1. From the menu or global search, locate and open the required sales or purchase custom transaction. For more information, contact your administrator.
2. Click **New Transaction**.
3. Complete the transaction instance by referring to the following sections, as required:
 - [Creating a Sales Custom Transaction Instance](#)
 - [Creating a Purchase Custom Transaction Instance](#)

Creating a Sales Custom Transaction Instance

After custom sales transaction types have been created, authorized users can enter transaction instances. For more information, see the help topic [Creating an Invoice](#).

To learn more about the available features, see the following subtab topics:

- [Items Subtab of a Sales Custom Transaction](#)
- [Promotions Subtab of a Sales Custom Transaction](#)
- [Shipping Subtab of a Sales Custom Transaction](#)
- [Billing Subtab of a Sales Custom Transaction](#)
- [SuiteTax Subtab of a Sales Custom Transaction](#)

Items Subtab of a Sales Custom Transaction

On the Items subtab of a new sales custom transaction instance, you can sell items, decrease stock levels for inventory, and calculate COGS. You can apply promotions, discounts, and revenue recognition, as well as sell gift certificates, and more. For more information, see [Sales and Purchase Functionality Available in Custom Transactions](#).

For more information about creating a new sales custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

Complete the following steps as needed:

1. Click the **Items** subtab.
2. Add an item to the sales transaction.

See the following topics:

- [Promotions for Items on a Sales Custom Transaction](#)
- [Discounts for Items on a Sales Custom Transaction](#)
- [Gift Certificates for Items on a Sales Custom Transaction](#)
- [Revenue Recognition for Items on a Sales Custom Transaction](#)

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Promotions for Items on a Sales Custom Transaction

 **Note:** The Promotion and Coupon fields appear on the Items subtab only if SuitePromotions isn't enabled. For information about adding promotions using SuitePromotions, see [SuitePromotions for Promotions on a Sales Custom Transaction](#).

This topic describes how to apply promotions to items in sales custom transactions, including how discounts are calculated and displayed. For an overview of using items on sales transactions, see [Items Subtab of a Sales Custom Transaction](#).

To apply a promotion, in the **Coupon Code** field or the **Promotion** field, enter a valid code. The remaining **Coupon Code** or **Promotion** field fills in automatically. If applicable, the **Discount Item** and **Rate** fields fill in automatically, because they're set up during promotion creation as a flat rate or a percentage. For more information, see [Discounts for Items on a Sales Custom Transaction](#).

Depending on the promotion setup, one of the following occurs:

- The promotion discount is calculated automatically. The Discount Item line in the Summary on the upper right corner of the page shows the promotion discount amount.
- The promotion isn't calculated automatically. Click **Calculate**. The Discount Item line in the Summary on the upper right corner of the page shows the promotion discount amount.
- The promotion is added as a separate line item. The amount is deducted directly from the Subtotal line in the Summary on the upper right corner of the page.

For more information, see the help topic [Create or Verify Discount Item](#).

For more information, see the help topic [Promotions](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Discounts for Items on a Sales Custom Transaction

This topic describes the different ways you can apply discounts in sales custom transactions, whether automatically, at the line item level, or for the overall order. For more information about adding items, see [Items Subtab of a Sales Custom Transaction](#).

You can apply discounts in the following ways:

- Automatically – Discount items and rates are set up during the promotion creation as a flat rate or a percentage. If they apply to the sales transaction, they're added automatically to the Discount Item and Rate fields. You can optionally change these entries. The Discount Item line in the Summary on the upper right corner of the page shows the promotion discount amount.
- On the Item line – After adding an item line, create a discount item code or select an existing code. This discount is applied to the item. The Rate and Amount and fields may fill in automatically. You can change these entries.

When you apply a line item discount, the discount appears as a separate line item. The amount is deducted directly from the Subtotal in the Summary on the upper right corner of the page instead of appearing as a discount on the Discount Item line.

- On the Items subtab, when SuitePromotions is enabled – In the Discount Item field, select a discount item. The Rate field is filled in automatically. The Discount Item line in the Summary on the upper right corner of the page shows the promotion discount amount.

 **Note:** You can apply both line item and overall order discounts to the same sales transaction. If you apply both discounts, two discounts are applied. The discount on the individual item is applied first and then the overall Discount Item field discount is applied to the remaining balance owing.

For more information, see the help topic [Create or Verify Discount Item](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Gift Certificates for Items on a Sales Custom Transaction

This topic describes how to sell and process gift certificate items on sales custom transactions. To learn more about managing items on custom transactions, see [Items Subtab of a Sales Custom Transaction](#).

Gift certificate items enable customers to purchase store credit that they can send to someone as a gift. To sell a gift certificate, you add the gift certificate as an item on a sales transaction.

To sell a gift certificate:

1. Enter a gift certificate item or select one from the list.
2. In the **Amount** field, enter the gift certificate amount.
3. Select the **Gift Certificate** field. In the popup window, enter details in the **From**, **Recipient Name**, **Recipient Email**, and **Gift Message** fields.
4. Click **Save**.

After you sell a gift certificate, you can apply it to a sales transaction. For more information about applying a gift certificate, see [Gift Certificates for Billing on a Sales Custom Transaction](#) on the [Billing Subtab of a Sales Custom Transaction](#).

For more information, see the help topic [Gift Certificates](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Revenue Recognition for Items on a Sales Custom Transaction

This topic describes how to set up revenue recognition for items in sales custom transactions, including adding schedules and using advanced revenue management features. For an overview of working with items on sales transactions, see [Items Subtab of a Sales Custom Transaction](#).

Revenue recognition features enable you to defer revenue for recognition in multiple future time periods. You can add a revenue recognition schedule on the item line, as described in the following procedure. For more information, see the help topics [Revenue and Expense Recognition](#) and [Editing a Revenue Recognition Schedule](#).

If enabled, the system uses [Advanced Revenue Management \(Essentials\)](#).

To add a revenue recognition schedule:

1. On the item line, in the **Rev. Rec. Schedule** field, select an existing schedule to use. If you want to create a new schedule, click **New**. For more information, see the help topic [Defining a Revenue Recognition Template](#)
2. If promoted, enter the start and end dates in the **Rev. Rec. Start Date** and **Rev. Rec. End Date** fields.
3. Save the transaction.
4. Under **Rev. Rec. Schedule**, a schedule link replaces the template name. To open the Revenue Recognition Schedule page to see how the amounts will be split, click the link.

When you select an item and click the open icon, a page opens. The title of the page is based on the item or noninventory item you selected. On the Revenue Recognition/Amortization subtab, configure advanced revenue recognition. For more information, see the help topic [Revenue and Expense Recognition Overview](#).

Advanced Revenue Management (Essentials)

Advanced Revenue Management (Essentials) automates revenue forecasting, recognition, reclassification, deferral, and auditing through a rule-based event handling framework. If Advanced Revenue Management (Essentials) is enabled, you don't enter anything at the transaction. Revenue elements and arrangements are automatically created for the custom transaction when you next run Update Revenue Arrangements and Revenue Recognition Plans. For more information, see the help topic [Setup for Advanced Revenue Management \(Essentials\)](#).

Advanced Revenue Management (Revenue Allocation)

The Advanced Revenue Management (Revenue Allocation) is an add-on feature to Advanced Revenue Management (Essentials). This feature supports the use of fair value pricing, range checking, and fair value formulas to allocate revenue across several performance obligations.

Advanced Revenue Management (Revenue Allocation) supports fair values based on the method of your choice. You can use standalone selling price (SSP), vendor-specific objective evidence (VSOE), best estimate of selling price (ESP), third party evidence (TPE), or some other method. These fair values are used to determine the revenue allocation ratios for multi-element transactions. For more information, see the help topic [Setup for Advanced Revenue Management \(Revenue Allocation\)](#).

Apply

 **Note:** The Apply subtab is available only for sales credit transactions.

On a sales custom credit transaction, you can apply a transformed custom transaction to the source transaction. To apply a credit transaction to the source transaction, check the **Apply** box beside the debit transaction you want to apply the credit to.

The Apply subtab has the same fields as the Apply subtab for credit memo and displays the same set of transactions. For more information, see the help topic [Applying a Customer Credit Memo](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Promotions Subtab of a Sales Custom Transaction

On the Promotions subtab of a new sales custom transaction instance, you can apply SuitePromotions, shipping discounts, and more.

For more information about creating a new sales custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

SuitePromotions for Promotions on a Sales Custom Transaction

Note: The Promotions subtab appears only if you have SuitePromotions enabled. For information about using SuitePromotions, see the help topic [Migrating to SuitePromotions](#).

On the SuitePromotions subtab, you can calculate apply SuitePromotions.

To apply a promotion:

1. Click the **Promotions** subtab.
2. To automatically apply promotions, check the **Automatically Apply Promotions** box. All applicable promotions are applied. To clear promotions that have been automatically applied, clear the **Automatically Apply Promotions** box and click **Clear All Lines**.
3. To manually add promotions, in the **Promotion** field, enter a SuiteItem promotion and click **Add**. Repeat for any other applicable promotions.
4. To view the applied promotions on the line item list, click the **Items** subtab. The Discount Item line in the Summary on the upper right corner of the page shows the promotion discount amount.

Note: Depending on your discount accounting settings, the discount can be deducted directly from the item total. In this case, the promotion discount does not display as a separate item on the Discount Item line in the Summary. For more information, see the help topic [Create or Verify Discount Item](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Shipping Subtab of a Sales Custom Transaction

On the Shipping subtab of a new sales custom transaction instance, you can calculate shipping costs.

For more information about creating a new sales custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

To calculate shipping costs:

1. Click the **Shipping** subtab.
2. In the **Shipping Carrier** field, select a shipping carrier, such as FedEx or UPS.
3. In the **Shipping Method** field, select a shipping method, such as FedEx Ground UPS.
4. In the **Shipping Cost** field, to have the amount calculated automatically, click the calculator icon. Alternately, to manually set the shipping cost, enter a dollar value.

Note: You must have View permissions for both Item Fulfillments and Sales Orders to retrieve shipping costs using the calculate the shipping costs calculator.

For more information, see the help topic [Shipping](#).

When an eligible SuitePromotion is added, the shipping discount is applied after you calculate the shipping costs. For more information, see the help topic [Shipping Promotions and Multiple Shipping Routes](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Billing Subtab of a Sales Custom Transaction

On the Billing subtab of a new sales custom transaction instance, you can apply gift certificates and installments, as well as perform other billing-related tasks like setting terms, adding billing addresses, and so on.

See the following topics:

- [Gift Certificates for Billing on a Sales Custom Transaction](#)
- [Installments for Billing on a Sales Custom Transaction](#)

For more information about creating a new sales custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Gift Certificates for Billing on a Sales Custom Transaction

This topic describes how to process, apply, and manage gift certificates within billing transactions. For an overview of billing on sales transactions, see [Billing Subtab of a Sales Custom Transaction](#).

You can apply a gift certificate to a custom sales transaction instance. Before you can apply a gift certificate, you must sell it. For information about selling a gift certificate, see [Gift Certificates for Items on a Sales Custom Transaction](#) on the [Items Subtab of a Sales Custom Transaction](#).

To apply a gift certificate:

1. Click the **Billing** subtab.
2. In the Payment section **Gift Certificate** field, enter the gift certificate number or select the appropriate gift certificate number from the list.
3. The value in the **Amount Applied** field defaults to one of the following:
 - The amount of the purchased item, if the item is less than the gift certificate value.
 - The full value of the gift certificate, if the item cost is more than the gift certificate value.
4. The **Available Credit** field shows any remaining balance on the gift certificate.
5. The Gift Certificate line in the Summary on the upper right corner of the page shows the gift certificate amount applied. You can apply additional gift certificates to the same sales transaction.

For more information about gift certificates, see the help topic [Gift Certificates](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Installments for Billing on a Sales Custom Transaction

This topic describes how to set up and work with installment payment schedules in billing transactions. For an overview of using billing on sales transactions, see [Billing Subtab of a Sales Custom Transaction](#).

You can specify installments for your customers who pay for items over time using installment-based payments.

To set up sales custom transaction installment-based payments:

1. Click the **Billing** subtab.
2. In the **Terms** field, select an installment-based term. An Installments subtab is added beside the Payment subtab.

3. Click the **Installments** subtab. Installment due dates and amounts are listed based on the installment terms.
4. To override the automatically generated installment amounts, check the **Override** box. Then select a date and manually enter the installment payment amount.

 **Note:** The remaining amounts don't automatically adjust to cover any difference created by the manual adjustment. You must manually ensure the totals entered equal the amount owed. You can't save the transaction until the installment amounts equal the total.

For more information about creating an installment term for a sales transaction, see the help topic [Creating Installments](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

SuiteTax Subtab of a Sales Custom Transaction

When the SuiteTax feature is enabled, you can apply taxes on the Tax Details subtab of a new sales custom transaction instance.

For more information about creating a new sales custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

To use SuiteTax to apply taxes to a transaction:

1. Click the **Tax Details** subtab.
2. Modify the values in the **Tax Type**, **Tax Code**, **Tax Basis**, **Tax Rate**, and **Tax Amount** columns for existing tax lines. All tax information fields are required.

For more information, see the help topic [Tax Details on Transactions in SuiteTax](#).

For information about other subtabs available for sales custom transactions, see [Creating a Sales Custom Transaction Instance](#).

Creating a Purchase Custom Transaction Instance

After custom purchasing transaction types have been created, authorized users can enter transaction instances. For more information, see the help topic [Vendor Bills](#).

To learn more about available features, see information about the following subtab topics:

- [Expenses and Items Subtab of a Purchase Custom Transaction](#)
- [Landed Costs Subtab of a Purchase Custom Transaction](#)
- [Billing Subtab of a Purchase Custom Transaction](#)
- [SuiteTax Subtab of a Purchase Custom Transaction](#)

Expenses and Items Subtab of a Purchase Custom Transaction

On the Expenses and Items subtab of a new purchase custom transaction instance, you can purchase items, add expenses, apply Amortization and Landed Costs and, and more. For more information, see [Sales and Purchase Functionality Available in Custom Transactions](#).

For more information about creating a new purchase custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

Complete the following steps as needed:

1. Click the **Expenses and Items** subtab.
2. Click the **Items** subtab.
3. Add an item to the purchase transaction.

See the following topics:

- [Landed Costs for Expenses and Items on a Purchase Custom Transaction](#)
- [Amortization for Expenses and Items on a Purchase Custom Transaction](#)

For information about other subtabs available for purchase custom transactions, see [Creating a Purchase Custom Transaction Instance](#).

Landed Costs for Expenses and Items on a Purchase Custom Transaction

This topic explains how to calculate and apply landed costs, including shipping, insurance, and other related expenses, to line items in a purchase custom transaction. For an overview of using expenses and items on purchase transactions, see [Expenses and Items Subtab of a Purchase Custom Transaction](#).

Landed cost is the total amount paid for a product including shipping, and other additional costs.

 **Note:** You can have multiple categories for custom cost categories. The following procedures use example categories of Shipping and Insurance. These categories can differ from the custom categories your company uses. For more information, see the help topic [Creating Cost Categories](#).

To calculate landed costs per line item on the Expenses and Items subtab:

1. Click the **Expenses and Items** subtab. Then in the **Items** sublist, enter item details.
2. Check the **Landed Cost Per Line** box. Note that when this box is checked, the fields on the Landed Costs subtab are disabled.
3. Click the **Landed Cost** field. In the popup window, complete the following:
 - a. In the **Cost Category** field, enter a custom cost category such as Shipping or Insurance.
 - b. In the **Amount** field, enter a dollar amount for the cost.
 - c. Click **Add**.
 - d. Create additional cost categories as required.
 - e. To finish, click **OK**.
4. Click **Save**.

You can also calculate landed costs on the [Landed Costs Subtab of a Purchase Custom Transaction](#).

For more information about landed costs, see the help topic [Landed Cost Overview](#).

For information about other subtabs available for purchase custom transactions, see [Creating a Purchase Custom Transaction Instance](#).

Amortization for Expenses and Items on a Purchase Custom Transaction

This topic describes how to use the amortization feature to defer and allocate expenses over multiple periods in a purchase custom transaction. For an overview of using expenses and items on purchase transactions, see [Expenses and Items Subtab of a Purchase Custom Transaction](#).

The amortization feature enables you to record expenses independently from receiving bills and making payments, so you can defer expenses and spread their impact across multiple future time periods. For more information, see the help topic [Expense Amortization](#).

To create an amortization schedule:

1. In the **Amort. Schedule** field, select a template such as Amortization Template, or select **New** and enter details. For more information, see the help topic [Creating Amortization Templates](#).
2. In the **Amort. Start** and **Amort. End** fields, enter start and end dates for the amortization period.
3. Click **Save**.
4. A link appears in the **Amortization Schedule** Field. To open the Amortization Schedule page to see how the amounts will be amortized, click the link.

When you select an item and click the open icon, a page opens. The title of the page is based on the item or noninventory item you selected. On the page, there's a Revenue Recognition/Amortization subtab. Use the options on the Revenue Recognition/Amortization subtab to configure amortization. For more information, see the help topic [Revenue and Expense Recognition Overview](#).

For information about other subtabs available for purchase custom transactions, see [Creating a Purchase Custom Transaction Instance](#).

Landed Costs Subtab of a Purchase Custom Transaction

On the Landed Costs subtab of a new purchase custom transaction instance, you can calculate landed cost by weight, quantity, or value. You can enter the cost amount manually or use the amount from the current transaction or another transaction.

For more information about creating a new purchase custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).



Note: You can have multiple categories for custom cost categories. The following procedures use example categories of Shipping and Insurance. These categories can differ from the custom categories your company uses. For more information, see the help topic [Creating Cost Categories](#).

To calculate Landed Costs on the Landed Costs subtab:

1. Click the **Expenses and Items** subtab and clear the **Landed Cost Per Line** box. If this box is checked, the fields on the Landed Costs subtab are unavailable.
2. On the **Items** subtab, enter item details.
3. In the **Landed Cost Category** field, enter a category for the landed cost. This category is required if the landed cost source will be anything other than Manual.
4. Click the **Landed Costs** subtab.
5. In the **Cost Allocation Method** field, select **Weight**, **Quantity**, or **Value**.
6. For each applicable cost field (for example, Shipping and Insurance) and source combination, choose an option:
 - In the **Source** field, enter **Manual**. Then enter a weight, quantity, or dollar value based on the cost allocation method selected.
 - In the **Source** field, enter **This Transaction**. The cost field fills in automatically with the amount calculated on the line items.
 - In the **Source** field, enter **Other Transaction** or **Other Transaction (exclude tax)**. Then in the related **Transaction** field, select a transaction. The cost field fills in automatically with the amount from the selected transaction.

7. Click **Save**.

You can also calculate landed costs by line item on the Landed Costs subtab. For more information, see [Landed Costs for Expenses and Items on a Purchase Custom Transaction](#).

For more information about landed costs, see the help topic [Landed Cost Overview](#).

For information about other subtabs available for purchase custom transactions, see [Creating a Purchase Custom Transaction Instance](#).

Billing Subtab of a Purchase Custom Transaction

On the Billing subtab of a new purchase custom transaction instance, you can create [Installments](#), as well as perform other billing-related tasks like setting terms and International Commercial Terms (incoterms), and so on.

For more information about creating a new purchase custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

Installments

You can create installments for paying bills using installment-based payments. Each installment is treated as a separate bill and has its own reference number.

To set up purchase custom transactions for installment-based payments:

1. Click the **Billing** subtab.
2. In the **Terms** field, select an installment-based term. An Installments subtab is added. On the **Installments** subtab, installment due dates and amounts are listed based on the installment terms.
3. To override the automatically generated installment amounts, check the **Override** box. Then select a date and manually enter the installment payment amount.

 **Note:** The remaining amounts don't automatically adjust to cover any difference created by the manual adjustment. You must manually ensure the totals entered equal the amount owed. You can't save the transaction until the installment amounts equal the total.

For information about creating an installment term for a purchase transaction, see the help topic [Creating Installments](#).

For information about other subtabs available for purchase custom transactions, see [Creating a Purchase Custom Transaction Instance](#).

SuiteTax Subtab of a Purchase Custom Transaction

When the SuiteTax feature is enabled, you can apply taxes on the Tax Details subtab of a new purchase custom transaction instance.

For more information about creating a new purchase custom transaction instance, see [Creating Sales and Purchase Custom Transaction Instances](#).

To use SuiteTax to apply taxes to the transaction:

1. Click the **Tax Details** subtab.
2. Modify the values in the **Tax Type**, **Tax Code**, **Tax Basis**, **Tax Rate**, and **Tax Amount** columns for existing tax lines. All tax information fields are required.

For more information, see the help topic [Tax Details on Transactions in SuiteTax](#).

For information about other subtabs available for purchase custom transactions, see [Creating a Purchase Custom Transaction Instance](#).

Printing Custom Transaction Instances

When you print custom transaction instances, advanced PDF/HTML templates are used to format the output. You can customize an advanced template for the transaction type to ensure that the information you want is included in the printout.

Note: Basic printing isn't supported on custom transactions. For information about advanced printing templates, see the help topic [Advanced PDF/HTML Templates](#).

Customizing the Template for Printing Custom Transactions

After you create a custom transaction type, a standard advanced PDF/HTML template for that transaction type is created automatically. You can customize the template as required.

To customize the advanced template:

1. Go to Customization > Forms > Advanced PDF/HTML Templates. The Record Type column shows the custom transaction type ID.

Edit	Name	From Bundle	Script ID	Type	Record Type	Preferred
Customize	Standard Vendor Bill PDF/HTML Template		STDTPPLSVENDBILL	Bill		☐
Customize	Standard Vendor Credit PDF/HTML Template		STDTPPLSVENDCRED	Bill Credit		☐
Edit	ANZ Credit Adjustment Note		CUSTTMPL_ANZ_CREDIT_MEMO	Credit Memo		☐
Edit	Custom Saved Search Export PDF/HTML Template		CUSTTMPL_221_563214_103	Custom Record	CUSTOMRECORD_SAVED_SEARCH_EXPORT	☐
Customize	Standard E-Document Pref Automation PDF/HTML Template	F	STDTPMLCR_EL_AUTOMATION_PREF	Custom Record	CUSTOMRECORD_EL_AUTOMATION_PREF	☐
Customize	Standard Additional Lot Fields PDF/HTML Template	F	STDTPMLCR_ALN_INVENTORY_DETAIL_CONFIG	Custom Record	CUSTOMRECORD_ALN_INVENTORY_DETAIL_CONFIG	☐
Customize	Standard Item Additional Lot Fields PDF/HTML Template	F	STDTPMLCR_ALN_CONFIG_ELEMENT_MAPPING	Custom Record	CUSTOMRECORD_ALN_CONFIG_ELEMENT_MAPPING	☐
Customize	Standard Test custom record saved search 3 PDF/HTML Template	F	STDTPMLCR1020	Custom Record	CUSTOMRECORD1020	☐

2. Click **Customize** beside the template that you want to customize.
3. Make the required changes to the template. For information, see the help topic [Advanced Templates Customization in the Template Editor](#).

Associating the Template with the Transaction Type

After you customize an advanced template, set the custom forms for the custom transaction type to use the template. For more information, see the help topic [Setting Custom Forms to Use Advanced Templates](#).

Custom Transaction Types in Workflows


If appropriate, you can reference your custom transaction types when you create workflows. For details, see the following topics:

- [Referencing Status in a Transaction Type Workflow Action](#)

- [Using Status as a Transaction Type Workflow Condition](#)
- [Sales Custom Transaction Transform Action Workflow Example](#)
- [Using Workflows with SuiteScript for Custom Transaction Transformations](#)

Referencing Status in a Transaction Type Workflow Action

For certain types of workflow actions, you may want to reference the status of a custom transaction type. In these cases, you can identify the status by using the Parameters section of the Workflow Action page. To reference the status field, set the Field value to Custom Transaction Status.

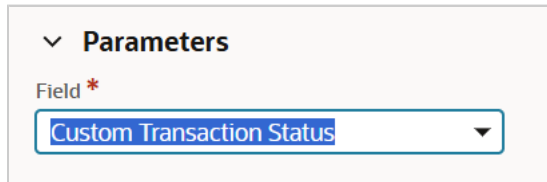


Parameters

Field *

Custom Transaction Status

If you're using the Set Field Value action, you can choose the Static Value option and select the status from the Selection list. The list shows all available custom transaction statuses, organized by custom transaction type. Select the appropriate combination of transaction type and status.

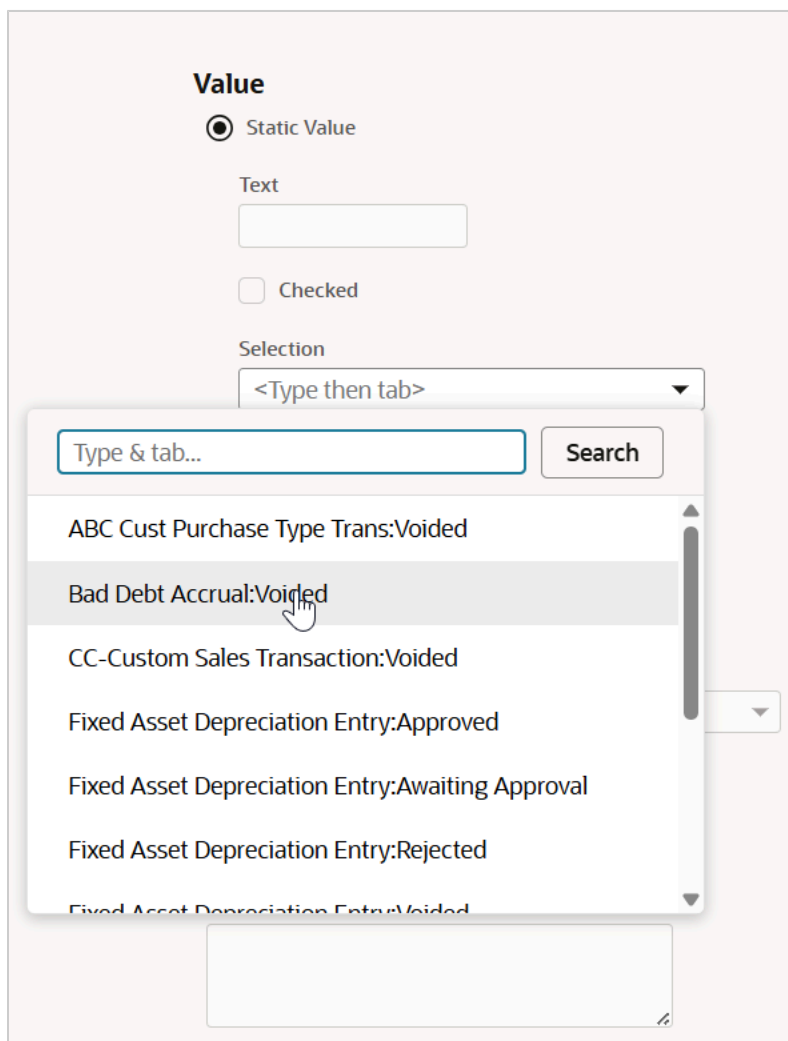

Value

☒ Static Value

Text

☐ Checked

Selection


<Type then tab>

Type & tab... Search

- ABC Cust Purchase Type Trans:Voided
- Bad Debt Accrual:Voided
- CC-Custom Sales Transaction:Voided
- Fixed Asset Depreciation Entry:Approved
- Fixed Asset Depreciation Entry:Awaiting Approval
- Fixed Asset Depreciation Entry:Rejected
- Fixed Asset Depreciation Entry:Voided

Using Status as a Transaction Type Workflow Condition

If appropriate, you can use a custom transaction type's status as a workflow condition. On the Workflow Condition page, set Record Type to Transaction and Field to Status. (Note that this approach is different from the way you reference status in a workflow action. With that form, you set Status to Custom Transaction Status.) In the Selection field, choose the appropriate combination of transaction type and status.

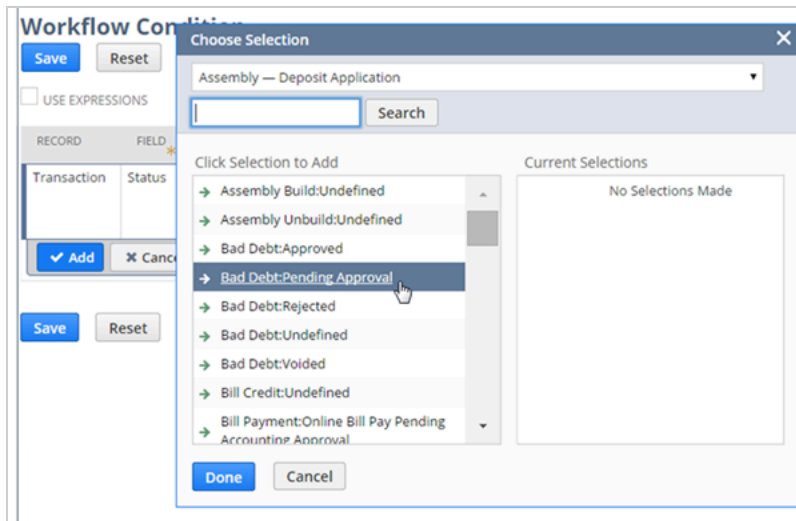

Sales Custom Transaction Transform Action Workflow Example

Sales and purchase custom transaction types are available in the Transform Action in workflows, so you can add custom buttons to custom transaction pages.

You may want to create a custom transaction from an existing transaction type instance, or you may want to create a transaction instance from a custom transaction. You can use workflows to specify transformations with custom transactions. Use standard workflow functionality to specify when the button appears.

For example, on your Invoice page, you want to display a custom button that's available in View mode. When the user clicks the button, a new instance of the custom transaction opens, with the Customer, Date, Period, Subsidiary, Class, Department, Location, and Items fields prefilled. The user verifies the information and clicks Save.

You can also add a custom button to the custom transaction page, for example, a Pro-forma Invoice. When the user clicks the button, a new instance of the standard transaction opens, with the Customer, Date, Period, Subsidiary, Class, Department, Location, and Items fields prefilled. The user verifies the information and clicks Save.


Payment links and generic transformation links are used to transform custom transactions. A Transformation type link is created only if a Payment type link does not already exist. For example, transforming a Custom Sales Transaction to a standard Customer Payment record creates a payment link, but not a transformation link.

The Transformation type link creates a link between transformed transactions in custom transactions when you save the custom transaction. A transformation link is created whenever an instance of a custom

transaction is the source or destination of a transformation. The link appears on target transaction in the Created From field and at the source transaction in Related Records.

Example:

We want to add a button to a sales custom transaction type for payment. Our example triggers the workflow on create, view, or update of a Sample Sales Transaction record.

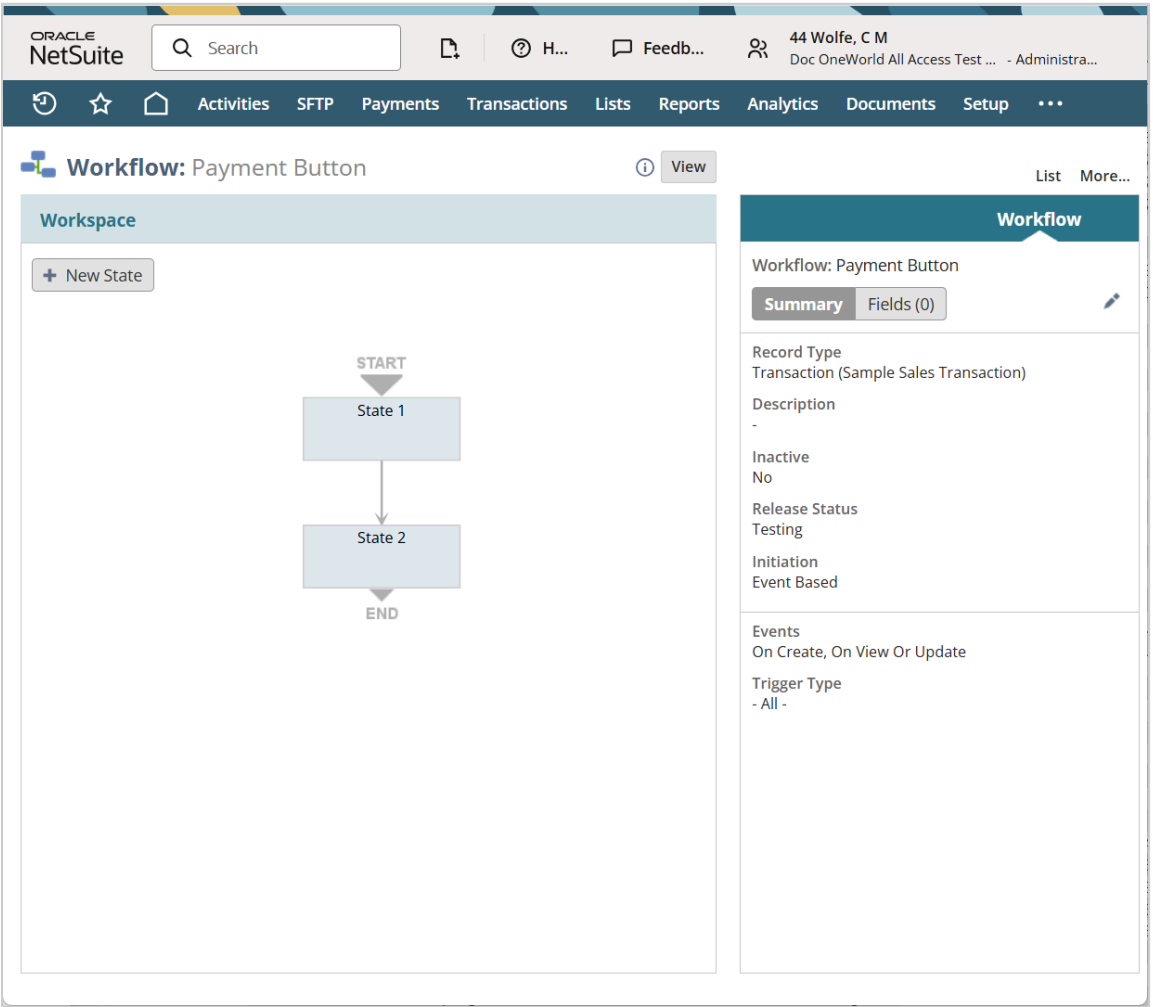

The first state occurs before the record loads to add a To Payment button.

ORACLE
NetSuite

Q Search

H... Feedba...

44 Wolfe, C M
Doc OneWorld All Access Test A... - Administrat...

Activities SFTP Payments Transactions Lists Reports Analytics Documents Setup ...

Workflow: Payment Button

View

List More...

Workspace

+ New State

START

State 1

State 2

END

State Workflow

State: State 1

Actions (1) Fields (0)

Record Load 1

Before Record Load

Add Button Label: To Payment

+ New Action

The second state specifies that when the button is clicked, the transaction is transformed to a customer payment. You could transform the transaction to a customer payment, customer refund, or a sample sales transaction. To permit the user to edit the transaction before saving, check the Redirect Without Saving box.

ORACLE
NetSuite

Q Search

H... Feedb...

44 Wolfe, C M
Doc OneWorld All Access Test ... - Administra...

ActivitiesSFTPPaymentsTransactionsListsReportsAnalyticsDocumentsSetup...

Workflow: Payment Button

View

ListMore...

Workspace

+ New State

START

State 1

State 2

END

StateWorkflow

State: State 2

Actions (1)Fields (0)

Record Save1

After Record Submit

Transform RecordCustomer Payment

+ New Action

The following screenshot shows the button on the Sample Sales Transaction record.

Sample Sales Transaction 🔍

2 Test Company 123

[Edit](#)
[Back](#)
[To Payment](#)
[Print](#)
[New](#)
[Actions](#)

Primary Information
 Document # 2
 Customer Test Company 123
 Date 7.3.2025
 Start Date
 End Date
 Posting Period Mar 2025
 Due Date
 PO #
 Memo

Sales Information
 Sales Rep Wolfe, J Wolfe, J
 Opportunity
 Partner

Classification
 Department Accounting
 Class
 Location East Coast

Summary	
Subtotal	270.00
Discount Item	
Shipping Cost	
Handling Cost	
Gift Certificate	
Total	270.00

Using Workflows with SuiteScript for Custom Transaction Transformations

To use SuiteScript to create a custom action to perform a transformation, use the `redirect.toRecordTransform(options)` method. The method takes the source transaction, opens the form of the destination transaction and fills data in the form based on the source transaction. If a field is available in both the source and destination transactions, it's transferred. However, the following fields aren't automatically filled in:

- Date – Today's date is displayed by default.
- Due Date – Calculated from the Terms using today's date.
- Accounts – If the main line account from the source transaction isn't available in the target transaction, the default transaction account is used.
- Status – The value of this field isn't transferred.

For more information about the `redirect.toRecordTransform(options)` method, see the help topic [N/redirect Module](#).

For more information about supported transformation types, see the help topic [Supported Transformation Types](#).