



ORACLE  
NetSuite

# Globalization



2025.2

November 12, 2025



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

### **Documentation Accessibility**

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

### **Access to Oracle Support**

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

### **Sample Code**

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at [www.netsuite.com/tos](http://www.netsuite.com/tos).

Oracle may modify or remove sample code at any time without notice.

### **No Excessive Use of the Service**

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

### **Beta Features**

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

# Table of Contents

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| Manage Translations .....                                                        | 1  |
| Translation Collections Overview .....                                           | 1  |
| Translation Collections Prerequisites .....                                      | 2  |
| General Settings .....                                                           | 3  |
| Managing Translation Collections .....                                           | 3  |
| Exporting a Translation Collection .....                                         | 4  |
| Importing Translations into a Translation Collection .....                       | 5  |
| Downloading a Translation Collection into XML .....                              | 6  |
| Manage Translations Page Strings Subtab .....                                    | 6  |
| Working with Translation Collection Strings .....                                | 7  |
| Translation String Types .....                                                   | 7  |
| Adding Strings to Translation Collections .....                                  | 8  |
| Modifying Translation Collection Strings .....                                   | 9  |
| Deleting Strings from a Translation Collection .....                             | 9  |
| String Hierarchy and Translation String Linking .....                            | 9  |
| Mass Update of Translation Strings .....                                         | 10 |
| Exporting and Importing Translation Strings from the Strings Subtab .....        | 11 |
| Best Practice for Exporting and Importing Strings From Translatable Fields ..... | 12 |
| Manage Translations Page Import Jobs Subtab .....                                | 12 |
| Translation Statistics .....                                                     | 13 |
| Filtering of Translation Strings .....                                           | 13 |
| Scoped View of Translation Strings .....                                         | 14 |
| Location ID and Filtering by Location ID .....                                   | 14 |
| Including Translation Collections in Bundles .....                               | 14 |
| Locking Translation Collections .....                                            | 15 |
| Consistency Management .....                                                     | 15 |
| Usage of Translations in SuiteScript .....                                       | 15 |
| Using Translation Collections with SuiteScript .....                             | 16 |
| Translation API in SuiteScript 2.0 .....                                         | 16 |
| Translations in Advanced Printouts .....                                         | 16 |
| SuiteApp Translatability Support .....                                           | 17 |
| Translation Support for SuiteCloud Development Framework .....                   | 17 |
| Management of Translation Strings Distributed Through SDF .....                  | 18 |
| Uniqueness Constraints and Length Restrictions in Translatable Fields .....      | 19 |
| Best Practices for Working with Translations .....                               | 21 |
| Examples of Customizations Affected by Terminological Changes .....              | 23 |
| List of Topics .....                                                             | 28 |
| SuiteAnalytics .....                                                             | 29 |
| UI-Based Customizations .....                                                    | 29 |
| SuiteCloud Customizations .....                                                  | 29 |
| Commerce .....                                                                   | 30 |
| Country-Specific Help .....                                                      | 31 |
| Internationalization .....                                                       | 36 |
| Internationalization Overview .....                                              | 36 |
| Elements of Internationalization .....                                           | 37 |
| International Formatting Support .....                                           | 37 |
| Formatting API in SuiteScript 2.0 .....                                          | 37 |
| Worldwide Support for Phone Number Formatting .....                              | 38 |
| Localization Context .....                                                       | 49 |
| Record Localization Context Overview .....                                       | 49 |
| Record Localization Context .....                                                | 49 |
| Localization Context Filtering .....                                             | 54 |
| Globalization Glossary .....                                                     | 56 |

Internationalization through Global E-commerce ..... 59

# Manage Translations

NetSuite has features that support translating SuiteScript, SuiteFlow, SuiteBundler and other customizations. In addition, you can also use features that help manage those translations.

The Manage Translations feature lets you work with Translation Collections, which are storage repositories for translation strings. A translation collection is a repository where you can store the strings you use in your NetSuite customizations. Translation strings are containers for source language strings, which can be a single word or several sentences. If the source language version of the string requires a translation, you'll also store the translated values in these containers. When you create a string, you'll assign a key value to it as its unique identifier. A translation collection is a set of translation string containers, and the string's source language matches the collection's default language. For more information about the Manage Translations Terminology, see [Manage Translations Glossary](#).

Translation collections and strings can be:

- created,
- edited,
- deleted,
- imported,
- exported into an XLIFF file,
- downloaded to XML,
- and copied to another account.



**Note:** To access the Manage Translations page, go to Customization > Translations > Manage Translations.

On the Manage Translations page, you can:

- See information about Translation Collections.
- Create, modify, or delete Translation Collections.
- Export Translation Collections or translation strings.
- Import translation files.
- See string information.
- See Translation Collection information.
- Download Translation Collections as XML files.
- Copy Translation Collections to another account.
- See statistics Translation Collection statistics.

## Translation Collections Overview

A Translation Collection is a customization object that stores translation strings and their translations. A single Translation Collection can hold many translation strings. A translation string is a key/value pair: they are an identifier, and the value is a source string. Each key has a value—a translation string—that you can translate into multiple languages. You can translate a string into any language NetSuite supports. For a list of languages supported by NetSuite, see the help topic [Configuring Multiple Languages](#).

If you're a NetSuite developer or Administrator, you can create a collection of terms for translation. You can export the collection of terms to a translation vendor as an XLIFF file. After the translation vendor provides the translations, you can import the translation file, and use the translated terms in the NetSuite UI and in SuiteApps. This collection is called a Translation Collection.

You can now use SDF for Translation Collections to store translation strings and their translations in NetSuite. A Translation Collection is defined in a SuiteCloud project by translationcollection objects and XLIFF files. You can also use SDF to distribute translation strings from Translation Collections for translatable fields. For information about working with Translation Collections in SDF, see the help topic [Translation Collections as XML Definitions](#).

In the UI, you manage Translation Collections on the Manage Translations page, which you can access through Customization > Translations > Manage Translations. For more information, see [Manage Translations](#).

The following table lists the available translation management tasks and the location of information about each task:

| Task                                                               | See                                                                                                                        |
|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Create Translation Collections                                     | <a href="#">Managing Translation Collections</a>                                                                           |
| Edit Translation Collections                                       |                                                                                                                            |
| Delete Translation Collections                                     |                                                                                                                            |
| Export Translation Collections                                     | <a href="#">Exporting a Translation Collection</a>                                                                         |
| Download a Translation Collection to use it in SuiteCloud projects | <a href="#">Downloading a Translation Collection into XML</a>                                                              |
| Import Translation files after they're translated                  | <a href="#">Importing Translations into a Translation Collection</a>                                                       |
| Manage Translation Collection Strings                              | <a href="#">Working with Translation Collection Strings</a>                                                                |
| See Information about Translation Collections                      | <a href="#">Manage Translations</a><br><a href="#">Managing Translation Collections</a>                                    |
| Filter translation strings                                         | <a href="#">Filtering of Translation Strings</a>                                                                           |
| See Information about Strings in Collections                       | <a href="#">Manage Translations Page Strings Subtab</a>                                                                    |
| See information about imported collections                         | <a href="#">Manage Translations Page Import Jobs Subtab</a>                                                                |
| Use Collections with SuiteScript                                   | <a href="#">Using Translation Collections with SuiteScript</a>                                                             |
| Include Collections in Bundles                                     | <a href="#">Including Translation Collections in Bundles</a><br><a href="#">Objects Available in Customization Bundles</a> |
| Create string hierarchies and link translation strings             | <a href="#">String Hierarchy and Translation String Linking</a>                                                            |

## Translation Collections Prerequisites

To use Translation Collections, you'll need:

- The Multi-Language feature enabled in your NetSuite account. For information, see the help topic [Globalization](#).
- Your role's Manage Translation permission. For information about setting permissions for a role, see the help topic [Setting Permissions](#).



- You'll need to add the languages you want to translate to your company's list of supported languages. For more information, see the help topic [Enabling the Entry of Translation Strings for a Specific Language](#).

## General Settings

Here are some topics about general translation and localization settings in the NetSuite Help Center.

- [Enabling the Entry of Translation Strings for a Specific Language](#)
- [Working With Multi-Language Names and Descriptions](#)
- [Setting Up a Site for Multiple Languages](#)
- [Translating Custom Role Names](#)
- [Choosing a Language for Your NetSuite User Interface](#)
- [Adding Language Options for Mobile App Translation](#)
- [Translating Import Map Name and Description](#)
- [Custom Segment Value Translations](#)
- [Custom List Translation](#)
- [Adding Translations for Custom Lists](#)
- [Customizing Localized Tax Returns](#)
- [Tax Reporting Framework Localization Requirements For Accounts Without SuiteTax](#)
- [Tax Reporting Framework Localization Requirements](#)

## Managing Translation Collections

You can create, edit, and delete Translation Collections from the **Collections** subtab.

### Creating Translation Collections:

1. Go to Customization > Translations > Manage Translations.
2. Click **Create New**.
3. In the New Collection window, set these properties:
  - **Name** – Enter a descriptive name for the collection.
  - **ID** – Enter a unique ID for the collection.
  - **Description** – (Optional) Enter a description for the collection.
  - **Default Language** – Choose a default language for the collection.



**Note:** You can't change the default language after you save the collection.

4. Click **Save**.

### Editing Translation Collections:

1. Go to Customization > Translations > Manage Translations.
2. Find the collection you want to edit, then click its name or the ellipsis (...) next to it.

3. Edit these properties as needed:

- **Name**
- **ID**
- **Description**

4. Click **Save**.

## Deleting Translation Collections:

1. Go to Customization > Translations > Manage Translations.
2. Click the ellipsis (...) next to the collection you want to delete.
3. Click **Delete**.
4. Click **Yes** when prompted to confirm.



**Warning:** When you delete a Translation Collection, you'll also delete all its translation strings, translations, and import records.

## Exporting a Translation Collection

For information about the terms and concepts in this topic, see [Manage Translations Glossary](#).

You can export translation strings in Translation Collections to send them for translation.

### To export a Translation Collection as an XLIFF file:

1. Go to Customization > Translations > Manage Translations.
2. On the **Collections** subtab of the Manage Translations page:
  - Click the ellipsis ... next to the collection you want to export, then select **Export** from the dropdown.
  - Click the expand button next to the collection, then select **Export** from the menu.
3. The **Export Strings** dialog shows the collection's source language.

Source strings are company language strings with a unique key and a value. The value can be a word, phrase, or sentence used in the NetSuite UI or created manually.



**Note:** Translation collections can only have one source language, which you can see it when you export them.

If you want to set a custom data type for the XLIFF file header, select **Customize XLIFF header datatype**. Enter your value (using the XLIFF 1.2 standard) in the field. This value is used as the exported file's data type, and an x- prefix is added to show it's customized.

See an example of the resulting customized XLIFF file header:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<xliiff xmlns:ns="netsuite" xmlns:ns3="urn:oasis:names:tc:xliiff:document:1.2" version="1.2">
  <file original="netsuite-database" source-language="de-DE" datatype="x-jscript">
    <body>
      <group ns:collection="custcollection_phrases">
        <trans-unit id="HELLO">
          <source>Halo</source>
        </trans-unit>
        <trans-unit id="GMORNING">
          <source>Guten Morgen</source>
        </trans-unit>
      </group>
    </body>
  </file>
</xliiff>
```

4. These are the options when you export a Translation Collection:
  - If you want to export the source strings in the Translation Collection without translations, don't change any settings.
  - If you want to include translations, check the **Include existing translations** box. Then pick the languages you want to export in the **All Languages** window and click the arrow to move them to **Selected Languages**.
5. Click **Export Strings**.
6. In the new window, choose **Open** or **Save**, then click **OK**.

The saved file has an XLIFF file with the source strings. If you included translations, you'll get separate XLIFF files for each language combination. If some strings don't have translations in a selected language, they'll still be exported, but their translations in the XLIFF files will be empty.

 **Note:** The exported file name matches the name of the collection.

## Importing Translations into a Translation Collection

For information about the terms and concepts in this topic, see [Manage Translations Glossary](#).

You can import XLIFF translations into Translation Collections from the **Strings and Import Jobs** subtab on the **Manage Translations** page.

You can only import XLIFF files that follow the XLIFF v1.2 standard into a Translation Collection.

When you're importing translations, you can select and import multiple files at the same time.

Make sure your file meets these requirements to import successfully.

The file must:

- Be UTF-8 encoded.
- Have a target language specified in the XML file header.
- Have a source language, different to the target language, specified in the XML file header.
- have a valid string
- contain at least one source string and its translation.

 **Important:** You can't create a new Translation Collection by importing translations into an account with no collections. You can only import translations into an existing Translation Collection that you've already created.

For more information about creating Translation collections, see [Managing Translation Collections](#).

### To import translations into a Translation Collection:

1. Go to Customization > Translations > Manage Translations.
2. On the **Strings** or the **Import Jobs** subtab of the Manage Translations page, click **Import Translations**.
3. Choose one or more files to import by doing one of the following:
  - Click **Choose a file**, then browse and select on or more files from your computer.

- Or, drag and drop the files from your computer onto the **Import Strings** dialog.

 **Note:** If you hover over the number of files to be imported, you'll see a list of their names.

4. Click **Import**.

When you import translations into a Translation Collection, you may see these results:

- Some files might not import, and you'll see a message showing how many were imported and which ones failed.
- If all the files import successfully, the import dialog closes automatically.
- If all files import but some translation strings have issues, you'll see the number of problematic strings next to the file name in the **Warnings** column on the **Import Jobs** subtab. Click the number in the **Warnings** column to see more details in a popup.

## Downloading a Translation Collection into XML

For information about the terms and concepts in this topic, see [Manage Translations Glossary](#).

You can use SDF for Translation Collections to store translation strings and their translations in NetSuite. A Translation Collection is defined in a SuiteCloud project by translationcollection objects and XLIFF files.

For detailed information about translationcollection objects, see the help topics [Translation Collections as XML Definitions](#) and [Translation Collection Object Fields in XML Definitions](#).

You can download a Translation Collection as XML from the UI and work with it in a SuiteCloud project.

### To download a Translation Collection to XML:

1. Go to Customization > Translations > Manage Translations.
2. On the **Collections** subtab, click the ellipsis ... next to the collection you want to download to XML.
3. Click **Download XML**.
4. Pick where you want to save the file on your computer, then click **OK**.

## Manage Translations Page Strings Subtab

The **Strings** subtab shows information about the strings in your account. You can see all strings in every collection, or filter to see strings in a specific collection. You can also see information about specific strings.

View information about the strings in the Manage Translations UI:

- **Source String** — The translation string in the source language.
- **Description** — The translation string's description. This helps translation vendors understand the context so they can provide an accurate translation. It explains when, where, and why users see the source string in the app.
- **Translations** — The number of languages the term's been translated into. An exclamation mark means some translations are missing. If you pick a language in the **Language** dropdown list above, this column shows translations into that language.

- **Collection** — The collection that includes the string.
- **Used In** — Where this string is used in NetSuite. This field gives helpful context for customers, partners, or translators.
- **Used As** — The category of this string in NetSuite. This field gives helpful context for customers, partners, or translators.

You can add or edit source string descriptions by clicking the translation string in the **Description** column.

For more information about editing strings, see [Modifying Translation Collection Strings](#).

You can manage strings in Translation Collections from the Strings subtab. For more information, read [Working with Translation Collection Strings](#).

## Working with Translation Collection Strings

This section of the Help Center has information about working with Translation Collection strings.

For more information, see the following topics:

- [Translation String Types](#)
- [Adding Strings to Translation Collections](#)
- [Modifying Translation Collection Strings](#)
- [Deleting Strings from a Translation Collection](#)
- [String Hierarchy and Translation String Linking](#)

For information about the terms and concepts described in this topic, see [Manage Translations Glossary](#).

## Translation String Types

Translation strings used in NetSuite translations are of two types:

### Custom Strings

You can create a custom string in either the Manage Translations UI or in SDF as part of a Translation Collection. A custom string is part of a collection, and you can edit its contents—like the description and translations.

### Stand-Alone Strings

A stand-alone string is created when you create a custom object or record. When you delete the custom object or record, the corresponding stand-alone string is also deleted. So, the stand-alone string's life-cycle is tied to the object's life-cycle. You can't create or delete stand-alone strings in the Manage Translations UI. A stand-alone string can't be included in a Translation Collection.

You can link custom strings and stand-alone strings to create a hierarchy.

If you want to see stand-alone strings in the **Strings** subtab, select **Without Collection** in the **Collection** dropdown.

For information about how translation strings can form a hierarchy, see [String Hierarchy and Translation String Linking](#).

## Adding Strings to Translation Collections

You can add strings to a collection using the **+** button on the **Collections** subtab, or the **Create New** button on the **Strings** subtab.

### To add strings to a collection from the Collections subtab:

1. Go to Customization > Translations > Manage Translations.
2. On the **Collections** subtab, find the collection you want to add a string to.
3. In the **Strings** column, click the **+** button.
4. In the **New String** window, add this information for the string you want to add:
  - **Source String** — The translation string in the source language.
  - **Key** — An identifier for the translation string. You can use this when working with Translation Collections in SuiteScript. The key can be up to 255 characters.



**Note:** When you create keys, follow these rules:

- Begin with an underscore or a letter (uppercase or lowercase).
- Use only underscores, letters, and numbers.

- **Collection** — The collection you want to add the string to.
  - **Description** — Enter a description for the source string. This helps translators understand the context so they can provide an accurate translation. It explains when, where, and why users see the string in the app.
  - **Translation** — Enter a translation for the source string in the listed languages. You can add a string without translations, and add them later after you them from translators.
5. Click **Save**.

### To add strings to a collection from the Strings subtab:

1. Go to Customization > Translations > Manage Translations.
2. On the **Strings** subtab, click **Create New**.
3. In the New string window, add the this information for the string you want to add:
  - **Source String** — The translation string in the source language.
  - **Key** — An identifier for the translation string. You can use this when working with Translation Collections in SuiteScript. The key can be up to 255 characters.
  - **Collection** — The collection to which you want to add the string.
  - **Description** — Enter a description for the source string. This description helps translators understand the context of the term to provide an accurate translation. The source string's description is the when, where, and why users see the string in the application.
  - **Translation** — Enter a translation for the source string in the languages listed. You can add a string without adding translations. Translations can be added after they have been received from translators.

4. Click **Save**.

 **Note:** In addition to the Manage Translations UI, you can also work with translation strings through SDF. In SDF, "Key", the identifier, is referred to as "scriptid".

## Modifying Translation Collection Strings

### To modify strings in a collection:

1. Go to Customization > Translations > Manage Translations.
2. On the **Strings** subtab, click the ellipsis (...) next to the string you want to edit.
3. Click **Edit**.
4. In the **Edit String** window, update this information for the string you want to change:
  - **Source String** — The translation string in the source language.
  - **Key** — The unique identifier that sets this source string apart from others in the collections.
  - **Description** — Enter a description for the source string. This helps translators understand the context for an accurate translation. It explains when, where, and why users see the source string in the app.

 **Note:** You can't change the string's collection.

5. Click **Save**.

 **Note:** Besides the Manage Translations UI, you can work with translation strings in SDF. In SDF, they "Key" is called "scriptid."

## Deleting Strings from a Translation Collection

### To delete strings in a collection:

1. Go to Customization > Translations > Manage Translations.
2. On the **Strings** subtab, click the ellipsis (...) next to the string you want to delete.
3. Click **Delete**.
4. You'll be asked to confirm that you want to delete the string and all its translations. If you're sure, click **Yes**. If no, click **No**.

 **Note:** Besides the Manage Translations UI, you can work with translation strings in SDF. In SDF, the "Key" is called "scriptid".

## String Hierarchy and Translation String Linking

This feature lets you link custom strings and stand-alone strings, and create a hierarchy between them. When you edit a translation string or its translation, all linked strings update automatically. In the Manage Translations UI, the linked translation strings are marked with a link icon.



**Important:** You need to have the **SuiteCloud Development Framework** feature enabled in your account for this to work. To enable SuiteCloud Development Framework, go to Setup > Company > Setup Tasks > Enable Features, open the **Suitecloud** subtab, find the SuiteCloud Development framework section, and select the option.

In the Manage Translations UI, you can only link translation strings from the **Strings** subtab.

This hierarchy helps keep translations consistent across NetSuite and SuiteApps.

Starting with NetSuite 20.2, you can define two groups of translation strings with different properties:

- [Parent Strings](#)
- [Child Strings](#)

In SDF, string hierarchy and linking are called "referencing".

For more information about referencing in SDF, see the help topic [Translatable Fields on SDF Custom Objects](#).

For more information about custom and stand-alone strings, see [Translation String Types](#).

## Parent Strings

A parent string passes its description and translations to its child string. You can create a parent string in the UI or SDF as part of a Translation Collection by making a custom string and linking a stand-alone string to it. A parent string is part of a collection and you can edit its contents—like the description and translations. To see child strings linked to a parent string, click the arrow next to the parent string's name. You can link multiple child strings to one parent string.

## Child Strings

You can make a child string in the UI by linking a stand-alone string to a custom string. The child string gets all the parent string's data, including translations and Translation Collection references. You can unlink a child string from its parent and turn it into a stand-alone string. When you do this, the child string keeps the translations from the parent, but it won't update if the old parent string changes. In UI, a link icon next to the child string shows it's linked to the parent string above.

## Creating a Hierarchy

To link a stand-alone string to a custom string:

1. Go to Customization > Translations > Manage Translations.
2. On the **Strings** subtab, find the stand-alone string you want to link, click the ellipsis (...) and select **Link To**.
3. Next to the custom string you want to link to, click **Select**.

## Mass Update of Translation Strings

This section explains the options for mass update of translation strings.

For mass import of translations into the NetSuite application, see [Importing Translations into a Translation Collection](#).



For mass export of translation strings in a Translation Collection, see [Exporting a Translation Collection](#).

For mass export of all standalone and parent strings in the account, see [Exporting and Importing Translation Strings from the Strings Subtab](#).

## Exporting and Importing Translation Strings from the Strings Subtab

You can both import and export translation strings from the **Strings** Subtab. Source strings are in company languages and have a unique key and a value. In this case, value can represent a word, phrase or a sentence used in the NetSuite UI or manually created.

You can select multiple files, and drag and drop them into the **Import Strings** dialog when you're importing strings.

**Note:** When you export strings from the **Strings** subtab, you export all translation strings in the account, including all parent and stand-alone strings.

### To Export Strings from the Strings Subtab:

1. Go to Customization > Translations > Manage Translations.
2. Click the **Export Strings** button on the **Strings** subtab.
3. The **Export Strings** dialogue shows a list of source languages.
  - To set a custom data type for the XLIFF file header, check the **Customize XLIFF header datatype** box and enter your value for the XLIFF 1.2 standard. The exported file uses this value as its data type, and adds an x-prefix in the header to show it's customized.

See an example of the resulting customized XLIFF file header:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<xliiff xmlns:ns="netsuite" xmlns:ns3="urn:oasis:names:tc:xliiff:document:1.2" version="1.2">
  <file original="netsuite-database" source-language="de-DE" datatype="x-jscript">
    <body>
      <group ns:collection="custcollection_phrases">
        <trans-unit id="HELLO">
          <source>Halo</source>
        </trans-unit>
        <trans-unit id="GMORNING">
          <source>Guten Morgen</source>
        </trans-unit>
      </group>
    </body>
  </file>
</xliiff>
```

- You can also export translation collection strings from a SuiteApp. Pick a SuiteApp in the **SuiteApps for Export** list and start the export.
4. The following export options are available:
    - If you want to export source strings in the listed company languages without translations, don't change any settings.
    - To export source strings with translations, check the **Include existing translations** box. Then pick the languages you want in the **All Languages** window and click the arrow to move them to **Selected Languages**.
  5. Click **Export Strings**.
  6. In the new window, choose **Open** or **Save** and click OK.
  7. The saved file has a separate XLIFF file with source strings for each company language. If you included translations, you'll get separate XLIFF files for each combination of company languages and their translations. If some source strings don't have translations in a selected language, those translations will be empty in the XLIFF files.

 **Note:** The exported translation file name includes the date and time it was exported, in this format: Year-Month-Day\_Hour-Minute-Second. The system uses Pacific time for this naming convention.

## To import strings from the Strings subtab:

Follow the steps listed in [Importing Translations into a Translation Collection](#).

## Best Practice for Exporting and Importing Strings From Translatable Fields

When exporting strings with certain translatable fields, don't edit the records with those exported strings to avoid issues.

If you edit a record with an exported translatable field, a duplicate will be created. After import, the translation won't be paired with the field and it won't be translated.

You can skip this process for fields that don't cause issues, but it's usually safer to stick with the preferred process.

See the preferred process for exporting and importing of translation strings from translatable fields:

### To Export and Import Strings from Translatable Fields:

1. When you're done working on the records, close all the ones you want to export.
2. Export the strings you need and translate them.

 **Warning:** To avoid encountering issues, between exporting strings from certain translatable fields and importing their translations:

- Don't edit the records with the exported translatable field.
- Don't open the records with exported translatable fields for editing, even if you won't change anything.

If you don't follow this warning, your translatable fields might not get translated.

3. Import the translations back into NetSuite.
4. Now you can edit records with translatable fields without affecting NetSuite translations.

## Manage Translations Page Import Jobs Subtab

The **Import Jobs** subtab shows information about translations you've imported into NetSuite. You can import collections from either the **Import Jobs** subtab or the **Strings** subtab.

View information about importing strings:

- **File Name** — The name of the translation file.
- **Collection** — The name of the collection. Click the name to view the collection.

- **Language** — The file's target language. The target language is specified in the target-language XML element.
- **Date** — When the collection was imported.
- **Status** — The status of the collection import.
- **Strings** — The number of strings in the imported collection.
- **Imported** — The number of strings that were imported.
- **Errors** — The number of errors during import. Click the number to see the errors.

You can import translations from the **Import Jobs** subtab by selecting one or more files in the Import Translations interface. For more information about mass update of translations into Translation Collections, see [Importing Translations into a Translation Collection](#).

## Translation Statistics

In the top-right corner of the Manage Translations page, you'll see statistics for all collections, strings, languages, and translations in your account.

|                                        |                                             |                                                     |
|----------------------------------------|---------------------------------------------|-----------------------------------------------------|
| <b>5</b><br>Company Languages<br>Setup | <b>1088</b><br>Custom Strings<br>Create New | <b>20%</b><br>Completed Translations<br>See Missing |
|----------------------------------------|---------------------------------------------|-----------------------------------------------------|

Company Languages shows how many company languages are set up for your company.

Custom Strings is the total number of strings in all of your company's collections. For information about creating strings, see [Adding Strings to Translation Collections](#).

Completed Translations shows the percentage of all strings in all languages in your company's collections. When you click the **See Missing** link, you're taken to the **Strings** subtab of the Manage Translations page with the filter set to Missing Translations.

## Filtering of Translation Strings

You can use this interface to search or filter strings in your account:

The screenshot shows the 'Manage Translations' page with the 'Strings' subtab selected. At the top right, there are three summary statistics: '1 Company Languages Setup', '1790 Custom Strings Create New', and '100% Completed Translations See Missing'. Below these, there are three tabs: 'Collections', 'Strings' (which is active), and 'Import Jobs'. The 'Strings' tab contains a search bar (labeled 1), a 'Collection' dropdown menu (labeled 2), a 'Translation status' dropdown menu (labeled 3), and a 'Language' dropdown menu (labeled 4). At the bottom, there are buttons for 'Create New', 'Export Strings', and 'Import Translations'. A pagination bar at the bottom right shows '1 of 72' and '1 - 25 of 1790'.

1. Search for a specific string name or description in the search box.
2. Select a collection to see its strings.

**Note:** If you select **Without Collection** you'll see all the translations for stand-alone strings.

3. Choose the translation status. Pick **Invalidated** to see invalid strings, or **Missing Translation** to see strings that are missing translations.

4. You can also pick a language to view strings in that language.

If you pick a language and use the search box, the results include translations in that language, and the **Language** column shows those translations.

 **Note:** The **Reset** button appears after you use a filter.

You can sort translation strings in the **Strings** subtab of the Manage Translations application in these ways:

- Click the **Source String**, **Description** or **Collection** column, to sort strings alphabetically (A – Z). An icon appears on the right side of the column.
- Click the same column again to sort strings Z – A, and the icon changes.

## Scoped View of Translation Strings

The scoped view feature helps you work with translation strings from a specific custom object. In the **Strings** subtab, click the object name in the **Used In** column to filter and show only strings from that object. This scoped view also shows the object's ID, lets you import translations for it, and gives you a reset button to go back to the unfiltered Strings subtab.

## Location ID and Filtering by Location ID

Location ID is a value you can use to help work with translation strings tied to a specific custom record.

When you create a custom record in NetSuite, all related custom fields are automatically added to the Manage Translations application.

For example, when you create a custom entry for, other translatable fields like subtabs, field groups, or actions are created automatically. You can see these new translation strings by clicking the **Strings** subtab in the Manage Translations application and scrolling to the end of the list.

Location ID is the name of the custom record or translatable field text, shown in the **Used In** column next to strings for that record. You can use it to group or filter those strings.

To see all translation strings for a specific custom record, click its name in the **Used In** column of the Strings subtab of the Manage Translations application.

## Including Translation Collections in Bundles

For information about the terms and concepts described in this topic, see [Manage Translations Glossary](#).

You can use the Bundle Builder to create bundles. Bundles are packages of custom or configuration objects you can install in other NetSuite accounts. You can use the Bundle Builder at Customization > SuiteBundler > Create Bundle if the SuiteBundler feature is enabled and you have the SuiteApp Marketplace permission. You can add Translation Collections to customization bundles.

For information about creating bundles, see the help topic [Creating a Bundle with the Bundle Builder](#).

After you install the bundle, the bundle ID shows up in the SuiteApp field when you view or edit the Translation Collection in the target account.

The Multi-Language feature needs to be enabled in the source account to bundle Translation Collection objects. If it's not enabled in the target account, the objects are installed and scripts can access them, but the Translation Collections won't show up in the NetSuite UI.

During bundle installation, if there's a script ID conflict and the default locale is different, the script ID for a Translation Collection object is automatically renamed. Unlike other script ID conflicts, you can't replace the existing object during installation.

## Locking Translation Collections

The lock option for Translation Collections is for users who want to pack translatable fields with their translations and deploy them to another account.

You can't edit, export, or import translations for a locked Translation Collection—you can only view it.

 **Note:** You need to enable Creating Bundles with SuiteBundler before you can make locked collections. To enable it, go to Setup > Company > Setup Tasks > Enable Features, open the **SuiteCloud** subtab, check the **Create Bundles with SuiteBundler** box in the SuiteBundler section, and click Save.

### To Create and Export Locked Translation Collections:

1. Create a Translation Collection by following the steps in [Managing Translation Collections](#).
2. BStart creating a bundle by following step 1 and 2 in [Creating a Bundle with the Bundle Builder](#).
3. In Step 3 **Select Objects**, pick the Translation Collection you want to lock and deploy to another account. All available Translation Collections are listed under Translation Collections. You can also pick any custom objects with translatable fields to deploy.
4. In Step 4 **Bundle Preferences**, select the **Lock on Install** option next to the Translation Collection you picked. This locks the Collection for deployment.
5. Click **Save**. The bundle will be saved.
6. Go to Customization>SuiteBundler>Create Bundle>List.
7. Select **Push** in the Action menu next to the bundle you created in step 5.
8. Select one or more accounts where you want to deploy the bundle with the locked collection, then click **Push** at the top of the list.
9. Switch to the account where you deployed the Translation Collection and go to Manage Translations.

The deployed collection will show with a lock symbol to indicate its status.

## Consistency Management

The [String Hierarchy and Translation String Linking](#) feature helps you manage consistency when working with translation strings in NetSuite.

## Usage of Translations in SuiteScript

This section covers different ways to use translations and the N/translation module in SuiteScript.

These are the topics in this section:

- [Using Translation Collections with SuiteScript](#)

- [Translation API in SuiteScript 2.0](#)

## Using Translation Collections with SuiteScript

SuiteScript developers can work with Translation Collections using the SuiteScript 2.0 N/translation module.

- [N/translation Module](#)
- [SuiteScript 2.x API Introduction](#)
- [SuiteScript 2.x API Reference](#)
- [Translations in Advanced Printouts](#)

## Translation API in SuiteScript 2.0

In SuiteScript, the N/translation module lets developers use the Translation API and work with NetSuite Translation Collections.

You can watch a video that shows how to use the N/translation module with Translation Collections.

 [Using the N/translation Module for Translation Collections](#)

A Translation Collection is a customization object that stores translation strings and their translations. One Translation Collection can have many translation strings. Each translation string has a key (identifier), a value (source string), and possibly translations of the source string. A key points to one string that can be translated into multiple languages. For example, the translation string for "hello" might use the key HELLO and the value "hello". You can translate this string into any language NetSuite supports. For a list of these languages, see the help topic [Configuring Multiple Languages](#).

You can create a collection of terms for translation in the NetSuite UI. To do this, your role needs the Manage Translations permission. Alternatively, you can create a collection as an Administrator. You can export the collection as an XLIFF file and send it to a translation vendor. After you get the translations back, you can import the file into your NetSuite account. You can use the collection to translate labels and messages in your scripts, Suitelets, and SuiteApps. For information about managing Translation Collections in the UI, see [Manage Translations](#).

 **Note:** The N/translation module is read-only. If you want to create or change Translation Collections, you can do it in the NetSuite UI at Customization > Translations > Manage Translations.

A Translation Collection is wrapped in the [translation.Handle](#) object. The translation.Handle object is hierarchical, so each node is either another translation.Handle object or a [translation.Translator](#) function. Translator functions combine strings with parameters. When you create a Translation Collection in the NetSuite UI, you can add parameter placeholders to your translation strings. The translator function puts the parameter values into the placeholders in the returned translation string.

For more information, see the help topic [N/translation Module](#).

## Translations in Advanced Printouts

With the Translation Collection, you can use Freemarker code to add translated content to advanced printouts in SuiteScript.

For more detailed information, see the help topic [Adding Translated Content in Advanced Printouts](#)

## SuiteApp Translatability Support

This section covers how NetSuite supports making SuiteApps translatable.

For more information, see the following topics:

- [Translation Support for SuiteCloud Development Framework](#)
- [Translation Collections in SuiteCloud Development Framework](#)
- [Translatable Fields in SuiteCloud Development Framework](#)

## Translation Support for SuiteCloud Development Framework

With SuiteCloud Development Framework, developers can use file-based definitions of Translation Collections and term translations outside NetSuite, and in their own development environment.

### Translation Collections in SuiteCloud Development Framework

This section covers Translation Collections provided in SDF that help make other parts of NetSuite translatable.

You can include Translation Collections and their translations in SDF SuiteApps or projects to set up or customize NetSuite automatically with customization bundles.

For more information about using Translation Collections in SDF, see the following:

- For information about the import of Translation Collections, see the help topic [Importing Translation Collections into SuiteCloud Projects](#).
- For information about deploying SuiteCloud projects with Translation Collections, see the help topic [Deploying SuiteCloud Projects Containing Translation Collections](#).
- For information about the inclusion of Translation Collections in SDF SuiteApps, see the help topic [Including Translation Collections in SDF SuiteApps](#).
- For information about the translationcollection object, see the help topic [Translation Collection Object Fields in XML Definitions](#)
- For information of use of translation strings in SuiteCloud projects and an example, see the help topic [Translation Collection Strings in SuiteCloud Projects](#).

In SDF SuiteApps or projects, Translation Collections and strings are defined by translationcollection custom objects and XLIFF files.

For more information about SuiteCloud Development Framework (SDF), see .

### Translatable Fields in SuiteCloud Development Framework

With SuiteCloud Development Framework (SDF), you can reference a translation string from a Translation Collection in a translatable field on a custom object.

In the UI, this is called linking translation strings. For more information, see [String Hierarchy and Translation String Linking](#).

For more information about the use of translation strings from Translation Collections in a translatable field, see the help topic [Translatable Fields on SDF Custom Objects](#).

These topics give an overview of using translatable fields on custom objects and related information:

- For more information about referencing translation strings from Translation Collections in SDF, see the help topic [Using Translatable Fields in SDF Custom Objects](#).
- For a list of supported translatable fields, see the help topic [Translatable Fields Supported in SDF Custom Objects](#).
- For information about using translatable fields in XML definitions, see the help topic [Considerations For Translatable Fields](#).
- For information about reference format, see the help topic [Translation Reference Format](#).
- For an example of a workflow custom object referencing a term in a Translation Collection, see the help topic [Translatable Field XML Examples](#).

## Management of Translation Strings Distributed Through SDF

You can use SDF to share translation strings for supported fields.

You can manage these translation strings in the Manage Translations application.

You can also create references to collections and parent strings for these translation strings.

For more information, see the help topic [Translatable Fields on SDF Custom Objects](#).

For more information about the Manage Translations application, see [Manage Translations](#).

## Translatability Support for Workbooks

You can translate workbooks and distribute them with SDF.

For more information about Manage Translations, see [Translation Statistics](#).

## Validation of Translation Strings Distributed Through SDF

Starting in NetSuite 2021.2, SDF supports two new validation types for translation strings: length and uniqueness.

SDF checks translation string linked to translation fields, like custom list names, during SuiteApp installation. These checks make sure string lengths don't go over field limits and that each string is unique.

For a list of the uniqueness rules and length limits for each translatable field, see [Uniqueness Constraints and Length Restrictions in Translatable Fields](#).

Uniqueness is checked by comparing translation string values in the account's default language to other fields in the account and to translation strings in the SuiteApp.

To pass validation, a translation string can't have the same value as any other string in the account or SuiteApp. If it does, you'll get an error message.

For more information about translation strings, see [Manage Translations](#).



For more information about validations in SDF, see the help topic [Translation Collection Strings in SuiteCloud Projects](#).

## Uniqueness Constraints and Length Restrictions in Translatable Fields

The table below shows which translatable fields have uniqueness rules and their maximum length.

| Translatable Field         | Maximum Character Limit | Account Uniqueness Constraints |
|----------------------------|-------------------------|--------------------------------|
| CENTER_CATEGORY_LABEL      | 99                      | —                              |
| CENTER_TAB_NAME            | 30                      | —                              |
| CENTER_TYPE_DESCRIPTION    | 128                     | —                              |
| CHART_CATEGORY_AXIS        | 140                     | —                              |
| CHART_CATEGORY_ITEM        | 50                      | —                              |
| CHART_LEGEND_AXIS          | 140                     | —                              |
| CHART_LEGEND_ITEM          | 50                      | —                              |
| CHART_MEASURE              | 50                      | —                              |
| CHART_NAME                 | 80                      | —                              |
| CHART_PORTLET_NAME         | 80                      | —                              |
| CHART_SUBTITLE             | 80                      | —                              |
| CHART_TITLE                | 80                      | —                              |
| CUSTOM_FIELD_HELP          | 999                     | —                              |
| CUSTOM_FIELD_LABEL         | 200                     | —                              |
| CUSTOM_FIELD_LABEL_NSN     | 200                     | —                              |
| CUSTOM_LIST_NAME           | 199                     | Yes                            |
| CUSTOM_LIST_VALUE          | 199                     | —                              |
| CUSTOM_RECORD_ENTRY_NAME   | 999                     | —                              |
| CUSTOM_RECORD_LINK         | 99                      | —                              |
| CUSTOM_RECORD_NAME         | 199                     | Yes                            |
| CUSTOM_RECORD_SUBTAB       | 50                      | —                              |
| CUSTOM_SEGMENT_HELP        | 999                     | —                              |
| CUSTOM_SEGMENT_LABEL       | 40                      | —                              |
| CUSTOM_SUBLIST_DESCRIPTION | 200                     | —                              |
| CUSTOM_SUBLIST_LABEL       | 30                      | —                              |

| Translatable Field                    | Maximum Character Limit | Account Uniqueness Constraints |
|---------------------------------------|-------------------------|--------------------------------|
| CUSTOM_SUBTAB_TITLE                   | 50                      | —                              |
| CUSTOM_TRANSACTION_NAME               | 96                      | —                              |
| CUSTOM_TRANSACTION_STATUS_DESCRIPTION | 480                     | —                              |
| DATASET_DESCRIPTION                   | 500                     | —                              |
| DATASET_FIELD                         | 50                      | —                              |
| DATASET_FORMULA                       | 50                      | —                              |
| DATASET_NAME                          | 50                      | —                              |
| ENTRY_FORM_TEMPLATE_FIELD_GROUP_LABEL | 123                     | —                              |
| ENTRY_FORM_TEMPLATE_FIELD_LABEL       | 200                     | —                              |
| ENTRY_FORM_TEMPLATE_MACHINE_LABEL     | 40                      | —                              |
| ENTRY_FORM_TEMPLATE_NAME              | 60                      | —                              |
| ENTRY_FORM_TEMPLATE_SECTION_LABEL     | 40                      | —                              |
| FORM_TEMPLATE_FIELD_GROUP_LABEL       | 123                     | —                              |
| FORM_TEMPLATE_FIELD_LABEL             | 200                     | —                              |
| FORM_TEMPLATE_MACHINE_LABEL           | 40                      | —                              |
| FORM_TEMPLATE_NAME                    | 60                      | —                              |
| FORM_TEMPLATE_SUM_FIELD_LABEL         | 200                     | —                              |
| FORM_TEMPLATE_TAB_LABEL               | 99                      | —                              |
| FORM_TEMPLATE_VIEW_LABEL              | 123                     | —                              |
| KPI_REPORT_DATE_RANGE_LABEL           | 99                      | —                              |
| KPI_REPORT_DESCRIPTION                | 999                     | —                              |
| KPI_REPORT_KPI_LABEL                  | 99                      | —                              |
| KPI_REPORT_NAME                       | 99                      | —                              |
| REPORT_COLUMN_AXIS                    | 50                      | —                              |
| REPORT_MEASURE                        | 50                      | —                              |
| REPORT_NAME                           | 80                      | —                              |
| REPORT_PORTLET_NAME                   | 80                      | —                              |
| REPORT_ROW_AXIS                       | 50                      | —                              |
| SAVE_DASHBOARD_NAME                   | 999                     | —                              |
| SAVE_DASHBOARD_NOTES                  | 1000                    | —                              |
| SAVED_SEARCH_COLUMN_DETAIL_LABEL      | 99                      | —                              |

| Translatable Field                       | Maximum Character Limit | Account Uniqueness Constraints |
|------------------------------------------|-------------------------|--------------------------------|
| SAVED_SEARCH_COLUMN_DETAIL_SUMMARY_LABEL | 99                      | —                              |
| SAVED_SEARCH_COLUMN_LABEL                | 99                      | —                              |
| SAVED_SEARCH_COLUMN_SUMMARY_LABEL        | 99                      | —                              |
| SAVED_SEARCH_FIELD_LABEL                 | 99                      | —                              |
| SAVED_SEARCH_HIGHLIGHT_DESCR             | 99                      | —                              |
| SAVED_SEARCH_NAME                        | 160                     | —                              |
| SCRIPT_BUTTON_LABEL                      | 100                     | —                              |
| SCRIPT_DESCRIPTION                       | 999                     | —                              |
| SCRIPT_NAME                              | 40                      | —                              |
| SCRIPT_RECORD_ACTIONLABEL                | 99                      | —                              |
| TABLEVIEW_FIELD                          | 50                      | —                              |
| TABLEVIEW_NAME                           | 80                      | —                              |
| TABLEVIEW_PORTLET_NAME                   | 80                      | —                              |
| TASK_LINK_LABEL                          | 100                     | —                              |
| TRANSLATION_COLLECTION_DESCRIPTION       | 100                     | —                              |
| TRANSLATION_COLLECTION_NAME              | 100                     | —                              |
| WORKBOOK_DESCRIPTION                     | 500                     | —                              |
| WORKBOOK_NAME                            | 50                      | —                              |
| WORKFLOW_ACTION_BUTTON_TEXT              | 99                      | —                              |
| WORKFLOW_ACTION_DISPLAY_LABEL            | 100                     | —                              |
| WORKFLOW_ACTION_ERROR_TEXT               | 999                     | —                              |
| WORKFLOW_ACTION_MESSAGE_TEXT             | 999                     | —                              |
| WORKFLOW_NAME                            | 40                      | —                              |
| WORKFLOW_STATE_NAME                      | 40                      | —                              |



**Important:** The maximum character limit can change at any time. If you find any errors, let us know in the feedback area at the bottom of this page.

For more information about the validation of translations strings distributed through SDF, see [Validation of Translation Strings Distributed Through SDF](#).

## Best Practices for Working with Translations

These best practices can help you avoid translation string issues in your translated NetSuite application. They also include examples you might see when using NetSuite.

**Note:** These tips apply to translation strings in SuiteScript scripts, saved searches, custom reports, web services integrations and other customizations.

- [Use IDs instead of UI Labels in References](#)
- [Opt in to Release Preview](#)
- [Examples of Customizations Affected by Terminological Changes](#)

## Use IDs instead of UI Labels in References

In your customizations, don't use references to UI labels—use IDs instead. An ID is a static internal value that's always unique and usually doesn't change. If you use custom features like:

- Implementation guides
- user manuals
- SuiteScript
- customizations
- scripts
- reports
- searches
- integrations
- or any else that uses UI labels,

be proactive and replace those labels with static ID values. Since IDs don't change, it's safer to use them in references than UI labels, which might change with different translations. If you reference a UI label and it or its translation changes, the reference breaks and your customizations stop working.

For information about how to display IDs, see the help topic [Showing Record and Field IDs in Your Account](#).

If you can't use or find an ID, you can temporarily swap the old translated term in the label for the new one from the list of changes. This is a quick fix—you should still replace the label with an ID as soon as you can. Contact NetSuite Customer support if you need help with a missing or unusable ID.

See the table below for examples of updates made to the en-GB locale.

| Type            | Old Value                                                          | New Value                                                                  |
|-----------------|--------------------------------------------------------------------|----------------------------------------------------------------------------|
| Field Label     | Address ZIP Code                                                   | Address postcode                                                           |
| Record Name     | Payment Gateway Plugin                                             | Payment gateway plug-in                                                    |
| Record Name     | State                                                              | County/Region                                                              |
| Record Name     | Mail Template                                                      | Email template                                                             |
| Drop-down Value | Real Estate                                                        | Property                                                                   |
| Alert Message   | You need to set inventory details to generate all assembly builds. | You need to set inventory details for all assembly builds to be generated. |

|               |                                                                                                                                                                                                          |                                                                                                                                                                                                                             |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Error Message | You can't customize comparison reports in the Classic Report Composer. To customize this report, go to Home > Set Preferences > Reporting subtab and disable the Use Classic Report Composer preference. | Comparison reports cannot be customised in the Classic Report Composer. <p>To customise this report, you must first go to Home > Set Preferences > Reporting subtab and disable the Use Classic Report Composer preference. |
| Button Label  | Print Voucher                                                                                                                                                                                            | Print discount code                                                                                                                                                                                                         |
| Menu Item     | Set Up States/Provinces/Counties                                                                                                                                                                         | Set Up counties/regions                                                                                                                                                                                                     |

### Example 1. Translated Role Title

An American client uses an "Administrator Role" to verify authorization of a script. Imagine that a client's French employee tries to use the script. Since they are using the NetSuite application in French, the "Administrator Role" has been translated to French and now it shows "Rôle d'administrateur". However, since the script is looking specifically for the UI label "Administrator Role", it does not recognize the role and it does not permit deployment of the script. If the script used a reference to an ID, a unique system value, instead of a UI label "Administrator Role", the script would work without any problems.

### Example 2. Altered Document Status

A report refers to a document status "Completed". Imagine that for some reason, a client decides to rename the "Completed" status to "Done". Because the document no longer displays the required document status, the report does not recognize it and does not work with this document. If the report used a reference to an ID, a unique system value, instead of a UI label "Completed", the report would display without any problems.

## Opt in to Release Preview

Before each NetSuite release upgrade, opt in for a Release Preview account as soon as it's available and test your customizations to make sure that they work. If they don't, contact NetSuite Customer Support.

The Release Preview account lets you get familiar with the new features in the upcoming release.

For more information about Release Preview accounts, see the help topic [Overview of Release Preview](#).

## Examples of Customizations Affected by Terminological Changes

### Saved Search Definitions

- In Saved searches, translation updates can affect formula definitions. To avoid problems, don't use translation string values in formulas. If you have to, avoid relying on capital letters in those values.
- In Saved searches, you can only use field values directly—you can't use IDs to reference them.
- Formulas in Saved searches might use a translated string value, but that value can change during a language update and break your search.

- If you use values directly, switching to another language can make your searches fail. For example, if you search for "Bill" and switch into Spanish, you won't get results, because "Bill" isn't a word in Spanish. The search won't break, but the results might be wrong.

## Saved Searches in Scripts

Saved searches can be accessed from SuiteScript. If your saved searches give wrong results because of broken references, your scripts might not work.

For more information, see [Use getValue Function in SuiteScript to Get Value of a Formula Text Field from a Saved Search](#)

## SuiteScripts

- Any decision logic that compares a hard-coded string to a translatable field will be affected.
- It's better to use string IDs instead of values.
- During the language updates, some translatable field values might change.

### Impacts:

- The script will probably fail without showing an error.
- Consequently, the business logic won't run as intended and the customer's business might be affected.
- Good Practice — using transaction status ID:

```
1 /** * @NApiVersion 2.x */ require(['N/search'], function(search) { var mySearch = search.create({ type: search.Type.TRANSACTION, columns: ['statusref', 'internalid'], }); var myResultSet = mySearch.run(); var resultRange = myResultSet.getRange({ start: 0, end: 50 }); var counter = 0; for (var i = 0; i < resultRange.length; i++) { var statusValue = resultRange[i].getValue(myResultSet.columns[0]) if (statusValue == 'approved') { counter++; } } log.debug(counter); })
```

- Bad Practice — using transaction status value:

```
1 /** * @NApiVersion 2.x */ require(['N/search'], function(search) { var mySearch = search.create({ type: search.Type.TRANSACTION, columns: ['statusref', 'internalid'], }); var myResultSet = mySearch.run(); var resultRange = myResultSet.getRange({ start: 0, end: 50 }); var counter = 0; for (var i = 0; i < resultRange.length; i++) { var statusText = resultRange[i].getText(myResultSet.columns[0]) if (statusText == 'Approved for Posting') { counter++; } } log.debug(counter); })
```

## External Integrations

- Translatable field values might change when exported (using CSV, SOAP, ODBC, or REST).
- Issues with external business integration tools can happen. Make sure your BI tools use IDs. If they can't (like with ODBC), check them after the update to make sure they still work.
- Customers need to check that their integrations use IDs. If not, they should review all integrations after language update to make sure everything works.

## In SOAP:

Use ID references for translation strings you want to export with SOAP.

See screen-shots below for examples of reference an ID (green box) and a value (red box):

■ Sales Order — Status:

- The status can be referenced by enum values, for example “\_pendingApproval”.

Get Sales Order — response:

```
<tranSales:orderStatus>_pendingFulfillment</tranSales:orderStatus>
<tranSales:nextBill>2020-10-09T00:00:00.000-07:00</tranSales:nextBill>
<tranSales:syncSalesTeams>false</tranSales:syncSalesTeams>
<tranSales:salesEffectiveDate>2020-10-09T00:00:00.000-07:00</tranSales:sales>
<tranSales:excludeCommission>false</tranSales:excludeCommission>
<tranSales:exchangeRate>0.7607455</tranSales:exchangeRate>
<tranSales:currencyName>USA</tranSales:currencyName>
<tranSales:toBePrinted>false</tranSales:toBePrinted>
<tranSales:toBeEmailed>false</tranSales:toBeEmailed>
<tranSales:toBeFaxed>false</tranSales:toBeFaxed>
<tranSales:shipIsResidential>false</tranSales:shipIsResidential>
<tranSales:shipDate>2020-10-08T00:00:00.000-07:00</tranSales:shipDate>
<tranSales:shipComplete>false</tranSales:shipComplete>
<tranSales:saveOnAuthDecline>true</tranSales:saveOnAuthDecline>
<tranSales:canHaveStackable>false</tranSales:canHaveStackable>
<tranSales:revenueStatus>_pending</tranSales:revenueStatus>
<tranSales:recognizedRevenue>0.0</tranSales:recognizedRevenue>
<tranSales:deferredRevenue>0.0</tranSales:deferredRevenue>
<tranSales:ccApproved>false</tranSales:ccApproved>
<tranSales:getAuth>false</tranSales:getAuth>
<tranSales:isRecurringPayment>false</tranSales:isRecurringPayment>
<tranSales:altSalesTotal>0.0</tranSales:altSalesTotal>
<tranSales:subTotal>100.0</tranSales:subTotal>
<tranSales:discountTotal>0.0</tranSales:discountTotal>
<tranSales:taxTotal>0.0</tranSales:taxTotal>
<tranSales:total>100.0</tranSales:total>
<tranSales:balance>0.0</tranSales:balance>
<tranSales:paypalProcess>false</tranSales:paypalProcess>
<tranSales:subsidiary internalId="8" xmlns:platformCore="urn:core_2020_1.pla
com">
  <platformCore:name>Euro Subsid</platformCore:name>
</tranSales:subsidiary>
<tranSales:lastModifiedDate>2020-10-09T06:32:31.000-07:00</tranSales:lastMod
<tranSales:status>Pending Fulfillment</tranSales:status>
```

- Update Sales Order status—request example:

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <soapenv:Envelope
3   xmlns:xsd="http://www.w3.org/2001/XMLSchema"
4   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
5   xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
6   xmlns:platformCore="urn:core_{(API_VERSION)}.platform.webservices.netsuite.com"
7   xmlns:platformMsgs="urn:messages_{(API_VERSION)}.platform.webservices.netsuite.com"
8   xmlns:tranSales="urn:sales_{(API_VERSION)}.transactions.webservices.netsuite.com"
9   xmlns:tranSalesType="urn:types.sales_{(API_VERSION)}.transactions.webservices.netsuite.com">
10  <soapenv:Header>
11    <passport>
12      <email>{(username)}</email>
13      <password>{(password)}</password>
14      <account>{(ACCOUNT)}</account>
15    </passport>
16    <applicationInfo xmlns="urn:messages_{(API_VERSION)}.platform.webservices.netsuite.com">
17      <applicationId>{(APP_ID)}</applicationId>
18    </applicationInfo>
19  </soapenv:Header>
20  <soapenv:Body>
21    <update xsi:type="platformMsgs:update">
22      <record xsi:type="tranSales:SalesOrder" internalId="18">
23        <orderStatus xsi:type="tranSalesType:SalesOrderOrderStatus">_pendingApproval</orderStatus>
24      </record>
25    </update>
26  </soapenv:Body>
27 </soapenv:Envelope>
```

■ Purchase Order – Status:





```
[maxwell ~] (Release_Maxwell) $ sacConnect
+-----+
| Connected! |
| sql-statement |
| help [tablename] |
| quit |
+-----+
SQL> select status from transactions;
+-----+
| status |
+-----+
| Approved for Posting |
| Open |
| Open |
| Pending Receipt |
| Approved by Accounting |
| Approved for Posting |
| Undefined |
| Undefined |
| Undefined |
+-----+
SQLRowCount returns -1
9 rows fetched
SQL> █
```

## In REST:

In REST, you can use either ID references or translation string values, but it's best to use IDs whenever you can to avoid integration issues. Here are examples showing a value (status field) and an ID (orderStatus field):

- Purchase Order JSON screenshot — status field:

```
{
  rejected: "F",
  shipDate: "2020-10-09",
  shipIsResidential: false,
  shipOverride: false,
  shippingAddress: {
    links: {
      0: {
        rel: "self",
        href: "https://...app.f.netsuite.com/services/rest/record/v1/purchaseorder/2/shippingAddress"
      }
    }
  },
  status: "Pending Receipt",
  subsidiary: {
    links: {
      0: {
        rel: "self",
        href: "https://...app.f.netsuite.com/services/rest/record/v1/subsidiary/1"
      }
    },
    id: "1",
    refName: "Parent Company",
    supervisorApproval: true,
    toBeEmailed: false,
    toBeFaxed: false,
    toBeDeleted: false
  }
}
```

- Purchase Order JSON screenshot – orderStatus field example:

|                       |       |
|-----------------------|-------|
| oldrevenuecommitment: | false |
| orderStatus:          | "A"   |
| ordrecvd:             | false |
| originalNexus:        |       |

## In CSV:

With CSV exports, mapping usually depends on column headers and row values. If a header value changes, the mapping will be wrong. Try to base your mappings on IDs if you can. If not, use values without any capitalization.

### ■ Example – Header values

| Name                | Duplicate | Sales Rep | Partner | Billing Address 1 | Billing City | Billing State/Province | Billing Country | Status                 |
|---------------------|-----------|-----------|---------|-------------------|--------------|------------------------|-----------------|------------------------|
| Anonymous Customer1 |           |           |         |                   |              |                        |                 | CUSTOMER-Closed Won    |
| Anonymous Customer2 |           |           |         |                   |              |                        |                 | PROSPECT-In Discussion |
| Anonymous Customer3 |           |           |         |                   |              |                        |                 | LEAD-Unqualified       |
| Anonymous Customer4 |           |           |         |                   |              |                        |                 | LEAD-Unqualified       |
| Anonymous Customer5 |           |           |         |                   |              |                        |                 | LEAD-Unqualified       |

### ■ Example — Row values

| Name                | Duplicate | Sales Rep | Partner | Billing Address 1 | Billing City | Billing State/Province | Billing Country | Status                 |
|---------------------|-----------|-----------|---------|-------------------|--------------|------------------------|-----------------|------------------------|
| Anonymous Customer1 |           |           |         |                   |              |                        |                 | CUSTOMER-Closed Won    |
| Anonymous Customer2 |           |           |         |                   |              |                        |                 | PROSPECT-In Discussion |
| Anonymous Customer3 |           |           |         |                   |              |                        |                 | LEAD-Unqualified       |
| Anonymous Customer4 |           |           |         |                   |              |                        |                 | LEAD-Unqualified       |
| Anonymous Customer5 |           |           |         |                   |              |                        |                 | LEAD-Unqualified       |

## SuiteFlow

- You can use Saved Searches in SuiteFlow, but if they don't work right because of the changes above, you might see incorrect results or SuiteFlow might not behave as expected.
- You can also use formula definitions in SuiteFlow. Like in Saved Searches, if those formulas use values, those values might change.
- Like in other parts of NetSuite, it's best to use ID references instead of translation string values.
- Example:
  - For example, a custom formula like **{approvalstatus}='Pending Approval'** won't work in UK English if the status text changes to **'Pending approval'**.
  - The right way is to use the ID for the reference, like: **{approvalstatus.id}=1**

## List of Topics

This section has links to topics about localization, translation, or translatability in other parts of the NetSuite Help Center.

See the following topics:

- [General Settings](#)
- [SuiteAnalytics](#)
- [UI-Based Customizations](#)
- [SuiteCloud Customizations](#)

- [Commerce](#)
- [Country-Specific Help](#)

## SuiteAnalytics

Here are topics about translations in SuiteAnalytics in the NetSuite Help Center.

- [Translations Tab User Interface](#)
- [Translation Responsibilities](#)
- [Creating Category Translations Using NetSuite](#)
- [Deleting Category Translations Using NetSuite](#)
- [Editing Category Translations Using NetSuite](#)
- [Creating Category Translations Using Site Management Tools](#)
- [Editing Category Translations Using Site Management Tools](#)
- [Deleting Category Translations Using Site Management Tools](#)
- [Creating Landing Page Translations](#)
- [Creating Website Content Translations](#)
- [To add translations for the Mass Update action title:](#)
- [To add translations for saved search column headings:](#)
- [Translations for Saved Searches](#)
- [To add translations for saved search highlighting:](#)
- [To add translations for saved search filters:](#)
- [Translations for Mass Updates](#)
- [To add translations for the Mass Update action title:](#)
- [To add translations for mass update column headings:](#)

## UI-Based Customizations

Here are topics about translating custom UI elements in the NetSuite Help Center.

- [Custom Centers](#)
- [Example of String with Language Translation](#)
- [Adding Translations for Custom Fields](#)
- [Adding Translations for Custom Records](#)
- [Adding Translations for a Custom Transaction Type](#)

## SuiteCloud Customizations

Here are topics about translations in the SuiteCloud Development Framework.

- [Translation Reference Format](#)
- [Translatable Field XML Examples](#)

- [Translation Collection Object Fields in XML Definitions](#)
- [Translation Collection Strings in SuiteCloud Projects](#)
- [Translation Collections as XML Definitions](#)
- [Using Translatable Fields in SDF Custom Objects](#)
- [translationcollection\\_defaultlanguage](#)
- [Importing Translation Collections into SuiteCloud Projects](#)
- [Deploying SuiteCloud Projects Containing Translation Collections](#)
- [Including Translation Collections in SDF SuiteApps](#)
- [Translation Collection Strings in SuiteCloud Projects](#)
- [Translatable Fields Supported in SDF Custom Objects](#)
- [Using Translatable Fields in SDF Custom Objects](#)
- [Customization Objects in SDF](#)
- [Considerations For Translatable Fields](#)
- [Translating Suitelet Labels \(see the help topic \[SuiteScript 2.x Suitelet Script Type\]\(#\)\)](#)
- [Adding Translated Content in Advanced Printouts](#)
- [Translating a Custom List Name](#)
- [Translating Custom List Values](#)
- [Translating a Custom Record Name](#)
- [Translating Custom Record Subtab Titles](#)
- [Translating Custom Record Sublist Labels](#)
- [Translating Custom Record Instance Names](#)
- [Translation List](#)
- [Add Button Action](#)
- [Confirm Action](#)
- [Return User Error Action](#)
- [Set Field Display Label Action](#)
- [Show Message Action](#)
- [Creating and Editing Custom Centers](#)
- [Custom Forms](#)

## Commerce

Here are Help Center topics about translations or localization in NetSuite Commerce.

- [Translations Subtab](#)
- [Translation Subtab](#)
- [Show Localization Map](#)
- [List of Translations](#)
- [Translations Tab User Interface](#)
- [Translation Responsibilities](#)
- [Creating Category Translations Using NetSuite](#)

- [Editing Category Translations Using NetSuite](#)
- [Deleting Category Translations Using NetSuite](#)
- [Creating Category Translations Using Site Management Tools](#)
- [Editing Category Translations Using Site Management Tools](#)
- [Deleting Category Translations Using Site Management Tools](#)
- [Creating Landing Page Translations](#)
- [Creating Website Content Translations](#)
- [Localize Content from the Content Delivery Service](#)
- [Localization](#)
- [Commerce Category Translation Sublist](#)
- [Provide Translations in Custom Themes and Extensions](#)
- [The Translation Process](#)
- [Updating Your Item and Commerce Category Translations](#)
- [Updating Your Translations for Landing Pages](#)
- [Updating Your Translations for Website Content](#)
- [Localizing SCIS](#)

## Country-Specific Help

Here are topics about localizing NetSuite elements for specific countries

For general country-specific settings, see the following:

- [Generating Localized Country Tax Reports](#)
- [Country-specific or Localization SuiteApps](#)

For Australia and New Zealand localization, see the following:

- [Installing ANZ Localization](#)
- [ANZ Localization](#)
- [Installing the ANZ Localization SuiteApp](#)
- [Known Limitations of ANZ Localization](#)

For Europe, the Middle East and Africa localization, see the following:

- [Installing the EMEA Localization SuiteApp](#)
- [EMEA Localization Payment Templates](#)
- [EMEA Localization Overview](#)
- [Prerequisites for Installing the EMEA Localization SuiteApp](#)
- [EMEA Localization Tax Reporting Elements](#)
- [EMEA Localization](#)

For Norway localization, see the following:

- [Norway Localization](#)
- [Installing the Norway Localization SuiteApp](#)

- [Norway Localization Feature Availability](#)
- [Norway Tax Reports](#)

For Southeast Asia localization, see the following:

- [Installing the Southeast Asia Localization SuiteApp](#)
- [Southeast Asia Localization](#)

For Belgium localization, see the following:

- [Prerequisites for Installing the Belgium Localization SuiteApp](#)
- [Installing the Belgium Localization SuiteApp](#)
- [SuiteTax-Based Reports Setup for Belgium Localization](#)
- [Belgium Localization Overview](#)
- [SuiteTax-Based Reports in the Belgium Localization SuiteApp](#)
- [Payment Formats in the Belgium Localization SuiteApp](#)
- [Belgium Localization](#)

For Brazil localization, see the following:

- [Former Brazil Localization Overview](#)
- [Installing the Former Brazil Localization SuiteApp](#)
- [Former Brazil Localization](#)
- [Prerequisites for the Former Brazil Localization SuiteApp](#)

For China localization, see the following:

- [Setting Up China Localization](#)
- [Enabling or Disabling China Localization Features](#)
- [Roles and Permissions in China Localization](#)
- [Known Limitations of NetSuite China Localization](#)
- [Enable or Disable a China Localization Feature](#)
- [Installing the China Localization SuiteApp](#)

For Denmark localization, see the following:

- [Denmark Localization](#)
- [Installing the Denmark Localization SuiteApp](#)
- [Denmark Localization Feature Availability](#)

For Finland localization, see the following:

- [Finland Localization](#)
- [Installing the Finland Localization SuiteApp](#)
- [Finland Localization Feature Availability](#)
- [Creating a New Entry in Localization Settings Record](#)

For France localization, see the following:

- [Prerequisites for Installing the France Localization SuiteApp](#)
- [Installing the France Localization SuiteApp](#)

- [Management of France Localization Components](#)
- [France Localization Changes that Affect Transactions](#)
- [Tax Reports in France Localization](#)
- [SuiteTax-Based Reports Setup for France Localization](#)
- [Electronic Bank Payments Setup for France Localization](#)
- [France Localization Overview](#)
- [France Localization](#)

For Germany localization, see the following:

- [Prerequisites for Installing Germany Localization](#)
- [Installing Germany Localization](#)
- [Germany Localization Overview](#)
- [Germany Localization SuiteApp](#)
- [Contra Account Sheet](#)

For India localization, see the following:

- [India Localization SuiteTax Reports](#)
- [India Localization SuiteTax Engine](#)
- [Setting Up the India Localization SuiteTax Engine](#)
- [India Localization SuiteTax Engine Limitations](#)
- [Installing India Localization SuiteTax Reports](#)
- [Setting Up Accounting Periods for India Localization SuiteTax Reports](#)

For Ireland localization, see the following:

- [Ireland Localization](#)
- [Ireland Localization Overview](#)
- [Prerequisites for Installing the Ireland Localization SuiteApp](#)
- [Installing the Ireland Localization SuiteApp](#)

For Japan localization, see the following:

- [Translation for Custom Elements for Japan](#)
- [Including Translations for Japanese Holiday Types](#)
- [Roles and Permissions for Using Japanese Invoicing](#)
- [Japan Localization Setup](#)
- [Installing the Japan Localization SuiteApp](#)
- [Japan Localization SuiteApp Limitations and Best Practices](#)
- [Including Japan Localization Custom Fields in Custom Forms](#)
- [Installing the Japan Localization SuiteApp](#)

For Mexico localization, see the following:

- [Mexico Localization Field Mapping](#)
- [Mexico Localization Custom Fields](#)
- [Mexico Localization Custom Forms](#)

- [Mexico Localization Validations](#)
- [Mexico Localization Vendor Payment Method](#)
- [Mexico DIOT File \(Mexico Localization\)](#)
- [Mexico Localization Validation Tool](#)
- [Mexico Localization Features](#)
- [Mexico Localization SuiteApp Limitations and Best Practices](#)
- [Installing the Mexico Localization SuiteApp](#)
- [Granting Access to Scripts for Mexico Localization](#)
- [Viewing Mexico Localization Component Installation Status](#)
- [Tax Code Mapping for Mexico DIOT File \(Mexico Localization SuiteApp\)](#)
- [Mexico Tax Codes](#)
- [Mexico Electronic Accounting Files \(Mexico Localization\)](#)
- [Mexico Terminology](#)
- [Mexico Localization SuiteApp Installation](#)

For Netherlands localization, see the following:

- [Netherlands Localization Overview](#)
- [Prerequisites for Installing the Netherlands Localization SuiteApp](#)
- [Installing the Netherlands Localization SuiteApp](#)
- [SuiteTax-Based Reports Setup for Netherlands Localization](#)
- [Netherlands Localization](#)

For Philippine localization, see the following:

- [Philippines Localization](#)
- [Requirements of the Philippines Localization SuiteApp](#)
- [Installing the Philippines Localization SuiteApp](#)
- [Limitations of the Philippines Localization SuiteApp](#)

For Sweden localization, see the following:

- [Sweden Localization](#)
- [Installing the Sweden Localization SuiteApp](#)
- [Sweden Localization Feature Availability](#)
- [Creating a New Entry in Localization Settings Record](#)
- [Sweden Tax Reports SuiteApp](#)

For United Kingdom localization, see the following:

- [United Kingdom Localization](#)
- [SuitePeople U.K. Localization](#)
- [SuitePeople U.K. Localization Overview](#)
- [Setting Up SuitePeople U.K. Localization](#)
- [Working with SuitePeople U.K. Localization](#)
- [SuitePeople U.K. Localization Forms and Fields](#)



- [SuitePeople U.K. Localization Saved Searches](#)
- [SuitePeople U.K. Localization Prerequisites](#)
- [Installing SuitePeople U.K. Localization](#)
- [Adding SuitePeople U.K. Localization Fields to Custom Permissions and Roles](#)
- [Adding SuitePeople U.K. Localization Fields to Forms](#)
- [Viewing SuitePeople U.K. Localization Reports](#)
- [Customizing SuitePeople U.K. Localization Reports](#)
- [United Kingdom Localization Overview](#)
- [Prerequisites for Installing the United Kingdom Localization SuiteApp](#)
- [Installing the United Kingdom Localization SuiteApp](#)

# Internationalization

This Help Center section covers internationalization in NetSuite.

For more information, see the list of topics in this section:

- [Internationalization Overview](#)
- [Elements of Internationalization](#)
- [International Formatting Support](#)
  - [Formatting API in SuiteScript 2.0](#)
  - [Worldwide Support for Phone Number Formatting](#)
  - [Hiding the +1 Country Calling Code for Countries Using This Prefix](#)
- [Localization Context](#)
  - [Record Localization Context Overview](#)
  - [Record Localization Context](#)
    - [Records Supporting the Localization Context](#)
    - [Determining the Localization Context](#)
    - [Localization Context-Aware Scripts](#)
    - [Creating a Context-Aware Script](#)
    - [Record Localization Context Available for Use in SuiteScript 2.0 API](#)
  - [Localization Context Filtering](#)
    - [Localization Context Filtering in SDF](#)
    - [Localization Context Filtering Support for Scripts in Bundles](#)
    - [Localization Context Filtering for SuiteScript 2.x](#)

## Internationalization Overview

For information about the terms and concepts described in this topic, see [Globalization Glossary](#)

Internationalization is a part of globalization and is the technical foundation for localization.

Internationalization stands for designing, developing or modifying the NetSuite application, a feature or an object so it could be localized. This section highlights features that help localize the NetSuite application. Internationalization means designing, developing, or changing NetSuite, its features, or objects so they can be localized.

This section contains the following topics:

- [Elements of Internationalization](#)
- [International Formatting Support](#)
  - [Formatting API in SuiteScript 2.0](#)
  - [Worldwide Support for Phone Number Formatting](#)
  - [Hiding the +1 Country Calling Code for Countries Using This Prefix](#)
- [Localization Context](#)

- [Record Localization Context Overview](#)
- [Record Localization Context](#)
  - [Records Supporting the Localization Context](#)
  - [Determining the Localization Context](#)
  - [Localization Context-Aware Scripts](#)
  - [Creating a Context-Aware Script](#)
  - [Record Localization Context Available for Use in SuiteScript 2.0 API](#)
- [Localization Context Filtering](#)
  - [Localization Context Filtering in SDF](#)
  - [Localization Context Filtering Support for Scripts in Bundles](#)
  - [Localization Context Filtering for SuiteScript 2.x](#)

## Elements of Internationalization

In NetSuite, a big part of internationalization is about formatting. Dates, times, phone numbers, and order totals have to be formatted according to the chosen locale. For example, every account gets a standard address form that's set as the default for all countries. However, if you have customers in different countries, you can send them documents with addresses formatted for their country.

- For more information about customizing date formats, see the help topic [Formatting Dates, Numbers, Phone Numbers, and Time](#).
- For more information about currencies, see the help topic [Currency Management](#).
- For more information about customizing address forms, see the help topic [Customizing Address Forms](#).
- For more information about formatting support, see [International Formatting Support](#).

## International Formatting Support

This section covers how NetSuite supports different types of formatting and includes these topics:

- [Worldwide Support for Phone Number Formatting](#)
  - [Hiding the +1 Country Calling Code for Countries Using This Prefix](#)
  - [Phone Number Formatting Support in SuiteScript](#)
  - [Formatting API in SuiteScript 2.0](#)
  - [List of Supported Countries](#)

## Formatting API in SuiteScript 2.0

The `format.getCurrencyFormatter` and `format.getNumberFormatter` methods in the `N/format/i18n` module have an `options.locale` parameter. You can use `options.locale` to format numbers and currencies for the right region by setting the right locale. For example, if you set the locale to `en_IN` (English-India), all numbers and currencies follow the Indian number formatting system.

For more information, see the help topic [N/format/i18n Module](#).

For more information about worldwide formatting in the UI, see [Worldwide Support for Phone Number Formatting](#).

## Worldwide Support for Phone Number Formatting

Custom fields set to Phone Number use local formatting if you enable the Phone Number Formatting feature in your account. The Country field in your subsidiary defines which local formatting is used.

NetSuite supports worldwide phone number formatting for all countries in the UI and SuiteScript. This covers any phone number you enter on records, forms, and anywhere else in NetSuite.

For the full list of supported countries and their country codes, see [List of Supported Countries](#).

Only administrators can enable this feature.

For backward compatibility, you can hide the +1 international prefix. For more information, see [Hiding the +1 Country Calling Code for Countries Using This Prefix](#).

To enable worldwide phone number formatting, go to Setup > Company > Enable Features and check **Worldwide Support for Phone Number Formatting** in the **International** section.

When you enter a phone number in NetSuite, it's formatted using these rules:

- NetSuite checks your subsidiary's country against the phone number you enter.
- If you enter the number in international format and it's from your subsidiary's country, NetSuite leaves out the country code and formats it using national standards.
- If you enter the number in international format and it's from another country, NetSuite keeps it in international format and uses that country's standards.
- If you enter the number in national format, NetSuite formats it for your subsidiary's country.

 **Note:** This feature only formats valid phone numbers. If you enter an invalid number, like all zeroes, the number won't be formatted.


Phone number formatting only happens after you open the record and access or edit the phone number field. The field can be up to 32 characters long.

This feature doesn't change phone numbers already saved in NetSuite. They're only reformatted if you open the record and access or edit the field.

This feature supports these phone number formats:

- Local phone numbers
- Area phone numbers
- National phone numbers
- International phone numbers
- Special phone numbers
- Emergency service phone numbers
- Alphanumeric phone numbers

See the phone number formatting decision tree:

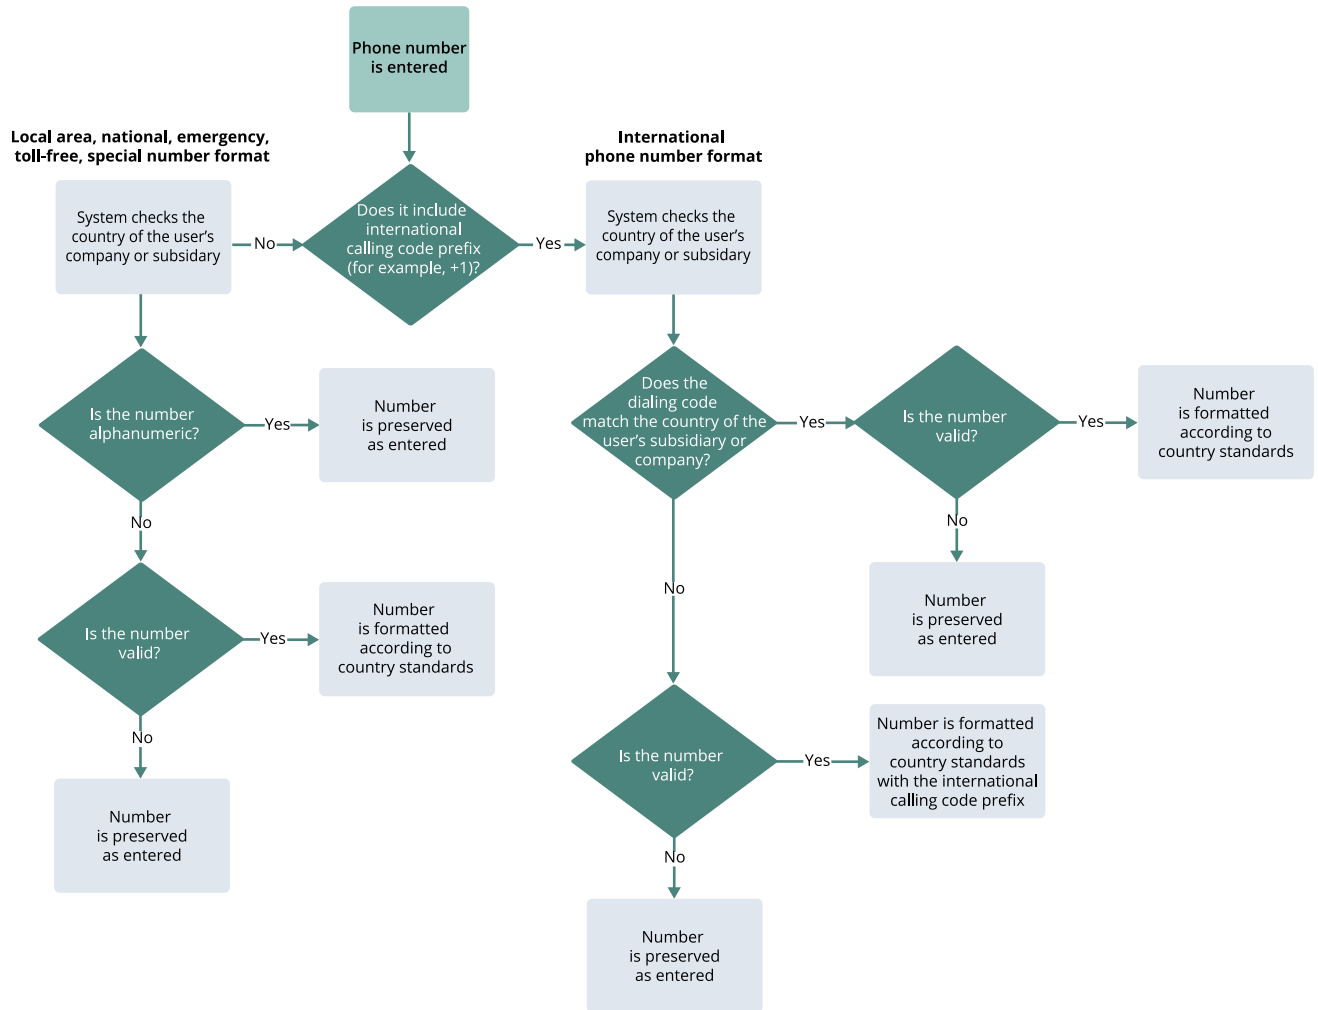

## Hiding the +1 Country Calling Code for Countries Using This Prefix

You can hide the +1 country code in phone numbers if you meet both of these requirements:

- You use the Worldwide Support for Phone Number formatting feature.
- Your company is in a country that uses the +1 country code.

The +1 code is used in the USA, Canada, and in some Caribbean, and British Overseas Territories.

This update helps with backward compatibility for users of the Worldwide Support for Phone Number Formatting feature.

To hide the +1 code, go to Setup > Company > General Preferences and check **Use phone numbers without the +1 international country calling code**.

**Note:** If you don't have Worldwide Support for Phone Number Formatting enabled, you won't see the option to use phone numbers without the +1 code.

## Phone Number Formatting Support in SuiteScript

The Worldwide Support for Phone Number Formatting feature adds two new SuiteScript formatting objects: **format.PhoneNumberFormatter** and **format.PhoneNumberParser**.

For more information about these formatting methods, see the help topic [N/format/i18n Module](#).

## List of Supported Countries

See the list of supported countries, their codes, calling codes and phone numbers in three different formats.

| Region | Country Name         | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile  |
|--------|----------------------|----------------------|------------------------|-------------------|----------------------|------------------|
| AC     | Ascension Island     | 247                  | +247 62889             | 62889             | +247 40123           | 40123            |
| AD     | Andorra              | 376                  | +376 712 345           | 712 345           | +376 312 345         | 312 345          |
| AE     | United Arab Emirates | 971                  | +971 2 234 5678        | 02 234 5678       | +971 50 123 4567     | 050 123 4567     |
| AF     | Afghanistan          | 93                   | +93 23 456 7890        | 023 456 7890      | +93 70 123 4567      | 070 123 4567     |
| AG     | Antigua & Barbuda    | 1                    | +1 268-460-1234        | (268) 460-1234    | +1 268-464-1234      | (268) 464-1234   |
| AI     | Anguilla             | 1                    | +1 264-461-2345        | (264) 461-2345    | +1 264-235-1234      | (264) 235-1234   |
| AL     | Albania              | 355                  | +355 22 345 678        | 022 345 678       | +355 67 212 3456     | 067 212 3456     |
| AM     | Armenia              | 374                  | +374 10 123456         | (010) 123456      | +374 77 123456       | 077 123456       |
| AO     | Angola               | 244                  | +244 222 123 456       | 222 123 456       | +244 923 123 456     | 923 123 456      |
| AR     | Argentina            | 54                   | +54 11 2345-6789       | 011 2345-6789     | +54 9 11 2345-6789   | 011 15-2345-6789 |
| AS     | American Samoa       | 1                    | +1 684-622-1234        | (684) 622-1234    | +1 684-733-1234      | (684) 733-1234   |
| AT     | Austria              | 43                   | +43 1 234567890        | 01 234567890      | +43 664 123456       | 0664 123456      |
| AU     | Australia            | 61                   | +61 2 1234 5678        | (02) 1234 5678    | +61 412 345 678      | 0412 345 678     |
| AW     | Aruba                | 297                  | +297 521 2345          | 521 2345          | +297 560 1234        | 560 1234         |
| AX     | Åland Islands        | 358                  | +358 18 1234567        | 018 1234567       | +358 41 2345678      | 041 2345678      |
| AZ     | Azerbaijan           | 994                  | +994 12 312 34 56      | (012) 312 34 56   | +994 40 123 45 67    | 040 123 45 67    |
| BA     | Bosnia & Herzegovina | 387                  | +387 30 212-345        | 030 212-345       | +387 61 123 456      | 061 123 456      |
| BB     | Barbados             | 1                    | +1 246-412-3456        | (246) 412-3456    | +1 246-250-1234      | (246) 250-1234   |
| BD     | Bangladesh           | 880                  | +880 2-7111234         | 02-7111234        | +880 1812-345678     | 01812-345678     |
| BE     | Belgium              | 32                   | +32 12 34 56 78        | 012 34 56 78      | +32 470 12 34 56     | 0470 12 34 56    |

| Region | Country Name                     | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|----------------------------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| BF     | Burkina Faso                     | 226                  | +226 20 49 12 34       | 20 49 12 34       | +226 70 12 34 56     | 70 12 34 56     |
| BG     | Bulgaria                         | 359                  | +359 2 123 456         | 02 123 456        | +359 48 123 456      | 048 123 456     |
| BH     | Bahrain                          | 973                  | +973 1700 1234         | 1700 1234         | +973 3600 1234       | 3600 1234       |
| BI     | Burundi                          | 257                  | +257 22 20 12 34       | 22 20 12 34       | +257 79 56 12 34     | 79 56 12 34     |
| BJ     | Benin                            | 229                  | +229 20 21 12 34       | 20 21 12 34       | +229 90 01 12 34     | 90 01 12 34     |
| BL     | St. Barthélemy                   | 590                  | +590 590 27 12 34      | 0590 27 12 34     | +590 690 00 12 34    | 0690 00 12 34   |
| BM     | Bermuda                          | 1                    | +1 441-234-5678        | (441) 234-5678    | +1 441-370-1234      | (441) 370-1234  |
| BN     | Brunei                           | 673                  | +673 234 5678          | 234 5678          | +673 712 3456        | 712 3456        |
| BO     | Bolivia (Plurinational State of) | 591                  | +591 2 2123456         | 2 2123456         | +591 71234567        | 71234567        |
| BQ     | Caribbean Netherlands            | 599                  | +599 715 1234          | 715 1234          | +599 318 1234        | 318 1234        |
| BR     | Brazil                           | 55                   | +55 11 2345-6789       | (11) 2345-6789    | +55 11 96123-4567    | (11) 96123-4567 |
| BS     | Bahamas                          | 1                    | +1 242-345-6789        | (242) 345-6789    | +1 242-359-1234      | (242) 359-1234  |
| BT     | Bhutan                           | 975                  | +975 2 345 678         | 2 345 678         | +975 17 12 34 56     | 17 12 34 56     |
| BW     | Botswana                         | 267                  | +267 240 1234          | 240 1234          | +267 71 123 456      | 71 123 456      |
| BY     | Belarus                          | 375                  | +375 152 45-09-11      | 8 0152 45-09-11   | +375 29 491-19-11    | 8 029 491-19-11 |
| BZ     | Belize                           | 501                  | +501 222-1234          | 222-1234          | +501 622-1234        | 622-1234        |
| CA     | Canada                           | 1                    | +1 506-234-5678        | (506) 234-5678    | +1 506-234-5678      | (506) 234-5678  |
| CC     | Cocos (Keeling) Islands          | 61                   | +61 8 9162 1234        | (08) 9162 1234    | +61 412 345 678      | 0412 345 678    |
| CD     | Congo - Kinshasa                 | 243                  | +243 12 34567          | 012 34567         | +243 991 234 567     | 0991 234 567    |
| CF     | Central African Republic         | 236                  | +236 21 61 23 45       | 21 61 23 45       | +236 70 01 23 45     | 70 01 23 45     |
| CG     | Congo - Brazzaville              | 242                  | +242 22 212 3456       | 22 212 3456       | +242 06 123 4567     | 06 123 4567     |
| CH     | Switzerland                      | 41                   | +41 21 234 56 78       | 021 234 56 78     | +41 78 123 45 67     | 078 123 45 67   |
| CI     | Côte d'Ivoire                    | 225                  | +225 21 23 45 67       | 21 23 45 67       | +225 01 23 45 67     | 01 23 45 67     |
| CK     | Cook Islands                     | 682                  | +682 21 234            | 21 234            | +682 71 234          | 71 234          |
| CL     | Chile                            | 56                   | +56 2 2123 4567        | (2) 2123 4567     | +56 2 2123 4567      | (2) 2123 4567   |
| CM     | Cameroon                         | 237                  | +237 2 22 12 34 56     | 2 22 12 34 56     | +237 6 71 23 45 67   | 6 71 23 45 67   |
| CN     | China                            | 86                   | +86 10 1234 5678       | 010 1234 5678     | +86 131 2345 6789    | 131 2345 6789   |

| Region | Country Name                     | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|----------------------------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| CO     | Colombia                         | 57                   | +57 1 2345678          | (1) 2345678       | +57 321 1234567      | 321 1234567     |
| CR     | Costa Rica                       | 506                  | +506 2212 3456         | 2212 3456         | +506 8312 3456       | 8312 3456       |
| CU     | Cuba                             | 53                   | +53 7 1234567          | (07) 1234567      | +53 5 1234567        | 05 1234567      |
| CV     | Cabo Verde                       | 238                  | +238 221 12 34         | 221 12 34         | +238 991 12 34       | 991 12 34       |
| CW     | Curaçao                          | 599                  | +599 9 435 1234        | 9 435 1234        | +599 9 518 1234      | 9 518 1234      |
| CX     | Christmas Island                 | 61                   | +61 8 9164 1234        | (08) 9164 1234    | +61 412 345 678      | 0412 345 678    |
| CY     | Cyprus                           | 357                  | +357 22 345678         | 22 345678         | +357 96 123456       | 96 123456       |
| CZ     | Czechia                          | 420                  | +420 212 345 678       | 212 345 678       | +420 601 123 456     | 601 123 456     |
| DE     | Germany                          | 49                   | +49 30 123456          | 030 123456        | +49 1512 3456789     | 01512 3456789   |
| DJ     | Djibouti                         | 253                  | +253 21 36 00 03       | 21 36 00 03       | +253 77 83 10 01     | 77 83 10 01     |
| DK     | Denmark                          | 45                   | +45 32 12 34 56        | 32 12 34 56       | +45 32 12 34 56      | 32 12 34 56     |
| DM     | Dominica                         | 1                    | +1 767-420-1234        | (767) 420-1234    | +1 767-225-1234      | (767) 225-1234  |
| DO     | Dominican Republic               | 1                    | +1 809-234-5678        | (809) 234-5678    | +1 809-234-5678      | (809) 234-5678  |
| DZ     | Algeria                          | 213                  | +213 12 34 56 78       | 012 34 56 78      | +213 551 23 45 67    | 0551 23 45 67   |
| EC     | Ecuador                          | 593                  | +593 2-212-3456        | (02) 212-3456     | +593 99 123 4567     | 099 123 4567    |
| EE     | Estonia                          | 372                  | +372 321 2345          | 321 2345          | +372 5123 4567       | 5123 4567       |
| EG     | Egypt                            | 20                   | +20 2 34567890         | 02 34567890       | +20 100 123 4567     | 0100 123 4567   |
| EH     | Western Sahara                   | 212                  | +212 5288-12345        | 05288-12345       | +212 650-123456      | 0650-123456     |
| ER     | Eritrea                          | 291                  | +291 8 370 362         | 08 370 362        | +291 7 123 456       | 07 123 456      |
| ES     | Spain                            | 34                   | +34 810 12 34 56       | 810 12 34 56      | +34 612 34 56 78     | 612 34 56 78    |
| ET     | Ethiopia                         | 251                  | +251 11 111 2345       | 011 111 2345      | +251 91 123 4567     | 091 123 4567    |
| FI     | Finland                          | 358                  | +358 13 1234567        | 013 1234567       | +358 41 2345678      | 041 2345678     |
| FJ     | Fiji                             | 679                  | +679 321 2345          | 321 2345          | +679 701 2345        | 701 2345        |
| FK     | Falkland Islands (Malvinas)      | 500                  | +500 31234             | 31234             | +500 51234           | 51234           |
| FM     | Micronesia (Federated States of) | 691                  | +691 320 1234          | 320 1234          | +691 350 1234        | 350 1234        |
| FO     | Faroe Islands                    | 298                  | +298 201234            | 201234            | +298 211234          | 211234          |
| FR     | France                           | 33                   | +33 1 23 45 67 89      | 01 23 45 67 89    | +33 6 12 34 56 78    | 06 12 34 56 78  |
| GA     | Gabon                            | 241                  | +241 01 44 12 34       | 01 44 12 34       | +241 06 03 12 34     | 06 03 12 34     |



| Region | Country Name        | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|---------------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| GB     | United Kingdom      | 44                   | +44 121 234 5678       | 0121 234 5678     | +44 7400 123456      | 07400 123456    |
| GD     | Grenada             | 1                    | +1 473-269-1234        | (473) 269-1234    | +1 473-403-1234      | (473) 403-1234  |
| GE     | Georgia             | 995                  | +995 32 212 34 56      | 032 212 34 56     | +995 555 12 34 56    | 555 12 34 56    |
| GF     | French Guiana       | 594                  | +594 594 10 12 34      | 0594 10 12 34     | +594 694 20 12 34    | 0694 20 12 34   |
| GG     | Guernsey            | 44                   | +44 1481 256789        | 01481 256789      | +44 7781 123456      | 07781 123456    |
| GH     | Ghana               | 233                  | +233 30 234 5678       | 030 234 5678      | +233 23 123 4567     | 023 123 4567    |
| GI     | Gibraltar           | 350                  | +350 200 12345         | 200 12345         | +350 57123456        | 57123456        |
| GL     | Greenland           | 299                  | +299 32 10 00          | 32 10 00          | +299 22 12 34        | 22 12 34        |
| GM     | Gambia              | 220                  | +220 566 1234          | 566 1234          | +220 301 2345        | 301 2345        |
| GN     | Guinea              | 224                  | +224 30 24 12 34       | 30 24 12 34       | +224 601 12 34 56    | 601 12 34 56    |
| GP     | Guadeloupe          | 590                  | +590 590 20 12 34      | 0590 20 12 34     | +590 690 00 12 34    | 0690 00 12 34   |
| GQ     | Equatorial Guinea   | 240                  | +240 333 091 234       | 333 091 234       | +240 222 123 456     | 222 123 456     |
| GR     | Greece              | 30                   | +30 21 2345 6789       | 21 2345 6789      | +30 691 234 5678     | 691 234 5678    |
| GT     | Guatemala           | 502                  | +502 2245 6789         | 2245 6789         | +502 5123 4567       | 5123 4567       |
| GU     | Guam                | 1                    | +1 671-300-1234        | (671) 300-1234    | +1 671-300-1234      | (671) 300-1234  |
| GW     | Guinea-Bissau       | 245                  | +245 443 201 234       | 443 201 234       | +245 955 012 345     | 955 012 345     |
| GY     | Guyana              | 592                  | +592 220 1234          | 220 1234          | +592 609 1234        | 609 1234        |
| HK     | Hong Kong SAR China | 852                  | +852 2123 4567         | 2123 4567         | +852 5123 4567       | 5123 4567       |
| HN     | Honduras            | 504                  | +504 2212-3456         | 2212-3456         | +504 9123-4567       | 9123-4567       |
| HR     | Croatia             | 385                  | +385 1 2345 678        | 01 2345 678       | +385 92 123 4567     | 092 123 4567    |
| HT     | Haiti               | 509                  | +509 22 45 3300        | 22 45 3300        | +509 34 10 1234      | 34 10 1234      |
| HU     | Hungary             | 36                   | +36 1 234 5678         | (06 1) 234 5678   | +36 20 123 4567      | 06 20 123 4567  |
| ID     | Indonesia           | 62                   | +62 21 8350123         | (021) 8350123     | +62 812-345-678      | 0812-345-678    |
| IE     | Ireland             | 353                  | +353 22 12345          | (022) 12345       | +353 85 012 3456     | 085 012 3456    |
| IL     | Israel              | 972                  | +972 2-123-4567        | 02-123-4567       | +972 50-234-5678     | 050-234-5678    |
| IM     | Isle of Man         | 44                   | +44 1624 756789        | 01624 756789      | +44 7924 123456      | 07924 123456    |
| IN     | India               | 91                   | +91 74104 10123        | 074104 10123      | +91 81234 56789      | 081234 56789    |

| Region | Country Name                   | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile  |
|--------|--------------------------------|----------------------|------------------------|-------------------|----------------------|------------------|
| IO     | British Indian Ocean Territory | 246                  | +246 370 9100          | 370 9100          | +246 380 1234        | 380 1234         |
| IQ     | Iraq                           | 964                  | +964 1 234 5678        | 01 234 5678       | +964 791 234 5678    | 0791 234 5678    |
| IR     | Iran                           | 98                   | +98 21 2345 6789       | 021 2345 6789     | +98 912 345 6789     | 0912 345 6789    |
| IS     | Iceland                        | 354                  | +354 410 1234          | 410 1234          | +354 611 1234        | 611 1234         |
| IT     | Italy                          | 39                   | +39 02 1234 5678       | 02 1234 5678      | +39 312 345 6789     | 312 345 6789     |
| JE     | Jersey                         | 44                   | +44 1534 456789        | 01534 456789      | +44 7797 712345      | 07797 712345     |
| JM     | Jamaica                        | 1                    | +1 876-523-0123        | (876) 523-0123    | +1 876-210-1234      | (876) 210-1234   |
| JO     | Jordan                         | 962                  | +962 6 200 1234        | (06) 200 1234     | +962 7 9012 3456     | 07 9012 3456     |
| JP     | Japan                          | 81                   | +81 3-1234-5678        | 03-1234-5678      | +81 90-1234-5678     | 090-1234-5678    |
| KE     | Kenya                          | 254                  | +254 20 2012345        | 020 2012345       | +254 712 123456      | 0712 123456      |
| KG     | Kyrgyzstan                     | 996                  | +996 312 123 456       | 0312 123 456      | +996 700 123 456     | 0700 123 456     |
| KH     | Cambodia                       | 855                  | +855 23 756 789        | 023 756 789       | +855 91 234 567      | 091 234 567      |
| KI     | Kiribati                       | 686                  | +686 31234             | 31234             | +686 72001234        | 72001234         |
| KM     | Comoros                        | 269                  | +269 771 23 45         | 771 23 45         | +269 321 23 45       | 321 23 45        |
| KN     | St. Kitts & Nevis              | 1                    | +1 869-236-1234        | (869) 236-1234    | +1 869-765-2917      | (869) 765-2917   |
| KP     | North Korea                    | 850                  | +850 2 123 4567        | 02 123 4567       | +850 192 123 4567    | 0192 123 4567    |
| KR     | South Korea                    | 82                   | +82 2-212-3456         | 02-212-3456       | +82 10-2000-0000     | 010-2000-0000    |
| KW     | Kuwait                         | 965                  | +965 2234 5678         | 2234 5678         | +965 500 12345       | 500 12345        |
| KY     | Cayman Islands                 | 1                    | +1 345-222-1234        | (345) 222-1234    | +1 345-323-1234      | (345) 323-1234   |
| KZ     | Kazakhstan                     | 7                    | +7 71234 5 67 89       | 8 (71234) 5 67 89 | +7 771 000 9998      | 8 (771) 000 9998 |
| LA     | Laos                           | 856                  | +856 21 212 862        | 021 212 862       | +856 20 23 123 456   | 020 23 123 456   |
| LB     | Lebanon                        | 961                  | +961 1 123 456         | 01 123 456        | +961 71 123 456      | 71 123 456       |
| LC     | St. Lucia                      | 1                    | +1 758-430-5678        | (758) 430-5678    | +1 758-284-5678      | (758) 284-5678   |
| LI     | Liechtenstein                  | 423                  | +423 234 56 78         | 234 56 78         | +423 660 234 567     | 660 234 567      |
| LK     | Sri Lanka                      | 94                   | +94 112 345 678        | 0112 345 678      | +94 71 234 5678      | 071 234 5678     |
| LR     | Liberia                        | 231                  | +231 21 234 567        | 021 234 567       | +231 77 012 3456     | 077 012 3456     |

| Region | Country Name               | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|----------------------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| LS     | Lesotho                    | 266                  | +266 2212 3456         | 2212 3456         | +266 5012 3456       | 5012 3456       |
| LT     | Lithuania                  | 370                  | +370 312 34567         | (8-312) 34567     | +370 612 34567       | (8-612) 34567   |
| LU     | Luxembourg                 | 352                  | +352 27 12 34 56       | 27 12 34 56       | +352 628 123 456     | 628 123 456     |
| LV     | Latvia                     | 371                  | +371 63 123 456        | 63 123 456        | +371 21 234 567      | 21 234 567      |
| LY     | Libya                      | 218                  | +218 21-2345678        | 021-2345678       | +218 91-2345678      | 091-2345678     |
| MA     | Morocco                    | 212                  | +212 520-123456        | 0520-123456       | +212 650-123456      | 0650-123456     |
| MC     | Monaco                     | 377                  | +377 99 12 34 56       | 99 12 34 56       | +377 6 12 34 56 78   | 06 12 34 56 78  |
| MD     | Moldova (the Republic of)  | 373                  | +373 22 212 345        | 022 212 345       | +373 621 12 345      | 0621 12 345     |
| ME     | Montenegro                 | 382                  | +382 30 234 567        | 030 234 567       | +382 67 622 901      | 067 622 901     |
| MF     | Saint Martin (French part) | 590                  | +590 590 27 12 34      | 0590 27 12 34     | +590 690 00 12 34    | 0690 00 12 34   |
| MG     | Madagascar                 | 261                  | +261 20 21 234 56      | 020 21 234 56     | +261 32 12 345 67    | 032 12 345 67   |
| MH     | Marshall Islands           | 692                  | +692 247-1234          | 247-1234          | +692 235-1234        | 235-1234        |
| MK     | North Macedonia            | 389                  | +389 2 201 2345        | 02 201 2345       | +389 72 345 678      | 072 345 678     |
| ML     | Mali                       | 223                  | +223 20 21 23 45       | 20 21 23 45       | +223 65 01 23 45     | 65 01 23 45     |
| MM     | Myanmar                    | 95                   | +95 1 234 567          | 01 234 567        | +95 9 212 3456       | 09 212 3456     |
| MN     | Mongolia                   | 976                  | +976 5012 3456         | 5012 3456         | +976 8812 3456       | 8812 3456       |
| MO     | Macao                      | 853                  | +853 2821 2345         | 2821 2345         | +853 6612 3456       | 6612 3456       |
| MP     | Northern Mariana Islands   | 1                    | +1 670-234-5678        | (670) 234-5678    | +1 670-234-5678      | (670) 234-5678  |
| MQ     | Martinique                 | 596                  | +596 596 30 12 34      | 0596 30 12 34     | +596 696 20 12 34    | 0696 20 12 34   |
| MR     | Mauritania                 | 222                  | +222 35 12 34 56       | 35 12 34 56       | +222 22 12 34 56     | 22 12 34 56     |
| MS     | Montserrat                 | 1                    | +1 664-491-2345        | (664) 491-2345    | +1 664-492-3456      | (664) 492-3456  |
| MT     | Malta                      | 356                  | +356 2100 1234         | 2100 1234         | +356 9696 1234       | 9696 1234       |
| MU     | Mauritius                  | 230                  | +230 5448 0123         | 5448 0123         | +230 5251 2345       | 5251 2345       |
| MV     | Maldives                   | 960                  | +960 670-1234          | 670-1234          | +960 771-2345        | 771-2345        |
| MW     | Malawi                     | 265                  | +265 1 234 567         | 01 234 567        | +265 991 23 45 67    | 0991 23 45 67   |
| MX     | Mexico                     | 52                   | +52 200 123 4567       | 200 123 4567      | +52 222 123 4567     | 222 123 4567    |
| MY     | Malaysia                   | 60                   | +60 3-2385 6789        | 03-2385 6789      | +60 12-345 6789      | 012-345 6789    |
| MZ     | Mozambique                 | 258                  | +258 21 123 456        | 21 123 456        | +258 82 123 4567     | 82 123 4567     |

| Region | Country Name              | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|---------------------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| NA     | Namibia                   | 264                  | +264 61 221 234        | 061 221 234       | +264 81 123 4567     | 081 123 4567    |
| NC     | New Caledonia             | 687                  | +687 20.12.34          | 20.12.34          | +687 75.12.34        | 75.12.34        |
| NE     | Niger                     | 227                  | +227 20 20 12 34       | 20 20 12 34       | +227 93 12 34 56     | 93 12 34 56     |
| NF     | Norfolk Island            | 672                  | +672 10 6609           | 10 6609           | +672 3 81234         | 3 81234         |
| NG     | Nigeria                   | 234                  | +234 1 804 0123        | 01 804 0123       | +234 802 123 4567    | 0802 123 4567   |
| NI     | Nicaragua                 | 505                  | +505 2123 4567         | 2123 4567         | +505 8123 4567       | 8123 4567       |
| NL     | Netherlands               | 31                   | +31 10 123 4567        | 010 123 4567      | +31 6 12345678       | 06 12345678     |
| NO     | Norway                    | 47                   | +47 21 23 45 67        | 21 23 45 67       | +47 406 12 345       | 406 12 345      |
| NP     | Nepal                     | 977                  | +977 1-4567890         | 01-4567890        | +977 984-1234567     | 984-1234567     |
| NR     | Nauru                     | 674                  | +674 444 1234          | 444 1234          | +674 555 1234        | 555 1234        |
| NU     | Niue                      | 683                  | +683 7012              | 7012              | +683 888 4012        | 888 4012        |
| NZ     | New Zealand               | 64                   | +64 3-234 5678         | 03-234 5678       | +64 21 123 4567      | 021 123 4567    |
| OM     | Oman                      | 968                  | +968 23 123456         | 23 123456         | +968 9212 3456       | 9212 3456       |
| PA     | Panama                    | 507                  | +507 200-1234          | 200-1234          | +507 6123-4567       | 6123-4567       |
| PE     | Peru                      | 51                   | +51 1 1234567          | (01) 1234567      | +51 912 345 678      | 912 345 678     |
| PF     | French Polynesia          | 689                  | +689 40 41 23 45       | 40 41 23 45       | +689 87 12 34 56     | 87 12 34 56     |
| PG     | Papua New Guinea          | 675                  | +675 312 3456          | 312 3456          | +675 7012 3456       | 7012 3456       |
| PH     | Philippines               | 63                   | +63 2 123 4567         | (02) 123 4567     | +63 905 123 4567     | 0905 123 4567   |
| PK     | Pakistan                  | 92                   | +92 21 23456789        | (021) 23456789    | +92 301 2345678      | 0301 2345678    |
| PL     | Poland                    | 48                   | +48 12 345 67 89       | 12 345 67 89      | +48 512 345 678      | 512 345 678     |
| PM     | Saint Pierre and Miquelon | 508                  | +508 43 01 23          | 043 01 23         | +508 55 12 34        | 055 12 34       |
| PR     | Puerto Rico               | 1                    | +1 787-234-5678        | (787) 234-5678    | +1 787-234-5678      | (787) 234-5678  |
| PS     | Palestine, State of       | 970                  | +970 2 223 4567        | 02 223 4567       | +970 599 123 456     | 0599 123 456    |
| PT     | Portugal                  | 351                  | +351 21 234 5678       | 21 234 5678       | +351 912 345 678     | 912 345 678     |
| PW     | Palau                     | 680                  | +680 277 1234          | 277 1234          | +680 620 1234        | 620 1234        |
| PY     | Paraguay                  | 595                  | +595 21 234 5678       | (021) 234 5678    | +595 961 456789      | 0961 456789     |
| QA     | Qatar                     | 974                  | +974 4412 3456         | 4412 3456         | +974 3312 3456       | 3312 3456       |
| RE     | Réunion                   | 262                  | +262 262 16 12 34      | 0262 16 12 34     | +262 692 12 34 56    | 0692 12 34 56   |
| RO     | Romania                   | 40                   | +40 21 123 4567        | 021 123 4567      | +40 712 034 567      | 0712 034 567    |

| Region | Country Name                                 | Country Calling Code | International Landline | National Landline    | International Mobile | National Mobile      |
|--------|----------------------------------------------|----------------------|------------------------|----------------------|----------------------|----------------------|
| RS     | Serbia                                       | 381                  | +381 10 234567         | 010 234567           | +381 60 1234567      | 060 1234567          |
| RU     | Russia                                       | 7                    | +7 301 123-45-67       | 8 (301)<br>123-45-67 | +7 912 345-67-89     | 8 (912)<br>345-67-89 |
| RW     | Rwanda                                       | 250                  | +250 250 123 456       | 250 123 456          | +250 720 123 456     | 0720 123 456         |
| SA     | Saudi Arabia                                 | 966                  | +966 11 234 5678       | 011 234 5678         | +966 51 234 5678     | 051 234 5678         |
| SB     | Solomon Islands                              | 677                  | +677 40123             | 40123                | +677 74 21234        | 74 21234             |
| SC     | Seychelles                                   | 248                  | +248 4 217 123         | 4 217 123            | +248 2 510 123       | 2 510 123            |
| SD     | Sudan                                        | 249                  | +249 15 312 3456       | 015 312 3456         | +249 91 123 1234     | 091 123 1234         |
| SE     | Sweden                                       | 46                   | +46 8 12 34 56         | 08-12 34 56          | +46 70 123 45 67     | 070-123 45 67        |
| SG     | Singapore                                    | 65                   | +65 6123 4567          | 6123 4567            | +65 8123 4567        | 8123 4567            |
| SH     | Saint Helena, Ascension and Tristan da Cunha | 290                  | +290 22158             | 22158                | +290 51234           | 51234                |
| SI     | Slovenia                                     | 386                  | +386 1 234 56 78       | (01) 234 56 78       | +386 31 234 567      | 031 234 567          |
| SJ     | Svalbard and Jan Mayen                       | 47                   | +47 79 12 34 56        | 79 12 34 56          | +47 412 34 567       | 412 34 567           |
| SK     | Slovakia                                     | 421                  | +421 2/212 345 67      | 02/212 345 67        | +421 912 123 456     | 0912 123 456         |
| SL     | Sierra Leone                                 | 232                  | +232 22 221234         | (022) 221234         | +232 25 123456       | (025) 123456         |
| SM     | San Marino                                   | 378                  | +378 0549 886377       | 0549 886377          | +378 66 66 12 12     | 66 66 12 12          |
| SN     | Senegal                                      | 221                  | +221 30 101 23 45      | 30 101 23 45         | +221 70 123 45 67    | 70 123 45 67         |
| SO     | Somalia                                      | 252                  | +252 4 012345          | 4 012345             | +252 7 1123456       | 7 1123456            |
| SR     | Suriname                                     | 597                  | +597 211-234           | 211-234              | +597 741-2345        | 741-2345             |
| SS     | South Sudan                                  | 211                  | +211 181 234 567       | 0181 234 567         | +211 977 123 456     | 0977 123 456         |
| ST     | São Tomé & Príncipe                          | 239                  | +239 222 1234          | 222 1234             | +239 981 2345        | 981 2345             |
| SV     | El Salvador                                  | 503                  | +503 2123 4567         | 2123 4567            | +503 7012 3456       | 7012 3456            |
| SX     | Sint Maarten (Dutch part)                    | 1                    | +1 721-542-5678        | (721) 542-5678       | +1 721-520-5678      | (721) 520-5678       |
| SY     | Syria                                        | 963                  | +963 11 234 5678       | 011 234 5678         | +963 944 567 890     | 0944 567 890         |
| SZ     | Eswatini                                     | 268                  | +268 2217 1234         | 2217 1234            | +268 7612 3456       | 7612 3456            |
| TA     | Tristan da Cunha                             | 290                  | +290 8999              | 8999                 | —                    | —                    |

| Region | Country Name                       | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|------------------------------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| TC     | Turks & Caicos Islands             | 1                    | +1 649-712-1234        | (649) 712-1234    | +1 649-231-1234      | (649) 231-1234  |
| TD     | Chad                               | 235                  | +235 22 50 12 34       | 22 50 12 34       | +235 63 01 23 45     | 63 01 23 45     |
| TG     | Togo                               | 228                  | +228 22 21 23 45       | 22 21 23 45       | +228 90 11 23 45     | 90 11 23 45     |
| TH     | Thailand                           | 66                   | +66 2 123 4567         | 02 123 4567       | +66 81 234 5678      | 081 234 5678    |
| TJ     | Tajikistan                         | 992                  | +992 372 12 3456       | 372 12 3456       | +992 917 12 3456     | 917 12 3456     |
| TK     | Tokelau                            | 690                  | +690 3101              | 3101              | +690 7290            | 7290            |
| TL     | Timor-Leste                        | 670                  | +670 211 2345          | 211 2345          | +670 7721 2345       | 7721 2345       |
| TM     | Turkmenistan                       | 993                  | +993 12 34-56-78       | (8 12) 34-56-78   | +993 66 123456       | 8 66 123456     |
| TN     | Tunisia                            | 216                  | +216 30 010 123        | 30 010 123        | +216 20 123 456      | 20 123 456      |
| TO     | Tonga                              | 676                  | +676 20-123            | 20-123            | +676 771 5123        | 771 5123        |
| TR     | Türkiye                            | 90                   | +90 212 345 67 89      | (0212) 345 67 89  | +90 501 234 56 78    | 0501 234 56 78  |
| TT     | Trinidad & Tobago                  | 1                    | +1 868-221-1234        | (868) 221-1234    | +1 868-291-1234      | (868) 291-1234  |
| TV     | Tuvalu                             | 688                  | +688 20123             | 20123             | +688 901234          | 901234          |
| TW     | Taiwan (Province of China)         | 886                  | +886 2 2123 4567       | 02 2123 4567      | +886 912 345 678     | 0912 345 678    |
| TZ     | Tanzania, the United Republic of   | 255                  | +255 22 234 5678       | 022 234 5678      | +255 621 234 567     | 0621 234 567    |
| UA     | Ukraine                            | 380                  | +380 3112 34567        | 03112 34567       | +380 50 123 4567     | 050 123 4567    |
| UG     | Uganda                             | 256                  | +256 31 2345678        | 031 2345678       | +256 712 345678      | 0712 345678     |
| US     | United States                      | 1                    | +1 201-555-0123        | (201) 555-0123    | +1 201-555-0123      | (201) 555-0123  |
| UY     | Uruguay                            | 598                  | +598 2123 1234         | 2123 1234         | +598 94 231 234      | 094 231 234     |
| UZ     | Uzbekistan                         | 998                  | +998 66 905 01 23      | 8 66 905 01 23    | +998 91 234 56 78    | 8 91 234 56 78  |
| VA     | Vatican City                       | 39                   | +39 06 6981 2345       | 06 6981 2345      | +39 312 345 6789     | 312 345 6789    |
| VC     | St. Vincent & Grenadines           | 1                    | +1 784-266-1234        | (784) 266-1234    | +1 784-430-1234      | (784) 430-1234  |
| VE     | Venezuela (Bolivarian Republic of) | 58                   | +58 212-1234567        | 0212-1234567      | +58 412-1234567      | 0412-1234567    |
| VG     | British Virgin Islands             | 1                    | +1 284-229-1234        | (284) 229-1234    | +1 284-300-1234      | (284) 300-1234  |
| VI     | Virgin Islands (U.S.)              | 1                    | +1 340-642-1234        | (340) 642-1234    | +1 340-642-1234      | (340) 642-1234  |
| VN     | Viet Nam                           | 84                   | +84 210 1234 567       | 0210 1234 567     | +84 91 234 56 78     | 091 234 56 78   |
| VU     | Vanuatu                            | 678                  | +678 22123             | 22123             | +678 591 2345        | 591 2345        |

| Region | Country Name    | Country Calling Code | International Landline | National Landline | International Mobile | National Mobile |
|--------|-----------------|----------------------|------------------------|-------------------|----------------------|-----------------|
| WF     | Wallis & Futuna | 681                  | +681 50 12 34          | 50 12 34          | +681 50 12 34        | 50 12 34        |
| WS     | Samoa           | 685                  | +685 22123             | 22123             | +685 72 12345        | 72 12345        |
| XK     | Kosovo          | 383                  | +383 28 012 345        | 028 012 345       | +383 43 201 234      | 043 201 234     |
| YE     | Yemen           | 967                  | +967 1 234 567         | 01 234 567        | +967 712 345 678     | 0712 345 678    |
| YT     | Mayotte         | 262                  | +262 269 60 12 34      | 0269 60 12 34     | +262 639 01 23 45    | 0639 01 23 45   |
| ZA     | South Africa    | 27                   | +27 10 123 4567        | 010 123 4567      | +27 71 123 4567      | 071 123 4567    |
| ZM     | Zambia          | 260                  | +260 211 234 567       | 0211 234 567      | +260 95 5123456      | 095 5123456     |
| ZW     | Zimbabwe        | 263                  | +263 13 12345          | 013 12345         | +263 71 234 5678     | 071 234 5678    |

## Localization Context

Localization context means background information needed to localize a product or part of NetSuite. In NetSuite, you can use localization context to decide which workflow or a script to run for each customer.

This section contains the following topics:

- [Record Localization Context Overview](#)
- [Record Localization Context](#)
  - [Records Supporting the Localization Context](#)
  - [Determining the Localization Context](#)
  - [Localization Context-Aware Scripts](#)
  - [Creating a Context-Aware Script](#)
  - [Localization Context Filtering in SDF](#)
  - [Localization Context Filtering Support for Scripts in Bundles](#)
  - [Localization Context Filtering for SuiteScript 2.x](#)
  - [Record Localization Context Available for Use in SuiteScript 2.0 API](#)

## Record Localization Context Overview

You can use record localization context in user event and client scripts to filter script run by localization context. In SuiteFlow, you can use record localization context to filter which workflows run.

Developers can use this feature to customize scripts for certain countries and keep them from running on records from other countries.

A record's localization context shows which country or countries are linked to that record.

For more information about Record Localization Context, see [Record Localization Context](#).

## Record Localization Context

You can use the record localization context in user event and client scripts to filter which scripts or workflows run.

Developers can use this feature to customize scripts for certain countries and keep them from running on records from other countries.

With localization context, the system doesn't need to load and run scripts to check if they're relevant.

Only customers using the Classic Center or Executive Center can use this feature, and it's only visible to these roles:

- Administrator
- Payroll Setup
- CEO
- CEO (Hands Off)

For more information about Centers and Roles, see the help topic [NetSuite Standard Centers](#).

This feature also adds two new entry points for client scripts, [localizationContextEnter\(scriptContext\)](#) and [localizationContextExit\(scriptContext\)](#). For more information, see the help topic [Localization Context](#).

For more information about entry points in SuiteScript, see the help topic [SuiteScript 2.x Client Script Entry Points and API](#).

For information about the Localization Context and Context Association Rule feature, see the following:

- [Records Supporting the Localization Context](#)
- [Determining the Localization Context](#)
- [Localization Context-Aware Scripts](#)
- [Creating a Context-Aware Script](#)
- [Record Localization Context Available for Use in SuiteScript 2.0 API](#)

For more details about setting up localization context filtering for user event and client script execution, see [Localization Context Filtering for SuiteScript 2.x](#).

Localization context filtering also works for scripts in SF SuiteApps, Bundles, and other parts of NetSuite, like workflows:

- For more information about the SDF support of localization context, see [Localization Context Filtering in SDF](#).
- For more information about localization context in Bundles, see [Localization Context Filtering Support for Scripts in Bundles](#).

## Records Supporting the Localization Context

You can use the localization context feature with these types of scriptable standard records:

- Item
- Transaction
- Entity
- Tax Code
- Tax Type
- Subsidiary



## ■ Account

You can use tax code and tax type records with record localization context in NetSuite.

You can create or view tax types and tax codes by going to Setup > Accounting.

For tax types, the record localization context comes from the **Country** field you select when creating the Tax Type.

For tax codes, the record localization context comes from the **Country** field of the Tax Type linked to the Tax Code.

Account and subsidiary records can use record localization context in scripts and workflows.

You can create or view accounts and subsidiaries by going to Setup > Company > Subsidiary Settings Manager.

For accounts, the record localization context comes from the **Country** field of account's subsidiary.


For subsidiaries, the record localization context comes from their **Country** field.

For a full list of records that support localization context, see the help topic [Records that Support Localization Context](#).

## Determining the Localization Context

A record's localization context shows which countries are linked to it. The system automatically determines a record's localization context using values in certain fields, like subsidiary and tax nexus. These fields show specific countries, like France, United Kingdom, or Germany.

The system uses a set process to determine the localization context for a record, based on several factors. The diagram below shows how this process works:

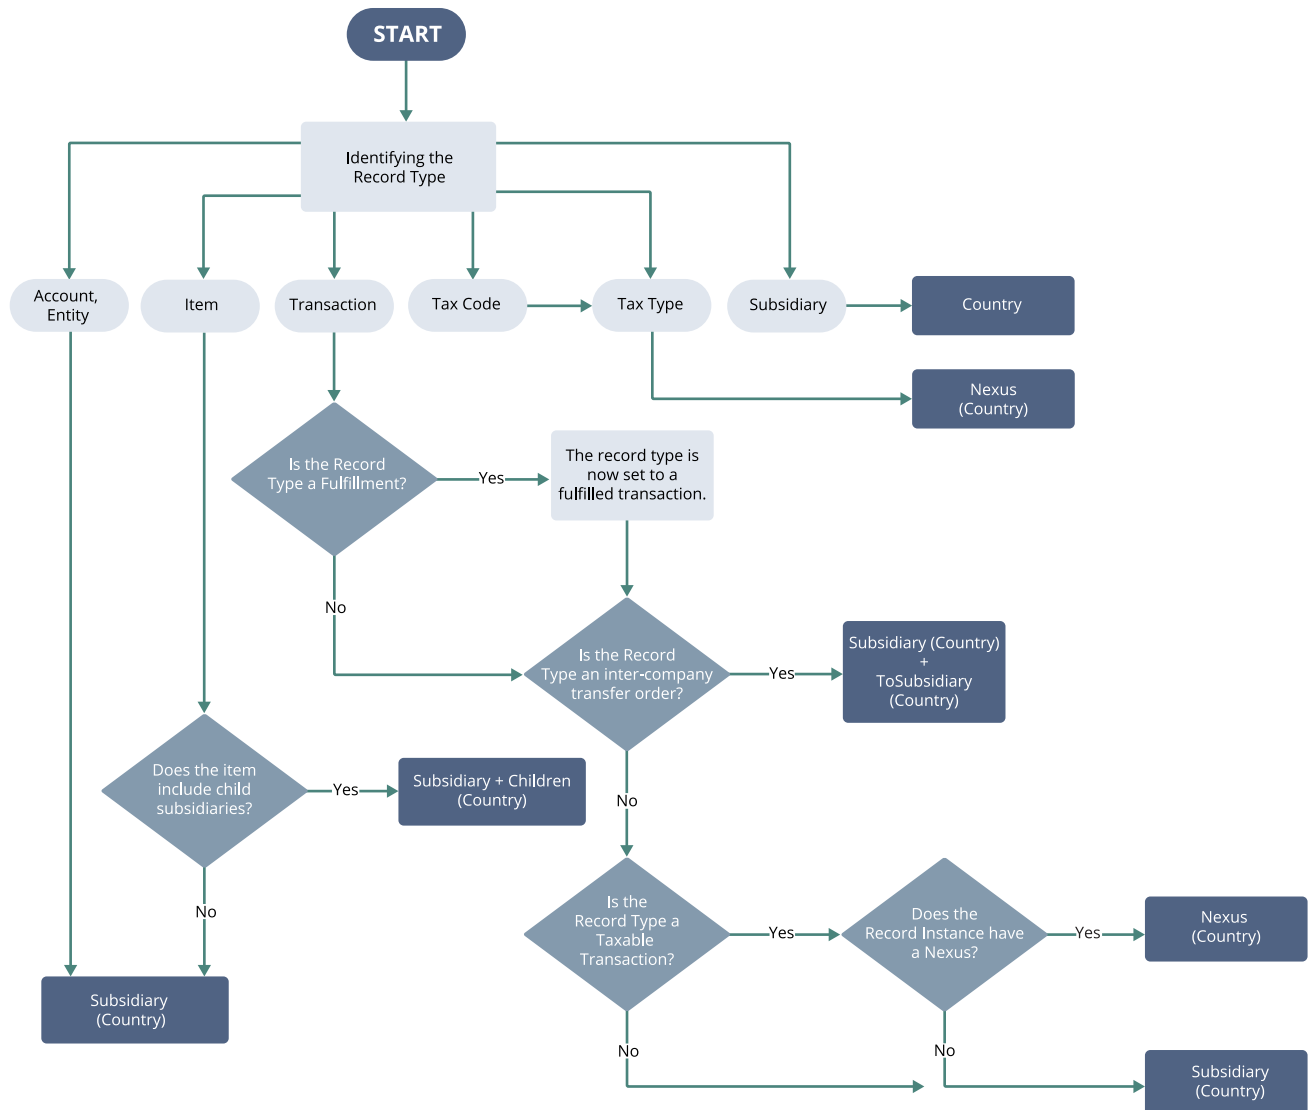

The process moves through the decision tree from **START** to one of the results in dark-gray boxes.

The results show which field the localization context is based on. For example, if it's "Subsidiary (Country)," the context uses the country field from that subsidiary.

A record's localization context can include more than one country and it's not limited to a single option. When scripts are filtered by localization context, a script runs if its context association rule matches any country in the localization context.

For client scripts, localization context is determined dynamically:

1. A user changes a field that affects the record's localization context.
2. The system immediately checks again to make sure the localization context is set correctly.
3. Based on the new localization context, the right scripts are loaded and attached to the record, and any that aren't needed are removed.

## Localization Context-Aware Scripts

Administrators and users with script access can set up a localization context association rule for SuiteScript 2.x user event or client scripts. You can set this rule on the script deployment record by picking the countries where the script applies. Script deployments with this rule create context-aware scripts.

Context-aware scripts only run on records linked to specific countries. NetSuite filters context-aware scripts by comparing a record's localization context to the countries you picked on the script deployment. This filtering helps user with subsidiaries in different countries because it makes script deployment run faster.

For more information about setting up a localization context association rule that filters script execution based on records' associated countries, see [Localization Context Filtering for SuiteScript 2.x](#).

During deployment, NetSuite checks each record's localization context against the countries you picked before loading and running the scripts. The context-aware scripts skip other records. Script maintenance is easier because you know scripts only run on relevant records.

For example, if the record's localization context is "France" and you use a context association rule, scripts deploy like this:

- Context-aware scripts only deploy on records with the localization context "France."
- Any other scripts deploy on all records.

## Creating a Context-Aware Script

You can create a context-aware script by using two features: Record Localization Context and Context Association Rule. Record Localization Context lets you set a script's localization context, and Context Association Rule limits script deployment to records with a specific context.

1. Create a new script or reuse an existing one.
2. Deploy the script. For more information about creating or deploying a script, see the help topic [Creating a Script Record](#) or [Use the Script Deployment Record](#).
3. In the Script Deployment window, choose the target record type from the **Applies To** list.



**Note:** You can only use record localization context with certain record types. For a list of supported records, see the help topic [Records that Support Localization Context](#).

4. Click the **Context Filtering** subtab to show the Localization Context interface.
5. Clear the **Select All** box so you can edit the **Localization Context** field.
6. Enter the name of the target country in the **Localization Context** field. There are a few ways to add countries:
  - Enter the full name of one or more countries.
  - Enter the first few letters of a country's name and click outside the **Localization Context** field. A popup will show countries starting with those letters. For example, if you type "Fr," the popup shows all countries starting with "Fr."
  - Search directly in the popup window.
    - a. Click the double arrows to open the popup. Use the menu or the Search field to find the country faster.
    - b. You can also search for countries manually.
7. Select one or more countries. They'll show up in the right column.

8. Click **Done** to close the window.
9. Click **Save**.

## Record Localization Context Available for Use in SuiteScript 2.0 API

Use the Record Localization Context API in SuiteScript 2.0. The `N/recordContext` module lets you set record localization context for supported record types.

For more information, see the help topic [N/recordContext Module](#).

For a full list of supported record types, see the help topic [Records that Support Localization Context](#).

For more information about Record Localization Context, see [Localization Context](#).

## Localization Context Filtering

This Help Center section covers how you can use localization context for filtering.

See the following

### Localization Context Filtering in SDF

The SuiteCloud Development Framework (SDF) lets you filter SuiteScript 2.0 user event and client scripts by localization context. A record's localization context shows which countries are linked to it. Set up localization context filtering in the **Localization Context** field on the **Context Filtering** subtab of the script deployment record. This controls which records user event and client scripts run on, based on their localization context. For example, if you set a script's localization context to France, it only runs on records with a localization context of France—not on records with other context.

You can set localization context in **usereventscript** and **clientscript** custom objects by adding locales to the **localizationcontext** field. For **usereventscript** objects, use the **alllocalizationcontexts** field to include all locales.

If you set up localization context filtering in custom objects in a SuiteCloud project, it works in all target accounts where you deploy the project. The Filtering also works when you install an SDF SuiteApp from the SuiteApp Marketplace.

### Localization Context Filtering Support for Scripts in Bundles

You can use localization context filtering for SuiteScript 2.0 user event and client scripts in bundles. If a script in a bundle has localization context filtering, it works in every target account where you install the bundle.

A record's localization context shows which countries are linked to it. Set up localization context filtering in the **Localization Context** field on the **Context Filtering** subtab of the script deployment record. This controls which records user event and client scripts run on, based on their localization context. For example, if you set a script's localization context to France, it only runs on records with a localization context of France—not on records with other contexts.

### Localization Context Filtering for SuiteScript 2.x

You can set the localization context for client or user event scripts. Localization context filtering lets you run a script based on the country linked to the active record or transaction and keeps scripts from

running when they aren't needed.. For a list of records and transactions that support localization, see the help topic [Records that Support Localization Context](#).

You can set the order to run for localized client and user event scripts. NetSuite supports up to 10 localized or non-localized client scripts. For more information, see the help topic [The Scripted Records Page](#).

NetSuite automatically determines the localization context for records and transactions using country fields like subsidiary and tax nexus. Make sure you understand how this works before setting up localization context filtering for scripts. For details, see [Determining the Localization Context](#).

The localization context feature includes:

- **Localization Context Field** — This field on the **Context Filtering** subtab is part of the script deployment record. It lists the countries where the script is relevant. By default, all countries are selected. If you make a different selection, the script only runs on records linked to those countries.
- **Entry Points for Client Scripts** — SuiteScript 2.0 client scripts have two entry points. You need these to use localization context filtering. [localizationContextEnter\(scriptContext\)](#) runs when the record enters the localization context that is specified on the script deployment record. [localizationContextExit\(scriptContext\)](#) runs when the record exits that context.
- **Locale Parameter** — `scriptContext.locale` is parameter for the [localizationContextEnter\(scriptContext\)](#) and [localizationContextExit\(scriptContext\)](#) entry points. This parameter lists the countries representing the new localization context.

The table below shows how to set the localization context for each script type.

| Script Type                            | Defining Localization Context Filtering                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SuiteScript 2.0 Client Script Type     | Follow these steps to add localization context filtering to client scripts: <ol style="list-style-type: none"> <li>1. Use the <a href="#">localizationContextEnter(scriptContext)</a> and <a href="#">localizationContextExit(scriptContext)</a> entry points in your script.</li> <li>2. Set the localization context on the <b>Context Filtering</b> subtab of the script deployment record. For more information, see the help topic <a href="#">Localization Context</a>.</li> </ol> |
| SuiteScript 2.0 User Event Script Type | Set the localization context on the Context Filtering subtab of the script deployment record. For more information, see the help topic <a href="#">Localization Context</a> .                                                                                                                                                                                                                                                                                                            |

If you localize a script deployment on the **Context Filtering** subtab, the `pageInit` entry point is ignored, and no other entry points run before `localizationContextEnter` or after `localizationContextExit`. Sometimes, a record might never enter a localization context. For more information, see the help topic [SuiteScript 2.x Client Script Entry Points and API](#).

# Globalization Glossary

The Globalization Glossary covers [General Glossary](#) and [Manage Translations Glossary](#) terms.

## General Glossary

|                                       |                                                                                                                                                                                                                          |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| .xlf                                  | A standard file format used for UI string translation and Manage Translations exports.                                                                                                                                   |
| CAT tool                              | Computer-aided translation tools also use this format, and it can be bilingual—containing both source strings and their translations.                                                                                    |
| Child String                          | A Manage Translations string linked to a custom string that inherits description and translations.                                                                                                                       |
| Context                               | Background information.                                                                                                                                                                                                  |
| Context Notes                         | Additional translator guidance that NetSuite exports with strings for vendors.                                                                                                                                           |
| Currency Formatting                   | Currency is formatted based on the selected country's locale. For example, some countries use commas as decimal points and periods for thousands, while others use dots for decimals and commas or spaces for thousands. |
| Date Formatting                       | Date and time are formatted based on the selected country's locale. For example, Germany uses Day/Month/Year, but the U.S. uses Month/Day/Year.                                                                          |
| Globalization (G11n)                  | A NetSuite process that combines internationalization, localization, and translatability to meet local standards and languages.                                                                                          |
| Internationalization (i18n)           | A NetSuite development approach that enables features or objects to be localized for different regions.                                                                                                                  |
| Locale                                | A set of parameters that define a user's language and country.                                                                                                                                                           |
| Localization (L10n)                   | An adaptation in NetSuite that adjusts translated features to country needs, including formats and styles.                                                                                                               |
| Localization Context                  | Background and country association in NetSuite that guides translation and record localization.                                                                                                                          |
| LSP/vendor                            | A language service provider (LSP) connects customers and translators, organizes translation projects, and manages communication.                                                                                         |
| Machine Translation (MT)              | Machine Translation is software that automatically translates text without human input.                                                                                                                                  |
| Manage Translations                   | A NetSuite feature that manages Translation Collections and translation strings for localization. For more information, see <a href="#">Manage Translations</a> .                                                        |
| Parent String                         | A Manage Translations string that supplies description and translations to child strings.                                                                                                                                |
| Platform Internationalization         | A NetSuite platform effort that enables localization through ongoing updates.                                                                                                                                            |
| Phone Number Formatting               | Phone number formatting varies by locale. Some countries use a plus sign before the number, while others use one or more zeroes.                                                                                         |
| Record Localization Context (feature) | A NetSuite feature that links records to countries to drive proper localization in scripts and workflows. For more information, see <a href="#">Record Localization Context</a> .                                        |

|                                        |                                                                                                                                                                                 |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source string                          | Original text in the collection's default language that translators translate.                                                                                                  |
| Stand-Alone String                     | A Manage Translations string created by a custom record or object and tied to its life cycle.                                                                                   |
| SuiteCloud Development Framework (SDF) | A NetSuite framework that defines and deploys customizations, including Translation Collections.                                                                                |
| Termbase                               | A termbase is a database of terms. You can use it to store company-wide terminology and keep terms consistent.                                                                  |
| Translatability (T13y)                 | Translatability means an object can be translated. Anything you want to translate must be developed or changed to be translatable.                                              |
| Translation                            | A source string in another language.                                                                                                                                            |
| Translation Memory (TM)                | CAT tools use translation memories to store translated text segments. They're always made for a single language pair and help translators manage terminology for each customer. |
| Translation String                     | A translation string has a key (identifier), a source string, and one or more translations of the source string.                                                                |
| Without Collection                     | A <b>Manage Translations</b> filter that shows only stand-alone strings.                                                                                                        |
| XLF                                    | A filename extension for XLIFF files exported from Manage Translations. The file type is XLIFF.                                                                                 |
| XLIFF                                  | A file type for strings exported from Manage Translations; associated file extension is .xlf.                                                                                   |

## Manage Translations Glossary

| Term                   | Description                                                                                                                                                                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Translation Collection | A NetSuite customization object that stores translation strings and their translations.                                                                                                                                                                            |
| Translation String     | A NetSuite key and source string with one or more translations stored in a collection.                                                                                                                                                                             |
| Default Language       | Every string in a collection must have a value in the default language. For example, if the default language is French, all strings need a French value.                                                                                                           |
| Default Value          | A string's translation in the collection's default language.                                                                                                                                                                                                       |
| Import Jobs            | A Manage Translations list that tracks translation file imports; see the <a href="#">Manage Translations Page Import Jobs Subtab</a> .                                                                                                                             |
| Key                    | In a translation string's key/value pair, the key is the term's identifier. Each string needs a unique key and can be translated into many languages. The key can have up to 255 characters.                                                                       |
| Source String          | In a translation string's key/value pair, the source string is the text to translate. You can translate it into any language NetSuite supports. For a list of languages supported by NetSuite, see the help topic <a href="#">Configuring Multiple Languages</a> . |
| Translation            | A string's value in a certain language.                                                                                                                                                                                                                            |
| Invalidated            | A Manage Translations flag that marks strings whose default value changed and may need review.                                                                                                                                                                     |
| Missing Translation    | A <b>Manage Translations</b> filter that shows strings without a value in a language.                                                                                                                                                                              |

|                    |                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------|
| Translation File   | A file that holds collection strings for export to vendors and later import.                          |
| Target Language    | This tag in the translation file sets the target language. You need this tag to import the file.      |
| Without Collection | A <b>Manage Translations</b> filter that shows only stand-alone strings.                              |
| XLF                | A filename extension for XLIFF files exported from <b>Manage Translations</b> .                       |
| XLIFF              | A file type for strings exported from <b>Manage Translations</b> ; associated file extension is .xlf. |



# Internationalization through Global E-commerce

Internationalization through global e-commerce means using a web store set up in one country to sell products and services in other countries. This type of trade lets merchants and business owners expand into non-native markets and sell to customers from target countries, thereby helping increase sales and profit.

## Before you begin

Before taking your business international with NetSuite, you must first have a functioning website in your home country. To learn how to set up a NetSuite store front, see the help topic [Store Front](#).

With NetSuite, you can take your business international with any of the following offerings:

- SuiteCommerce
- SuiteCommerce MyAccount
- SuiteCommerce Advanced

Customers in your international market are probably different from the ones in your domestic market. When you take your business to international markets, your first step must be to define your e-commerce strategy for the target market. Research your market thoroughly and define the following aspects of your business:

- [Business Offering](#) - Your business offering can help you choose between SuiteCommerce, SuiteCommerce Advanced, and SuiteCommerce MyAccount.
- [Currency](#) - NetSuite gives you the option of carrying out transactions in the currency of your home country as well as the currency of your target country.
- [Payment Options](#) - You can choose between a single payment method across all your domains or tailor a payment method to best suit your target market.
- [Prices](#) - You can choose to create multiple pricing groups for your home and target customers.
- [Taxes](#) - You can choose how and where to pay taxes, depending on the solution that you select for your business offering.
- [Customs](#) - Depending on the country you are expanding to, you may have to pay customs at your home country or the target country.
- [Language](#) - If your target market is in a country that speaks and understands the same language as your home country, you don't have to worry about translations. However, if the languages are different, you might want to consider the translation support offered by NetSuite.
- [Marketing and SEO](#) - To make your new web store more accessible to your new target audience, you can use the customizations offered by NetSuite.
- [Item Catalogs](#) - If you want to consider item cataloging, NetSuite offers several ways of segmenting and showing different items for different markets and users.
- [Item availability](#) - Subsidiaries in NetSuite can help you determine which stock and supply should be made available for your customers and websites.

## Business Offering

Defining your business offering and a go-to-market strategy helps you select the best solution.

- If you want your international customers to use the website to pay invoices and reorder items, SuiteCommerce [My Account](#) might be the best option.
- If you want a fully functioning web store, consider SuiteCommerce or SuiteCommerce Advanced.
  - Set up one or more sites: Depending on the type of license that you have purchased, you can choose to set up a different website for your international market. A separate site lets you fully segregate business and marketing strategies.
  - Set up one or more domains: By having a separate domain name for your international market, you can improve your SEO results. For example, using the .ca domain extension for your Canadian market might rank it higher in search engine results for your Canadian customers than using a .com site.

## Currency

You can cater to your international audience by conducting transactions in the currency of your home country and that of the target country.

- A website supports multiple currencies. You must set one currency as the default.
- A domain supports multiple currencies. The site default is used unless the customer selects a different one.

You must set the currency in ERP (see the help topic [Enabling the Multiple Currencies Feature](#)) and SuiteCommerce.

## Payment Options

Consider the type of payment methods you want to offer. You can choose a single payment method to work across sites and domains. You can also tailor a payment method for the country your customers are logging in from.

As with currencies, set payment methods in ERP and SuiteCommerce. For detailed information, see the help topics [1. Set up a Payment Method in NetSuite ERP](#) and [Payment Options](#).

## Prices

Create pricing groups to assign customer-specific price levels for different groups of items. You can create multiple pricing groups across sites and domains.

Set pricing in ERP and SuiteCommerce. For more information, see the help topic [Setting Up Item Pricing](#).

## Taxes

Countries have different types and requirements for value added tax (VAT). Depending on the country you are expanding your business to, you might have to set up the following: PST, QST, or HST for Canada; GST for Australia.

**Note:** NetSuite SuiteCommerce shows prices without tax. Taxes are displayed at checkout only, and the default is a single tax line only (without breaking it down into possible different types of VAT taxes).

You must set taxes in ERP first.

Due to tax regulations, you might prefer to have more subsidiaries when tax is involved. To learn more about a subsidiary, see the help topic [Subsidiary](#).

Finally, determine the way you need to pay taxes. Before you start selling in your target country, research the existence of tax-paying thresholds at the target country's tax collector. You have the following options:

- Pay taxes at your domestic tax collector. Thresholds might be applicable.
- Pay taxes at the tax collector of the target country, which may require a local tax identification number and a local business registration.

NetSuite provides you with the following options:

- Display taxes with SuiteCommerce.
- Set up different subsidiaries to segment your business flows and tax payments for different geographies with NetSuite OneWorld.

## Customs

Research the thresholds that collect customs at your home and target markets.

## Language

NetSuite offers [Manage Translations](#), and you should evaluate your translation requirements before expanding into an international market. For example, if you are operating from Mexico and expanding your business to Costa Rica, you don't need to worry about translation. However, if you are expanding from the United States to Canada, you could consider translating content to French for customers in Quebec.

 **Note:** One language can be displayed across multiple domains. However, one domain cannot display multiple languages.

To set up multi language in ERP, go to **Items > Item description > ERP item record**. Translate all item names and descriptions, and upload the .csv file. See the help topic [Working With Multi-Language Names and Descriptions](#) for more details.

To translate your website content, including the text on landing pages, opt for Site Management Tools. See the help topic [Exporting and Importing Bulk Translation Content in Site Management Tools](#) for more details.

## Marketing and SEO

Create digital marketing content that is local to the country or region that you are expanding to. From an SEO point of view, you must translate and create website content geared toward your target audience, allow translations in the local currency, and foster high-quality incoming links, among other things. These aspects can help make your web store easily searchable and highly ranked on search engines. The more localized the content on your website, the more likely it is to be at the top of the search results displayed to the local audience.

Use themes and extensions to customize your website for your target country or region. NetSuite allows customization on the website level as well as the domain level.

## Item Catalogs

NetSuite supports segmentation, which means showing different items for different markets and users. By default, you can make items available for your US website as well as for your Canadian website. Alternatively, you can make a set of items available only for the Canadian website but not for the US. This type of segmentation is the easiest and the most appropriate for logged-in users. Determine the items or item catalog you would like the non-logged-in web store visitors to see.

NetSuite offers several methods to select items that must be displayed:

- OneWorld helps in making items available to one or more subsidiaries. This setup lets each website to select specific items from specific subsidiaries.
- [Personalized Catalog Views](#) (PCV) give more granular control over set of items that need to be displayed to specific customers. PCV also lets you define the items that can be viewed by visitors who are not logged in.

Set up item catalogues in ERP and in SuiteCommerce.

## Item availability

After you select the items that should be displayed on your web stores, determine the specific stock and supply that can be made available for your customers and websites.

NetSuite offers several methods with various levels of complexity:

- The default is for each item to display the stock in the subsidiary of the website or of the logged-in customer.
- [Cross-Subsidiary Fulfillment](#) permits accessing inventory and supply from other subsidiaries.
- Customization or SuiteApps assist in checking when inventory will be back in stock, based on the purchase orders across the website's subsidiary.
- Features such as supply allocation and supply visibility let you set up and configure inventory and supply visibility. They also help adjust visibility based on subsidiaries, locations, and time parameters.

## Going International with NetSuite E-commerce Products

NetSuite offers several features that can help you grow your business. In the following sections, we look at these products and solutions and how you can use them to target your international audience.

## Subsidiaries

In NetSuite, subsidiaries provide a way to manage data for a hierarchical structure of separate legal entities. They can help keep your existing business separate, reducing risk, and executing your business strategy. Your decision to work with subsidiaries also influences how you manage and set up your e-commerce web store.

By default, a NetSuite account operates from a single subsidiary. To learn more about subsidiaries, see the help topic [Subsidiary](#).

A SuiteCommerce website is used by multiple subsidiaries. However, a website can have only a single subsidiary as its default, which means:

- Only items available in the default subsidiary are displayed to anonymous customers. When a customer logs in, they can see only items under their subsidiaries.
- Orders placed on the website go to the default subsidiary.
- Anonymous customers who place orders on the website are associated with the default subsidiary.

## NetSuite Products

NetSuite offers the following products. With the help of use cases, this section can help you decide which product can support your international business venture.

- SuiteCommerce MyAccount - Select this option if you are not ready for a public-facing web store but would still like to give international customers an easier way to view orders, pay invoices, and update personal details. SuiteCommerce MyAccount permits reordering items and managing SuiteBilling subscriptions. For more information, see the help topics [SuiteBilling](#) and SuiteCommerce [My Account](#).

SuiteCommerce MyAccount is currently available in the United States, Canada, Australia, and New Zealand.

If you have a SuiteCommerce web store, SuiteCommerce MyAccount is already part of the issued license. In this case, the SuiteCommerce MyAccount portal is part of the same SuiteCommerce web store. One SuiteCommerce portal can cater to customers from different countries and regions because it supports multiple currencies and languages. When you have different subsidiaries, customers logging in to your SuiteCommerce portal have visibility only in the context of their default subsidiary.

- SuiteCommerce - This is an option if you want run a web store that offers a complete shopping experience.  
SuiteCommerce is currently available only in the United States, Canada, Australia, and New Zealand.
- SuiteCommerce Advanced - With this option, you have granular control over every aspect of your web store.

To understand features that are supported for each product offering, see the table under [Commerce Website Types](#).

## Multiple Websites versus Multiple Domains

In NetSuite, every website associates with its own website setup record. When a website setup record is created and activated, it uses one product license.

- If you choose to operate multiple sites, you can achieve a great deal of control and flexibility around the commercial aspects of your business, such as customer access, shipping, and payment methods.
- If you choose to operate a single site with multiple domains, you won't have a lot of flexibility but will still have ease of setup and operations. An active domain consumes one secure, customer-domain license. Domains are associated with SuiteCommerce configuration records.

## Customization

To customize your site for your international market, you can use one website with multiple domains or use multiple websites. The benefit of operating a single website with multiple domains is that it gives the

appearance of having several websites with little effort. Before deciding between having a single and multiple websites, consider the following requirements:

- A customized storefront
- A different item catalog
- New extensions and functionalities

Any customization applied at the account and subsidiary level applies to the site and the associated domains. Therefore, if you want your site to use a different currency, ensure that the corresponding account and subsidiary operate in that currency.

## Using Multiple Domains

To tailor your website for your international audience, use a domain corresponding to the geographical region. For example, if you have a web store in the United States and plan to take your business to Canada, you can have a .ca domain and a global .com domain.

To plan for and set up a new domain:

1. Purchase a local domain name from a domain name provider.
2. Create the domain on a NetSuite server.
3. Link the domain to the domain name.

The process of setting up all domain types is the same in NetSuite. However, the information you enter in the domain set-up form depends on the domain type that you select.

To learn how to set up a domain, see the help topic [Advanced Domain Setup](#).

## Using Multiple Websites

You can purchase licenses to run multiple websites on the same NetSuite account. Every website can have a different appearance, branding, and functionality. For example, if you are expanding your US-based business to Canada, a separate website can display item names and descriptions in French and accept payment in Canadian dollars. You can customize the web store to add translated components.

For more information, see the help topic [Creating a New Site](#).