



ORACLE
NetSuite

NetSuite Point of Sale (NSPOS) Security Guide

NSPOS 2024.1 or Later

September 3, 2025



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

Introduction	1
NSPOS Network Components	4
Register Applications and Hardware	8
Ongoing User Security	10

Introduction

This guide provides security guidelines and information for installing and using NetSuite Point of Sale (NSPOS).

- [Audience for this document](#)
- [About NSPOS](#)
- [Payment Card Industry \(PCI\) Software Security Framework \(SSF\)](#)
- [Getting Assistance](#)
 - [Documentation Resources](#)
 - [Videos](#)
 - [Technical Support](#)


Audience for this document

NSPOS administrators and security personnel can use these materials to understand the system and how the applications that make up the point-of-sale product work together. End users might find this information helpful, but the security concerns for the cashier and sales associate are documented in the user sections of the [NetSuite Point of Sale Administrator Guide](#).

About NSPOS

NSPOS is the in-store register component of the SuiteCommerce product line. Designed for midsize retailers, NSPOS provides an efficient interface for handling sales transactions and working with customer and item information. It's a high-performance, full-featured solution that can be customized and scale to meet demands as retailers increase their sales volume and expand to new locations.

NSPOS works on many register types and provides a quick and accurate check-out process. Because it can be customized, you can change the workflow and appearance to fit your store's needs. It can work with peripheral equipment such as barcode scanners, a mouse and keyboard, or the sales associate can use on-screen features such as dynamic item lookup, a tap screen interface and a virtual keyboard. Most setups include a receipt printer and a credit card swipe device.

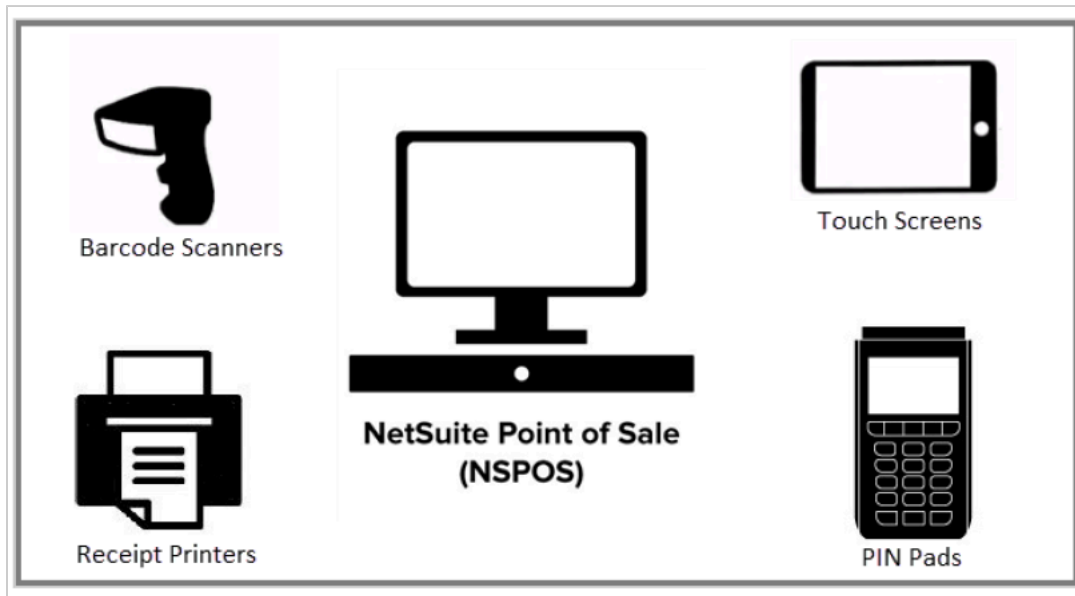

Payment Card Industry (PCI) Software Security Framework (SSF)

NSPOS is a PCI SSF validated application. See the help topic [Appendix: PCI SSF Information for NSPOS](#) for an overview of NSPOS and PCI SSF requirements.

Note: In addition to PCI-SSF certification, NSPOS 2020.1.X underwent certification under the Payment Application Data Security Standard (PA-DSS). See [PA-DSS 3.2 Implementation Guide - NSPOS 2020.1](#) to review details about NSPOS compliance with this standard.

Getting Assistance

NSPOS provides technical and learning assistance to NSPOS customers. The options for getting help and guidance are:

- Using the [Documentation Resources](#) available in the NetSuite Help Center.
- Viewing our [Videos](#) available in the NetSuite Help Center, in the Oracle Learning Library and on YouTube.
- Contacting [Technical Support](#).

Documentation Resources

Our release notes and the administrator guide include important information about maintaining a secure NSPOS setup. For a list and concise summaries of the NSPOS documentation we offer, see our [NSPOS Documentation Resources](#) page in the NetSuite Point of Sale Administrator Guide.

Or locate topics using the Help Center search field or table of contents. In the table of contents, drill into Commerce > NetSuite Point of Sale.

Videos

Our videos deliver a convenient method for understanding and using NSPOS. Housed in the NetSuite Help Center, in the Oracle Learning Library and on YouTube. Each video is brief and concise. Watch our videos to get the information you require in a relaxed learning environment.

Technical Support

Individual support is available to NSPOS customers by telephone or by issuing a case. Before reaching out, Technical Support asks that customers enter their concerns in the SuiteAnswers search field first to see if an answer is already available.

To contact Technical Support:

1. Log into NetSuite.
2. From the **Support** tab, click **Go to SuiteAnswers**.
3. Select from the options in the right pane to contact Support.

Security Notifications

The NSPOS team communicates information about potential security issues using either of two methods:

- Proactive Feature Change Notification (PFCN)
PFCNs are targeted emails that let customers know about new features or issues that might affect their environment or business. For security issues, we describe the issue and provide instructions on how the NSPOS team will fix it, with or without the need for affected customers to take action.
- In-Account Notification (IAN)
An IAN appears for a customer when they log into the NetSuite ERP online application. IANs for security purposes describe the issue and provide instructions as needed. You can't continue your online activity until you check a box saying you've read the notification.

Because a single security issue might not affect all NSPOS users, we configure which customers receive the notification using the customer database and tools available in NetSuite.

NSPOS Network Components

This NetSuite Point of Sale (NSPOS) section covers the typical NSPOS network configurations, including payment gateways, alternate register-database setups and money management using the integration with NetSuite ERP.


- [Integration with NetSuite ERP through Replication Server](#)
- [Register Synchronization](#)
- [Third-party Payment Gateway Connections](#)
- [Transport Layer Security \(TLS\) Versions](#)
- [Store Server Architecture](#)
- [Backward Compatibility for NSPOS upgrades](#)

Integration with NetSuite ERP through Replication Server

NSPOS integrates with the NetSuite application to provide Enterprise Resource Planning (ERP) tools for managing items, pricing, and other aspects of a retail business. This integration occurs through a periodic synchronization process that includes a cloud-based replication server.

Each NetSuite account for NSPOS includes at least one integration user dedicated to handling the synchronization connection between NetSuite ERP and the replication server. Integration users are configured during the initial implementation.

To maintain performance during peak periods, a customer can have up to three integration users set up for an account. Each integration user requires a separate NetSuite license.

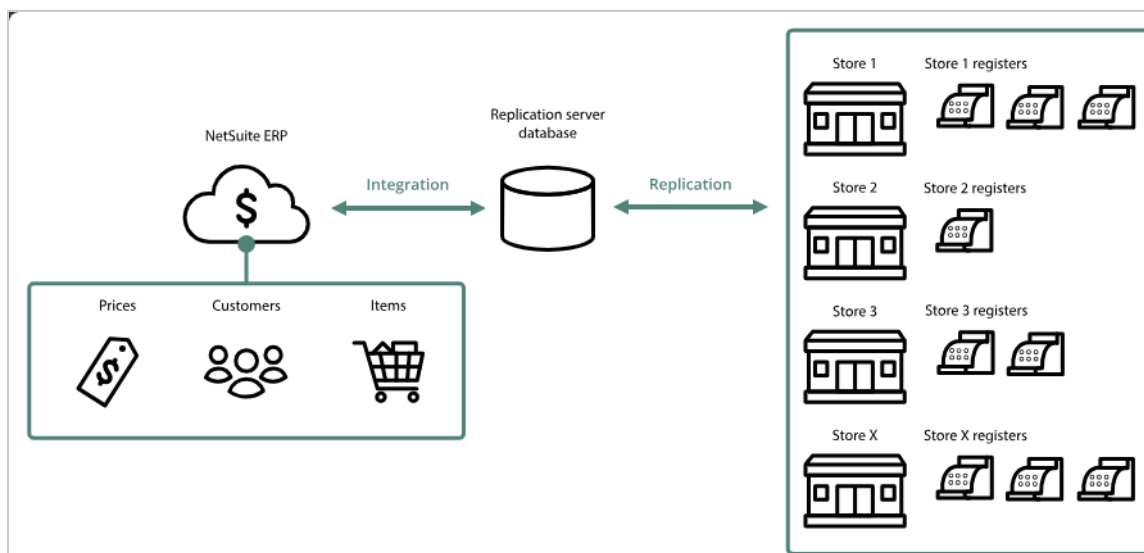

Token Based Authentication (TBA)

We support token-based authentication (TBA) for integration user accounts. With this integration, you don't need to enter a token when you log into NetSuite ERP or NSPOS. However, the **Token-based**

Authentication box must be checked for the integration account on the **Enable Features** page. If you have more than one integration account, you only need TBA for one of them.

Register Synchronization

Sales associates use item, price, and promotion data saved to the register when they scan items for sales and make other transactions. This data originates in NetSuite and is pushed to the registers in frequent synchronization downloads. Also called a **down sync**, these downloads ensure registers have the most current information available.

This periodic synchronization method provides a level of independence for each register. An NSPOS register can operate in "offline" mode if an internet connection becomes temporarily unavailable. This is an advantage over POS applications that need uninterrupted communications with a host server.


Transactions and other entries made at registers periodically upload to NetSuite. Also called an **up sync**, these updates adjust inventory levels for item movement in and out of stores, log payments, and modify customer information and history.

Third-party Payment Gateway Connections

Each NSPOS register typically connects to a payment gateway. These are third-party applications selected by retail businesses to handle credit or debit card authorizations and other payment types that need special handling.

When the cashier or customer swipes a credit card as payment, the POS sends the purchase amount and other information to the payment gateway. The gateway processes the payment and returns an authorization code stating that the payment is accepted or rejected.

Payment transactions using the gateway happen on a PIN pad. Routing payment activity through a PIN pad or other peripheral devices over the internet removes the need to route credit card data through the NSPOS application.

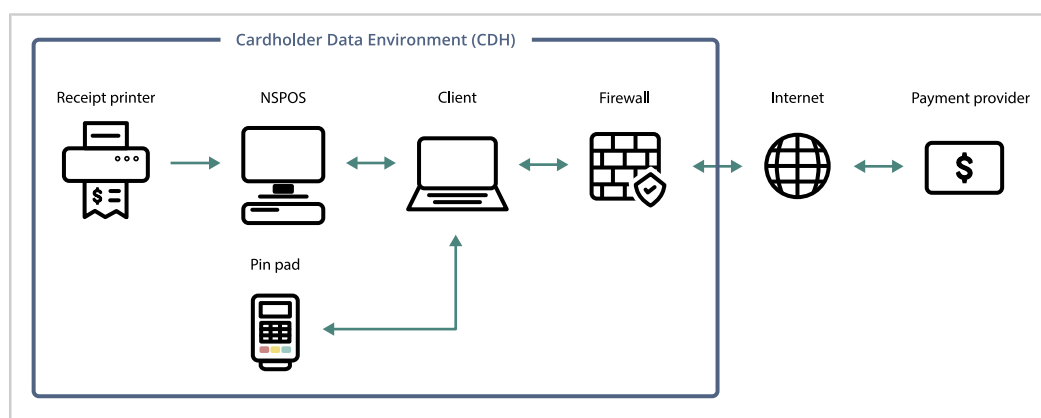

For more information about the payment-gateway integration and contact points for the providing third parties, see the help topic [Payment Gateways](#) in the NetSuite Point of Sale Administrator Guide.

Transport Layer Security (TLS) Versions

NSPOS and the majority of its optional payment gateways support TLS 1.2 or later only. Previous versions of TLS have been removed from support.


As a security measure, you can update certain Windows 10 registry keys to prevent TLS 1.1 and earlier from running on a register. The update also blocks obsolete Secure Sockets Layer (SSL) encryption protocol versions 3.0 and earlier from executing.

To block TLS 1.0 – 1.1 and SSL 2.0 – 3.0:

1. Start a new file in your desired text editor, such as Windows Notepad®.
2. Use copy and paste to add these lines:
 - Windows Registry Editor Version 5.00
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\TLS 1.0\Client] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\TLS 1.0\Server] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\TLS 1.1\Client] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\TLS 1.1\Server] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\SSL 2.0\Client] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\SSL 2.0\Server] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\SSL 3.0\Client] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000
 - [HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols\SSL 3.0\Server] "DisabledByDefault"=dword:00000001 "Enabled"=dword:00000000

 **Tip:** You might need to remove bullet symbols that were included in the copy after pasting from this list.

3. Save the file with an **REG** extension. For example, save the file as Disable_Obsolete_TLS_SSL.reg.

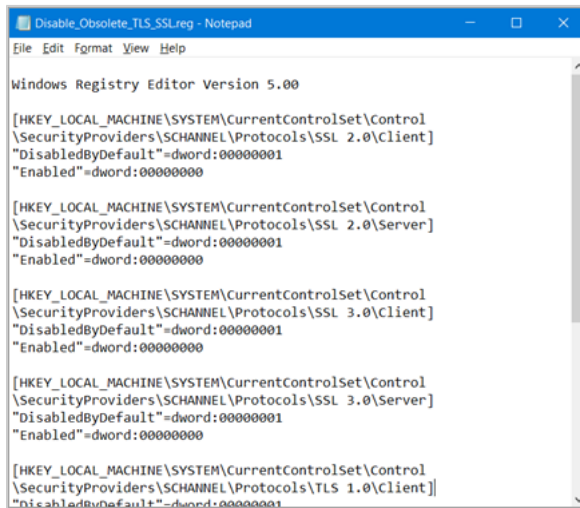

```

Windows Registry Editor Version 5.00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control
\SecurityProviders\SCHANNEL\Protocols\SSL 2.0\Client]
"DisabledByDefault"=dword:00000001
"Enabled"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control
\SecurityProviders\SCHANNEL\Protocols\SSL 2.0\Server]
"DisabledByDefault"=dword:00000001
"Enabled"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control
\SecurityProviders\SCHANNEL\Protocols\SSL 3.0\Client]
"DisabledByDefault"=dword:00000001
"Enabled"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control
\SecurityProviders\SCHANNEL\Protocols\SSL 3.0\Server]
"DisabledByDefault"=dword:00000001
"Enabled"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control
\SecurityProviders\SCHANNEL\Protocols\TLS 1.0\Client]
"DisabledByDefault"=dword:00000001

```

4. Run the file as an **Administrator**.
5. Restart the workstation.

An alternative is to use Windows PowerShell® to update the registry keys. Run the commands as an administrator on the PowerShell console or PowerShell ISE. Restart the workstation to apply the update.

Store Server Architecture

A typical NSPOS setup uses standalone register connections to NetSuite ERP through the replication server. Each register has its own database.

For large retailers, NSPOS can operate under a Store Server Architecture model. This model configures a subset of registers within a single store as server terminals. These terminals act as database hubs and receive updates from the replication server. Then we set other registers in the store to be POSClient terminals that rely on the data held in the server terminals. The server terminals can act both as registers and databases, handling the information required for the POSClient terminals to process transactions.

The three configurations available in Store Server Architecture are:

1. **Standalone** – Typical NSPOS register with its own database and replication server connection.
Kiosk – Standalone register provisioned for shopper self-checkout.
2. **Server with POS** – Server terminal that is also available as an NSPOS register.
3. **POSClient** – NSPOS register dependent on a Server with POS connection for database functions and most communication with the replication server. If a server terminal becomes unavailable, its POSClient terminals will no longer function due to the lack of a database.

For more information, see the help topic [Store Server Architecture](#) in the NetSuite Point of Sale Administrator Guide.

 **Note:** Although **Server with POS** registers handle most communication with the replication server, POSClient terminals use replication server connectivity for displaying reports, processing returns, and a portion of sales order functionality.

Backward Compatibility for NSPOS upgrades

NSPOS includes an upgrade feature called Backward Compatibility. This feature promotes register availability by allowing server upgrades to the latest release without requiring immediate register upgrades. Registers running the previous release can continue communicating with the upgraded server until time is available to complete the upgrades.

Backward Compatibility helps avoid downtime that could happen if all registers in a store are upgraded at the same time. Compatibility is applicable to the previous and current major release only.

Register Applications and Hardware

- [Operating Systems](#)
- [Required Third-party Applications](#)
- [Optional Third-party Payment Gateway Applications](#)
- [Register Types](#)
- [Supported OPOS Peripheral Types](#)
- [Hardware and Operating System Specifications for NSPOS](#)

Operating Systems

NetSuite Point of Sale (NSPOS) supports running our application on several Windows-based operating systems. See the help topic [Appendix: PCI SSF Information for NSPOS](#) for more information.

Required Third-party Applications

NSPOS uses applications that must be installed on each workstation prior to staging. If you have questions about a third-party installation, contact the support department associated with that company and application. NetSuite Customer Support is also available to provide guidance.

See the help topic [Prerequisites for NSPOS](#) for the list of applications required for NSPOS.

Optional Third-party Payment Gateway Applications

Payment gateways are third-party applications selected by retail businesses to handle credit or debit card authorizations. Some payment gateway providers require that the retailer install a third-party application on each NSPOS register that uses their service.

Information about security protocols utilized by these providers and their applications can be found on each gateway provider's website. For a list of providers supported by NSPOS, see the help topic [Payment Gateways](#) in the NetSuite Point of Sale Administrator Guide.

Register Types

We use the following terms to describe the NSPOS register types available to retailers:

- Standalone
- Server with POS
- POSClient
- Kiosk

For more information about register types, review the section in this document on [Store Server Architecture](#) or see the help topic [Set up a Register](#) in the NetSuite Point of Sale Administrator Guide.

Hardware and Operating System Specifications for NSPOS

See the help topic [NSPOS System Requirements](#) in the NetSuite Point of Sale Administrator Guide.

Ongoing User Security

This section describes tasks that are typically performed within or with the NetSuite Point of Sale (NSPOS) secure environment after the initial implementation.

- [Register Use](#)
- [Employee Set up and Maintenance](#)

Register Use

A cashier, sales associate, or other authorized operator can perform the following customer transactions from an NSPOS register:

- Process Sales Transactions
- Apply Discounts
- Make limited adjustments to how Sales Taxes are applied
- Suspend, Resume, Cancel Transactions
- Print and reprint Receipts
- Look up Past Transactions
- Change the Sales Associate assigned to a transaction
- Process Sales Orders
- Process Returns
- Sell or redeem a Gift Card or Gift Certificate

For information about daily register tasks involving transactions, see the help topic [Basic Sales Transactions](#) in the NetSuite Point of Sale Administrator Guide.

Auto Log Out for Idle Time

It's important not to leave an NSPOS register unattended. The methods used to lock out a register if it's left idling depend on the cashier or other user's role.

- **Administrator role** — If a register is left idle for 15 minutes, the administrator is logged off and the register switches to **Closed Mode**. Access to NSPOS from the register is denied until that user or another user logs on.
- **Non-administrator roles** — The idle time minutes allowed can be adjusted by role. See [Update a Password Policy](#) to find the password policy associated with a role. Then update the **Auto Logout Period in Minutes** field.

Lock Down vs. Log Out

An automatic lock down disables access to NSPOS registers while leaving the cashier logged in. A log out ends the cashier's NSPOS session.

- **When locked down:**
 - NSPOS appears closed, but the cashier is still logged in.

- Any task or transaction that the cashier had open before lock down is kept open. This behavior means that the cashier can continue where they left off.
- **Only** the logged in cashier or an administrator can unlock an NSPOS register.
- **When Logged out:**
 - The cashier is logged off NSPOS, closing the session. The register isn't "locked down."
 - Any task or transaction that was open before log out is closed.
 - For administrators customizing NSPOS settings, logging out causes any unsaved changes to be lost.
 - Any cashier or other user can log into a register after the previous user has logged out.



Warning: You should never leave an NSPOS register unattended with an open session under any circumstances. If a cashier must leave the register area, they should **log off** first.

Cashiers must log out when their shift ends. Otherwise, NSPOS will lock down after a predetermined period and a cashier starting a new shift on the register will be unable to log in.

To open a register that was left locked after shift end, either the logged in cashier must return to unlock NSPOS or the manager must locate an administrator to perform the task.

Employee Set up and Maintenance

NSPOS uses a combination of NetSuite ERP operations and functions available from the register to manage employee access.

- [Set up a new Employee \(Operator\)](#)
- [Reset an Employee's Password](#)
- [Change an Employee's Security Role Assignment](#)
- [Block an Employee's Access to NSPOS](#)
- [Assign Operator Roles to Limit Access](#)
- [Requirements for Administrator Roles](#)
- [Default Requirements for Non-administrator Roles](#)
- [Update a Password Policy](#)

Set up a new Employee (Operator)

Employees are called operators in NSPOS. Administrators set up new NSPOS operators for their retail business. Set up takes place in the NetSuite ERP online application and in the manager tools found in NSPOS. The second part can be performed from any NSPOS register.

The procedure is to:

1. Create the Employee record and RA-Operator ID in NetSuite
2. Complete the Operator setup in NSPOS using the Manager Functions button.

Note: By default, the Manager Functions button is located on the main (bottom) button bar in the Journal window. Your company's custom setup may have the button in a different location or under a different name.

For complete steps, see the help topic [Setting up a New Employee](#) in the NetSuite Point of Sale Administrator Guide.

Reset an Employee's Password

Administrators can reset an employee's (operator's) NSPOS password from any register. This procedure can be used when they have forgotten their password, believe it has been compromised, or as part of a standard security task.

See the help topic [Resetting an Employee NSPOS Password](#) in the NetSuite Point of Sale Administrator Guide.

Change an Employee's Security Role Assignment

Administrators can adjust a NSPOS security role assignment. This adjustment can be used for permanent assignments or for things like covering a shift gap by temporarily assigning a manager role to a sales associate/cashier. The administrator can reverse temporary assignments by using the same procedure.

See the help topic [Changing an Employee's Security Role](#) in the NetSuite Point of Sale Administrator Guide.

Block an Employee's Access to NSPOS

Administrators can remove an employee's (operator's) access to sign into NSPOS by setting their role to **Disabled**. This role change doesn't remove the employee from the system, but it does lock them out. Keeping the employee in the system is important in the event you must research their NSPOS history.

See the help topic [Disabling an Employee's Access to NSPOS](#) in the NetSuite Point of Sale Administrator Guide.

Assign Operator Roles to Limit Access

In NSPOS, we call employees or users that perform register tasks or are responsible for maintaining the application **operators**. Operators include all positions below. The list of duties isn't comprehensive. These are brief descriptions only and your business might use its own customized positions or roles.

- Sales Associates – Perform sales transactions and work with customer information.
- Specialists – Perform tasks that require training and responsibilities beyond a basic sales associate.
- Openers/Closers – Perform sales associate and specialized tasks plus can be delegated to perform beginning of day and end of day till tasks.
- Managers – Perform beginning of day and end of day till tasks, can sign in during transactions to authorize discounts or other overrides, run reports and assist employees with optional time clock issues.
- Administrators – Set up employees, customize NSPOS to fit business needs, perform other administrator and system tasks.

Operator Role / Group	Operator Role / Group ID	Resource ID
Sales Associate, Cashier, xPOS Access	100	2
Specialist	200	2
Opener / Closer	500	9050
Manager	700	9070
System Administrator	900	9090

Password Requirements

Signing into NSPOS requires entering a User ID and Password. NSPOS uses the Payment Card Industry Software Security Framework (PC SSF) to determine requirements for setting and maintaining passwords. See the help topic [Appendix: PCI SSF Information for NSPOS](#) in the NetSuite Point of Sale Administrator Guide.

NSPOS uses different password requirements for administrator roles and roles that don't require administrator-level access. Administrators can adjust the requirements for non-administrator roles.

Requirements for Administrator Roles

Administrators can't adjust the requirements for their role.

- Passwords must be at least 7 characters and include both letters and numbers.
- Passwords must change every 90 days.
- New passwords must be different than the previous 5 passwords.

Default Requirements for Non-administrator Roles

For managers, sales associates and other operators, the administrator is responsible for setting up their passwords and password policies per your store or company's policies. Administrators can adjust the requirements for non-administrator roles by adjusting a role's password policy. See [Update a Password Policy](#).

The following are the default requirements for non-administrator roles:

- Length must be at least 8 characters, maximum 128 characters
- Must include at least 1 number (0 - 9)
- Must include at least 1 lowercase alpha character (a - z)
- Must include at least 1 uppercase alpha character (A - Z)
- Must include at least 1 non-alphanumeric character (!@#\$%^&*.:;~'`"*/\+?-_,|=()[]{}<>)
- Passwords expire after 180 days
- Account is locked after 5 failed login attempts

Update a Password Policy

Administrators make updates to a password policy by editing a Role's NetSuite ERP **RA-Operator Password Policy** record. Each Role has a separate record and can have a unique policy. Policy updates download to your registers during the normal synchronization process.

If a user is assigned a different Role, they might be required to change their password at the next login.

To update Password Policy rules:

1. Log in to NetSuite as an administrator.
2. Go to Customization > Lists, Records & Fields > Record Types.
3. Locate the **RA-Operator Password Policy** row.
4. Click **List**.

The **RA-Operator Password Policy List** displays the current password setup for all Roles.

5. Click **Edit** for a Role to make changes.

Tip: Use the **System Notes** subtab on the record to view your history of Password Policy changes.

6. Select the **Operator Role/Group** to which the password policy will apply.
7. Set the desired policy for the **Role**:
 - **Minimum Length** – Enter the minimum password character length allowed.
 - **Values:** 8 – 128
 - **Default:** 8
 - **Require Special Characters** – If checked, password must include at least one non-alphanumeric character (!@#\$%^&* . : ; ~ ' ` " * / \ + ? - , _ | = () [] { } < >).
 - **Values:** Yes (checked), No (cleared)
 - **Default:** Yes
 - **Require Mixed-Case Characters** – If checked, password must include at least one uppercase alphabetic character (A - Z) and one lowercase alphabetic character (a - z).
 - **Values:** Yes (checked), No (cleared)
 - **Default:** Yes
 - **Require Numbers** – If checked, password must include at least one number (0 – 9).
 - **Values:** Yes (checked), No (cleared)
 - **Default:** Yes
 - **Expiration Period in Days** – Number of days after current password was set before user is required to change their NSPOS password.
A value of 0 (zero) means that passwords don't expire.

- **Values:** 0 – 365
 - **Default:** 180
- **Max Invalid Login Attempts** – Number of failed login attempts before the user's account is locked. If a user is locked out, they can't log in until an administrator unlocks their account.
 See the help topic [Unlocking an Employee NSPOS Account](#) in the NetSuite Point of Sale Administrator Guide.
 A value of 0 (zero) means the Invalid Login Attempts feature is disabled.
 - **Values:** 0 – 10
 - **Default:** 5
- **Auto Logout Period in Minutes** – If a register is left idle for this period, the register automatically logs the user out. They must log in again to resume activity.
 A value of 0 (zero) means the Auto Logout Period feature is disabled.
 - **Values:** 0 – 60
 - **Default:** 15
- **Require Password Change Next Login** – If checked, all users with the selected Role must change their password the next time they log in.
 - **Values:** Yes (checked), No (cleared)
 - **Default:** No



Tip: Use the **User Notes** subtab to list why a policy was changed. Click **New Note**.

Edit	Date	Author	Title	Memo
Edit	6/27/2019 7:21 am	J S	Policy update	Increased the minimum length to match HQ directive.

8. Click **Save**.

Minimum Security Standards Warning

If an administrator sets one or more fields to values that don't meet minimum guidelines, NetSuite ERP displays a warning when they click **Save**.

The administrator can:

- Click **OK** to update the policy, or
- Click **Cancel** to go back and adjust the settings.