



ORACLE
NetSuite

NetSuite CPQ Guided Selling Guide

2025.2

November 12, 2025



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

NetSuite CPQ Guided Selling	1
NetSuite CPQ Guided Selling Setup	1
Creating Catalogs	2
Working with the Catalog User Interface	4
Working with Advanced Catalog Templates	10
Creating and Organizing Search Filters for the Catalog User Interface	11
Including Additional and Required Items in the Search Results	20
Activating or Hiding Building Blocks with Rules	21
Working with Configurable Items from Catalogs	23
Searching for Items from Transactions	24

NetSuite CPQ Guided Selling

 **Note:** NetSuite CPQ Guided Selling can work independently from NetSuite CPQ Configurator.

NetSuite CPQ Guided Selling lets you create catalogs with advanced filters to search for items and add them to transactions. With catalogs, sales teams can quickly find the best products or services for their customers and close deals faster.

With NetSuite CPQ Guided Selling, you can:

- Use the default catalog template and let sales teams search for items right away.
- Create advanced catalog templates that provide item selections based on customers' needs.
- Create filters to let users refine search results, which are automatically updated to reflect their preferences.
- Up-sell and cross-sell with additional items.
- Prevent quoting and selling incomplete solutions with required items.

After installing NetSuite CPQ Guided Selling, set up basic and additional options. For more information, see [NetSuite CPQ Guided Selling Setup](#).

After setting up NetSuite CPQ Guided Selling, you can create catalogs, which are the main working units in this SuiteApp. Catalogs represent collections of items that users can search. Each catalog is made up of several building blocks activated or hidden by rules. For more information, see [Creating Catalogs](#) and [Activating or Hiding Building Blocks with Rules](#).

Catalogs gather all the filters required to display a specific collection of items and offer users an interface and to search for items based on their needs. For more information, see [Working with the Catalog User Interface](#) and [Creating and Organizing Search Filters for the Catalog User Interface](#).

When catalogs are ready, users can open them from transactions and search for items. For more information, see [Searching for Items from Transactions](#).

NetSuite CPQ Guided Selling Setup

Before creating catalogs, define settings on the options record at Guided Selling > System > Global Settings. Users must see the **Guided Selling** button on transactions to search for items. In the **Show Guided Selling Button** field, select the transactions where you want the button to appear.

The following transactions are available:

- sales orders
- invoices
- estimates/quotes
- opportunities
- credit memos
- purchase orders
- return authorizations

If you use custom partner roles that aren't assigned to the Partner Center, check the **Custom Role Centers** box. This option lets users with these roles search for items from transactions. You can verify the center assigned to a role at Setup > Users/Roles > Manage Roles. On the role record, view the information in the **Center Type** field. For more information about roles, see the help topic [NetSuite Roles Overview](#).

When you are finished with the setup, save the options record.

After the installation, NetSuite CPQ Guided Selling automatically creates and enables two custom transaction fields for eligible transactions. When customizing these transactions, always keep these fields enabled so users can search for items. The following table lists the custom transaction fields that must remain enabled.

Transaction Field Name	Transaction Field ID	Field Type
Group	custcol_cpqg_room	Line field
VGS rooms	custbody_cpqg_rooms	Body field

For more information about custom fields in NetSuite, see the help topic [Custom Fields](#).

Users with an administrator or **GS Product Builder** role can create and maintain catalogs. For more information about NetSuite CPQ custom roles, see the help topic [Assigning NetSuite CPQ Custom Roles](#).

Creating Catalogs

 **Note:** Catalogs are called products on the user interface.

NetSuite CPQ Guided Selling uses catalogs to organize collections of items that users can search. Each catalog gathers all the filters required to display a specific collection of items and provides users with an interface to search for items based on their needs. For example, a furniture company might have separate catalogs for desks and chairs. Customers can filter desks and chairs to find the items that match their preferences.

When setting up a catalog user interface, you can check that everything works correctly using the catalog preview. The catalog preview lets you work with the catalog user interface without opening a catalog from a transaction every time. To access the catalog preview, edit the catalog (called the product) record and click the **Run Standalone** button.

You can preview the list of catalogs displayed to users. To access the catalog list preview, go to the Select Product page at Guided Selling > Product > Standalone. Users view the Select Product page when clicking the **Guided Selling** button on transactions.

A catalog is composed of several building blocks, such as filter categories, filter subcategories, and filters. For more information, see [Working with Catalog Building Blocks](#).

The default catalog template uses basic filter expressions to set the conditions for filtering items by a specific item field. Alternatively, you can create an advanced catalog template to search for items using multiple item fields. For more information, see [Working with Basic or Advanced Filter Expressions](#) and [Working with Advanced Catalog Templates](#).

You can also export and import catalogs. For more information, see [Exporting and Importing Catalogs](#).

To preview the catalog faster during the setup, check the **Disable cache** box on the catalog (called the product) record. By checking this box, you prevent the cache from being frequently deleted and recreated

each time you open the catalog to view the updates during the setup. Clear this box when the catalog is ready, and use the cache to load it faster.

To create a catalog:

1. Go to Guided Selling > Product > Product Maintenance.
2. Click **New CPQG Product**.
3. Enter a descriptive name for the catalog.
Users view this name on the Select Product page and on the catalog user interface.
4. In the **Code** field, enter a unique identifier for this catalog.
The code must contain only uppercase letters, numbers, and underscore characters. You can use a shortened version of the name as the code.
5. Provide a sequence number to sort the catalog on the Select Product page.
You can enter a negative or positive number—for example, -2 or 5. Catalogs are sorted from lowest to highest sequence number.
6. (Optional) In the **Description** field, enter a brief explanation of the catalog.
The description isn't displayed to users.
7. In the **Product Image** field, select the image to display on the catalog list preview.
8. To hide the catalog from the Select Product page until it's ready, check the **Disable** box.
9. Click **Save**.

If you want to delete a catalog, see [Deleting Catalogs](#).

Deleting Catalogs

If you no longer need a catalog, you can permanently delete it from your account to save database space. To delete a catalog, edit it and click the **Delete** button. Then, type DELETE and click **Confirm** to proceed with this task.

 **Warning:** You won't be able to undo the deletion. The catalog record and all its subrecords will be deleted from your NetSuite account.

Working with Catalog Building Blocks

Catalogs are organized into building blocks, such as filters, filter options, and additional items. Most building blocks are rule-based, and can be activated or hidden based on specific conditions. For more information about rules, see [Activating or Hiding Building Blocks with Rules](#).

- **Advanced catalog templates** (called origins) – Search for items based on multiple item fields. For more information, see [Working with Advanced Catalog Templates](#).
- **Filter categories** (called menu categories) – Organize filters into broad groups based on shared characteristics. For more information, see [Working with Filter Categories and Subcategories](#).
- **Filter subcategories** (called menu items) – Break categories down into more specific groups. For more information, see [Working with Filter Categories and Subcategories](#).

- **Filters** (called questions) – Gather user preferences to refine the search results. For more information, see [Working with Filters](#).
- **Filter options** (called answers) – Show users the available filter attributes and let them express their preferences. For more information, see [Working with Filter Options](#).
- **Tables** – Store filter options. For more information, see [Storing Filter Options in Tables](#).
- **Additional items** – Suggest complementary items to users. For more information, see [Including Additional and Required Items in the Search Results](#).
- **Required items** – Require users to add specific items to the transaction because they have to be purchased together with the chosen items. For more information, see [Including Additional and Required Items in the Search Results](#).

After creating a building block instance, you can copy or delete it. Copying an instance lets you reuse existing information and minimize manual work.

To copy a building block:

1. On the building block subtab, click the name of the building block you want to copy.
2. In the **Actions** dropdown menu, select **Make a Copy**.
3. Edit the building block name, code, and sequence number, if available.
4. On the **Rules** or **Rule** section or subtab, edit the rules to match the requirements for this new building block.
5. Apply changes to other fields and subtabs, and enter new data as needed.
6. Click **Save**.

If a building block instance is no longer needed, you can delete it permanently. Edit the building block record and go to the **Actions** dropdown menu. Then, select **Delete** and click **OK** to confirm that you want to delete the building block.

Exporting and Importing Catalogs

You can export and import catalogs at Guided Selling > System > Global Settings. Use the import and export options to move catalogs from your sandbox account to your production account after testing. You can also create catalog duplicates in your current account to use as a base for new catalogs.


To export a catalog, select one in the **Export Product** field and click the **Export** button. The catalog will be saved as a ZIP file on your computer.

In the exported file, you can include additional resources, such as background images. If these resources aren't available in the target account, check the **Export product resources** box before exporting the catalog. However, if you export the catalog for testing purposes and don't need additional resources, leave the box unchecked.

After exporting a catalog, you can import it back into the same account or a different one. In the **Import Product** field, select the ZIP file containing the catalog and click the **Import** button.

Working with the Catalog User Interface

Each catalog includes an interface that let users search for items based on their preferences. The following image shows a simplified catalog interface and highlights its main elements.

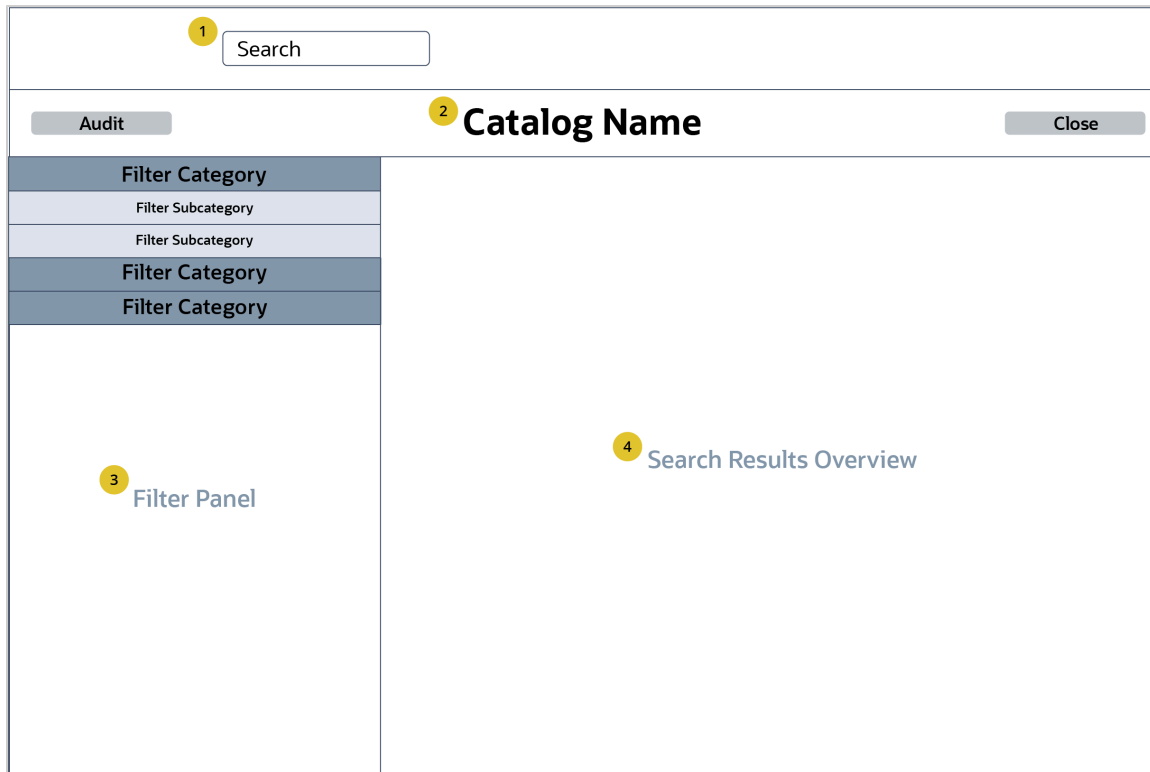

1. **Search bar** – Lets users quickly search for specific items by entering keywords. The search bar works with advanced catalog templates (called origins). For more information about the search bar, see [Search Bar](#).
2. **Top bar** – Displays the catalog name and provides the buttons to add items to the transaction (if the wish list is enabled) and close the catalog. From the top bar, users can also access the Audit menu where they can find information about the selected filter options.
3. **Filter panel** – Contains the search filters organized into categories and subcategories to let users refine the search results. For more information, see [Creating and Organizing Search Filters for the Catalog User Interface](#).
4. **Search results overview** – Displays the search results and lets users choose how they want to sort and view them. For more information, see [Working with the Search Results Overview](#).

If you enable the wish list (called the cart), users can access it from the catalog user interface. The wish list groups items before adding them to the transaction. For more information, see [Working with the Wish List \(Called the Cart\)](#).

Search Bar

When working with an advanced catalog template (called an origin), you can add a search bar to the catalog interface. The search bar lets users quickly find items by typing keywords, like names and descriptions. When users type three or more characters, the search process looks for those keywords in item fields to find matching items in the catalog.

You can define the search fields in the advanced catalog template. To display the search bar, one or multiple search fields must include a search operator. For more information about advanced catalog templates, see [Working with Advanced Catalog Templates](#).

To assign a search operator to a field:

1. In NetSuite, go to Guided Selling > System > Origins.
2. Edit an advanced catalog template (called an origin).
3. Go to the **Fields** subtab.
4. Under the **Search Operator** column, select a search operator for any fields you want to use in the search bar.

Search Operator	Description	Usage
Exact match	Finds results that exactly match the keywords provided by the users.	Useful when users know the precise search value.
Contains	Finds results that include the keywords anywhere in the search fields.	Useful for fields with a lot of text and when users only know part of the search value.
Starts with	Finds results that start with the keywords provided by users.	Useful when users only know the beginning of the search value.
Exact match then contains	Prioritizes exact matches first, then includes results that contain the keywords.	Useful for providing users with exact matches, plus additional relevant results.

5. Click **Save**.

Working with the Search Results Overview

After using filters or the search bar to search for items, users can view search results on the catalog interface. To customize how search results are displayed, users can use the following fields:

- **Items per Page** – Defines how many search results are displayed on each page.
- **Sort By** – Sorts results by a specific search field defined in the advanced catalog template. For more information, see [Sorting Results by a Specific Search Field](#).
- **Filter** – Refines the search results by searching the provided keywords against the item name or number.

If you are working with an advanced catalog template (called an origin), include the item name or number in the search field list.

Users can also choose between a grid or list view to customize the search result overview. For more information, see [Working with the Views for the Search Result Overview](#).

Sorting Results by a Specific Search Field

On the catalog interface, users can sort search results by any search field included in the **Sort By** field. You can define these search fields in the advanced catalog template (called the origin). A search field must have a label to appear in the **Sort By** field. These labels will be displayed as field options. You can also sort the options within the **Sort By** field by assigning a sequence number to each search field.

To include a search field for sorting:

1. In NetSuite, go to Guided Selling > System > Origins.
2. Edit an advanced catalog template (called an origin).
3. Go to the **Fields** subtab.
4. Under the **Sort by Label** column, enter a label for one or multiple fields listed under the subtab.
5. Under the **Sequence Number** column, enter a number to sort the label within the available options.

6. Click **Save**.

You can also include the **Price** option in the **Sort By** field.

To include the Price option in the Sort By field:

1. In NetSuite, go to Guided Selling > System > Origins.
2. Edit an advanced catalog template (called an origin).
3. Check the **Load NS item prices** box to make pricing data available for the search fields.
4. Check the **Include price in custom Sort By** box.

Working with the Views for the Search Result Overview

Catalogs offer two options for displaying search results:

- Grid view
- List view

These views don't require any particular setup from your side. For more information, see [Working with Grid View](#) and [Working with List View](#).

To define the layout that users view when first opening catalogs, go to the options records at Guided Selling > System > Global Settings. In the **Default View** field, select your preferred layout.

Working with Grid View

In grid view, each search result is displayed as a tile arranged in a grid. This option is useful when you want to include images with the search results. The following image shows the default tile template.



Number	Name	Description
1	Part Number	Corresponds to the Item Name/number field (ID: itemid).
2	Image	Corresponds to the Store Display Image field (ID: storedisplayimage).
3	Name	Corresponds to the Display Name/Code field (ID: displayname).
4	Price	Retrieved from the price matrix . The currency and price level are determined by the customer selected on the transaction.
5	Quantity	Users can select the number of items.
6	Add button	Users can click this button to add items to transactions or the wish list.
7	Description	Corresponds to the Web Store Description field (ID: storedescription).

Working with List View

List view organizes search results into rows and columns. Each row represents an item, and columns display details about that item. The following image shows the default list header.

1 Part Number	2 Name	3 Price	4 Details	5 Actions
Item Name/Number	Display Name/Code	0.00	Web Store Description	1 + - ADD

Note: List view doesn't include images.

Number	Column Name	Description
1	Part Number	Corresponds to the Item Name/number field (ID: itemid).
2	Name	Corresponds to the Display Name/Code field (ID: displayname).
3	Price	Retrieved from the price matrix. The currency and price level are determined by the customer selected on the transaction.
4	Details	Corresponds to the Web Store Description field (ID: storedescription).
5	Actions	Under this column, users can change the quantity and add the item to the transaction.

Including Additional Details in the Views

In grid or list view, you can include additional information that will be displayed for each search result. Depending on the view chosen, the information is displayed as a field (in grid view) or a column (in list view):

- **Margin** – Displays the percentage difference between the **Purchase Price** (item.cost) and the **Base Price** from the price matrix on the item record. The value is calculated as follows:

$$100 * (\text{price} - \text{cost}) / \text{price}$$

- **UOM** – Lets users view the unit of measure on the catalog interface. If multiple units of measure are available, users can select their preferred one. The information is loaded from the **Primary Sale Unit** field (ID: saleunit) on the item record.

The margin information precedes the unit of measure. Both are displayed after the pricing information.

To display the margin and the unit of measure on the catalog interface, go to the options record at Guided Selling > System > Global Settings. Then, check the **Margin** and the **Load units of measure** boxes.

Setting a Minimum Quantity

You can set a minimum quantity of items that users must add to the transaction using the **Quantity** field. To define the minimum quantity, go to the options record at Guided Selling > System > Global Settings. In the **Minimum Sales QTY Field**, enter the ID of the item field that stores the minimum quantity value.

This value also works as a quantity multiplier. When increasing the quantity, users add items in multiples of the specified value. For example, if the minimum quantity is 2, users can only add 4, 6, 8 items, and so on.

Changing the Field Reference for Names, Descriptions, and Images

Each search result includes a name, a description (if available), and an image (only in grid view). This information is sourced from specific fields on the item record. You can change the displayed information for names, descriptions, and images by mapping them to other fields.

The following table describes the fields used as a reference for names (called titles), descriptions, and images.

Mapping Field	Default Field
Title	Display Name/Code (ID: displayname)
Description	Web Store Description (ID: storedescription)
Image	Store Display Image (ID: storedisplayimage)

To use other fields as a reference, go to the options record at Guided Selling > System > Global Settings. Under the **Field Mapping** subtab, select alternate references in the following fields:

- **Title** (or Name)
- **Description**
- **Image**

Working with the Wish List (Called the Cart)

The wish list lets users group items before adding them to transactions. With the wish list, users can review the chosen items, adjust quantities, and remove items that are no longer needed.

To view the wish list, users click the cart icon on the user interface. To move items from the wish list to the transaction, users click the **Submit** button in the wish list. Alternatively, they can use the **Submit** button on the catalog interface.

 **Note:** The **Submit** button on the catalog interface is only visible if you enable the wish list.

You can enable the wish list on the options record. Go to Guided Selling > System > Global settings. Then, check the **Use cart** box and click **Save**.

Working with Advanced Catalog Templates

Note: Advanced catalog templates are called origins on the user interface.

Advanced catalog templates let you define multiple search fields. You can choose as many fields as required. When using an advanced catalog template, set advanced filter expressions to specify values for these search fields. For more information about advanced filter expressions, see [Working with Basic or Advanced Filter Expressions](#).

To create an advanced catalog template:

1. In NetSuite, go to Guided Selling > System > Origins.
2. Click **New CPQG Origin**.
3. Enter a descriptive name for the catalog template.
Users view this name in the **Origin** field on the catalog interface.
4. In the **Code** field, enter a unique identifier for this catalog.
The code must contain only uppercase letters, numbers, and underscores. A shortened version of the name can be used as the code.
5. In the **Record Type** field, select **item** to let users search for items.

Note: You could select a different record type to include in the catalog. However, catalogs are specifically tailored to work with items.

6. To include inactive items in the search, check the **Show inactive items** box. For example, you can enable this option for maintenance purposes.

Note: An item is inactive when the **Inactive** box is checked. You can find this option under the **System Information** subtab on the item record.

7. To include pricing information on the catalog interface, check the **Load NS item prices** box. Price amounts are displayed in:
 - The **Price** field in the tiles of the grid view.
 - The **Price** column in the list view.

Note: To display prices, don't add the **Price** field under the **Fields** subtab.

8. To let users sort items by price on the catalog interface, check the **Include price in custom Sort By** box.
Enabling this option makes the **Price** option available in the **Sort By** field on the catalog interface.
9. To specify the fields you want to load for the search request, go to the **Fields** subtab.
These are the fields you want to use to search for items.
10. Under the **Field ID** column, enter as many field IDs as required.
11. Catalogs use IDs to search options for dropdown list and multi-select fields. To search by the option label instead of the option ID, check the **Get text label** box.
12. Click **Save**.

After creating the advanced template (called the origin), assign it to the catalog.

To assign an advanced template to a catalog:

1. Edit a catalog record (called a product record).
2. Go to the **Origins** subtab.
3. In the **Origin** field, select the advanced template.
4. Click **Add**.
5. Click **Save**.

Creating and Organizing Search Filters for the Catalog User Interface

With Guided Selling, you can create filters that let users search for items based on the options you provide. Filters enhance the search experience and help users discover products that they might not have considered.

Filters are organized into categories (called menu categories) and subcategories (called menu options). When users browse a catalog, they can expand categories and subcategories to view the available filters (called questions). They can then select the filter options (called answers) that best suit their needs. Search results update in real time based on the selected filter subcategories and options. For example, a furniture catalog might have Desk as a filter category with Office Desks and Home Desks as subcategories. Under Office Desks, a Shape filter might include options like Rectangular, U-shape, and L-shape.

Filter categories, subcategories, and options are associated with basic or advanced filter expressions. These expressions determine the search results that are returned when users interact with the corresponding catalog interface elements. For more information, see [Working with Basic or Advanced Filter Expressions](#).

Categories, subcategories, filters, and filter options are visible on the user interface by default. However, you can use rules to hide them under certain conditions. For more information, see [Activating or Hiding Building Blocks with Rules](#).

For more information, see the following help topics:

- [Working with Filter Categories and Subcategories](#)
- [Working with Filters](#)
- [Working with Filter Options](#)
- [Storing Filter Options in Tables](#)

Working with Filter Categories and Subcategories

 **Note:** Filter categories and filter subcategories are called menu categories and menu items on the user interface.

In catalogs, filter categories (called menu categories) are broad groups that organize filter subcategories (called menu items) and filters by shared traits. Filter subcategories break categories down into more specific groups to help users refine their search. You can organize categories and subcategories into sections using a category or subcategory as a heading.

Categories and subcategories are always visible on the catalog interface. However, you can use rules to hide them under certain conditions. For more information about rules, see [Activating or Hiding Building Blocks with Rules](#). To use categories or subcategories in rule fields, enter MENU_CAT/CATEGORY_CODE or MENU_ITEM/SUBCATEGORY_CODE. MENU_CAT and MENU_ITEM identify the type of record.

To work with filter categories and subcategories, follow these steps:

- [Step 1: Creating Filter Categories and Subcategories](#)
- [Step 2: Setting Up Filter Categories and Subcategories](#)

For more information about filters and filter options, see [Working with Filters](#) and [Working with Filter Options](#).

Step 1: Creating Filter Categories and Subcategories

Create filter categories before creating the associated subcategories. To create a filter category or subcategory:

Filter Category (Called Menu Category)	Filter Subcategory (Called Menu Item)
1. In NetSuite, go to Guided Selling > Product > Product Maintenance. 2. Edit a catalog record (called a product record). 3. Go to the Menus subtab. 4. Click New CPQG Menu Category	1. In NetSuite, go to Guided Selling > Product > Product Maintenance. 2. Edit a catalog record (called a product record). 3. Edit a filter category (called a menu category). 4. Go to the Menu Items subtab. 5. Click New CPQG Menu Item.

Continue with the tasks in step 2 to create a filter category or subcategory. These tasks are similar for both records.

Step 2: Setting Up Filter Categories and Subcategories

After clicking the button to create a filter category or subcategory, continue with the following steps.

To set up a filter category or subcategory:

1. Enter a descriptive name for the filter category or subcategory.
This name is for internal reference only and is automatically copied to the **Label** field the first time you enter it.
To change the name visible to users, edit the text in the **Label** field.
2. In the **Label** field, enter the text displayed to users for this filter category or subcategory.
3. In the **Code** field, enter a unique identifier for this filter category or subcategory.
The code must contain only uppercase letters, numbers, and underscores. You can use a shortened version of the name as the code.
4. Provide a sequence number to sort the filter category or subcategory on the catalog interface.
You can enter a negative or positive number, for example, -2 or 5. Filter categories and filter subcategories are sorted from lowest to highest sequence number.
5. (Filter categories only) The search starts when users click a filter subcategory by default. To start the search when users click on the filter category, check the **Show results** box.
6. Filter categories and subcategories can be organized into sections. To use a category or subcategory as a section heading, check the **Is group label** box. The filter category or subcategory will change color and display other categories or subcategories beneath it.
7. To include a filter category or subcategory in a section, select the section in the **Group** field.
8. In the **Hide Rule** field, enter the conditions that determine when the filter category or subcategory should become hidden.
To write conditions, enter filter and filter option codes separated by a forward slash, for example, A/1. Use operators to combine multiple conditions, for example, A/1&B/2. For more information, see [Activating or Hiding Building Blocks with Rules](#).

9. Depending on whether you use the default or advanced catalog template, define a basic or advanced filter expression. For more information, see [Working with Basic or Advanced Filter Expressions](#).
10. Click **Save**.

Working with Filters

 **Note:** Filters are called questions on the user interface.

Using catalogs, you can gather user preferences using filters (called questions) and filter options (called answers). Filters and filter options are used to refine search results based on specific criteria. Filters represent the item features, aspects, or characteristics, while filter options display available attributes for users to express their preferences.

Each filter has an internal name and a corresponding label for the catalog interface. You can use a shortened version of the name as a code to identify the filter in actions and rules. The sequence number determines the order in which the filter is displayed on the catalog interface.

The following filter types are available:

- **Checkbox** – Lets users select multiple options by checking the box next to each one. This filter type is useful when users can express multiple preferences within a limited set of options.
- **Radio button** – Lets users select a single option from a predefined list of mutually exclusive options. Users select a filter option by choosing the radio button next to the option. This filter type is helpful when only one option should be selected from a limited list.
- **Dropdown list** – Lets users select a single option from a predefined list by clicking an arrow to view it. When the option list is long, you can choose this filter type to save space on the catalog interface.
- **Input box** – Lets users type in a text field (called free-form text) or select an option from a popup list (called a dropdown). This filter type is useful for gathering information from users or for providing them with an extensive list of options stored in catalog tables. For more information about catalog tables and popup lists, see [Storing Filter Options in Tables](#) and [Working with Popup Lists for Input Box Filters](#).
- **Tile** – Lets users select one or multiple options from a set of labeled images. Users can hold the Ctrl key to select multiple options. This filter type is ideal when filter options have a relevant visual element, such as colors or textures.

Some settings for filter options (called answers) can be defined at the filter level. For more information about filter options, see [Working with Filter Options](#).

To create a filter (called a question):

1. In NetSuite, go to Guided Selling > Product > Product Maintenance.
2. Edit a catalog (called a product).
3. Go to the **Questions** subtab.
4. Click **New CPQG Question**.
5. Enter a descriptive name for the filter.
This name is for internal reference only and is automatically copied to the **Label HTML** field.
To change the name visible to users, edit the text in the **Label HTML** field.
6. In the **Code** field, enter a unique identifier for this filter.
The code must contain only uppercase letters, numbers, and underscores. You can use a shortened version of the name as the code.
7. Provide a sequence number to sort the filter on the catalog interface.

You can enter a negative or positive number, for example, -2 or 5. Filters are sorted from lowest to highest sequence number.

8. Select the type of filter you want to create, such as a checkbox, radio button, or dropdown list.
The available settings will vary depending on the filter type.
9. In the **Label HTML** field, enter the text users view on the catalog interface for this filter.
You can format the text by changing the paragraph font and size, or by making the text bold, italic, or underlined. HTML code can be used to add images or links, but script tags aren't supported.
10. In the **Hide Rule** field, enter the conditions that determine when the filter should be hidden.
To write conditions, enter filter and filter option codes separated by a forward slash, for example, A/1. Use operators to combine multiple conditions, for example, A/1&B/2. For more information, see [Activating or Hiding Building Blocks with Rules](#).
11. To let users select multiple tiles, check the **Multi-select** box.
12. To hide the filter label and its background color, check the **Hide title bar** box.
13. In the **Question Title Bar Background Color** field, you can change the color behind the filter label.
Select a color from the palette or enter a hexadecimal value, such as #FFFFFF for white.
14. Some filter types let you arrange filter options (called answers) horizontally. In the **Answers per Row** field, enter the number of options to arrange on each row. Depending on label length, include a maximum of 3 or 4 options per row.



Note: Take into account the following:

- Options may be automatically distributed to leverage the available space.
- If you leave the **Answers per Row** field blank, the default number of options per row is 1.

15. To hide labels for input box options and tiles, check the **Hide answers labels** box.
16. Click **Save**.

After setting up the filter, create the corresponding filter options. For more information, see [Working with Filter Options](#).

Working with Filter Options



Note: Filter options are called answers on the user interface.

Filter options (called answers) show users the available item attributes and let them express their preferences. Depending on the parent filter type, filter option settings may vary. For example, you can add a text field to a checkbox option or an image to a tile filter option.

Each filter option has an internal name and a corresponding label for the catalog interface. Use the sequence number to sort filter options within a filter. To identify filter options in rules and actions, you can use a shortened version of the name as a code.

To create a filter option (called an answer):

1. In NetSuite, go to Guided Selling > Product > Product Maintenance.
2. Edit a catalog (called a product).
3. Go to the **Questions** subtab.

4. Click the name of the filter (called the question) for which you want to create an option (called an answer).
 5. On the **Answers** subtab, click **New CPQG Answer**.
 6. Enter a descriptive name for the filter option.
This name is automatically copied to the **Label HTML** field.
To change the name visible to users, edit the text in the **Label HTML** field.
 7. In the **Code** field, enter a unique identifier for this filter option.
The code must contain only uppercase letters, numbers, and underscores. You can use a shortened version of the name as the code.
 8. In the **Label HTML** field, enter the text displayed on the catalog interface for this filter option.
You can format the text by changing the paragraph font and size, or by making the text bold, italic, or underlined. HTML code can be used to add images or links, but script tags aren't supported.
 9. Provide a sequence number to sort the filter option within the filter.
You can enter a negative or positive number, for example, -2 or 5. Filter options are sorted from lowest to highest sequence number.
 10. In the **Hide Rule** field, enter the conditions that determine when the filter option should be hidden.
To write conditions, enter filter and filter option codes separated by a forward slash character, for example, A/1. Use operators to combine multiple conditions, for example, A/1&B/2. For more information, see [Activating or Hiding Building Blocks with Rules](#).
 11. In the **Answer Spans** field, enter a number between 1 and 12 to define how many columns the filter option can occupy within the filter space.
 12. If you work with options for checkbox or radio button filters, the following options are available:
 - **Add text input** – Adds a single-line text field.
 - **Show input when unchecked** – Always shows the text field, even if users haven't selected the filter option.
 13. If you work with filter options for tiles, two options are available to add an image:
 - In the **Image** field, select an image from the File Cabinet.
 - In the **Image URL** field, enter the URL of the image.
-  **Note:** If you select an image and provide a URL, only the image from the URL is displayed on the catalog interface.
14. If you work with an input box filter, select one of the following option types:
 - **Free-form text** – Creates a text field.
 - **Dropbox** – Creates a popup list. For more information, see [Working with Popup Lists for Input Box Filters](#).
 15. Depending on whether you work with the default or advanced catalog template, define a basic or an advanced filter expression. For more information, see [Working with Basic or Advanced Filter Expressions](#).
 16. Click **Save**.

Working with Popup Lists for Input Box Filters

Popup lists (called dropboxes) are filter options that display filtered content from catalog tables. Users open the popup list by clicking the input box button on the catalog interface. When the popup list appears, it displays the values from one or more columns in the catalog table as a list of options. After the popup list loads, users can filter it using a search box.

When users make a selection in a popup list, they select an entire row from the catalog table. However, the input box only displays the value from the column you specify. You can map the rest of the values from that row to other fields. Using mapping options, other filter options can be dynamically selected based on user choices in popup lists. This option simplifies the search process for users and ensures that filter options are selected according to the established requirements.

When creating a popup list, you must specify the catalog table that stores the information and the columns that will provide the values for the popup list. To ensure the column values are properly displayed:

- Enclose the column names in curly braces {column name}.
- Enter the column names exactly as they appear in the catalog table.

For example, you have a dynamic table that uses the field IDs as columns. You want to include values from the **Display Name/Code** and the **Item Name/Number** fields in the popup list. You also want the item name/number in parentheses. To do this, use the following syntax:

```
{displayname} ({itemid})
```

Examples of options displayed in the popup list:

- Office Desk A100 (OFF-DESK-A100)
- Office Desk B100 (OFF-DESK-B200)
- Office Desk C100 (OFF-DESK-C100)

You can also change the look and feel of the options by formatting the column names. You can modify the font and size or make the text bold, italic, or underlined. When adding formatting, place the tags outside the curly braces—for example `<b>{column name}</b>`. To verify the formatting, click the **Source** button and view the HTML code.

To work with a popup list:

1. In NetSuite, go to Guided Selling > Product > Product Maintenance.
2. Edit a catalog (called a product).
3. Go to the **Questions** subtab to view filters (called questions).
4. Click the name of the input box filter for which you want to create a filter option (called an answer).
5. On the **Answers** subtab, click **New CPQG Answer**.
6. In the **Data Type** field, select **Dropbox** to create a popup list.
7. Click the **Table Options** subtab.
8. In the **Table Reference** field, select the catalog table you want to associate with the popup list.
9. In the **Column in Table to Get Value** field, select the column that provides the value to display in the input box.
10. In the **List Option Label** field, enter the column names in curly braces.



Note: When adding formatting, place the tags outside the curly braces. For example:

```
<b>{Column Name}</b>
```

To verify the formatting, click the **Source** button.

11. (Optional) In the **Map columns to QA** field, provide one or more filter options where you want to map other column values from the same row. Use the following syntax:

```
1 | {"column1":"FILTER_CODE1/OPTION_CODE1", "column2":"FILTER_CODE2/OPTION_CODE2", "column3":"FILTER_CODE3/OPTION_CODE3"}
```

12. Click **Save**.

Storing Filter Options in Tables

When you need to retrieve long lists of options dynamically, you can store data in tables to provide options for input box popup lists (called dropboxes). This approach simplifies adding, removing, and updating options. For example, if your business sells multiple desk types, you can dynamically update the desk options, without having to change the filter every time you add or remove a desk type. For more information about input box popup list filters, see the help topic [Working with Popup Lists for Input Box Filters](#).

The following table types are available:

- **Dynamic tables** – Let you create tables using data from any record type available in your account. Each record field becomes a column in the table. Dynamic tables automatically update when data change in your account. This table type is useful when working with account data that only needs to be accessed occasionally. For more information, see [Creating Dynamic Tables](#).
- **Code exec generated tables** – Let you create tables that you can fill in using NetSuite CPQ Guided Selling functions. You can use this table type when table data requires frequent access and updates. For more information, see [Creating Tables Using Functions](#).

To create a table:

1. In NetSuite, go to Guided Selling > Product > Product Maintenance.
2. Click **Edit** next to the catalog you want to modify.
3. On the **Tables** subtab, click **New CPQG Table**.
4. Enter a descriptive name for the table.
This name is for internal reference only.
5. In the **Code** field, enter a unique identifier for the table.
The code can contain only uppercase letters, numbers, and underscores. You can enter a shortened version of the name as the code to identify the table.
6. Select a table type.
7. Click **Save**.

Creating Dynamic Tables

Dynamic tables pull data from the record type you specify. You can choose any record type available in your account, and the table updates automatically whenever those records change. When users click the button of the popup list associated with the table, options are dynamically loaded from the table into the popup list.

To add content to a dynamic table, specify the record fields you want to include. Each field becomes a column in the table. If you don't specify any fields, the dynamic table remains empty. After defining the table content, you can filter the dynamic table by field values to refine the results and display only the information that matches the criteria defined in popup lists. You can also preview the content of the dynamic table by clicking the **Test Table** button.

 **Note:** Record fields from sublists are unavailable.

Complete the basic steps to create a table before proceeding the specific steps for dynamic tables.

To create a dynamic table:

1. On the **Tables** subtab, click **New CPQG Table**.
2. In the **Table Type** field, select **Dynamic**.
3. Select the record type from which you want to retrieve data.
4. To add columns, click the plus icon next to the **Record Fields** field and select the record fields you want to include.
5. To refine the table results and retrieve a subset of records, click the open icon next to the **Search Filter** field.

In the popup wizard:

- Select the record field you want to use for filtering.
- Select an operator.
The available operators depend on the field selected.
- Enter the filter text.
- Click **OK**.

6. To add multiple filters and retrieve a more specific subset of records, repeat step 5.

When adding another filter, select a logical operator (AND or OR) to combine the filters. AND produces a more restrictive condition, whereas OR results in a less restrictive condition.

The filters are automatically copied to the **Search Filter** field in JSON format. The syntax is:

```
1 | [{"fieldID1", "operator", "value1"}, "and", [{"fieldID2", "operator", "value2"}]]
```

7. To preview the dynamic table content, click the **Test Table** button.
8. Click **Save**.

Creating Tables Using Functions

Code exec-generated tables are dynamically created when you open a catalog. After creating this table type, use functions to fill it in when the catalog loads.

To create a code exec-generated table:

1. Go to the **Tables** subtab.
2. Click **New CPQG Table**.
3. In the **Table Type** field, select **CE generated**.
4. Click **Save**.

Working with Basic or Advanced Filter Expressions

Filter expressions define the conditions to filter items based on specific item fields. A filter expression evaluates each item against the specified fields to determine which items will be included in the search results. You can define filter expressions for:

- filter categories (called menu categories)
- filter subcategories (called menu items)
- filter options (called answers)

There are two types of filter expressions: basic and advanced. For more information about basic and advanced filter expressions, see [Creating Basic Filter Expressions](#) and [Creating Advanced Filter Expressions](#).

Creating Basic Filter Expressions

The default catalog template doesn't require any setup and supports basic filter expressions. Each filter category, subcategory, and option can have only one associated basic filter expression. A basic filter expression searches against a single item field.

To create a basic filter expression:

1. Edit a catalog (called product).
2. Edit one of the following records:
 - filter categories (called menu categories)
 - filter subcategories (called menu items)
 - filter options (called answers)
3. Go to the **Filter Expressions** subtab.
4. Define the basic filter expression:
 1. In the **Item Field** field, select the item field you want to use for filtering.
 2. In the **Operator** field, select the condition to compare the field against the value. Examples of operators include **contains** and **starts with**.
The available operators depend on the field you select.
 3. In the **Value** field, enter the value to evaluate against the item field.
5. Click **Save**.

Creating Advanced Filter Expressions

If you work with an advanced catalog template (called an origin), basic filter expressions are disregarded, and you must define advanced filter expressions. Advanced filter expressions can search against multiple item fields defined in the advanced catalog template. You can define only one advanced filter expression for each filter category, filter subcategory, and filter option.

To create an advanced filter expression:

1. Edit a catalog (called a product).
2. Edit one of the following records:
 - filter category (called menu category)
 - filter subcategory (called menu item)
 - filter options (called answers)
3. Go to the **Filter Expressions** subtab.
4. In the **Origin** field, select the advanced template (called the origin) associated with the catalog.
5. In the sublist line, click **Build** to open the wizard for the **Filter Expression** field.
6. In the popup wizard:
 - Select the item field you want to use for filtering.
 - Select an operator.

The available operators depend on the field you select.

- Enter the filter text.
- Click **OK**.

7. To filter on multiple fields and retrieve a more specific subset of items, repeat step 6 for each field.

When adding another field, select a logical operator (AND or OR) to combine the conditions. AND produces a more restrictive condition, whereas OR results in a less restrictive condition.

The wizard content is automatically copied to the **Filter Expression** field in JSON format. This is the syntax:

```
1 | [{"fieldID1","operator","value"},"and",["fieldID2","operator","value"]]
```

8. Click **Save**.

Including Additional and Required Items in the Search Results

 **Note:** Additional items are called add-ons on the user interface.

You can suggest or require users to pair a chosen item with other items. Additional items (called add-ons) complement the items users select and are optional. For example, if users select a desk, they may receive suggestions to include related items—such as a desk mat or a lamp—in the transaction. By offering additional items, you can make sure users don't overlook up-selling and cross-selling opportunities.

Some items, however, can only be purchased with other items. Required items ensure users select complete solutions. For example, if users select an air conditioning system, they may be required to include an installation kit as a part of the purchase.

When additional or required items are included in search results, the catalog interface prompts users to consider them. If additional items are available, the **Add-Ons** button appears on the catalog interface. Users can click this button to view the list of additional items. Required items will be available through the **Required Items** button, which opens the list of items to be purchased with the selected items.

To include additional and required items in the search results, you must implement a prerequisite first. Go to Guided Selling > System > Global settings. Then, check the **Advanced features** box. If you don't check this box, additional and required items won't appear on the catalog interface.

To create an additional or required item:

1. In NetSuite, go to Guided Selling > Product > Product Maintenance.
2. Edit a catalog (called a product).
3. Depending on the type of item to include in the search, follow one of the these procedures:

Additional Item	Required Item
1. Go to the Add-Ons subtab.	1. Go to the Required Items subtab.
2. Click New CPQG Add-On .	2. Click New CPQG Required Item .

4. Enter a descriptive name for the additional or the required item.

This name is for internal reference only. Users will view the values from the **Item Name/Number** and the **Display Name/Code** fields on item records.

5. In the **Item** field, select the item you want to use as an additional or required item.
6. In the **Show Rule** field, enter the conditions to include the additional or required item in the search results.
 To write conditions, enter filter and filter option codes separated by a forward slash character, for example, A/1. Use operators to combine multiple conditions, for example, A/1&B/2. For more information, see [Activating or Hiding Building Blocks with Rules](#).
7. Click **Save**.

Activating or Hiding Building Blocks with Rules

Your business relies on well-defined logic to run successfully. NetSuite CPQ Guided Selling helps you capture and enforce this logic with rules assigned to its building blocks, such as filter categories, subcategories, and filters. These rules set restrictions that limit possible combinations of features and options for your business items. For example, water-based finish options won't be offered for metal desk frames because they could cause rust. By limiting certain combinations of filters and filter options, rules also affect the results returned by the search. For example, if a filter becomes hidden, the filter expressions associated with its filter options won't be applied.

Rules are conditional statements based on combinations of filters and filter options. The system verifies the conditions expressed in the rules every time a user makes a selection or enters information in the catalog interface. When verifying rules, the system compares the filter options specified in the rules with those selected by users on the catalog interface. If there's a match, the system activates the relevant building blocks and performs the assigned task, such as suggesting an additional item (called an add-on) or hiding a filter option.

You can set up rules in the rule field of most building blocks. To write rules, use the codes for filters and filter options and insert a forward slash to separate them. Each code is a unique, shortened version of a building block name. When writing rules, always enter the filter code first. For example, if you use A/1 as the rule for an additional item, A is the filter code, and 1 is the filter option code. This code combination is the condition that the system verifies. For example, if users select option 1 for filter A, then the system will suggest the additional item to users.

Filter categories and filter subcategories can be included in rules using a specific format. The first code is fixed and the second code corresponds to the code for the filter category or subcategory:

- **Filter category** (called menu categories) – MENU_CATEGORY/CODE.
- **Filter subcategory** (called menu items) – MENU_ITEM/CODE.

For example, if your filter category code is DESKS, the rule would be MENU_CATEGORY/DESKS. If your filter subcategory code is HOME_DESKS, you'd use MENU_ITEM/HOME_DESKS.

In a rule, you can also use operators to combine multiple conditions. For example, you can assign the rule A/1&B/2 to the additional item. The ampersand represents the AND operator, and the system will only suggest the additional item if both conditions are true. If users select option 1 for filter A and option 2 for filter B, then the additional item is suggested to users.

When writing rules, you can choose codes and operators from fields with predefined lists that include all available combinations and options. These fields are named **Reference Codes for Rules** and **Operator Codes for Rules**. For more information about operators, see [Using Rule Operators](#).

Example

Your business offers a range of desks and chairs. Desks are available in various types, such as basic, executive, and deluxe. You might use a filter like "Choose the desk type" with the code DESK_TYPE. One of the filter options could be "Executive" with EXECUTIVE as the code. When users choose a desk type,

the system suggests matching types of chairs as additional items. If users choose the executive desk type on the catalog interface, the system might suggest leather chairs that include the code combination DESK_TYPE/EXECUTIVE in the rule field of the corresponding additional item.

Let's say desks can also have assorted colors, such as gray, brown, and black. If a user chooses a brown executive desk, the system might suggest a leather brown chair with the rule DESK_TYPE/EXECUTIVE&DESK_COLOR/BROWN. DESK_COLOR and BROWN are the filter and filter option codes, respectively. The AND operator (ampersand character) indicates that users must choose both an executive desk and the brown color to receive the suggestion for a brown leather chair.

Working with Rules

Depending on the building block the rule is assigned to, NetSuite CPQ Guided Selling can perform one of the following tasks:

Note: To perform the task, the filter options selected by users on the catalog interface must match the filter options in the building block rule.

- Hide a filter category, subcategory, filter, or filter option from the filter panel.
- Suggest an additional item (called an add-on) to be included in the transaction.
- Require users to include an item in the transaction.
- Run an action.

Rules for hiding building blocks are stored in **Hide Rule** fields. These rules prevent users from viewing resources that aren't available for their current selection. Rules for performing a specific task are stored in **Rule** fields.

Using Rule Operators

The following table lists the operators that you can include in rules to combine multiple conditions. In the examples, A represents the filter code, and 1 is the filter option code.

Operator	Description	Example	Explanation
/	Forward slash – Separates the filter code from the filter option code.	A/1	The option selected for filter A is 1.
&	Hard AND – Both conditions must be true for the entire rule to be true.	A/1&B/2	The option selected for filter A is 1 and the option selected for filter B is 2.
+	Soft AND – Works like the hard AND, but you use it with two or more options for the same filter.	A/1+2	The options selected for filter A are 1 and 2.
#	Hard OR – At least one condition must be true for the entire rule to be true.	A/1#B/2	The option selected for filter A is 1 or the option selected for filter B is 2.
,	Soft OR – Works like the hard OR, but you use it with two or more options for the same filter.	A/1,2	The option selected for filter A is 1 or 2.
()	Parentheses – Group one or more conditions that the system evaluates together.	(A/1&B/2)#C/3	Either the option selected for filter A is 1 and the option selected for filter B is 2, or the option selected for filter C is 3.

Operator	Description	Example	Explanation
[]	Square brackets – Verify the value of a filter option using the following operators: ■ equals to ■ greater than ■ less than ■ begins with ■ contains ■ ends with The tilde symbol (~) identifies a range of numbers. To evaluate the filter option against a sequence of characters (letters and numbers), enclose the value in quotation marks. You can verify the value for any type of input box answers.	A/1["oak"] A/1[^="o"]. A/1[*="a"]. A/1["\$="k"] A/1[=10] A/1[>10] A/1[<10] A/1[>=10] A/1[<=10] A/1[10~20]	The value entered for filter A, option 1 is oak. The value entered for filter A, option 1 begins with o. The value entered for filter A, option 1 contains a. The value entered for filter A, option 1 ends with k. The value entered for filter A, option 1 is 10. The value entered for filter A, option 1 is greater than 10. The value entered for filter A, option 1 is less than 10. The value entered for filter A, option 1 is greater than or equal to 10. The value entered for filter A, option 1 is less than or equal to 10. The value entered for filter A, option 1 is between 10 and 20.
X()	NOT – Used to negate a condition. If the condition is false, the rule is true.	X(A/1)	Option 1 isn't selected for filter A.
*	Wildcard – Represents one or more unknown characters at the beginning, end, or in the middle in the filter option code.	A/1* A/*1 A/*1*	The selected option code for filter A begins with 1. The selected option code for filter A ends with 1. The selected option code for filter A contains 1.
%%	Unselected filter – Identifies a filter where no options were selected by users.	A/%%	No option is selected for filter A.
/	Any filter and option combination – The system always evaluates the rule as true. For example, an additional item is always suggested to users. If the asterisk replaces only the filter code, the rule is true if the user selects any filter option.	*/* A/*	The rule is always true, regardless of the filter and option combination. Filter A has selected options.
[x;x=""]	Identifies a sequence of characters, the number of characters in the sequence, and their position.	A/1[3;4="BCDE"]	The code of option 1 for filter A is the four-character value of BCDE, beginning in position 3.

Working with Configurable Items from Catalogs

If configurable items match the options users select on the catalog interface, they're automatically included in the search results. The item used for the search is the base item, which is the placeholder item

that's added to the transaction and is attached to the configuration. In catalogs, configurable items are associated with an **Add** button by default.

To let users configure these items from catalogs and add them to transactions, you must associate them with the **Configure** button instead. To display this button for configurable search results, go to the item record associated with each configurable item. Under the **Custom** subtab, select a product in the **CPQ Configurator Product** field.

By setting this option, users will see a **Configure** button for the configurable item and can open it from the catalog to configure it. For more information about configurable items, see the help topic [NetSuite CPQ Configurator Products](#).

Searching for Items from Transactions

Users can open catalogs from eligible transactions. For more information about eligible transactions, see [NetSuite CPQ Guided Selling Setup](#).

The basic workflow to search for items from catalogs is as follows:

1. Open or create an eligible transaction.
2. Complete the required fields.
3. Click the **Guided Selling** button.
4. On the Select Product page, select a catalog.
This page offers an overview of all available catalogs.

 **Note:** Catalogs are called products on the user interface.

5. To add items to the transaction, click the **Add** button.
For configurable items, users can click the **Configure** button if you've enable it. For more information, see [Working with Configurable Items from Catalogs](#).
6. To exit the catalog interface, click the **Close** button.
7. Save the transaction.

If you enable the wish list (called the cart), users first add items there to review their choices. Then, they can click the **Submit** button to add items to the transaction. For more information about the wish list, see [Working with the Wish List \(Called the Cart\)](#).