



ORACLE
NetSuite

Printing Customization



2025.2

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

Advanced PDF/HTML Templates	1
Using Advanced Template Formatting Programmatically	2
Account-Specific Domains in Advanced Printing Templates	2
Enabling the Advanced PDF/HTML Templates Feature	2
Reviewing Available Advanced Templates	3
Advanced PDF/HTML Multi-Currency Statement Templates	4
Setting Custom Forms to Use Advanced Templates	5
Advanced Templates Customization in the Template Editor	7
Viewing an Advanced Template in the Template Editor	8
Template Setup Window	10
Previewing Advanced PDF/HTML Templates	11
Saving an Advanced Template	12
Error Messages in Advanced Templates	13
WYSIWYG Editing in the Template Editor	13
Source Code Editing in the Template Editor	21
Scripting with Advanced Templates	51
Using Custom Data Sources for Advanced Printing	51
Using SuiteScript for Transaction Records	56
Using SuiteScript to Apply Advanced Templates to Non-Transaction Records	59
Using SuiteScript 2.x to Combine Multiple Data Sources in One Advanced Template	60
Changing the Script ID of a Custom Template	63
Advanced Templates for Printing Saved Search Results	63
Advanced Templates Support for Company Printing Preferences	66
FAQs for Advanced Printing	67
Advanced Templates Reference	70
Standard Sales Order PDF/HTML Template	71
Standard Invoice PDF/HTML Template	83
Standard Purchase PDF/HTML Template	95
Standard Quote PDF/HTML Template	105
Standard Cash Refund PDF/HTML Template	115
Standard Cash Sale PDF/HTML Template	126
Standard Return Authorization PDF/HTML Template	140
Standard Picking Ticket PDF/HTML Template	150
Standard Payment Voucher PDF/HTML Template	163
Standard Credit Memo PDF/HTML Template	172
Standard Customer Deposit PDF/HTML Template	183
Standard Check PDF/HTML Template	192
Standard UK Check PDF/HTML Template	196
Standard US Voucher Check PDF/HTML Template	200
Standard UK Voucher Check PDF/HTML Template	204
Standard AU Voucher Check PDF/HTML Template	208
Standard US Vendor Payment PDF/HTML Template	212
Standard UK Vendor Payment PDF/HTML Template	221
Standard AU Vendor Payment PDF/HTML Template	230
Standard Paycheck PDF/HTML Template	239
Standard Bill of Materials PDF/HTML Template	243
Standard Shipping Label PDF/HTML Template	251
Standard Customer Payment PDF/HTML Template	254
Standard Mailing Label PDF/HTML Template	264
Standard Item Label PDF/HTML Template	267
Standard Statement PDF/HTML Template	270
Standard Price List PDF/HTML Template	284
Standard Multi-currency Statement Template	298

Standard Expense Report PDF/HTML Template	313
Standard Sales Order PDF/HTML Template (SuiteTax)	322
Standard Invoice PDF/HTML Template (SuiteTax)	334
Standard Purchase PDF/HTML Template (SuiteTax)	346
Standard Quote PDF/HTML Template (SuiteTax)	356
Standard Cash Refund PDF/HTML Template (SuiteTax)	366
Standard Cash Sale PDF/HTML Template (SuiteTax)	377
Standard Return Authorization PDF/HTML Template (SuiteTax)	391
Standard Credit Memo PDF/HTML Template (SuiteTax)	401
Standard Packing Slip PDF/HTML Template	412
Standard Journal Entry PDF/HTML Template	425
Standard Period End Journal PDF/HTML Template	434
Scriptable Templates	442
HTML and FreeMarker for Scriptable Templates	442
FreeMarker Data Model	443
FreeMarker Syntax	444
Inserting Subtemplates into Templates	445
Creating Scriptable Templates	446
Synthetic Fields for Scriptable Templates	446
Personal and Company Preferences in Scriptable Templates	447
Customer Record Synthetic Fields	447
Subsidiary Record Synthetic Fields	448
Sales Rep Fields	448
Subscription Category Fields	449
Subscription Center Synthetic Fields	449
Support Case Notification Synthetic Fields	449
Issue Notification Synthetic Fields	449
Online Form Notification Synthetic Fields	450
Campaign and Sales Campaign Email Template Synthetic Fields	450
User Fields	450
Case Record Fields	451
Web Site Notification Fields	451
Web Site Record Fields	451
Sales Order Record Fields	452
Cash Sale Record Fields	452
Item Fulfillment Record Fields	453
Sample Scriptable Templates	453
Converting CRMSDK Templates to Scriptable Templates	456
Basic Printing Layouts	457
Customizing Transaction Form PDF Layouts	458
Defining Custom Elements	461
Configuring Borders and Placement	462
Formatting Label Text	463
Formatting Data Text	463
Using a Standard #10 Window Envelope With Transactions	464
Transaction Form HTML Layouts	465
Totals Transaction Form Layouts	467

Advanced PDF/HTML Templates

Advanced PDF/HTML Templates let administrators and users with the Advanced PDF/HTML Templates permission create and control the printed and emailed versions of NetSuite transactions with more flexibility than basic layouts. You can produce either PDF or HTML output and apply templates per custom form and print type.

Advanced templates support all transaction and print types that basic layouts support, including internationalized versions. To see a list of all available templates, see [Reviewing Available Advanced Templates](#).

You must enable the Advanced PDF/HTML feature before use. For more information about how to enable the feature and what third-party products are used in advanced printing, see [Enabling the Advanced PDF/HTML Templates Feature](#).

After enabling the feature, go to Customization > Forms > Advanced PDF/HTML Templates to view, edit, or create templates.

With Advanced PDF/HTML Templates you can do the following:

- Link templates to custom transaction forms so the selected advanced template is used to format printed and email versions of transactions. See [Setting Custom Forms to Use Advanced Templates](#).
- Use advanced templates to produce either PDF or HTML output, depending on the settings of your print and email preferences. See [Advanced Templates Support for Company Printing Preferences](#).
- Start from standard templates for each supported print type, then customize your template in the Template Editor using either WYSIWYG or source code editing modes. See [Advanced Templates Customization in the Template Editor](#) and [Source Code Editing to Customize Advanced Templates](#).
- Preview your template and get actionable error messages if the template cannot be saved. See [Previewing Advanced PDF/HTML Templates](#) and [Error Messages in Advanced Templates](#).
- If required, change the script ID of custom templates. See [Changing the Script ID of a Custom Template](#).
- Include your company logo based on the image file defined as the Company Logo (Forms) field at Setup > Company > Setup Tasks > Company Information. See the help topic [Configuring Company Information](#).
- Use SuiteScript to create HTML and PDF printed forms that use advanced template customization capabilities. See [Using Advanced Template Formatting Programmatically](#).
- Manage templates with SuiteCloud Development Framework and copy templates to other accounts. See [Copy to Account](#).

Basic Printing vs. Advanced PDF/HTML Printing



Important: New enhancements are delivered exclusively to advanced printing, and Transaction Form PDF Layouts and Transaction Form HTML Layouts will be removed in a future release. Migrate to advanced templates and associate them with custom forms.

Watch the following video that demonstrates and summarizes the advantages of using advanced PDF/HTML templates instead of basic layouts.



[Comparison of Basic Printing and Advanced Printing](#)

Using Advanced Template Formatting Programmatically



Important: SuiteScript doesn't support direct access to the NetSuite UI through the Document Object Model (DOM). You should access the NetSuite UI only by using SuiteScript APIs. For information about using SuiteScript APIs to customize the UI, see the help topic [SuiteScript 2.x Custom Pages](#).

SuiteScript supports a template engine object and related methods so you can apply advanced template format capabilities programmatically. For SuiteScript 2.0, see the help topic [render.TemplateRenderer](#).

In addition, the SuiteScript functions [render.bom\(options\)](#) [render.packingSlip\(options\)](#) [render.pickingTicket\(options\)](#) [render.statement\(options\)](#) [render.transaction\(options\)](#) support the use of advanced templates. If you associate an advanced template with the custom form saved for a transaction and use this API to print the transaction, the advanced template is used to format the printed transaction.

You can use SuiteScript to apply advanced templates to printed records that aren't transactions. See [Using SuiteScript to Apply Advanced Templates to Non-Transaction Records](#).

Account-Specific Domains in Advanced Printing Templates

You should use URLs that include account-specific domains in PDF templates. Data center-specific URLs found in printing templates are automatically updated to use the appropriate account-specific domain URL for each PDF printout. However, your configuration doesn't change. You should update all URLs in stored templates to use account-specific domains. For example, you should change a **system.eu2.netsuite.com** link in your template link to `<accountID>.app.netsuite.com`, where `<accountID>` is a variable representing your account ID.

Enabling the Advanced PDF/HTML Templates Feature

To access the advanced templates and the template editor, you must enable the Advanced PDF/HTML Templates feature. The feature is enabled by default in most customer accounts.

To make sure that the Advanced PDF/HTML Templates feature is enabled, go to Setup > Company > Enable Features. On the SuiteCloud subtab, under SuiteBuilder, see that the Advanced PDF/HTML Templates box is checked.

Enable Features

Save Cancel

Company Accounting Tax Transactions Items & Inventory Employees CRM Analytics Web Presence SuiteCloud

[View SuiteCloud Terms of Service.](#)

SuiteBuilder

- ☒ **Item Options**
Assign custom transaction item option fields to the line items of your transaction records.
- ☒ **Custom Records**
Collect information specific to your business that can be integrated with standard NetSuite records.
- ☒ **Advanced PDF/HTML Templates**
Enable powerful, template-based rendering of selected transactions.
- ☒ **Remove Personal Information**
Enable PI Removal Tool.

You can enter transaction print settings on the Transactions subtab of the Set Preferences page. For more information, see the help topic [Personal Preferences for Transactions](#).

Third-Party Products Used in Advanced Printing

The following third-party products are used in advanced printing:

Product	Version
FreeMarker	2.3.26
Big Faceless Report Generator (BFO)	1.2.10
TinyMCE	7.5.1

Reviewing Available Advanced Templates

When the Advanced PDF/HTML Templates feature is enabled, an Advanced PDF/HTML Templates option is available in the Customization > Forms menu. You can click this option to view a list of advanced templates in your account.

Note: Only account administrators and other users who have the Advanced PDF/HTML Templates permission can see the Advanced PDF/HTML option in the menu.

The Advanced PDF/HTML Templates permission is a Setup type permission with only one level: Full. For details about permissions, see the help topic [NetSuite Permissions Overview](#).

Advanced templates are available for all printed transactions that support transaction form PDF and HTML layouts, and for expense report transactions. The Advanced PDF/HTML Templates list page includes standard advanced templates and any customized advanced templates that have been created in the account. If a customized template has been installed from a bundle, the list also shows the ID of the bundle.

Advanced PDF/HTML Templates					
Submit New Template					
Print Copy Show Inactives					
Edit	Name	Script ID	Type	Record Type ^	Preferred
Customize	Standard Vendor Bill PDF/HTML Template	STDTMPLSVENDBILL	Bill		☐
Customize	Standard Vendor Credit PDF/HTML Template	STDTMPLSVENDCRED	Bill Credit		☐
Customize	Standard US Vendor Payment PDF/HTML Template	STDTMPLSVENDPYMT	Bill Payment		☐
Customize	Standard UK Vendor Payment PDF/HTML Template	STDTMPLUKVENDPYMT	Bill Payment		☒
Customize	Standard AU Vendor Payment PDF/HTML Template	STDTMPLAUVENDPYMT	Bill Payment		☐
Customize	Standard Payment Voucher PDF/HTML Template	STDTMPLPAYMENTVOUCHER	Bill Payment		☐
Customize	Standard Cash Refund PDF/HTML Template	STDTMPLCASHRFND	Cash Refund		☐
Customize	Standard Cash Sale PDF/HTML Template	STDTMPLCASHSALE	Cash Sale		☐
Customize	Standard UK Check PDF/HTML Template	STDTMPLUKCHECK	Check		☐
Customize	Standard UK Voucher Check PDF/HTML Template	STDTMPLUKVOUCHERCHECK	Check		☐
Customize	Standard Check PDF/HTML Template	STDTMPLCHECK	Check		☐
Customize	Standard Paycheck PDF/HTML Template	STDTMPLPAYCHECK	Check		☐
Customize	Standard AU Voucher Check PDF/HTML Template	STDTMPLAUVOUCHERCHECK	Check		☐
Customize	Standard US Voucher Check PDF/HTML Template	STDTMPLUSVOUCHERCHECK	Check		☐

Advanced templates also support the following additional print types, when their related preferences are enabled:

- If the Print Return Form with Packing Slip preference is enabled, a return form is appended whenever you print a packing slip. The return form is part of the packing slip advanced template. You can use custom packing slip advanced templates to change default formatting for printed return forms.
- If the Print Remittance Form with Invoices & Statements preference is enabled, a remittance form is appended whenever an invoice or statement is printed. The remittance form is part of the invoice advanced template and statement advanced template. You can use custom invoice or statement advanced templates to change default formatting for printed remittance forms.

By default, the standard advanced template is the preferred advanced template for a print type. When you choose the Advanced printing type for a custom form, the preferred advanced template is automatically selected for that form. See [Setting Custom Forms to Use Advanced Templates](#).

Advanced PDF/HTML Multi-Currency Statement Templates

If the Advanced PDF/HTML Templates feature is enabled in your account, a specialized template is available for printing statements for customers that have multiple associated currencies. You can use this Standard Multi-currency Statement Template, or a customized version of it, to ensure that a customer's multiple currencies are accurately displayed in printed statements.

To format a printed statement with this template, on the record for the custom form associated with the statement transaction, select **Advanced** for **Printing Type** and select the multi-currency template in the **Print Template** dropdown list. See [Setting Custom Forms to Use Advanced Templates](#).

If you started using NetSuite before 2014.2, use the Standard Multi-currency Statement Template if both the Multi-Currency Customers and Multiple Currencies features are enabled. Otherwise, use the Standard Statement PDF/HTML Template, or a customized version of it, for your printed statements.

If you started using NetSuite after 2014.2 and have the Multiple Currencies feature enabled, use the Standard Multi-currency Statement Template. To use multiple currencies in a customer's transactions, make sure those currencies are linked to the customer record. For more information, see the help topics [Multiple Currencies](#) and [Customers and Multiple Currencies](#).

If you don't use multiple currencies, use the Standard Statement PDF/HTML Template, or a customized version of it, for your printed statements. For more information, see the help topic [Printing a Statement](#).

Setting Custom Forms to Use Advanced Templates

When the Advanced PDF/HTML Templates feature is enabled, you can set custom forms for supported transaction types to use advanced templates. When you set a custom form to use an advanced template, that template defines the print and email formatting and contents for transactions that use that custom form.

Note: If your organization uses the multiple currency feature and advanced printing statements, the template needs to allow for multiple currencies by using list record instead of record root. The Standard Multiple Currency Statement provides an example of how to set up the template.

For an example of a printed form that uses an advanced template, see [Printed Invoice Using Advanced Template](#).

To define an advanced template for a custom form:

1. Go to Customization > Forms > Transaction Forms.
2. On the Custom Transaction Forms page, click **Edit** for a custom form or **Customize** for a standard form.
3. On the Edit page for the custom form, review the **Printing Type** options.
 - **Basic** to associate basic PDF layouts and HTML layouts with the custom form.
 - **Advanced** to associate advanced templates with the custom form.
4. Choose a print template and an email template from the dropdown lists.
 - The **Print Template** and **Email Template** dropdown lists contain the standard advanced template and any custom advanced templates for the transaction type.
 - You can select one advanced template for printed transactions and a different template for transactions sent by email. These templates are used for both PDF and HTML formatting.
 - The preferred advanced template is selected by default in the dropdown lists.

Custom Transaction Form

Save Cancel Save & Move Elements

Name * Custom Vendor Bill

ID

Type Bill

Print Template Standard Vendor ...F/HTML Template

Email Template Standard Vendor ...F/HTML Template

Email Message Template Default Email Template

☒ Allow Add Multiple

☐ Inactive

☒ Store Form with Record

☒ Form is Preferred

Purchase Order AMS1113-PO Acme Medical Supply Fully Billed

Save Cancel Void Actions

Primary Information

Custom Form *
Standard Purchase Order

Vendor #
Acme Medical Supply

Vendor *
Acme Medical Supply

Purchase Contract
<Type then tab>

Employee
<Type then tab>

Receive By
12.2002

Date *
12.2002

PO #
AMS1113-PO

☒ Firmed

Memo
<Type then tab>

Approval Status
Approved

Summary

Total 300.00

Next Approver
<Type then tab>



Important: At any time after you've set a custom form to use an advanced template, you can switch the form back to using basic layouts. Edit the custom form and select **Basic** for **Printing Type**, and choose from the **PDF Layout** and **HTML Layout** dropdown lists. All previously available basic layouts are still available.

When creating a transaction, you can save the transaction and email it as a PDF attachment by clicking Save & Email. The PDF attachment uses the customer's preferred language.

Printed Invoice Using Advanced Template

The following invoice uses the Standard Invoice PDF/HTML Template:

 WOLFE ELECTRONICS		Wolfe Electronics 1500 3rd St San Mateo, CA 94403	Invoice #1031 May 1, 2013																				
Bill To James A Sample 1234 Any Street Nowhere, ST 94000 USA	Ship To James A Sample 1234 Any Street Nowhere, ST 94000 USA	<table border="1"> <tr> <td> TOTAL \$5,717.50 Due Date: May 31, 2013 </td> </tr> </table>		TOTAL \$5,717.50 Due Date: May 31, 2013																			
TOTAL \$5,717.50 Due Date: May 31, 2013																							
<table border="1"> <thead> <tr> <th>Terms</th> <th>Due Date</th> <th>PO #</th> <th>Sales Rep</th> <th>Ship Via</th> <th>Partner</th> </tr> </thead> <tbody> <tr> <td>30 Days</td> <td>May 31, 2013</td> <td>21521487</td> <td>Clark Koozer</td> <td>FED EX</td> <td>Rockstar Beverages</td> </tr> </tbody> </table>				Terms	Due Date	PO #	Sales Rep	Ship Via	Partner	30 Days	May 31, 2013	21521487	Clark Koozer	FED EX	Rockstar Beverages								
Terms	Due Date	PO #	Sales Rep	Ship Via	Partner																		
30 Days	May 31, 2013	21521487	Clark Koozer	FED EX	Rockstar Beverages																		
<table border="1"> <thead> <tr> <th>Qty</th> <th>Item</th> <th>Options</th> <th>Unit Price</th> <th>Amount</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>Computer Systems: Desktop: Impressivo 1500 Impressivo 1500 (Superion 1.5 GHz processor 640MB RAM, 40GB Hard Drive) w/17" CRT Monitor, Keyboard, Mouse</td> <td></td> <td>\$1,299.00</td> <td>\$3,897.00</td> </tr> <tr> <td>1</td> <td>Computer Systems: Laptop: Inertio 1600 Inertio 1600 (Moblio 1GHz processor, 512 MB RAM, 40GB HD, DVD/CD-R)</td> <td></td> <td>\$1,499.00</td> <td>\$1,499.00</td> </tr> <tr> <td>1</td> <td>Computer Systems: Laptop: Gratio 1800 Gratio 1800 (Moblio 1.3 GHz processor, 512 MB RAM, 40GB HD, DVD/CD-R)</td> <td></td> <td>\$1,699.00</td> <td>\$1,699.00</td> </tr> </tbody> </table>				Qty	Item	Options	Unit Price	Amount	3	Computer Systems: Desktop: Impressivo 1500 Impressivo 1500 (Superion 1.5 GHz processor 640MB RAM, 40GB Hard Drive) w/17" CRT Monitor, Keyboard, Mouse		\$1,299.00	\$3,897.00	1	Computer Systems: Laptop: Inertio 1600 Inertio 1600 (Moblio 1GHz processor, 512 MB RAM, 40GB HD, DVD/CD-R)		\$1,499.00	\$1,499.00	1	Computer Systems: Laptop: Gratio 1800 Gratio 1800 (Moblio 1.3 GHz processor, 512 MB RAM, 40GB HD, DVD/CD-R)		\$1,699.00	\$1,699.00
Qty	Item	Options	Unit Price	Amount																			
3	Computer Systems: Desktop: Impressivo 1500 Impressivo 1500 (Superion 1.5 GHz processor 640MB RAM, 40GB Hard Drive) w/17" CRT Monitor, Keyboard, Mouse		\$1,299.00	\$3,897.00																			
1	Computer Systems: Laptop: Inertio 1600 Inertio 1600 (Moblio 1GHz processor, 512 MB RAM, 40GB HD, DVD/CD-R)		\$1,499.00	\$1,499.00																			
1	Computer Systems: Laptop: Gratio 1800 Gratio 1800 (Moblio 1.3 GHz processor, 512 MB RAM, 40GB HD, DVD/CD-R)		\$1,699.00	\$1,699.00																			
<table border="0"> <tr> <td>Subtotal</td> <td>\$5,396.00</td> </tr> <tr> <td>Tax (5.96%)</td> <td>\$321.50</td> </tr> <tr> <td>Total</td> <td>\$5,717.50</td> </tr> </table>				Subtotal	\$5,396.00	Tax (5.96%)	\$321.50	Total	\$5,717.50														
Subtotal	\$5,396.00																						
Tax (5.96%)	\$321.50																						
Total	\$5,717.50																						

Advanced Templates Customization in the Template Editor

To customize your advanced template, you can use the WYSIWYG template editor provided, or you can enter source code markup. For more information about editing, see [WYSIWYG Editing in the Template Editor](#) and [Source Code Editing in the Template Editor](#).

Note: For some customization options such as adding a bar code or sublist data to your advanced template, you must edit the source code. For more information, see [Source Code Editing to Customize Advanced Templates](#).

NetSuite provides a WYSIWYG template editor that lets you review and edit standard advanced templates to create your own custom templates. In WYSIWYG, you can drag items to move them around on the template.

The template editor supports current industry standards for HTML-based editing, including rich text editing and HTML markup source editing. For more details, see:


- Viewing an Advanced Template in the Template Editor
- Template Setup Window
- Previewing Advanced PDF/HTML Templates
- Saving an Advanced Template
- Error Messages in Advanced Templates
- WYSIWYG Editing in the Template Editor
- Source Code Editing in the Template Editor

Note: The template editor uses FreeMarker-based syntax. For more information, see the [FreeMarker documentation](#).

Viewing an Advanced Template in the Template Editor

To see an advanced template in the template editor, go to Customization > Forms > Advanced PDF/HTML Templates and:

- Click **Customize** for a standard advanced template to review it and create a customized version of it, or
- Click **Edit** for a custom advanced template to review it and make further changes as needed.

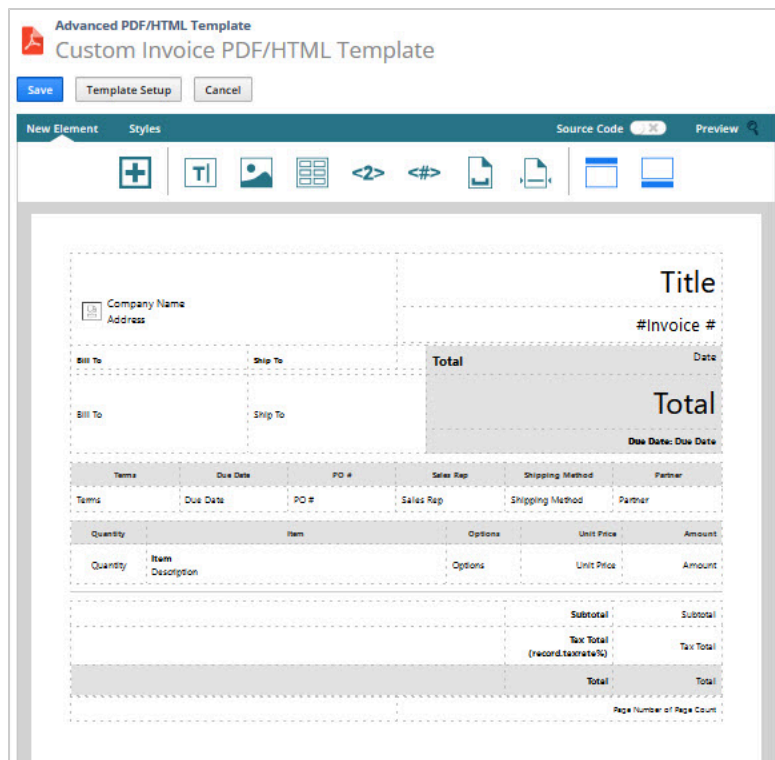

Note: By default, the first custom template you create for a print type is named **Custom PDF/HTML Template**. After that, each new template of the same type adds a sequence number to the name. For example, the standard advanced template for purchase orders is named Standard Purchase PDF/HTML Template. The first custom advanced template for purchase orders has a default name of Custom Purchase PDF/HTML Template, and the next custom advanced templates for purchase orders have default names of Custom Purchase PDF/HTML Template 2 and Custom Purchase PDF/HTML Template 3.

Important: Records are used to populate some values in the template. NetSuite runs all before load scripts to get updates on the records and it triggers all Before Record Load Actions in workflows before it loads the template in the editor. If any before load scripts or workflow actions fail, an error message appears and you can't edit the template until the script or workflow issues are resolved.

The following table shows the records that are accessed by each template type.

Advanced Template Type	Records Accessed
Bill	Bill
Bill Credit	Bill credit
Bill of Materials	Work order
Bill Payment	Vendor payment
Cash Refund	Cash refund
Cash Sale	Cash sale
Check	Various payment types. For the template preview, the Check record is used. For more information, see Standard Check PDF/HTML Template.
Credit Memo	Credit memo
Custom Transaction	Custom transaction
Customer Deposit	Customer deposit
Expense Report	Expense report
Invoice	Invoice
GL Impact	GL Impact
Item Label	No record is loaded in a way that triggers scripts
Journal	Journal entry
Mailing Label	Address (on all entity records)
Packing Slip	Item fulfillment, and based on the original transaction, one of transfer order or sales order
Payment	Customer payment
Picking Ticket	Sales order, transfer order
Price List	Item search per customer
Purchase Order	Purchase order

Advanced Template Type	Records Accessed
Quote	Estimate
Return Authorization	Return authorization
Sales Order	Sales order
Saved Search	Saved search
Shipping Label	No record is loaded in way that triggers scripts
Statement and Multi-Currency Statement	Customer
Work Order	Work order

Template Setup Window

In the advanced template editor, you can click the Template Setup button to display a Template Setup window where you can change:

- Basic template properties, including:
 - Title (name)
 - Description
 - Whether the template is preferred for the transaction type
 - Script ID, which is assigned automatically if you leave this field blank
 - Saved Search Template, which generates a template based on an existing saved search (only available for Saved Search templates)
 - Template inactivation, if required
- Template layout settings, including:
 - Page orientation
 - Page size
 - Margins

The screenshot shows the 'Template Setup' window with two main sections: 'Primary Information' and 'Layout Setup'.

Primary Information:

- TITLE:** Custom Invoice PDF/HTML Template
- SCRIPT ID:** custtempl
- DESCRIPTION:** (Empty text area)
- ☒ TEMPLATE IS PREFERRED
- ☐ INACTIVE

Layout Setup:


- PAGE ORIENTATION:** Portrait
- PAGE SIZE:** Letter
- MARGIN:** TOP: 0.5, RIGHT: 0.5, BOTTOM: 0.5, LEFT: 0.5, UNITS: in

Buttons: Save, Cancel

For information about options for saving templates, see [Saving an Advanced Template](#)

Previewing Advanced PDF/HTML Templates

The editor for advanced PDF/HTML templates lets you preview templates so you can see how template changes affect PDF output as you're editing a template. You can preview the template from both WYSIWYG and markup source editing modes.

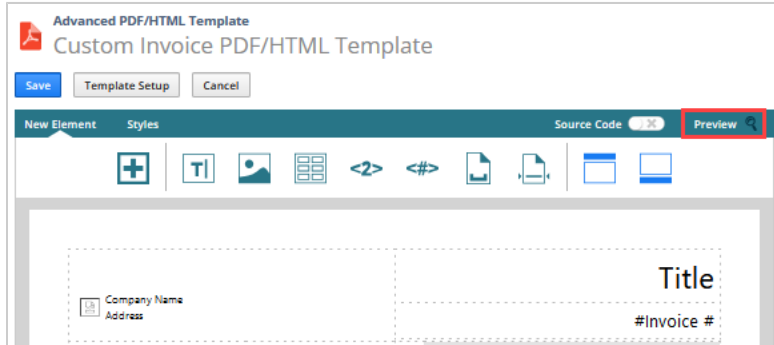

Click the **Preview** button to generate and display a PDF based on the current template definition. The PDF that appears uses sample data that simulates the real values as follows:

- \$9,999.99 represents dollar values.
- 6/22/2015 represents a date value in U.S. date format.
- Lorem ipsum represents text values.

One World 2955 Campus Drive San Mateo CA 94403 US		Invoice #123456789012345 6/22/2015			
Bill To Sweet Dreams, Inc. 1001 Cloud Street San Francisco CA 94112	Ship To Sweet Dreams, Inc. 1001 Cloud Street San Francisco CA 94112	TOTAL \$9,999.99 Due Date: 6/22/2015			
Terms	Due Date	PO #	Sales Rep	Shipping Method	Partner
Net 30	6/22/2015	123456789012345	US Cust	FedEx	US Cust
Quantity	Item	Options	Rate	Amount	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
9,999.99	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$9,999.99	\$9,999.99	
			Subtotal	\$9,999.99	
			Tax (%)	\$9,999.99	

If the template can't be previewed, you'll see an error message.

Saving an Advanced Template


When saving an advanced template, you have the following options:

- **Save** – Saves the template using the existing file name
- **Save As** – Makes a copy of the template
- **Save & Edit** – Saves the template and remains in edit mode

Creating a Copy of an Advanced Template


If you want to use an existing customized advanced template as the basis for a new template, you can use the **Save As** button to save a template under another name.

1. On the Advanced PDF/HTML Template List page, click **Edit** next to the template that you want to copy.
2. The Template editor appears. Click **Template Setup** and name the new template. For more information, see [Template Setup Window](#).
3. Click **Save**.
4. In the template editor, click **Save As** to save the new template.

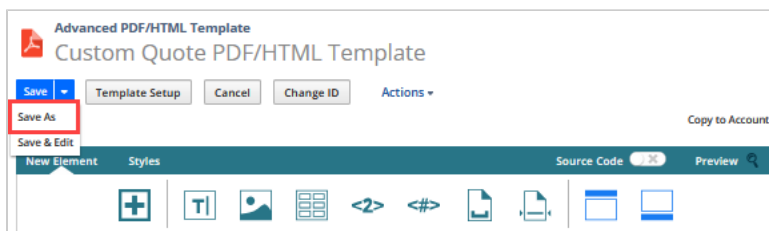

Saving Your Template and Continuing to Make Edits

If you want to save your progress but continue making further edits, click **Save & Edit**. A message will appear to let you know whether your template's been saved successfully.

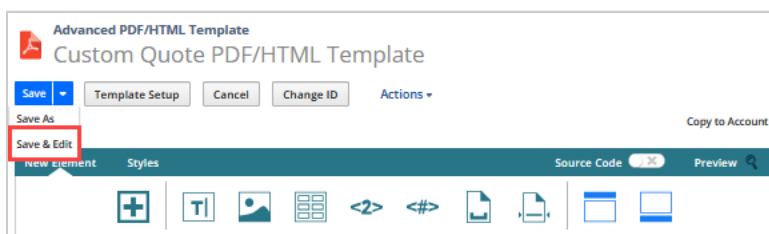

Template Errors When Saving

After clicking Save, Save As, or Save & Edit, if your template contains errors, an error message appears, and you're asked if you want to submit anyway. Choose from the following options:

- To override the error and save the template, click **Save**. The template is saved. Sometimes a template may work in production even if it fails validation.

- To cancel the save and fix the error, click **Cancel**. The template isn't saved, and you go back to edit mode to fix any issues.

Error Messages in Advanced Templates

There are two main reasons you might see error messages when working with advanced templates. You may get an error related to the virtual record generated when saving a template, or you may also see error messages when you preview, save or print a template.

Virtual Record when Saving Template

When a template is saved, the printing process creates a virtual record to make sure that the template can be printed. If your template uses a substring function, the temporary string might not have enough characters for the function to work properly. In this case you may see an error message similar to the following:

```
1 | The template can't be saved due to the following errors: Exception during template merging. java.lang.StringIndexOutOfBoundsException: String index out of range: 9
```

For example, this line works when you're printing the record, but not when you're saving the template, because the temporary string isn't long enough:

```
${item.taxcode?substring(4,9)}
```

To ensure that the template saves correctly, add an if statement to verify the length of the string.

```
1 | <#if (item.taxcode?length > 9)> ${item.taxcode?substring(4,9)}
2 | </#if>
```

Errors when Previewing, Saving or Printing Templates

When you preview or save an advanced template, if the preview can't be shown, or if the template can't be saved, you'll see an error message. The message displays the line and the column where the error occurred.

Also, when a PDF document doesn't print and fails with an error, the error message includes the template name, line, and column where the error occurred. Click **Detail...** to see more information about the error encountered. Administrators can use this information to fix the issue with the template.



Note: For PDF creation, there is a size limitation of 100MB for XML file input. If the file size exceeds 100MB, printing results in an error.


WYSIWYG Editing in the Template Editor

Using the Advanced Template Editor

In WYSIWYG mode, you can click a button on the New Element toolbar to add HTML-based elements such as fields, images, and tables, or printing elements such as text, page numbers, page breaks, horizontal lines, headers, and footers. If you're not sure what element a button represents, you can point to the button to see a tooltip. When you click the Image or Table button, a popup window appears where you can set properties for the new element.



For printing elements, formatting options are available on the Styles toolbar. You can use these options to control the styling, alignment, and position of elements.

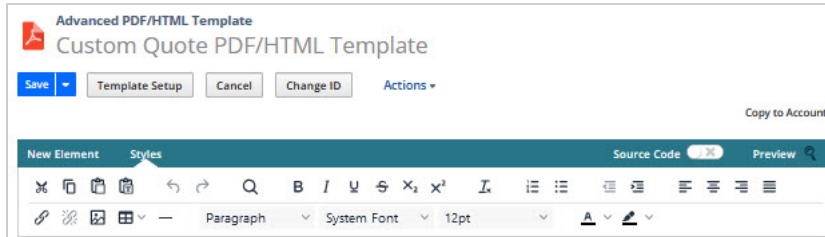

Warning: Advanced PDF/HTML templates don't support absolute positioning of elements. If you require exact positioning, you can use Transaction Layouts instead.

Advanced templates use FreeMarker, a Java library used to generate text outputs based on templates and dynamic data. You use FreeMarker interpolations to include NetSuite data in your template. An **interpolation** is an expression, such as `${record.entity}` which is replaced with the value of the expression in the output. For complete information about FreeMarker, see the [FreeMarker documentation](#).

For details about customizing templates in the WYSIWYG view:

- [Template Editor Toolbar](#)
- [Adding and Removing Fields in Advanced Templates](#)
- [Adding and Formatting Text in Advanced Templates](#)
- [Including Images in Advanced Templates](#)
- [Adding Tables to Advanced Templates](#)

Template Editor Toolbar

The buttons on the New Element tab let you add fields, images, and tables, or printing elements such as text, page numbers, page breaks, horizontal lines, headers, and footers. If you're not sure what element a button represents, you can point to the button to see a tooltip. The following table describes each toolbar button in detail.

Button	Description
	Add a field to the template. For more information, see Adding and Removing Fields in Advanced Templates .
	Add text to the template. For more information, see Adding and Formatting Text in Advanced Templates .
	Add an image to the template. For more information, see Including Images in Advanced Templates .
	Add a table to the template. For more information, see Adding Tables to Advanced Templates .

Button	Description
	Add the page number to the template.
	Add the total number of pages to the template.
	Add a page break to the template. If you want to remove the page breaks, you must switch to Source Code view.
	Add a horizontal line to the template.
	Toggle button to remove or add the template header. Note: If you remove the header from the template and then add it again, the header content is erased.
	Toggle button to remove or add the template footer. Note: If you remove the footer from the template and then add it again, the footer content is erased.

Adding and Removing Fields in Advanced Templates

Adding Fields and Sublists to Advanced PDF/HTML Templates

You can see the fields available to include on an advanced template by reviewing the template in the template editor.

Note: Sublists displayed in the field selector are dimmed and appear for reference only. You can't add sublists to a template from the field selector. Instead, you must edit the markup source to add a sublist. In addition, you can reference fields on a sublist only at the first level. Referencing sublists at the second level isn't supported, with the exception of addresses. For more information about adding sublists to a template, see [Source Code Editing in the Template Editor](#).

You can add and remove fields as needed, and also add currency symbols in front of fields, by following the steps in the following procedures:

- [Adding a Field to an Advanced Template](#)
- [Adding and Removing Currency Symbols in Advanced Template Fields](#)
- [Removing a Field from an Advanced Template](#)


Adding a Field to an Advanced Template

You use the Fields selector to add a field to an advanced template.

To add a field to an advanced template:


1. Go to Customization > Forms > Advanced PDF/HTML Templates and click **Customize** or **Edit** for the advanced template.

2. Place the cursor where you want to add a field in the template editor.
3. On the New Element toolbar, click the **Fields** button to open a selector that lists all fields you can add to your template.

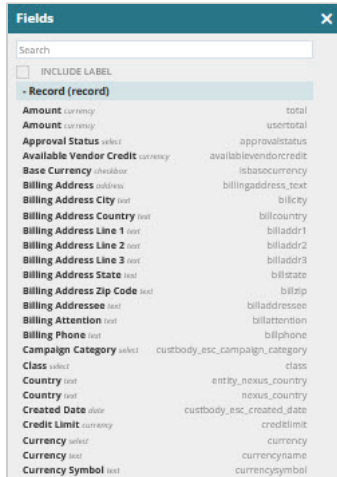

- The **Fields** selector lists all printable fields and sublists you can add, based on the features enabled in your account. For a complete list of fields and sublists, see [Advanced Templates Reference](#).
 - Subrecords aren't supported, with the exception of address records.
 - Fields and sublists are listed alphabetically and grouped by record name, with data type and ID shown. Each record can be collapsed or expanded to show the available fields. To add a sublist to a template, you must edit the markup source. In addition, with the exception of address records, you can reference fields on a sublist only at the first level. Referencing sublists at the second level isn't supported. For more information about adding sublists to a template, see [Source Code Editing in the Template Editor](#).
 - You can use the selector's search to quickly find the field you need. Enter part of the field label in the selector's **Search** field to narrow the list of displayed fields.
4. If you want the field label to be displayed in the template along with the field value, check **Include Label** in the Fields selector.
 5. To add multiple fields, use the mouse to separate the fields.
 6. When you've finished adding fields, click the **Close** button.

The fields are shown on the template. If you point to the label, the FreeMarker identifier for the field appears:



Important: You can also enter FreeMarker syntax to add a field or label to the template instead of using the selector. With the exception of address subrecords (as of 2019.2), the selector doesn't include subrecord fields. You must use FreeMarker syntax to add non—address subrecord fields. For information about this syntax, see [Syntax for Advanced Template Fields](#).


If you have the appropriate permissions, you can use FreeMarker syntax to include address subrecord fields and reference fields or labels in advanced templates.

Adding Address Subrecord Fields to Advanced Templates

Advanced PDF/HTML Templates directly support the address subrecord. For the address subrecord, you can:

- Use the field selector to directly select subrecord address fields, like City and Street, when you customize advanced PDF printing templates.
- Select any custom fields created on the address.
- Use text formatting (font, font size, color) to control the layout and appearance of the address in printed content.
- Base template logic on address fields — for example, you can use template logic to determine output based on city, state, or zip code.
- Use available address fields to translate addresses and print the translated labels of individual address fields.

Address fields available in UI:

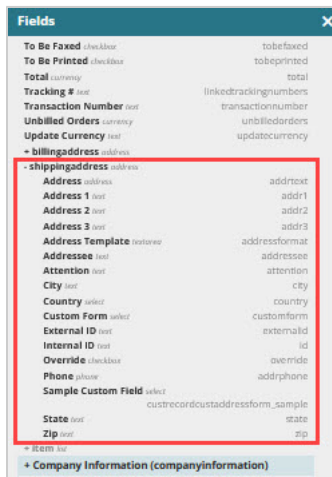

Adding and Removing Currency Symbols in Advanced Template Fields

You can use a FreeMarker expression to add a currency symbol on an advanced template.

To add a currency symbol to an advanced template:

1. In the template editor, place the cursor in front of the field that represents a currency amount.
2. Enter `${record.currencysymbol}` before the field label shown on the template:

`${record.currencysymbol}Total`

You can use the a FreeMarker expression to remove a currency symbol from an advanced template, such as a check.

Use the remove currency format: `${nsformat_number(number|string)}`. For more information, see [FreeMarker Formatting Method](#)

Removing a Field from an Advanced Template

There can be some fields on a template that aren't required by your organization.

To remove a field from an advanced template, select the field and press **Delete**.

For example, if you don't want sales orders to include the company name and address, you could delete `${companyInformation.companyname}` and `${companyInformation.addressText}`. Note that this example also removes the company logo.


Adding and Formatting Text in Advanced Templates

The New Element toolbar of the template editor includes a button that you can click to insert text on advanced PDF/HTML templates. To add text, place the cursor where on the template you want the text, and click the **Text** button.



If the Styles toolbar doesn't appear, select the text that you want to format, and then click **Styles**. The Styles toolbar of the template editor includes rich text editing buttons that you can use for the following text formatting functions:

- Formatting Styles
- Paragraph Formats
- Font Name
- Font Size
- Text Color
- Background Color



The editor also includes buttons for font styles and effects. Hover over any button in the Styles toolbar to see a tooltip.



The template editor includes text editing buttons that you can use for the following text alignment functions on advanced templates:

- Decrease Indent
- Increase Indent
- Align Left
- Center
- Align Right
- Justify



Note: Custom column fields of type free-form text or text area are always left-aligned, no matter what alignment setting you specify here. To change the alignment of a text or text area column field, add `td p { align:left; }` to the template stylesheet.

Adding Tables to Advanced Templates

The New Element toolbar of the template editor includes a button that you can click to insert tables on advanced PDF/HTML templates.

Note: For better performance, you shouldn't use nested tables, that is, tables within tables.

To insert a table on an advanced template:

1. Open the advanced template in the template editor.
2. Place the cursor where you want to insert the table.
3. Click the **Table** button:



4. Complete the Table Properties window and click **OK**.

Table Properties

×

General

Advanced

Cols

1

Rows

1

Width

100%

Height

Cell spacing

Cell padding

Border width

1

Caption

☐ Show caption

Alignment

None

▼

Cancel

Save

The table is added to the template in the template editor.

You can resize the rows, columns, and cells of a table by positioning the cursor over the cell border and dragging it to the required size.

Note: You can also use HTML markup source editing to add a table to an advanced template, but it's more time-consuming and requires knowing HTML.

Important: If you have text overlapping a footer or missing from a printout, ensure that any long content is enclosed in an HTML element that will split across pages.

The Report Generator has specific rules for where page breaks can occur. A `<table>` tag nested inside a `<td>` tag is cut off at the bottom if it spreads across multiple pages. Only the following tags split correctly if they're spread across multiple pages:

```

1 <table>
2 <ul>
3 <p>
```

```

4 <pre>
5 <ol>
6 <h1>
7 <h2>
8 <h3>
9 <h4>
10 <blockquote>

```

Including Images in Advanced Templates

Advanced templates support the inclusion of images in printed and emailed forms. The image can be a file from the internet, or an image file that you've uploaded to the File Cabinet. The preferred method of adding an image is to use a File Cabinet ID. For more information about the File Cabinet, see the help topic [File Cabinet Overview](#).

The New Element toolbar of the template editor includes a button that you can click to insert an image.

To insert an image on an advanced template:

1. Open the advanced template in the Template Editor.
2. Place the cursor where you want to insert the image.
3. To insert an image, click the Image button.



4. In the **Source** field, enter the full path to the image file in the File Cabinet or on the internet. Use **&** for ampersand symbols.

Include fields that dynamically return a URL, for example `${companyInformation.appDomain}`. For more information, see [Syntax for Advanced Template Fields](#).

 A screenshot of the 'Insert/Edit Image' dialog box. The dialog has a title bar with a close button (X). It contains three input fields: 'Source' (with a cursor), 'Alternative description', and 'Width' (with a lock icon). There is also a 'Height' field. At the bottom, there are 'Cancel' and 'Save' buttons.

5. Complete the following, as needed:
 - a. In the **Alternative description** field, enter the description of the image.
 - b. In the **Width** field, enter the size in pixels to use for the image width.
 - c. In the **Height** field, enter the size in pixels to use for the image height.
6. Click **OK**.

The image is added to your template.

Note: You don't need to add a company logo to a template. Each printed form that uses an advanced template automatically includes a company logo, based on the image file defined as the Company Logo (Forms) field at Setup > Company > Company Information. For instructions for defining this image file, see the help topic [Configuring Company Information](#).

Warning: If you reference images online, ensure that the URLs are correct. If any images in your template can't be found, you'll see an error message and won't be able to save the template until the errors are resolved.

Source Code Editing in the Template Editor


You can use the Source Code toggle to manually edit markup source for a template. You can make template edits directly in this markup source if you have sufficient knowledge of HTML.

Warning: Don't modify markup source directly unless you know CSS and HTML. NetSuite doesn't offer support or training in CSS or HTML.

Be aware that the template editor may not function properly if you switch back to WYSIWYG mode after you've made edits in markup source mode. Some template content may not display correctly, may not be accessible for editing, or may not display at all.

If these issues occur, you can preserve template content by not saving the template in WYSIWYG mode and switching back to markup source mode.

Important: To avoid issues when copying and pasting the code, use a plain text editor to check for any hidden characters.

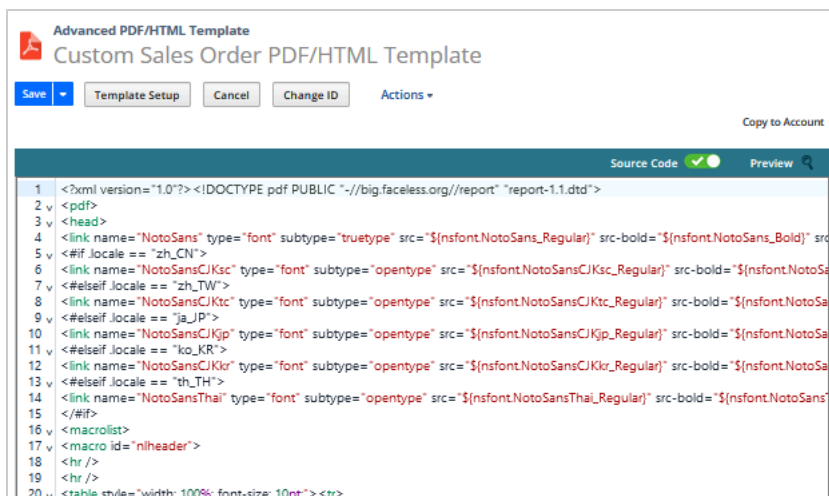

The template editor supports syntax highlighting of markup source, for improved readability.

You can edit the HTML markup source to customize your advanced PDF/HTML template as follows:

- [Source Code Editing to Customize Advanced Templates](#)
- [Syntax for Advanced Template Fields](#)

- [Setting a Template to Use a Font Unavailable in NetSuite](#)
- [Languages for Printed Forms that Use Advanced Templates](#)
- [Adding Translated Content in Advanced Printouts](#)
- [Adding Striping to Line Items in Advanced Templates](#)
- [Adding Page Breaks to Tables](#)
- [Printing Subsidiary Logo on Advanced Templates](#)
- [Adding Apply Sublist to Check Templates](#)
- [Adding Bar Codes in Advanced Templates](#)
- [XML Formatting in Advanced PDF/HTML Templates](#)

Use FreeMarker directives to customize date formatting in the template. For example, using a date format containing MONTH doesn't return the name of the month in uppercase. To display the month in uppercase, use the FreeMarker uppercase directive, for example: `{ $record.duedate?upper_case }`.

In advanced template, some of the markup source syntax relies on BFO (Big Faceless Organization), a set of third party libraries used by NetSuite for generating PDF documents. BFO documentation is available at <http://bfo.com/products/report/docs/userguide.pdf>



Note: If you're having issues with your advanced template, don't contact BFO directly. Always contact NetSuite Customer Support.

Empty BFO elements that are closed are subject to HTML formatting, for example, `</totalpages>` processes as `<totalpages> </totalpages>`.

Some HTML elements can be displayed as literals in printed text. For example, if a field contains the character for a line break, then the line break literal value of "`<br />`" is displayed.



Important: The following aren't supported in advanced templates because of BFO processing:

- Don't use the cellspacing attribute. Instead, use the cellmargin attribute.
- Don't specify a body width in percentage or you'll receive a no size specified error. Use an absolute value, for example, `<body width="595">`.

Source Code Editing to Customize Advanced Templates



Important: When using advanced templates, follow the syntax and usage guidelines in the BFO and FreeMarker documentation. For version details, see [Third-Party Products Used in Advanced Printing](#). For more information, see the [BFO website](#), and [FreeMarker website](#).

An advanced template that's used to print a PDF file is an XML document that uses syntax similar to HTML with FreeMarker and BFO (Big Faceless Organization) report generator elements included. For example:

```
1 | <?xml version="1.0"?> <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd"> <pdf> <head> </head> <body> Hello,
   | World! </body> </pdf>
```

Line 1 of the template must declare the XML version, and Line 2 must specify the DOCTYPE. Line 3 includes the BFO `<pdf>` wrapping tag, not the `<html>` declaration you would see at the top of an HTML document.

Inside the <pdf> tag, the head and body elements contain standard HTML, and you can embed CSS2 elements. You can't use HTML5 declarations. The example displays the text "Hello, World!". For more information about the Big Faceless Report Generator, see  [BFO User Guide](#).

In XML, elements must always be closed. As shown in Line 8, <pdf> must always be matched by </pdf>, by and so on. For elements that have no content, like
, the closing tag is included in the element:
. Any attributes must have quotes around them, for example, <table width="100%">.

If a PDF template is used to print in HTML, the <pdf> tags are automatically converted to <html> when the document is printed.



Important: For issues with NetSuite advanced templates, contact [NetSuite Support](#).

For more detailed information about BFO elements and FreeMarker, see:

- [BFO Elements in Advanced Templates](#)
- [Using FreeMarker to Include NetSuite Data in Advanced Templates](#)
- [BFO and FreeMarker: Differences from HTML 4 Specification](#)

BFO Elements in Advanced Templates

BFO (Big Faceless Organization) is a Java application that converts documents written in XML to PDF. BFO is used in NetSuite.

- For version details, see [Third-Party Products Used in Advanced Printing](#).
- For more detailed information about how to use BFO, see  [BFO User Guide](#).

The following sections describe some commonly-used BFO elements.

Page Numbers

The most-commonly used BFO elements in PDF templates are page number and total pages. The <pagenumber /> and <totalpages /> tags insert the current page number and total number of pages. Because these values are known at the last part of rendering the page, you can't use them as values in FreeMarker declarations.

Headers, Footers and Background Macros

You can use BFO functionality to define macros to repeat pieces of HTML code on every page. You can define each macro in the head part of the template inside the <macrolist> tag. To apply the macro, you reference it in the <body> tag definition. You can't create multiple headers for a template. Also, you must declare a height for header and footer macros or they won't be applied. See the following example.

```

1 <?xml version="1.0"?>
2 <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
3 <pdf> <head> ... <macrolist> <!-- Definition of macros --> <macro id="nlHeader"> <!-- Regular macros --> ... Header Content ... </
macro> <macro id="nlFooter"> ... Footer Content ... </macro> <macro id="nlWatermark"> ... Footer Content ... </macro> <macro id="n
lAltHeader"> <!-- Alternative macros --> ... Header Content ... </macro> <macro id="nlAltFooter"> ... Footer Content ... </
macro> <macro id="nlAltWatermark"> ... Footer Content ... </macro> </macrolist> ... </head> <body header="nlHeader" header-
height="2.5in" footer="nlFooter" footer-height="0.5in" background-macro="nlWatermark"> ... Body Content each page with regular
header, footer and watermark ... <pbr header="nlAltHeader" header-height="2.2in" footer="nlAltFooter" footer-height="0.3in" back
ground-macro="nlAltWatermark" /> ... New page with alternative header, footer and watermark ... ... After that each page with
regular header, footer and watermark ... </body>
4 </pdf>

```



Note: If you're having issues with your advanced template, don't contact BFO directly. Always contact NetSuite Customer Support.

Bar Codes

When using advanced printing templates, you can add any type of bar code or QR code listed in the Barcodes section of the  [BFO User Guide](#). In the template, create a field with a value that can be passed in as the value of that bar code type.

The bar code syntax is shown in the following example.

```
1 | <barcode codetype="qrcode" showtext="false" height="150" width="150" value="http://www.example.com/" />
```

For more information, see [Generating Custom Bar Codes in Advanced Templates](#).

Using FreeMarker to Include NetSuite Data in Advanced Templates

FreeMarker is a Java library that generates text outputs based on templates and dynamic data. FreeMarker is used in NetSuite. For version details, see [Third-Party Products Used in Advanced Printing](#). You use FreeMarker interpolations to include NetSuite data in your template. An **interpolation** is an expression, such as `${record.entity}` that FreeMarker replaces with its value in the output. A few common uses for FreeMarker declarations are provided in the following sections. For complete information about FreeMarker, see the [FreeMarker documentation](#).

Referencing Fields

FreeMarker is commonly used to reference fields on transaction records. To reference a field, use `${record.fieldId}`. In the output, this interpolation is replaced with a text representation of the field's value.

If you want to print the field's label, use `${record.fieldId@label}`. For example, `${record.entity@label}`: `${record.entity}` can produce something on the Sales Order record that looks like Customer: Fabre Art Gallery.

Sublists and Other Lists

Some components in NetSuite can be referenced as lists of objects. The most common example is an item sublist on a transaction, which is represented as a list of lines. You can access values of these lists directly using the index number `${record.list[index]}`. For example, adding `${record.item[1].itemName}` to a sales order returns Green T-Shirt.

More commonly, you can access a list is by using the FreeMarker `#list` declaration, similar to the following.

```
1 | <#list record.item as item>
2 |   ${item_index} ${item.itemName@label} ${item.itemName} --- ${item.amount}
3 | </#list>
```

If the item sublist on the sales order has three lines, the output looks like the following.

0 Name: Blue T-Shirt --- 10.00\$

1 Name: Green T-Shirt --- 12.25\$

2 Name: Yellow T-Shirt --- 11.00\$

When the sublist ID is the same as the field ID, @list is added to the sublist ID. The correct syntax appears in the **Fields** selector automatically. The following example shows the syntax to access a sublist:

```
1 <#list customer.currency@list as customerCurrency>
2   ${customerCurrency.currency} <br/>
3   ${customerCurrency.balance}
4 </#list>
```

To view the sublists that are supported for a record, see the [Advanced Templates Reference](#).

For more information about using FreeMarker expressions in advanced PDF/HTML templates, see [Adding and Removing Currency Symbols in Advanced Template Fields](#). The training video on that page shows how to include field IDs and sublists from NetSuite transaction records in advanced templates.

Additional Information to Include on Templates

You can access additional models on each template. These include companyInformation (Company configuration information), preferences (user preference settings usually stored as Boolean values) and user (user information).

Some templates can have additional models attached, enabling you to access additional data. For example, you can access the customer record on each statement, such as the customer email, \${customer.email}.

You can also use \${record@title} to print out the record title.

BFO and FreeMarker: Differences from HTML 4 Specification

BFO and FreeMarker work differently from the HTML 4 specification, which can affect how your advanced templates are formatted. For more information, see the Element and Attribute Reference for BFO at <http://bfo.com/products/reports/docs/tags/>.

Certain characters behave differently when they're used with BFO. For example, the non-breaking space () character isn't rendered when using advanced templates. Use a line break element (
) instead of the character.

If you're using the character to create spacing in HTML table layouts, use the width and height attributes of the <td> tag instead to specify how BFO formats the <table> tag. For example:

```
1 <table table-layout="fixed" width="200"> <tr><td width="60%">Cell 1</td><td width="40%">Cell 2</td></tr> <tr><td>Cell 3</td><td>Cell 4</td></tr>
2 </table>
```

For more information about tables in BFO, see the BFO TABLE element documentation at <http://bfo.com/products/report/docs/tags/tags/table.html>.

Syntax for Advanced Template Fields

You can include the following field types for a record in an advanced template:

- body fields
- sublist fields
- fields from related records
- record search results fields

The template editor creates an XML document that uses syntax similar to HTML. Note that even though this syntax looks similar to SuiteScript, you can't run SuiteScript APIs in the template editor.

The fastest way to add a field to an advanced template is to select the field in the template editor's **Fields** selector. (See [Adding and Removing Fields in Advanced Templates](#).) If you prefer, you can use FreeMarker syntax to add a field manually instead of using the **Fields** selector.

Subrecords aren't supported in advanced templates, except for the list of inventory details values.

See the following:

- [Entering a Field Manually to an Advanced Template](#)
- [Syntax for Body Fields](#)
- [Syntax for Sublist Fields](#)
- [Syntax for Address Subrecords](#)
- [Syntax for Fields from Joined Records and Searches](#)
- [FreeMarker Formatting Method](#)
- [Updating a Statement Template to Support Multiple Currencies](#)
- [File Cabinet FreeMarker Directive](#)


Entering a Field Manually to an Advanced Template

Some fields can be added to advanced templates but aren't available in the Fields selector, for example, `${record.entity.email}` refers to the Customer record through the entity field so that all body fields in the customer record can be accessed.

The following procedure describes how to add fields to the template manually.

To manually add a field to an advanced template:

1. Obtain the field ID for the field you want to add.
 - To make field IDs available, go to Home > Set Preferences and ensure that the Show Internal IDs box is checked on the General subtab, Defaults area.
 - Find the field in the NetSuite user interface and click the field label to display the field level help text.

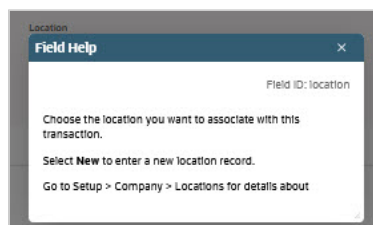

The field ID is displayed in the popup window.

Note: Field ID information is also available in the [Advanced Templates Reference](#).

2. Go to Customization > Forms > Advanced PDF/HTML Templates and click **Customize** or **Edit** for the advanced template.
3. Place the cursor where you want to add the field on the template.
4. Add a text field, and enter the appropriate syntax for the field that you want to add.

The template editor supports a simplified syntax to get values for the fields to be printed. To see if a field is available in an advanced template, see [Advanced Templates Reference](#).

For information about entering the syntax, read [Syntax for Body Fields](#), [Syntax for Sublist Fields](#), and [Syntax for Fields from Joined Records and Searches](#).

Syntax for Body Fields

For most template body fields, the syntax is `${object.fieldId}`, for example, `${record.entity}`.

- Currently, you can use the following objects:
 - `companyInformation` – company information for the current NetSuite account
For example, `${companyInformation.companyname}` is the name associated with the NetSuite account.
Enter `${subsidiary.mainaddress_text}` to include the subsidiary address on a template.
 - `record` – current transaction record
For example `${record.trandate}` is the date of the transaction.
 - `records` – reference multiple data sources, which you typically need to do in label, check and statements templates, for example, `${statement.amountDue}`.
 - `customer` – only available on Statement records, this includes customer-related information about the template. For example, you could include `${customer.subsidiary}`, `${customer.subsidiary.legalname}`, or `${customer.entityId}`.
 - `salesorder` – available on packing slips
 - `preferences` – include settings entered on the Setup > Company > Printing & Fax page.
 - `user` – include settings entered on the user's Set Preferences page. These fields are typically used for emails.
- You can include fields that dynamically return a URL link to NetSuite pages, or to parts of a URL, such as the account ID:

Note: In the following examples, replace the variable `<accountID>` with your account ID.

- `${companyInformation.companyId}` — Your NetSuite account ID.
- `${companyInformation.appDomain}` — Application domain, for example, `<accountID>.app.netsuite.com`.
- `${companyInformation.customerCenterDomain}` — Customer center domain, for example, `<accountID>.app.netsuite.com`.
- `${companyInformation.customerLoginUrl}` — Customer login URL, for example, `https://<accountID>.app.netsuite.com/app/login/secure/privatelogin.nl?<accountID>`
- `${companyInformation.extformsDomain}` — External forms domain, for example, `<accountID>.extforms.netsuite.com`.

Note: To find your account ID, go to Setup > Company > Company Information. The **Account ID** field is at the bottom of the right column. To view the correct format for all your account-specific domains, click the **Company URLs** subtab.

To view Account ID and Company URLs, you must have the Administrator role or the Setup Company permission.

- You can include fields from records related to the current transaction record if they're of type select (not sublists).

Syntax is `${record.related_record.fieldId}`

For example, to include customer field values from related item records in a sales order template, use the syntax: `${record.entity.email}`. You can also refer to custom fields, for example, include a transaction column field on a purchase order template by entering `${record.expense.custcol_cc_oversize}`.

- The syntax for body fields can include an additional component, such as the following:
 - `${object.fieldId@label}` - indicates the label of a field should be printed.
For example, `${record.entity@label}: ${record.entity}` indicates the label for the entity should be printed with the entity, that is, Customer: City Art Gallery. The label is the text that appears next to the field on the transaction form.
 - `${record@title}` - indicates that the name of the transaction record type should be printed, for example, Sales Order for sales order.
This can be used for record objects only. For other objects it'll return a blank string.
- Fields that include a link, such as images or URLs, are enclosed in an HTML element, for example, `<img>` or `<a>`. You have two options for link fields:
 - Use the field to include the HTML markup source. For example, `${record.hyperlink}` returns the following:
`<a href src="http://www.netsuite.com">http://www.netsuite.com</a>`
 - Add `@url` to the field to return the link without the HTML. For example, `${record.hyperlink@url}` returns the following:
`http://www.netsuite.com`

Syntax for Sublist Fields

Sublists are NetSuite components that are referenced as lists of objects. The most common example of a sublist is an item sublist on a transaction, which displays a list of lines. Sublists aren't available in the Fields selector.

The most common way to access a sublist is by using the FreeMarker `#list` declaration. The following example shows an item sublist on the sales order.

```
1 <#list record.item as item>
2   ${item_index} ${item.itemName@label} ${item.itemName} --- ${item.amount}
3 </#list>
```

This declaration prints out a block of HTML code to display the whole list.

```
1 0 Name: Blue T-Shirt --- 10.00$
2 1 Name: Green T-Shirt --- 12.25$
3 2 Name: Yellow T-Shirt --- 11.00$
```

To reference one item in the list, you can use `${record.item[index].itemName}` to obtain only that line in the sublist. Using the preceding example, `${record.item[1].itemName}` returns the line 1 item Green T-Shirt.

The syntax for sublist (line item) fields is similar to body field syntax. Sublist fields are denoted with syntax like:

- `${item.item@label}`
- `${item.id}`
- `${item.item}`
- `${item.quantity}`

When the sublist ID is the same as the field ID, `@list` is added to the sublist ID. The correct syntax appears in the **Fields** selector automatically. The following example shows the syntax to access a sublist:

```
1 <#list customer.currency@list as customerCurrency>
2   ${customerCurrency.currency} <br/>
3   ${customerCurrency.balance}
```

```
4 | </#list>
```

You can reference fields on a sublist at the first level only. Referencing sublists at the second level isn't supported.

For example, only the following is supported.

```
1 | <#list record.item as item> ${item.field_first_level}
2 | </#list>
```

If you use `item.inventorydetail`, you'll get a listing of all bin/serial numbers.

To sort line items in advanced templates, add the `sort_by()` function to the `#list` declaration, for example:

```
<#list record.item?sort_by("quantity") as item>
```

Syntax for Address Subrecords

For address subrecords, use the following syntax in the source code:

- Record name
- Address subrecord name
- Address field name

For example:

- `${subsidiary.mainaddress.addresee}`
- `${subsidiary.mainaddress.addr1}`
- `${subsidiary.mainaddress.addr2}`
- `${subsidiary.mainaddress.city}`
- `${subsidiary.mainaddress.dropdownstate}`
- `${subsidiary.mainaddress.zip}`
- `${subsidiary.mainaddress.country}`
- `${subsidiary.mainaddress.addrphone}`

Syntax for Fields from Joined Records and Searches

You can modify advanced templates in the template editor to include fields from records directly joined to the current transaction.

- Syntax is `${record.related_record.fieldId}`
- To include sales description field values from related item records in a sales order template, use the syntax: `${record.item.salesdescription}`

You also can include search results fields from searches joined directly to the current transaction.

- You can use the index number to indicate the search result row to be referenced to obtain a field value. For example, `[0]` would indicate that the field value from the first row returned in search results should be used.
- Syntax is `${results[search_result_line].related_record.fieldId}`.
For example, to include the first customer phone number from a sales order search, type:
`${results[0].customer.phone}`
- To include a list of search results, use a list directive as shown in the following example.

```
1 | <#list results as salesOrder> <p>${salesOrder.customer.phone}</p>
```

```
2 | </#list>
```

FreeMarker Formatting Method

NetSuite formatting is lost when you customize NetSuite standard fields. If you print hard-coded values which came from a custom data source or were calculated from standard fields, the format won't match the format of standard record fields. When editing the template source code, the `nsformat_*`() formatting method makes it possible to format FreeMarker custom variables in the same way NetSuite formats standard fields. It also decreases the need for hardcoding. The `nsformat_*`() method formats the specific string, number, date, or amount results in the same format used on a standard NetSuite field. With this formatting method, it's possible to apply localization to custom variables, ensuring consistent output.

The following table shows some examples of standard fields in use:

Example	Output
<code>\${record.custbody_show_int}</code>	1,234
<code>\${record.custbody_show_int+1}</code>	1235
<code>\${nsformat_number(record.custbody_show_int+1)}</code>	1,235
<code>\${record.custbody_show_date_time}</code>	Dec 18, 2019 5:05:00 AM

The following table shows some examples of the `${nsformat_*`() formatting method in use:

Method	Example	Output
<code>\${nsformat_date(date string)}</code>	<code>\${nsformat_date("2018-12-04T10:40:00.000")}</code>	12/4/2018
<code>\${nsformat_datetime(date string)}</code>	<code>\${nsformat_datetime("2018-12-04T10:40:00.000Z")}</code>	Dec 4, 2018 2:40:00 AM
	<code>\${nsformat_datetime("2018-12-04T10:40:00.000")}</code>	Dec 4, 2018 10:40:00 AM
	<code>\${nsformat_datetime(itemDateTime)}</code>	Dec 4, 2018 10:40:00 AM
<code>\${nsformat_time(date string)}</code>	<code>\${nsformat_time("2018-12-04T10:40:00.000")}</code>	10:40:00 AM
<code>\${nsformat_currency(number string)}</code> or with optional second string <code>\${nsformat_currency(number string, string)}</code>	<code>\${nsformat_currency(10.20, "EUR")}</code>	€10,20
<code>\${nsformat_rate(boolean string number)}</code> or with optional second string <code>\${nsformat_rate(number string, string)}</code>	<code>\${nsformat_rate(32, "USD")}</code>	\$32.00
<code>\${nsformat_number(number string)}</code> or with optional second locale string <code>\${nsformat_number(number string, string)}</code>	<code>\${nsformat_number("9999999.99")}</code> <code>\${nsformat_number(99999999.99, "cs_CZ")}</code>	999,999,999.99 999 999 999,99
<code>\${nsformat_boolean(boolean string number)}</code>	<code>\${nsformat_boolean("true")}</code>	Yes
<code>\${nsformat_password(string)}</code>	<code>\${nsformat_password("p4sw0rd")}</code>	*****
<code>\${nsformat_percent(number string)}</code>	<code>\${nsformat_percent("100")}</code>	100%
<code>\${nsformat_email(string)}</code>	<code>\${nsformat_email("email@example.com")}</code>	clickable email address

Method	Example	Output
<code>\${nsformat_url(string)}</code>	<code>\${nsformat_url("http://example.com")}</code>	clickable link

Formatters accept numbers in double precision floating point representation.

If the input is an empty string or null value, then the output is also represented as an empty string.

Updating a Statement Template to Support Multiple Currencies

If you have an advanced statement template that must be updated to support multiple currencies, edit your template as follows.

Wrap the existing template in the following tags:

```

1 <pdfset>
2 <#list statements as record> ...original template...
3 </#list>
4 </pdfset>

```

Change any `record.items` references to `record.lines`.

File Cabinet FreeMarker Directive

If you edit templates in the source code, you can use the filecabinet FreeMarker directive to reference files directly from the File Cabinet. By using this directive, you can embed text, images, and fonts that are stored in the File Cabinet into the template.

For example:

```

1 <@filecabinet nstype="image" src="https://<accountID>.app.netsuite.com/core/media/media.nl?id=21&c=4130331&h=f
b3b8b4ac4f67b2c369b"/>

```

When you add an image to a template and check the File Cabinet Item box, the `<@filecabinet/>` directive is used in the source code.

For more information about the File Cabinet, see the help topic [File Cabinet Overview](#).

For more information about including images in advanced templates, see [Including Images in Advanced Templates](#).

Setting a Template to Use a Font Unavailable in NetSuite

If you want to print using a font or language that's not available in NetSuite, you can edit the template to do this.

1. Load the .TTF font file into NetSuite.
2. In the template, declare the font as opentype, not truetype.
3. Refer to the font in the File Cabinet.

```

1 <?xml version="1.0"?><!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
2 <pdf>
3 <head>
4   <link name="thai-font" type="font" subtype="opentype" src="https://<accountID>.app.netsuite.com/core/media/media.nl?
id=5967216&c=3809789&h=8609ede0aef4cbfad71d&_xt=.ttf" src-bold="https://<accountID>.app.netsuite.com/core/media/
media.nl?id=5967216&c=3809789&h=8609ede0aef4cbfad71d&_xt=.ttf" bytes="2" />
5
6   <style type="text/css">
7     * {
8       font-family: thai-font, sans-serif;

```

```

9      font-size: 9pt;
10     table-layout: fixed;
11   }
12   th {
13     font-weight: bold;
14     font-size: 8pt;
15     vertical-align: middle;
16     padding: 5px 6px 3px;
17     background-color: #e3e3e3;
18     color: #333333;
19   }
20   td {
21     padding: 4px 6px;
22   }
23 </style>
24 </head>
25 <body>
26   This&#3585;example&#3586;has&#3587;words&#3588;separated&#3589;by&#3590;Thai&#3591;characters.
27 </body>
28 </pdf>

```

Adding Files to Advanced PDF Templates

In NetSuite, you can add files, such as spreadsheets, images, or other types of documents to your PDF templates to provide additional information to your customers. You can also add XML files that contain structured, machine-readable data, so your customers can use accounting software of their choice to extract and process invoice details efficiently.

This article provides a step-by-step guide on how to add an attachment to your advanced PDF template.

To add an attachment to your advanced template:

1. Add a file to the File Cabinet.
 1. Go to Documents > Files > File Cabinet and open the folder where you want to upload the file.
 2. In the top-left corner, click **Add File** and select the file you want to upload.
 3. Click **Open** to upload the file.
 4. Click **Edit** next to the uploaded file.
 5. Check the **Available Without Login** setting to ensure the file is accessible.
 6. Copy the URL of the file.
 7. Click **Save** to save the changes.
2. Edit your advanced PDF template.

In this example, an XML file is added to your template.

1. Go to **Customization > Forms > Advanced PDF/HTML Template**.
2. Click **Customize** or **Edit** next to the template you want to update.
3. In the top-right corner, switch to **Source Code** mode.
4. Add the following line of code to your chosen location.

```

1 <link type="attachment/data" name="example.xml" subtype="application/xml" src="https://system.netsuite.com/core/
  media/media.nl?id=2.xml"/>

```

5. Make the following updates:
 - Replace the value of src with the URL you copied in Step 1f.
 - Replace any & characters in the link with &.

- Update the name value with the name of your file (for example, data.xls).



Tip: Instead of using a link from the File Cabinet, you can also add a reference to a field that contains the path to your file, for example:

```
<link type="attachment/data" name="data2_document_field.xml" subtype="application/xml"
src="{record.custbody4@url}"/>
```

Languages for Printed Forms that Use Advanced Templates

Custom forms that use advanced templates are printed in the locale of the current user, set in the Language field at Home > Set Preferences. Based on the locale, the font family is set.

When printing a template, only one locale can be selected. The locale is selected according to the following priority list:

1. Customer



Note: When you print a transaction associated with a customer whose Customer Center is set to a language other than the language of their contact, the transaction is printed in the language of the Customer Center.

2. Subsidiary
3. Company



Tip: If your template isn't printed in the language you need, check the language on records that are higher on the priority list.

You also can print these forms in the locale of the customer associated with a transaction, for transaction types that support this option at Transactions > Management > Print Checks and Forms.

ISO standards are followed for the country and culture code for each language (ISO 639 and ISO 3166 respectively).

When printing a template, only one locale can be selected. However, it's possible to combine languages and alphabets within one template if all of the required fonts are linked to the template and the lang attribute is set correctly.

Language Support Available in Advanced Templates

Advanced PDF/HTML Templates use Google Noto fonts. You can create PDF printouts in over 500 languages, including all languages supported for the NetSuite application. The list of supported languages includes the following.

Font Name	Language Code	Language
NotoSans_Bold	—	580+ languages supported For more information, see https://www.google.com/get/noto/
NotoSans_BoldItalic		
NotoSans_Italic		
NotoSans_Regular		
NotoSerif_Bold	—	580+ languages supported For more information, see https://www.google.com/get/noto/
NotoSerif_BoldItalic		
NotoSerif_Italic		

Font Name	Language Code	Language
NotoSerif-Regular		
NotoSansCJKsc_Bold NotoSansCJKsc-Regular	zh_CN	Chinese (Simplified)
NotoSansCJKtc_Bold NotoSansCJKtc-Regular	zh_TW	Chinese (Traditional)
NotoSansCJKjp_Bold NotoSansCJKjp-Regular	ja_JP	Japanese
NotoSansCJKkr_Bold NotoSansCJKkr-Regular	ko_KR	Korean
NotoSansThai_Bold NotoSansThai-Regular	th_TH	Thai
NotoSansArabic_Bold NotoSansArabic-Regular	—	Arabic - 60+ languages supported https://www.google.com/get/noto/
NotoSansHebrew_Bold NotoSansHebrew-Regular	he_IL	Hebrew
NotoSansArmenian_Bold NotoSansArmenian-Regular	hy_AM	Armenian
NotoSansBengali_Bold NotoSansBengali-Regular	bn_DB	Bengali
NotoSansGujarati_Bold NotoSansGujarati-Regular	gu_IN	Gujarati
NotoSansDevanagari_Bold NotoSansDevanagari-Regular	hi_IN	Hindi
NotoSansDevanagari_Bold NotoSansDevanagari-Regular	mr_IN	Marathi
NotoSansKannada_Bold NotoSansKannada-Regular	kn_IN	Kannada
NotoSansTamil_Bold NotoSansTamil-Regular	ta_IN	Tamil
NotoSansTelugu_Bold NotoSansTelugu-Regular	te_IN	Telugu

For a complete list of supported languages, see the [Google website](https://www.google.com/get/noto/).

Templates that use the Noto fonts have the following code in the <head> section.

```
1 <link name="NotoSans" type="font" subtype="truetype" src="{nsfont.NotoSans-Regular}" src-bold="{nsfont.NotoSans-Bold}" src-italic="{nsfont.NotoSans-Italic}" src-bolditalic="{nsfont.NotoSans-BoldItalic}" bytes="2" />
```



```

2 <#if .locale == "zh_CN"> <link name="NotoSansCJKsc" type="font" subtype="opentype" src="{nsfont.NotoSansCJKsc-Regular}" src-
bold="{nsfont.NotoSansCJKsc-Bold}" bytes="2" />
3 <#elseif .locale == "zh_TW"> <link name="NotoSansCJKtc" type="font" subtype="opentype" src="{nsfont.NotoSansCJKtc-Regular}" src-
bold="{nsfont.NotoSansCJKtc-Bold}" bytes="2" />
4 <#elseif .locale == "ja_JP"> <link name="NotoSansCJKjp" type="font" subtype="opentype" src="{nsfont.NotoSansCJKjp-Regular}" src-
bold="{nsfont.NotoSansCJKjp-Bold}" bytes="2" />
5 <#elseif .locale == "ko_KR"> <link name="NotoSansCJKkr" type="font" subtype="opentype" src="{nsfont.NotoSansCJKkr-Regular}" src-
bold="{nsfont.NotoSansCJKkr-Bold}" bytes="2" />
6 <#elseif .locale == "th_TH"> <link name="NotoSansThai" type="font" subtype="opentype" src="{nsfont.NotoSansThai-Regular}" src-
bold="{nsfont.NotoSansThai-Bold}" bytes="2" />
7 </#if>

```

The following styles definitions are also included.

```

1 <style type="text/css"> * { <#if .locale == "zh_CN"> font-family: NotoSans, NotoSansCJKsc, sans-serif; <#elseif .locale
== "zh_TW"> font-family: NotoSans, NotoSansCJKtc, sans-serif; <#elseif .locale == "ja_JP"> font-family: NotoSans, NotoSansCJKjp,
sans-serif; <#elseif .locale == "ko_KR"> font-family: NotoSans, NotoSansCJKkr, sans-serif; <#elseif .locale == "th_TH"> font-
family: NotoSans, NotoSansThai, sans-serif; <#else> font-family: NotoSans, sans-serif; </#if> }
2 ...
3 </style>

```

To use the other fonts available in the NotoSans font set, use a line similar to the following as the first line in the <head> section:

```

1 <link name="NotoSansArabic" type="font" subtype="opentype" src="{nsfont.NotoSansArabic-Regular}" src-bold="{nsfont.NotoSansAra-
bic-Bold}" bytes="2" subset="false" />

```

To use this font as the default font for all elements in the XML, edit the <style> definition similar to the following:

```

1 * { font-family: NotoSansArabic, sans-serif; }

```



Note: If you notice issues with font spacing in your custom templates, add the following to the <style> definition for the template.

```

1 td p { align: left;
2 }

```



Note: If you notice missing or corrupted glyphs (usually for ligatures), particularly when using the Arabic locale, add attribute subset="false" to the <link> tag. This embeds the whole font in the PDF file, and results in a slightly larger PDF file size.

Adding Fonts for Languages that Use Symbols

For languages that use symbols, such as Arabic, values in columns (POS, Quality, and so on) of Advanced PDF/HTML email attachments can appear empty, because NetSuite views the symbols as missing fonts, and therefore leaves the fields blank. To fix this, users affected by this must customize standard templates based on language or currency.

If a document is printed as an attachment, then it's printed using the customer's locale and the number format is determined by currency (for example EGP for Egypt). In the example with Arabic, Eastern Arabic symbols are used for digits. Because the email attachment is printed based on locale, you must add the missing font into your template.

- To add font support to the template, you can link the font by including this line in the <head> section:

```
<link name="NotoSansArabic" type="font" subtype="opentype"
src="${nsfont.NotoSansArabic_Regular}" src-bold="${nsfont.NotoSansArabic_Bold}" bytes="2" />
```

- Use the font as the first option in style.

For example, change this line:

```
font-family: NotoSans, sans-serif;
```

Change the line to the following:

```
font-family: NotoSansArabic, NotoSans, sans-serif;
```

Combining Multiple Languages and Alphabets in One Document

When printing a template, only one locale is selected, but you can use other locales in the document if you link the fonts you need.

Steps to achieve such configuration:

1. Load all the fonts you need by using the `<link>` tag.
2. Create CSS selector to pair language and font.
 - Set any CSS properties specific for the particular language.
 - Typically, line-height will differ for some languages like Arabic.
3. Set `lang` attribute on elements where the language is different from the document language. Nested elements inherit value of the `lang` attribute.

```
<?xml version="1.0"?>
<!DOCTYPE pdf SYSTEM "report-1.1.dtd" PUBLIC "-//big.faceless.org//report">
- <pdf>
  - <head>
    <link bytes="2" src-bolditalic="${nsfont.NotoSans_BoldItalic}" src-
      italic="${nsfont.NotoSans_Italic}" src-
      bold="${nsfont.NotoSans_Bold}" src="${nsfont.NotoSans_Regular}"
      subtype="truetype" type="font" name="NotoSans"/>
    <link bytes="2" src-bold="${nsfont.NotoSansCJKkr_Bold}"
      src="${nsfont.NotoSansCJKkr_Regular}" subtype="opentype"
      type="font" name="NotoSansCJKkr"/>
    <link bytes="2" src-bold="${nsfont.NotoSansArabic_Bold}"
      src="${nsfont.NotoSansArabic_Regular}" subtype="opentype"
      type="font" name="NotoSansArabic" subset="false"/>
    <style type="text/css"> * { font-family: NotoSans; } *:lang(ko) { font-
      family: NotoSansCJKkr; line-height: 25px; } *:lang(ar) { font-family:
      NotoSansArabic; line-height: 25px; } </style>
  </head>
  - <body size="Letter" padding="0.5in 0.5in 0.5in 0.5in">
    <!-- This paragraph uses document default locale -->
    <p> Lorem ipsum dolor sit amet, ludus definitionem ad est. Ad pro
      posse reformidans, falli labore offendit qui ea, id ornatus
      persequeris mea. </p>
    <!-- This paragraph uses Korean (South Korea) locale -->
    <p lang="ko"> 청춘 이상을 두기 보내는 방향이었으며. 이것은 위하여. 용기가 말이다.
      반짝이는 찬미를 능히 이상 빼 생생하며. 보라. 삶이 같이 오아이스도 피가 인간의 우리
      두기 희망의 것이다. 넣는 웅대한 그들은 크고 뿐이다. 같이. </p>
    <!-- This paragraph uses Arabic locale -->
    <p lang="ar"> وفي إذ إسرائيل، التغييرات، مدينة للصين يتيق أن قام. آخر ان دفعة سقوطم التخطيط يريطانيا، أخذ.
      </p>
  </body>
</pdf>
```

Adding Translated Content in Advanced Printouts

With the Translation Collection API, you can use FreeMarker code to add translated content in advanced printouts. For example, you could access the Translation Collection to display a localized disclaimer or a

greeting. You can use one printing template that pulls the appropriate translation for all languages from the collection to produce translations in multiple languages. Currently, you can do this only in source code mode.

When working with Translation Collections data, you have the following options:

- `nstranslation.load` - loads strings for specific keys of specific collections for specific locales. The locales parameter is optional; if you don't set it, the current locale from FreeMarker is used.

In the example that follows, strings with the keys **GREETINGS** and **INTERVAL_1_TO_2** load from the **custcollection_testcol** collection for the **cs_CZ** and **en_US** locales. The translation for **cs_CZ** contains "Ahoj" and translation for **en_US** contains "Hello"

```
1 <#assign handle = nstranslation.load({
2   "collections": [{
3     "alias": "myAlias",
4     "collection": "custcollection_testcol",
5     "keys": ["GREETINGS", "INTERVAL_1_TO_2"]},
6   "locales" : [
7     nstranslation.Locale.cs_CZ,
8     nstranslation.Locale.en_US
9   ]
10 } })>
```

Use Default Locale

The first locale specified in load is the default. In the previous example, that is **cs_CZ**. So, if you use the following, the resulting greeting will be Ahoj:

```
1 | ${handle.myAlias.GREETINGS}
```

Get Translation for a Different Locale

To get translation from handle for a different locale than what's in the locale's list, use `nstranslation.selectLocale()`. You can use this if you want to translate into the specified language one time only. For example, if you use the following, the resulting greeting will be Hello:

```
1 | ${nstranslation.selectLocale({"handle": handle, "locale": nstranslation.Locale.en_US}).myAlias.GREETINGS}
```

Translate Multiple Strings to Same Language

When you want to translate multiple strings into the same language, you should store localized handle into a variable, like this:

```
1 | <#assign englishHandle = nstranslation.selectLocale({"handle": handle, "locale": nstranslation.Locale.en_US})>
```

For example, you could then use it as follows to get a greeting of Hello:

```
1 | ${englishHandle.myAlias.GREETINGS}
```

For more information, see the help topic [translation.load\(options\)](#).

- `nstranslation.get` - use the collection to translate a single string to one selected locale one time only. The locale parameter is optional; if you don't set it, the current locale from FreeMarker is used.

For example, to return a greeting of Hello, you can access the string in the collection using:

```
1 | ${nstranslation.get({"collection": "custcollection_testcol", "key":
```

```
2 | "GREETINGS", "locale": nstranslation.Locale.en_US}}}
```

For more information, see the help topic [translation.get\(options\)](#).

Example of String with Language Translation

In the following example, a string gets the expected count of orders within a specified range. From the entry in the Source String field, you can see there are two placeholders ({1} and {2}) for the range of numbers to include in the output. The Key is entered in the ID field, and the string translation in the Czech language is shown in the Translation field.

In this case, the default locale is English (US), but you can choose to print the document in Czech instead.

Source String: Expected count of orders is between {1} and {2}.

Key: EXPECTED_COUNT_OF_ORDERS_BETWEEN_1_2

Language	Translation
Chinese (Simplified)	
Chinese (Traditional)	
Czech	Očekavaný počet objednávek je mezi {1} a {2}.
Danish	

To use this string in the source code of your template, enter a line similar to the following:

```
1 | ${nstranslation.get({"collection": "custcollection_testcol", "key": "EXPECTED_COUNT_OF_ORDERS_BETWEEN_1_2"})({"params": [{"10",
2 | "15"}]})} >
2 | ${englishHandle.myAlias.INTERVAL_1_TO_2({"params": [{"10", "15"}]})}
```

The parameters provided for the placeholders are 10 and 15.

Result:

Expected count of orders is between 10 and 15

For more information, see the help topic [Translation Collections Overview](#).

For more information, see the help topic [N/translation Module](#).

Adding Striping to Line Items in Advanced Templates

You can edit HTML markup source in the template editor to add striping to the line items table in an advanced template.

The syntax for adding striping to the line items tables relies on BFO (Big Faceless Organization), a set of third party libraries used by NetSuite for generating PDF documents. BFO documentation is available at <http://bfo.com/products/report/docs/userguide.pdf>.

Note: If you're having issues with your advanced template, don't contact BFO directly. Always contact NetSuite Customer Support.

Warning: Don't modify markup source directly unless you know CSS and HTML. NetSuite doesn't offer support or training in CSS or HTML.

Be aware that the template editor may not function properly if you switch back to WYSIWYG mode after you've made edits in markup source mode. Some template content may not display correctly, may not be accessible for editing, or may not display at all.

If these issues occur, you can preserve template content by not saving the template in WYSIWYG mode and switching back to markup source mode.

You can look up hex codes in the HTML color picker available in the template editor.

To add striping to a line items table:

1. Open the advanced template in the template editor, and click the **Source Code** toggle.
2. Scroll down to the portion of the HTML markup source relating to the rows in the line items table:

```

        <td>${record.shipmethod}</td>
        <td>${record.partner}</td>
    </tr>
</table>
<#if record.item?has_content>
<table class="itemtable"><!-- start items --><#list record.item as item><#if
item_index==0>
<thead>
    <tr>
        <th align="center" colspan="3">${item.quantity@label}</th>
        <th colspan="12">${item.item@label}</th>
        <th colspan="3">${item.options@label}</th>
        <th align="right" colspan="4">${item.rate@label}</th>
        <th align="right" colspan="4">${item.amount@label}</th>
    </tr>
</thead>
</#if>
    <tr>
        <td align="center" colspan="3" line-height="150%">${item.quantity}</td>
        <td colspan="12"><span class="itemname">${item.item}</span>
        </span><br />${item.description}</td>
        <td colspan="3">${item.options}</td>
        <td align="right" colspan="4">${item.rate}</td>
        <td align="right" colspan="4">${item.amount}</td>
    </tr>
</#list><!-- end items -->
</table>
<hr />
</#if>

```

Note: You should avoid using the <tbody> tag. BFO processing issues can result in an inability to save a template that includes this element.

3. Edit the <tr> tag relating to rows in the line items table, to specify alternating colors for these rows, like the following example:

```
<tr style="background-color: ${{{item_index % 2}==0}?string('#ffffff', '#ccffcc')}};">
```


In this example, even rows use the color represented in hexadecimal by #ffffff and odd rows use the color represented by #ccffcc.

```
<thead>
  <tr>
    <th align="center" colspan="3">${item.quantity@label}</th>
    <th colspan="12">${item.item@label}</th>
    <th colspan="3">${item.options@label}</th>
    <th align="right" colspan="4">${item.rate@label}</th>
    <th align="right" colspan="4">${item.amount@label}</th>
  </tr>
</thead>
</#if>
<tr style="background-color: ${((item index % 2)==0)?string('#ffffff', '#ccffcc')};">
  <td align="center" colspan="3" line-height="150">${item.quantity}</td>
  <td colspan="12"><span class="itemname">${item.item}</span><br />${item.description}</td>
  <td colspan="3">${item.options}</td>
  <td align="right" colspan="4">${item.rate}</td>
  <td align="right" colspan="4">${item.amount}</td>
</tr>
</#list><!-- end items -->
</table>
<hr />
</#if>
```


To get hexadecimal codes for striping colors, you can look up hex codes in the HTML color picker provided in the template editor.

To get hexadecimal codes for striping colors:


1. In rich text editing mode, click the text color or background color button.



2. Click More Colors.



3. In the Select Color window, click a color to see the hex code.

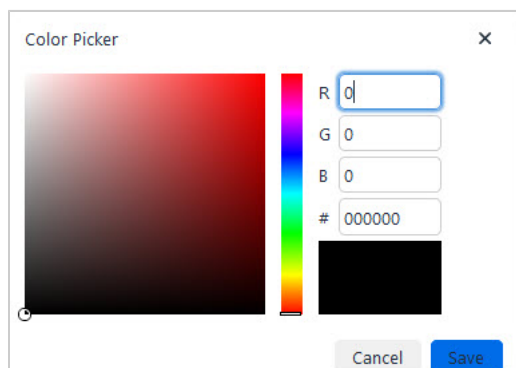

For example, you want your printed purchase orders to include borders and striping.

Edit the template markup source to add the table styles.

```
table.itemtable {
    border: none;
}
table.itemtable th {
    padding-bottom: 10px;
    padding-top: 10px;
}
table.itemtable tr {
    border-bottom: 1px solid gray;
}
table.itemtable tr.striped {
    background-color: #b6b6b6;
}
table.itemtable td {
    padding-top: 2px;
    border-right: 1px dotted gray;
}
table.itemtable td.first {
    padding-top: 2px;
    border-left: 1px dotted gray;
}
```

A purchase order that uses the table styles shown will display striping and dotted borders.

One World
2955 Campus Drive
San Mateo CA 94403
US

Purchase Order

#To Be Generated
4/16/2015

Vendor

Address Dummy
11 Seville Row
London
W1S 3PS

TOTAL

\$9,999.99

Receive By: 4/16/2015

Quantity	Item	Options	Rate	Amount
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00
0,000.00	FedEx Lorem ipsum dolor sit amet consectetur ac orci sociis ornare laoreet.		\$0,000.00	\$0,000.00

Total

\$0,000.00

To Be Generated

1 of 1

Adding Page Breaks to Tables

If text overlaps a footer or is missing from a printout, ensure that any long content is enclosed in an element that will split across pages.

The Report Generator has specific rules for where page breaks can occur. A `<table>` tag nested inside a `<td>` tag is cut off at the bottom if it spreads across multiple pages. Only the following tags split correctly if they're spread across multiple pages:

```
1 <table>
2 <ul>
3 <p>
4 <pre>
5 <ol>
6 <h1>
7 <h2>
8 <h3>
9 <h4>
10 <blockquote>
```

For more information about the tags that support table pagination, see  [Page 17 of the BFO \(Big Faceless Organization\) Guide](#).

The following example shows a typical table layout.

```
1 <!-- start of item table in transaction -->
2 <#list record.item as item>
3   <#if item_index==0> <!-- Header Definition -->
4     <tr>
5       <th>${item.field1@label}</th>
6       <th>${item.long_text_field@label}</th>
7       <th>${item.field2@label}</th>
8       <!-- ... -->
9     </tr>
10  </#if>
11  <tr>
12    <td>${item.field1}</td>
13    <td>${item.long_text_field}</td>
14    <td>${item.field2}</td>
15    <!-- ... -->
16  </tr>
17 </#list>
18 <!-- end of item table in transaction -->
```

If `item.long_text_field` contains more than 2000 text characters, one table line can span the whole page and overflow, and the data can be truncated. If you need to print a long table over more than one page, use code similar to the following.

```
1 <!-- start of item table in transaction -->
2 <#list record.item as item>
3   <#if item_index==0> <!-- Header Definition -->
4     <tr>
5       <th>${item.field1@label}</th>
6       <th>${item.long_text_field@label}</th>
7       <th>${item.field2@label}</th>
8       <!-- ... -->
9     </tr>
10  </#if>
11  <#list item.long_text_field?split("<br />") as paragraph>
12    <#if paragraph_index==0>
13      <tr>
14        <td>${item.field1}</td>
15        <td>${paragraph}</td>
16        <td>${item.field2}</td>
17        <!-- ... -->
```



```

18     </tr>
19     <#else>
20         <tr>
21             <td></td>
22             <td>${paragraph}</td>
23             <td></td>
24             <!-- ... -->
25         </tr>
26     </#if>
27 </#list>
28 </#list>
29 <!-- end of item table in transaction -->

```

You can enter any delimiter that you want. The previous example uses a delimiter of "
".

With the #list statement shown in the example, instead of printing out one table row containing all of the paragraphs, more rows are printed. A split function is applied on long_text_field, so "paragraph1
paragraph2
paragraph3" becomes a list of values "paragraph1", "paragraph2", "paragraph3". To print the list of paragraphs, in the first row, all of the fields and the first paragraph of long_text_field are printed. In each subsequent row, one paragraph of long_text_field is printed and all other cells are left blank.

A table that looked like this before:

Field 1	Long Text Field	Field 2
Value 1	Paragraph 1 Paragraph 2 Paragraph 3	Value 4
—	Paragraph 1 Paragraph 2 Paragraph 3 Paragraph 4	Value 5
Value 3	Paragraph 1	Value 6

Now looks like this:

Field 1	Long Text Field	Field 2
Value 1	Paragraph 1	Value 4
—	Paragraph 2	—
—	Paragraph 3	—
Value 2	Paragraph 1	Value 5
—	Paragraph 2	—
—	Paragraph 3	—
—	Paragraph 4	—
Value 3	Paragraph 1	Value 6

With each paragraph in a separate row, as many rows as possible are fit onto the page, and any rows that don't fit are moved to the next page.

Printing Subsidiary Logo on Advanced Templates

For OneWorld organizations, instead of having the main company logo print on transactions, you may want to print the relevant subsidiary logo. You can do this by creating an advanced template.

Note: This topic applies only to customers that use subsidiaries.

Note: To print your logo on standard forms, the logo must be no more than 200 pixels wide and 60 pixels high. Image resolution may change how your logo appears on a standard form. If your logo doesn't display correctly, change the image resolution.

1. Create an advanced template. Use the `<img src="" />` tag in the template to specify the location of the image.
2. Add the following code to the template:

```

1 <#if subsidiary.logo?length != 0>
2   
3 <#else>
4   <#if companyInformation.logoUrl?length != 0>
5     
6   </#if>
7 </#if>

```

3. Create a form to apply the template created in Step 1.

Adding Apply Sublist to Check Templates

By default, Apply sublist items aren't printed on check templates. However, you can customize the check template as follows to include the Apply sublist.

```

1 <#if check.item?has_content || check.expense?has_content || check.apply?has_content>
2   <table style="position: absolute;overflow: hidden;left: 36pt;top: 90pt;width: 436pt;">
3     <#list check.expense as expense>
4       <tr>
5         <td>${expense.account}</td>
6         <td>${expense.date}</td>
7         <td>${expense.description}</td>
8         <td align="right">${expense.amount}</td>
9       </tr>
10    </#list>
11    <#list check.item as item>
12      <tr>
13        <td>&nbsp;</td>
14        <td>${item.date}</td>
15        <td>${item.item}, ${item.description}</td>
16        <td align="right">${item.amount}</td>
17      </tr>
18    </#list>
19    <#if check.apply?has_content>
20      <#list check.apply as apply>
21        <tr>
22          <td>&nbsp;</td>
23          <td>${apply.applydate}</td>
24          <td>${apply.type} ${apply.refnum}</td>
25          <td align="right">${apply.amount}</td>
26        </tr>
27      </#list>
28    </#if>
29  </table>
30 </#if>

```

Using FreeMarker to Work with Hidden Fields Used in Advanced Templates

Advanced printing templates can fail to print when they depend on a sublist hidden field.

In the following custom transaction form example, the Show box beside the Corporate Card field box isn't checked. Therefore, Corporate Card is hidden from templates.

Label	Show	Description
Ref No.	☒	Ref No.
Date	☒	Date
Category	☒	Category
Expense Account	☒	Expense Account
Quantity	☒	Quantity
Rate	☒	Rate
Foreign Amount	☒	Foreign Amount
Corporate Card	☐	Corporate card
Currency	☒	Currency

When a field is visible (box is checked), it's represented as a Boolean condition in the advanced template, like this:

```
1 | <#if expense.corporatecreditcard == true> "Corporate Card" is checked!
2 | </#if>
```

When a field is hidden, you must instead compare the value of the field with a string: "T"(true) or "F"(false), like this:

```
1 | <#if expense.corporatecreditcard == "T"> "Corporate Card" is checked!
2 | </#if>
```


A template that depends on the Corporate Card hidden field is no longer valid because the type of box changes from Boolean condition to string. You can't compare a Boolean condition to a string.

If you use a string condition like the preceding example and then make the field visible, then this condition isn't valid.

Error Messages


If a template can't be printed because it depends on a sublist hidden field, you receive an error message similar to one of the following:

- In this example from the template editor, the comparison of string with Boolean condition isn't valid:

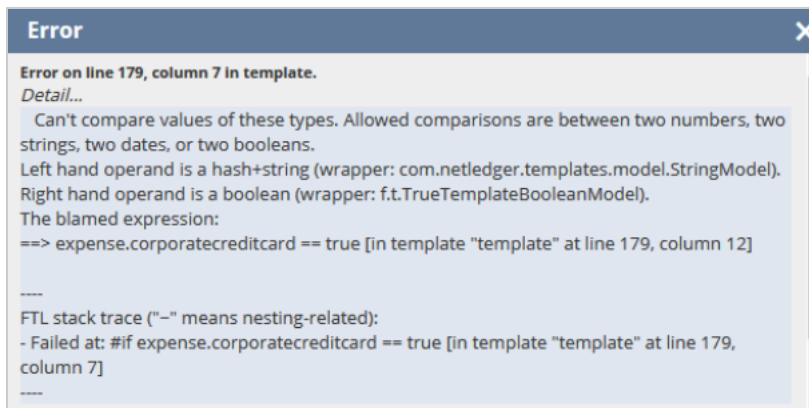


- In the following example, the second condition isn't valid because it can't be evaluated to true or false:

Template Editor Error Message

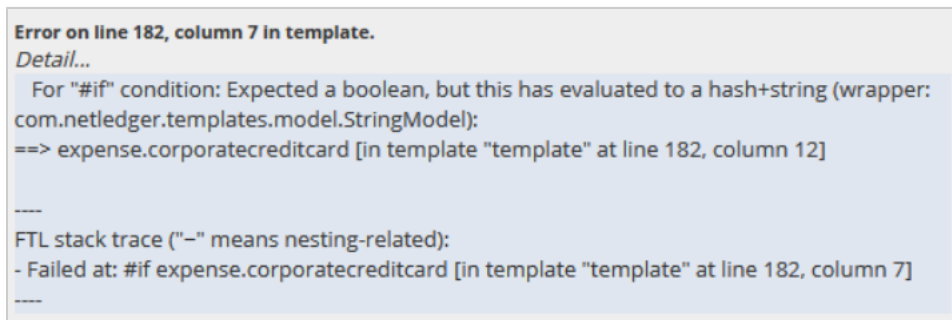

UI Error Message

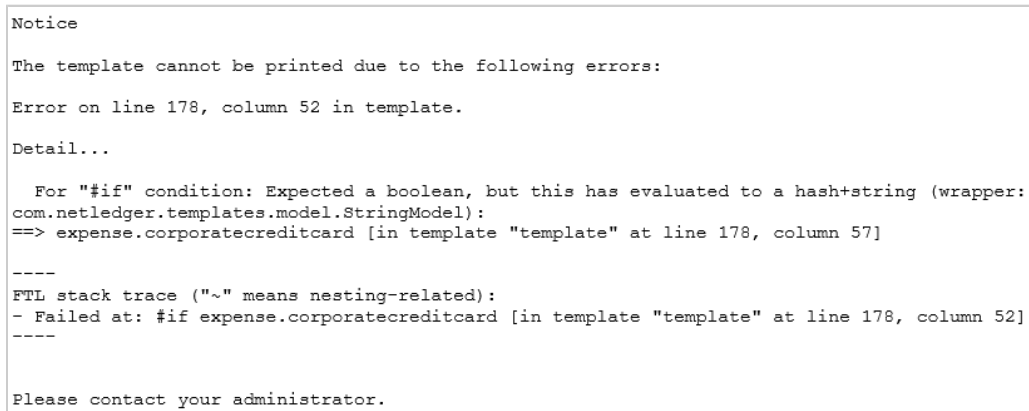

Solution for Unknown Visibility of the Field

You should avoid a scenario where a template depends on a sublist hidden field.

If you don't know whether the field is visible, you should create a condition in which the template behaves correctly in both cases, like in the following example.

```
1 | <#if (expense.corporatecreditcard?is_boolean && expense.corporatecreditcard) || (expense.corporatecreditcard?is_string && expense.corporatecreditcard == "T")> "Corporate Card" is checked!
```

2 | </#if>

Adding Bar Codes in Advanced Templates

Printed transactions based on advanced templates automatically include bar codes, similarly to printed transactions based on basic layouts. You don't have to manually edit the HTML markup source of the associated advanced template.

The following types automatically include a bar code in printed transactions, when the Bar Coding and Item Labels feature is enabled:

- Bill of Materials
- Cash Refund
- Cash Sale
- Credit Memo
- Invoice
- Item Label
- Packing Slip
- Picking Ticket
- Purchase Order
- Quote
- Remittance Form
- Return Form
- Return Authorization
- Sales Order

Most transaction types print the transaction ID along with the bar code. The following example shows a bar code from a printed sales order:



The Item label is an exception. Printed transactions of this type include the UPC, serial number of the item with the bar code, or both.

FreeMarker supports 128 ASCII characters for serial number and bar codes. If your serial numbers contain special characters, an error can occur during template merging.

For information about generating bar codes, see [Generating Custom Bar Codes in Advanced Templates](#).

Generating Custom Bar Codes in Advanced Templates

You can edit the HTML markup source of your advanced template to add a custom bar code or QR code for any custom transaction you need. For example, you can add a custom bar code to a warehouse picking ticket. With a bar code scanner, a warehouse employee can retrieve relevant inventory information needed to complete the order.

In the Advanced Template Editor, edit the HTML markup source and use the BFO tag `<barcode />` to create a custom bar code. For more information about editing the source code, see [Source Code Editing in the Template Editor](#).



Warning: Don't modify markup source directly unless you have sufficient CSS and HTML knowledge. NetSuite doesn't provide support or training in CSS or HTML.

Be aware that the template editor may not function properly if you switch back to WYSIWYG mode after you have made edits in markup source mode. Some template content may not be represented correctly, may not be accessible for editing, or may not be displayed at all.

If these issues occur, you can preserve template content by not saving the template in WYSIWYG mode and switching back to markup source mode.

To add a custom bar code to an advanced template:

1. Open the advanced template in the template editor and click the **Source Code** toggle.
2. Scroll down to the portion of the HTML markup source where you want to create a bar code. Add the following code to the template and specify the codetype, showtext, and value parameters as required.

```
1 | <barcode codetype="qrcode" showtext="false" height="150" width="150" value="http://www.example.com/" />
```





Note: Your custom bar code won't be visible in the Advanced Template Editor. You must generate a report using your template to see the bar code.

Parameter	Type	Required/Optional	Description
codetype	string	required	Choose the bar code algorithm used to generate the bar code. For a list of supported bar code algorithms, see the following table.
showtext	boolean true false	required	If set to true, a readable version of the value is printed below the bar code. If set to false, no readable information is displayed. Note: The following bar code types don't display the printed values below the bar code: aztec, deutchepostmatrix, intelligentmail, maxicode, pdf417, postnet, qrcode, and rm4scc.
value	string	required	Enter the information you want to encode using the bar code algorithm. Use the following table to decide which bar code type matches your needs — each type has its own length and character requirements. For example, you can encode a URL in an aztec , maxicode, or qrcode by setting the value to "http://www.example.com". Alternatively, you can encode a serial number in a upca, postnet , or code25 bar code by setting the value to "0123456789". Note: If value contains characters that the bar code algorithm doesn't support, your template can generate an error. Confirm that the bar code algorithm supports the requirements of the value string.
height	number	optional	Set the height of the bar code in pixels. Some bar code algorithms might ignore this parameter. Note: The height parameter is required for the qrcode.

Parameter	Type	Required/Optional	Description
width	number	optional	Set the width of the bar code in pixels. Some bar code algorithms might ignore this parameter. Note: The width parameter is required for the qrcode.

The following bar code algorithms are supported by advanced templates and the BFO report generator. For more information about each bar code type, see  <http://bfo.com/products/report/docs/userguide.pdf>.

codetype	Type	Supported Characters	Length	Example (with showtext = true)
aztec	2D matrix	- Full ASCII - FNC1 and ESI control codes	12 — 3832	
codabar	Linear	- Numbers 0–9 - Symbols : — . \$ / +	Variable Note: Requires a Start and Stop character Use one of the following characters for the Start and Stop character: A, B, C, D, E, *, N, T	
code25	Linear	Numbers 0–9	Variable	
code25checksum/ code25 deutschenpost	Linear	Numbers 0–9	Variable	
code39	Linear	- Uppercase letters A–Z - Number 0–9 - Symbols — . \$ / + % Space	Variable	
code39checksum	Linear	- Uppercase letters A–Z - Number 0–9 - Symbols — . \$ / + % Space	Variable	
code128	Linear	- Full ASCII - Control Codes	Variable	
databar	Linear	Number 0–9	14 Maximum	

codetype	Type	Supported Characters	Length	Example (with showtext = true)
datamatrix	2D matrix	Full ASCII	2335 Maximum	
deutchepostmatrix	2D matrix	Full ASCII	2335 Maximum	
ean8	Linear	Numbers 0–9	7 + checkdigit	
ean13/upca	Linear	Numbers 0–9	13+ checkdigit	
intelligentmail	2D height	Numbers 0–9	20, 25, 29, or 31 digits	
maxicode	2D matrix	Full ASCII	Maximum 92 ASCII characters	
pdf417	2D stacked	Full ASCII	Maximum 1850 ASCII characters or 2725 numeric characters	
postnet	Linear	Numbers 0–9	5, 9, or 11 + check digits	
qrcode	2D matrix	Full ASCII	Maximum 1520 ASCII characters or 2509 numeric characters	
im4scc	2D height	Uppercase letters A-Z	Variable	

codetype	Type	Supported Characters	Length	Example (with showtext = true)
		■ Number 0–9		

XML Formatting in Advanced PDF/HTML Templates

When working in advanced PDF/HTML templates, such as email, fax, and marketing, it's important that you use valid XML formatting. Invalid formatting can result in broken pages. Code can seem to work when it's opened in a single page, but the same code can cause broken pages when included in other pages, like Activity View.

Some examples of invalid XML include:

- Incorrectly nested tags.
- Missing tags or missing end tags, such as `<table>` and `</table>`.

Format tables using CSS. The `<table>` method is obsolete and often causes errors.

You shouldn't use CSS formatting outside of the `<head>` and `<body>` sections. Any content between `</head>` and `<body>` or after `</body>` is suspicious and can be problematic because malicious JavaScripts are often placed there.

To avoid XML formatting issues, copy the XML code from your editor and paste it in the source code view of the template editor. When you switch the template to WYSIWYG mode or save, NetSuite validates the template code. If the code has errors, you'll see an error message.

For more information about valid formatting, refer to <https://www.w3.org/>.

Scripting with Advanced Templates

This section contains SuiteScript solutions that you can use to supplement your Customization development.

SuiteScript is a JavaScript-based API that lets developers extend NetSuite beyond the capabilities provided through Customization. With SuiteScript, you can use JavaScript code to perform validations and calculations on forms, build custom forms and portlets, schedule bulk processing of records or customize business process workflows. For more information, see the help topic [SuiteScript Overview](#).

- [Using Custom Data Sources for Advanced Printing](#)
- [Using SuiteScript for Transaction Records](#)
- [Using SuiteScript to Apply Advanced Templates to Non-Transaction Records](#)
- [Using SuiteScript 2.x to Combine Multiple Data Sources in One Advanced Template](#)

Using Custom Data Sources for Advanced Printing

You can combine custom data stored outside of NetSuite with data stored in NetSuite to be displayed together in printed forms for NetSuite transactions. This capability is supported by the SuiteScript 2.0 render module, which supports XML and JSON data sources in advanced PDF/HTML templates. For more information about the added method, see the help topic [N/render Module](#). You can use custom data sources in all server scripts.

JSON and XML data is handled as a string, because there's no information about the data type. You can use JavaScript or FreeMarker functions for formatting, if needed. For example, you may want to ensure that dates all use the same format.

To include a custom data source:

1. Customize a standard template and use the source code view to add the new fields.

The sections with fields from the custom data source have to be surrounded by the FreeMarker tags `<#if ALIAS?has_content> </#if>`. The element is required because custom data sources can't be displayed in the template editor. If you preview the template, the external data source isn't shown.

Because FreeMarker supports only XML, JSON data sources have the same restrictions as XML, for example, a property can't start with a digit. The JSON data source is converted to XML for printing.

You must know what information is included in the external data source and use syntax like the following:

```
1 <?xml version="1.0"?>
2 <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
3 <pdf>
4 <body> Custom Data Sources: <#if XML?has_content> ${XML.book.title}<br /> ${XML.book.chapter[1].title} </#if> <br />
   <#if JSON?has_content> ${JSON.book.title}<br /> ${JSON.book.chapter[1].title} </#if> <br /> <#if JSON_STR?has_content>
   ${JSON_STR.book.title} </#if> <br /> <#if XML_STR?has_content> ${XML_STR.book.title} </#if>
5 </body>
6 </pdf>
```

2. Create a SuiteScript 2.0 file that uses the `addCustomDataSource` method in the `renderer` object. Use code like the following:

```
1 renderer.addCustomDataSource({format: renderer.DataSource.XML_DOC, alias: "XML", data: xmlObj});
2 renderer.addCustomDataSource({format: renderer.DataSource.XML_STRING, alias: "XML_STR", data: xmlString});
3 renderer.addCustomDataSource({format: renderer.DataSource.OBJECT, alias: "JSON", data: jsonObj});
4 renderer.addCustomDataSource({format: renderer.DataSource.JSON, alias: "JSON_STR", data: jsonString});
```

The form is processed as follows:

1. The customized template is loaded into the `renderer`.
2. Data from the NetSuite record is loaded.
3. Data from the custom data source is added (XML, JSON, XML_STR, and JSON_STR in the previous example).
4. The form is printed using the `renderer`.

Example 1. Example

For example, you want to print gift certificates for employees that combine name and address information stored in NetSuite with data from an external survey. First, you customize an advanced template in the Template Editor's source code view and add fields from the XML file that contains exported results from the survey. Then you create a SuiteScript file that uses the `render` module to load the customized template, add data from the NetSuite record, add custom data from the XML file, and print the gift certificate forms. Data from the two sources is combined to print personalized certificates for employees.

To view an example with code samples, see [Example of Using Custom Data Sources for Advanced Printing](#).

Example of Using Custom Data Sources for Advanced Printing

When setting up an advanced template, you can use multiple data sources. This example shows how to use a JSON object and an XML file together with NetSuite data from a saved search to create a packing slip for a customer.

The JSON object provides customer names and language preferences.

```
1 { "customers": [ { "firstName": "John", "lastName": "Doe", "language": "English" }, { "firstName": "Anna", "lastName": "Smith", "language": "Spanish" }, { "firstName": "Peter", "lastName": "Jones", "language": "English" } ] }
```

```
2 | }}
```

The XML file provides a holiday greeting in the customer's preferred language.

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <message> <engbody>Happy holidays! We are closed from Dec 22 - Jan 3. Take advantage of our great prices before Christmas!</
engbody> <spbody>¡Feliz Navidad! Estamos cerrados del 22 de diciembre al 3 de enero. Aproveche nuestros excelentes precios antes de
Navidad!</spbody>
3 </message>
```

The advanced PDF/HTML template is edited in markup source view to add the XML file and JSON object.

```
1 <?xml version="1.0"?>
2 <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
3 <pdf>
4 <head>
5 <macrolist>
6   <macro id="nlheader">
7
8     <!-- XML Part -->
9     <#if XML?has_content>
10       <p style="color: blue">
11         <#if .locale?starts_with("es_")>
12           ${XML.message.spbody}
13         <#else>
14           ${XML.message.engbody}
15         </#if>
16       </p>
17     </#if>
18     <!-- End XML Part -->
19
20   <table class="header">
21     <tr>
22       <td rowspan="3">
23         <span class="addressheader">${companyInformation.companyName}</span><br />
24         <span class="addressheader">${companyInformation.addressText}</span></td>
25       <td align="right"><span class="title">${record@title}</span></td>
26     </tr>
27     <tr>
28       <td align="right"><span class="number">#${record.tranid}</span></td>
29     </tr>
30     <tr>
31       <td align="right">${record.trandate}</td>
32     </tr>
33   </table>
34 </macro>
35 </macrolist>
36
37 <style type="text/css">
38   table {
39     font-family: sans-serif;
40     font-size: 9pt;
41     table-layout: fixed;
42   }
43   th {
44     font-weight: bold;
45     font-size: 8pt;
46     vertical-align: middle;
47     padding: 5px 6px 3px;
48     background-color: #e3e3e3;
49   }
50   td {
51     padding: 4px 6px;
52   }
53   td.addressheader {
54     font-size: 8pt;
55     padding-top: 6px;
56     padding-bottom: 2px;
57   }
58   span.number {
59     font-size: 16pt;
```

```

60     }</style>
61 </head>
62
63 <body header="nlheader" header-height="20%" padding="0.5in 0.5in 0.5in 0.5in" size="Letter">
64     <table style="width: 100%; margin-top: 10px;">
65         <tr>
66             <td colspan="3" style="font-size: 8pt; font-weight: bold;">${record.billaddress@label}</td>
67             <td colspan="3" style="font-size: 8pt; font-weight: bold;">${record.shipaddress@label}</td>
68             <td colspan="5" style="font-size: 12pt; background-color: #e3e3e3; font-weight: bold;">${record.total@la
bel?upper_case}</td>
69         </tr>
70         <tr>
71             <td colspan="3" style="padding: 0;">${record.billaddress}</td>
72             <td colspan="3" style="padding: 0;">${record.shipaddress}</td>
73             <td align="right" colspan="5">${record.total}</td>
74         </tr>
75     </table>
76
77     <table style="width: 100%; margin-top: 10px;">
78         <tr>
79             <th>${record.paymentmethod@label}</th>
80             <th>${record.otherrefnum@label}</th>
81             <th>${record.shipmethod@label}</th>
82             <th>${record.shipdate@label}</th>
83         </tr>
84         <tr>
85             <td style="padding-top: 2px;">${record.paymentmethod}</td>
86             <td style="padding-top: 2px;">${record.otherrefnum}</td>
87             <td style="padding-top: 2px;">${record.shipmethod}</td>
88             <td style="padding-top: 2px;">${record.shipdate}</td>
89         </tr>
90     </table>
91
92     <#if record.item?has_content>
93         <table style="width: 100%; margin-top: 10px;">
94
95             <!-- Start Items -->
96             <#list record.item as item>
97                 <#if item_index==0>
98                     <thead>
99                         <tr>
100                             <th align="center" colspan="3">${item.quantity@label}</th>
101                             <th colspan="12">${item.item@label}</th>
102                             <th align="right" colspan="4">${item.rate@label}</th>
103                             <th align="right" colspan="4">${item.amount@label}</th>
104                         </tr>
105                     </thead>
106                 </#if>
107                 <tr>
108                     <td align="center" colspan="3" line-height="150%">${item.quantity}</td>
109                     <td colspan="12">
110                         <span style="font-weight: bold; line-height: 150%;">${item.item}</span>
111                         <br />
112                         ${item.description}
113                     </td>
114                     <td align="right" colspan="4">${item.rate}</td>
115                     <td align="right" colspan="4">${item.amount}</td>
116                 </tr>
117             </#list>
118             <!-- End Items -->
119
120         </table>
121
122         <hr style="width: 100%; color: #d3d3d3; background-color: #d3d3d3; height: 1px;" />
123         </#if>
124
125         <table style="page-break-inside: avoid; width: 100%; margin-top: 10px;">
126             <tr>
127                 <td colspan="4">&nbsp;</td>
128                 <td align="right" style="font-weight: bold;">${record.subtotal@label}</td>
129                 <td align="right">${record.subtotal}</td>
130             </tr>
131             <tr>

```

```

132     <td colspan="4">&nbsp;</td>
133     <td align="right" style="font-weight: bold;">
134         ${record.taxtotal@label}
135         ${record.taxrate}%
136     </td>
137     <td align="right">${record.taxtotal}</td>
138 </tr>
139 <tr style="background-color: #e3e3e3; line-height: 200%;">
140     <td background-color="#ffffff" colspan="4">&nbsp;</td>
141     <td align="right" style="font-weight: bold;">${record.total@label}</td>
142     <td align="right">${record.total}</td>
143 </tr>
144 </table>
145
146 <!-- JSON Part -->
147 <#if JSON?has_content>
148     <p style="color: red;">
149         JSON data:
150     </p>
151     <table style="width: 100%; margin-top: 10px;">
152         <thead>
153             <tr>
154                 <th>First Name</th>
155                 <th>Last Name</th>
156                 <th>Language</th>
157             </tr>
158         </thead>
159         <#list JSON.customers as item>
160             <tr>
161                 <td>${item.firstName}</td>
162                 <td>${item.lastName}</td>
163                 <td>${item.language}</td>
164             </tr>
165         </#list>
166     </table>
167 </#if>
168 <!-- End JSON Part -->
169
170 <!-- Saved Search Part -->
171 <#if SEARCH?has_content>
172     <p style="color: green;">
173         Saved Search results:
174     </p>
175     <table style="width: 100%; margin-top: 10px;">
176         <thead>
177             <tr>
178                 <th>trandate</th>
179                 <th>amount</th>
180                 <th>entity</th>
181             </tr>
182         </thead>
183         <#list SEARCH as item>
184             <tr>
185                 <td>${item.trandate}</td>
186                 <td>${item.amount}</td>
187                 <td>${item.entity}</td>
188             </tr>
189         </#list>
190     </table>
191 </#if>
192 <!-- End Saved Search Part -->
193
194 </body>
195 </pdf>

```

The SuiteScript file incorporates the JSON object and XML file with NetSuite data and the advanced template.

```

1  /**
2  @NApiVersion 2.x */
3  require(['N/render', 'N/file', 'N/record', 'N/search'], function(render, file, record, search) { // load JSON file from file cabinet
    var jsonFile = file.load({ id: #json_content_file_cabinet_id# }); // load XML file from file cabinet var xmlFile = file.load({ id: #xml_content_file_cabi

```

```

net_id# }); // load printing template file from cabinet var templateFile = file.load({ id: #template_content_file_cabinet_id# }); var renderer = render.create();
renderer.templateContent = templateFile.getContents(); // add JSON custom data source renderer.addCustomDataSource({ alias: "JSON", format:
render.DataSource.JSON, data: jsonFile.getContents() }); // add XML custom data source renderer.addCustomDataSource({ alias: "XML", format:
render.DataSource.XML_STRING, data: xmlFile.getContents() }); // add search data source var rs = search.create({ type: search.Type.TRANSACTION,
columns: ['trandate', 'amount', 'entity'], filters: [] }); var results = rs.getRange(0, 1000); renderer.addSearchResults({ templateName: 'SEARCH',
searchResult: results }); // add record data source var objRecord = record.create({ type: record.Type.SALES_ORDER }); renderer.addRecord({ template
Name: 'record', record: objRecord }); // render PDF file and save var invoicePdf = renderer.renderAsPdf(); invoicePdf.folder = #file_cabinet_folder_id#; var id
= invoicePdf.save(); });

```

The output of this example may look like the following.

Happy holidays! We are closed from Dec 22 - Jan 3. Take advantage of our great prices before Christmas!

One World
2955 Campus Drive
San Mateo CA 94403
US

Sales Order
#9303843-948302
12/15/2016

Bill To

Ship To

TOTAL

\$42,385.23

Payment Method	PO #	Shipping Method	Ship Date

Subtotal

Tax (%)

Total \$42,385.23

Json data:

First Name	Last Name	Language
John	Doe	English
Anna	Smith	Spanish
Peter	Jones	English

Saved Search results:

trandate	amount	entity
12/01/2006	\$10,000.00	
12/01/2006	\$10,000.00	
12/01/2006	\$10,000.00	
12/01/2006	\$10,000.00	

Using SuiteScript for Transaction Records

This topic explains how to use SuiteScript 2.x to work with NetSuite transaction records—including choosing the right API, deploying scripts, rendering/printing with advanced PDF/HTML templates, and tips for large-volume printing and printing correct currency symbols.

How SuiteScript APIs Work

The SuiteScript API lets you programmatically extend NetSuite beyond the capabilities offered through Customization. Most SuiteScript APIs pass record, field, sublist, tab, search filter, and search column IDs as arguments.

To determine which script you need, refer to the SuiteScript documentation. To get started with the SuiteScript 2.x API, see the help topic [SuiteScript 2.x API Reference](#).

After you have determined which script you need, perform the following steps to run a script in NetSuite.

1. Create your script.
2. Create a NetSuite Script record for your script. You'll be prompted to load the script file.
3. Create a NetSuite Script Deployment record and specify script runtime options.

For complete details on each step in the process, start with the [SuiteScript 2.x API Introduction](#) topic in the NetSuite Help Center.

SuiteScript 2.x Module and Members for Printing Transaction Records

SuiteScript 2.x supports a render module that you can use you to programmatically print, create PDFs, create forms from templates, and create email messages from templates.

The `render.TemplateRenderer` object member provides a template engine object and related methods so you can use advanced PDF/HTML templates to produce HTML and PDF printed forms. For details, see the help topic [render.TemplateRenderer](#). If you associate an advanced template with the custom form saved for a transaction and use this API to print the transaction, the advanced template is used to format the printed transaction.

In SuiteScript 2.x, you can reference a template by ID. The [N/render Module](#) includes the `TemplateRenderer.setTemplateByScriptId` method that supports referencing a template by its script ID. You can set and review each template's script ID in the Template Setup popup window of the Template Editor.

In addition to the method for referencing templates by script ID, the `TemplateRenderer.setTemplateById` method supports referencing a template by its system-generated internal ID. You may need this method only for specific custom printing solution use cases.

For information about the NetSuite records that support SuiteScript, see the help topic [SuiteScript Supported Records](#).

Advanced Template List for Custom Printing Solutions

When you create a custom field of type List/Record, you'll see Advanced PDF/HTML Templates as an option in the List/Records dropdown list on the custom field setup page at Customization > Lists, Records & Fields > [Custom Field]. This option lets users see a list of all available advanced templates, which you can use if you create a script that allows users to choose a form for printing, as part of a custom printing solution.

For example, if you want to give your users a custom printing solution, you can create a purchase order form and add a custom field of type List/Record with Advanced PDF/HTML Templates specified. Then you use the SuiteScript 2.x [N/render Module](#) to refer to each user's selected advanced template by NetSuite internal ID. Then, you can use a Suitelet to take the user's selection and pass in the internal ID of the template to print the purchase order.

Notes about Advanced Template List

- This option should be used only with a scripted custom printing solution.

- The list of available templates isn't filtered. All advanced PDF/HTML templates are available, including those that aren't for the correct transaction type.
- This field by itself doesn't let users choose the template for printing a form. By default, you set printing preferences for advanced forms by [Setting Custom Forms to Use Advanced Templates](#).

Printing the Correct Currency Symbol

If you're using SuiteScript to render saved search results, verify the following to ensure that the correct currency symbol is used in the advanced PDF/HTML template.

1. Add Currency to the saved search columns.
2. Use code similar to the following in the JavaScript file.

```
1 <#if result.currency == 'Euro'>${result.fxamountremaining?string('#,##0.00')} €
2 <#elseif result.currency == 'USA'>${result.fxamountremaining}
3 </#if>
```

SuiteScript 2.x for Transaction Records

SuiteScript 2.x supports a template engine object and related methods so you can apply advanced template format capabilities programmatically. For details, see the help topics [render.create\(\)](#) and [render.TemplateRenderer](#). For information about the NetSuite records that support SuiteScript, see the help topic [SuiteScript Supported Records](#).

In addition to this function and object, the [N/render Module](#) also supports the use of advanced templates. If you associate an advanced template with the custom form saved for a transaction and use this API to print the transaction, the advanced template is used to format the printed transaction.

You can also use SuiteScript to apply advanced templates to printed records that aren't transactions. For information, see [Using SuiteScript to Apply Advanced Templates to Non-Transaction Records](#).

Printing a Large Volume of Documents

To print hundreds or thousands of documents, you must use the SuiteScript API and follow these steps.

To print a large volume of documents:

1. Create a Saved Search of the documents that you want to print. If you need to print out more than 1000 documents, create multiple searches and batch the results into sets of 1000 rows or fewer.
2. Create the template using the `<pdfset>` tag. The `<pdfset>` tag specifies that everything between the `<pdf>` tags is processed separately, which makes the printing algorithm more efficient.

```
1 <?xml version="1.0"?>
2 <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
3 <pdfset>
4 <#list results as result>
5   <pdf>
6     <head>
7     </head>
8     <body>
9       <h1 align="right">Invoice</h1>
10      <p align="right">#{result.tranid}</p>
11      <p align="right">#{result.trandate}</p>
12      <p>Total: ${result.amount}</p>
13    </body>
14  </pdf>
15 </#list>
16 </pdfset>
```


3. Write the script file, including `nlapISearchRecord` to call the saved search and `nlapICreateTemplateRenderer` to generate the documents.
4. Create a Suitelet, attach the SuiteScript to it, and select the appropriate function to run.

Using SuiteScript to Apply Advanced Templates to Non-Transaction Records

You must use SuiteScript to apply advanced print templates to non-transaction record types. This topic provides an example of how to use an advanced template with the Employee record type. For general information about print templates in SuiteScript 2.x, see the help topic [render.TemplateRenderer](#).

In this example, the goal is to print employee access cards that include name, hire date, and a photo. Before you create a script for this purpose, you need to:

- Use HTML to create a basic print template. Your template code should:
 - Conform to FreeMarker syntax. For more information, see the FreeMarker documentation at <http://freemarker.apache.org/docs/index.html>.
 - Reference BFO (Big Faceless Organization), a set of third party libraries used by NetSuite for generating PDF documents. BFO documentation is available at <http://bfo.com/products/report/docs/userguide.pdf>.
- Understand the data model for the record to determine the fields that you need to include in your template. You can get the IDs of these fields in the NetSuite UI.
 - To make field IDs available, go to Home > Set Preferences and ensure that the **Show Internal IDs** option is enabled on the General subtab, Defaults area.
 - Select an Employee record and for each field that you want to add to the template, click the field label to see the field level help text. You'll find the field ID in the bottom right corner.

Sample Template for Employee Access Card

The following sample template code shows some basic formatting and references three field IDs from the employee record: `entityId`, `hiredate`, and `image`.

```

1  <?xml version="1.0"?>
2  <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
3  <pdf>
4    <head>
5    </head>
6    <body width="2.35in" height="3.75in">
7      </img>
8      <p align="center" style="font-size:24px;font-weight:bold;">${employee.entityId}</p>
9      <p align="center">${employee.hiredate@label}<br />${employee.hiredate}</p>
10   </body>
11 </pdf>

```

Sample SuiteScript for Printing Employee Access Card

When you have your template code, you need to write the SuiteScript script. For SuiteScript 2.x, use the [N/render Module](#) module as shown in the following Suitelet example:

```

1  /** * @NApiVersion 2.x * @NScriptType Suitelet */
2  define(['N/render', 'N/file'],
3  function (render, file) { function generate(context)
4  {
5    var employee = record.load ({ type: record.Type.EMPLOYEE, id: 1074 });
6    var renderer = render.create();
7    var template = '<?xml version="1.0"?>

```

```


8
9 <!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">'
10 + '<pdf>'
11 + '<head>'
12 + '</head>'
13 + '<body width="2.35in" height="3.75in">'
14 + ''
15 + '</img>'
16 + '<p align="center" style="font-size:24px;font-weight:bold;">${employee.entityId}</p>'
17 + '<p align="center">${employee.hiredate@label}<br />${employee.hiredate}</p>'
18 + '</body>'
19 + '</pdf>'
20
21 renderer.templateContent = template; // Raw string of template to be transformed by FreeMarker
22 renderer.addRecord({ // Binds the employee record object to the variable used in the template
23   templateName: 'employee', record: employee });
24 var xml = renderer.renderAsString(); // Returns template content interpreted by FreeMarker as XML string that can be passed to the xmlToPdf
   function.
25 var file = render.xmlToPdf(xml); // Produces PDF output.
26 context.response.write({ output: file.getContents() }); } return { onRequest: generate };
27 });

```

Save your script as a .JS file, upload it to the File Cabinet, and create a script record. The saved script deployment record provides a URL that you can click to see the PDF after the script is run.

Sample Employee Access Card PDF

The following screenshot shows a printed employee access card:

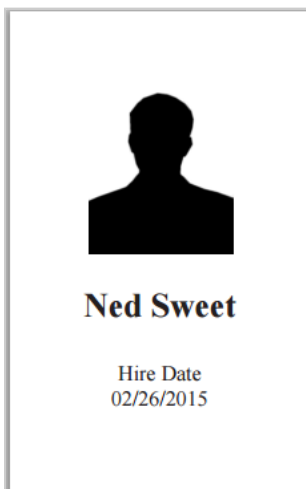

Using SuiteScript 2.x to Combine Multiple Data Sources in One Advanced Template

This example shows how you can combine multiple data sources on one advanced printing template. The example includes inline comments that explain what the script is doing, and provide links to the relevant help topics. You can run this example directly in the Script Debugger.

Example of Using SuiteScript 2.x to Combine Multiple Data Sources in One Advanced Template

- The script includes subsidiaries, so the example works only in a OneWorld account.
- The script references specific record numbers, so these records must already exist in your account.

The [N/render Module](#) example illustrates how to do the following:

- Define and use a template directly from SuiteScript without exposing the template to end users. You're not limited to record-specific templates when using SuiteScript. You can enter strings that contain your template source code and provide them directly to the renderer.
- Work with multiple record instances of different record types.
 - Load them.
 - Add them to the template.
 - Use them from the template.
- Add a custom data source to the template, in this case a JSON object with a collection.
- Include static barcodes and generate barcodes based on record values.

To view the example, copy the following code sample and paste it into the Script Debugger.

After you run the script, go to Documents > Files > SuiteScripts. The script creates a PDF file called pdf-test.pdf.

```

1 // BFO documentation: http://bfo.com/products/report/docs/userguide.pdf
2 // Freemarker docs: https://freemarker.apache.org/docs/ref.html
3 // render module documentation: https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_4412042824.html
4 /**
5  * @NApiVersion 2.x
6  */
7 require(['N/render', 'N/search', 'N/record', 'N/file'],
8   function(render, search, record, file) {
9     function RenderPdfTest() {
10       var invoiceId = 22; // one of the existing invoices
11       var subsidiaryParent = 1;
12       var subsidiaryCz = 6;
13       //get instance of TemplateRenderer - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_4412065265.html
14       var renderer = render.create();
15       //after you call the renderer, you can populate its data model by adding records, searches and custom data sources
16       // .addCustomDataSource() - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_4528541027.html
17       // .addRecord() - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_456543212890.html
18       // .addSearchResults() - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_456249023436.html
19       //
20
21       //add parent company and one child subsidiary
22       renderer.addRecord('subsidiary', record.load({
23         type: record.Type.SUBSIDIARY,
24         id: subsidiaryParent
25       }));
26
27       renderer.addRecord('subsidiarycz', record.load({
28         type: record.Type.SUBSIDIARY,
29         id: subsidiaryCz
30       }));
31
32       //load Invoice and add it to the renderer's data model using name 'record'
33       //(you can pick any name you want)
34       renderer.addRecord('record', record.load({
35         type: record.Type.INVOICE,
36         id: invoiceId
37       }));
38
39       //add custom data source
40       jsonObj = {
41         name: "John",
42         age: 30,
43         city: "Brno",
44         collection: [
45           {txtId: 'ID: 1'},
46           {txtId: 'ID: 2'}
47         ]
48       };
49     }

```

```

50     renderer.addCustomDataSource({
51         format: renderer.DataSource.OBJECT,
52         alias: "myJsonObject",
53         data: jsonObj
54     });
55
56     //here you can add a condition to load a template identified by TEMPLATE_ID
57     //renderer.setTemplateById(TEMPLATE_ID); //ID of advanced invoice pdf template
58
59     //or, you can supply the template source code directly
60     //this way the template isn't exposed to customers (because you can hide bundled SuiteScripts)
61     // - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_n3377764.html
62
63     //
64     //renderer.templateContent accepts any valid template source code string - it doesn't care about where it came from
65
66     // - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_453133789062.html
67     renderer.templateContent =
68         '<?xml version="1.0"?><!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">' +
69         '<pdf>' +
70         '    <head>' +
71         '        <link name="NotoSans" type="font" subtype="truetype" src="{nsfont.NotoSans_Regular}" src-bold="{nsfont.NotoSans_Bold}" src-italic="{nsfont.NotoSans_Italic}" src-bolditalic="{nsfont.NotoSans_BoldItalic}" bytes="2" />' +
72         '    </head>' +
73         '    <body padding="0.5in 0.5in 0.5in 0.5in" size="Letter">' +
74         '        Hello world! <br/>' +
75
76         //subsidiary - for field IDs see Record Browser:
77         //https://<accountID>.app.netsuite.com/help/helpcenter/en_US/srbrowser/Browser2022_1/script/record/subsidiary.html
78         '        ${subsidiary.name@label}: ${subsidiary.name} <br/>' +
79         '        ${subsidiarycz.name@label}: ${subsidiarycz.name} <br/>' +
80
81         //data from invoice - https://<accountID>.app.netsuite.com/help/helpcenter/en_US/srbrowser/Browser2022_1/script/record/invoice.html
82         '        ${record.entity@label}: ${record.entity} <br/>' +
83         '        ${record.location@label}: ${record.location} <br/>' +
84
85         //first item from item sublist of the invoice - (you can iterate through items using Freemarker syntax if needed)
86         '        ${record.item[0].item@label}: ${record.item[0].item} <br/>' +
87
88         //some bar codes - https://<accountID>.app.netsuite.com/app/help/helpcenter.nl?fid=section_N2868543.html
89         '        QR content: ${record.item[0].item@label}: ${record.item[0].item}<br/>' +
90         '        <barcode codetype="qrcode" showtext="false" height="150" width="150" value="{record.item[0].item@label}: ${record.item[0].item}" /><br/>' +
91         '        <barcode codetype="qrcode" showtext="false" height="150" width="150" value="{record.item[0].item@label}: ${record.item[0].item}" /><br/>' +
92         '        Code39 bar content: ${record.tranid} +
93         '        <barcode codetype="code39" showtext="false" height="30" width="150" value="{record.tranid}" /><br/>' +
94
95         //some data from json object
96
97         '        myJsonObject.name: ${myJsonObject.name} <br/>' +
98         '        myJsonObject.age: ${myJsonObject.age} <br/>' +
99         '        myJsonObject.collection[0].txtId: ${myJsonObject.collection[0].txtId} <br/>' +
100
101         '        myJsonObject.collection[1].txtId: ${myJsonObject.collection[1].txtId} <br/>' +
102
103         '    </body>' +
104         '</pdf>';
105
106     // render PDF
107     var newfile = renderer.renderAsPdf();
108     newfile.folder = -15; // ID of folder where file created
109     newfile.name = "pdf-test";
110     var fileId = newfile.save();
111 }
112 RenderPdfTest();
113 }
114 );

```

Changing the Script ID of a Custom Template

You can find the Change ID button on the advanced PDF/HTML templates configuration page for custom templates. To change the script ID of a custom advanced PDF/HTML template, click **Change ID**.

On the Change ID page, enter the new script ID for the template. Script IDs for custom templates start with **custtmpl**.

Click **Save**.

Note: You can't change the script ID of standard templates.

Advanced Templates for Printing Saved Search Results

Advanced PDF/HTML Templates let you print saved search results for any record type. You can set multiple print templates for a single saved search using the same Template Editor that you use to edit transaction templates. To create a template for printing saved search results, first you create and save a saved search.

To create a saved search or saved search template, you must have the permissions and search access for the record types you need. For more information, see the help topic [Permissions for Searches](#).

To create a template for printing saved search results:

1. Choose an option:
 - Go to Lists > Search > Saved Searches, click **Edit** on the saved search you want to create a template for. Click the **New Template** button at the top of the page. A new advanced template appears, and includes all of the results fields from the saved search. To change the template title, click **Template Setup** to open the Template Setup window.
 - Go to Customization > Forms > Advanced PDF/HTML Templates, click the **New Template** button at the top of the page to open the Template Setup window.

The screenshot shows the 'Template Setup' dialog box. It has a title bar with a close button. The 'Primary Information' section contains:

- TITLE:** A text field containing 'Empty PDF/HTML Template 3'.
- SCRIPT ID:** A text field containing 'custtmpl'.
- SAVED SEARCH:** A dropdown menu with a downward arrow.
- INACTIVE:** An unchecked checkbox.
- DESCRIPTION:** A large text area on the right side.

 The 'Layout Setup' section contains:

- PAGE ORIENTATION:** A dropdown menu set to 'Portrait'.
- PAGE SIZE:** A dropdown menu set to 'Letter'.
- MARGIN:** Four input fields for TOP, RIGHT, BOTTOM, and LEFT, each with the value '0.5'. There is also a 'UNITS' dropdown set to 'In'.

 At the bottom are 'Save' and 'Cancel' buttons.

Change the template title and settings as needed. In the **Saved Search** field, select the saved search template and then click **Save**.

The Advanced Template Editor generates a template with the saved search results in a table. All of the fields listed on the Results subtab of the saved search are displayed as table columns. The table columns can become unreadable if the saved search includes more than 10 fields. You can edit the template to remove columns, or edit the saved search to return fewer results.

2. Make changes to the template as needed.

If there is more than one Formula(Currency) field in the saved search, reference the fields by using `${result.formulacurrency}` for the first field, `{result.formulacurrency_1}` for the second field, `${result.formulacurrency_2}` for the third field, and so on.

InternalId isn't available for any field unless you add it as a separate output field on the Results subtab of your saved search.

For more information about formatting the template, see [Advanced Templates Customization in the Template Editor](#).

Sample Templates

When printing saved search results, you may want to print a list, or print one record per page.

To print a list of records, modify your template to look like the following.

```

1 <?xml version="1.0"?><!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd">
2 <pdf>
3 <head>
4 <#if .locale == "ru_RU">
5   <link name="verdana" type="font" subtype="opentype" src="${nsfont.verdana}" src-bold="${nsfont.verdana_bold}" bytes="2" />
6 </#if>
7 </head>
8 <body padding="0.5in 0.5in 0.5in 0.5in" size="Letter">
9   <#list results as result>
10    <p>${result.entityid}<br />${result.contact}<br />${result.phone}<br />${result.email}<br />${result.salesrep}</p>
11  </#list>
12 </body>
13 </pdf>

```

Printing from this templates shows a list of results.

B-Sharp Music
 Tony Jones
 800-555-4681
bsharp@cccatering.com
 Krista Barton

CVM Business Solutions
 Milosz Adamczyk
 650-555-7709
cymbiz@christy.com
 Mark Grogan

Fabre Art Gallery
 Doug Fabre
 831-555-5229
info@fabreart.com
 A Wolfe-admin

Jackson Alexander
 972-555-7041
jalexander@cg2js.com
 A Wolfe-admin

Williams Wireless World
 Derek Williams
 206-555-5200
williamsww@christyscatering.com
 A Wolfe-admin

Yippee Inc.
 Jiang Shihan
 415-555-9115
yippeeinc@2guam52.com
 Clark Koozer


To create a template that prints one record per page, the template code may look like the following.

```

1 <?xml version="1.0"?><!DOCTYPE pdf PUBLIC "-//big.faceless.org//report" "report-1.1.dtd"><pdfset><#list results as result>
2 <pdf>
3 <head>
4 <#if .locale == "ru_RU">
5   <link name="verdana" type="font" subtype="opentype" src="{nsfont.verdana}" src-bold="{nsfont.verdana_bold}" bytes="2" />
6 </#if>
7 </head>
8 <body padding="0.5in 0.5in 0.5in 0.5in" size="Letter">
9   <p>${result.entityid}<br />${result.contact}<br />${result.phone}<br />${result.email}<br />${result.salesrep}</p>
10 </body>
11 </pdf></#list></pdfset>


```

The location of the <#list.> statement results in one page per record.

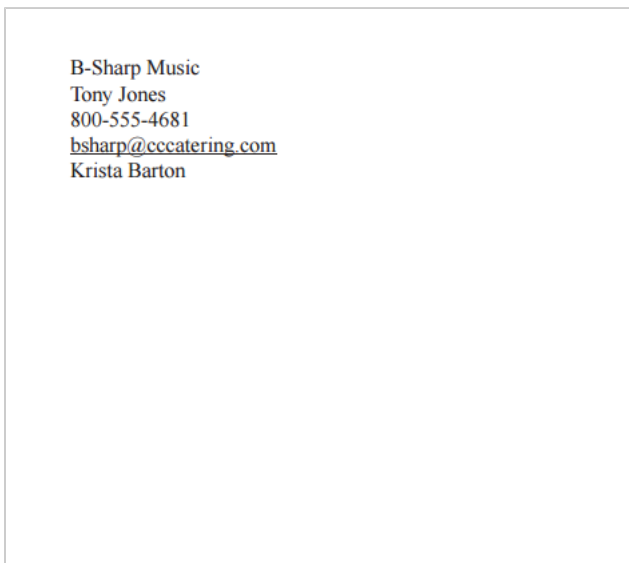

Printing Saved Search Results

When you click the **Print** button on a saved search results page, a popup window appears where you can choose from the list of available templates. You can use this functionality only when the Advanced PDF/HTML Templates feature is enabled and a template is available for printing the saved search results.

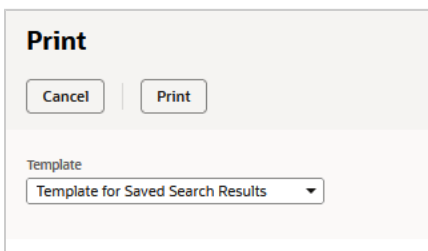

The list shows only the templates that are available for the saved search results. To use browser printing, select Default from the Template dropdown list. Then click **Print**.

Advanced Templates Support for Company Printing Preferences

Advanced templates support company printing preferences, as defined at Setup > Company > Printing & Faxing Preferences, on the **Printing** subtab. The following company printing preferences apply to printed transactions that use advanced templates:

- Customers Default to Print Transactions
- Vendors Default to Print Transactions
- Print Return Form with Packing Slip
- Print Remittance Form with Invoices and Statements
- Print Transaction Forms Landscape
- Print Separate Voucher for Bill Payments

- Print Accounts on Vouchers
- Print Discount and Shipping Lines on Columns
- Use Location Address on Forms
- Check Printing — Default Check Type (Standard or Voucher)

Note that preferences listed in the Messages section of the Printing & Fax Preferences page, such as disclaimers and other message text, don't apply to printed transactions that use advanced templates. You can add custom message text to any advanced template, so you can use different messages instead of one standard message defined on the preferences page.

FAQs for Advanced Printing

- [When I print or preview my PDF, how is it created?.](#)
- [Why do the templates use tables for formatting instead of divs?](#)
- [Can I preview the HTML output for a template like I can for a PDF template?](#)
- [In WYSIWYG mode, can I create multiple headers?](#)
- [How can I refer to fonts and images in the File Cabinet without using the full URL?](#)
- [Why am I getting an 'Invalid PDF layout. Please contact your administrator' when I try to print multiple invoices in PDF format?](#)
- [Why am I getting an 'Invalid PDF Layout. Please contact your administrator' error when I try to print a transaction using Advanced PDF Template?](#)
- [How can I fix my advanced printing template when it relies on a hidden field?](#)
- [Is there a size limitation for XML file input for PDF creation?](#)

When I print or preview my PDF, how is it created?

NetSuite does the following when you preview or print an advanced PDF template, and when you move from WYSIWYG to Source Code mode:

1. Parse FreeMarker.
2. BFO libraries validate XML.
3. Generate PDF based on the BFO XML.

Why do the templates use tables for formatting instead of divs?

For best performance, you shouldn't use nested tables.

Can I preview the HTML output for a template like I can for a PDF template?

No, you can't preview HTML templates. You should use PDF output unless there is a specific use case for HTML.

In WYSIWYG mode, can I create multiple headers?

No, you can't create multiple headers in WYSIWYG mode.

How can I refer to fonts and images in the File Cabinet without using the full URL?

You can add data center agnostic URLs to your template. For a list of fields that you can use to dynamically generate a URL link, or part of a URL, see [Syntax for Body Fields](#).

Ensure that any files that you use from the File Cabinet have either the **Available Without Login** box checked, or **Company-Wide Usage** box checked. Otherwise, you can't use them during printing.

Note: If you check the **Company-Wide Usage** box, you must edit the template source code and use the `<@filecabinet>` directive.

For more information, see [Syntax for Advanced Template Fields](#) and [Including Images in Advanced Templates](#).

Why am I getting an 'Invalid PDF layout. Please contact your administrator' when I try to print multiple invoices in PDF format?

The **Print Using HTML** box is checked in your preferences. To change this, see the following solution:

1. Go to Home > Set Preferences.
2. Click the **Transaction** subtab.
3. Clear the **Print Using HTML** box.
4. Switch the **Transaction Email Attachment Format** radio button from HTML to **PDF**.
5. Click **Save**.

Note: This is one of the possible solutions to the error. If the error is still not resolved, contact NetSuite Customer Support.

Why am I getting an 'Invalid PDF Layout. Please contact your administrator' error when I try to print a transaction using Advanced PDF Template?

The **Print Using HTML** box is checked in your preferences. To change this, see the following solution:

1. Go to Home > Set Preferences.
2. Click the **Transaction** subtab.
3. Clear the **Print Using HTML** box.
4. Switch the **Transaction Email Attachment Format** radio button from HTML to **PDF**.
5. Click **Save**.

How can I fix my advanced printing template when it relies on a hidden field?

A field will be hidden from an advanced printing template if the field's show box is cleared on the custom form. A visible field is represented in the advanced template as a Boolean value. If the field is hidden, you must change the advanced template to compare the value of the field with a string instead.

If you don't know whether the field is visible, it's best to create a condition in which the template works correctly either way.

For example, to create a condition for the Corporate Card field:

```
1 <#if (expense.corporatecreditcard?is_boolean && expense.corporatecreditcard) | | (expense.corporatecreditcard?is_string &&  
  expense.corporatecreditcard == "T")> "Corporate Card" is checked!  
2 </#if>
```

For more information, see [Using FreeMarker to Work with Hidden Fields Used in Advanced Templates](#).

Is there a size limitation for XML file input for PDF creation?

Yes, the size limitation is 100MB. If your file is bigger, printing results in an error. For more information, see [Error Messages in Advanced Templates](#).

Advanced Templates Reference

This reference chapter outlines the fields and sublists that are available in advanced PDF/HTML templates. For more information, see [Advanced PDF/HTML Templates](#).

- [Standard Sales Order PDF/HTML Template](#)
- [Standard Invoice PDF/HTML Template](#)
- [Standard Purchase PDF/HTML Template](#)
- [Standard Quote PDF/HTML Template](#)
- [Standard Cash Refund PDF/HTML Template](#)
- [Standard Cash Sale PDF/HTML Template](#)
- [Standard Return Authorization PDF/HTML Template](#)
- [Standard Picking Ticket PDF/HTML Template](#)
- [Standard Payment Voucher PDF/HTML Template](#)
- [Standard Credit Memo PDF/HTML Template](#)
- [Standard Customer Deposit PDF/HTML Template](#)
- [Standard Check PDF/HTML Template](#)
- [Standard UK Check PDF/HTML Template](#)
- [Standard US Voucher Check PDF/HTML Template](#)
- [Standard UK Voucher Check PDF/HTML Template](#)
- [Standard AU Voucher Check PDF/HTML Template](#)
- [Standard US Vendor Payment PDF/HTML Template](#)
- [Standard UK Vendor Payment PDF/HTML Template](#)
- [Standard AU Vendor Payment PDF/HTML Template](#)
- [Standard Paycheck PDF/HTML Template](#)
- [Standard Bill of Materials PDF/HTML Template](#)
- [Standard Shipping Label PDF/HTML Template](#)
- [Standard Customer Payment PDF/HTML Template](#)
- [Standard Mailing Label PDF/HTML Template](#)
- [Standard Item Label PDF/HTML Template](#)
- [Standard Statement PDF/HTML Template](#)
- [Standard Price List PDF/HTML Template](#)
- [Standard Multi-currency Statement Template](#)
- [Standard Expense Report PDF/HTML Template](#)
- [Standard Sales Order PDF/HTML Template \(SuiteTax\)](#)
- [Standard Invoice PDF/HTML Template \(SuiteTax\)](#)
- [Standard Purchase PDF/HTML Template \(SuiteTax\)](#)
- [Standard Quote PDF/HTML Template \(SuiteTax\)](#)
- [Standard Cash Refund PDF/HTML Template \(SuiteTax\)](#)
- [Standard Cash Sale PDF/HTML Template \(SuiteTax\)](#)
- [Standard Return Authorization PDF/HTML Template \(SuiteTax\)](#)
- [Standard Credit Memo PDF/HTML Template \(SuiteTax\)](#)
- [Standard Packing Slip PDF/HTML Template](#)
- [Standard Journal Entry PDF/HTML Template](#)

■ [Standard Period End Journal PDF/HTML Template](#)

Standard Sales Order PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Sales Order PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Acct. No.	text	accountnumber
Allow Cross-Subsidiary Fulfillment	checkbox	iscrosssubtransaction
Auth. Code	text	authcode
Authorization ID	text	paypalauthid
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip

Name	Type	ID
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Billing Schedule	select	billingschedule
Can have stackable promotions	checkbox	canhavestackable
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Class	select	class
Coupon Code	select	couponcode
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Credit Card Select	select	creditcard
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Code	text	customercode
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Default	text	isdefaultshippingrequest
Default	float	overrideshippingcost
Deferred Revenue Reclassification Account	select	draccount
Department	select	department
Detail	text	cchold
Detail	textarea	ccholddetails
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Enable Item Line Shipping	checkbox	ismultishipto
End Date	date	enddate

Name	Type	ID
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
FOB	text	fob
Foreign Currency Adjustment Revenue Account	select	fxaccount
Generate TranId on Save	checkbox	generatetransidonsave
Get Authorization	checkbox	getauth
Gift Certificate	currency	giftcertapplied
IAVS Match	select	cciaivsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Intercompany Status	select	intercostatus
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
Order #	text	transid
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
P/N Ref.	text	pnrefnum
PO #	text	otherrefnum
Paired Intercompany Transaction	select	intercotransaction
Partner	select	partner

Name	Type	ID
PayPal Order ID	text	paypalorderid
PayPal Status	text	paypalstatus
PayPal Tran. ID	text	paypaltranid
Payment Amount	currency	paymentsessionamount
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Process PayPal Payment	checkbox	paypalprocess
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Purchase Card BIN	checkbox	ccispurchasecardbin
Rate	rate	discontrate
Reason	select	paymenteventholdreason
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship Complete	checkbox	shipcomplete
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1

Name	Type	ID
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Status	text	orderstatus
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge Type	text	chargetype
Commit	text	commitinventory
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Project Charge Rule	text	chargerule
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress
Ship To	address	shippingaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate

Name	Type	ID
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl

Name	Type	ID
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text

Name	Type	ID
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar

Name	Type	ID
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE

Name	Type	ID
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber

Name	Type	ID
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Invoice PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Invoice PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
Amount	currency	expcostdiscamount
Amount	currency	itemcostdiscamount
Amount	currency	timediscamount
As of Date	date	asofdate
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee

Name	Type	ID
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Disc. Amt.	currency	discountamount
Disc. Date	date	discountdate
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Discount/Markup	select	expcostdiscount
Discount/Markup	select	itemcostdiscount
Discount/Markup	select	timediscount
Due Date	date	duedate
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetrandidonsave

Name	Type	ID
Gift Certificate	currency	giftcertapplied
Internal ID	text	id
Invoice #	text	tranid
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
PO #	text	otherrefnum
Partner	select	partner
Payment Custom Data	longtext	paymentcustomdata
Posting Period	select	postingperiod
Print	checkbox	expcostdiscprint
Print	checkbox	itemcostdiscprint
Print	checkbox	timediscprint
Project	text	project
Promo Code	text	muccppromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discontrate
Rate	rate	expcostdiscrate
Rate	rate	itemcostdiscrate
Rate	rate	timediscrate
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod

Name	Type	ID
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Stored tax reference for update	text	taxreferencetobeupdated
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes

Name	Type	ID
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **expcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Bill Amount	currency	amount
Category	text	categorydisp
Class	select	class
Date	date	billeddate
Department	select	department
Employee	text	employeeidisp
Gross Amount	currency	grossamt
Location	select	location
Memo	text	memo
Original Amount	currency	originalamount
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges

Name	Type	ID
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **itemcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Gross Amount	currency	grossamt
Item	text	itemdisp
Location	select	location
Options	namevaluelist	options
Qty	text	itemcostcount
Rate	currency2	cost
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Total	currency	amount
Units	text	unitdisp

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

- The **time** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Employee	text	employeedisp
Gross Amount	currency	grossamt
Hours	text	quantity
Item	text	itemdisp
Location	select	location
Rate	currency2	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Units	text	unitdisp

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid

Name	Type	ID
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text

Name	Type	ID
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP

Name	Type	ID
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING

Name	Type	ID
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals

Name	Type	ID
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead

Name	Type	ID
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Purchase PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Purchase PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Base Currency	checkbox	isbasecurrency
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2

Name	Type	ID
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Class	select	class
Currency	select	currency
Currency	text	currencysymbol
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Date	date	trandate
Department	select	department
Employee	select	employee
Exchange rate	currency2	exchangerate
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetransave
Incoterm	select	incoterm
Intercompany Status	select	intercostatus
Internal ID	text	id
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
PO #	text	transid
Paired Intercompany Transaction	select	intercotransaction
Purchase Contract	select	purchasecontract
Receive By	date	duedate
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To	select	shipto

Name	Type	ID
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Phone	text	shipphone
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Supervisor Approval	checkbox	supervisorapproval
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber

Name	Type	ID
Vendor	address	billaddress
Vendor	select	entity
Vendor #	text	otherrefnum
Vendor Message	textarea	message
Vendor Select	select	billaddresslist
Vendor Tax Reg. Number	select	entitytaxregnum

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Description	textarea	description
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units
Vendor Name	text	vendorname

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix

Name	Type	ID
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname

Name	Type	ID
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct

Name	Type	ID
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount

Name	Type	ID
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Quote PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Quote PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Acct. No.	text	accountnumber
Available In Customer Center	checkbox	visibletocustomer
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Billing Schedule	select	billingschedule
Can have stackable promotions	checkbox	canhavestackable
Class	select	class

Name	Type	ID
Coupon Code	select	couponcode
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Enable Item Line Shipping	checkbox	ismultishipto
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Estimate #	text	tranid
Exchange Rate	currency2	exchangerate
Exp. Close	date	expectedclosedate
Expires	date	duedate
ExternalId	text	externalid
FOB	text	fob
Forecast Type	select	forecasttype
Generate TranId on Save	checkbox	generatetransave
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride

Name	Type	ID
Opportunity	select	opportunity
PO #	text	otherrefnum
Partner	select	partner
Probability	percent	probability
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discontrate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate

Name	Type	ID
Status	select	entitystatus
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
Title	text	title
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text

Name	Type	ID
Amount	currency	amount
Carrier	select	shipcarrier
Charge Type	text	chargetype
Description	textarea	description
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl

Name	Type	ID
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE

Name	Type	ID
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text

Name	Type	ID
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes

Name	Type	ID
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Cash Refund PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Cash Refund PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd

Name	Type	ID
As of Date	date	asofdate
Authorization ID	text	paypalauthid
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Check #	text	otherrefnum
Class	select	class
Coupon Code	select	couponcode
Create Check	checkbox	refundcheck
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Credit Card Select	select	creditcard
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity

Name	Type	ID
Customer Code	text	customercode
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Detail	text	cchold
Detail	textarea	ccholddetails
Discount	select	discountitem
Discount	currency	discounttotal
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetrandidonsave
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
Partner	select	partner
PayPal Order ID	text	paypalorderid
PayPal Status	text	paypalstatus
PayPal Tran. ID	text	paypaltranid

Name	Type	ID
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Posting Period	select	postingperiod
Print Check	checkbox	toprint2
Process Credit Card	checkbox	chargeit
Process PayPal Payment	checkbox	paypalprocess
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Purchase Card BIN	checkbox	ccispurchasecardbin
Rate	rate	discontrate
Reason	select	paymenteventholdreason
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Refund #	text	tranid
Sales Effective Date	date	saleeffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate

Name	Type	ID
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate

Name	Type	ID
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference

Name	Type	ID
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id

Name	Type	ID
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep

Name	Type	ID
Create Period End Journals By Segment	checkbox	createpejbysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE

Name	Type	ID
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Cash Sale PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Cash Sale PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
Amount	currency	expcostdiscamount
Amount	currency	itemcostdiscamount
Amount	currency	timediscamount
As of Date	date	asofdate
Auth. Code	text	authcode
Authorization ID	text	paypalauthid
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Charge Credit Card	checkbox	chargeit
Check #	text	otherrefnum
Class	select	class

Name	Type	ID
Coupon Code	select	couponcode
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Credit Card Select	select	creditcard
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Code	text	customercode
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Deposit To	radio	undepfunds
Detail	text	cchold
Detail	textarea	ccholddetails
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Discount/Markup	select	expcostdiscount
Discount/Markup	select	itemcostdiscount
Discount/Markup	select	timediscount
Enable Item Line Shipping	checkbox	ismultishipto
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid

Name	Type	ID
FOB	text	fob
Generate TranId on Save	checkbox	generatetransave
Gift Certificate	currency	giftcertapplied
IAVS Match	select	cciaavsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
P/N Ref.	text	pnrefnum
Partner	select	partner
PayPal Order ID	text	paypalorderid
PayPal Status	text	paypalstatus
PayPal Tran. ID	text	paypaltranid
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Posting Period	select	postingperiod
Print	checkbox	expcostdiscprint
Print	checkbox	itemcostdiscprint
Print	checkbox	timediscprint
Process PayPal Payment	checkbox	paypalprocess
Project	text	project

Name	Type	ID
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Purchase Card BIN	checkbox	ccispurchasecardbin
Rate	rate	discountrate
Rate	rate	expcostdiscrate
Rate	rate	itemcostdiscrate
Rate	rate	timediscrate
Reason	select	paymenteventholdreason
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Sale #	text	tranid
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost

Name	Type	ID
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate

Name	Type	ID
Secondary Book	select	accountingbook

- The **expcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Bill Amount	currency	amount
Category	text	categorydisp
Class	select	class
Date	date	billeddate
Department	select	department
Employee	text	employeeidisp
Gross Amount	currency	grossamt
Location	select	location
Memo	text	memo
Original Amount	currency	originalamount
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems

Name	Type	ID
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **itemcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Gross Amount	currency	grossamt
Item	text	itemdisp
Location	select	location
Options	namevaluelist	options
Qty	text	itemcostcount
Rate	currency2	cost
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Total	currency	amount
Units	text	unitdisp

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode

Name	Type	ID
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

- The **time** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Employee	text	employeedisp
Gross Amount	currency	grossamt
Hours	text	quantity
Item	text	itemdisp
Location	select	location
Rate	currency2	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Units	text	unitdisp

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country

Name	Type	ID
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals

Name	Type	ID
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar

Name	Type	ID
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom

Name	Type	ID
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions

Name	Type	ID
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Return Authorization PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Return Authorization PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Acct. No.	text	accountnumber
Allow Cross-Subsidiary Customer Return	checkbox	iscrosssubtransaction
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee

Name	Type	ID
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Created From	select	createdfrom
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Deferred Revenue Reclassification Account	select	draccount
Department	select	department
Discount	select	discountitem
Discount	currency	discounttotal
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
ExternalId	text	externalid
Foreign Currency Adjustment Revenue Account	select	fxaccount
Generate TranId on Save	checkbox	generatetranidonsave
Intercompany Status	select	intercostatus
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo

Name	Type	ID
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
PO #	text	otherrefnum
Paired Intercompany Transaction	select	intercotransaction
Partner	select	partner
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discontrate
Rtn. Auth. #	text	tranid
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Phone	text	shipphone
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Status	text	orderstatus
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary

Name	Type	ID
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty

Name	Type	ID
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Unit Price	rate	rate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo

Name	Type	ID
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals

Name	Type	ID
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar

Name	Type	ID
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom

Name	Type	ID
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions

Name	Type	ID
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Picking Ticket PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Picking Ticket PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Add Charges	select	whichchargestoadd
Additional Tracking #	text	trackingnumbers
Amount	currency	expcostdiscamount
Amount	currency	itemcostdiscamount
Amount	currency	timediscamount
As-Of Date	date	asofdate
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1

Name	Type	ID
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Disc. Amt.	currency	discountamount
Disc. Date	date	discountdate
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Discount/Markup	select	expcostdiscount
Discount/Markup	select	itemcostdiscount
Discount/Markup	select	timediscount
Due Date	date	duedate
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate

Name	Type	ID
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetrandidonsave
Gift Certificate	currency	giftcertapplied
Internal ID	text	id
Invoice #	text	tranid
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
PO #	text	otherrefnum
Partner	select	partner
Payment Custom Data	longtext	paymentcustomdata
Posting Period	select	postingperiod
Print	checkbox	expcostdiscprint
Print	checkbox	itemcostdiscprint
Print	checkbox	timediscprint
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discontrate
Rate	rate	expcostdiscrate
Rate	rate	itemcostdiscrate
Rate	rate	timediscrate
Return Tracking #	text	returntrackingnumbers
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep

Name	Type	ID
Select Message	select	messagesel
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	altshippingcost
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Method	select	shipmethod
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Stored tax reference for update	text	taxreferencetobeupdated
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Tax Total	currency	taxtotal
Taxes Dirty	checkbox	taxesdirty

Name	Type	ID
Terms	select	terms
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **expcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Bill Amount	currency	amount
Category	text	categorydisp
Class	select	class
Date	date	billeddate
Department	select	department
Employee	text	employeedisp
Gross Amount	currency	grossamt
Location	select	location
Memo	text	memo
Original Amount	currency	originalamount
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Charge	text	charge
Charge Type	select	chargetype
Charges	multiselect	charges
Cost Estimate Type	select	costestimatetype
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Est. Extended Cost	currency	costestimate
Exclude Item from Rate Request	checkbox	excludefromraterequest
From	text	giftcertfrom
Gift Message	textarea	giftcertmessage
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Price Level	select	price
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Recipient Email	email	giftcertrecipientemail
Recipient Name	text	giftcertrecipientname
Rev. Rec. End Date	date	revrecenddate
Rev. Rec. Start Date	date	revrecstartdate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **itemcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply

Name	Type	ID
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Gross Amount	currency	grossamt
Item	text	itemdisp
Location	select	location
Options	namevaluelist	options
Qty	text	itemcostcount
Rate	currency2	cost
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Total	currency	amount
Units	text	unitdisp

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

- The **time** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo

Name	Type	ID
Employee	text	employeedisp
Gross Amount	currency	grossamt
Hours	text	quantity
Item	text	itemdisp
Location	select	location
Rate	currency2	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Units	text	unitdisp

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl

Name	Type	ID
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER

Name	Type	ID
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale

Name	Type	ID
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount

Name	Type	ID
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Payment Voucher PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Payment Voucher PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
A/P Account	select	apacct
Account	select	account
Address	address	address
Amount	currency	total
Available Balance	currency	availablebalance
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Class	select	class
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Date	date	trandate
Department	select	department
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransave
In Transit	checkbox	isintransitpayment

Name	Type	ID
Internal ID	text	id
Location	select	location
Memo	text	memo
Payee	select	entity
Posting Period	select	postingperiod
Status	text	status
Subsidiary	select	subsidiary
To Be Printed	checkbox	tobeprinted
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied
Voucher	checkbox	printvoucher

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Disc. Avail.	currency	discamt
Disc. Date	date	disccdate
Disc. Taken	currency	disc
Hidden	text	internalid
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount

Name	Type	ID
Ref No.	text	refnum
Type	text	type

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **itprlrlds** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Date	date	appldate
Number	text	applnumber
Relationship	text	linktype
Type	text	type

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority

Name	Type	ID
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail

Name	Type	ID
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER

Name	Type	ID
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejbysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id

Name	Type	ID
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount

Name	Type	ID
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Credit Memo PDF/HTML Template



Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Credit Memo PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
Applied	currency	applied
As of Date	date	asofdate
Auto Apply	checkbox	autoapply
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention

Name	Type	ID
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Credit #	text	tranid
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Discount	select	discountitem
Discount	currency	discounttotal
Enable Item Line Shipping	checkbox	ismultishipto
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransave
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride

Name	Type	ID
PO #	text	otherrefnum
Partner	select	partner
Payment Custom Data	longtext	paymentcustomdata
Posting Period	select	postingperiod
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discountrate
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Stored tax reference for update	text	taxreferencetobeupdated

Name	Type	ID
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Hidden	text	internalid

Name	Type	ID
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount
Ref No.	text	refnum
Type	text	type

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount

Name	Type	ID
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail

Name	Type	ID
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER

Name	Type	ID
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejbysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id

Name	Type	ID
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount

Name	Type	ID
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Customer Deposit PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Customer Deposit PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Applied	currency	applied
Auth. Code	text	authcode
Base Currency	checkbox	isbasecurrency
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Cards on File	select	creditcard
Class	select	class
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	customer
Customer Code	text	customercode
Date	date	trandate
Department	select	department

Name	Type	ID
Deposit #	text	tranid
Deposit To	radio	undepfunds
Detail	text	cchold
Detail	textarea	ccholddetails
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransave
IAVS Match	select	cciaavsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Internal ID	text	id
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
P/N Ref.	text	pnrefnum
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Posting Period	select	postingperiod
Process Credit Card	checkbox	chargeit
Purchase Card BIN	checkbox	ccispurchasecardbin
Reason	select	paymenteventholdreason
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Sales Order	select	salesorder
Send Line-Level Data	checkbox	ccprocessaspurchasecard

Name	Type	ID
Status	select	paymenteventresult
Subsidiary	select	subsidiary
Total	poscurrency	payment
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contacts** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime

Name	Type	ID
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules

Name	Type	ID
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl

Name	Type	ID
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT

Name	Type	ID
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state

Name	Type	ID
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language

Name	Type	ID
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform

Name	Type	ID
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Check PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Check PDF/HTML Template template are listed below.

Check – check

The following fields are available for the Check record.

Name	Type	ID
Account	text	account
Address	text	address
Amount	number	total
Amount	number	usertotal
Available Balance	number	availablebalance
Balance	number	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Check Number	text	checknumber
Class	text	class

Name	Type	ID
Currency	text	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	text	customform
Date	date	trandate
Department	text	department
Exchange Rate	number	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransidonsave
Internal ID	text	id
Landed Cost per Line	checkbox	landedcostperline
Location	text	location
Memo	text	memo
Payee	text	entity
Posting Period	text	postingperiod
Subsidiary	text	subsidiary
To Be Printed	checkbox	tobeprinted
Total	text	totalwords
Total	text	usertotalwords
Total	text	wordhundreds
Total	text	wordhundredthousands
Total	text	wordones
Total	text	wordtens
Total	text	wordtenthousands
Total	text	wordthousands
Transaction Number	text	transactionnumber

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid

Name	Type	ID
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text

Name	Type	ID
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers

Name	Type	ID
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard UK Check PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard UK Check PDF/HTML Template template are listed below.

Check – check

The following fields are available for the Check record.

Name	Type	ID
Account	text	account
Address	text	address
Amount	number	total
Amount	number	usertotal
Available Balance	number	availablebalance
Balance	number	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Check Number	text	checknumber
Class	text	class
Currency	text	currency
Currency	text	currencyname

Name	Type	ID
Currency Symbol	text	currencysymbol
Custom Form	text	customform
Date	date	trandate
Department	text	department
Exchange Rate	number	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalID	text	externalid
Generate TranID on Save	checkbox	generatetransidonsave
Internal ID	text	id
Landed Cost per Line	checkbox	landedcostperline
Location	text	location
Memo	text	memo
Payee	text	entity
Posting Period	text	postingperiod
Subsidiary	text	subsidiary
To Be Printed	checkbox	tobeprinted
Total	text	totalwords
Total	text	usertotalwords
Total	text	wordhundreds
Total	text	wordhundredthousands
Total	text	wordones
Total	text	wordtens
Total	text	wordtenthousands
Total	text	wordthousands
Transaction Number	text	transactionnumber

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext

Name	Type	ID
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent

Name	Type	ID
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone

Name	Type	ID
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard US Voucher Check PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard US Voucher Check PDF/HTML Template template are listed below.

Check – check

The following fields are available for the Check record.

Name	Type	ID
Account	text	account
Address	text	address
Amount	number	total
Amount	number	usertotal
Available Balance	number	availablebalance
Balance	number	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Check Number	text	checknumber
Class	text	class
Currency	text	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	text	customform

Name	Type	ID
Date	date	trandate
Department	text	department
Exchange Rate	number	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransidonsave
Internal ID	text	id
Landed Cost per Line	checkbox	landedcostperline
Location	text	location
Memo	text	memo
Payee	text	entity
Posting Period	text	postingperiod
Subsidiary	text	subsidiary
To Be Printed	checkbox	tobeprinted
Total	text	totalwords
Total	text	usertotalwords
Total	text	wordhundreds
Total	text	wordhundredthousands
Total	text	wordones
Total	text	wordtens
Total	text	wordtenthousands
Total	text	wordthousands
Transaction Number	text	transactionnumber

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules

Name	Type	ID
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl

Name	Type	ID
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress

Name	Type	ID
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard UK Voucher Check PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard UK Voucher Check PDF/HTML Template template are listed below.

Check – check

The following fields are available for the Check record.

Name	Type	ID
Account	text	account
Address	text	address
Amount	number	total
Amount	number	usertotal
Available Balance	number	availablebalance
Balance	number	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Check Number	text	checknumber
Class	text	class
Currency	text	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	text	customform
Date	date	trandate
Department	text	department

Name	Type	ID
Exchange Rate	number	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetrandidonsave
Internal ID	text	id
Landed Cost per Line	checkbox	landedcostperline
Location	text	location
Memo	text	memo
Payee	text	entity
Posting Period	text	postingperiod
Subsidiary	text	subsidiary
To Be Printed	checkbox	tobeprinted
Total	text	totalwords
Total	text	usertotalwords
Total	text	wordhundreds
Total	text	wordhundredthousands
Total	text	wordones
Total	text	wordtens
Total	text	wordtenthousands
Total	text	wordthousands
Transaction Number	text	transactionnumber

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo

Name	Type	ID
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone

Name	Type	ID
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard AU Voucher Check PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard AU Voucher Check PDF/HTML Template template are listed below.

Check – check

The following fields are available for the Check record.

Name	Type	ID
Account	text	account
Address	text	address
Amount	number	total
Amount	number	usertotal
Available Balance	number	availablebalance
Balance	number	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Check Number	text	checknumber
Class	text	class
Currency	text	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	text	customform
Date	date	trandate
Department	text	department
Exchange Rate	number	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetranidonsave

Name	Type	ID
Internal ID	text	id
Landed Cost per Line	checkbox	landedcostperline
Location	text	location
Memo	text	memo
Payee	text	entity
Posting Period	text	postingperiod
Subsidiary	text	subsidiary
To Be Printed	checkbox	tobeprinted
Total	text	totalwords
Total	text	usertotalwords
Total	text	wordhundreds
Total	text	wordhundredthousands
Total	text	wordones
Total	text	wordtens
Total	text	wordtenthousands
Total	text	wordthousands
Transaction Number	text	transactionnumber

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate

Name	Type	ID
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard US Vendor Payment PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard US Vendor Payment PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
A/P Account	select	apacct
Account	select	account
Address	address	address
Amount	currency	total
Available Balance	currency	availablebalance
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Class	select	class
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Date	date	trandate
Department	select	department
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransave
In Transit	checkbox	isintransitpayment

Name	Type	ID
Internal ID	text	id
Location	select	location
Memo	text	memo
Payee	select	entity
Posting Period	select	postingperiod
Status	text	status
Subsidiary	select	subsidiary
To Be Printed	checkbox	tobeprinted
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied
Voucher	checkbox	printvoucher

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Disc. Avail.	currency	discamt
Disc. Date	date	disccdate
Disc. Taken	currency	disc
Hidden	text	internalid
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount

Name	Type	ID
Ref No.	text	refnum
Type	text	type

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contacts** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **itprlrlds** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Date	date	appldate
Number	text	applnumber
Relationship	text	linktype
Type	text	type

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem

Name	Type	ID
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate

Name	Type	ID
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax

Name	Type	ID
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE

Name	Type	ID
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency

Name	Type	ID
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions

Name	Type	ID
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard UK Vendor Payment PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard UK Vendor Payment PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
A/P Account	select	apacct
Account	select	account
Address	address	address
Amount	currency	total
Available Balance	currency	availablebalance
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Class	select	class
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Date	date	trandate
Department	select	department
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering

Name	Type	ID
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransidonsave
In Transit	checkbox	isintransitpayment
Internal ID	text	id
Location	select	location
Memo	text	memo
Payee	select	entity
Posting Period	select	postingperiod
Status	text	status
Subsidiary	select	subsidiary
To Be Printed	checkbox	tobeprinted
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied
Voucher	checkbox	printvoucher

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Disc. Avail.	currency	discamt
Disc. Date	date	discdate
Disc. Taken	currency	disc
Hidden	text	internalid

Name	Type	ID
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount
Ref No.	text	refnum
Type	text	type

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contacts** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **itprlrlds** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Date	date	appldate
Number	text	applnumber
Relationship	text	linktype
Type	text	type

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country

Name	Type	ID
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals

Name	Type	ID
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar

Name	Type	ID
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom

Name	Type	ID
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions

Name	Type	ID
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard AU Vendor Payment PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard AU Vendor Payment PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
A/P Account	select	apacct
Account	select	account
Address	address	address
Amount	currency	total
Available Balance	currency	availablebalance
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Class	select	class
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Date	date	trandate
Department	select	department

Name	Type	ID
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetrandidonsave
In Transit	checkbox	isintransitpayment
Internal ID	text	id
Location	select	location
Memo	text	memo
Payee	select	entity
Posting Period	select	postingperiod
Status	text	status
Subsidiary	select	subsidiary
To Be Printed	checkbox	tobeprinted
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied
Voucher	checkbox	printvoucher

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Disc. Avail.	currency	discamt

Name	Type	ID
Disc. Date	date	discdate
Disc. Taken	currency	disc
Hidden	text	internalid
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount
Ref No.	text	refnum
Type	text	type

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contacts** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **itprlrds** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Date	date	appldate
Number	text	applnumber

Name	Type	ID
Relationship	text	linktype
Type	text	type

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname

Name	Type	ID
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar

Name	Type	ID
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREF
Document Number Prefix	text	tranprefix

Name	Type	ID
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo

Name	Type	ID
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers

Name	Type	ID
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprintrtransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprintrtransactions

Standard Paycheck PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Paycheck PDF/HTML Template template are listed below.

Check – check

The following fields are available for the Check record.

Name	Type	ID
Account	text	account
Address	text	address
Amount	number	total
Amount	number	usertotal
Available Balance	number	availablebalance
Balance	number	balance
Base Currency	checkbox	isbasecurrency
Check #	text	tranid
Check Number	text	checknumber
Class	text	class
Currency	text	currency
Currency	text	currencyname

Name	Type	ID
Currency Symbol	text	currencysymbol
Custom Form	text	customform
Date	date	trandate
Department	text	department
Exchange Rate	number	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalID	text	externalid
Generate TranID on Save	checkbox	generatetrandidonsave
Internal ID	text	id
Landed Cost per Line	checkbox	landedcostperline
Location	text	location
Memo	text	memo
Payee	text	entity
Posting Period	text	postingperiod
Subsidiary	text	subsidiary
To Be Printed	checkbox	tobeprinted
Total	text	totalwords
Total	text	usertotalwords
Total	text	wordhundreds
Total	text	wordhundredthousands
Total	text	wordones
Total	text	wordtens
Total	text	wordtenthousands
Total	text	wordthousands
Transaction Number	text	transactionnumber

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext

Name	Type	ID
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent

Name	Type	ID
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone

Name	Type	ID
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Bill of Materials PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Bill of Materials PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Acct. No.	text	accountnumber
Assembly	select	assemblyitem
Auto-calculate Lag	checkbox	autocalculatelag
Bill of Materials	select	billofmaterials
Bill of Materials Revision	select	billofmaterialsrevision
Class	select	class
Custom Form	select	customform
Customer	select	customer
Customer	select	entity
Date	date	trandate
Department	select	department
ExternalId	text	externalid
Firmed	checkbox	firmed
Generate TranId on Save	checkbox	generatetransidonsave

Name	Type	ID
Internal ID	text	id
Job	select	job
Location	select	location
Manufacturing Routing	select	manufacturingrouting
Mark Sub-assemblies Phantom	checkbox	expandassembly
Memo	text	memo
Order #	text	tranid
Order Status	select	orderstatus
Qty. Required	posfloat	quantity
Revision Memo	textarea	revisionmemo
Sales Rep	select	salesrep
Scheduling Method	select	schedulingmethod
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Status	text	status
Subsidiary	select	subsidiary
Transaction Number	text	transactionnumber
Units	select	units
Use Component Yield	checkbox	usecomponentyield

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Commit	text	commitinventory
Create WO	text	createwo

Name	Type	ID
Description	textarea	description
Item	select	item
Item Source options list	text	itemsourcelist
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Qty. Required	float	quantity
Rate	rate	rate
Units	select	units

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix

Name	Type	ID
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname

Name	Type	ID
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct

Name	Type	ID
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount

Name	Type	ID
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Shipping Label PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Shipping Label PDF/HTML Template template are listed below.

Label – label

The following fields are available for the Label record.

Name	Type	ID
Ref No.	number	refnumber
Return Address	text	returnaddress
Ship To	text	shipaddress

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate

Name	Type	ID
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Customer Payment PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Customer Payment PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
A/R Account	select	aracct
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Applied	currency	applied
Auth. Code	text	authcode
Auto Apply	checkbox	autoapply
Base Currency	checkbox	isbasecurrency
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Cards on File	select	creditcard
Charge Credit Card	checkbox	chargeit
Class	select	class
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Current Balance	currency	balance
Custom Form	select	customform

Name	Type	ID
Customer	select	customer
Customer Code	text	customercode
Date	date	trandate
Department	select	department
Deposit To	radio	undepfunds
Detail	text	cchold
Detail	textarea	ccholddetails
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Expires (MM/YYYY)	ccexpdate	ccexpireddate
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetrandidonsave
IAVS Match	select	cciavsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Internal ID	text	id
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
P/N Ref.	text	pnrefnum
Payment #	text	tranid
Payment Amount	poscurrency	payment
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Pending	currency	pending
Posting Period	select	postingperiod
Purchase Card BIN	checkbox	ccispurchasecardbin
Reason	select	paymenteventholdreason

Name	Type	ID
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Status	select	paymenteventresult
Subsidiary	select	subsidiary
Total	currency	total
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Disc. Avail.	currency	discamt
Disc. Date	date	discdate
Disc. Taken	currency	disc
Hidden	text	internalid
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount
Ref No.	text	refnum
Type	text	type

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contacts** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **credit** sublist has the following fields:

Name	Type	ID
Amount Remaining	currency	due
Apply	checkbox	apply
Credit	currency	amount
Currency	text	currency
Date	date	creditdate
Hidden	text	internalid
Hidden	text	trantype
Orig. Amt.	currency	total
Ref No.	text	refnum
Type	text	type

- The **deposit** sublist has the following fields:

Name	Type	ID
Amount Remaining	currency	remaining
Apply	checkbox	apply
Currency	text	currencyname
Date	date	depositdate
Orig. Amt.	currency	total
Payment	currency	amount
Ref No.	text	refnum

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent

Name	Type	ID
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive

Name	Type	ID
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT

Name	Type	ID
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREF
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text

Name	Type	ID
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum

Name	Type	ID
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Mailing Label PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Mailing Label PDF/HTML Template template are listed below.

Label – label

The following fields are available for the Label record.

Name	Type	ID
Address	text	address
ID	number	id

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent

Name	Type	ID
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive

Name	Type	ID
Subsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape

Name	Type	ID
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Item Label PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Item Label PDF/HTML Template template are listed below.

Label – label

The following fields are available for the Label record.

Name	Type	ID
Bar Code	text	skuupcbarcode
Expiration Date	date	expirationdate
ID	number	id
Name	text	name
Price	number	price
Serial Number	text	serialnumber
UPC Code	checkbox	upc

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent

Name	Type	ID
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive

Name	Type	ID
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape

Name	Type	ID
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Statement PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Statement PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
1-30 Days	number	aging2
31-60 Days	number	aging3
61-90 Days	number	aging4
Account Number	text	accountnumber
Amount Due	number	agingbal
Amount Due	number	amountdue
Billing Address	text	billaddress
Credit Limit	number	creditlimit
Currency	text	currency
Currency Symbol	text	currencysymbol
Current	number	aging1
Over 90 Days	number	aging5
Project	text	project

Name	Type	ID
Sales Rep	text	salesrep
Subsidiary	text	subsidiary
Terms	text	terms
Transaction Date	date	trandate

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **lines** sublist has the following fields:

Name	Type	ID
Balance	text	balance
Charge	text	charge
Date	text	datecol
Description	text	description
Due Date	text	duedate
End Date	text	enddate
GL #	text	glnumber
GL Audit Numbering Sequence	text	glsequence
Memo	text	memo
Open Amount	text	amountremaining
PO/Check #	text	otherrefnum
Payment	text	payment
Payment Method	text	paymentmethod
Start Date	text	startdate
Subcustomer/Job	text	subname
Terms	text	terms

Customer – customer

The following fields are available for the Customer record.

Name	Type	ID
Account	text	accountnumber
Address	address	defaultaddress
Alcohol Recipient Type	select	alcoholrecipienttype

Name	Type	ID
Alt. Email	email	altemail
Alt. Phone	phone	altphone
Assigned Web Site	select	assignedwebsite
Auto	checkbox	autoname
Billing Rate Card	select	billingratecard
Billing Schedule	select	billingschedule
Billing Transaction Form	select	billingtransactionform
Billing Transaction Type	select	billingtransactiontype
Budget Approved	checkbox	isbudgetapproved
Buying Reason	select	buyingreason
Buying Time Frame	select	buyingtimeframe
Campaign Category	select	campaigncategory
Campaign Event	select	campaignevent
Category	select	category
Choose Team	select	salesgroup
Comments	textarea	comments
Company Name	text	companyname
Confirm Password	password	password2
Country	select	shipping_country
Credit Limit	poscurrency	creditlimit
Currency Precision	text	currencyprecision
Custom Form	select	customform
Customer ID	text	entityid
Date Created	datetime	datecreated
Default Order Priority	float	defaultorderpriority
Default Receivables Account	select	receivablesaccount
Default Tax Reg.	select	defaulttaxreg
Deferred Revenue Account for Revenue Reclassification	select	draccount
Email	email	email
Email	checkbox	emailtransactions
Email Preference	select	emailpreference
End Date	date	enddate

Name	Type	ID
Estimated Budget	currency	estimatedbudget
ExternalId	text	externalid
Fax	phone	fax
Fax	checkbox	faxtransactions
For new access provisioning consider sending a New Access Notification Email with a password setup URL instead of manually assigning a user password.	help	newaccesshelp
Foreign Currency Adjustment Revenue Account	select	fxaccount
Furigana	text	phoneticname
Give Access	checkbox	giveaccess
Global Subscription Status	select	globalsubscriptionstatus
Hold	select	creditholdoverride
Home Phone	phone	homephone
Image	select	image
Inactive	checkbox	isinactive
Individual	radio	isperson
Internal ID	text	id
Job Title	text	title
Language	select	language
Last Modified Date	datetime	lastmodifieddate
Lead Source	select	leadsource
Manually assign or change password	checkbox	fillpassword
Mobile Phone	phone	mobilephone
Monthly Closing Date	select	monthlyclosing
Mr./Ms...	text	salutation
Name	text	firstname
Negative Number Format	select	negativenumberformat
Number Format	select	numberformat
Opening Balance	currency	openingbalance
Opening Balance Account	select	openingbalanceaccount
Opening Balance Date	date	openingbalancedate
Parent Company	select	parent
Partner	select	partner

Name	Type	ID
Password	password	password
Phone	phone	phone
Pref. CC Processor	select	prefccprocessor
Price Level	select	pricelevel
Primary Subsidiary	select	subsidiary
Print	checkbox	printtransactions
Print on Check As	text	printoncheckas
Reminder Days	posinteger	reminderdays
Represents Subsidiary	select	representingsubsidiary
Role	select	accessrole
Sales Readiness	select	salesreadiness
Sales Rep	integer	salesrep
Send New Access Notification Email	checkbox	sendemail
Send Transactions Via	label	sendtransactionsvia
Ship Complete	checkbox	shipcomplete
Shipping Carrier	select	shippingcarrier
Shipping Method	select	shippingitem
Source Web Site	select	sourcewebsite
Start Date	date	startdate
Status	select	entitystatus
Terms	select	terms
Territory	select	territory
Type	label	isindividual
Unsubscribe from Campaigns	select	unsubscribe
Update Transactions	checkbox	syncpartnerteams
Web Address	url	url

Sublists

The following sublists are available for the Customer record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **addressbook** sublist has the following fields:

Name	Type	ID
Address	address	addressbookaddress_text
Default Billing	checkbox	defaultbilling
Default Shipping	checkbox	defaultshipping
Label	text	label
Residential Address	checkbox	isresidential

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contact** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **creditcards** sublist has the following fields:

Name	Type	ID
Card State	select	cardstate
Cardholder Name	text	ccname
Credit Card Number	ccnumber	ccnumber
Credit Card Type	select	paymentmethod
Customer Code	text	customercode
Default Credit Card	checkbox	ccdefault
Expiration Date	mmyydate	ccexpiredate
Memo	text	ccmemo
State From	datetime	statefrom

- The **currency** sublist has the following fields:

Name	Type	ID
Currency	select	currency
Format Sample	text	formatsample

Name	Type	ID
Override Currency Format	checkbox	overridecurrencyformat
Symbol	text	displaysymbol
Symbol Placement	select	symbolplacement

- The **download** sublist has the following fields:

Name	Type	ID
Attach File	select	file
Expiration Date	date	expiration
License Code	textarea	licensecode
Remaining Downloads	integer	remainingdownloads

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **grouppricing** sublist has the following fields:

Name	Type	ID
Price Level	select	level
Pricing Group	select	group

- The **itempricing** sublist has the following fields:

Name	Type	ID
Currency	select	currency
Item	select	item
Price Level	select	level
Unit Price	currency2	price

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **opportunities** sublist has the following fields:

Name	Type	ID
Budget Approved	checkbox	isbudgetapproved
Buying Reason	select	buyingreason
Buying Time Frame	select	buyingtimeframe
Details	textarea	memo
Estimated Budget	currency	estimatedbudget
Expected Close	date	expectedclosedate
Projected Total	currency	projectedtotal
Sales Readiness	select	salesreadiness
Status	select	entitystatus
Title	text	title

- The **partners** sublist has the following fields:

Name	Type	ID
Contribution %	percent	contribution
Partner	select	partner
Partner Role	select	partnerrole
Primary	checkbox	isprimary

- The **salesteam** sublist has the following fields:

Name	Type	ID
Contribution %	percent	contribution
Employee	select	employee
Primary	checkbox	isprimary
Sales Role	select	salesrole

- The **submachine** sublist has the following fields:

Name	Type	ID
Balance	currency	balance
Currency	text	balancecurrency
Currency	text	depositbalancecurrency
Currency	text	unbilledcurrency
Deposit Balance	currency	depositbalance
Entity	text	entity
Inactive	text	issubinactive
Primary	text	isprimesub
Subsidiary	select	subsidiary
Unbilled Orders	currency	unbilledorders

- The **subscriptionmsgmach** sublist has the following fields:

Name	Type	ID
Author	text	author_name
Date	datetime	sentDate
Memo	text	memo
Message Type	text	type
Recipient	text	recipient_name
Recipient Email	text	email
Sender	text	sender_name

- The **subscriptions** sublist has the following fields:

Name	Type	ID
Subscribed	checkbox	subscribed
Subscription	select	subscription
Subscription	text	subscription_display

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Address	select	address
Country	select	nexuscountry
Nexus	select	nexus
State	select	nexusstate
Tax Reg. Number	text	taxregistrationnumber

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl

Name	Type	ID
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE

Name	Type	ID
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text

Name	Type	ID
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes

Name	Type	ID
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Price List PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Price List PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account Number	text	accountnumber
Additional	checkbox	additionaldata
Billing Address	text	billaddress

Name	Type	ID
Project	text	project
Transaction Date	date	trandate

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **lines** sublist has the following fields:

Name	Type	ID
Currency	text	currency
Description	text	description
Drop Ship Item	text	dropship
GL #	text	glnumber
GL Audit Numbering Sequence	text	glsequence
Item	text	item
Manuf. Part #	text	mpn
Manufacturer	text	manufacturer
Price Level	text	price
Special Order Item	text	specialorder
Sub-item of	text	parentitem
UPC Code	text	upccode
Unit	text	units
Unit Price	text	rate
Vendor Name	text	vendorname
Weight	text	weight

Customer – customer

The following fields are available for the Customer record.

Name	Type	ID
Account	text	accountnumber
Address	address	defaultaddress
Alcohol Recipient Type	select	alcoholrecipienttype
Alt. Email	email	altemail
Alt. Phone	phone	altphone

Name	Type	ID
Assigned Web Site	select	assignedwebsite
Auto	checkbox	autoname
Billing Rate Card	select	billingratecard
Billing Schedule	select	billingschedule
Billing Transaction Form	select	billingtransactionform
Billing Transaction Type	select	billingtransactiontype
Budget Approved	checkbox	isbudgetapproved
Buying Reason	select	buyingreason
Buying Time Frame	select	buyingtimeframe
Campaign Category	select	campaigncategory
Campaign Event	select	campaignevent
Category	select	category
Choose Team	select	salesgroup
Comments	textarea	comments
Company Name	text	companyname
Confirm Password	password	password2
Country	select	shipping_country
Credit Limit	poscurrency	creditlimit
Currency Precision	text	currencyprecision
Custom Form	select	customform
Customer ID	text	entityid
Date Created	datetime	datecreated
Default Order Priority	float	defaultorderpriority
Default Receivables Account	select	receivablesaccount
Default Tax Reg.	select	defaulttaxreg
Deferred Revenue Account for Revenue Reclassification	select	draccount
Email	email	email
Email	checkbox	emailtransactions
Email Preference	select	emailpreference
End Date	date	enddate
Estimated Budget	currency	estimatedbudget
ExternalId	text	externalid

Name	Type	ID
Fax	phone	fax
Fax	checkbox	faxtransactions
For new access provisioning consider sending a New Access Notification Email with a password setup URL instead of manually assigning a user password.	help	newaccesshelp
Foreign Currency Adjustment Revenue Account	select	fxaccount
Furigana	text	phoneticname
Give Access	checkbox	giveaccess
Global Subscription Status	select	globalsubscriptionstatus
Hold	select	creditholdoverride
Home Phone	phone	homephone
Image	select	image
Inactive	checkbox	isinactive
Individual	radio	isperson
Internal ID	text	id
Job Title	text	title
Language	select	language
Last Modified Date	datetime	lastmodifieddate
Lead Source	select	leadsource
Manually assign or change password	checkbox	fillpassword
Mobile Phone	phone	mobilephone
Monthly Closing Date	select	monthlyclosing
Mr./Ms...	text	salutation
Name	text	firstname
Negative Number Format	select	negativenumberformat
Number Format	select	numberformat
Opening Balance	currency	openingbalance
Opening Balance Account	select	openingbalanceaccount
Opening Balance Date	date	openingbalancedate
Parent Company	select	parent
Partner	select	partner
Password	password	password
Phone	phone	phone

Name	Type	ID
Pref. CC Processor	select	prefccprocessor
Price Level	select	pricelevel
Primary Subsidiary	select	subsidiary
Print	checkbox	printtransactions
Print on Check As	text	printoncheckas
Reminder Days	posinteger	reminderdays
Represents Subsidiary	select	representingsubsidiary
Role	select	accessrole
Sales Readiness	select	salesreadiness
Sales Rep	integer	salesrep
Send New Access Notification Email	checkbox	sendemail
Send Transactions Via	label	sendtransactionsvia
Ship Complete	checkbox	shipcomplete
Shipping Carrier	select	shippingcarrier
Shipping Method	select	shippingitem
Source Web Site	select	sourcewebsite
Start Date	date	startdate
Status	select	entitystatus
Terms	select	terms
Territory	select	territory
Type	label	isindividual
Unsubscribe from Campaigns	select	unsubscribe
Update Transactions	checkbox	syncpartnerteams
Web Address	url	url

Sublists

The following sublists are available for the Customer record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **addressbook** sublist has the following fields:

Name	Type	ID
Address	address	addressbookaddress_text
Default Billing	checkbox	defaultbilling

Name	Type	ID
Default Shipping	checkbox	defaultshipping
Label	text	label
Residential Address	checkbox	isresidential

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contact** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **creditcards** sublist has the following fields:

Name	Type	ID
Card State	select	cardstate
Cardholder Name	text	ccname
Credit Card Number	ccnumber	ccnumber
Credit Card Type	select	paymentmethod
Customer Code	text	customercode
Default Credit Card	checkbox	ccdefault
Expiration Date	mmyydate	ccexpireddate
Memo	text	ccmemo
State From	datetime	statefrom

- The **currency** sublist has the following fields:

Name	Type	ID
Currency	select	currency
Format Sample	text	formatsample
Override Currency Format	checkbox	overridecurrencyformat
Symbol	text	displaysymbol
Symbol Placement	select	symbolplacement

- The **download** sublist has the following fields:

Name	Type	ID
Attach File	select	file
Expiration Date	date	expiration
License Code	textarea	licensecode
Remaining Downloads	integer	remainingdownloads

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **grouppricing** sublist has the following fields:

Name	Type	ID
Price Level	select	level
Pricing Group	select	group

- The **itempricing** sublist has the following fields:

Name	Type	ID
Currency	select	currency
Item	select	item
Price Level	select	level
Unit Price	currency2	price

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **opportunities** sublist has the following fields:

Name	Type	ID
Budget Approved	checkbox	isbudgetapproved
Buying Reason	select	buyingreason

Name	Type	ID
Buying Time Frame	select	buyingtimeframe
Details	textarea	memo
Estimated Budget	currency	estimatedbudget
Expected Close	date	expectedclosedate
Projected Total	currency	projectedtotal
Sales Readiness	select	salesreadiness
Status	select	entitystatus
Title	text	title

- The **partners** sublist has the following fields:

Name	Type	ID
Contribution %	percent	contribution
Partner	select	partner
Partner Role	select	partnerrole
Primary	checkbox	isprimary

- The **salesteam** sublist has the following fields:

Name	Type	ID
Contribution %	percent	contribution
Employee	select	employee
Primary	checkbox	isprimary
Sales Role	select	salesrole

- The **submachine** sublist has the following fields:

Name	Type	ID
Balance	currency	balance
Currency	text	balancecurrency
Currency	text	depositbalancecurrency
Currency	text	unbilledcurrency
Deposit Balance	currency	depositbalance
Entity	text	entity
Inactive	text	issubinactive
Primary	text	isprimesub
Subsidiary	select	subsidiary
Unbilled Orders	currency	unbilledorders

- The **subscriptionmsgmach** sublist has the following fields:

Name	Type	ID
Author	text	author_name

Name	Type	ID
Date	datetime	sentDate
Memo	text	memo
Message Type	text	type
Recipient	text	recipient_name
Recipient Email	text	email
Sender	text	sender_name

- The **subscriptions** sublist has the following fields:

Name	Type	ID
Subscribed	checkbox	subscribed
Subscription	select	subscription
Subscription	text	subscription_display

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Address	select	address
Country	select	nexuscountry
Nexus	select	nexus
State	select	nexusstate
Tax Reg. Number	text	taxregistrationnumber

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl

Name	Type	ID
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE

Name	Type	ID
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text

Name	Type	ID
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes

Name	Type	ID
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Multi-currency Statement Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Multi-currency Statement Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
1-30 Days	number	aging2
31-60 Days	number	aging3
61-90 Days	number	aging4

Name	Type	ID
Account Number	text	accountnumber
Amount Due	number	agingbal
Amount Due	number	amountdue
Billing Address	text	billaddress
Credit Limit	number	creditlimit
Currency	text	currency
Currency Symbol	text	currencysymbol
Current	number	aging1
Over 90 Days	number	aging5
Project	text	project
Sales Rep	text	salesrep
Subsidiary	text	subsidiary
Terms	text	terms
Transaction Date	date	trandate

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **lines** sublist has the following fields:

Name	Type	ID
Balance	text	balance
Charge	text	charge
Date	text	datecol
Description	text	description
Due Date	text	duedate
End Date	text	enddate
GL #	text	glnumber
GL Audit Numbering Sequence	text	glsequence
Memo	text	memo
Open Amount	text	amountremaining
PO/Check #	text	otherrefnum
Payment	text	payment
Payment Method	text	paymentmethod

Name	Type	ID
Start Date	text	startdate
Subcustomer/Job	text	subname
Terms	text	terms

Customer – customer

The following fields are available for the Customer record.

Name	Type	ID
Account	text	accountnumber
Address	address	defaultaddress
Alcohol Recipient Type	select	alcoholrecipienttype
Alt. Email	email	altemail
Alt. Phone	phone	altphone
Assigned Web Site	select	assignedwebsite
Auto	checkbox	autoname
Billing Rate Card	select	billingratecard
Billing Schedule	select	billingschedule
Billing Transaction Form	select	billingtransactionform
Billing Transaction Type	select	billingtransactiontype
Budget Approved	checkbox	isbudgetapproved
Buying Reason	select	buyingreason
Buying Time Frame	select	buyingtimeframe
Campaign Category	select	campaigncategory
Campaign Event	select	campaignevent
Category	select	category
Choose Team	select	salesgroup
Comments	textarea	comments
Company Name	text	companyname
Confirm Password	password	password2
Country	select	shipping_country
Credit Limit	poscurrency	creditlimit
Currency Precision	text	currencyprecision
Custom Form	select	customform

Name	Type	ID
Customer ID	text	entityid
Date Created	datetime	datecreated
Default Order Priority	float	defaultorderpriority
Default Receivables Account	select	receivablesaccount
Default Tax Reg.	select	defaulttaxreg
Deferred Revenue Account for Revenue Reclassification	select	draccount
Email	email	email
Email	checkbox	emailtransactions
Email Preference	select	emailpreference
End Date	date	enddate
Estimated Budget	currency	estimatedbudget
ExternalId	text	externalid
Fax	phone	fax
Fax	checkbox	faxtransactions
For new access provisioning consider sending a New Access Notification Email with a password setup URL instead of manually assigning a user password.	help	newaccesshelp
Foreign Currency Adjustment Revenue Account	select	fxaccount
Furigana	text	phoneticname
Give Access	checkbox	giveaccess
Global Subscription Status	select	globalsubscriptionstatus
Hold	select	creditholdoverride
Home Phone	phone	homephone
Image	select	image
Inactive	checkbox	isinactive
Individual	radio	isperson
Internal ID	text	id
Job Title	text	title
Language	select	language
Last Modified Date	datetime	lastmodifieddate
Lead Source	select	leadsource
Manually assign or change password	checkbox	fillpassword
Mobile Phone	phone	mobilephone

Name	Type	ID
Monthly Closing Date	select	monthlyclosing
Mr./Ms...	text	salutation
Name	text	firstname
Negative Number Format	select	negativenumberformat
Number Format	select	numberformat
Opening Balance	currency	openingbalance
Opening Balance Account	select	openingbalanceaccount
Opening Balance Date	date	openingbalancedate
Parent Company	select	parent
Partner	select	partner
Password	password	password
Phone	phone	phone
Pref. CC Processor	select	prefccprocessor
Price Level	select	pricelevel
Primary Subsidiary	select	subsidiary
Print	checkbox	printtransactions
Print on Check As	text	printoncheckas
Reminder Days	posinteger	reminderdays
Represents Subsidiary	select	representingsubsidiary
Role	select	accessrole
Sales Readiness	select	salesreadiness
Sales Rep	integer	salesrep
Send New Access Notification Email	checkbox	sendemail
Send Transactions Via	label	sendtransactionsvia
Ship Complete	checkbox	shipcomplete
Shipping Carrier	select	shippingcarrier
Shipping Method	select	shippingitem
Source Web Site	select	sourcewebsite
Start Date	date	startdate
Status	select	entitystatus
Terms	select	terms
Territory	select	territory

Name	Type	ID
Type	label	isindividual
Unsubscribe from Campaigns	select	unsubscribe
Update Transactions	checkbox	syncpartnerteams
Web Address	url	url

Sublists

The following sublists are available for the Customer record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **addressbook** sublist has the following fields:

Name	Type	ID
Address	address	addressbookaddress_text
Default Billing	checkbox	defaultbilling
Default Shipping	checkbox	defaultshipping
Label	text	label
Residential Address	checkbox	isresidential

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **contact** sublist has the following fields:

Name	Type	ID
Contact	text	entityid
Email	email	email
Job Title	text	title
Main Phone	phone	phone
Role	select	contactrole
Subsidiary	select	subsidiary

- The **creditcards** sublist has the following fields:

Name	Type	ID
Card State	select	cardstate

Name	Type	ID
Cardholder Name	text	ccname
Credit Card Number	ccnumber	ccnumber
Credit Card Type	select	paymentmethod
Customer Code	text	customercode
Default Credit Card	checkbox	ccdefault
Expiration Date	mmyydate	ccexpiredate
Memo	text	ccmemo
State From	datetime	statefrom

- The **currency** sublist has the following fields:

Name	Type	ID
Currency	select	currency
Format Sample	text	formatsample
Override Currency Format	checkbox	overridecurrencyformat
Symbol	text	displaysymbol
Symbol Placement	select	symbolplacement

- The **download** sublist has the following fields:

Name	Type	ID
Attach File	select	file
Expiration Date	date	expiration
License Code	textarea	licensecode
Remaining Downloads	integer	remainingdownloads

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **grouppricing** sublist has the following fields:

Name	Type	ID
Price Level	select	level
Pricing Group	select	group

- The **itempricing** sublist has the following fields:

Name	Type	ID
Currency	select	currency
Item	select	item
Price Level	select	level
Unit Price	currency2	price

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **opportunities** sublist has the following fields:

Name	Type	ID
Budget Approved	checkbox	isbudgetapproved
Buying Reason	select	buyingreason
Buying Time Frame	select	buyingtimeframe
Details	textarea	memo
Estimated Budget	currency	estimatedbudget
Expected Close	date	expectedclosedate
Projected Total	currency	projectedtotal
Sales Readiness	select	salesreadiness
Status	select	entitystatus
Title	text	title

- The **partners** sublist has the following fields:

Name	Type	ID
Contribution %	percent	contribution
Partner	select	partner
Partner Role	select	partnerrole
Primary	checkbox	isprimary

- The **salesteam** sublist has the following fields:

Name	Type	ID
Contribution %	percent	contribution
Employee	select	employee
Primary	checkbox	isprimary

Name	Type	ID
Sales Role	select	salesrole

- The **submachine** sublist has the following fields:

Name	Type	ID
Balance	currency	balance
Currency	text	balancecurrency
Currency	text	depositbalancecurrency
Currency	text	unbilledcurrency
Deposit Balance	currency	depositbalance
Entity	text	entity
Inactive	text	issubinactive
Primary	text	isprimesub
Subsidiary	select	subsidiary
Unbilled Orders	currency	unbilledorders

- The **subscriptionmsgmach** sublist has the following fields:

Name	Type	ID
Author	text	author_name
Date	datetime	sentDate
Memo	text	memo
Message Type	text	type
Recipient	text	recipient_name
Recipient Email	text	email
Sender	text	sender_name

- The **subscriptions** sublist has the following fields:

Name	Type	ID
Subscribed	checkbox	subscribed
Subscription	select	subscription
Subscription	text	subscription_display

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Address	select	address
Country	select	nexuscountry
Nexus	select	nexus
State	select	nexusstate
Tax Reg. Number	text	taxregistrationnumber

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally

Name	Type	ID
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride

Name	Type	ID
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking

Name	Type	ID
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount

Name	Type	ID
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Expense Report PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Expense Report PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Account for Corporate Card Expenses	select	acctcorpcardexp
Accounting Approval	checkbox	accountingapproval
Advance to Apply	currency	advance
Advance to Apply	currency	advance2
Advance to Apply Account	select	advanceaccount
Class	select	class
Complete	checkbox	complete
Corporate Card	currency	corporatecard
Corporate Card By Default	checkbox	corpcardbydefault
Custom Form	select	customform
Date	date	trandate
Date Due	date	duedate
Department	select	department
Employee	select	entity
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Exp. Rept. #	text	tranid
Expenses Total	currency	total
ExternalId	text	externalid

Name	Type	ID
From	date	fromdate
Generate TranId on Save	checkbox	generatetransidonsave
Internal ID	text	id
Location	select	location
Nexus	select	nexus
Non-reimbursable Expenses (Tax Excl.)	currency	nonreimbursable
Posting Period	select	postingperiod
Purpose	text	memo
Reimbursable Expenses	currency	reimbursable
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Supervisor Approval	checkbox	supervisorapproval
Tax Details Override	checkbox	taxdetailsoverride
Tax Reg. Number	select	subsidiarytaxregnum
Tax Registration Override	checkbox	taxregoverride
Tax Strategy Used	text	taxstrategyused
Tax Total	currency	taxtotal
Taxes Dirty	checkbox	taxesdirty
To	date	todate
Total Reimbursable Amount	currency	amount
Transaction Number	text	transactionnumber
Use Multicurrency	checkbox	usemulticurrency

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **expense** sublist has the following fields:

Name	Type	ID
Expense Item	integer	expenseitem
Expense-Based Rules	integer	numrules
Gross Amount	currency	grossamt
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority
Start Date	date	startdate
Title	text	title

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname

Name	Type	ID
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals

Name	Type	ID
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar

Name	Type	ID
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom

Name	Type	ID
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions

Name	Type	ID
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Sales Order PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Sales Order PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Acct. No.	text	accountnumber
Allow Cross-Subsidiary Fulfillment	checkbox	iscrosssubtransaction
Auth. Code	text	authcode
Authorization ID	text	paypalauthid
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1

Name	Type	ID
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Billing Schedule	select	billingschedule
Can have stackable promotions	checkbox	canhavestackable
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Class	select	class
Coupon Code	select	couponcode
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Credit Card Select	select	creditcard
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Code	text	customercode
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Default	text	isdefaultshippingrequest
Default	float	overrideshippingcost
Deferred Revenue Reclassification Account	select	draccount
Department	select	department
Detail	text	cchold
Detail	textarea	ccholdetails

Name	Type	ID
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Enable Item Line Shipping	checkbox	ismultishipto
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
FOB	text	fob
Foreign Currency Adjustment Revenue Account	select	fxaccount
Generate TranId on Save	checkbox	generatetransave
Get Authorization	checkbox	getauth
Gift Certificate	currency	giftcertapplied
IAVS Match	select	cciaivsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Intercompany Status	select	intercostatus
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
Order #	text	tranid
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked

Name	Type	ID
P/N Ref.	text	pnrefnum
PO #	text	otherrefnum
Paired Intercompany Transaction	select	intercotransaction
Partner	select	partner
PayPal Order ID	text	paypalorderid
PayPal Status	text	paypalstatus
PayPal Tran. ID	text	paypaltranid
Payment Amount	currency	paymentsessionamount
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Process PayPal Payment	checkbox	paypalprocess
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Purchase Card BIN	checkbox	ccispurchasecardbin
Rate	rate	discountrate
Reason	select	paymenteventholdreason
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship Complete	checkbox	shipcomplete
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod

Name	Type	ID
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Status	text	orderstatus
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total

Name	Type	ID
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge Type	text	chargetype
Commit	text	commitinventory
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Project Charge Rule	text	chargerule
Quantity	float	quantity

Name	Type	ID
Rate	rate	rate
Ship To	select	shipaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname

Name	Type	ID
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals

Name	Type	ID
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar

Name	Type	ID
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom

Name	Type	ID
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions

Name	Type	ID
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Invoice PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Invoice PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
Amount	currency	expcostdiscamount
Amount	currency	itemcostdiscamount
Amount	currency	timediscamount
As of Date	date	asofdate
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1

Name	Type	ID
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Disc. Amt.	currency	discountamount
Disc. Date	date	discountdate
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Discount/Markup	select	expcostdiscount
Discount/Markup	select	itemcostdiscount
Discount/Markup	select	timediscout
Due Date	date	duedate
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate

Name	Type	ID
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetrandidonsave
Gift Certificate	currency	giftcertapplied
Internal ID	text	id
Invoice #	text	tranid
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
PO #	text	otherrefnum
Partner	select	partner
Payment Custom Data	longtext	paymentcustomdata
Posting Period	select	postingperiod
Print	checkbox	expcostdiscprint
Print	checkbox	itemcostdiscprint
Print	checkbox	timediscprint
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discountrate
Rate	rate	expcostdiscrate
Rate	rate	itemcostdiscrate
Rate	rate	timediscrate
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep

Name	Type	ID
Select Message	select	messagesel
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Stored tax reference for update	text	taxreferencetobeupdated
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms

Name	Type	ID
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **expcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Bill Amount	currency	amount
Category	text	categorydisp
Class	select	class
Date	date	billeddate
Department	select	department
Employee	text	employeeidisp
Gross Amount	currency	grossamt
Location	select	location
Memo	text	memo
Original Amount	currency	originalamount
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **itemcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Gross Amount	currency	grossamt
Item	text	itemdisp
Location	select	location
Options	namevaluelist	options
Qty	text	itemcostcount
Rate	currency2	cost

Name	Type	ID
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Total	currency	amount
Units	text	unitdisp

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

- The **time** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Employee	text	employeedisp
Gross Amount	currency	grossamt
Hours	text	quantity
Item	text	itemdisp
Location	select	location
Rate	currency2	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Units	text	unitdisp

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl

Name	Type	ID
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE

Name	Type	ID
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text

Name	Type	ID
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes

Name	Type	ID
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Purchase PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Purchase PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Base Currency	checkbox	isbasecurrency
Billing Address	address	billingaddress_text
Billing Address City	text	billcity

Name	Type	ID
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Class	select	class
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Date	date	trandate
Department	select	department
Employee	select	employee
Exchange rate	currency2	exchangerate
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetransave
Incoterm	select	incoterm
Intercompany Status	select	intercostatus
Internal ID	text	id
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
PO #	text	tranid
Paired Intercompany Transaction	select	intercotransaction
Purchase Contract	select	purchasecontract
Receive By	date	duedate

Name	Type	ID
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To	select	shipto
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Phone	text	shipphone
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Supervisor Approval	checkbox	supervisorapproval
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total

Name	Type	ID
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Vendor	address	billaddress
Vendor	select	entity
Vendor #	text	otherrefnum
Vendor Message	textarea	message
Vendor Select	select	billaddresslist
Vendor Tax Reg. Number	select	entitytaxregnum

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Description	textarea	description
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Tax Amount	currency	taxamount

Name	Type	ID
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units
Vendor Name	text	vendorname

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate

Name	Type	ID
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax

Name	Type	ID
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE

Name	Type	ID
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency

Name	Type	ID
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions

Name	Type	ID
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Quote PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Quote PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Acct. No.	text	accountnumber
Available In Customer Center	checkbox	visibletocustomer
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone

Name	Type	ID
Billing Schedule	select	billingschedule
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Enable Item Line Shipping	checkbox	ismultishipto
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Estimate #	text	tranid
Exchange Rate	currency2	exchangerate
Exp. Close	date	expectedclosedate
Expires	date	duedate
ExternalId	text	externalid
FOB	text	fob
Forecast Type	select	forecasttype
Generate TranId on Save	checkbox	generatetransave
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location

Name	Type	ID
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
PO #	text	otherrefnum
Partner	select	partner
Probability	percent	probability
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discontrate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount

Name	Type	ID
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Status	select	entitystatus
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
Title	text	title
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge Type	text	chargetype
Description	textarea	description
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate

Name	Type	ID
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname

Name	Type	ID
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment

Name	Type	ID
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT

Name	Type	ID
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Cash Refund PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Cash Refund PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account

Name	Type	ID
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
As of Date	date	asofdate
Authorization ID	text	paypalauthid
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Card Data Provided	checkbox	carddataprovied
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Check #	text	otherrefnum
Class	select	class
Coupon Code	select	couponcode
Create Check	checkbox	refundcheck
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Credit Card Select	select	creditcard
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol

Name	Type	ID
Custom Form	select	customform
Customer	select	entity
Customer Code	text	customercode
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Detail	text	cchold
Detail	textarea	ccholddetails
Discount	select	discountitem
Discount	currency	discounttotal
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransave
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
Partner	select	partner
PayPal Order ID	text	paypalorderid

Name	Type	ID
PayPal Status	text	paypalstatus
PayPal Tran. ID	text	paypaltranid
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Posting Period	select	postingperiod
Print Check	checkbox	toprint2
Process Credit Card	checkbox	chargeit
Process PayPal Payment	checkbox	paypalprocess
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Purchase Card BIN	checkbox	ccispurchasecardbin
Rate	rate	discountrate
Reason	select	paymenteventholdreason
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Refund #	text	tranid
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2

Name	Type	ID
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount

Name	Type	ID
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth

Name	Type	ID
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country

Name	Type	ID
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name

Name	Type	ID
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT

Name	Type	ID
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname

Name	Type	ID
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Cash Sale PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Cash Sale PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
Amount	currency	expcostdiscamount
Amount	currency	itemcostdiscamount
Amount	currency	timediscamount
As of Date	date	asofdate
Auth. Code	text	authcode
Authorization ID	text	paypalauthid
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode

Name	Type	ID
Charge Credit Card	checkbox	chargeit
Check #	text	otherrefnum
Class	select	class
Coupon Code	select	couponcode
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Credit Card Select	select	creditcard
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Code	text	customercode
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Deposit To	radio	undepfunds
Detail	text	cchold
Detail	textarea	ccholddetails
Discount Item	select	discountitem
Discount Item	currency	discounttotal
Discount/Markup	select	expcostdiscount
Discount/Markup	select	itemcostdiscount
Discount/Markup	select	timediscout
Enable Item Line Shipping	checkbox	ismultishipto
End Date	date	enddate
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission

Name	Type	ID
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetransave
Gift Certificate	currency	giftcertapplied
IAVS Match	select	cciavsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
Opportunity	select	opportunity
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
P/N Ref.	text	pnrefnum
Partner	select	partner
PayPal Order ID	text	paypalorderid
PayPal Status	text	paypalstatus
PayPal Tran. ID	text	paypaltranid
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Posting Period	select	postingperiod
Print	checkbox	expcostdiscprint
Print	checkbox	itemcostdiscprint

Name	Type	ID
Print	checkbox	timediscprint
Process PayPal Payment	checkbox	paypalprocess
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Purchase Card BIN	checkbox	ccispurchasecardbin
Rate	rate	discountrate
Rate	rate	expcostdiscrate
Rate	rate	itemcostdiscrate
Rate	rate	timediscrate
Reason	select	paymenteventholdreason
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Sale #	text	tranid
Sales Effective Date	date	saleeffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip

Name	Type	ID
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **expcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Bill Amount	currency	amount
Category	text	categorydisp
Class	select	class
Date	date	billeddate
Department	select	department
Employee	text	employeeedisp
Gross Amount	currency	grossamt
Location	select	location
Memo	text	memo
Original Amount	currency	originalamount
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
License Code	textarea	licensecode
Line Number	integer	linenumber
Matrix Type	text	matrixtype

Name	Type	ID
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **itemcost** sublist has the following fields:

Name	Type	ID
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Gross Amount	currency	grossamt
Item	text	itemdisp
Location	select	location
Options	namevaluelist	options
Qty	text	itemcostcount
Rate	currency2	cost
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Total	currency	amount
Units	text	unitdisp

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount

Name	Type	ID
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

- The **time** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Apply	checkbox	apply
Class	select	class
Date	date	billeddate
Department	select	department
Description	text	memo
Employee	text	employeedisp
Gross Amount	currency	grossamt
Hours	text	quantity
Item	text	itemdisp
Location	select	location
Rate	currency2	rate
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Units	text	unitdisp

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo

Name	Type	ID
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone

Name	Type	ID
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition

Name	Type	ID
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo

Name	Type	ID
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape

Name	Type	ID
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Return Authorization PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Return Authorization PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Acct. No.	text	accountnumber
Allow Cross-Subsidiary Customer Return	checkbox	iscrosssubtransaction
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate

Name	Type	ID
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Created From	select	createdfrom
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Deferred Revenue Reclassification Account	select	draccount
Department	select	department
Discount	select	discountitem
Discount	currency	discounttotal
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
ExternalId	text	externalid
Foreign Currency Adjustment Revenue Account	select	fxaccount
Generate TranId on Save	checkbox	generatetransave
Intercompany Status	select	intercostatus
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource

Name	Type	ID
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
PO #	text	otherrefnum
Paired Intercompany Transaction	select	intercotransaction
Partner	select	partner
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discountrate
Rtn. Auth. #	text	tranid
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Phone	text	shipphone
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Status	text	orderstatus

Name	Type	ID
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Amount	currency	amount
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber

Name	Type	ID
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Unit Price	rate	rate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname

Name	Type	ID
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar

Name	Type	ID
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREF
Document Number Prefix	text	tranprefix

Name	Type	ID
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo

Name	Type	ID
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers

Name	Type	ID
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Credit Memo PDF/HTML Template (SuiteTax)

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Credit Memo PDF/HTML Template (SuiteTax) template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Account	select	account
Acct. No.	text	accountnumber
Add Charges	select	whichchargestoadd
Applied	currency	applied
As of Date	date	asofdate
Auto Apply	checkbox	autoapply
Balance	currency	balance
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Bill To Select	select	billaddresslist
Billing Address	address	billingaddress_text

Name	Type	ID
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can have stackable promotions	checkbox	canhavestackable
Class	select	class
Coupon Code	select	couponcode
Credit #	text	tranid
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Message	textarea	message
Customer Tax Reg. Number	select	entitytaxregnum
Date	date	trandate
Department	select	department
Discount	select	discountitem
Discount	currency	discounttotal
Enable Item Line Shipping	checkbox	ismultishipto
Est. Extended Cost	currency	totalcostestimate
Est. Gross Profit	currency	estgrossprofit
Est. Gross Profit Percent	percent	estgrossprofitpercent
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering

Name	Type	ID
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetrandidonsave
Internal ID	text	id
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Nexus	select	nexus
Nexus Override	checkbox	taxregoverride
PO #	text	otherrefnum
Partner	select	partner
Payment Custom Data	longtext	paymentcustomdata
Posting Period	select	postingperiod
Project	text	project
Promo Code	text	muccpromocodeinstance
Promo Code	text	promocodepluginimpl
Promotion	select	promocode
Rate	rate	discontrate
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip

Name	Type	ID
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Stored tax reference for update	text	taxreferencetobeupdated
Submission Id	text	bulksubmissionid
Subsidiary	select	subsidiary
Subsidiary Tax Reg. Number	select	subsidiarytaxregnum
Subtotal	currency	subtotal
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Be E-mailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Total	currency	total
Total After Taxes	currency	totalaftertaxes
Transaction Number	text	transactionnumber
Unapplied	currency	unapplied
Unbilled Orders	currency	unbilledorders

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency

Name	Type	ID
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **apply** sublist has the following fields:

Name	Type	ID
Amt. Due	currency	due
Apply	checkbox	apply
Currency	text	currency
Date	date	applydate
Hidden	text	internalid
Hidden	text	trantype
Orig. Amt.	currency	total
Payment	currency	amount
Ref No.	text	refnum
Type	text	type

- The **item** sublist has the following fields:

Name	Type	ID
Address	address	shippingaddress_text
Amount	currency	amount
Carrier	select	shipcarrier
Charge	text	charge
Charge Type	text	chargetype
Charges	multiselect	charges
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Gross Amt	currency	grossamt
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Quantity	float	quantity
Rate	rate	rate
Ship To	select	shipaddress

Name	Type	ID
Ship Via	select	shipmethod
Tax Amount	currency	taxamount
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate

Name	Type	ID
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREF
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax

Name	Type	ID
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE

Name	Type	ID
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency

Name	Type	ID
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions

Name	Type	ID
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Packing Slip PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Packing Slip PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Address	address	shipaddress
Address 1	text	shipaddr1
Address 2	text	shipaddr2
Address 3	text	shipaddr3
Addressee	text	shipcompany
Attention	text	shipattention
Base Currency	checkbox	isbasecurrency
City	text	shipcity
Country	text	shipcountry
Custom Form	select	customform
Customer:Job	select	entity
Date	date	trandate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Fulfillment of	select	createdfrom
Generate TranId on Save	checkbox	generatetransave
Internal ID	text	id

Name	Type	ID
Memo	text	memo
Phone	phone	shipphone
Posting Period	select	postingperiod
Ref No.	text	tranid
Residential Address	checkbox	shipisresidential
Select Address	select	shipaddresslist
Ship Via	select	shipmethod
Shipping Address	address	shippingaddress_text
Shipping Cost	currency	shippingcost
State/Province	text	shipstate
Transaction Number	text	transactionnumber
Zip	text	shipzip

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **item** sublist has the following fields:

Name	Type	ID
Back Ordered	float	quantityremainingdisplay
Class	text	class
Department	text	department
Description	text	description
Description	text	itemdescription
Drop Ship PO	text	createpo
Exclude Item from Rate Request	checkbox	excludefromraterequest
Fulfill	checkbox	itemreceive
Item	text	itemkey
Item	text	itemname
Item	text	sitemname
Job	text	jobname
Location	text	location
On Hand	float	onhand
Options	namevaluelist	options

Name	Type	ID
Quantity Remaining	float	quantityremaining
Shipped	posfloat	quantity
Units	text	unitsdisplay

- The **package** sublist has the following fields:

Name	Type	ID
Package Contents Description	textarea	packagedescr
Package Tracking Number	text	packagetrackingnumber
Weight	posfloat	packageweight

Sales Order – salesorder

The following fields are available for the Sales Order record.

Name	Type	ID
AVS Street Match	select	ccavsstreetmatch
AVS Zip Match	select	ccavszipmatch
Acct. No.	text	accountnumber
Allow Cross-Subsidiary Fulfillment	checkbox	iscrosssubtransaction
Auth. Code	text	authcode
Authorization ID	text	paypalauthid
Base Currency	checkbox	isbasecurrency
Bill To	address	billaddress
Billing Address	address	billingaddress_text
Billing Address City	text	billcity
Billing Address Country	text	billcountry
Billing Address Line 1	text	billaddr1
Billing Address Line 2	text	billaddr2
Billing Address Line 3	text	billaddr3
Billing Address State	text	billstate
Billing Address Zip Code	text	billzip
Billing Addressee	text	billaddressee
Billing Attention	text	billattention
Billing Phone	text	billphone
Can Stack Promotions	checkbox	canhavestackable

Name	Type	ID
Card Data Provided	checkbox	carddatapprovided
Card Street	text	ccstreet
Card Zip Code	text	cczipcode
Cards on File	select	creditcard
Class	select	class
Credit Card #	ccnumber	ccnumber
Credit Card Approved	checkbox	ccapproved
Currency	select	currency
Currency	text	currencyname
Currency Symbol	text	currencysymbol
Custom Form	select	customform
Customer	select	entity
Customer Code	text	customercode
Customer Message	textarea	message
Default	text	isdefaultshippingrequest
Default	float	overrideshippingcost
Department	select	department
Detail	text	cchold
Detail	textarea	ccholddetails
End Date	date	enddate
Exchange Rate	currency2	exchangerate
Exclude Commissions	checkbox	excludecommission
Expires (MM/YYYY)	ccexpdate	ccexpiredate
ExternalId	text	externalid
FOB	text	fob
Generate TranId on Save	checkbox	generatetrandidonsave
Get Authorization	checkbox	getauth
IAVS Match	select	cciaavsmatch
Ignore AVS	checkbox	ignoreavs
Ignore CSC	checkbox	ignorecsc
Intercompany Status	select	intercostatus
Internal ID	text	id

Name	Type	ID
Job	select	job
Lead Source	select	leadsource
Location	select	location
Memo	text	memo
Name on Card	text	ccname
Nexus	select	nexus
Opportunity	select	opportunity
Order #	text	tranid
Order Date	date	trandate
Order Status	text	orderstatus
Override Hold	checkbox	overridehold
Override Hold	checkbox	overrideholdchecked
P/N Ref.	text	pnrefnum
PO #	text	otherrefnum
Paired Intercompany Transaction	select	intercotransaction
Partner	select	partner
PayPal Order ID	text	paypalorderid
Payment Amount	currency	paymentsessionamount
Payment Custom Data	longtext	paymentcustomdata
Payment Method	select	paymentmethod
Payment Operation	select	paymentoperation
Payment Processing Profile	select	creditcardprocessor
Process PayPal Payment	checkbox	paypalprocess
Project	text	project
Purchase Card BIN	checkbox	ccispurchasecardbin
Reason	select	paymenteventholdreason
Recurring Payment	checkbox	isrecurringpayment
Redirect From URL	url	returnurl
Redirect to URL	url	redirecturl
Sales Effective Date	date	saleseffectivedate
Sales Rep	select	salesrep
Select Message	select	messagesel

Name	Type	ID
Send Line-Level Data	checkbox	ccprocessaspurchasecard
Ship Complete	checkbox	shipcomplete
Ship Date	date	shipdate
Ship To	address	shipaddress
Ship To Select	select	shipaddresslist
Ship Via	select	shipmethod
Shipment #	text	shipid
Shipping Address	address	shippingaddress_text
Shipping Address City	text	shipcity
Shipping Address Country	text	shipcountry
Shipping Address Line 1	text	shipaddr1
Shipping Address Line 2	text	shipaddr2
Shipping Address Line 3	text	shipaddr3
Shipping Address State	text	shipstate
Shipping Address Zip Code	text	shipzip
Shipping Addressee	text	shipaddressee
Shipping Attention	text	shipattention
Shipping Cost	currency	shippingcost
Shipping Cost Overridden	text	shippingcostoverridden
Shipping Phone	text	shipphone
Shipping Tax Amount	currency	shippingtaxamount
Shipping address is residential	text	billisresidential
Shipping address is residential	text	shipisresidential
Start Date	date	startdate
Status	select	paymenteventresult
Stored tax reference for update	text	taxreferencetobeupdated
Subsidiary	select	subsidiary
Tax	currency	taxtotal
Tax Details Override	checkbox	taxdetailsoverride
Tax Reg. Number	select	entitytaxregnum
Tax Reg. Number	select	subsidiarytaxregnum
Tax Registration Override	checkbox	taxregoverride

Name	Type	ID
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
Terms	select	terms
To Be Emailed	checkbox	tobeemailed
To Be Faxed	checkbox	tobefaxed
To Be Printed	checkbox	tobeprinted
Tracking #	text	linkedtrackingnumbers
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Sales Order record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **item** sublist has the following fields:

Name	Type	ID
Charge Type	text	chargetype
Commit	text	commitinventory
Description	textarea	description
Direct Revenue Posting	text	directrevenueposting
Item	select	item
Item Type	text	itemtype
Item subtype	text	itemsubtype
Line Number	integer	linenumber
Matrix Type	text	matrixtype
Minimum Quantity	float	minqty
Options	namevaluelist	options
Print Items	text	printitems
Project Charge Rule	text	chargerule
Rate	rate	rate
Shipped	float	quantity

Name	Type	ID
Tax Details Reference	text	taxdetailsreference
Units	select	units

- The **taxdetails** sublist has the following fields:

Name	Type	ID
Details	textarea	calcdetail
Gross Amount	currency	grossamount
Line Number	posinteger	linenumber
Line type	text	linetype
Name	text	linename
Net Amount	currency	netamount
Tax Amount	currency	taxamount
Tax Basis	currency	taxbasis
Tax Code	select	taxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	taxrate
Tax Type	select	taxtype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency

Name	Type	ID
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent

Name	Type	ID
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejebyssegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK

Name	Type	ID
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE

Name	Type	ID
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine

Name	Type	ID
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Journal Entry PDF/HTML Template

Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Journal Entry PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Approved	checkbox	approved
Base Currency	checkbox	isbasecurrency
Count	text	expenseallocjournalcount
Created from Allocation	select	parentexpensealloc
Credit	currency	credittotal
Currency	select	currency
Custom Approval	checkbox	iscustomapproval
Custom Form	select	customform
Date	date	trandate
Debit	currency	debittotal
Defer Entry	checkbox	reversaldefer
Entry No.	text	tranid
Exchange Rate	currency2	exchangerate
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetrandidonsave
Internal ID	text	id
Memo	text	memo
Nexus	select	nexus

Name	Type	ID
Out of Balance By	label	outofbalanceby
Posting Period	select	postingperiod
Reversal Date	date	reversaldate
Subsidiary	select	subsidiary
Tax Details Override	checkbox	taxdetailsoverride
Tax Reg. Number	select	subsidiarytaxregnum
Tax Registration Override	checkbox	taxregoverride
Tax Strategy Used	text	taxstrategyused
Taxes Dirty	checkbox	taxesdirty
To Subsidiary	select	tosubsidiary
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Exchange Rate	currency2	exchangerate
Secondary Book	select	accountingbook

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location

Name	Type	ID
Start Time	timeofday	starttime
Title	text	title

- The **line** sublist has the following fields:

Name	Type	ID
Account	select	account
Class	select	class
Credit	currency	credit
Credit Tax	currency	credittax
Debit	currency	debit
Debit Tax	currency	debittax
Department	select	department
Eliminate	checkbox	eliminate
End Date	date	enddate
Location	select	location
Memo	text	memo
Name	select	entity
Residual	rate	residual
Schedule	select	schedule
Start Date	date	startdate
Tax Account	select	taxaccount
Tax Code	select	linetaxcode
Tax Details Reference	text	taxdetailsreference
Tax Rate	percent	linetaxrate
Total Amount	currency	totalamount

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority

Name	Type	ID
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail

Name	Type	ID
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER

Name	Type	ID
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejbysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id

Name	Type	ID
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount

Name	Type	ID
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Standard Period End Journal PDF/HTML Template



Note: The list in this reference topic isn't exhaustive. The fields and sublists available in advanced PDF/HTML templates depend on the features you enable in your account and any custom fields you create. Therefore, the list may include fields that aren't available in your account, and at the same time it may not include all fields that you can access.

You can view the fields and sublists available for a specific template in the Field selector in the advanced templates editor. For more information, see [Adding and Removing Fields in Advanced Templates](#).

The fields and sublists available in the Standard Period End Journal PDF/HTML Template template are listed below.

Record – record

The following fields are available for the Record record.

Name	Type	ID
Accounting Book	select	accountingbook
Class	select	class
Credit	currency	credittotal
Currency	select	currency
Custom Form	select	customform
Date	date	trandate
Debit	currency	debittotal
Department	select	department
Entry No.	text	tranid
Exclude from GL Audit Numbering	checkbox	excludefromglnumbering
ExternalId	text	externalid
Generate TranId on Save	checkbox	generatetransave
Internal ID	text	id
Location	select	location
Main Account	select	mainaccount
Memo	text	memo
Posting Period	select	postingperiod
Source Subsidiary	select	sourcesubsidiary
Subsidiary	select	subsidiary
Transaction Number	text	transactionnumber

Sublists

The following sublists are available for the Record record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **calls** sublist has the following fields:

Name	Type	ID
Date	date	startdate
Organizer	select	assigned
Phone Number	phone	phone
Subject	text	title

- The **events** sublist has the following fields:

Name	Type	ID
All Day	checkbox	alldayevent
Date	date	startdate
End Time	timeofday	endtime
Location	text	location
Start Time	timeofday	starttime
Title	text	title

- The **line** sublist has the following fields:

Name	Type	ID
Account	select	account
Credit	currency	credit
Debit	currency	debit
Memo	text	memo

- The **mediaitem** sublist has the following fields:

Name	Type	ID
Attach File	select	mediaitem
File Type	text	filetype
Folder	text	folder
Last Modified	datetime	lastmodifieddate
Size (kB)	float	filesize

- The **tasks** sublist has the following fields:

Name	Type	ID
Due Date	date	duedate
Priority	select	priority

Name	Type	ID
Start Date	date	startdate
Title	text	title

- The **usernotes** sublist has the following fields:

Name	Type	ID
Date	date	notedate
Direction	select	direction
Memo	textarea	note
Time	timeofday	time
Title	text	title
Type	select	notetype

Company Information – companyinformation

The following fields are available for the Company Information record.

Name	Type	ID
Account ID	text	companyid
Account ID	text	prevparent
Address	text	addresstext
Address	text	mainaddress_text
Allowed IP Addresses	text	ipaddressrules
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Company Logo (Forms)	text	formlogo
Company Logo (Pages)	text	pagelogo
Company Name	text	companyname
Country	text	country
County/State/Province	text	dropdownstate
County/State/Province	text	state
Currency	text	basecurrency
Customer Center Login	text	customersurl
Display Logo Internally	checkbox	displaylogointernally
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Email Address	text	adminemail

Name	Type	ID
External Forms	text	formsurl
ExternalId	text	externalid
Fax	text	fax
First Fiscal Month	text	fiscalmonth
Fiscal Calendar	text	fiscalcalendar
Intercompany Account	text	intercoaccount
Internal ID	text	id
Legal Name	text	legalname
Name	text	name
NetSuite UI	text	appurl
Rest (RESTlets)	text	restleturl
Return Address	text	returnaddress_text
Return Email Address	text	email
Shipping Address	text	shippingaddress_text
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	text	parent
SuiteAnalytics Connect (ODBC)	text	odbcurl
SuiteTalk (web services)	text	suitetalkurl
Tax Fiscal Calendar	text	taxfiscalcalendar
Time Zone	text	timezone
Web Site	text	url

Subsidiary – subsidiary

The following fields are available for the Subsidiary record.

Name	Type	ID
Account ID	select	prevparent
Address	address	mainaddress_text
Allow Customer Override	checkbox	issuecustomernotificationoverride
Always Display Subsidiary Name	checkbox	showsubsidiaryname
Balance Sheet Closing Account	select	bsclosingacct
Balance Sheet Opening Account	select	bsopeningacct
CSV column delimiter	select	CSV_COLUMN_DELIMITER

Name	Type	ID
CSV decimal delimiter	select	CSV_DECIMAL_DELIMITER
Calendar System	select	CALENDARSYSTEM
Check Default Chart Type	select	checklayout
Country	select	country
Create Balance Sheet Closing and Opening Journals	checkbox	enablebscloseandopen
Create Income Summary Journals	checkbox	enableincomesummarystep
Create Period End Journals By Segment	checkbox	createpejbysegment
Currency	text	currency
Customer Center Email Template	select	CUSTCENTEREMAILTEMPLATE
Customer Template	select	issuecustomertemplate
Date Format	select	DATEFORMAT
Default Account for Corporate Card Expenses	select	DEFAULTACCTCORPCARDEXP
Default Advance to Apply Account for Expense Reports	select	DEFAULT_ADVANCE_ACCT_FOR_EXPREPT
Default Case Profile	select	defaultcaseprofile
Default Check Type	select	CHECKTYPE
Default Payable Account for Expense Reports	select	DEFAULTAPACCOUNTFOREXPREPT
Document Number Prefix	text	tranprefix
Edition	text	edition
Elimination	checkbox	iselimination
Employee Template	select	issueemployeetemplate
Enable Period End Journal Entries	checkbox	enableperiodendjournals
ExternalId	text	externalid
Fax	text	fax
First Day of Week	select	FIRSTDAYOFWEEK
Fiscal Calendar	select	fiscalcalendar
GL Impact Locking	checkbox	glimpactlocking
Income Summary Loss Account	select	islossacct
Income Summary Profit Account	select	isprofitacct
Intercompany Account	select	intercoaccount
Internal ID	text	id

Name	Type	ID
Language	select	languagelocale
Legal Name	text	legalname
Long Date Format	select	LONGDATEFORMAT
Name	text	name
Negative Number Format	select	NEGATIVE_NUMBER_FORMAT
Number Format	select	NUMBERFORMAT
Partner Center Email Template	select	PARTCENTEREMAILTEMPLATE
Phone Number Format	select	PHONEFORMAT
Require Memo on Period End Journals	checkbox	requirepejememo
Return Address	address	returnaddress_text
Return Email Address	email	email
Round Time Entry Duration	select	roundtime
Search Sorting	select	SEARCHSORTING
Send Customer Notifications When	select	issuecustomernotification
Shipping Address	address	shippingaddress_text
Spelling Locale	select	SPELL_LOCALE
State/Province	select	dropdownstate
State/Province	text	state
Subsidiary Logo (Forms)	select	logo
Subsidiary Logo (Pages)	select	pagelogo
Subsidiary is Inactive	checkbox	isinactive
Subsubsidiary of	select	parent
Tax Fiscal Calendar	select	taxfiscalcalendar
Time Format	select	TIMEFORMAT
Time Zone	select	TIMEZONE
Use In-Transit Vendor Payments By Default	checkbox	DEFAULTVENDORPAYMENTTYPE
User Access Email Template	select	EMAILACCESSTEMPLATE
Vendor Bill - Item Receipt Amount Tolerance	posfloat	receiptamount
Vendor Bill - Item Receipt Quantity Difference	posfloat	receiptquantitydiff
Vendor Bill - Item Receipt Quantity Tolerance	posfloat	receiptquantity
Vendor Bill - Purchase Order Amount Tolerance	posfloat	purchaseorderamount

Name	Type	ID
Vendor Bill - Purchase Order Quantity Difference	posfloat	purchaseorderquantitydiff
Vendor Bill - Purchase Order Quantity Tolerance	posfloat	purchaseorderquantity
Vendor In-Transit Payment Account	select	VENDORITPACCOUNT
Web Site	text	url

Sublists

The following sublists are available for the Subsidiary record.

To add a sublist to your template, use the record and the sublist, for example, customer.addressbook. For information about adding sublists to a template, see [Sublists and Other Lists](#).

- The **accountingbookdetail** sublist has the following fields:

Name	Type	ID
Base Currency	select	currency
Enable Period End Journal Entries	checkbox	enableperiodendjournals
Secondary Book	select	accountingbook
Status	select	bookstatusname

- The **classtranslation** sublist has the following fields:

Name	Type	ID
Language	text	language
Name	text	name

- The **taxregistration** sublist has the following fields:

Name	Type	ID
Country	select	nexuscountry
Effective From	date	effectivefrom
Nexus	select	nexus
Tax Agency	select	taxagency
Tax Engine	select	taxengine
Tax Reg. Number	text	taxregistrationnumber
Valid Until	date	validuntil

User – user

The following fields are available for the User record.

Name	Type	ID
Alt. Email	text	altemail
Email	text	email
First Name	text	firstname
Last Name	text	lastname
Middle Name	text	middlename
Phone	text	phone

Preference – preferences

The following fields are available for the Preference record.

Name	Type	ID
Bar Code	checkbox	print_barcodes
Name for Case	text	naming_case
Name for Customer	text	naming_customer
Name for Lead	text	naming_lead
Print Accounts on Vouchers	checkbox	voucheraccount
Print Business Number on Forms	checkbox	printfednum
Print Discount and Shipping Lines in Columns	checkbox	inlinediscountshipping
Print Remittance Form with {#Invoices#} & Statements	checkbox	remittanceform
Print Return Form with Packing Slip	checkbox	returnform
Print Separate Voucher for {#Bill#} {#Payments#}	checkbox	paymentvouchers
Print Transaction Forms Landscape	checkbox	formlandscape
Time Zone	text	timezone
Use Multiple Versions and Builds	checkbox	issue_multiple_versions
Use {#Location#} Address on Forms	checkbox	printlocaddress
{#Customers#} Default to Print Transactions	checkbox	customerprinttransactions
{#Vendors#} Default to Print Transactions	checkbox	vendorprinttransactions

Scriptable Templates

i Applies to: Administration | Email | Marketing

You can create dynamic scriptable templates for email marketing campaigns and system email. Scriptable templates produce personalized output and give you control over the presentation of your email communication.

Scriptable templates, for example, let you create a single template that offers individualized upsell items to each recipient, based on each customer's purchase history.

You can create scriptable templates for any type of email sent from NetSuite, including:

- marketing campaign email templates
- email and fax templates (including bulk merge templates)
- system email templates
- email and faxes sent from the Communication subtab of records
- email and faxes sent from the Messages subtab of transactions

i Note: To work with email templates, you need View level of Email Template permission. For more information about permissions, see the help topic [NetSuite Permissions Overview](#).

For more information, see the following sections:

- [HTML and FreeMarker for Scriptable Templates](#)
- [FreeMarker Data Model](#)
- [FreeMarker Syntax](#)
- [Synthetic Fields for Scriptable Templates](#)
- [Sample Scriptable Templates](#)
- [Converting CRMSDK Templates to Scriptable Templates](#)

HTML and FreeMarker for Scriptable Templates

i Applies to: Administration | Email | Marketing

Scriptable templates use a combination of HTML and FreeMarker code. FreeMarker is a tool that generates text output based on templates. With FreeMarker syntax, you can add dynamic variables to your HTML text that permit customized output. These variables give you more flexibility and customization than CRMSDK tags that are used in version 1 templates. For example, with scriptable templates, you can include conditions, loops, lists (arrays), and variables and define complex expressions like string operations and arithmetic calculations. You can use standard FreeMarker directives, define custom directives, and use other standard FreeMarker functions.

For complete information about using FreeMarker, see the [FreeMarker website](#). A useful resource for user's new to template creation, is the [Template Author's Guide](#).

FreeMarker Data Model

i Applies to: Administration | Email | Marketing

The FreeMarker data model uses a tree structure that's filled with data from NetSuite that matches the context in which a template is being used. Context determines which records you can reference for each type of email.

The NetSuite FreeMarker data model includes the following contexts and their supported records:

Context (Email Type)	Supported Records
Campaign and Sales Campaign Email	entity (either customer, contact, vendor, partner, or employee), parent company (if recipient is a contact), campaign event (couponCode field only)
Support Case Notification	case, customer
Customer Issue Notification	issue, case
Employee Issue Notification	issue
Online Form Notification	customer, online customer form (name field only)
Login Access Notification	entity
Marketing Subscriptions Opt-In Email	entity, subsidiary (mainaddress, name, edition, showsubsidiaryname, shippingaddress, federalidnumber, and returnaddress fields only)
Web Site Digital Delivery Notifications	- web site, customer, sales order: available for all notifications - cash sale: available for all notifications except Gift Certificate notification - gift certificate: available for only Gift Certificate Notification and Gift Certificate Confirmation Notification
Web Site Order Notifications	- web site, customer, sales order: available for all notifications - item fulfilment: available for only Order Fulfilled notification
Web Site Other Notifications	web site, customer

FreeMarker includes three types of nodes, or points where data is linked:

- **scalars** – Usually, these include field values from NetSuite records. Scalars can include data in all of NetSuite's supported field types. For example, the Email field on a contact record is a scalar.
- **hashes** – These are variables that act as directories. Typically, these refer to records and sublists in NetSuite. Hashes can't be written to the email text, but instead they're used to look up fields (scalars) using dot notation. For example, the customer record is a hash.
- **sequences** – These are containers that store a list of variables. In NetSuite, these are used to return variables from sublists. Sequences let you access sublist variables using numbers in square brackets, starting at 0. For example, the list of contacts on the Contacts subtab of the customer record is a sequence.

You can also use include directives to reference subtemplates that you use.

i Note: Scriptable templates use the same record, field, and sublist IDs that are used in SuiteScript. Refer to the [SuiteScript Records Browser](#) for a complete list of these IDs. You can use camel case or lower case in FreeMarker code.

Scriptable templates also have extra synthetic fields for each context that you can't get in SuiteScript. For descriptions and a complete list of these fields, see [Synthetic Fields for Scriptable Templates](#).

FreeMarker Syntax

i Applies to: Administration | Email | Marketing

i Note: Scriptable templates use the same record, field, and sublist IDs that are used in SuiteScript. Refer to the [SuiteScript Records Browser](#) for a complete list of these IDs in the Internal ID column. You can use camel case or lower case in FreeMarker code.

For complete information about using FreeMarker, see the [FreeMarker website](#). If you're new to templates, see the [Template Author's Guide](#).

✓ Tip: To make field IDs visible, go to Home > Set Preferences and ensure that the **Show Internal IDs** box is checked on the General subtab, Defaults area. In the NetSuite user interface, click the field label to display the field level help text and the field ID in a popup window.

When inserting certain HTML elements such as font or color tags within the FreeMarker code, insert BEGIN and END tags to the syntax like so:

```
1 | <!--FM:BEGIN--><font color="<#if (customer.overdueBalance > 0)>red<#else>blue</if>">Customer Account Health</font><!--FM:END-->
```

This keeps the enclosing quotes in your code and prevents errors when saving the template.

You can get values for fields that appear in the body of a record (as opposed to on a record's sublists) using the following syntax:

```
1 | ${record.field}
```

For example, to reference the phone field on the customer record, you would use:

```
1 | ${customer.phone}
```

You can insert values from all lines in a sublist in a scriptable template using a list directive with the following syntax:

```
1 | <#list record.sublist as sublistItem>
2 |     ${sublistItem.field}
3 | </#list>
```

For example, you might use the following code to list the contacts and their email addresses for a customer:

```
1 | <#list customer.contactRoles as cr>
2 |     ${cr.contact}, ${cr.email}
3 | </#list>
```

You can refer to fields from rows in sublists using the following syntax. The numeral in square brackets indicates which record from the sublist is being referenced. When referencing directly using square brackets, use the `?has_content` function.

```
1 | <#if record.sublist[#]?has_content>${record.sublist[#].field}</#if>
```

For example, to reference the name of the secondary contact on a customer record, first query to see if there are least two contact names, if yes, return the name from that sublist.

```
1 | <#if 1 <customer.contactRoles?size > ${customer.contactRoles[1].contact}</#if>
```

To include the email signature you created in your user preferences Home > Set Preferences, add the following FreeMarker syntax into your scriptable email template. `${preferences.message_signature}`.

For examples of scriptable templates, see [Sample Scriptable Templates](#).

Inserting Subtemplates into Templates

i Applies to: Administration | Email | Marketing

You can use the `include` directive to add another template inside of your template. This is useful when you have information you want to use in many templates. For example, you might make a template as a header for all your communication. The header may include your company logo and contact information. The `include` directive can reference template files by URL or File Cabinet ID.

For example, to add a template in the NetSuite File Cabinet with the internal ID of 123, you could use:

```
1 | <#include "123">
```

i Note: The number must be a file ID, not a template ID.

To insert a template by referencing the URL, you could use:

```
1 | <#include "http://example.com/templates/myheader.ftl">
```

! Important: If you include templates from outside NetSuite, your email might not generate properly if there's a problem with the URL or hosting site. Additionally, if the hosting website doesn't respond to the request for the template within five seconds, the email message is generated without that template. If the hosting website is an SSL site, it must have a trusted SSL certificate.

Templates that you insert with `include` directives can't have their own `include` directives.

Custom Record Fields

You can reference fields on custom records using the same syntax used for standard fields and records:

```
1 | {recordID.fieldID}
```

For example, if you want to reference a field with the internal ID `customfield1` on a custom record with internal ID `customrecord1`, you can use:

```
1 | {customrecord1.customfield1}
```

Including Images and Files

You can include images and files in scriptable templates.

There are three standard image fields you can add to scriptable templates:

- Item Display Image (ID: `storeDisplayImage`) - item record
- Item Display Thumbnail (ID: `storeDisplayThumbnail`) - item record
- Image (ID: `image`) - entity records

References to these images are structured like this:

```
1 | 
```

Including this code in a template creates a link to the image using the publishable URL on the image's file record in the File Cabinet.

To include a link to a file in a scriptable template, reference the file record ID in an insert directive. For example, the following code adds the publishable file URL for file 123 in your email message:

```
1 | <#include "123">
```

You can also include image and file custom fields in your templates.

Creating Scriptable Templates

Applies to: Administration | Email | Marketing

You can make scriptable templates in a text or HTML editor outside NetSuite, or use the Text Editor on the Template subtab of the template record. If you create a scriptable template outside NetSuite, save it as a plain text (.txt) or HTML (.html or .htm) file.

When updating system email templates (at Setup > Company > Company Management > System Email Templates) you can update the standard scriptable version of a system email template, by editing the template appended with **2.0**.

If you want to write your own email or fax from a transaction or entity record, select the template type in the Template Format field, then use the Field Type and Insert Field lists to add fields to your message.

Note: If you use the UK Edition, your business address and VAT number go in the footer of all emails you send outside your company to comply with UK law.

Synthetic Fields for Scriptable Templates

Applies to: Administration | Email | Marketing

In addition to the fields on supported records, there are additional fields that you can't use in SuiteScript, but can use in scriptable templates. See the following topics for more information about the synthetic fields for scriptable templates:

- [Personal and Company Preferences in Scriptable Templates](#)
- [Customer Record Synthetic Fields](#)
- [Subsidiary Record Synthetic Fields](#)
- [Sales Rep Fields](#)
- [Subscription Category Fields](#)
- [Subscription Center Synthetic Fields](#)
- [Support Case Notification Synthetic Fields](#)
- [Issue Notification Synthetic Fields](#)
- [Online Form Notification Synthetic Fields](#)
- [Campaign and Sales Campaign Email Template Synthetic Fields](#)
- [User Fields](#)

- Case Record Fields
- Web Site Notification Fields
- Web Site Record Fields
- Sales Order Record Fields
- Cash Sale Record Fields
- Item Fulfillment Record Fields

Personal and Company Preferences in Scriptable Templates

Applies to: Administration | Email | Marketing

You can add information from some personal and company preferences in scriptable templates. The following table lists the preferences you can include in your FreeMarker code.

Location/Description	Preference Name	Code
Personal Preferences (Home > Set Preferences)	■ Signature ■ Nickname ■ Time Zone	■ <code>\${preferences.message_signature}</code> ■ <code>\${preferences.message_nickname}</code> ■ <code>\${preferences.timezone}</code>
Rename Records/Transactions	■ Name for Customer ■ Name for Lead	■ <code>\${preferences.naming_customer}</code> ■ <code>\${preferences.naming_lead}</code>
Issue Preferences (Setup > Issues > Issue Preferences)	Use Multiple Versions and Builds	<code>\${preferences.issue_multiple_versions}</code>
Company Settings (Setup > Company > Company Information)	Company Logo (Forms)	<code>\${companyInformation.logoUrl}</code>
Administrator Email Address (used for login access notification)	—	<code>\${companyInformation.adminEmail}</code>
Login URL (used for login access notification email)	—	<code>\${companyInformation.loginURL}</code>

Note: If the Use Multiple Versions and Builds preference is enabled, versions and builds are presented as sublists of values. You can use this preference with a directive to show build and version information regardless of whether this preference is enabled.

Customer Record Synthetic Fields

Applies to: Administration | Email | Marketing

You can reference the following synthetic fields in any context that includes the customer record:

Sublist (where applicable)	Field and Description
—	url : The URL for the customer record in your NetSuite account.
relatedItems	■ purchasedItem : Name of the item purchased. Used to determine related items.

Sublist (where applicable)	Field and Description
	■ <code>upsellItem</code> : Name of related item. ■ <code>sellable</code> : Indicates whether the item is available for sale.
correlatedItems	■ <code>purchasedItem</code> : Name of the item purchased. Used to determine upsell items. ■ <code>upsellItem</code> : Name of the upsell item. ■ <code>sellable</code> : Indicates whether the item is available for sale. ■ <code>correlation</code> : Calculated correlation between upsell item and item purchased. ■ <code>count</code> : Number of times the upsell item and correlated item have both been purchased by the same customer.

Subsidiary Record Synthetic Fields

Applies to: Administration | Email | Marketing

You can reference the following synthetic fields in any context that includes fields from the subsidiary record:

Field	Description
logourl	Subsidiary logo used on forms.
pagelogourl	Subsidiary logo used on pages.

Sales Rep Fields

Applies to: Administration | Email | Marketing

These fields are available for templates that include customer record fields if the customer is associated with a sales rep.

Field	Description
<code>firstName</code>	Sales rep's first name.
<code>middleName</code>	Sales rep's middle name.
<code>lastName</code>	Sales rep's last name.
<code>phone</code>	Sales rep's phone number.
<code>email</code>	Sales rep's email address.
<code>altEmail</code>	Sales rep's alternate email address.
<code>MESSAGE_NICKNAME</code>	This is the name set in the Nickname field by the sales rep at Home > Set Preferences > General.
<code>MESSAGE_SIGNATURE</code>	This is the name set in the Signature field by the sales rep at Home > Set Preferences > General.

Subscription Category Fields

Applies to: Administration | Email | Marketing

The following sublist is available for customer, vendor, contact, employee, and partner records if you have the Subscription Categories feature enabled.

Sublist (where applicable)	Field and Description
subscriptions	subscription : This is the name of a subscription category.
—	subscribed : This is the subscription status for a campaign subscription category.

Subscription Center Synthetic Fields

Applies to: Administration | Email | Marketing

The following sublist is available for campaign email templates and templates for customer, partner, and user access notifications.

Code	Description
subscriptionCenter.unsubscribeURL	The URL to unsubscribe from subscriptions. It opens the Campaign Subscription Center with all subscription options unchecked.
subscriptionCenter.manageURL	The URL to manage subscriptions. It opens the Campaign Subscription Center with subscription options checked according to the user's settings.

Support Case Notification Synthetic Fields

Applies to: Administration | Email | Marketing

The following case record synthetic fields are available for templates used in case notifications.

Field/Sublist	Description
updatedBy	Name of user who last updated a case.
messages	Sublist containing all message records entered for a case.
externalMessages	Sublist containing all external message records entered for a case.

Issue Notification Synthetic Fields

Applies to: Administration | Email | Marketing

The following synthetic fields are available for issue notification email sent to customers and employees.

Sublist (where applicable)	Field and Description
—	url : URL of issue record in your NetSuite account.

Sublist (where applicable)	Field and Description
—	externalStatus : Issue's external status.
—	externalTarget : Issue's external target.
details	■ author : User who entered a case detail. ■ date : Date a detail was entered. ■ userNote : Detail entered for an issue. ■ systemNotes : System notes generated for an issue.

Online Form Notification Synthetic Fields

Applies to: Administration | Email | Marketing

The following field is available for scriptable templates created for online form notification:

Record	Field and Description
onlineForm	name : Name of online form that was submitted.

Campaign and Sales Campaign Email Template Synthetic Fields

Applies to: Administration | Email | Marketing

Campaign templates can reference the couponcode field from the campaign event.

Sublist	Field and Description
campaignEvent	couponCode : Code for promotion created through the Advanced Promotions feature.

User Fields

Applies to: Administration | Email | Marketing

You can use these fields to include information about the user who sends the email using the template.

Field	Description
■ isSystem	This field indicates whether the email is initiated by a user or is system-generated. This field is set to True when NetSuite sends the email automatically, for example with system notification templates. When email is initiated by a specific user, this field is set to False.
■ firstName ■ middleName ■ lastName	These fields are available only for email initiated by a specific user. These tags refer to fields on the user's employee record.

Field	Description
- phone - email - altEmail	

Case Record Fields

Applies to: Administration | Email | Marketing

The following sublists are available on the case record.

Sublist	Description
issues	Includes information from issues on the Issues subtab on the Related Records subtab of a case.

Web Site Notification Fields

Applies to: Administration | Email | Marketing

The Web Site Notification synthetic fields are available for all email types sent to website customers.

Web Site Notification Field and Description	Available for Email Type
- itemurls : Provides the URL of the item detail page. Format: <code>\${itemurls[item.internalId]}</code> - itemimages : Provides the URL of the item image . Format: <code>\${itemimages[item.internalId]}</code>	- Order Received - Order Approved - Order Cancelled - Order Fulfilled - Download Available - License Code - Gift Certificate - Gift Certificate Confirmation - Password Recovery - Checkout Errors - Registration Confirmation

Note: When you use either of these fields, replace `item.internalId` with a valid item internal ID from your NetSuite account. This ID could be a constant number or a field containing the internal ID of the item, such as `itemline.item.internalId`. For an example, see the **Standard Web Site Order Received** email template. Email templates are available for web store email messages at Setup > Company > Email > System Email Templates.

Web Site Record Fields

Applies to: Administration | Email | Marketing

Web Site Record synthetic fields are available on the **Web Site** record for the following types of email sent to web site customers.

Web Site Record Field and Description	Available for Email Type
- customerCenterUrl : URL of the Customer Center, where shoppers can see the details of their orders and manage their accounts. - domain : The domain from which the email has been sent. - url : URL of the website from which the email has been sent.	- Order Received - Order Approved - Order Cancelled - Order Fulfilled - Download Available - License Code - Gift Certificate - Gift Certificate Confirmation - Password Recovery - Checkout Errors - Registration Confirmation
downloadLink : URL of the location at which the item to be downloaded is stored.	- Download Available - License Code
recoveryPasswordUrl : URL the customer must follow to recover their website password.	Password Recovery
- errorticket : Number of the error ticket created due to the checkout error. - cartContents : Items in the cart that caused the error.	Checkout Errors

Sales Order Record Fields

Applies to: Administration | Email | Marketing

The following synthetic fields are available on the **Sales Order** record for email sent to web site customers.

Sublist (where applicable)	Field and Description	Available for Email Type
—	- trackingLink : The order tracking message. - overviewTable : List of items included in the order. - itemAvailabilities : Can be used to calculate whether an item is out of stock. The calculation to obtain this information depends on how you've set up the ordering workflow in NetSuite. See the help topic Include Out of Stock Information in Website Email for more information.	- Order Received - Order Approved - Order Cancelled - Order Fulfilled
licenses	- licenseName : Name of the license that the customer has purchased. - licenseCode : License code that the customer has purchased.	License Code

Cash Sale Record Fields

Applies to: Administration | Email | Marketing

The following synthetic fields are available on the **Cash Sale** record for email sent to web site customers.

Sublist	Field	Available for Email Type
licenses	- licenseName : Name of the license that the customer has purchased. - licenseCode : License code that the customer has purchased.	License Code

Item Fulfillment Record Fields

Applies to: Administration | Email | Marketing

The following synthetic fields are available on the **Item Fulfillment** record for email sent to web site customers.

Field and Description	Available for Email Type
- trackingLink : This field contains the order tracking message. - overviewTable : List of items included in the order.	Order Fulfilled

Sample Scriptable Templates

Applies to: Administration | Email | Marketing

Use the following sample templates to help you create your own custom scriptable templates:

- Scriptable Issue Notification Template
- Scriptable Marketing Email Template
- Scriptable Web Store Email Template

Scriptable Issue Notification Template

The following template can be used for an issue notification. This template lists key fields on the issue record and all details on the issue record.

```

1 <table>
2 <tr><td>Issue Number</td><td>${Issue.issueNumber}</td></tr>
3 <tr><td>Product Team</td><td>${Issue.productTeam}</td></tr>
4 <tr><td>Assigned To</td><td>${Issue.assigned}</td></tr>
5 <tr><td>Type</td><td>${Issue.issueType}</td></tr>
6 <tr><td>Severity</td><td>${Issue.severity}</td></tr>
7 <tr><td>Status</td><td>${Issue.issueStatus}</td></tr>
8 <tr><td>Link</td><td>${Issue.url}</td></tr>
9 </table>
10 <hr>
11 <p><strong>Abstract: </strong>${Issue.abstract}</p>
12 <hr>
13 <p><strong>Details:</strong> (In Reverse Chronological Order)</p>
14 <table>
15   <#list Issue.details as detail>
16     <tr>
17       <td>${detail.author}<br/>${detail.date}</td>
18       <td>
19         ${detail.userNote}<#if detail.userNote != ""><br/></#if>
20         <#list detail.systemNotes as systemNote>
21           ${systemNote}<#if systemNote_has_next><br/></#if>
22         </#list>

```

```

23     </td>
24   </tr>
25 </#list>
26 </table>

```

Scriptable Marketing Email Template

The following marketing email template shows how you can use FreeMarker code to make a personalized offer to the recipient. This offer uses upsell data in NetSuite to find related upsell items.

```

1  <b>Dear <#if Customer.companyName != "">${Customer.companyName}</#if></b>,</b>
2
3  <p>Now you have unique opportunity to get your favorite items with 20% discount!</p>
4
5  <p>All you need to do is to use the following coupon code when you place an order on our site: ${CampaignEvent.couponCode}!</p>
6
7  <#assign printedOutItems = 0>
8  <#list Customer.correlatedItems as itemLine>
9    <#if 3 < itemLine.correlation >
10      <br/>
11    </#if>
12    <#assign printedOutItems = printedOutItems + 1>
13    <#if printedOutItems = 3><#break></#if>
14  </#list>
15  <#if 3 < printedOutItems >
16    <#list Customer.relatedItems as itemLine>
17      <br/>
18      <#assign printedOutItems = printedOutItems + 1>
19      <#if printedOutItems = 3><#break></#if>
20    </#list>
21  </#if>
22
23  <p>
24    Best regards,<br/>
25    <br/>
26    ${preferences.MESSAGE_SIGNATURE}
27  </p>

```

Scriptable Web Store Email Template

This section shows how you can use FreeMarker to customize your web store email templates. You'll learn how to iterate items, display item options, and customize item names.

The following example code shows what you need to iterate items and display item options in your web store email template. This example doesn't contain styling.

```

1  <#list salesorder.item as itemline>
2    <tbody>
3      <tr>
4        <!-- item image -->
5        <td>
6          <#if (itemimages[itemline.item.internalId])?has_content>
7            
8          </#if>
9        </td>
10       <!-- item details -->
11       <td>
12         <!-- item name with link -->
13         <div><a href="${itemurls[itemline.item.internalId]}">${itemline.item}</a></div>
14         <!-- if it's a matrix item -->
15         <#if (itemline.options)?has_content>
16           <#assign br = "<br />">
17           <#list (itemline.options)?split(br) as option>
18             <#assign label=option?substring(0,option?index_of(":")) value=(option?substring(option?index_of(":")+1))?
trim>

```

```

19         <div>${label}: ${value}</div>
20     </#list>
21 </#if>
22     <div>Quantity: ${itemline.quantity}</div>
23     <div>Unit Price: ${itemline.rate}</div>
24 </td>
25 <td>${itemline.amount}</td>
26 </tr>
27 </tbody>
28 </#list>

```

Variable	Description
<#list salesorder.item as itemline>	Iterates over a list of sales order items using itemline in the block as the reference for the current item. This appears in a table element, where each line makes a new table body and table row. Each row has two cells, with the second cell split into sections using divs. The first cell contains the image, which is referenced using the itemimages object. An expression is then passed that evaluates the internal ID of the item.
	A conditional is used to check whether the itemimages object contains content and calls it with this variable. The square brackets notation references a specific value to look for. It evaluates what is placed into it before looking up the key, similar to how JavaScript works with arrays and index references. After that, the full product name is printed, using a technique similar to what is used for the image, except referencing the itemurls object. Both the itemimages and itemurls objects are synthetic fields that require an internal ID to function. In this example, they're used to return images and URLs using the current item line's internal ID. For more information about synthetic fields, see Synthetic Fields for Scriptable Templates.
<#if (itemline.options)?has_content>	Checks if the item options exist so they can be iterated.
<#list (itemline.options)?split(br) as option>	Item options are made into a list by splitting them up using the line break element that the variable contains. Each option is then split up again, by assigning the label and the value as a variable.

Item Name

The following example code demonstrates how to use FreeMarker to shorten the item name in your web store email template. By default, the full item name `${itemline.item}` returns something similar to **SPORTSWEAR : TEES & TANKS : Tranquility Tank : Tranquility Tank-M-YE**.

```

1  <!-- At the top of the loop -->
2  <#assign itemName = itemline.item?split(":")>
3
4  <!-- And then in the place you want it rendered -->
5  ${itemName[itemName?size-2]?trim}

```

Variable	Description
#assign itemName = itemline.item?split(":")	This splits the full item name into an array, breaking it up into smaller strings each time there's a colon character.

Variable	Description
<code>\${itemName[itemName?size-2]?trim}</code>	Calls the variable where the name is to be rendered, but only returns a specific value. The specific value is determined by counting the length using <code>?size</code> . Then, two is deducted to obtain the second-to-last value. For example, <code>itemName[2]</code> , provides the string for the item name, which in this case is Tranquility Tank. Then, <code>?trim</code> is used to remove the white spaces at the ends.

For more information about web store email templates, see the help topic [Templates for Website Email Messages](#).

Converting CRM SDK Templates to Scriptable Templates

Applies to: Administration | Email | Marketing

If you have outdated CRM SDK templates in your account, you can convert them to scriptable templates.

To convert a CRM SDK template to a scriptable template:

1. View the CRM SDK template you want to convert.
2. Click **Convert to Scriptable**.
3. If this is an email template, select the type of record the template is used for.
A new template record is created and the name is appended with **(Converted)**.
4. Check the template to make sure all fields have been converted correctly.
5. Click **Save**.

You should test any converted templates before using them. You can view the template in Source mode to review any fields with hidden logic after conversion.



Important: When you convert a template, the ID remains the same as the original template. However, you'll need to update any custom workflows or scripts that use the original template because they use different APIs.

A few notes on specific tags:

- Tags that can be used in multiple contexts, such as the Class field which can appear on transactions and also on entity records, are converted with conditions to reflect these contexts.
- The following tags are not supported in scriptable templates: NLISSUEDUPLICATEOFURL, NLISSUEDUPLICATEOF, and NLAVILABLEONLINE. These tags are removed when a template is converted.

Basic Printing Layouts

Basic printing layouts include Transaction Form HTML Layouts and Transaction Form PDF Layouts. Administrators and users with the following permissions can use these layouts to define the arrangement of fields on printed transactions in NetSuite.

Permissions required to create template files:

- Custom HTML Layouts
- Custom PDF Layouts

Permissions required to edit custom entry forms and custom transaction forms:

- Custom Entry Forms
- Custom Transaction Forms

Basic printing layouts show the labels above the data and use a black background color.

You can customize the layouts for transaction form PDF layouts and transaction form HTML layouts. A custom layout can be used for a custom form, so that any transactions associated with that form use the formatting provided by the custom layout.

When printing basic layouts, the locale is selected according to the following priority list:

1. Customer
2. Subsidiary
3. Company



Tip: If your template isn't printed in the language you need, check the language set on records that are higher on the priority list.



Important: Basic layouts will be deprecated in a future release. We encourage you to use Advanced PDF/HTML Templates instead because new features are added exclusively to advanced printing. For information, see [Advanced PDF/HTML Templates](#).

For PDF or HTML output, advanced templates provide more customization capabilities than basic layouts, and the built-in template editor can be used in either WYSIWYG or source code mode. The advanced PDF/HTML templates also support current industry standards for HTML-based editing.

Advanced templates support all transaction and print types supported by basic layouts.

In OneWorld accounts, if you print transactions using basic layouts, the logo and address are sourced from the vendor's primary subsidiary. To use the subsidiary logo and address from the transaction record when printing, use advanced templates. For more information, see [Advanced PDF/HTML Templates](#).

Watch the following video that demonstrates and summarizes the advantages of using advanced PDF/HTML templates instead of basic layouts.



[Comparison of Basic Printing and Advanced Printing](#)

See the following topics:

- [Customizing Transaction Form PDF Layouts](#)
- [Transaction Form HTML Layouts](#)
- [Totals Transaction Form Layouts](#)

Customizing Transaction Form PDF Layouts

A transaction form PDF layout defines the arrangement of fields on printed standard and classic PDF transaction documents in NetSuite. You can customize transaction form PDF layouts by customizing borders and content position, repositioning and resizing fields, or by changing the fonts and colors used.



Important: Basic layouts will be deprecated in a future release. We encourage you to use Advanced PDF/HTML Templates instead because new features are added exclusively to advanced printing. For information, see [Advanced PDF/HTML Templates](#).

Custom transaction form PDF layouts are available only when you print your forms in PDF. If you print using HTML, a custom layout doesn't affect the look of your form. To print using PDF, go to Home > Set Preferences> Transactions subtab. Clear the Print Using HTML box, and click Save.

To customize a PDF layout, you first set up the color of text and backgrounds on the form and set the page height and width of printed forms. Then you use the Form Editor to change the size and orientation of elements of the form.

You can enter your measurements in inches or in centimeters by setting the Form Size Measurements preference at Setup > Company > Preferences > Printing & Fax Preferences on the Printing subtab.



Note: Advanced PDF/HTML templates provide an alternative model for customizing printed and emailed records. They support more customization capabilities than transaction form layouts. Also, transaction form layouts let you use up to 100 custom elements, whereas the Advanced PDF/HTML Templates feature permits more customization capabilities. For more information, see [Advanced PDF/HTML Templates](#).

To customize a transaction form PDF layout:

1. Go to Customization > Forms > Transaction Form PDF Layouts.
2. Click **Customize** next to the layout you want to customize.



Note: You can't customize a transaction form PDF layout for check vouchers.

To create a new custom layout based on an existing custom layout, click **Edit** next the layout. Then enter a name for the new layout, and click **Save As**.

3. On the Custom PDF Layout page, enter a name for your custom layout.
4. If needed, edit the width and height properties for your page.
5. Check the **Layout is Preferred** box to make this layout your preferred layout for this type of transaction.
6. Set the following colors for your form layout:
 - **Text Color** – Controls the color of the text in the form.
 - **Fill Color** – Sets the background color in the sections of the form.
 - **Label Text Color** – Controls the color of the text at the top of the main section of the form.
 - **Label Fill Color** – Determines the background color of the label for the main section of the form.
 - **Border Color** – Sets the border color for each section of the form.

You can click the color palette to choose a color or enter the hexadecimal code for the color you want to set.


While you make changes to the colors, you'll see the changes in the preview at the bottom of the page.

7. Click an element of the form that you want to customize. You can also select an element using the **Selected Element** list. If you want to add a custom element to the form, click **Add Custom Element**.

Note: You can only define custom elements for packing slips, picking tickets, and transaction form PDF layouts. For more information about custom elements, see [Defining Custom Elements](#).


You can do any of the following to each form element:

- Resize a section by clicking and dragging the handle in the lower right corner. Note that the cursor doesn't change to indicate that you can resize the item.



You can't remove an element, but you can hide it by clicking the handle in the lower right corner and dragging it to the top left corner.

- Click and drag an element to change the orientation of the PDF layout.

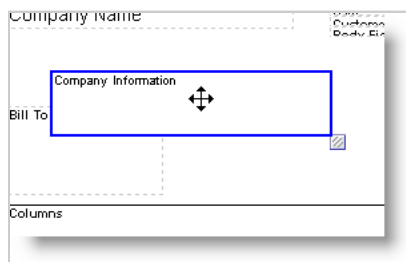

- Under the **Selected Element** heading, select the element, and if needed, determine the element's width and height.
- Under the **Element Position** heading, determine the element's position on the form. You can anchor the element to the top or bottom edge of the page with a fixed size (the size you specify under the **Selected Element** heading), or align the element to the specified top position and stretch it to fit the height of the page (within the margins).

Note: You can place one element on top of another, but those elements will be stacked when the form is printed and results may not appear as expected.

- Under the **Element Label Style** heading, determine the font and style of the element's label. Check the **Use Label Coloring** box if you want the color set in the **Label Text Color** field to be used for the label of a form section. Check the **Split Horizontally** box if you want the text beside the label. Keep this box clear if you want the text beneath the label.
- Under the **Element Data Style** heading, choose the font and style of the text in the form section.
- Check the **Show Border** box if you want to add a border to the section.

Note: To change the size of the area where the columns appear, select **Columns** as the **Selected Element** in the editor and modify the width and height values as needed. To change the width of the individual columns, use the Printing Fields subtab on the transaction form. For more information, see the help topic [Configuring Printing Fields](#).

8. Click **Preview** to see how this PDF layout will look when printed.

For any element that continues on an additional page, make sure there's enough space at the bottom for line items to print below it. For example, a logo element on a PDF layout can't be set to be the whole page.

9. Click **Save**.

Note: When the PDF opens and you click the **Print** button, the Print window opens. In the **Page Handling** section of the Print window, verify that **Page Scaling** is set to **None**, and the boxes beneath it aren't checked. Automatic scaling can cause difficulties with printing checks.

Note: If you have text overlapping a footer or missing from a printout, ensure that any long content is enclosed in an element that will split across pages.

See the following topics.

- [Formatting Label Text](#)
- [Formatting Data Text](#)
- [Defining Custom Elements](#)

Defining Custom Elements

Custom elements are blocks of static or dynamic text that you can add to and position on PDF transaction layouts. You can define up to 100 custom elements per layout. Images aren't supported. Custom elements are text only.

Custom elements can be defined only for the following types of transaction form PDF layouts:

- packing slip
- picking ticket
- transaction

For example, you can follow these steps to add the Bill To element to a packing slip:

1. Go to Customization > Forms > Transaction Form PDF Layouts.
2. Click **Customize** next to your picking ticket form.
3. Click **Add Custom Element**.

The Add Element window opens.

4. In the **Element Name** field, enter a name for the element, such as **Bill To**.
5. In the **Choose Element(s)** list on the left side of the window, scroll down and click **Bill To**.
6. Click **OK**.
7. The **Bill To** box appears in the top left corner of the layout.
8. Click the **Bill To** element to drag it to the appropriate place on the form.
9. Complete additional changes to the element as necessary.
10. Click **Save**.

Now when you use this custom form, the form shows the Bill To address.

Note: To remove a custom element, select the element and then click the X in the upper right corner. You can't remove other elements, but you can hide them by clicking the handle in the lower right corner and dragging it to the top left corner.

For each custom element, define the properties as described in the following table. After an element is added, click **Save & Edit**. The custom element shows up on the other tabs and you can edit it like any other element on the form.

Property	Description
Element Name	This identifies the custom element on the Border & Placement, Label Text, and Data Text tabs, and may be printed in the label for the element field. This field is required for each custom element where Enable is checked.

Property	Description
	 Important: When you create a Label and save the Custom Element, the element is automatically available in the Borders and Placement tab with the coordinates defaulted to 0,0,0,0. To view the Label, you must edit these coordinates to display the label in the preferred position.
Show Label	If checked, the Label for this custom element is printed on transaction forms using this layout, using the same formatting as other element labels as defined on the Label Text tab (see Formatting Label Text). The element doesn't appear on the Label Text tab if Show Label isn't checked.
Element Text	Text entered here is displayed in the element field when printed. The text is formatted the same as other element text as defined on the Data Text tab (see Formatting Data Text). You can use NetSuite tags to dynamically retrieve and display text associated with a specific instance of a form field. To construct a tag enter the field name and enclose it in braces — {entity}. The fields available are the same body fields as those available in custom code. Refer to Custom Code Names for a complete list of available fields.  Note: These tags are similar to those used on HTML Transaction Layouts, using {} instead of <> and dropping NL from the beginning of the tag. For Example: <NLENTITY> in HTML Layouts would be {entity} in PDF Custom Elements.
Wrap Text	If checked, the text in the element field wraps.

If you want to add personalized text, click **Add Custom Element** and instead of selecting an element, enter your text in the **Element Text** field and click **OK**.


Configuring Borders and Placement

You can add borders and alter the orientation of elements of your PDF forms.

To add a border to a form:

1. Go to Customization > Forms > Transaction Form PDF Layouts.
2. Click **Customize** or **Edit** next to the form you want to change.
3. In the Form Editor, click the element you want to add a border to.
4. Under the **Additional Options** heading, check the **Show Border** box.
5. Click **Preview** to see how this PDF layout will look when printed.
6. Click **Save**.

To change an element's orientation in the PDF layout, click and drag it to where you want it on the form or use the fields under the **Element Position** heading. For more information, see [Customizing Transaction Form PDF Layouts](#).

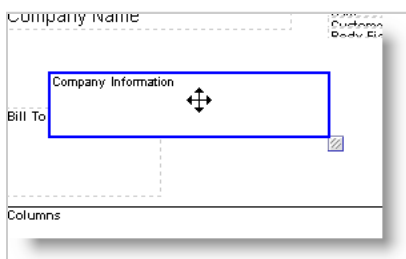

Formatting Label Text

You can change the style and alignment of labels for PDF form elements.

If the Element Label Style or Element Data Style fields aren't available, they aren't applicable to the field selected.

Note: In transaction form PDF layouts, you can't change the line spacing, nor can you change the space between label text and data text. For information about using advanced templates to change the spacing between label text and data text, see [Advanced PDF/HTML Templates](#).

To format element labels:

1. Go to Customization > Forms > Transaction Form PDF Layouts.
2. Click **Customize** or **Edit** next to the form you want to change.
3. In the Form Editor, click the element with the label you want to change.
4. Under the **Element Label Style** heading to the right of the preview, set the font style and alignment options for this label.
5. Check the **Use Label Coloring** box if you want the color set in the **Label Text Color** field to be used for the label of a form section.
6. Check the **Split Horizontally** box if you want the text beside the label. Clear the box if you want the text below the label.
7. To see how this PDF layout will look when printed, click **Preview**.
8. Click **Save**.

Formatting Data Text

You can change the style and alignment of the text in the sections of PDF forms.

Note: In transaction form PDF layouts, you can't change the line spacing, or the space between label text and data text. For information about using advanced templates to change the spacing between label text and data text, see [Advanced PDF/HTML Templates](#).

To format element text:

1. Go to Customization > Forms > Transaction Form PDF Layouts.
2. Click **Customize** or **Edit** next to the form you want to change.
3. In the Form Editor, click the element with the label you want to change.
4. Under the **Element Data Style** heading to the right of the preview, set the font style and alignment options for this label.
5. Click **Preview** to see how this PDF layout will look when printed.
6. Click **Save**.

Using a Standard #10 Window Envelope With Transactions

If you use window envelopes, you may need to adjust the printing position of your PDF transaction forms to show the correct address through the window.

If your account is set up to use metric measurement, convert the imperial values provided in the following procedure.

To adjust your standard layouts to fit in a standard #10 window envelope:

1. Go to Customization > Forms > Transaction Form PDF Layouts (or Transaction Form HTML Layouts).
2. Click **Customize** next to the layout you want to change.
3. In the **Name** field, enter a name for your custom layout.
4. Click the **Elements** subtab.
5. Click **Border & Placement**.
6. In the **Border & Placement** section, locate the **Bill To** row.
7. In the **Left** column, enter **1**.
This moves the left edge of the field 1 inch from the left margin of the page.
8. In the **Top** column, enter **2.25**.
This moves the top edge of the field 2.25 inches from the top margin of the page.
9. In the **Right** column, enter **4.2**.
This moves the right edge of the field 4.2 inches from the left margin.
10. In the **Bottom** column, enter **3.5**.
This moves the bottom edge of the field 3.5 inches from the top of the page.
11. Locate the **Ship To** row.
12. In the **Left** field, enter **4.55**.
This moves the left edge of the field 4.55 inches from the left margin of the page.
13. In the **Top** column, enter **2.25**.
This moves the top edge of the field 2.25 inches from the top margin of the page.
14. In the **Right** column, enter **8**.

This moves the right edge of the field 8 inches from the left margin.

15. In the **Bottom** column, enter **3.5**.

This moves the bottom edge of the field 3.5 inches from the top of the page.

16. When you've finished, click **Submit**.

You're returned to the Custom Layouts list.

17. Check the box in the **Preferred** column next to your custom layout.

This ensures that your layout is applied to all forms of that type.

18. Click **Save**.

To adjust any transaction form layouts that you want to mail in standard #10 window envelopes, repeat the preceding steps. You can adjust any of your transaction form layouts for any size window envelope. Measure your envelope and the placement of the window to determine where to place the address.

When you have the measurements for your envelope and determined where to place the address field, you need to convert the fraction measurements into decimal measurements to adjust the layout. Use the following table as a quick reference guide to convert fraction measurements into decimal measurements.

Fraction	Decimal	Fraction	Decimal
1/2	0.5	1/16	0.0625
1/4	0.25	3/16	0.1875
1/3	0.33	5/16	0.3125
3/4	0.75	7/16	0.4375
2/3	0.67	9/16	0.5625
1/8	0.125	11/16	0.6875
3/8	0.375	13/16	0.8125
5/8	0.625	15/16	0.9375
7/8	0.875	—	—

Transaction Form HTML Layouts

Transaction form HTML layouts define the arrangement of fields on HTML transaction documents in NetSuite. Standard and Classic HTML layouts exist for all the standard form types other than shipping label and item label - these are assumed to be printed using PDF. For more information, see [Customizing Transaction Form PDF Layouts](#). You can use HTML layouts to generate customized email versions of transactions forms.



Important: Basic layouts will be deprecated in a future release. We encourage you to use Advanced PDF/HTML Templates instead because new features are added exclusively to advanced printing. For information, see [Advanced PDF/HTML Templates](#).

You can customize transaction form HTML layouts by editing the templates on which they are based. The templates for each layout consist of two blocks of HTML:

- **Style Block** : this block begins with `<style>` and ends with `</style>`. The style block defines the styles used by the layout.

- **Body Block** : this block begins with `<table>` and ends with `</table>`. The body block defines the content of the HTML page.

When you print using the Classic HTML Transaction Layout template, the header information, including the logo, is printed on every page of the HTML printout. To print the logo and other header information only on the first page, use the Standard HTML Transaction Layout template. You can also customize the classic template and remove the `<thead class="headrepeat">` and `</thead>` tags.

Totalling works the same way as it does for Transaction Form PDF Layouts. For more information, see [Totals Transaction Form Layouts](#).

 **Note:** Advanced PDF/HTML templates provide an alternative model for customizing printed and emailed records. They support more customization capabilities than transaction form layouts. For details, see [Advanced PDF/HTML Templates](#).

Creating Custom Transaction Form HTML Layouts

You can customize transaction form HTML layouts.

To customize a transaction form HTML layout:

1. Go to Customization > Forms > Transaction Form HTML Layouts.
2. Click **Customize** next to the layout you want to customize.
3. In the **Label** field, enter the name of your customized layout.
4. Check the **Layout is Inactive** box to remove this layout as an option in dropdown lists. You can always clear this box later and the layout is available again.
5. Check the **Layout is Preferred** box to make this layout your preferred layout for this type of transaction.
6. On the **Templates** subtab, edit the **Style** and **Body** blocks as needed.

Embedded in the body block are NetSuite tags that correspond to individual content elements. The content elements correspond closely to the layout elements in the existing PDF layouts. Basic customization consists of editing the body or style templates but leaving all of the NetSuite tags in the body block.

For example, to create a collection layout you could add a block of text at the top of the body layout.

7. If needed, click **Elements** and customize the HTML that corresponds to each element.

On the **Elements** subtab, each element is listed with the corresponding element ID, the HTML code that will be used to display the label that corresponds to the element, and the HTML code that will be used to display the data that corresponds to the element.

When editing the HTML for elements, follow these guidelines:

- Ensure that the HTML used correlates to any formats as defined in the body block. For example, if the element is included in a `<table>` tag in the body block, the element itself must begin with a `<tr>`.
- Elements always have data and can have a label.
- The label is represented by the `<nllabel>` tag that must be included in any customization of the label field.
- The data is represented by the `<nldata>` tag that must be included in any customization of the data field.

- There is also a `<nlattributes>` tag that is used in the COLUMNS element to indicate where text formatting elements (such as alignment) are inserted.
- The BODY, COLUMNS, and AGING elements are repeated to produce the HTML of the form.

Totals Transaction Form Layouts

Totaling fields on transaction forms display as follows:

- Discount, shipping, and tax totals are displayed on separate lines of the total.
- Each field is included only if it has a value.
- The discount, shipping item, and tax names are used.
- There are multiple tax lines in CA and VAT-enabled accounts.
- The total area is automatically expanded to fit the necessary information.

Amount Paid and Amount Remaining on Invoices

Amount paid and amount remaining are optionally included on transaction forms. They display as follows:

- The Amount Remaining field is a footer field instead of a body field for purposes of printing.
- There is an additional Amount Paid footer field. This field is omitted if none of the invoice has been paid.
- If these fields are shown in a customized form, they are displayed in the total section underneath the invoice total.