



ORACLE
NetSuite

Records Catalog



2025.2

December 17, 2025



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

- Records Catalog Overview 1
 - Available Tools for Other Channels 1
 - Known Limitations for the Records Catalog 2
- Navigating the Records Catalog 3
 - Record Type Overview 3
 - SuiteScript and Rest Query API in Records Catalog 4
 - Records Catalog Fields Available for SuiteScript and Rest Query API 5
 - Records Catalog Joins Available for SuiteScript and Rest Query API 6

Records Catalog Overview

The Records Catalog is a contextual reference tool that describes the NetSuite model structure and behavior. This tool supports users in developing integrations, adopting new features, and learning about the NetSuite model. Within the Records Catalog, you can find information about the record types and fields available for specific NetSuite channels. This dynamic NetSuite model reflects the customizations and features enabled or disabled in your account.

Developers, administrators, and system users need to clearly understand the NetSuite model to achieve a particular task in NetSuite. The Records Catalog provides information about records and their details, like record type name and ID.

Watch the following help video for information about the Records Catalog.

 [Records Catalog Overview](#)

The list of record types provides available functions such as SuiteScript Analytic API. For more information about fields and joins available for SuiteScript Analytic API, see [SuiteScript and Rest Query API in Records Catalog](#).

For Records Catalog limitations, see [Known Limitations for the Records Catalog](#).

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

To open the Records Catalog go to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

To get started with the Records Catalog, check out these topics:

- [Available Tools for Other Channels](#)
- [Known Limitations for the Records Catalog](#)
- [Navigating the Records Catalog](#)
- [Record Type Overview](#)
- [SuiteScript and Rest Query API in Records Catalog](#)

Available Tools for Other Channels

The Records Catalog currently supports the SuiteScript and Rest Query API channels. You can find other channels with other tools. The following table lists tools that support other channels.

	SuiteScript Records Browser	REST API Browser	Records Catalog
Data Compatible with N/query and SuiteQL API	No	N/A	Yes
Data Compatible with SuiteQL Queries for REST Web Services	No	Yes	Yes
Data Compatible with all other SuiteScript 2.0 Modules	Yes	No	No

For more information about the other browsers, see separate Help topics:

- [SuiteScript Records Browser](#)
- [SuiteAnalytics Connect Browser](#)
- [SuiteTalk SOAP Schema Browser](#)
- [The REST API Browser](#)

For more information, see the help topic [SuiteCloud Reference Tools](#).

Known Limitations for the Records Catalog

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

You can open the Records Catalog by going to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

Currently, the Records Catalog provides information about record types available to the SuiteScript and Rest Query API. For more information, see [SuiteScript and Rest Query API in Records Catalog](#).


Navigating the Records Catalog

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

You can open the Records Catalog by going to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

The Records Catalog lists all available record types in the left pane. Above the records list, you'll find Record Type Filtering, Global Field Search, and an alphabetical index to help filter records.

The following screenshot shows the initial view of the Records Catalog.

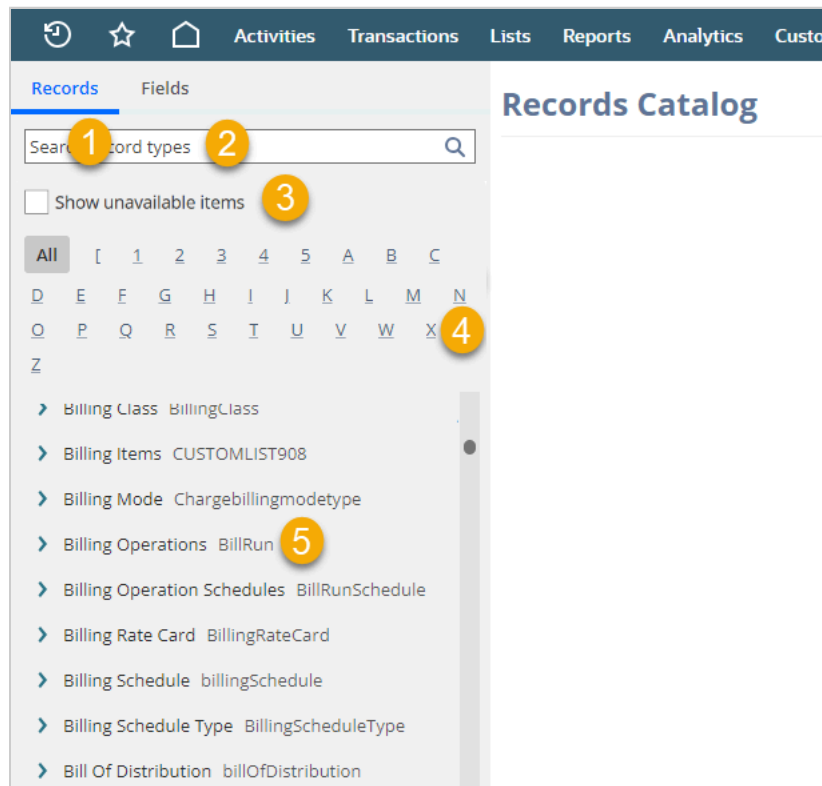

1. **Record Type Filtering** – Search box for searching record types using keywords.
2. **Global Field Search** – Search label or scriptId of a field within record type's structure.
3. **Show Unavailable Items** – This lets you see records, subrecords, fields, sublists, and joins not available in the current context. NetSuite's dynamic model reflects the customizations and features enabled or disabled in your account.
4. **A-Z Index** – Alphabetical index that allows you to jump to record types beginning with a specific letter. **All** is selected by default.
5. **Record Types** – List of available record types including the name and script ID for each.


Record Type Overview

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

To open the Records Catalog go to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

Once you're in the Records Catalog, select a record type from the left pane to view its overview page. The left pane shows the available channels for the record type. If a certain channel is not available for a record, the functionality appears dimmed, and is unavailable. The available supported channel — SuiteScript and REST Query API — includes data for creating queries. For more information, see [SuiteScript and Rest Query API in Records Catalog](#). The right pane displays the record type's name and general information.

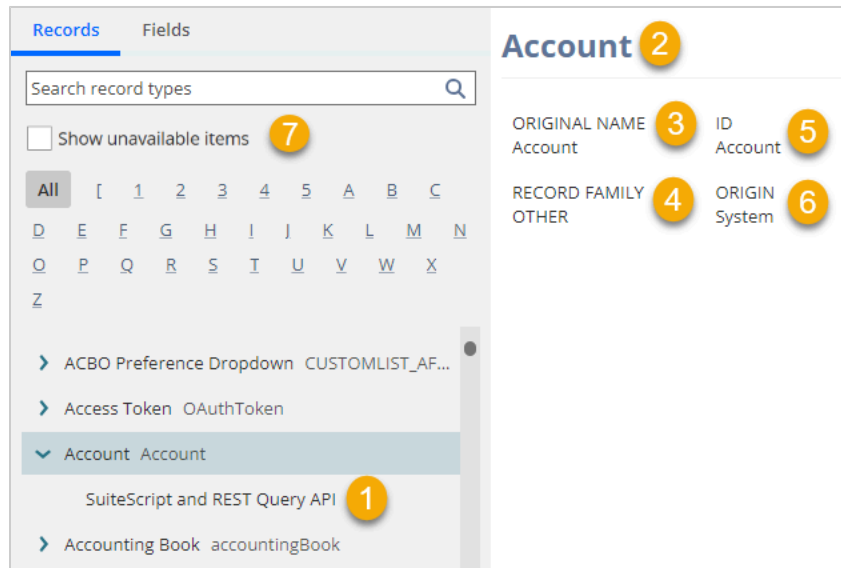

1. **Available channels** – List of available channels, for example, APIs. For more information, see [SuiteScript and Rest Query API in Records Catalog](#).
2. **Record Type Name and script ID** – The name and script ID of the record type. The script ID is the identifier of record types in all APIs.
3. **Original Name** – Original name of the record type, in case you changed the record type name. For more information about renaming records, see the help topic [Change Record and Transaction Names](#).
4. **Record Family** – Record family to which the record belongs. Record family can be either CRM, Entity, Item, Transaction, or Other.
5. **ID** – Script ID.
6. **Origin** – Origin of the record, either System (provided by NetSuite) or Custom (additional record type created in this specific account).
7. **Show Unavailable Items** – Allows to see records, subrecords, fields, sublists, and joins not available in the current context. The dynamic NetSuite model reflects the customizations and features enabled or disabled in your account.

SuiteScript and Rest Query API in Records Catalog

In the available channels for a record type, you can find the SuiteScript and Rest Query API. The SuiteScript and Rest Query API includes data for creating constructed queries and SuiteQL queries using the SuiteScript N/query module. For more information, see the help topic [N/query Module](#).

SuiteQL provides advanced query capabilities you can use to access your NetSuite records and data, and it supports querying the analytics data source. SuiteQL is currently available using SuiteAnalytics Connect, the N/query module in SuiteScript, and SuiteTalk REST web services. For more information, see the help topic [SuiteQL](#).

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

To open the Records Catalog go to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

The Records Catalog displays fields or joins available for the record type, field level help, and other information. For more information, see [Records Catalog Fields Available for SuiteScript and Rest Query API](#) and [Records Catalog Joins Available for SuiteScript and Rest Query API](#).

For more information, see the help topic [SuiteScript 2.x Analytic APIs](#).

Records Catalog Fields Available for SuiteScript and Rest Query API

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

To open the Records Catalog go to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

FIELD ID	NAME	TYPE	AVAILABLE	FEATURE	PERMISSION	JOIN
category1099Misc	1099-MISC Category	INTEGER	✓	-	-	1099-MISC Category category1099misc N:1 ⓘ
sAchMsg	ACH Message	STRING	✓	Direct Deposit or EFT or Vendor Payments	Set Up ACH Processing	-
sBankName	Bank Name	STRING	✓	-	-	-
sBankRoutingNumber	Bank Routing Number	STRING	✓	-	-	-
cashFlowRate	Cash Flow Rate Type	STRING	✓	Subsidiaries And Multiple Currencies	Consolidated Exchange Rate	Consolidated... N:1 ⓘ
currency	Currency ⓘ	INTEGER	✓	Multiple Currencies	Currency currency	N:1 ⓘ
unit	Default Unit ⓘ	INTEGER	✓	Statistical Accounts	-	Unit unitsTypeUom N:1 ⓘ

- Search fields** – Search box for searching available fields using the field ID or its name.
- Field ID** – Field ID. To copy the field ID, click the Copy icon beside the field ID.
- Name** – Field name. To view field level help for a field, click the Information icon beside the field name.
- Column Type** – JavaScript data type of the field. If a field cannot be used as a column, but only for a join, N/A (Only for join) is shown.
- Available/Unavailable Fields** – Displays which fields are Available/Unavailable.
- Feature** – Displays information about feature that controls field corresponding line.
- Permission** – Displays permission that controls field corresponding line.
- Join** – Information about a possible join, such as record type name, record type script ID, and cardinality. Click the Information icon for more information about the join and other possible joins.

9. **Show Unavailable Items** – Allows to see records, subrecords, fields, sublists, and joins not available in the current context. The dynamic NetSuite model reflects the customizations and features enabled or disabled in your account.

When you click SuiteScript and Rest Query API for a record type, you can see the fields available in the API, grouped by a record type (for example, Customer) or by its subrecords. For each field, the ID, name, column type, availability/unavailability, feature, permission, and join information are displayed.

Records Catalog Joins Available for SuiteScript and Rest Query API

The Records Catalog is available for all users with the Records Catalog permission. To assign the Records Catalog permission, first select the role you want to allow access to the Records Catalog in Setup > Users/Roles > Manage Roles. On the role page, you can then add the permission to view the Records Catalog under Permission > Setup > Add (Records Catalog).

To open the Records Catalog go to Setup > Records Catalog or <https://system.netsuite.com/app/recordscatalog/rcbrowser.nl>.

JOIN TYPE	SOURCE/TARGET RECORD TYPE	FIELD ID	CARDINALITY	AVAILABLE
Regular join	1099-MISC Category category1099misc	category1099Misc	N:1	✓
Regular join	Account Account	deferralAcct	N:1	✓
Regular join	Account Account	billableExpensesAcct	N:1	✓
Regular join	Account Account	parent	N:1	✓
Regular join	Accounting Book accountingBook	restrictToAccountingBook	N:M	✓
Regular join	Account Localization AccountContextSearch	accountContextSearch	1:N	✓
Regular join	Account Type accountType	acctType	N:1	✓

1. **Search joins** – Search box for searching available joins using keywords.
2. **Join Type** – Based on a join type, you need to use an appropriate API method. For more information, see the help topic [SuiteScript 2.x](#).
3. **Source / Target Record Type** – Related record types. To copy the field ID, click the Copy icon beside the field ID. Click the Information icon to see join pairs for manual SuiteQL. For more information, see the help topic [SuiteQL](#).
4. **Field ID** – ID of a field to which the join belongs. To copy the field ID, click the Copy icon beside the field ID.
5. **Cardinality** – Cardinality of join. The cardinality of a join between two tables is the numerical relationship between rows of one table and rows in the other. Common cardinalities include one-to-one, one-to-many, and many-to-many.
6. **Available/Unavailable Joins** – Displays which joins are Available/Unavailable.
7. **Show Unavailable Items** – Allows to see records, subrecords, fields, sublists, and joins not available in the current context. The dynamic NetSuite model reflects the customizations and features enabled or disabled in your account.

The Join tab of the record type's SuiteScript and Rest Query API displays the join relationships grouped by a record type (for example, Customer) and by its subrecords. For each field, Records Catalog displays the join type, related record types, ID, and cardinality.