



ORACLE
NetSuite

SCM Mobile



2025.2

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

SCM Mobile Setup	1
Language Preference Setup for SCM Mobile	3
Adding Language Options for Mobile App Translation	4
Selecting and Applying a Language	5
Setting Up the Online Form User Role	5
Bar Code Scanning for SCM Mobile	6
Activating Tally Scanning for SCM Mobile	6
SCM Mobile Printing	7
Setting Up Print to File	9
Configuring Security Settings	9
Setting Up Your Printers	10
Resyncing Printer Connections	11
Creating Printer Groups	11
Creating Custom Print Templates and Files	12
Setting Up Printing Settings on Print Reports	17
Mobile Printing Customization	27
Troubleshooting Mobile Printing	40
Weighing Scale Support	42
Configuring SCM Mobile App Settings	43
SCM Mobile App Access	44
SCM Mobile App Configuration	46
Configuring Mobile Page Elements	46
Configuring Pages and Actions for Custom Mobile Processes	63
Adding Action Buttons Through Mobile Configuration	68
Configuring Mobile Table Elements	69
Configuring Menu Icons on Independent Mobile Pages	73
Cloning Standard Mobile Actions	74
Deleting Configured Page Elements from a Standard Process	75
SuiteApp Updates for SCM Mobile Apps	76
Viewing the Update Status and SuiteApp Versions	77
SCM Mobile App Basics	78
SCM Mobile Login Page	78
Data Entry on Mobile Apps	79
Common Mobile Pages and Screens	83
SCM Mobile Page Elements (Buttons, Fields, Tables)	85
Label Printing and Reprinting	90
Manually Printing Labels from Your Mobile Device	91
Reprinting Labels	92
Filtering Table Data Through Search Tags	94
Grouping or Filtering Table Rows Based on Colors	95
Filtering Table Data by Date	95
Capturing and Attaching Files Through the App	97
Creating Deployments for Target Transactions	98
SCM Mobile App Customization	99
Customizing Mobile Processes	100
Customizing Mobile Pages	102
Customizing Mobile Page Elements	103
Setting Up Additional Fields Through Mobile Customization	110
Time Settings for Date Fields	114
Displaying Messages in Dynamic Text Elements	114
Setting Up Image Capture or File Upload	116
Setting Up Autoclick for Buttons	119
Customizing Mobile Table Elements	120

Adding Columns to Table Elements	124
Adding Columns Through Mobile Configuration	125
Adding Columns Through Mobile Customization	126
Setting Up the On Load Action for New Columns	128
Defining Merge Criteria for New Columns	129
Saving Data from Additional Columns	130
Setting Up Table Row Colors	132
Customizing Information Screen Elements	133
Customizing Mobile Actions	135
Setting Up Custom Loading Text for Mobile Actions	140
Setting Up Custom RESTlets	141
Adding Parameters to Mobile Actions	143
Working with Mobile States as Data Source	145
SCM Mobile API	149
Mobile Page Element APIs	149
DateValue() API for Column Conditions	153
Mobile Sublist APIs	153
Mobile State APIs	154
APIs to Call RESTlets	155
Mobile Table APIs	155
Mobile Popup Window APIs	156
Customizing Mobile Popup Windows	157
Compiling Mobile Customizations	160
Exporting Mobile Processes	161
Importing Mobile Processes	161
Restoring Mobile Processes with Imported Updates	163
Troubleshooting Customizations	163

SCM Mobile Setup

SCM Mobile provides the mobile capabilities and user interface for the following standard mobile apps:

- **NetSuite WMS** – For use with the [Warehouse Management](#) feature, it enables inbound, inventory, and outbound processing within your location.
- **Manufacturing Mobile** – Enables data collection for work order assignments and reporting of consumption and production data.
- **NetSuite Ship Central** – Optimized for kiosk and tablet devices, it enables carton and pallet packing, as well as order shipping.
- **Smart Count** – Enables directed or spot counting regardless of ongoing transactions that may affect on-hand inventory levels.

The following table shows the list of mobile app capabilities:

Mobile App Capabilities	Available in			
	NetSuite WMS	Manufacturing Mobile	Ship Central	Smart Count
Multi-Language support  Important: Make sure that both the NetSuite UI and the mobile app use the same language for a role. See Language Preference Setup for SCM Mobile.	Yes	Yes	Yes	Yes
Multiple Units of Measure (UOM) on Mobile Devices	Yes		Yes	Yes
SCM Mobile Printing ■ Enabling Mobile Printing with PrintNode Integration ■ Enabling Mobile Printing without PrintNode Integration	Yes		Yes	No
Advanced bar code scanning See Bar Code Scanning for SCM Mobile .	Yes (Supports Composite, GS1, & HIBC)		Yes (Supports GS1 DataMatrix)	Yes (Supports GS1)
Tally scanning See Activating Tally Scanning for SCM Mobile .	Yes		Yes	Yes
Weighing Scale Support – available only with PrintNode integration	Yes		Yes	No
Image Capture and File Upload See Setting Up Image Capture or File Upload .	Yes	Yes	Yes	No

Mobile App Capabilities	Available in			
	NetSuite WMS	Manufacturing Mobile	Ship Central	Smart Count
SCM Mobile App Customization - Includes cloning of standard mobile processes	Yes	Yes	Yes	No
SCM Mobile App Configuration - for standard mobile processes	Yes	Yes	Yes	No

Availability

SCM Mobile is not a standalone SuiteApp. It is shared along with each SuiteApp required by its supported mobile apps: NetSuite WMS, Ship Central, Manufacturing Mobile, or Smart Count. For assistance regarding availability, you may contact your NetSuite account manager.

Hardware and Software Requirements

Note: For use across all mobile apps, devices that run on iOS are not supported.

For use with NetSuite WMS, Manufacturing, and Smart Count, refer to the following requirements for handheld bar code scanners:

- At least 256 MB flash memory
- Currently, only devices that have Android 7.0 or higher versions are supported. Support for Android versions may change subject to updates from Google.
- 1D bar code scanner
- 4 inch or larger touch screen
- 802.11a/b/g enabled
- Bluetooth enabled
- HTML 5 & JavaScript enabled browser (TLS 1.2 compliant)
Only the Google Chrome browser is supported. You should use the latest version of Google Chrome.
- Interactive Sensor Technology (IST)
- Ruggedized or semi-ruggedized (optional)

For use with Ship Central, refer to the following kiosk or tablet device requirements:

- Device software –
 - Kiosks: Windows 10.0 or higher
 - Tablets: Currently, only devices that have Android 7.0 or higher versions are supported. Support for Android versions may change subject to updates from Google.
Only the Google Chrome browser is supported. You should use the latest version of Google Chrome.
- Recommended screen resolution – 1280 x 800 up to 1920 x 1080
- Optimized for horizontal user interfaces or the landscape display mode

If you enable the Mobile Printing capability with PrintNode integration, view the [Mobile Printing Requirements for PrintNode Integration](#).

SCM Mobile SuiteApp Installation

Before you can install the SCM Mobile SuiteApp, be sure to enable the following required features:

- Custom Records
- Client SuiteScript
- Server SuiteScript
- Online Forms

 **Note:** If you do not find these features in your account, you may contact your account manager.

In case you need to uninstall the SCM Mobile SuiteApp, make sure that these features are still enabled when you do so.

To enable features, see the help topic [Enabling Features](#).

You must install the SCM Mobile SuiteApp before you install the SuiteApp for any of the supported features. Install the latest bundle version, with the following details:

- **Bundle name** – SCM Mobile
- **Bundle ID** – 572631

To install the SuiteApps for the supported features, see the following topics:

- [Installing the NetSuite WMS SuiteApps](#)
- [Manufacturing Mobile for Administrators](#)
- [Installing the SuiteApps for NetSuite Ship Central](#)
- [Installing the Smart Count SuiteApp](#)

After you install the required SuiteApps, you must also complete the other setup requirements for each mobile app. Also make sure that you set up the Online For User role. See [Setting Up the Online Form User Role](#).

If you encounter issues with bundle updates or for more information, see [SuiteApp Updates for SCM Mobile Apps](#).

Language Preference Setup for SCM Mobile

If you use the Multi-Language feature, to match your language preference for the NetSuite UI, choose the same language to apply to pages and menu options within a mobile app from SCM Mobile. For more information about the feature, see the help topic [Configuring Multiple Languages](#).

The following table contains the list of supported languages that you can match with your language preference for the NetSuite UI:

Language	Language Code	Language	Language Code
Chinese (Simplified)	zh_CN	Indonesian	id_ID
Chinese (Traditional)	zh_TW	Italian	it_IT
Czech	cs_CZ	Japanese	ja_JP

Language	Language Code	Language	Language Code
Danish	da_DK	Korean	ko_KR
Dutch	nL_NL	Norwegian	no_NO
English (AU)	en_AU	Portuguese (Brazil)	pt_BR
English (CA)	en_CA	Russian	ru_RU
English (International)	en	Spanish	es_ES
English (UK)	en_GB	Spanish (Latin America)	es_AR
English (U.S.)	en_US	Swedish	sv_SE
Finnish	fi_FI	Thai	th_TH
French	fr_FR	Turkish	tr_TR
French (Canada)	fr_CA	Vietnamese	vi_VN
German	de_DE		

To set the language for mobile apps, see the following topics:

- [Adding Language Options for Mobile App Translation](#)
- [Selecting and Applying a Language](#)

If you encounter issues with language mismatches, see [SuiteApp Updates for SCM Mobile Apps](#).

Adding Language Options for Mobile App Translation

Before you can apply your language preference to the mobile app interface, verify that you have added the language to your translation list.

To view the list of supported languages that you can add to your translation list, see [Language Preference Setup for SCM Mobile](#). NetSuite can translate text on the mobile app interface to any of these languages.

To add language options for mobile app translation:

1. Using the Administrator role, go to Setup > Company > General Preferences.
2. On the General Preferences page, click the **Languages** subtab, and then do the following:
 - a. In the **Language** column, select the language that matches your language preference in the NetSuite UI..
 - b. Click **Add**.
If you have accounts in other languages, repeat steps a – b to add more language options for translation.
3. Click **Save**.
If you don't use the NetSuite WMS app, you can proceed to step 5.
4. After you add one or more languages to the NetSuite WMS app, you must sync the system rules by doing the following:
 - a. Using the WMS Warehouse Manager role, go to WMS Configuration > Configure Warehouse > Sync System Rules Translations.
 - b. On the System Rules Translations page, click **Update System Rules Translations**.
 - c. In the confirmation message, click the link to verify that the sync job has been completed.

After you set up and sync the languages, update the mobile app.

5. To update the mobile app, do the following:
 - a. Using the WMS Warehouse Manager role, go to WMS Configuration > Configuration > Applications. Alternatively, using the Ship Central Manager role, go to Ship Central Setup > Apps Setup > Applications.
 - b. On the Mobile - Applications List, next to the mobile app, click **Update App**.

To update other apps within your NetSuite account, repeat this step.

Your mobile application update might take a few minutes to complete. In the processing message, click the link to view the progress.

After adding the language to your list, you can set the language preference for your mobile app interface. See [Selecting and Applying a Language](#).

Selecting and Applying a Language

When you set your language preference for the NetSuite user interface, you can also apply it to the mobile application interface. Before you set your language preference, be sure to add it to the mobile app translation list. For instructions, see [Adding Language Options for Mobile App Translation](#).

If you have multiple roles for the same mobile app, you can set the same or a different language preference for each of them. If you use the same role for different mobile apps, be sure to apply the same language preference to each app.

To select and apply a language:

1. To select a language, using the Administrator role, go to Home > Set Preferences.
2. On the Set Preferences page, click the **General** subtab.
3. In the Localization section, in the **Language** field, select a language.
After you have selected the language, you can apply it to the mobile application interface.
4. To apply the language to the mobile pages, go to Setup > Custom > Mobile – Applications.
5. On the Mobile – Applications List, click **View** next to the mobile application.
6. On the Mobile – Process List, click **Synchronize**.
To apply your language preference to another app, repeat from step 5.
Your language update might take a few minutes to complete. On the message at the top of the page, click the link to view the progress.
7. Access the app using the role to which you have applied your language preference. Make sure that the language on the NetSuite UI matches the one on the mobile app for the same role.

Setting Up the Online Form User Role

The Online Forms feature provides the Online Form User role required to access the mobile app using the login URL. If you use Mobile Printing with PrintNode integration, it also enables you to access NetSuite records used for printing.

Without this role, you may encounter issues when logging in or accessing any of the standard mobile apps. With PrintNode integration, you may not be able to print or update your printing settings. For more information, see [Troubleshooting Mobile Printing](#) or [Mobile Printing Setup Procedures](#).

To set up the Online Form User role:

1. Using the Administrator role, go to Customization > Scripting > Script Deployments.
2. On the Script Deployments list, click **Edit** next to each of the following deployments:
 - ID – **customdeploy_mobile_sl_get_login_page**
 - ID – **customdeploy_print_sl_fileserver**
3. On the Script Deployment page, make sure that the **Available Without Login** box is checked.
4. On the **Audience** subtab, in the **External Roles** field, select **Online Form User**.
5. Click **Save**.

Bar Code Scanning for SCM Mobile

If you use the Bar Code Scanning and Item Labels feature, you can scan bar codes when processing orders through a mobile app. You can also set up advanced bar code scanning to scan item bar codes in specific formats, depending on the mobile app.

For Warehouse Management, you can scan item bar codes in the following advanced formats:

- Composite (linear and Data Matrix)
- GS1 (GS1-128 and GS1 DataMatrix)
- HIBC (Code 128 and Data Matrix)

To set up, see the help topic [Bar Code Setup for NetSuite WMS](#).

For Ship Central, you can scan item bar codes in the following advanced format:

- GS1 DataMatrix

To set up, see the help topic [Bar Code Scanning for Ship Central](#).

Activating Tally Scanning for SCM Mobile

If you use Warehouse Management or Ship Central, you can activate tally scanning for the mobile app. Tally scanning enables you to automatically increment the quantity of a scanned item by 1.

For Warehouse Management, you can enable tally scanning for each of the supported inbound, inventory, and outbound processes. If you apply the rule to the PO, TO, or Inbound shipment receiving process, you can also select the option to tally scan different item types continuously.

If you set up advanced bar code scanning, you can tally scan only one of the following supported formats: GS1, composite, or HIBC. See [Bar Code Scanning for SCM Mobile](#).

To activate tally scanning for SCM Mobile:

1. Activate the Enable Tally Scan rule. For instructions, see the following topics:
 - [System Rules for NetSuite WMS](#)
 - [System Rules for Ship Central](#)
2. For Warehouse Management, to enable tally scanning for existing items, check the **Tally Scan** box on their item records.

Activating the rule automatically checks this box on new item records that you create.

SCM Mobile Printing

You can enable and set up Mobile Printing to print or save labels and documents for supported mobile apps. Depending on the apps you use, it provides preconfigured templates for labels and documents. You can customize these templates to add details for your labels and documents. You can add rules to specify when you want to use them and assign default printing settings. For more information about labels and documents available for Mobile Printing, see the following topics:

- [Mobile Printing for NetSuite WMS](#)
- [Mobile Printing and Weighing Scale Setup](#)

Enabling Mobile Printing without PrintNode Integration

Without PrintNode integration, you can save soft copies of generated labels and documents for shipping, including returns. You cannot set up printers and send print requests through the mobile app. Also, you cannot set up weighing scales and capture weights through the mobile app. For more information, see [Setting Up Print to File](#).

Enabling Mobile Printing with PrintNode Integration

Oracle NetSuite integrates with PrintNode, a third-party provider of hosted printing services. Through computers installed with the PrintNode client, PrintNode can access your network printers. You can submit your print requests from the app through PrintNode, which manages the requests and routes them to the appropriate printers.

When you enable Mobile Printing with PrintNode integration, you can also enable support for weighing scales.

For more information about PrintNode integration, see the help topic [NetSuite Ship Central FAQs](#).

Mobile Printing Requirements for PrintNode Integration

Before you begin your Mobile Printing setup, make sure that the following requirements are met:

- Online Forms and Advanced PDF/HTML Templates features enabled on your NetSuite account
For instructions, see the help topic [Enabling Features](#).

 **Note:** If you don't find the Online Forms or Advanced PDF/HTML features in your NetSuite account, contact your account manager.

- Active PrintNode account and valid PrintNode API key
For PrintNode requirements, you can visit the home page at <https://www.printnode.com>.
- Printers configured for network printing

 **Note:** Make sure your printer drivers are up to date.

- Local computers installed and set up with the PrintNode client software
The PrintNode client detects the printers from a local computer and syncs them with their servers and your PrintNode account. From your PrintNode client, you can track and view the status of your printers.
- If you use ZPL printers for Ship Central, choose the following printing preferences when you print labels:

- Page size – 4 x 6 in
- Orientation – Portrait
- Printing position – 0.00 in (no offsets)

For more information, see the help topic [Shipping Labels and Documents for Mobile Printing](#).

Mobile Printing Setup Procedures

If you set up Mobile Printing for Warehouse Management, you can use the same basic settings for Ship Central. If you use PrintNode integration, verify that your printing and printer settings for Warehouse Management apply to Ship Central.

Without PrintNode integration, skip the procedures and settings for printer devices and the Online Forms feature. For more information, see [Setting Up Print to File](#).

With PrintNode integration, you can complete the following procedures to set up Mobile Printing for Warehouse Management, Ship Central, or both:

1. After you enable the Online Forms feature, verify that the Online Form User role is configured properly. See [Setting Up the Online Form User Role](#).
2. For your SCM Mobile settings, check the **Enable Mobile Printing** box. See [Configuring SCM Mobile App Settings](#).
3. Configure your PrintNode API key and IP addresses of computers installed with the PrintNode client. See [Configuring Security Settings](#).



Note: If you have configured Mobile Printing for Warehouse Management and you want to set up Mobile Printing for Ship Central, you do not have to re-enter your PrintNode API key.

4. Verify that all the printers you want to use for each app appear in your account. Assign each a printer type to designate the ones you want to use for label printing or regular printing. See [Setting Up Your Printers](#).
Optionally, if you create printer groups, you can assign printers to them. See [Creating Printer Groups](#).
5. For NetSuite Ship Central, make sure that you set your preferences for international and local shipping labels, default logo, and return labels for local shipments. You can also activate the rule for brand names. See the help topic [Details on Shipping Labels and Documents](#).
6. If you want to create your own custom templates for labels or documents, see [Creating Custom Print Templates and Files](#).
7. Assign a default printer, template, and number of copies for labels or documents you want to print. If you create a custom template and file, you can assign it as the default template for printing. You can set up these default settings in a print report type. See [Setting Up Printing Settings on Print Reports](#).
On print report types, you can enable page number entry. You can also add rules to specify which printers or templates to use for a label or document. See [Configuring Rules for Printers, Templates, or Number of Copies](#).
8. (Optional) You can change the default printing mode to automatic and required for each standard or custom label or document. If you want to exclude a label or document from printing, you can inactive the associated print report. See [Setting Up Automatic or Required Printing](#).

If you encounter setup or printing errors, see [Troubleshooting Mobile Printing](#) or [Resyncing Printer Connections](#).

If you want to add a Print button to a page, see the following topics:

- To set up Print buttons and actions on custom mobile pages within the app, see [Adding a Print Button to Custom Mobile Pages](#).
- To set up printing on NetSuite pages, see [Adding a Print Button to NetSuite Pages](#).

Setting Up Print to File

Without PrintNode integration, you can save soft copies of ZPL or PDF files generated through the mobile app. You can use the standard templates or create your own to specify the details and layout of your labels or documents.

During printing, you can choose the Print to File option as your printer to save soft copies of the files. The app saves the label or document files in the local storage folder of your handheld device or computer.

You can set up print to file by completing the following procedures:

1. Enable Mobile Printing – Enable the Mobile Printing setting and choose the apps to which you want to provide access to it. See [Configuring SCM Mobile App Settings](#).
SCM Mobile automatically creates the Print to File record with the **All Types** printer setting to support both ZPL and PDF formats. To view this record, using the Mobile Administrator role, go to Setup > Label Printing > Printers. In the **Not PrintNode Integrated** column, the Print to File record has a **Yes** setting. You cannot directly set up records for your printer devices, which you can do through PrintNode integration.
2. (Optional) Create custom print templates – If you want to create your own label and document templates, you can customize the standard print files and templates. For instructions, see [Creating Custom Print Templates and Files](#).
3. (Optional) Assign default templates and Print to File as the default printer on print reports – Assign Print to File as the default printer when you print labels and documents through the app. You can also choose default standard or custom print templates on print reports. For instructions, see [Setting Up Printing Settings on Print Reports](#).
4. (Optional) Add printing rules to print reports – On each print report, you can add printing rules to specify conditions for using a Print to File record or template. For instructions, see [Configuring Rules for Printers, Templates, or Number of Copies](#).
5. (Optional) Create printer groups – You can assign the Print to File printer to specific printer groups that you create. For instructions, see [Creating Printer Groups](#).

Configuring Security Settings

Through the PrintNode client installed on your local computers, NetSuite connects to your network printers and weighing scales. To establish the connection, you must configure your PrintNode API key and safelist the IP address of your computers.

By default, you can add static IP addresses of printers to your safelist. If you enable the setting for dynamic IP addresses, you can also add each or a range of these addresses. To enable support for dynamic addresses, see [Configuring SCM Mobile App Settings](#).

You can add up to 99 addresses only at a time. So, when setting address ranges, note the following:

- Only the last section for the device ID can vary.
Example: **1.2.3.200 to 1.2.3.210** or **1.2.3.200 - 1.2.3.210**
- You can include special characters, such as ? and *, to replace the last two digits of a range, as shown in the following examples:
Examples: **1.2.3.20*** (1.2.3.200 to 1.2.3.209) or **1.2.3.2?** (1.2.3.20 to 1.2.3.29)

To configure security settings:

1. Access the Print Security Settings page through one of the following paths that applies to your role:
 - Using the Mobile Administrator role, go to Setup > Label Printing > Print API Key.
 - Using the Packing Administrator role, go to Setup > Printing Setup > Print API Key.
2. (Optional) If you enable mobile printing, enter values in the following fields:
 - **Support for Dynamic IP Address** – Check this box if you want to set up dynamic IP addresses of printers.
3. On the Print Security Settings page, add the IP Address of each computer installed with the PrintNode client.

 **Tip:** You can view the list of available IP addresses in the Logs tab of the PrintNode client installed on your local machine. See [Mobile Printing Requirements for PrintNode Integration](#).

- a. Click **Add IP Address**.
 - b. On the Printer IP Address page, in the **IP Address** field, enter the computer's IP address or a range that you want to safelist.
 - c. Click **Add**.
- NetSuite redirects you to the Print Security Settings page on which you can review the safelist of static or dynamic IP addresses. If you want to remove an IP Address from the list, click **Delete IP Address**.

For each IP Address you want to add, repeat steps a to c.

4. In the **Print API Key** field, enter the API Key for your PrintNode account.
The same key applies to both the Mobile Printing and Weighing Scale capabilities of SCM Mobile.

 **Tip:** In the message below the buttons, click the link to go to the PrintNode site and access your account to get the API Key.

5. Click **Submit API Key**.

Setting Up Your Printers

When you safelist the IP address of your local computers, NetSuite automatically loads and adds the available printers to your account. For more information about safelisting your IP addresses, see [Configuring Security Settings](#).

You can classify the printer type of each device as either a report printer or a label printer. You can also assign them to a location. When you print from a mobile app, you can choose a printer assigned to the currently selected location, the default printer assigned to a print report, or a printer not assigned to a location.

If you create printer groups, you can assign a printer to multiple groups. On a printer record, you can view the list of groups to which it belongs. On the app, you can choose a default printer group for a location. During printing, you can choose a different group associated with the printer you want to use. To set up and assign printer groups, see [Creating Printer Groups](#).

To set up your printers:

1. Access the Print - Printers List page through one of the following paths that applies to your role:
 - Using the Mobile Administrator role, go to Setup > Label Printing > Printers.

- Using the Packing or Ship Central Administrator role, go to Setup > Printing Setup > Printers.
- 2. From the Print - Printers List, click **Edit** next to the printer you want to set up.



Tip: If you do not find your printer in the list, verify that you have safelisted the IP Address of the local computer associated with your printer. See [Configuring Security Settings](#).

- 3. On the Print - Printers page, in the **Printer Type** field, select one of the following printer types:
 - **Report** - Standard document printer for PDF templates in .XML file format
 - **Label** - Label printer for ZPL templates in TXT file format

For more information about print templates, see the help topic [WMS Standard Labels and Templates](#) for Warehouse Management or [Shipping Labels and Documents for Mobile Printing](#).
- 4. (Optional) In the **Printer Location** field, select the location you want to associate with the printer.

You can access a printer regardless of the app's location setting if you do not associate it with a location or if you assign it as a default printer of a print report.
- 5. Click **Save**.

After you classify a printer, you can set it up as the default printer for label or document. You can also add rules that specify when you want to use it. You can use it for specific templates, locations, items, or other such cases. For more information about print reports, see [Setting Up Printing Settings on Print Reports](#).

Resyncing Printer Connections

SCM Mobile provides the Resync Printers tool for keeping your printers list up to date based on the active printers in your PrintNode client. By default, it syncs your printers automatically every 15 minutes. At any time, you can run the tool to resolve issues due to disconnected, offline, or inactive printers..

Using the Administrator role, you can access and start the Resync Printers tool by going to Setup > Custom > Resync Printers. Using other roles, you may access it from the Printing Setup submenu. It immediately runs the **Print - Print List Sync Scheduler** script to obtain active printers from your PrintNode client. It also opens the Scheduled Script Status page that contains the list of manual and automatic default resync jobs. On this page, you can view the progress and status of a job. After you see a job switch to Complete status, you can view your list of updated printers and set up any new ones. For instructions, see [Setting Up Your Printers](#).

In case you manually add printer records to the Printers List, the sync script inactivates them automatically. SCM Mobile uses only printer records that it automatically generates from the active printers in your PrintNode client. For more information, see [Troubleshooting Mobile Printing](#).

Creating Printer Groups

You can create printer groups to identify printers used for specific areas or teams within your location. On a mobile app, you can choose a default printer group for a location. When you print a label or document, you can choose a different group that includes the printer you want to use.

Printer groups become available to all mobile apps for which you enable Mobile Printing.

To create a printer group:

- 1. Using the Mobile - Administrator role, go to Setup > Label Printing > Printer Groups > New.
- 2. On the Print - Printer Group page, in the **Name** field, enter a unique name for the group
- 3. Click **Save**.

After you save a new group, the **Print - Printer Group** subtab appears on the page.

4. On the **Print - Printer Group** subtab, click **New Print - Printer Mapping** to add a printer.
5. On the **Print - Printer Mapping** page, set values in the following fields:
 - a. **Printer** – Select the name of the printer you want to add to the group.
 - b. **Priority** – Enter a unique number greater than zero to indicate the priority of this printer with regard to other ones for this printer group.

The app arranges the list of printers based on priority numbers, in ascending order.

6. Click **Save**.

You can repeat steps 5 to 7 to add more printers to this group.

On the printer record, you can view the list of groups to which a printer belongs. See [Setting Up Your Printers](#).

Creating Custom Print Templates and Files

You can copy a standard TXT or XML print file available within Mobile Printing and customize it according to your label or document requirements. Common customizations for print files include showing a logo or additional details.

You can also create your own print file if no standard file is available for the label or document you want to print. Create a custom print file in TXT format for label printers or an XML file for regular printers.

Complete the following procedures to set up custom print files or templates:

1. Custom Print File Creation
 - [Creating Custom TXT or XML Print Files](#)
 - [Creating Custom Advanced PDF Templates for Labels](#) – for NetSuite WMS labels only
2. Common Label or Document Customizations
 - [Showing Data on Custom Labels or Documents](#)
 - [Adding a Logo to Custom Labels or Documents](#)

3. Custom Print Template Creation

After creating your custom print file or WMS Advanced PDF template, set it up on a custom print template. See [Creating Templates for Custom Print Files](#).

4. Default Printing Settings

On a report type, you can assign your custom print template as the default template or specify rules when it should be used. You can also set up the source record, default printer, and number of copies for the label or document you want to print.

If you have multiple templates for the same label or document, you can set up rules for when to use each of them. Alternatively, if you apply the same condition to multiple rules, the associated templates become available for selection on the app.

For more information, see [Setting Up Printing Settings on Print Reports](#).

Creating Custom TXT or XML Print Files

Create custom print files on which you can specify the data you want to appear on your labels or documents for Mobile Printing. In your file cabinet, you can access and copy the standard print files. Copy the XML files to print labels in PDF format or the TXT files for labels in ZPL format. If no standard file is available for the label or document you want to print, create your own XML or TXT file. Use a file editor of your choice to customize your copy or new print file.

Advanced PDF template files are available for WMS labels, which you can copy and customize using the NetSuite template editor. See [Creating Custom Advanced PDF Templates for Labels](#).



Important: Do not customize the standard templates and template files directly. Customizations on standard print files and templates are overridden during SuiteApp updates.

To view the standard print files available for mobile printing, see the following topics:

- NetSuite WMS files and templates – See the help topic [Mobile Printing for NetSuite WMS](#)
- Ship Central files and templates – See the help topic [Shipping Labels and Documents for Mobile Printing](#).

The following instructions describe the steps to copy a standard file and upload your updated copy to the file cabinet.

To customize TXT or XML print files:

1. Using the Mobile Administrator role, go to Documents > Files > File Cabinet.
2. On the File Cabinet page, on the navigation panel, access the Templates folder of the SuiteApp associated with the mobile app. You can follow this navigation path: SuiteBundles > Bundle <ID> > com.netsuite.<mobile app> > src > Templates.

You can refer to the links in this topic, [SCM Mobile SuiteApp Installation](#), for the bundle IDs of mobile apps.

To upload print files that you have already customized, proceed to Step 5.

3. To copy a standard XML or TXT print file, click **Copy Files**. On the Folder Contents page, check the box next to the file, and then click **Copy**.
4. Update or modify your copy of the print file based on your label or document requirements.

For examples of print file customizations, see the following topics:

- [Showing Data on Custom Labels or Documents](#)
- [Adding a Logo to Custom Labels or Documents](#)

5. After you complete your customization, upload the print file to the file cabinet by clicking **Add File**. This step applies to new or copies of XML or TXT files, as well as Advanced PDF template files, that you have customized.

After uploading your custom print file, assign it to a custom print template. See [Creating Templates for Custom Print Files](#).

Creating Custom Advanced PDF Templates for Labels

For NetSuite WMS, you can copy and customize the Advanced PDF template file of a standard item or pallet label, instead of the raw XML file.

On your copy of an Advanced PDF template, you can use the template or Source Code editor to add or hide fields. You can perform other customizations according to your label or document requirements.

For the list of standard Advanced PDF template files available for WMS labels, see the help topic [WMS Standard Labels and Templates](#).

To create a custom Advanced PDF template for a label or document:

1. Using the Administrator role, go to Customization > Forms > Advanced PDF/HTML Templates.
2. On the Advanced PDF/HTML Templates page, do one of the following:

- To copy a WMS Advanced PDF template, click **Edit** next to the one you want to use for your label.
 - To create a PDF template, click **New Template**.
3. On the Advanced PDF/HTML Template page, save a new or copy of the template by doing the following:
 - a. Click **Template Setup**.
 - b. On the Template Setup popup window, in the **Title** field, replace the default name with the name you want to assign to your template.



Important: Complete this step to ensure that you do not override the default template. You must change the title before saving your copy.

- c. Click **Save** to save the title and close the popup window.
 - d. Click **Change ID**.
Note this script ID, which you have to set up on your custom print template.
 - e. On the Advanced PDF/HTML Template page, click **Save As**.

4. You can update your new or copy of an Advanced PDF template through one of the following editors:

- [WYSIWYG Editing in the Template Editor](#)
- [Source Code Editing in the Template Editor](#)

Common customizations include the following:

- **Adding a logo to an Advanced PDF template**

To upload the logo you want to appear on your label or document, see [Adding a Logo to Custom Labels or Documents](#).

To set up the uploaded logo on your custom template, see the help topic [Including Images in Advanced Templates](#)

- **Adding data for a label or document**

Set up the data you want to appear on a label or document based on the data available in your source record. You can choose a standard source record, a NetSuite record, or a saved search. For more information, see [Showing Data on Custom Labels or Documents](#).

- **Changing the template layout and formatting**

For margin settings, see the help topic [Template Setup Window](#).

For general printing preferences, see the help topic [Advanced Templates Support for Company Printing Preferences](#).

5. Click **Save**.
6. To view your template updates, click **Preview**.

After creating your custom Advanced PDF template, you must save it to your file cabinet. See [Creating Custom TXT or XML Print Files](#). Then, you can assign it to your print template. See [Creating Templates for Custom Print Files](#).

Showing Data on Custom Labels or Documents

On your new or copy of a print file, you can show or hide data from a label or document. Choose a single source of data for a print file. You can choose one of the standard source records used in the standard print files and Advanced PDF templates. Standard source records include preconfigured fields for data that you can show on your label or document.

Standard source records may not include the data you want to use for your label or document. You can set up additional data through one of the following ways:

- You can use the ten additional fields, named **User Field**, included in the standard source records.
For example, the source record for the standard WMS item labels is the **WMS Auto Printing Rule Evaluation Data** record. It supplies the data for the item name and item description that appears on standard item labels. This source record also contains other preconfigured item and transaction data, such as the item quantity and transaction number. If you choose this source record for your template, you can use any of these available data.
If you want to show additional data that is not preconfigured on this record, you can map them to the **User Field** fields.

Note: Use of the User Field fields apply to custom mobile processes and include customization procedures to set up field sourcing on Print button actions. After you complete all the procedures for print file and template set up, you can proceed to field sourcing for the User Field fields. For instructions, see [Mapping User Fields for Custom Print Templates](#).

For example, you want to display the item's vendor on your item label in ZPL format. You can use User Field 1, the name of the first blank field in the **WMS Auto Printing Rule Evaluation Data** record. To set up this field, you can do the following:

1. Using the ZPL template editor of your choice, you can add a line for the label of the vendor field.
 2. Add another line for the data of the vendor field. In this line, you can include the following string to map the vendor to User Field 1:
`${record.custrecord_wms_user_field_1}`
- To set up more fields than those available in a standard record, choose a different NetSuite record or use saved search instead. From a NetSuite record, you can obtain data from the header or body fields. If you want to obtain sublist data, choose a new or existing saved search as your source.

The following tables show the list of preconfigured and additional data fields in the **WMS Auto Printing Rule Evaluation Data** standard source record:

Description	ID	Type
User	custrecord_wms_user	List/Record
Item	custrecord_wms_item	Free-Form Text
Inventory Status	custrecord_wms_inv_status	Free-Form Text
Item Quantity	custrecord_wms_item_qty	Long Text
Location	custrecord_wms_ext_location	List/Record
Item Description	custrecord_wms_item_desc	Free-Form Text
Task Type	custrecord_wms_tasktype	List/Record
Item Group	custrecord_wms_item_group	List/Record
Item Family	custrecord_wms_item_family	List/Record
Customer	custrecord_wms_customer	List/Record
Notes	custrecord_wms_notes	Free-Form Text
Units Type	custrecord_wms_uom	List/Record

Description	ID	Type
Transaction Number	custrecord_wms_tran_num	List/Record
Transaction Type	custrecord_wms_tran_type	List/Record
Transaction Date	custrecord_wms_tran_date	Date
Inbound Shipment	custrecord_wms_inbshipment	List/Record
Lot #	custrecord_wms_lot_num	Free-Form Text
Lot Expiry Date	custrecord_wms_lot_exp_date	Date
Default *	custrecorddefault	Free-Form Text
* The Default field has a preconfigured value of 1 , which is used in the printing rules of some standard print report types. For more information, see Configuring Rules for Printers, Templates, or Number of Copies .		
Additional Fields:		
User Field 1	custrecord_wms_user_field_1	Free-Form Text
User Field 2	custrecord_wms_user_field_2	Free-Form Text
User Field 3	custrecord_wms_user_field_3	Free-Form Text
User Field 4	custrecord_wms_user_field_4	Free-Form Text
User Field 5	custrecord_wms_user_field_5	Free-Form Text
User Field 6	custrecord_wms_user_field_6	Free-Form Text
User Field 7	custrecord_wms_user_field_7	Free-Form Text
User Field 8	custrecord_wms_user_field_8	Free-Form Text
User Field 9	custrecord_wms_user_field_9	Free-Form Text
User Field 10	custrecord_wms_user_field_10	Free-Form Text

For the list of other source records used in the standard labels and documents, see [Standard Report Types in Mobile Apps](#). To view the standard source records and their fields, using the Administrator role, go to Customization > Lists, Records, & Fields > Record Types.

To continue your custom print file setup, see [Creating Custom TXT or XML Print Files](#) or [Showing Data on Custom Labels or Documents](#).

Adding a Logo to Custom Labels or Documents

In your file cabinet, you can upload the image file of the logo you want to display on your custom label or document.

To add a logo to a custom label or document:

1. In your file cabinet, you can upload the image file of the logo you want to display on your custom label or document.
2. On the File Cabinet page, do the following:
 - a. From the navigation panel, click **Images**.

- b. Click **Add File**.
 - c. On the popup window, search for the image file of the logo and then select it. Make sure that the correct file appears in the File name field. Then, click **Open**.
 - d. On the File page, in the **URL** field, you can use the location of the image file to set up the logo on your custom print file or advanced PDF template.
 - e. Click **Save**.
3. After you upload the logo, you can set it up on your custom XML or TXT print file. To set up logos on Advanced PDF templates, see [Creating Custom Advanced PDF Templates for Labels](#).

Creating Templates for Custom Print Files

After you create and upload a custom print file or WMS Advanced PDF template, you must associate it with a new template or a copy of an existing one. On your custom print template, specify the file cabinet path to your print file.



Important: Do not replace the print files configured on the standard print templates.

To create templates for custom print files:

1. Using the Mobile Administrator role, set up a standard or new mobile print template by doing either of the following:
 - To copy a standard template, go to Setup > Label Printing > Templates. On the Print - Templates List, click **View** next to the standard template you want to copy. On the Print - Template page, point to the Actions sublist, and then click **Make Copy**.
 - To create a new template, go to Setup > Label Printing > Templates > New.
2. On the Print - Template page, enter values in the following fields:
 - a. **Name** – Enter a unique name for your print template.
 - b. **Print Template Path** – Enter the file cabinet path to your print file or Advanced PDF template by doing one of the following:
 - For XML or TXT print files, enter the default path, **~/src/Templates/**, followed by your print template filename.
Take for example the path for the standard item label PDF template: **~/src/Templates/ItemLabelPDFTemplate.xml**
 - For Advanced PDF templates, enter the script ID.



Tip: You can find script IDs on the Templates list, which you can access by going to Customization > Forms > Advanced PDF/HTML Templates.

3. Click **Save**.

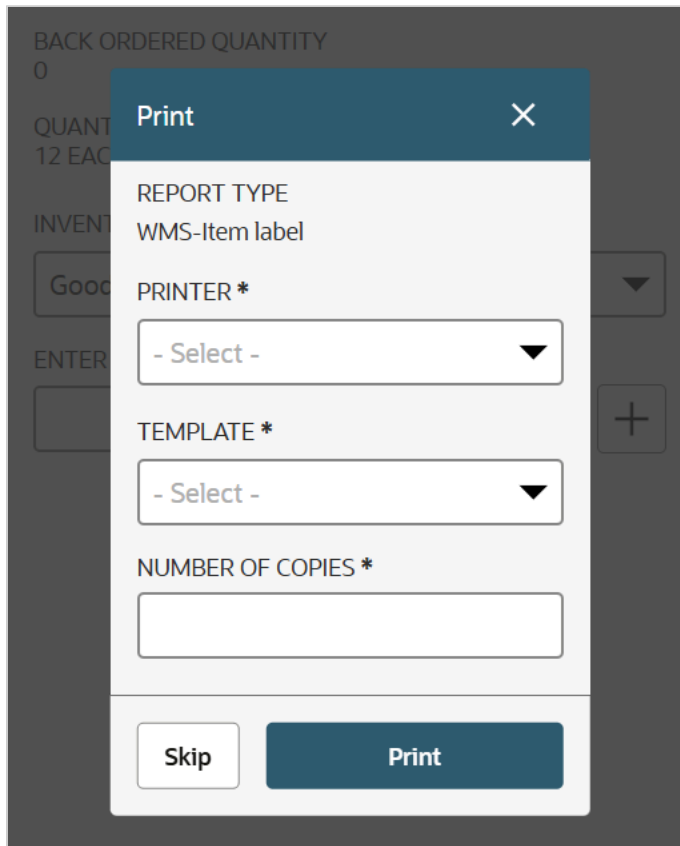
To set up the printing preferences for your custom template, assign it to a report type. On a report type, you also map a print template with the source record used in its associated print file. See [Setting Up Printing Settings on Print Reports](#).

Setting Up Printing Settings on Print Reports

On a print report type, you can assign a default print template and map it to its source record. You can also set the default printer and number of copies for the label or document you want to print using the

template. If you have multiple print templates or printers, you can specify when you want to use them through printing rules. Through rules, you can also display one or more templates that you can choose from on the app.

In the following screenshot of the Print popup window, you can view the three printing fields that display your settings on a print report type. The values in these fields initially display your default settings. If you set up rules, you can view multiple options for templates or printers, and a dynamically set value for number of copies.



Print templates provide the path to the location of an XML or TXT print file. These files specify which data you want to show on your label or document. Mapping a template to its source record associates data from the source record with the fields of the print file.

For example, when you print an item label during the PO receiving process, the mobile app uses the WMS Item Label's print report. To create the item label, it obtains the data from the source record configured on the print report. To identify which data to retrieve from the source record, it uses the print template configured on the same print report.

For information about custom print files and templates, see [Creating Custom Print Templates and Files](#).

Standard vs Custom Print Reports

Standard print reports are available in both standard and custom mobile processes for each label or document included in the app. A default template is preconfigured on each standard print report. You can change it to a different standard template or to your own custom template.

You can set up your custom print template on a standard print report that uses the same standard source record. You must create and set up a custom print report for either of the following reasons:

- Your custom print template does not use a standard source record.
- Your custom print template uses one of the additional source fields, named **User Field**, from a standard source record.

If your custom print template uses only the preconfigured fields from a standard source record, not the User Field fields, you can set it up in a standard report type.

If you set up a custom report type, you can add it to a Print button on a custom mobile process only. For more information about custom mobile processes, see [Customizing Mobile Processes](#).

Standard Report Types in Mobile Apps

The following table shows the default source records and print templates mapped to the standard report types available in a mobile app:

Print Report Type	Standard Source Record	Default Print Template *	Print Template File
For Warehouse Management:			
WMS-Item label	customrecord_wms_rule_evaluatn_autoprint	WMS Default Item Label PDF Template	ItemLabelPDFTemplate.xml
WMS Item Label with Lot or Serial		WMS Default Item Label with Lot or Serial Advanced PDF Template	ItemLabelLotOrSerialPDFTemplate.xml
WMS-Pallet label		WMS Default Pallet Label PDF Template	PalletLabelPDFTemplate.xml
WMS Pallet Label with Lot or Serial		WMS Default Pallet Label with Lot or Serial ZPL Template	PalletLabelLotOrSerialPDFTemplate.xml
WMS-Carton label		WMS Default Carton Label PDF Template	CartonLabelPDFTemplate.xml
WMS-Replenishment Pallet label		WMS Default Replenishment Pallet Label Advanced PDF Template	ReplenPalletLabelPDFTemplate.xml
WMS-WO Pallet label		WMS Default WO Pallet Label PDF Template	WOPalletLabelPDFTemplate.xml
WMS WO Pallet Label with Lot or Serial		WMS Default WO Pallet Label with Lot or Serial PDF Template	WOPalletLabelLotOrSerialPDFTemplate.xml
For Ship Central:			
PackShip – BOL Pallet Report	customsearch_packship_bolcustomerorder	PackShip – BOL Pallet Template	SO_BOL_Pallet_Template.xml
PackShip – BOL Report		PackShip – BOL Template	SO_BOL_Template.xml
PackShip – SO Carton List Label	customsearch_packship_carton_list_print	PackShip – SO Carton List Template	SO_Carton_List_Template.xml

Print Report Type	Standard Source Record	Default Print Template *	Print Template File
PackShip – SO Pallet List Label	customsearch_packship_pallet_list_print	PackShip – SO Pallet List Template	SO_Pallet_List_Template.xml
PackShip – TO BOL Pallet Report	customsearch_packship_bolcustomerorder	PackShip – TO BOL Pallet Template	TO_BOL_Pallet_Template.xml
PackShip – TO BOL Report		PackShip – TO BOL Template	TO_BOL_Template.xml
PackShip – TO Carton List Label	customsearch_packship_carton_list_print	PackShip – TO Carton List Template	TO_Carton_List_Template.xml
PackShip – TO Pallet List Label	customsearch_packship_pallet_list_print	PackShip – TO Pallet List Template	TO_Pallet_List_Template.xml
PackShip Carton Label	customrecord_auto_printruledata	PackShip Carton Label Template	CartonLabelZPLTemplate.txt
PackShip Pallet Label		PackShip Pallet Label Template	PalletLabelZPLTemplate.txt
Ship Label Report **		Shipping Label (PDF)	ShipLabelPDFTemplate.txt
TO Ship Label Report **			
Return Label Report (SO) **		Return Shipping Label (ZPL)	ShipLabelZPLTemplate.txt
Return Label Report (TO) **		TO Return Shipping Label (ZPL)	ShipLabelPDFTemplate.txt
* Standard ZPL templates not assigned as the default template in a standard report type use the same source record as the one used by the standard PDF templates. For NetSuite WMS standard templates, see the help topic WMS Standard Labels and Templates. For Ship Central standard templates, see the help topic Standard Templates for Packing or Shipping Labels or Documents. ** Use the label templates for shipping only to specify whether you want to print ZPL labels for label printers or PDF labels for report or regular printers. They are not used to create shipping or return labels, which are generated by the carrier.			

To set up printing settings on a print report:

- Depending on your role, access the Report Type List page through one of the following menu paths:
 - Mobile Administrator role – Go to Setup > Label Printing > Report Types.
 - Packing or Ship Central Administrator role – Go to Setup > Printing Setup > Print Reports.
- From the Report Type List, click **Edit** next to an existing report type, or click **New Report Type** to create a custom report type.
- On the Report Type page, set values in the fields.

For new custom report types only, enter values in the following fields:

 - Report Type** – Enter a unique name for the label or print document.

Note: Report Type names must not contain the following restricted terms: Printer, Template, NoOfCopies.

- Source Record ID** – Enter the ID of the source record or saved search that contains the data you want to use for your print template, mapping, and rules.

Enter the ID of a standard source record if you use its fields on your print template. See [Standard Report Types in Mobile Apps](#).

For existing standard or custom report types, set the following fields:

- **Default Printer Type** – Select one of the following printer types:
 - **Label** – Label printer for ZPL templates
 - **Report** – Regular document printer for PDF templates
 - **All Types** – Printers that you specify as All Types on their Print - Printers record. See [Setting Up Your Printers](#).

The list in the Printers field is filtered based on your choice for the printer type.

- **Default Printer** – Select the printer you want to assign as the default printer.
- **Default Template** – Select the template you want to assign as the default print template.

The default template must use the same source record as the one used by the print report. Make sure that you associate a ZPL or .txt template only with a Label printer type.

The print template you select in this field is assigned as default one that appears in the Templates field of the Print popup window. To set up more templates for the same label or document, you can add printing rules to the report type.

- **Default Number of Copies** – Enter a number greater than zero for the copies you want to print by default.
- **Enable Selective Page Printing** – Check this box to enable the option to enter the page number or range during printing.

With the box checked, the Page field is displayed on the Print popup window when you print the label or document associated with this report type.

4. Click **Save**.
5. If you want to add rules for setting a default or providing options for templates, printers, and number of copies, proceed to [Configuring Rules for Printers, Templates, or Number of Copies](#).

If you create a new print report, add it to the Print button of a mobile page within your custom mobile process. You can also set the printing mode for the new print report. For standard report types, you can change the printing mode settings on the Print button within the standard mobile process. For more information, see the following topics:

- To add a custom print report to the Print button of a mobile page, see [Setting Up Print Button Actions](#).
- To enable printing mode settings for an existing standard or custom print report, see [Setting Up Automatic or Required Printing](#).

Configuring Rules for Printers, Templates, or Number of Copies

You can add criteria-based rules for the following print report fields, which appear on the app's Print popup window:

- **Printer** – Create a printer rule to use a specific printer for Location A only.
- **Template** – Create a template rule to use a print template for both Item A and Item B only.
- **Number of Copies** – Create a number-of-copies rule to print copies equal to twice the quantity value of Item A.

Based on these sample cases, when you print an item label for Location A, the mobile app displays the printer you specify in the printer rule. It applies both the template and number of copies rules when

you print a label for Item A. If no rule applies to your print request, it uses your default print report type settings.

The mobile app evaluates and applies printing rules as you submit print requests during processing. You can set up rules on a standard or custom print report type, depending on your printing requirements.

For example, you set up different print templates for an item label you want to print. On the report type, you can create rules that specify when to use each template. If you want to apply the same rule to different templates, you can specify the same condition on each rule. During manual printing, templates that have the same condition appear as options in the Template field of the Print popup window.

Make sure that all the print templates you want to set up use the same source record as the one used by the report type. When you set up conditions for your printing rules, you can use only the data from the source record used by the report type.

 **Note:** Before you configure a rule on a print report, make sure you have already assigned a default setting for the printer, template, and number of copies. Otherwise, you might encounter an error when adding a mapping or rule. To set up default fields on a print report type, see [Setting Up Printing Settings on Print Reports](#).

To configure rules for printers, templates, or number of copies:

1. Depending on your role, access the Report Type List page through one of the following menu paths:
 - Mobile Administrator role: Go to Setup > Label Printing > Report Types.
 - Packing or Ship Central Administrator role: Go to Setup > Printing Setup > Print Reports.
2. On the Report Type List, click **Edit** next to the item or pallet label you want to configure.
The Report Type page appears.
3. Click the **Mappings** subtab, and then do the following:
 - a. Click the subtab for the printing rule to which you want to add a mapping: **Printers**, **Templates**, or **Number of Copies**.
 - b. Click **Add Mapping** to open the Mapping popup window.
Add mappings to specify the data you want to use as the criteria or condition for your rule. You can choose only from the data available in the source record configured in the report type.
 - c. In the **Source Field ID** field, select the field associated with the data you want to use in your rule.
For example, to create a template rule for a specific location, choose a location field. To create one for multiple items, choose an item field. For more information about source fields, see [Showing Data on Custom Labels or Documents](#).
If you want to use a custom source field or a User Field field, be sure to configure it in the Before Print action of a custom mobile process. See [Setting Up Print Button Actions](#).
 - d. In the **Source Field Type** field, select one of the supported data types for source fields:
 - **Text** – for List/Record fields
 - **Value** – for fields other than a List/Record

 **Tip:** Custom source fields are assigned the **Value** type.
 - e. Click **Save**.

Repeat this step to add more mappings.

4. To set up a printing rule, click the **Rules** subtab, and then do the following:
 - a. Click the subtab for the rule you want to define: **Printers**, **Templates**, or **Number of Copies**.
 - b. Click **Add Rule**.

On the Rule popup window, you can view and set up the source fields mapped in Step 3.

- c. For each source field, you can set up the data that you want to use for your rule criteria in the **Operator** and **Value** fields. For guidance, you can refer to the following table, which shows source fields from the **WMS Auto Printing Rule Evaluation Data** standard record:

Source Field Example	Operator	Sample Value
(Location field) custrecord_wms_ext_location	equal to – Select this operator to assign a single value	Location A
(Item field) custrecord_wms_item	any of – Select this operator to assign multiple values	Item A Item B

On the **Rules** subtab, this setting appears in the **Criteria** column.

Based on your printing requirements, you can set up one or more source fields for each rule. Each value you choose specifies or limits the conditions for when you want to apply the rule to a printer, template, or number of copies.

You can set up the same criteria on multiple rules to apply the same rule to different print templates or printers.

- d. In the **Evaluation Order** field, enter a number greater than zero that indicates the rule's position in the evaluation order sequence.

The mobile app evaluates rules based on the number, in ascending order.

If you have rules that use the same condition for different templates or printers, you can assign them the same evaluation order number. This setting displays multiple template or printer options on the app, which you can choose from during printing.

- e. Enter or select the rule value in the field that corresponds to the type of rule you want to create:

- In the **Printer** field, select the name of the printer you want to use when the rule is applied.
- In the **Template** field, select the name of the print template you want to use when the rule is applied
- In the **Number of Copies** field, enter a number greater than zero for the number of copies you want to print when the rule is applied.

To define a dynamic value, you can enter an expression that evaluates to the number of copies, or the ID of a numeric field that contains the value of the number of copies.

The rule criteria set up in Step 4.c applies to the printer, template, or number of copies that you select.

- f. Click **Apply**.

5. Click **Save**.

Setting Up Automatic or Required Printing

You can assign the following printing modes to each label or document you want to print: Automatic or Required. You can also inactivate the label or document for printing on the app. These settings are also available in standard mobile processes through configuration. For more information, see [Configuring Mobile Page Elements](#).

To enable these settings for custom processes, set up the report type of the label or document on the Print button of a mobile page. Your settings apply to the default template of the report type, as well as any print templates that you configure in a printing rule. Also, your settings do not apply to Print buttons on other mobile pages, which may use the same report type. For more information about report types, see [Setting Up Printing Settings on Print Reports](#).

The following table shows the standard mobile pages that contain the Print button by default:

Mobile Process	Mobile Page	Page Element (print button)
For Warehouse Management:		
NSWMS_POReceiving	Enter Serial Number (page_poReceiving_enterSerial)	poReceiving_enterSerial_printBtn - Action Button
	Enter Quantity (page_poReceiving_enterLotQuantity)	poReceiving_enterLotQuantity_printBtn - Action Button
	Enter Quantity (page_poReceiving_quantityScan)	poReceiving_quantityScan_printBtn - Action Button
NSWMS_InboundShipment Receiving	Enter Quantity (page_inbShipmentRec_quantityScan)	inbShipmentRec_quantityScan_printBtn - Action Button
	Enter Serial Number (page_inbShipmentRec_enterSerial)	inbShipmentRec_serialScan_printBtn - Action Button
NSWMS_Replenishment	Enter Quantity (page_replenishment_enterQuantity)	replenishment_enterQuantity_printBtn - Action Button
NSWMS_Search_Inventory	Item Information (page_search_Inventory_itemLotserialInformation)	search_Inventory_itemLotserialInformation_printbutton - Action Button
	Item Information (page_search_Inventory_itemInformation)	itemInformation_printbutton - Action Button
NSWMS_workOrder	Enter Quantity (page_workOrderAssembly_enterQuantity)	woAssemblyenterQuantity_printBtn - Action Button
NSWMS_singleOrder_salesOrder_Picking	Enter Carton (page_SingleOrderPicking_enterCarton)	enterCarton_Button - Action Button
NSWMS_singleOrder_transferOrder_Picking	Enter Carton (page_singleOrder_transferOrderPicking_enterCarton)	transferOrder_enterCarton_Button - Action Button
NSWMS_multiOrder_Picking	Enter Carton (page_multiOrderPicking_enterContainer)	multiOrderPicking_enterContainer_enterContainer - Action Button
For Ship Central:		
PackShip_salesOrder	Pack Carton page_salesOrder_packCarton	packCarton_printlabel - Action Button
	Packing Summary page_salesOrder_packedSalesOrderSummary	packedSalesOrderSummary_cartonListPrintBtn - Action Button
	Add Pallet (page_salesOrder_addPallet)	addPallet_printBtn - Action Button
	Packed Sales Order Pallet Summary page_salesOrder_packedSalesOrderPalletSummary	packedSalesOrderPalletSummary_palletListPrintBtn - Action Button
PackShip_transferOrder	Pack Carton (page_transferOrder_packCarton)	packCarton_TOPrintlabel - Action Button

Mobile Process	Mobile Page	Page Element (print button)
	Packing Summary (page_transferOrder_packedTransferOrderSummary)	packedTransferOrderSummary_cartonListPrintBtn - Action Button
	Add Pallet (page_transferOrder_addPallet)	addPallet_TOPrintBtn - Action Button
	Packed Transfer Order Pallet Summary page_transferOrder_packedTransferOrderPalletSummary	packedTransferOrderPalletSummary_palletListPrintBtn - Action Button
ShipCentral_salesOrder	Confirm Shipping Address page_ShipCentral_SO_adressConfirmPopup	adressConfirmPopup_SO_confirmAddressAndPrint-Action Button
		adressConfirmPopup_confirmAddressAndPrintShip-Action Button
ShipCentral_transferOrder	Confirm Shipping Address page_ShipCentral_TO_adressConfirmPopup	adressConfirmPopup_TO_confirmAddressAndPrint-Action Button
		TOadressConfirmPopup_confirmAddressAndPrintShip-Action Button

If you set up your print template on a custom report type, you can add it to a custom mobile process first before you enable the printing mode settings. For instructions, see [Setting Up Print Button Actions](#).

To set up report types on a mobile process:

1. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
2. On the Mobile - Applications List, click **View** next to the mobile application.
3. For standard mobile processes, access the Print button settings by doing one of the following:
 - a. On the Mobile - Process List, click **Configure** next to the standard mobile process.
 - b. On the Mobile Configuration page, in the **Page** field, select the mobile page that displays the Print button you want to update.



Tip: If the mobile page does not contain a Print button by default, you can add it to a custom mobile process, instead, through Mobile Customization. Step 4 describes the procedures to enable printing settings for custom mobile processes. For more information, see [Adding a Print Button to Custom Mobile Pages](#).

- c. On the **Page Element** subtab, in the **Element** field, select the page element for the print button.
 - d. In the Action Settings section, in the **Report Type** field, select the standard report type you want to configure.
4. For custom mobile processes, access the Print button settings by doing one of the following:
 - a. On the Mobile - Process List, click **View** next to the custom mobile process.
 - b. On the Mobile - Process page, click the name of the mobile page that contains the Print button.
 - c. On the Mobile - Page page, click the name of the print button.
 - d. On the Mobile - Page Element page, click the link in the **On Click Action** field.
 - e. On the Mobile - Action page, click the **Print Reports** subtab, next to a standard or custom report type, click **Edit**.

The Mobile - Print Reports page appears.

5. Check the box for the setting you want to enable:

- **Inactive** – Check this box if you want to inactivate this report type for the Print button on this mobile page.
This setting does not apply to the Print button of other mobile pages that use the same report type.
- **Required** – Check this box if you want to set the report type to mandatory printing.
Checking this box also hides the Skip option when you print the label or document associated with the report type.
- **Automatic** – Check this box if you want to automatically print a label or other document.



Tip: If you are setting up a report type that displays multiple print template options during printing, do not check this box. Otherwise, the report type does not appear on the Print popup window. This popup window contains the Template field from which you can choose a template to print.

To automatically submit print requests in the backend, checking this box also checks the Required box. If all report types associated with the Print action are set to Automatic printing, the Print button is hidden from the mobile page.

6. Click **Save**.
7. If you want to update a Print button on another page within the same process, repeat Steps 3 and 4.
8. To apply your updates to the mobile app, do one of the following:
 - For standard mobile processes, click **Save & Update**.
 - For custom mobile processes, you can perform other customizations that suit your business requirements. After you complete your customization, apply your updates to the mobile app. See [Compiling Mobile Customizations](#).

Mapping User Fields for Custom Print Templates

You must map each User Field field of the **WMS Auto Printing Rule Evaluation Data** record or another standard source record used in your custom print file. You can set up mappings on the Print button used to print the template in which you set up your print file. When you tap the button, the app obtains the data required to print the template for the label or document. You can obtain data from the mobile state, which temporarily stores data captured and used within a mobile process. For more information about custom print files and templates, see [Creating Custom Print Templates and Files](#).

Before you set up User Field mappings, make sure that you have completed the template setup on print reports. For more information, see [Setting Up Printing Settings on Print Reports](#).



Note: If you use the User Field fields in your print report rules, be sure to also map them accordingly. To set up rules, see [Configuring Rules for Printers, Templates, or Number of Copies](#).

The procedure in this topic describes the steps for setting up mappings on existing print button actions. If you want to perform other print button customizations, you can include User Field mapping when you set up the print actions. For instructions, see [Setting Up Print Button Actions](#).

To map User Fields for custom print templates:

1. Access the **Before Print Action** of the Print button associated with the print template and report by doing the following:
 - a. Go to Setup > Custom > Mobile Applications.

- b. From the Mobile - Applications List, click **View** next to the mobile app.
 - c. From the Mobile - Process List, click **View** next to the custom mobile process.
 - d. On the Mobile - Process page, on the **Pages** subtab, click the name of the mobile page that contains the print button.
 - e. On the Mobile - Page page, on the **Page Elements** subtab, click the name of the print button.
 - f. On the Mobile - Page Element page, in the **On Click Action** field, click the action link.
 - g. On the Mobile - Action page, in the **Before Print Action** field, click the action link.
2. On the Mobile - Action page for the Before Print Action, on the **Input Parameters** subtab, click **New Mobile - Input Parameter**.

 **Note:** The Mobile - Action page also displays the **Print Reports** subtab. This subtab contains the list of reports associated with templates that you print through the button. You can review the list to make sure that you are setting up mappings for the correct print button and report.

3. On the Mobile - Input Parameter page, do the following:
 - a. In the **Name** field, enter a unique name for the input parameter of the User Field field.
 - b. In the **Key** field, enter the internal ID of the User Field field
Example: **custrecord_wms_user_field_1** – internal ID of User Field 1 of the **WMS Auto Printing Rule Evaluation Data** record
 - c. In the **Value** field, enter the data you want to pass to the User Field field. To set a dynamic value, you can enter the state path to the data.
Example: **state:dataRecord:auxParams:customVendorName** – state path to the vendor associated with a purchase order
To obtain data from the mobile state, see [Accessing Data Stored in the State](#).

For more information about input parameters, see [Input Parameters for Data Validation, Storage, or Submission](#).
4. Click **Save**.
5. After you complete all your customizations, apply them to the app. For instructions, see [Compiling Mobile Customizations](#).

Mobile Printing Customization

You can add the Print button to a NetSuite page or to a custom page of a custom mobile process. For more information, see the following topics:

- [Adding a Print Button to NetSuite Pages](#)
- [Adding a Print Button to Custom Mobile Pages](#)

When you add the Print button, you also add the Print popup window that appears for labels or documents that you manually print. On the Print popup window, you can specify your printing options such as the printer, template, and number of copies. If you have multiple printers or templates, you can customize the options that appear on the popup window.

To set up the print action of buttons that add to a custom mobile page, see [Setting Up Print Button Actions](#).

If you want to edit print buttons or modify printing settings of standard mobile processes, refer to the Action Button element and Action Settings in the tables under [Configuring Mobile Page Elements](#).

Adding a Print Button to NetSuite Pages

When you enable Mobile Printing, you can set up a print button on standard and custom NetSuite forms, transactions, and records, including those not used in the mobile apps. On NetSuite pages, you can display a print button that submits your print requests through PrintNode. To configure the print action for your button, create a client script that invokes the SCM Mobile RESTlet for printing.

Prerequisites for Print Button Setup

Before you configure your print button and client script, verify that you have set up the Mobile Printing capability. If you want to use custom print templates for PDF labels or documents, be sure to create your XML or Advanced PDF print files. For more information, see the following topics:

1. [Mobile Printing Requirements for PrintNode Integration](#)
2. [Configuring SCM Mobile App Settings](#)
3. [Configuring Security Settings](#)
4. [Setting Up Your Printers](#)
5. [Creating Custom Print Templates and Files](#)
6. [SCM Mobile Scripts for Printing](#)

Print Button Configuration Options

You can add print buttons to a NetSuite page through either of the following configuration options:

- [Adding Print Buttons Through a User Event Script](#) – This option involves creating a user event script, aside from the client script. You can apply the user event to one or more NetSuite records at the same time. It enables you to control whether to display the button in view, edit, or both modes.
- [Adding a Print Button to a Custom Form](#) – If you want to set up a print button and client script in a single entry or transaction form, you can choose this approach. It involves configuring a custom form, which displays the print button in edit mode only.

Note that if you apply both approaches to a transaction, it displays duplicate print buttons in edit mode.

Accessing Printed Labels or Documents

SCM Mobile stores a soft copy of documents that you print in the PrintDocuments folder of your file cabinet.



Important: The PrintDocuments folder contains the PrintDocument.xml file, which is used internally. Do not edit or modify this file.

When you access your file cabinet, you can view this folder through the following path: SuiteBundles > Bundle <SCM Mobile bundle ID> > com.netsuite.mobile > PrintDocuments. To view the SCM Mobile bundle details, see [SCM Mobile SuiteApp Installation](#).

SCM Mobile Scripts for Printing

SCM Mobile provides the RESTlet that runs the print action to submit a print request from a NetSuite page. In your client script, you can call this RESTlet through the following details:

- **customscript_print_rl_trigger_print** - Internal ID of the script record
- **customdeploy_print_rl_trigger_print** - Internal ID of the script deployment record

For more information, see [Adding a Print Button to a Custom Form](#) or [Adding a Print Button to NetSuite Pages](#).

SCM Mobile also provides the following sample scripts for invoking the RESTlet, which you can use as reference when you create your own scripts:

- **custom_cs_direct_printing.js** - A sample client script that contains the callingPrintDirectly function, which invokes the RESTlet for printing. It also contains the input parameters passed to the RESTlet.

The following sample code for the function references the SCM Mobile RESTlet:

```
1 function callingPrintDirectly(){
2   console.dir(context)
3   var genericRestlerURL = url.resolveScript({
4     scriptId: 'customscript_print_rl_trigger_print',
5     deploymentId: 'customdeploy_print_rl_trigger_print',
6     returnUrl: false,
7   });
```

- **custom_ue_direct_printing.js** - A user event script that creates and adds a print button to a NetSuite record. The print button calls the callingPrintDirectly function of the client script.

If you choose to configure printing through a user event, you can create a similar script that adds the button and calls the function. See [Adding Print Buttons Through a User Event Script](#).

Using the Administrator role, you can access and view the sample scripts by going to Customization > Scripting > Scripts.

When you create your client script, make sure that you add the input parameters that you want to pass to the RESTlet. These parameters capture your printing preferences and print template details, as shown in the following table:

Input Parameter Key	Data Type	Sample Value	Required?	Description
isDirectPrinting	Boolean	true	Yes	Set this parameter to true to indicate that you want to invoke a print action directly through the NetSuite UI and not from a mobile app.
template	String	PrintTemplate1	Yes	Name of the print template in XML format or the advanced PDF template. To view the sample print templates used in Mobile Printing, see SCM Mobile Printing .
noOfCopies	Numeric	1	Yes	Default number of copies that you want to print.
printer	String	Printer1	Yes	Name of the default printer. To view the list of your available printers, see Setting Up Your Printers .
sourceId	String	customrecord_print_source_rec	Yes	The ID of the NetSuite record or saved search that contains the data you use in your print template. For more information about print templates, see Creating Custom Print Templates and Files .
sourceRowId	Numeric	1	Yes, if your source is a record	The internal ID of the specific row from the source record that you specify in the sourceId parameter.

Input Parameter Key	Data Type	Sample Value	Required?	Description
				For example, enter 1 for the row's internal ID to print the data from the first row of the record.
searchFilters	Array of search filter objects	[[name: 'internalid', operator : search.Operator.IS, values : '1']]	Yes, if your source is a saved search	The list of search filters that you want to apply to the saved search. See the help topic search.createFilter(options) .
resultsNameIn Template	String	record	No	The name of the object that stores the record's data or saved search results. Make sure that you provide the name used in the associated print template. If you do not include this parameter, the RESTlet uses the default result value. In this case, the associated print template must use this value to access data from fields.

In the following sample code, you can view examples of input parameter values for a source record:

```

1 // sample post object with a standard NetSuite record ID as sourceId
2
3 postObject['params'] = {
4   'isDirectPrinting': 'true',
5   'template': 'Template3',
6   'noOfCopies': '1',
7   'printer': 'Microsoft Print to PDF',
8   'sourceId': 'itemreceipt',
9   'sourceRowId': sourceRowID,
10  'resultsNameInTemplate': 'searchResults'
11 };

```

Adding Print Buttons Through a User Event Script

You can create your user event and client script to configure printing for one or more records at the same time.

To add buttons through a user event script:

1. Prepare your user event and client scripts.
For reference, you can view the sample user event and client scripts. See [SCM Mobile Scripts for Printing](#).
2. After you complete your custom scripts, you can create their script records. For the deployment record of your user event script, note the following:
 - You can select the records in which you want to display a print button.
 - For the event type, you can choose whether to run the script and display the print button in view or edit mode. If you do not specify an event type, the records display the button in both modes.

For detailed instructions, see the following topics:

- [Creating a Script Record](#)
- [Methods of Deploying a Script](#) or [Deploying a Script by using the Deployments Sublist](#)

Adding a Print Button to a Custom Form

You can customize a form or configure an existing custom form to manually set up printing through SCM Mobile. On a custom form, you can add a print button and set up your client script. This approach displays the print button in edit mode only.

To add a print button to a custom form:

1. Prepare your client script.
For information about the client script, see [SCM Mobile Scripts for Printing](#).
2. Using the Administrator role, customize a form or access an existing custom form by doing one of the following:
 - To access or customize an entry or transaction form, go to Customization > Forms.
 - In the **Custom Form** field of an open transaction, select the form you want to access. Then, at the upper-right corner of the page, from the Customize list, select **Customize Form**.
 For more information, see the help topic [Creating Custom Entry and Transaction Forms](#).
3. Assign your client script to a custom form by doing the following:
 - a. On the Custom Form page, click the **Custom Code** subtab.
 - b. In the **Script File** field, select your client script.
4. Add a print button to your custom form by doing the following:
 - a. On the Custom Form page, click the **Actions** subtab, and then click **Custom Actions**.
 - b. To add a print button, set the following fields:
 - **Label** – Enter the button's label that you want to appear in the custom form.
 - **Function** – Enter the name of the function that invokes your RESTlet for printing.
For example, enter **callingPrintDirectly**, the name of the function used in the sample client script.
 - **Display As** – Select **Button**.
 - Click **Add**.
 For more information, see the help topic [Working with Custom Buttons](#).
5. After you complete all of your customizations, click **Save**.

Adding a Print Button to Custom Mobile Pages

When you enable the Mobile Printing capability and create a custom mobile process, you can customize its pages to add the print button. You can assign the button label and specify its position on the mobile page.

You can choose the page on which to display a print button based on the data required for the label or document. If you have different labels to print, consider the data required for all of them. Source records for the standard labels and documents depend on data that you enter on the mobile app.

For example, the standard print button for the PO receiving process in NetSuite WMS appears on the Enter Quantity page. Prior to reaching this page, you provide the data required for the item label, such as the item name. On the Enter Quantity page itself, you provide the quantity, which appears on the standard pallet label.

Before you set up your print button, make sure that you have created the custom mobile process, as well as any custom print templates, print reports, and print files that you want to use. For more information, see the following topics:

- [Customizing Mobile Processes](#)
- [Creating Custom Print Templates and Files](#)

When you clone a mobile process that supports Mobile Printing by default, you carry over the standard print buttons and settings. Print button configurations that you apply to a standard process are not carried over to your custom mobile process.

For example, within the standard PO receiving process for NetSuite WMS, you set the item label print report to required printing. When you clone the process, the print report does not retain this required printing configuration. You can set it again in your custom mobile process.

To add a print button to a custom mobile page:

1. Access the custom mobile page on which you want to add the print button by doing the following:
 - a. Go to Setup > Custom > Mobile Applications.
 - b. From the Mobile - Applications List, click **View** next to the mobile app.
 - c. From the Mobile - Process List, click **View** next to the custom mobile process.
 - d. On the Mobile - Process page, click the **Pages** subtab, and then click the name of the mobile page.



Tip: If you want to update the settings of a standard print button within your custom mobile process, see [Setting Up Automatic or Required Printing](#) for the table of standard page and print button names.

2. On the Mobile - Page page, click the **Page Elements** subtab, and then click **New Mobile - Page Element**.
3. On the Mobile - Page Element page, set the following fields:
 - **Name** – Enter a unique name for this print button record.
This name appears in the list on the **Page Elements** subtab in Step 2.
 - **Type** – Select **Action Button**.
 - **Label** – Select the label you want to appear on the button or click the plus icon to add a label.
4. To set the other Action Button element settings, see the following topics:
 - If you want to specify the position of the button, see [Arranging Page Elements](#).
You can refer to the following default settings for the print button on the Enter Quantity page of the standard PO receiving process:
 - Visibility Condition - `{{environment:print_enabled}} === 'true'`
 - Display Order - **2**
 - Content Area - **Footer**
 With these settings, the print button appears in the footer after another button, which appears in the same area within the page.
 - If you want to add conditions, see [Page Element Visibility and Loading](#).
5. To set up print actions for your button, see [Setting Up Print Button Actions](#).
6. Click **Save**.
7. After you complete all your print button customizations, make sure you update the app. See [Compiling Mobile Customizations](#).

Setting Up Print Button Actions

Print action setup applies to the following scenarios:

- After you add or modify a print button, you can set up the mobile actions that perform the printing tasks.
- After you create a custom print report for label or document, you can assign it to the action of the Print button. Depending on your printing requirements, you can also assign it a standard print report.

When you tap a print button, the app calls the main print action to print your labels and documents. This main action contains additional actions that perform specific printing tasks. Refer to the following sequence of actions and tasks.

1. **Print** action – The main print action contains the list of print reports and their settings, including automatic printing, required printing, and print references. For print reports that are set to manual printing, it displays the Print popup window on which you can specify your printing options. To perform additional printing tasks, it calls the Before Print action and, for each print report, the Get Print File Path action. Then, it submits the print request to your local printer through PrintNode.

The Print action is set up in the **On Click Action** field of the Action Button element. If you create custom print reports for your custom print templates, add them to the Print action.

2. **Before Print** action – This mobile action contains the RESTlet that retrieves and stores data required for labels, documents, and printing rules associated with the print reports.

The standard Before Print action includes input and output parameters for data captured from mobile pages. It saves the data in an instance of the source record, which is used by the template associated with the print report. The data can also be used for printing rules that you set up on a print report. It stores the ID of the source record instance in the state to make it available for the Get Print File Path action.

 **Note:** Set up input parameters if you use the **User Field** fields of a standard source record for your custom templates or printing rules. Map each of these fields to an input parameter and set them up to retrieve the required data. For more information about the User Field fields of standard source records, see [Showing Data on Custom Labels or Documents](#).

As part of the Print action settings, this mobile action is set up in the **Before Print Action** field.

3. **Get Print File Path** action – This mobile action contains the RESTlet that generates and stores the label associated with a print report. Based on the template you select on the Print popup window, it chooses which data to use from those retrieved by the Before Print action. It provides the file cabinet path to the folder that stores the generated label. The Print action submits this path, along with your print request.

As part of the Print action settings, this mobile action is set up in the **Get Print File Path Action** field for each print report.

For more information about print reports, see [Setting Up Printing Settings on Print Reports](#).

Standard Actions for Mobile Printing

When you add your print button, you can set up the mobile actions for printing or create mobile actions based on your printing requirements. You can refer to following tables that contain the list of standard Print and Before Print actions for NetSuite WMS and Ship Central.

Warehouse Management Process	Print Report Type	Print Action Name (On Click Action)	RESTlet Action Name (Before Print Action)
Purchase order receiving	Item & pallet label	Regular items: poReceiving_quantityScan_ printBtn_click	poReceiving_beforePrintActn

Warehouse Management Process	Print Report Type	Print Action Name (On Click Action)	RESTlet Action Name (Before Print Action)
		Lot items: poReceiving_enterLotQuantity_printBtnClick Serialized items: poReceiving_serialScan_printBtn_click	
Inbound shipment receiving	Item & pallet label	Regular & lot items: inbShipmentRec_quantityScan_printBtnClick Serialized items: inbShipmentRec_serialScan_printBtnClick	inbShipmentRec_beforePrintActn
Work order assembly picking	Item & pallet label	Regular items: woAssemblyenterQuantity_printBtn_click Lot items: woAssemblylotScan_printBtn_click Serialized items: woAssemblyserialScan_printBtn_click	woAssembly_beforePrintActn
Single sales order picking *	Pick carton label	singleOrderPicking_cartonScan_Submit_printAction	singleOrderSOCartonScan_beforePrintActn
Single transfer order picking *	Pick carton label	singleOrderPicking_tO_cartonScan_Submit_printAction	singleOrderTOCartonScan_beforePrintActn
Multi-order picking *	Pick carton label	mp_enterContainer_submit_printAction	multiOrderCartonScan_beforePrintActn
* Pick carton label printing is set up as a sub-action of an Action Sequence type of action. This action sequence is called from the On Click Action of the Enter Carton button on the Enter Carton mobile page. For more information about this page, refer to the table under Setting Up Automatic or Required Printing.			

Ship Central Process	Print Report Type	Print Action Name (On Click Action)	RESTlet Action Name (Before Print Action)
Sales order packing	Carton label	onLoadSOAddCarton_printLabelAction	Print Insert data
		Ship As Is item: salesOrder_printCartonForShipAsIs	SalesOrder_insertPrintCartonData
	Carton list & BOL report	salesOrder_printCartonList	salesOrder_cartonListBeforePrintAction
	Pallet label	addPallet_printLabelAction	print pallet insert data
	Pallet list & BOL report	salesOrder_printPalletList	salesOrder_palletListBeforePrintAction
Transfer order packing	Carton label	onLoadTOAddCarton_printLabelAction	Print TO Insert Data

Ship Central Process	Print Report Type	Print Action Name (On Click Action)	RESTlet Action Name (Before Print Action)
		Ship As Is item: transferOrder_printCartonForShipAsIs	transferOrder_ insertPrintCartonData
	Carton list & BOL report	transferOrder_printCartonList	transferOrder_cartonListBefore PrintAction
	Pallet label	addPallet_printPalletAction	Print TO Pallet Insert Data
	Pallet list & BOL report	transferOrder_printPalletList	transferOrder_palletListBeforePrint Action
Sales order shipping	Ship Label Report	Action Sequence Name (On Click Action) - ShipCentral_SO_confirmAddressAndPrint Sub-action Name - confirmAddressAndPrint_ submitPrintLabel Print Action Name - shipPackages_ submitPrintLabel	shipLabelPrint
		Action Sequence Name (On Click Action) - ShipCentral_SO_confirmAddressAndPrintShip Sub-action Name - confirmAddressAndPrintShip_ submitPrintLabel Print Action Name - shippackage_print	
	Return Label Report (SO)	Action Sequence Name (On Click Action) - print_returnlabelValidation Sub-action Name - PrintReturnLabel Print Action Name - print_returnlabel	
	Certificate of Origin	Action Sequence Name (On Click Action) - PrintLabel_FormDownload Sub-action Name - printForm_printAction Print Action Name - print_form_download	
Transfer order shipping	TO Ship Label Report	Action Sequence Name (On Click Action) - ShipCentral_TO_confirmAddressAndPrint Sub-action Name - TOconfirmAddressAndPrint_submitPrintLabel Print Action Name - TOshipPackages_ submitPrintLabel	TOshipLabelPrint
		Action Sequence Name (On Click Action) - TOShipCentral_SO_confirmAddressAndPrintShip Sub-action Name - TOconfirmAddressAndPrint Ship_submitPrintLabel Print Action Name - toshippackage_print	
	Return Label Report (TO)	Action Sequence Name (On Click Action) - TOValidprint_returnLabel Sub-action Name - TOPrintReturnLabel Print Action Name - TOPrint_returnLabel	shipLabelPrint

Ship Central Process	Print Report Type	Print Action Name (On Click Action)	RESTlet Action Name (Before Print Action)
	Certificate of Origin	Action Sequence Name (On Click Action) - TO_PrintLabel_FormDownload Sub-action Name - to_printForm_action Print Action Name - to_print_form_action	

Print Action Setup on Other Buttons

The Print action is usually preconfigured in the On Click Action of the Print button. It can be set up on another button that may already have a different main action. For this case, the On Click Action of the button may call an Action Sequence type of action. The Print action can be set up in one of the sub-actions of the action sequence, along with the button's main action. Examples of this setup include the Ship Central shipping processes, as well as the WMS order picking processes that support carton label printing. For more information about action sequences, see [Mobile Action Sequence](#).

To set up print button actions:

1. Access the custom mobile page on which you want to add the print button by doing the following:
 - a. Go to Setup > Custom > Mobile Applications.
 - b. From the Mobile - Applications List, click **View** next to the mobile app.
 - c. From the Mobile - Process List, click **View** next to the custom mobile process.
 - d. On the Mobile - Process page, click the **Pages** subtab, and then click the name of the mobile page.

 **Tip:** If you want to update the settings of a standard print button within your custom mobile process, see [Setting Up Automatic or Required Printing](#) for the table of standard page and print button names.

2. click the **Page Elements** subtab, and then click **Edit** next to the name of the print button.
 - **Name** – Enter a unique name for the button element.
 - **Type** – For a new print button, select **Action Button**.
 - **Label** – Select the button label you want to appear on the custom mobile page.

 **Tip:** To add a label, click the plus icon.

3. On the Mobile - Page Element page, in the **On Click Action** field, do the following:
 - a. Select an existing Print type of mobile action or click the plus icon to add one.
 - b. If you select an existing action, click the open icon to edit it.

The Mobile - Action page appears.

To view the possible configurations for the other element settings for the Action Button, refer to the tables in [Configuring Mobile Page Elements](#).

4. For new mobile actions, in the **Type** field, select **Print**.
5. On the **Print Reports** subtab, to add a new print report, click **New Mobile - Print Reports**, and then on the Mobile - Print Report page, do the following:

Note: Complete the following steps to add or edit print reports, as well as set it up for automatic or required printing. You can also set up your own label references used for reprinting. If you only want to set up input parameters for the User Field fields used in your custom print templates, you can skip this step and proceed to Step 6.

- a. In the **Report Type** field, select the print report associated with the label or document you want to print.

Add each custom print report that you create for your custom print templates.

- b. In the **Source Row ID** field, enter the internal ID or its path for the source record instance that stores the data used in the print template and rules associated with the print report.

The default setting for this field retrieves a dynamic value from the state. It specifies the state path to the key for the internal ID, called **sourceId**, of the source record instance, as follows:

Default setting: `{{state:dataRecord:scriptParams:sourceId}}`

If you use a standard source record, you can also use the default setting.

To specify a static value, you can refer to the list of record instances for your source record to get the internal ID. If you use a saved search as your source, you can refer to the results that contain the list of sublist instances.

- c. In the **Get Print File Path Action** field, select a RESTlet type of mobile action.

If you want to use a standard RESTlet action, refer to the following table.

Label or Document	Standard Get Print File Path Action
WMS labels and documents	wms_invokePrint_Action
Ship Central packing labels and documents	Packship_invokePrint_Action
Ship Central shipping labels (SO and TO)	Ship Print Invoke Action
Ship Central return labels (SO)	Return Ship Print Invoke Action
Ship Central return labels (TO)	TO Return Ship Print Invoke Action
Ship Central certificate of origin and commercial invoice (SO)	Form Ship Print Invoke Action

Label or Document	Standard Get Print File Path Action
Ship Central certificate of origin and commercial invoice (TO)	TO Form Ship Print Invoke Action

For more information about this action, see [Setting Up Print Button Actions](#).

If you want to create your own RESTlet for this field, note that you can generate multiple document files at the same time from a single print report. In this case, you must set up the RESTlet's response to return an array of file paths.

For example, when you print a carton list in Ship Central, this RESTlet generates multiple labels, one for each carton.

By default, using the same key in the Source Row ID field setting, the RESTlet returns the file path or array of file paths to the state.

- d. If you want to set the print report to automatic printing, check the **Automatic** box.
- e. If you want to set the print report to required printing, check the **Required** box.
- f. In the **Print Sequence** field, enter the number for the print report's position in the print sequence.

The Print action follows the print sequence when you associate multiple print reports to a single print button.

- g. If you want to associate references to a label, you can set the following fields:

Note: Reference fields are used to search for and identify a printed label that you want to reprint. By default, print references include transaction numbers, items, serial or lot numbers, or cartons, depending on the data used within the mobile process. When you reprint, you can search for a label by any of these references.

- **Print Reference** – Enter the number or ID for the print reference, which could pertain to the transaction, item, carton, and pallet among others.

To set up a dynamic value, you can enter the page, popup window, or state path to the key that contains the print reference value. In the following example, the transaction name or number stored in the state is set up as the print reference:

{{state:dataRecord:scriptParams:transactionName}}

- **Item** – The name or number of the item on the printed label.

To set up a dynamic value, you can enter the page, popup window, or state path to the key that contains the item name or number. In the following example, the item name or number stored in the state is set up as the reference:

{{state:dataRecord:scriptParams:fetcheditemname}}

- **Lot # or Serial #** - The lot or serial number of the item on the printed label.

To set up a dynamic value, you can enter the page, popup window, or state path to the key that contains the lot or serial number. In the following example, the lot or serial number stored in the state is set up as the reference:

{{state:dataRecord:scriptParams:lotorserialnumber}}

6. In the **Before Print Action** field, do the following:
 - a. Select an existing Restlet type of mobile action or click the plus icon to add one.
 - b. If you select an existing action, click the open icon to edit it.

The Mobile - Action page appears.

7. To set up the RESTlet for the Before Print action, set values in the following fields:

- **Name** – Enter a unique name for the mobile action.

- **Type** – Select **Restlet**.

- **HTTP Method** – Select **POST**.

- **Script ID** – Enter the ID of the RESTlet script you want to assign to this action.

If you want to use a standard script, enter **customscript_autoprint_insertdata** for Warehouse Management or **customscript_packship_rl_save_print_data** for Ship Central.

- **Deployment ID** – Enter the ID of the RESTlet's script deployment.

If you want to use a standard script deployment, enter **customdeploy_autoprint_insertdata** for Warehouse Management or **customdeploy_packship_rl_save_print_data** for Ship Central.

- **Convert Response to Object** – If you want to set up a standard Before Print action, check this box to convert the RESTlet's response into an object.

8. On the **Input Parameters** subtab, set up your source fields, including any User Field fields used in your custom print templates, by doing the following:

- a. Click **New Mobile - Input Parameter**.
- b. In the **Name** field, enter a unique name for your parameter.
- c. In the **Key** and **Value** fields, set up the data source for a field that you use in your print template.

Sources from the mobile app could be the mobile state, a mobile page, or a popup window. You can also set up a constant value. Refer to the following table for guidance and examples of standard input parameters:

Data to Retrieve	Standard Key	Standard Value Setting
Item name or number	Item	state:dataRecord:scriptParams:fetcheditemid
Serial Number field value	serialNumber	page:poReceiving_enterSerial_scanSerialTxt
Units field value	qtyUomSelection	page:poReceiving_enterLotQuantity_enterQtyUOM:selection
Quantity field value	Quantity	page:poReceiving_enterLotQuantity_enterQtyUOM:custom:value
Serialized item quantity	serialQuantity	constant:1

- d. In the **Resolution Order** field, enter the number that indicates the position of this parameter in the resolution order. This field is optional, except if you set up multiple input parameters for the same key. In this case, you must define the priority by assigning a resolution order to each parameter.

The Before Print action follows the resolution order when evaluating multiple parameters.

- e. (Optional) In the **Condition** field, enter the expression you want the Before Print Action to use to determine whether it can evaluate this parameter.

A parameter is evaluated if this expression results to true or if you do not specify a condition.

- f. Click **Save**.

Repeat this step to add more input parameters.

9. On the **Output Parameters** subtab, set up the RESTlet's response by do the following:

Note: The standard RESTlet's response contains the retrieved data for your print template. Based on the **Convert Response to Object** setting in Step 7, it is stored as an object in the state. Standard Before Print actions contain one output parameter for this response.

- a. Click **New Mobile - Output Parameter**.
- b. In the **Name Field**, enter a unique name for your parameter.
- c. In the **Response Key** and **Destination Key** fields, set up the source and destination for the retrieved data, as follows:
 - For the **Response Key**, enter the required keyword, **response:**, followed by the source of the data you want to include in the RESTlet's response. By default, this field contains the key for the source record ID.
 - For the **Destination Key**, enter the key or field in which you want to store the data from the response key. By default, this field contains the key in the state in which the RESTlet stores the retrieved data converted into an object.

Tip: The standard destination keys are also used in the source row ID settings of the print reports. See Step 5.b.

Refer to the following table of standard response and destination key settings:

Print Report Type	Standard Response Key	Standard Destination Key
Warehouse Management & Ship Central:		
Item, carton, & pallet label	response:id	sourceId
Ship Central:		
BOL report	response:bolArr	bolArr
Carton & pallet list *	response:groupsRecordIdArr	groupsRecordIdArr
* For Ship Central, the output parameter for a list points to an array with multiple sets of data to generate one label for each carton or pallet.		

- d. Click **Save**.

Repeat this step to add more output parameters.

10. After setting up the Before Print action settings, input parameters, and output parameters, click **Save**.
11. After setting up all the mobile actions for printing, click **Save**.
12. To compile all your customizations, see [Compiling Mobile Customizations](#).

Troubleshooting Mobile Printing

This section provides troubleshooting guidelines and procedures for Mobile Printing, whether or not you use PrintNode integration. It covers the issues that you may encounter when Mobile Printing is set up incorrectly or if components and requirements are missing.

ISSUE: An error appears on the Print popup window, with the following message:

Unexpected error. Try again or, if possible, skip printing this document. If the issue persists, ask your administrator to contact NetSuite Customer Support.

To resolve this issue, verify that the following requirements are correctly set up:

1. Your active API key from PrintNode is configured on your NetSuite account.
2. At least one printer is available for your location.
3. Your printers are mapped to the appropriate printer type.
4. The report type associated with the label or document you want to print contains a default printer.
5. The role has **Full** access level for the Documents and Files permission. Otherwise, when you view the execution log for the **customscript_print_rl_trigger_print** script, the following error message appears: The required parameter filePath is missing.

To review the list of requirements and procedures, see [SCM Mobile Printing](#).

ISSUE: On your PrintNode client, the state of a print job is set to **error**.

When you view the execution log for the **customscript_print_sl_fileserver** script, the following error details appear: Invalid IPAddress.

To correct this error, add the correct IP address for the printer to the safelist on your NetSuite account. The IP address must match the one on your PrintNode client. For instructions, see [Configuring Security Settings](#).

ISSUE: When you configure and save your Mobile Printing settings, a BadRequest error appears in the job status.

To resolve this issue, make sure that you enter a valid URL in the one or both of the following fields:

PrintNode URL for View Printers API and **PrintNode URL for Create Print Job API**. For more information, see [Configuring SCM Mobile App Settings](#).

Issue: When you configure your print security settings, one of the following error details appears in the job status:

- Authentication error
- API key not found

To avoid this issue, make sure that you enter your PrintNode API key after you add the IP addresses for the printers. For instructions, see [Configuring Security Settings](#).

ISSUE: Unable to print from your device because of the default **https://** text that appears in the **PrintNode URL for Create Print Job API** field on the Mobile -Settings page.

To resolve this issue, complete the following procedure:

1. Using the Administrator role, go to Customization > Lists, Records, & Fields > Record Types.
2. On the Record Types page, click **List** for the Print - Account Preference record.
3. On the Print - Account Preference List, click **Edit** for the print_api_printjob key.
4. On the Print - Account Preference page, in the **Value** field, delete the **https://** text.
5. Click **Save**.

To verify that the text does not appear in the **PrintNode URL for Create Print Job API** field anymore, access the Mobile - Settings page. For instructions, see [Configuring SCM Mobile App Settings](#).

ISSUE: One or more printer records are inactivated automatically by a scheduled script from the SCM Mobile SuiteApp. For Ship Central, when you print a shipping label, this error message may appear: Error while submitting shipments.

This issue may apply to Ship Central and other mobile apps that support Mobile Printing. SCM Mobile doesn't use manually created printer records and inactivates them automatically through the scheduled script. It uses printer records that it automatically creates after you safelist IP addresses associated with your printers.

To avoid this issue, follow the procedures listed in this topic to safelist IP addresses and update, not create, printer records, [Mobile Printing Setup Procedures](#).

ISSUE: When you print or update printing settings, one of the following error messages appears:

- That record does not exist. – This message appears when you tap the Print button.
- An unexpected SuiteScript error has occurred. – This message appears when you select Print API Key Entry from the Printing submenu.
- download HTTP response status code 500 – This message appears when you select Audit Logs from the Printing submenu.

To avoid this issue, make sure that you have enabled the Online Forms feature and configured the Online Form User role. For instructions, see [Setting Up the Online Form User Role](#).

Weighing Scale Support

Aside from Mobile Printing, Ship Central and Warehouse Management integrates with PrintNode to provide access to weighing scale data. Through the Ship Central app, you can capture the weight of a packed carton and display it in the weight unit of your choice. Through the NetSuite WMS app, you can capture item weights during the PO Receiving process.

Weighing Scale Support Requirements

Note the following hardware and software requirements:

 **Note:** If you already use PrintNode for Mobile Printing, you do not need a separate API key for Weighing Scale Support. You can set up the PrintNode client on any additional computers used for weighing scales.

- Active PrintNode account and valid PrintNode API key
- Local computers installed and set up with the PrintNode client software
The PrintNode client detects all the weighing scales from your local computer and syncs them with their servers and your PrintNode account. From your PrintNode client, you can track and view the status of your weighing scales.
- Weighing scales must be supported by PrintNode.

For more information about weighing scales and PrintNode integration, see the help topic [NetSuite Ship Central FAQs](#).

Weighing Scale Support Setup Procedures

After you set up your devices and PrintNode client, you can connect them to your NetSuite account. Complete the following procedures, some of which depend on your mobile app requirements.

1. For your SCM mobile settings, check the **Enable Weighing Scale Support** box. See [Configuring SCM Mobile App Settings](#).
2. Configure your PrintNode API key and safelist the IP addresses of computers installed with the PrintNode client. See [Configuring Security Settings](#).

 **Note:** If you have already configured PrintNode for Mobile Printing, you do not have to re-enter your PrintNode API key. You must safelist the IP addresses of any additional computers used for weighing scales.

3. Depending on the mobile app you want to set up, do the following:
 - For NetSuite WMS, activate the **Enable Weighing Scale Support for WMS App** system rule. See the help topic [System Rules for NetSuite WMS](#).

- (Optional) For Ship Central, you can activate the **Set default weight unit rule**. Then, you can change the default unit for packed cartons, which is initially set to **kilogram**. See the help topic [Configuring Ship Central Rules](#).
- 4. On the mobile app, you can select the scale you want to use when you pack or receive items. You can change your selection at any time. See [Accessing SCM Mobile Apps on Your Device](#).

Configuring SCM Mobile App Settings

You can configure default mobile app settings that include the table row size, logging, debug state, among others. These settings apply to all standard mobile apps supported by SCM Mobile.

Depending on the mobile app you use, you can enable printing and weighing scale support for your mobile device. If you have set up PrintNode integration, the app provides additional settings and options for your printers. Be sure to set up PrintNode integration first, before you enable Mobile Printing. For more information, see [Enabling Mobile Printing with PrintNode Integration](#).

Without PrintNode integration, the app provides capabilities that enable you to save generated labels and documents. For more information, see [Enabling Mobile Printing without PrintNode Integration](#).

For either Mobile Printing setting, you can specify the apps for which you want to enable printing or saving.

To configure SCM Mobile app settings:

1. Using the Administrator role, go to Setup > Custom > Mobile – Settings.
The Mobile – Settings page appears.
2. Check the box next to the SCM Mobile capability you want to use:
 - **Enable Mobile Printing** – available in Warehouse Management and Ship Central
Aside from printing through an SCM Mobile app, this setting also enables printing through the NetSuite UI, which is configured separately. For more information, see [Adding a Print Button to NetSuite Pages](#).
Without PrintNode integration, you can enable this setting to use the **Print to File** record and save soft copies of labels or documents.
 - **Enable Weighing Scale Support** – available in Ship Central and Warehouse Management for accounts with PrintNode integration
3. If you enable Mobile Printing, in the **Printable File Retention (In Hours)** field, enter the maximum number of hours that you want printable files to remain in your file cabinet before they get deleted.
You cannot enter a negative value in this field.
You cannot reprint deleted files. For more information about reprinting, see [Reprinting Labels](#).
4. (Optional) If you enable Mobile Printing with PrintNode integration, enter values in the following fields:
 - **PrintNode URL for View Printers API** – In case PrintNode changes their default URL, enter the new PrintNode URL for the view printers API.
This API enables you to retrieve the list of printers.
 - **PrintNode URL for Create Print Job API** – In case PrintNode changes their default URL, enter the new PrintNode URL for the create print job API.
This API enables you to submit print requests.
 - **Print Server Connection Timeout** – Enter the maximum number of seconds that you want to enable NetSuite to establish a printer server connection before it times out.

You cannot enter a negative value in this field.

- **Enable for These Apps Only** – Select the SCM Mobile apps to which you want to provide Mobile Printing access, or you can select **None**.

This setting neither provides nor removes access to printing through the NetSuite UI.

5. If you enable Mobile Printing without PrintNode integration, you can set the **Enable Print to File for These Apps Only** field. In this field, you can select the mobile apps for which you want to provide Print to File access.
6. (Optional) For your default account settings, enter or select values in any of the following fields:
 - Check the **Debug State** box if you want to set the mobile application to debug state and display state fields on mobile pages.
 - Check the **Always Allow App Selection** box to always display the application selection page on a mobile device, regardless if you have not configured multiple mobile applications.
 - To include empty and null values in the generated configuration file for the app, check the **Include Null Values in Configuration Files** box.
If you clear this box to not include null field values, you decrease the configuration file size. For more information about configuration files, see [Mobile Customization Guidelines and Limitations](#).
 - In the **Account Mode for Logging** field, select one of the following account modes in which you want to run the mobile app: **Production**, **Development**, or **Debug**.
 - In the **Batch Size of Logs for Storage (GB)** field, enter the batch size, in GB, that must be reached before NetSuite automatically transfers the logs for storage.
 - In the **Table Row Size** field, enter the default number of rows you want to display in a table at each mobile page load.
7. Click **Save**.
8. If you enable mobile printing or weighing scale support, be sure to begin a new session or reload the browser on your mobile device to reflect the updates.

For each additional capability that you enable, you must complete the required setup procedures in the following topics:

- [SCM Mobile Printing](#)
- [Weighing Scale Support](#)

SCM Mobile App Access

You can access mobile apps through your account-specific login page URL. Your URL automatically redirects to the standard NetSuite login page.

Before you try to access a mobile app, make sure that you have completed the setup procedures for the features or SuiteApps you want to use. See [SCM Mobile SuiteApp Installation](#) and [Setting Up the Online Form User Role](#).

If you want to log in through the single sign-on option, see the help topic [Logging into NetSuite for Mobile with Single Sign-on](#). For setup information, see the help topic [SAML Single Sign-on](#).

Accessing the SCM Mobile Login Page URL

On mobile devices, you can access SCM Mobile apps using the login page URL provided for your account. If you do not receive this URL from your NetSuite account manager, you can access it from your account.

To access the SCM Mobile login page URL:

1. Using the Administrator role, go to Customization > Scripting > Scripts.



Tip: Alternatively, you can go to Setup > Custom > Mobile - Login URL. On the Mobile - Login URL page, copy your login page URL. You can skip the rest of the steps. To access the URL from your mobile device browser, see [Accessing SCM Mobile Apps on Your Device](#).

2. On the Scripts list, next to the Mobile - Get Login Page script, click **Deployments**.
3. On the Script Deployments list, next to the customdeploy_mobile_sl_get_login_page deployment ID, click **View**.
4. On the Script Deployment page, in the **External URL** field, copy the URL for the SCM Mobile app login page.

Accessing SCM Mobile Apps on Your Device

After you set up your language preferences and other mobile app capabilities, you can use the SCM Mobile login page URL to access the mobile apps. If you do not receive this account-specific URL from your NetSuite account manager, you can access it from your NetSuite account. If you see a blank screen when you try to log in on your mobile device, verify that you have the correct login page URL. See [Accessing the SCM Mobile Login Page URL](#) or [Language Preference Setup for SCM Mobile](#).

To access SCM Mobile apps on your device:

1. On your mobile device, open an internet browser.
2. Go to your SCM Mobile app login page URL.
The SCM Mobile login page appears.
3. Log in by entering your NetSuite account username and password.
4. On the Select Application page, do the following:
 - a. If you want to change the role, tap the Menu icon, and then tap **Switch Role**. From the Roles table, tap the role you want to select.
If you switch to a role that has access to a page in the NetSuite UI but not in the mobile app, you can choose another role.
 - b. To choose an app, on the Select Application page, tap the app you want to select.
5. On the Select Warehouse page, tap the location you want to select.
6. If you have enabled Weighing Scale Support with PrintNode integration, you can do the following to select a scale:
 - a. Tap the main menu icon, and then tap **Select Weighing Scale**.
 - b. On the Select Weighing Scale page, tap the scale you want to use.

You can change your selection at any time.
7. (Optional) On your browser, you can set the Main Menu page as your home page and create a shortcut to the page on your device's home screen.
8. (Optional) You can configure your mobile device to automatically perform an Enter action after an item scan.
This configuration removes the extra step of tapping the **Enter** button to move to the next page after you scan an item.

You can switch to a different mobile app or location at any time.

SCM Mobile App Configuration

Mobile Configuration enables you to modify the settings of standard mobile processes available in an SCM mobile app. You can configure the page elements used on the mobile pages of a process. You can change the preconfigured action of a button element. You can perform other configurations that suit your mobile app requirements.

Unlike Mobile Customization, you do not need to clone a mobile process to configure its settings. However, you can update more settings through customization. Also, you can't add all element types or fields to a mobile page through Mobile Configuration.

If you use Mobile Printing, you can set basic settings through Mobile Configuration.

Watch the video on adding fields through Mobile Configuration:

 [SCM Mobile Adding Fields to Mobile Pages](#)


For more information, see the following topics:




- [Configuring Mobile Page Elements](#)
- [Configuring Pages and Actions for Custom Mobile Processes](#)
- [Configuring Mobile Table Elements](#)
- [Configuring Menu Icons on Independent Mobile Pages](#)
- [Cloning Standard Mobile Actions](#)
- [Mobile Customization Guidelines and Limitations](#)



Configuring Mobile Page Elements



Mobile Configuration provides settings that you can configure to modify standard page elements. You can update the same settings through Mobile Customization, including additional ones available for custom mobile processes only.



The following table provides a list of settings available for each mobile page element:


Page Element	Example	Settings
Action Button		Label Layout Display Order Visibility Condition Disable Field Condition Autoclick Condition For standard mobile processes only: ■ On Click Custom Action ■ After On Click Action RESTlet For custom mobile processes only: ■ Is Primary ■ On Click Action ■ Content Area ■ Button Size Action settings (print button for mobile printing):

Page Element	Example	Settings
		- Inactive - Required - Automatic
Back Button		Label Visibility Condition Display Order Content Area
Capture Image Icon		Label Record Name Field Name Sublist Name Visibility Condition Display Order Disable Field Condition Image State Path Reference Transaction Type Reference Transaction State Path
Data Table		Is Mandantory Label Display Order Row Size Visibility Condition Include Hidden Element in Load Events Toggle State Retain Column Filters Cache Table Data On Back Navigation Apply Autosubmit To For standard mobile processes only: - On Row Click Custom Action - Disable Row Click - After Row Click Action RESTlet - Override Standard Element For custom mobile processes only: - Message - Record Name - On Load Action - On Row Click Action - Toggle Label


Page Element	Example	Settings
		- Search Character Count - Search Delay - Server-Side Pagination - Select Multiple Rows - Table Title Placeholder - Custom Columns On Load Action - Custom Columns Response Key - Load Independently From Page Events Row Colors: - Name - Column Condition - Color - Priority - Color Description
Date field		Label Earliest Date Default Value Display Order Visibility Condition Include Hidden Element In Load Events Disable Field Condition Latest Date For custom mobile processes only: - Record Name - Field Name - Sublist Name - Is Mandatory - Visibility Condition - On Load Action Time field settings: - Show Time Field - Default Time - Earliest Possible Time - Latest Possible Time
Dropdown field		Is Mandatory Label Disable For Single Value Display Order Visibility Condition

Page Element	Example	Settings
		Include Hidden Element in Load Events Disable Field Condition Translatable Default Value For custom mobile processes only: - Default Value - Input ID - Input Value - Record Name - Field Name - Sublist Name - On Load Action - On Select Action - Response Key
Dynamic Text		Label Display Order Visibility Condition Layout Toggle State Toggle Label Text Style Include Hidden Element in Load Events For custom mobile processes only: - Message - Record Name - On Load Action - On Click Action
Icon		Label Element Icon or Icon Path Layout Display Order Visibility Condition For icons on standard independent pages only: - Roles For custom mobile processes only: - On Click Action

Page Element	Example	Settings
Search Grid		Label Search Delay Search Character Count For custom mobile processes only: - Record Name - Visibility Condition - On Load Action - On Row Click Action - Response Key - Custom Columns On Load Action - Custom Columns Response Key
Table Columns (for Data Table and Search Grid)		Is Visible By Default Label Visibility Condition For standard mobile processes only: - Disable Click - Column Order - On Click Custom Action - After Column Click Action RESTlet For custom mobile processes only: - Response Key - Data Type - Display Order - Show Column Data as Buttons - Include in Group Filter - Merge Criteria - Standard Column Key, Custom Column Key For Data Table elements only: Custom Columns Configuration - Mobile - Custom Column Setup - Name, On Load Action, Response Key - Mobile - Custom Column - Name, Label, Response Key For URL column data types only: - Target URL - Display Label
Table Configurations (for Data Table, Transfer Table, and Search Grid)		Element settings: - Show Selected - Configuration Order - Label

Page Element	Example	Settings
		For custom mobile processes only: - Response Key - Parameter Key - Default Value Key - Display Order - Configuration Location
Table Row Color		Name Column Condition Color Priority Color Description
Text Area		Is Mandatory Label Disable Paste Display Order Visibility Condition Disable Field Condition For custom mobile processes only: - Default Value - Layout - Record Name - Field Name - Sublist Name - On Load Action
Text Box		Is Mandatory Label Default Value Automatically Submit Default Value Disable Paste Display Order Visibility Condition Include Hidden Element in Load Events Disable Field Condition Regular Expression On Validate Custom Action On Scan Custom Action For custom mobile processes only: Data Type

Page Element	Example	Settings
		■ Translatable Default Value ■ Placeholder ■ Message ■ Record Name ■ Field Name ■ Sublist Name ■ On Load Action ■ On Validate Action ■ On Scan Action ■ Layout ■ Remove Value on Back Navigation
Transfer Tables (Currently used in NetSuite Ship Central only)		Left Table Title Right Table Title Display Order Row Size Visibility Condition Include Hidden Elements in Load Events Open List Group Icon Path Closed List Group Icon Path For custom mobile processes only: ■ Record Name ■ On Click Action ■ Response Key ■ On Click Action For Left Row ■ On Click Action For Right Row ■ Message For Empty Left Table ■ Message For Empty Right Table ■ Custom Columns On Load Action ■ Custom Columns Response Key
Transfer Table Column (Currently used in NetSuite Ship Central only)		Column settings: ■ Is Visible By Default ■ Label ■ Column Order ■ Visibility Condition For custom mobile processes only: ■ Response Key ■ Data Type ■ Display Order ■ On Click Action ■ Column Location

Page Element	Example	Settings
UOM (unit of measure)		Is Mandatory Label Default Value Display Order Visibility Condition Visibility Condition for Unit Only Include Hidden Element in Load Events Disable Field Condition Disable Condition for Quantity Only Disable Condition for Unit Only For custom mobile processes only: - Regular Expression - Record Name - Field Name - Sublist Name - On Load Action - UOM Item ID Key - UOM Item Unit Key - Minimum Value - Maximum Value - Disable Paste
Upload File Icon		Label Record Name Field Name Sublist Name Visibility Condition Display Order Disable Field Condition Reference Transaction Type Reference Transaction State Path

The following table describes possible values for each setting available for one or more mobile page elements:

Settings	Description	Values
Action Settings: - Inactive - Automatic - Required	Print action settings that modify the behavior of mobile printing. See Setting Up Automatic or Required Printing .	Possible values: - true - if checked - false - if cleared

Settings	Description	Values
Apply Autosubmit To	The key to the column to which you want to apply autosubmission.	Possible values: ■ The keys of columns that have a click action ■ Row Click – available only for tables that do not have a default On Click Action
Autoclick Condition	A condition that determines automatic clicking of an Action Button element.	Possible values: ■ true ■ false or blank ■ an expression that evaluates to true or false
Button Size	The size of an Action Button element located in the body of a mobile page. This setting does not apply to buttons at the footer of mobile pages, based on their Content Area setting.	Possible values: ■ (Blank - default size) ■ Medium ■ Large
Cache Table Data On Back Navigation	Check this box if you want to cache table data when you navigate back to a previous mobile page.	Possible values: ■ true - if checked ■ false - if cleared
Column Order	Where the column appears, in relation to other columns in the table. For example, a value of 4 places the column after the third column in the table.	<numeral>
Content Area	The location on the page where the element appears.	Possible values: ■ Body ■ Footer
Custom action settings: ■ After Column Click Action RESTlet ■ After Row Click Action RESTlet ■ After On Click Action RESTlet * ■ Custom Columns On Load Action ■ On Click Custom Action ■ On Row Click Custom Action ■ On Scan Custom Action ■ On Validate Custom Action	The name of the custom mobile action you want to run for the page element. For example, you can create a custom mobile action for your own restlet and configure it in the On Scan Custom Action field of a text box element. When you scan a bar code using your mobile device, NetSuite calls your restlet from the associated custom mobile action. * The After On Click Action RESTlet is available to buttons only on pages on which data are submitted, usually located toward the end of a process flow.	<text>

Settings	Description	Values
Data Type	The type of data displayed in the column of a table.	Possible values: - Text - Number - Password - Date - Icon - URL
Date Field settings:		
Earliest Date	You can't enter a date in a date field that is earlier than this date.	<date>
Latest Date	You cannot enter a date in a date field that is later than this date.	<date>
Default Value	The default value that appears in a textbox element.	<text> For a dynamic text, you can enter the state path for the state field from which you want to obtain the value. Example: state:dataRecord:auxParams:warehouse
Disable Field Condition	The condition that determines the disable setting of an element.	<text> Enter a condition or expression that evaluates to true or false.
Disable For Single Value	If you check this box, NetSuite disables the associated dropdown element when it contains a single value only. You can't change the value of a disabled element or leave it blank.	Possible values: - true - if checked - false - if cleared
Disable Paste	If you check this box, you can't paste text in the page element.	Possible values: - true - if checked - false - if cleared
Display Label	For URL column data types, the label or readable text that appears in a column cell instead of the actual URL. For multiple URLs, this text appears as a clickable link that displays the list of URLs on a popup window.	<text> Example: Image link
Display Order	Where the element appears on the page, in relation to other elements on the page. For example, a value of 4 places the element after the third position on the page.	<numeral>
Disable Row Click	If you check this box, you can't tap text in the rows of this page element.	Possible values: - true - if checked - false - if cleared
Field Name	The name of the field you want to add and use to store the page element value in a state.	<text>

Settings	Description	Values
	By default, the field name value is associated with the record. This value is stored in the state as follows: <record>:<field> If you provide a sublist name, the field name value becomes associated with the sublist. This value is stored in the state as follows: <record>:<sublist>:<field>	Example: firstname
Image State Path	Additional detail that appears before the timestamp of a captured image's filename	state path Example: state:dataRecord:auxParams:warehouse
Include Hidden Element in Load Events	Indicates whether, during a load event, you want to load the data of an element that is hidden by default. It follows a visibility condition setting that evaluates to false.	Possible values: ■ true - if checked ■ false - if cleared
Include In Group Filter	Indicates whether you want to set up this column as a row filter.	Possible values: ■ true - if checked ■ false - if cleared
Is Mandatory	If you check this box, you must enter a value for the element before you can proceed to the next page or step in the mobile process.	Possible values: ■ true - if checked ■ false - if cleared
Is Primary	If you check this box, you assign the action associated with the on click event of the button as the primary action for the mobile page.	Possible values: ■ true - if checked ■ false - if cleared
Is Visible By Default	If you check this box, the element appears on the mobile page.	Possible values: ■ true - if checked ■ false - if cleared
Label	The text that appears on the mobile page and identifies the element.	<text>
Latest Date	You can't enter a date in a date field that is later than this date.	<date>
Layout	If you set this field to Block, the element appears below or above another element. If you set this field to Inline, the element appears next to another element within the same row or line.	Possible values: ■ Block ■ Inline
On Click	The mobile action to execute when you tap a page element.	<action name>
On Load Action	The mobile action you want to trigger to fetch data when loading this page element.	<action name>
On Row Click	The action to execute when you tap a table element's row.	<action name>

Settings	Description	Values
Override Standard Element	Indicates whether you want to override selections from the standard table to prevent conflicting mobile actions. This setting is available only if you clone a standard Data Table element.	Possible values: - true - if checked - false - if cleared
Record Name	The name of the record you want to associate with the page element and store in a state. For page elements with the Field Name field, such as the dropdown list, enter the name of the record that contains the field you want to associate with the dropdown list and store in a state. For example, in the dropdown element, you want to display the first name from the employee records. You can enter the name of the employee record in this field and configure the first name in the Field Name field.	<text> Example: employee
Reference Transaction State Path	The state path to the key that holds the internal ID of transaction associated with the mobile process. Set this field along with the Reference Transaction Type for the Image Capture Icon or Upload File Icon.	state path Example: state:datarecord:scriptParams:transactionInternalId
Reference Transaction Type	The internal ID of the type of transaction associated with the mobile process. Set this field along with the Reference Transaction State Path for the Image Capture Icon or Upload File Icon.	internal ID Example: purchaseorder
Regular Expression	The expected format for the entered text. To be a valid entry, the entered text must match this format.	<numeral and expression symbols> For example, you can set up a numbers-only field by using the following expression: <code>^[0-9]*\$</code>
Remove Value On Back Navigation	Indicates whether you want to persist or retain the value in the field when you navigate to a previous page of a mobile process.	Possible values: - true - if checked - false - if cleared
Response Key	The key in the restlet's response from which the table element's response can be fetched.	<data>
Retain Column Filters	Indicates whether you want to retain the filters that you select for a table on a mobile page, even when you navigate to another mobile page within the process. The behavior applies throughout an active session.	Possible values: - true - if checked - false - if cleared
Roles	One or more roles that can access the icon on a standard independent page.	<selected roles>
Row Color settings:		
Color	Color used to highlight data table rows	Standard color values: Blue, Green Orange, Purple, Red, Yellow

Settings	Description	Values
Column Condition	A condition that determines which rows to highlight using a color based on data specified through it	Possible values: true false or blank - an expression that evaluates to true or false
Color Description	Short text that describes when a color is used	<text> Example: Urgent order
Priority	A number greater than zero that indicates the priority of a color with regard to other colors that you set up for the same table	<numeral>
Row Size	The number of rows you want to appear on a transfer table.	<numeral>
Search Character Count	The minimum number of characters you can enter in a search field, after which results appear. By default, results appear after you enter at least three characters.	<numeral>
Search Delay	The number of seconds after which results are shown when you enter text in a search field. By default, results appear only when you tap the search icon or, for some fields, as soon as you enter three characters.	<numeral>
Select Multiple Rows	Indicates whether you want to enable multiple row selection by adding a checkbox column to a table. This setting overrides row and column click selection.	Possible values: - true - if checked - false - if cleared
Server-Side Pagination	Indicates whether you want to implement server-side pagination, including searching and sorting, for a table element.	Possible values: - true - if checked - false - if cleared
Show Column Data As Buttons	If you configure an On-Click action for the column, you can check this box to display data in each row of the column as a button.	Possible values: - true - if checked - false - if cleared
Show Selected	Indicates whether the selected value from a table configuration field is displayed at the heading of a table element. For example, you can display the inventory status that you select from the table configuration.	Possible values: - true - if checked - false - if cleared
Standard Action	A standard action that you can clone and set up on the associated page element	<name of standard mobile action>
Sublist Name	The name of the sublist you want to associate with the field and store in a state. This	<text>

Settings	Description	Values
	configuration applies to page elements with the Field Name field, such as the dropdown element. For example, in the dropdown element, you want to display the first names from the list of emergency contacts. You can enter the name of the emergency contact sublist in this field and configure the first name in the Field Name field.	Example: emergencycontact
Table Row Size	The number of rows that appear in a table.	<numeral>
Table Title Placeholder	The text you want to include in the title that describes the number of selected rows in the table. This title is displayed only if you check the Select Multiple Rows setting.	<text> You can enter the record type, transaction type, or other descriptive text. For example, if you enter “sales order” in this field, the following title is shown above the table when 2 rows are selected: “2 Sales Orders Selected”.
Target URL	A single website address or link to a page or a file in your file cabinet. You can set this up with the Display Label.	<URL>
Text Style	The font weight or size of text in a dynamic message.	Possible values: - Normal - Large - Bold - Large & Bold
Time Field settings:		
Show Time Field	If you want to display a time field beside a date field, you can check this box for Date page elements only. For Mobile Configuration, this box appears only if the Is Preconfigured for Time box is checked. When this box is checked, these fields are displayed automatically: Earliest Possible Time, Latest Possible Time, and Default Time.	Possible values: - true – if checked - false – if cleared
Default Time	The default value that appears in the time field.	Possible values: <static time in HH:mm format> - state path Example: {{state.dataRecord.scriptParams.time}}
Earliest Possible Time	The earliest time value that can be entered in a time field	Possible values: <static time in HH:mm format> - state path Example: {{state.dataRecord.scriptParams.time}}

Settings	Description	Values
Latest Possible Time	The latest time value that can be entered in a time field.	Possible values: <time in HH:mm format> - state path Example: {{state.dataRecord.scriptParams.time}}
Transfer Table settings (currently used in NetSuite Ship Central only):		
Closed List Group Icon Path	The file cabinet path to the image that you want to appear for the open list group icon on a transfer table. In Ship Central, a list group of cartons or pallets appears in the panel next to the right table.	file path Example: ~/icons/OpenCartonIcon.svg
Column Location	The location of the column in a transfer table.	Possible values: - Left Table - Right Table
Left Table Title	The title or heading for the left side of a transfer table.	<text>
Message For Empty Left Table	The message you want to appear on the left table when it is empty or no data is shown.	<text>
Message For Empty Right Table	The message you want to appear on the right table when it is empty or no data is shown.	<text>
Open List Group Icon Path	The file cabinet path to the image that you want to appear for the closed list group icon on a transfer table. In Ship Central, a list group of cartons or pallets appears in the panel next to the right table.	file path Example: ~/icons/PackedCartonIcon.svg
Right Table Title	The title or heading for the right side of a transfer table.	<text>
Toggle Label	The toggle's label that you want to appear on a mobile page.	<text>
Toggle State	The setting for the toggle button that controls the visibility of the element, usually a data table.	Possible values: - Show – displays the toggle button on the mobile page - Hide - hides the toggle button from the mobile page
UOM settings:		
Disable Condition for Quantity Only	The condition that determines the disable setting of the quantity subfield of a UOM element.	Possible values: true false or blank - an expression that evaluates to true or false

Settings	Description	Values
Disable Condition for Unit Only	The condition that determines the disable setting of the unit subfield of a UOM element.	Possible values: true false or blank - an expression that evaluates to true or false
UOM Item ID Key	The state path to the key that holds the internal ID of the item to which the unit is associated with.	state path Example: state:dataRecord:poTable:item:itemId
UOM Item Unit Key	The state path to the key that holds the internal ID of the unit associated with the item.	state path Example: state:dataRecord:poTable:item:unit
Minimum Value	The minimum positive value that you can enter in the associated quantity field.	<numeral>
Maximum Value	The maximum positive value that you can enter in the associated quantity field.	<numeral>
Visibility Condition	Indicates whether the element appears by default on a mobile page.	Possible values: true - displays the page element false - hides the page element You can also enter a condition or expression that evaluates to true or false.

To configure mobile page elements:

1. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
2. In the Mobile - Applications List, click **View** next to the mobile app that contains the page element.
3. Access the mobile page element you want to configure by doing the following:

 **Tip:** If you want to update the same settings for page elements in a custom mobile process, see [Customizing Mobile Page Elements](#). You can also access and update settings available to custom mobile processes only.

- a. In the Mobile - Process List, click **Configure** next to the standard mobile process.
 - b. On the Mobile Configuration page, in the **Page** field, select a mobile page.
In the Mobile Page section, the name and title of the page appear in their corresponding fields.
 - c. On the **Page Element** subtab, in the **Mobile Page Element** field, select the page element.
The list in this field contains the standard page elements that appear on the mobile page. It shows the name of the page element followed by the page element type.
4. In the Element Settings section, set values in fields for the basic settings that you want to modify or enable. Then, to save the updates that you have made on the Page Element subtab, click **Save**.
You can refer to the tables in this topic for the list of settings available for a page element.
The following Mobile Customization topics contain guidelines for basic fields that you can also set in standard mobile processes:
 - Page Element Visibility and Loading

- [Arranging Page Elements](#)
 - [Assigning Default Values to Field Elements](#)
 - [Setting Up Autoclick for Buttons](#)
 - [Time Settings for Date Fields](#)
5. If you want to configure a table element or its subcomponents, you can do any of the following:
 - a. In the Element Settings section, you can update the basic table settings.
 - b. Depending on your table requirements, you can do any of the following:
 - To configure standard table columns, on the **Table Columns** subtab, in the **Column** field, select the column. In the Column Settings section, you can update the standard column settings.
 - To configure autosubmission, multiple row selection, or clone tables, see [Configuring Mobile Table Elements](#)
 - To add columns to standard table elements, click the **Custom Columns Configuration** subtab. Refer to the instructions in this section, [Adding Columns to Table Elements](#).
 - To configure the table configuration popup window, on the **Table Configurations** subtab, from the dropdown list, select a configuration. In the Configuration Settings section, you can update the standard settings.
For more information about the Table Configuration popup window, see [SCM Mobile Page Elements \(Buttons, Fields, Tables\)](#).
 - To configure row colors, see [Setting Up Table Row Colors](#).
 - c. After you update the settings on a subtab, click **Save**.
 6. To add custom text boxes, dynamic fields, or dropdown fields to a mobile page, do the following:
 - a. Click the **Additional Page Elements** subtab, and then next to the **Configuration Page** field, click the open icon.
 - b. On the Mobile - Page page, click the **Page Elements** subtab, and then click **New Mobile - Page Element**.
 - c. On the Mobile - Page Element page, set values for the basic settings such as the name and label of the new page element. Then, in the **Type** field, select one of the supported page element types: **Text Box**, **Dynamic Text**, or **Drop Down**.
The Mobile - Page Element page contains the same settings for page elements that you can add to custom mobile processes. For more information about these settings, see [Customizing Mobile Page Elements](#).
You can watch the video posted in this topic, [SCM Mobile App Configuration](#).
 - d. To save the updates that you have made on this subtab, click **Save**.
 7. To add an Action Button type of element, see [Adding Action Buttons Through Mobile Configuration](#).
 8. Based on your mobile app requirements, you can also do the following configurations:
 - If you use Mobile Printing, to configure automatic and required printing, or inactivate a print report, see [Setting Up Automatic or Required Printing](#).
 - To update menu icon settings on standard independent pages, see [Configuring Menu Icons on Independent Mobile Pages](#).
 - To add and set up image capturing or file upload, see [Setting Up Image Capture or File Upload](#).
 - To copy a standard mobile action, see [Cloning Standard Mobile Actions](#).
 - To add a custom loading text to a copy or custom mobile action, see [Setting Up Custom Loading Text for Mobile Actions](#).

9. You can configure more page elements that belong to the same page or a different one. Make sure that you save all your updates before you switch to a different page or page element. After you complete all your configurations for a mobile process, click **Save and Update App**.

Wait for the update to complete before you try to access the mobile app. To view your updates on the app, see [SCM Mobile App Access](#).

10. To apply configurations to the same app in another NetSuite account, see the following topics:
- [Exporting Mobile Processes](#)
 - [Importing Mobile Processes](#)
 - [Restoring Mobile Processes with Imported Updates](#)

Configuring Pages and Actions for Custom Mobile Processes

For custom mobile processes, you can configure mobile actions and associate them with events on a page, like an on load action, or on a page element, like an on click action for a button.

You can also configure mobile actions for specific page elements preconfigured in standard mobile processes. Refer to the tables in the [Configuring Mobile Page Elements](#).

Mobile Pages, Actions, and Configurations

Action Type and Page	Description	Configurations
Mobile page configurations		
Page	Page elements and actions to create or update a custom mobile page	Name Title Parent Process Type On Load Action After Load Action Application Is Pop Up On Popup Close Action
Mobile action configurations per type		
Action Sequence	Contains the Action Sequence subtab on which you can configure the following action types as sub-actions that execute in sequence: Print, Forward Form, Restlet, and Submit Form. For mobile printing, you can configure the reports or documents that you want to print in sequence.	Apply Loading Text to All Sub-actions Loading Text For mobile sub-actions: Sub-action Sequence # Sub-action Of Sequence Condition Sequence Action

Action Type and Page	Description	Configurations
		Loading Text
Client Function	Runs a custom client script.	Client File Path Client Function Name
Forward Form	Navigates to a mobile page after passing data from fields on the current page to those in the associated state. You can run client- and server-side validations before passing data to the state fields.	HTTP Method Validation Script ID Validation Deployment ID Client File Path Client Function Name Convert Response To Object Before Action RESTlet After Action RESTlet Loading Text
Log Out	Logs out of the current session and displays the mobile login page.	
Page Navigation	Navigates to a mobile page. You have the option to retain the state even if the target page is already visited.	Retain State Loading Text
Print	Displays the Print page, generates labels or documents, and evaluates any printing rules for mobile printing. You can configure a RESTlet that runs before NetSuite executes the Print action.	Before Print Action Get Print File Path Loading Text
Process Navigation	Navigates to a page of either a standard or custom mobile process.	Target Custom Process Target Standard Process Loading Text
Restlet	Calls a restlet using either a Get or Post method.	HTTP Method Script ID Deployment ID Convert Response To Object
Saved Search	Runs a saved search.	Saved Search
Show Message	Displays static or dynamic text in a field or popup window	Message Loading Text
State	Obtains data from a state field.	State Path
Submit Form	Calls a restlet to obtain data from the mobile app's state and save the data in NetSuite. You can call additional restlets before or after the main action is executed.	HTTP Method Script ID Deployment ID Client File Path

Action Type and Page	Description	Configurations
	Unlike the Page Navigation action type, you can retain the state only if the target page is not yet visited.	Client Function Name Convert Response To Object Retain State Before Action RESTlet After Action RESTlet Loading Text
URL Navigation	Navigates to a specified URL, usually for a menu option or link.	Target URL

The following table shows the values for the possible configurations that you can set up on a mobile action.

Configuration	Description	Values
After Action RESTlet	Restlet action to call after executing a main action.	<Restlet action name> Example: Submit Additional Fields
Before Action RESTlet	Restlet action to call before executing a main action.	<Restlet action name> Example: Validate Data
Before Print Action	Restlet action to call before executing the main Print action.	<Restlet action name> Example: poReceiving_quantityScan_beforePrintActn
Client File Path	File cabinet path for the client script.	<file path> Example: SuiteApps/com.netsuite.mobile/client/src/countValidation.js
Client Function Name	Name of the function to call from the client script, usually for validation.	<function name> Example: doValidation
Convert Response to Object	If you check this box, NetSuite converts the restlets' responses into objects.	Possible values: ■ true - if checked ■ false - if cleared
Deployment ID	Deployment ID for a RESTlet script.	<deployment ID> Example: customdeploy_validate_employee_restlet
Get Print File Path	Restlet action to call to determine the path of a generated label or document associated with a print report, which is configured on the Print action.	<Restlet action name> Example: wms_invokePrint_Action
HTTP Method	The type of network request that calls the RESTlet configured in the action.	Standard methods: ■ Get ■ Post
Loading Text	Text that replaces the default "Loading..." message that appears on the app.	<text> Example: Submitting receiving details...

Configuration	Description	Values
Message	Translatable text to display in a field or popup window. You can configure a static text (constant) or a dynamic one that can be obtained from a record or state field. You can add HTML tags within the message.	<name of the message record> Example: Under Construction For more information about setting up the message record, see Displaying Messages in Dynamic Text Elements.
On Popup Close Action	The action to call when you close a popup window, which may be one of the following action types: Forward Form, Submit Form, or Action Sequence.	<Action name>
Retain State	If you check this box, NetSuite does not clear the state data. From the table of action types, see the description for the Page Navigation and Submit Form action types.	Possible values: ■ true – if checked ■ false – if cleared
Script ID	Script ID for the RESTlet you want to call, usually for a mobile page submission.	<script ID> Example: customscript_create_employee_restlet
Sequence Action	The mobile action that the sub-action executes. The action must belong to one of the following action types: Print, Restlet, Forward Form, or Submit Form.	<action name> Example: lineLevelItemInstr_autoPackCarton
Sequence Condition	The expression that serves as the condition whether to execute this sub-action. An empty value in this field automatically evaluates to true. When the expression evaluates to true, the sub-action is executed.	<expression that evaluates to true or false> Example 1: - 1<2 - An empty value in this field automatically evaluates to true. When the expression evaluates to true, the sub-action is executed. Example 2: Using a state path to the data you want to evaluate: <pre>{{state::dataRecord:auxParams:warehouse}} == 'Warehouse 1' && {{feature::uom}} == 'T'</pre>
State Path	Path to the state field from which you want to fetch data for the State action.	<state path> Example: dataRecord:auxParams:item1:received
Sub-action Of	The main action, of Action Sequence type, that executes the sub-action.	<Action Sequence action name> Example: salesOrder_lineLevelPackingInstr
Sub-action Sequence #	The number that indicates the sub-action's position in the action sequence.	<numeral>
Target Custom Process	The custom mobile process you want to navigate to.	<name of custom mobile process> Example: Custom PO Receiving Process
Target Standard Process	The standard mobile process you want to navigate to.	<name of standard mobile process> Example: poReceiving_quantityScan

Configuration	Description	Values
Validation Deployment ID	Deployment ID for a validation RESTlet script.	<deployment ID> Example: customdeploy_validate_employee_restlet
Validation Script ID	Script ID for a validation RESTlet.	<script ID> Example: customscript_validate_employee_restlet

To configure pages or actions for custom mobile processes:

- Using the Administrator role, go to Setup > Custom > Mobile – Applications.
- Access the mobile page by doing the following:
 - On the Mobile – Applications, page, click **View** next to the custom process you want to configure.
 - On the Mobile – Process List, click **View** next to the custom mobile process.
 - On the **Pages** subtab, click **View** next to the page that uses the action.
- On the Mobile - Page page, do any of the following:
 - To edit a page, click **Edit**.
 - To configure a page action, in the action field, click the action link.
For more information, see [Customizing Mobile Pages](#).
 - To configure a page element action, on the **Page Elements** subtab, click the element associated with the action you want to configure. On the Mobile – Page Element page, in the action field, click the action link.
 - To use copies of standard mobile actions in a custom process, see [Cloning Standard Mobile Actions](#).
- On the Mobile - Action page, click **Edit**.
- Set the fields for the page or page element action:

For the list of configuration options, refer to the tables in the [Mobile Pages, Actions, and Configurations](#) section of this topic.

For specific customizations, see the following topics:

 - [Setting Up Additional Fields Through Mobile Customization](#)
 - [Displaying Messages in Dynamic Text Elements](#)
 - [Adding Columns to Table Elements](#)
 - [Setting Up Custom Application Identifiers for GS1 Bar Code Scanning](#)
 - [Setting Up Automatic or Required Printing](#) or [Setting Up Print Button Actions](#)
 - [Customizing Mobile Popup Windows](#) or [Mobile Actions for Page Validation and Navigation](#)

For more information about page element actions for navigation, action sequence, and data submission, see [Customizing Mobile Actions](#).
- Click **Save**.
- Update the mobile app with your customizations by doing the following:
 - Go to Setup > Custom > Mobile – Applications.
 - On the Mobile – Applications List, click the **Update App** link next to the mobile application.

To view the status of your update, click the link on the processing message at the top of the page. Wait for the confirmation message to appear before you start accessing your custom mobile page.

Adding Action Buttons Through Mobile Configuration

Within standard mobile processes, you can add buttons on mobile pages that perform additional actions according to your app requirements. When you configure a button, specify its label, position, and the mobile action that performs a task when you click it. For supported action types, you can also add your own loading text for your new button's action.

Note the following guidelines and requirements for adding buttons:

- You can configure Action Button element types only.
- Buttons that you configure can be displayed on the body or footer of a mobile page. You cannot display them on popup windows associated with the mobile page.
- If you want to provide your own button image, upload it into your file cabinet. Buttons that use custom images can be displayed only on the body of the page.
- You can assign a standard mobile action or create a custom one for your button. You can also clone a standard action and configure your copy according to your button requirements.

Common button actions that you can configure include printing, navigation, message display, and table data display.

To add Action Buttons through Mobile Configuration:

1. Access the standard mobile page on which you want to add a button.
For instructions, see [Configuring Mobile Page Elements](#).
2. On the Mobile Configuration page, you can do the following:
 - If you want to clone a standard action that you want to set up for new button, see [Cloning Standard Mobile Actions](#).
When you set up the click action for your button, you can configure your copy of the action according to your button requirements.
 - To add your button, click the **Additional Page Elements** subtab. Beside the **Configuration Page** field, you can click the new icon. If you have existing custom elements configured within the same process, you can click the open icon.
3. On the Mobile – Page page, on the **Page Elements** subtab, click **New Mobile – Page Element**.
On this subtab, you can view other custom page elements within the standard mobile process.
4. On the Mobile – Page Element page, do the following:
 - a. In the **Type** field, select **Action Button**.
 - b. Set values in the basic button fields, like the **Name** and **Label**.
 - c. To use your own button image, in the **Icon Path** field, enter the path to the file cabinet folder that contains it.
 - d. In the **On Click Action** field, click the plus icon.

For more information about button fields, see [Customizing Mobile Page Elements](#). For Print buttons, see [Adding a Print Button to Custom Mobile Pages](#).

5. On the Mobile – Action page, do the following based on the type of mobile action you want to assign to the button:
 - a. In the **Type** field, select the type of mobile action you want to assign to the button.
 - b. Set the appropriate action fields based on the type of mobile action.
For supported action types, you can add your own loading text. See [Setting Up Custom Loading Text for Mobile Actions](#).

- c. For actions that use RESTlets or saved searches, you can set up the one you want to run during a button click.
- d. (Optional) On the **Input Parameters** or **Output Parameters** subtabs, you can set up parameters for your mobile action.

For detailed instructions, see the following topics:

- [Customizing Mobile Actions](#)
 - If you want to set up a Print action, with automatic or required printing modes, see [Setting Up Print Button Actions](#).
 - [Retrieving Messages Through Mobile Actions](#)
6. (Optional) On the Mobile – Page Element page, you can set the **Autoclick Condition** field to run your click action automatically.
For instructions, see [Setting Up Autoclick for Buttons](#).
 7. After you complete all your configurations, on the Mobile Configuration page, update the app by clicking **Save and Update**.

Configuring Mobile Table Elements

Through Mobile Configuration, you can change the default settings of standard tables and each of their columns. Basic settings include the header and column labels, toggle state, and row size. You can copy an existing standard Data Table element and update it to suit your business requirements. You can set up new Data Table elements within standard mobile processes.

Watch this video on some Data Table configurations:

 [SCM Mobile Configuration - Setting Up Data Tables](#)

The following configurations are only available for specific types of table elements:

- New columns for Data Tables and the left side of Transfer Tables to display data of your choice from NetSuite records
- Row colors for Data Table elements
- Multiple row selection for Transfer Table elements
- Create custom Data Table elements
- Copy or clone a standard Data Table element
- Autosubmission of data from Data Table elements

To configure mobile table elements:

1. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
2. Access the Mobile Configuration page by doing the following:
 - a. In the Mobile – Applications list, click **View** next to the mobile app.
 - b. In the Mobile – Process list, click **Configure** next to the standard mobile process that you want to configure
 - c. On the Mobile Configuration page, in the **Page** field, select the mobile page.
3. Depending on table you want to configure on the page, do one of the following:
 - To set up an existing standard table, in the **Mobile Page Element** field, select the name of the table. Then, proceed to step 5.

- To set up a custom table, go to the **Additional Page Elements** subtab. To continue your set up, see [Adding Custom Data Tables](#). Then, return to this procedure to complete the other steps.
 - To clone a table or its mobile action, see [Cloning Tables and Table Actions](#). Then, return to this procedure to complete the other steps.
4. If you create a clone or custom table, be sure to set up the data you want to display on it. For instructions, see [Configuring Your Data Table Source](#). Then, you can return to this procedure to complete the rest of the steps.
 5. In the following fields, you can enable additional settings that suit your table requirements:



Tip: For a custom table or copy, you can set up these same fields on the Mobile – Page Element page.

- You can update basic settings for existing standard tables, such as the label, display order, and row size.
For more information about basic element settings, see [Customizing Mobile Page Elements](#).
 - **Visibility Condition** – If you set up a custom table or copy, you can hide the standard table by entering false in this field
 - **Toggle State** – Select the default state of the toggle, which shows and hides the table automatically during the initial page load. Hiding a table by default enables pages to display other elements and their data without waiting for the entire table to load.
 - **Retain Column Filters** – Check this box if you want to keep your current table filters applied throughout an active session. It persists your column filters even when you navigate to another page within the mobile process.
For more information, see [SCM Mobile Page Elements \(Buttons, Fields, Tables\)](#) or [Filtering Table Data Through Search Tags](#).
 - **Cache Table Data on Back Navigation** – Check this box if you want to cache table data whenever you navigate back to a previous mobile page.
6. For existing standard tables, you can set up custom actions to replace the default ones for a table:



Note: You can set up actions that perform specific tasks for rows or standard columns. When you create actions for data submission or page navigation, be sure that it doesn't break the existing process flow.

You can set up copies of standard mobile actions, as described in step 3.

- To create a custom action, beside a **Custom Action** field, click the plus icon.
 - For row clicks, in the **On Row Click Custom Action** field, enter a custom mobile action that you have created for row clicks on this table.
 - For column clicks on standard columns, on the **Table Columns** subtab, select a column. In the **On Click Custom Action** or **After Column Click Action RESTlet** field, enter a custom mobile action that you have created for this column.
- For more information about mobile actions, see [Customizing Mobile Actions](#).
7. To add your own loading text for a copy or custom action, see [Setting Up Custom Loading Text for Mobile Actions](#).
 8. To set up autosubmission, see [Setting Up Autosubmission for Data Tables](#). Then, return to this procedure to complete the rest of the steps.
 9. Click **Save** to keep all the updates you make on the **Page Elements** subtab.
 10. For Transfer Table elements, you can set up the **Enable Multiselect Condition** field for multiple row selection.

For more information, see [Multiple Row Selection for Transfer Tables](#).

11. On the **Custom Columns Configuration** subtab, to add columns to supported table element types, see [Adding Columns to Table Elements](#).
12. On the **Row Colors** subtab, to set up colors for highlighting rows, see [Setting Up Table Row Colors](#). Then, return to this procedure to complete the other steps.
13. After you complete all your table configurations, click **Save and Update App**.

Adding Custom Data Tables

You can add your own Data Table element to a mobile page of a standard process. On the Mobile Configuration page for the standard process, you can add a table by going to the **Additional Page Elements** subtab. Beside the Configuration Page field, click the open icon to open the Mobile – Page page. On this page, you can go to the **Page Elements** subtab to click **New Mobile – Page Element**. On the Mobile – Page Element page, in the **Type** field, be sure to select **Data Table**.



Note: You cannot manually set up individual table columns for custom tables that you add to standard mobile processes.

To prevent the standard table from appearing on the mobile page, you can hide it by setting its **Visibility Condition** to **false**.

To display your table data, you can use an existing saved search or create your own. If you want to combine data from saved searches and NetSuite records, you can create a RESTlet. Based on the columns or fields referenced in your saved search or RESTlet, the table columns are generated automatically. To configure your custom table data, see [Configuring Your Data Table Source](#).

To complete your custom table setup, return to [Configuring Mobile Table Elements](#).

Cloning Tables and Table Actions

You can clone Data Table elements of a standard process to create a copy, which you can configure according to your table requirements. You can also create a copy of a standard table's row click, column click, or load action. Your copy of an action can be set up in a standard table, custom table, or copy of a table.

When you copy a standard Data Table element, note the following limitations:

- You can't add table columns to your copy of the table.
- On the mobile app, cloned tables appear with a copy icon beside the table name.
- Cloning doesn't automatically hide the standard table from the mobile page. You can hide it by setting its **Visibility Condition**. If you don't want to hide it, you can use the **Override Standard Element** setting to override any selections from it.

On the Mobile Configuration page for the standard process, you can complete these procedures for cloning:

- To clone a mobile action, in the **Mobile Page Element** field, select the name of the table. In the **Standard Action** field, select the name of the standard mobile action. Then, click **Clone**.
If you copy a row or column click action, you can select it in the corresponding **On Row Click Custom Action**, **On Click Custom Action**, or **After Column Click Action RESTlet** fields.
Beside any of these action fields, you can click the open icon to update your copy of the action. To update mobile actions based on its type, see [Customizing Mobile Actions](#).

Instead of a click action, if you copy a load action to change the table data, see [Configuring Your Data Table Source](#).

 **Note:** You can update actions to perform specific tasks for rows or standard columns. If you update actions for data submission or page navigation, be sure that they do not break the existing mobile process flow.

- To clone a table, in the **Mobile Page Element** field, select the name of the standard Data Table. Then, click **Clone**.

 **Tip:** If you see entries in the **Standard Action** field, remove them unless you want to clone a mobile action instead.

To access your copy of the table, on the **Additional Page Elements** subtab, in the **Configuration Page** field, click the open icon. On the Mobile – Page page, click the **Page Elements** subtab, and then click **Edit** or **View** next to the name of the copy. This opens the Mobile – Page Element page for your Data Table copy. On this page, you can enable the **Override Standard Element** setting and set up the table data.

To continue setting up your copy of a table or mobile action, return to [Configuring Mobile Table Elements](#).

Configuring Your Data Table Source

When you create a custom table or a copy, you can specify the source of data to display in your table columns through one of the following ways:

- You can create a saved search or choose a NetSuite record as your data source. Be sure to create your own RESTlet or saved search before you set it up. For more information about these data sources, see [Data Sourcing for New Table Elements](#)
- You can copy the load action of a standard Data Table that contains the columns and data you want to display.

For example, you can copy the standard load action, **poReceiving_enterBin_binListTbl_getBinList**, for the Bin table on the Enter Bin page of the PO Receiving process.

For more information about copying mobile actions, see [Cloning Tables and Table Actions](#).

To set up, on the Mobile – Page Element page for the Data Table element, in the **On Load Action** field, do one of the following:

- Select your copy of a standard load action.
- Click the open icon to open the Mobile – Action page and update the existing action.
- Click the plus icon to open the Mobile – Action page and create a load action.

Then, on the Mobile – Action page, do one of the following to assign or update your saved search or RESTlet:

- To configure your saved search, in the **Type** field, select **Saved Search**. Then, in the **Saved Search** field, select your saved search.
- To configure your RESTlet, in the **Type** field, select **Restlet**. Then, set up your RESTlet script in the **Script ID** and **Deployment ID** fields.

For more information about setting up these action types, see [Mobile Actions for Page Element Events](#).

To complete your table setup, return to [Configuring Mobile Table Elements](#).

Setting Up Autosubmission for Data Tables

You can set up autosubmission for standard Data Table elements, your copy of a standard Data Table, or a custom Data Table. For custom mobile processes, you can autosubmit data from existing or custom columns. For standard mobile processes, you can autosubmit data selected from standard table columns of a Data Table element.

Note: You cannot autosubmit data from columns that you add through Mobile Configuration. For more information, see [Adding Columns Through Mobile Customization](#).

If you set up autosubmission for other elements on the same page, the app performs the actions in the following order: (1) action of an autosubmit button that you set as the primary action, (2) action of an autosubmit button, not set as the primary action, (3) default value autosubmission of a text box element, and (4) table autosubmission. For information about autosubmission for other elements, see [Setting Up Autoclick for Buttons](#) or [Assigning Default Values to Field Elements](#).

On the Mobile Configuration page, you can configure autosubmission for a standard table. On the Mobile – Page Element page, you can set up autosubmission for a custom table or your copy. Either way, you can set it up in the **Apply Autosubmit To** field in the following ways:

- To autosubmit data from a standard column that has an On Click Action by default, in the **Apply Autosubmit To** field, select the key for the column.
- To autosubmit data from a standard column that doesn't have a click action by default, you can set up one by clicking the **Table Columns** subtab. In the **On Click Custom Action** field, assign the mobile action you want to apply to the column. Then, in the **Apply Autosubmit To** field, select the key for the standard column.
- To autosubmit data from an entire row, in the **Apply Autosubmit To** field, select **Row Click**. Optionally, in the **On Row Click Custom Action** field, you can enter your own mobile action. It may perform additional tasks or include conditions that are automatically triggered during the row click.

Note: The **Row Click** option doesn't appear if you have a click action in any of the columns. To include column data in autosubmission of a row, be sure that you do not set its **Visibility Condition** field to **false**. If you set a dynamic value in this field, column data is autosubmitted only when the condition evaluates to true.

Based on your setup, the app autosubmits the data from the column of the first row or the entire first row. For entire rows, the app includes data from columns that you do not show on the table through the **Visible Columns** options.

To complete your table setup, return to [Configuring Mobile Table Elements](#).

Configuring Menu Icons on Independent Mobile Pages

Independent mobile pages, which do not depend on a mobile process, are usually set up as menus using icon elements and images. The icons provide access to mobile processes or to additional menu options.

You can configure a standard independent page to modify the settings of its icons. You can change the display settings and the image of an icon. If you want to restrict access to a standard mobile process, you can choose which roles can access its icon.

If you customize a mobile process, you can hide the icon for the standard process and keep the one for your custom process.

Updates to independent pages apply to standard mobile processes only.

To configure menu icons independent mobile pages:

1. Access the Mobile – Process List page by doing the following:
 - a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile – Applications List page, click **View** next to a mobile app.
2. On the Mobile - Process List page, click **Configure Independent Pages**.
3. On the Mobile Configuration page, from the **Page** field, select the name of the independent page.
4. On the **Page Element** subtab, from the **Mobile Page Element** field, select the name of the icon element on the independent page.
5. In the Element Settings section, you can update the following fields:
 - **Label** – Select a different label, or to create a new one, click the plus icon.
 - **Element Icon** – Enter the file cabinet path to the image you want to display for the icon.
Example: `~/src/Images/binTransfer.svg`
 - **Visibility Condition** – Enter **true** or keep the field blank to show the icon, or enter **false** to hide it from the independent page. Alternatively, you can enter a condition through which you can control the icon's visibility on the independent page.
 - **Roles** – Select the roles to which you want to provide access to the icon.
 - **Display Order** or **Layout** – See [Arranging Page Elements](#).

For more information about these page element settings, see [Customizing Mobile Page Elements](#).
6. Click **Save**.

Cloning Standard Mobile Actions

Through Mobile Configuration, you can create a copy of a standard mobile action, including its parameters. It includes the print report settings of standard Print actions. For mobile action types that support action sequences, it also copies the sub-actions.

You can clone only mobile actions that you set up for page elements. Actions that you set up only for mobile pages can't be cloned.

To copy an action, on the Mobile Configuration page, you can select the page and page element that contains the standard mobile action. Based on the page element associated with the action you want to copy, you can do the following:



Tip: For instructions on accessing and navigating the Mobile Configuration page, see [Configuring Mobile Page Elements](#).

- Beside the Mobile Page Element field, in the **Standard Actions** field, select the action, and then click **Clone**. When you see the confirmation message, refresh the page.
- For columns of Data Table elements, on the **Table Columns** subtab, select a column. In the **Standard Actions** field, select the action, and then click **Clone**. When you see the confirmation message, refresh the page.



Note: The **Standard Actions** field is disabled for page elements that don't have any standard mobile action set up by default. This behavior may also happen if you set up a custom mobile action on the page element. The standard action is overridden and removed from the page element.

By default, your custom action has the same name but it starts with the date of cloning. Through Mobile Customization, you can assign it to action fields of a custom process such as an On Click Action or On

Select Action. Through Mobile Configuration, standard page elements include fields for custom actions, like the On Click Custom Action or On Validate Custom Action. These action fields vary depending on the page element type.

To update your copy of the action, beside the action field, click the open icon to open the Mobile - Action page. On this page, you can make the following changes:

- You can change default settings, like its name and label.
- For specific action types, you can also add more input or output parameters to suit your mobile app requirements.
For detailed instructions, see [Customizing Mobile Actions](#).
- If you want to provide your own loading text for certain action types, see [Setting Up Custom Loading Text for Mobile Actions](#).

After you complete all your updates to your custom action, apply them to the app by clicking **Save and Update App** on the Mobile Configuration page.

Deleting Configured Page Elements from a Standard Process

SCM Mobile provides a specific Mobile - Page page on which you can add supported page elements to standard processes through Mobile Configuration. From this page, you can also delete page elements that you no longer use. However, you cannot delete the mobile page itself.

If you don't want to show a page element on a mobile page without deleting it, you can update the visibility fields instead. For instructions, see [Page Element Visibility and Loading](#).

To delete configured page elements from a standard process:

1. Access the standard mobile page that contains page elements that you want to delete.
For instructions, see Steps 1 to 3 of this procedure, [To configure mobile page elements](#).
2. On the Mobile Configuration page, go to the **Additional Page Elements** subtab, and then next to the **Configuration Page** field, click the open icon.
The Mobile - Page page appears.
3. On the **Page Elements** subtab, next to a page element that you want to delete, click **Edit**.
4. On the Mobile - Page Element page, do the following:
 - a. To delete a table, on the **Table Columns** subtab, delete all the columns. Then, check the other subtabs for the table to delete all the entries.
 - b. If the page element has records on the **No Code Settings** subtab, delete all of them.
 - c. From the **Actions** submenu, click **Delete**.
 - d. If the Notice page appears, you can click the **dependent records** link to view other records that you have not deleted from the page element's subtabs. Refer to Steps 4a and 4b.
5. On the Mobile - Page page, you can verify that the page element has been removed from the list. You can also delete another page element.
6. On the Mobile Configuration page, if you want to delete page elements from another mobile page, do the following:
 - a. Click **Save** to save your updates for the current page.
 - b. In the **Page** field, select another mobile page.

- c. Repeat Steps 2 to 6.
- 7. After deleting all the page elements from the mobile pages, click **Save and Update App**.
- 8. If you delete an Action Button type of element that has an icon, you can also delete the icon from your file cabinet.

SuiteApp Updates for SCM Mobile Apps

After an upgrade to your NetSuite account, the SCM Mobile SuiteApp is updated along with the SuiteApps for the mobile apps you use. SuiteApp updates start automatically, so you must not uninstall any of them during and right after your NetSuite account upgrade.

See the following topics for information about these SuiteApp updates:

- [SuiteApp Update Schedule](#)
- [Notifications for SuiteApp Updates](#)
- [Reporting SuiteApp Update Issues](#)
- [Viewing the Update Status and SuiteApp Versions](#)

For information about SuiteApps for SCM Mobile, see [SCM Mobile Setup](#).

SuiteApp Update Schedule

SCM Mobile and its supported SuiteApps are updated automatically after your NetSuite account upgrade. If not immediately, it may begin within seven business days after your NetSuite account upgrade, depending on the number of accounts in the queue.

For installation or update in Release Preview or Sandbox accounts, you can review the availability schedules in their corresponding SuiteAnswers articles. See [Notifications for SuiteApp Updates](#).

Notifications for SuiteApp Updates

Before any SuiteApp update, the following notifications are sent to your NetSuite account contacts:

- **Pre-Release Notice** – informs you about the availability of enhancements to SCM Mobile and the related mobile app you use in Release Preview accounts.
- **Upgrade Notice** – provides details about which SuiteApps will be updated in your account and their new bundle IDs.

Both of these notices include an overview of enhancements to SCM Mobile and the mobile app you use. Separate notices are sent for each mobile app, such as NetSuite WMS or NetSuite Ship Central.

In addition to these notices, you can view the SuiteApp availability schedules in the following SuiteAnswers articles:

- [Ship Central: Availability of the Ship Central SuiteApp During Account Upgrades](#), SuiteAnswers ID: 100694
- [NetSuite WMS: Availability of the Oracle NetSuite WMS and SCM Mobile SuiteApps During Account Upgrades](#), SuiteAnswers ID: 87598

From these articles, you can review the availability schedule for the leading or lagging version of a SuiteApp during NetSuite account upgrades.

For example, based on the availability schedules, if your NetSuite account has not been upgraded to the latest version, you can do the following:

- Install only the lagging SuiteApp version in a production or Sandbox account.
- Install or update the leading SuiteApp version in your Release Preview account at certain dates and times only

Reporting SuiteApp Update Issues

You may encounter the following issues after a SuiteApp update due to mismatched versions or failures:

- No access to a mobile app or could not log in
- Permission violations
- Features not available to a role
- Language mismatch

You can start resolving them by viewing your SuiteApp versions. Make sure that you have the latest version of the SCM Mobile SuiteApp and the supported SuiteApps for the mobile apps you use. For instructions, see [Viewing the Update Status and SuiteApp Versions](#).

For example, you may have SCM Mobile SuiteApp version 2025.1.xx and Oracle NetSuite WMS version 2024.2.xx.

If you don't have the latest version or if they don't match, you may contact NetSuite Support to request a bundle repush.

After you obtain matching versions of the latest SuiteApps, you can review your settings for the components related to the issue. These may include roles, permissions, login URL, and language preferences. For more information, see the following topics:

- [Setting Up the Online Form User Role](#)
- [SCM Mobile App Access](#)
- [Language Preference Setup for SCM Mobile](#)
- [Showing Role Permission Differences](#)

Viewing the Update Status and SuiteApp Versions

Using the Administrator role, you can go to Customization > SuiteBundler > Search & Install Bundles > List to view the Installed Bundles page. In the Version column, you can view the current version number for SCM Mobile and its related SuiteApp for the mobile app you use. If a new version of a SuiteApp has been released, the info icon appears beside the version number. You can click the info icon to view the new version number.

SCM Mobile App Basics

SCM Mobile provides the following components for each mobile process:

- **Mobile process icon** – From the Main Menu, you can access a mobile process by tapping its icon.
- **Mobile pages** – To complete a task within a mobile process, you can go through a set of pages arranged in a sequence according to a process flow. Process flows vary depending on features that you use or how you complete a task. You might see additional pages if you use bins, use pallets, process lot items, or tally scan item bar codes.

A page includes an information screen that you can access to view details captured from previous pages. Mobile processes may also include popup windows for additional information or tasks. Error messages or warnings may appear on popup windows or below the page header.

Within a mobile process, the last page is a summary page that shows a confirmation message for the completed task. It also includes an overview of submitted or processed details. Depending on the mobile process, you can reach the summary page by entering or scanning the last required detail to complete a task.

- **Mobile page elements** – Mobile pages contain page elements, which include fields, buttons, and tables. Details you provide through a page element may be required or optional. You can access succeeding pages based on actions that you perform on page elements, until you complete a task. You can also return to previous pages using the Back button on mobile pages.

Some mobile pages or page elements appear based on system rules, preferences, and other settings that you enable for the mobile app.

The following topics describe the common pages and page elements that enable you to complete processes or tasks through the mobile app:

- [SCM Mobile Login Page](#)
- [Data Entry on Mobile Apps](#)
- [Common Mobile Pages and Screens](#)
- [SCM Mobile Page Elements \(Buttons, Fields, Tables\)](#)

For mobile app capabilities available in NetSuite WMS only, see the following topics:

- [Inventory Status on Mobile Devices](#)
- [Multiple Units of Measure \(UOM\) on Mobile Devices](#)
- [Mobile Device Transactions](#)
- [Filtering Table Data by Date](#)

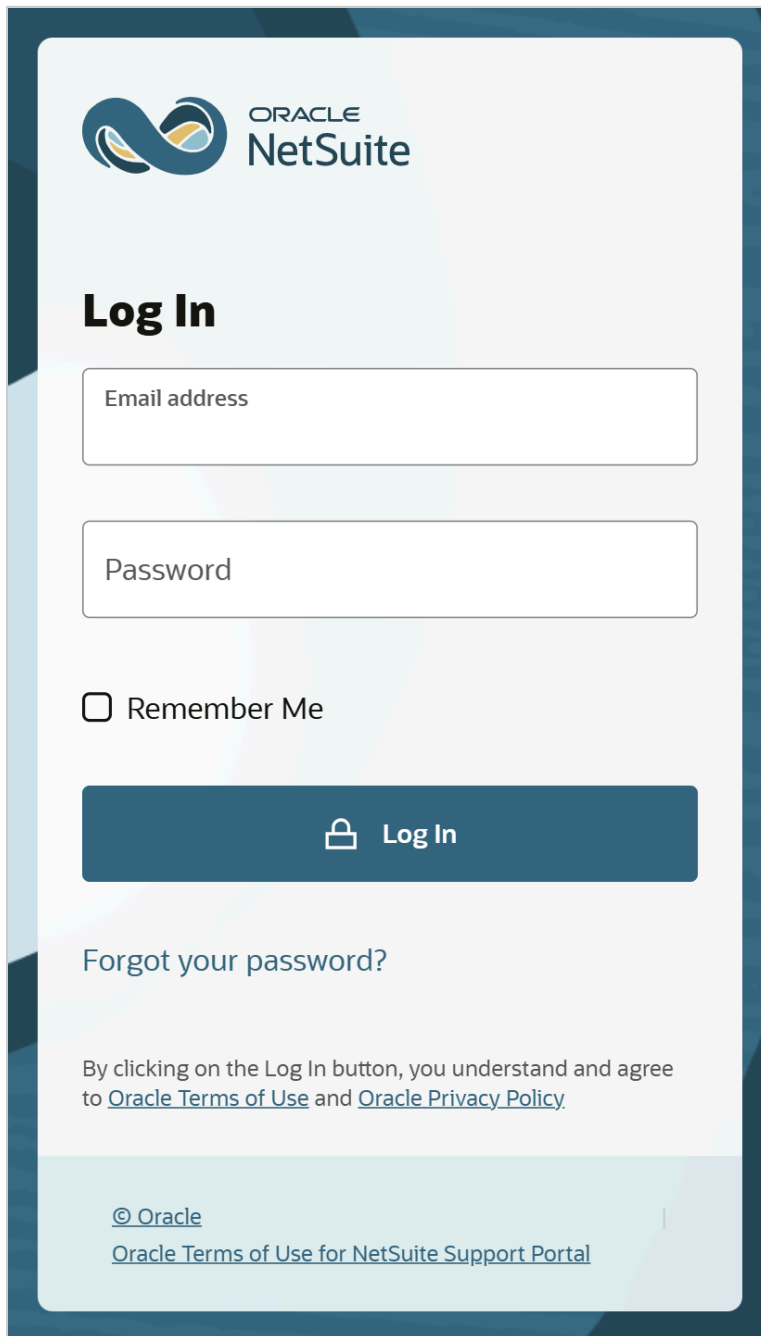
To perform common or additional tasks available for all or specific mobile apps, see the following topics:

- [Language Preference Setup for SCM Mobile](#)
- [Label Printing and Reprinting](#)
- [Filtering Table Data Through Search Tags](#)
- [Grouping or Filtering Table Rows Based on Colors](#)
- [Capturing and Attaching Files Through the App](#)
- [Creating Deployments for Target Transactions](#)

SCM Mobile Login Page

Through your login page URL, you can access the SCM Mobile Login page. You can log in using your NetSuite account credentials or through the single sign-on option. To reset your password, you can click

the **Forgot your password?** link. For more information about the login URL or signing in, see [SCM Mobile App Access](#).

The image shows the Oracle NetSuite mobile login interface. At the top left is the Oracle NetSuite logo. Below it is the heading "Log In". There are two input fields: "Email address" and "Password". Below the password field is a checkbox labeled "Remember Me". A dark blue button with a white lock icon and the text "Log In" is positioned below the checkbox. Underneath the button is a link "Forgot your password?". At the bottom, there is a disclaimer: "By clicking on the Log In button, you understand and agree to [Oracle Terms of Use](#) and [Oracle Privacy Policy](#)". The footer contains the copyright notice "© Oracle" and a link "Oracle Terms of Use for NetSuite Support Portal".

 ORACLE
NetSuite

Log In

Email address

Password

☐ Remember Me

 Log In

[Forgot your password?](#)

By clicking on the Log In button, you understand and agree to [Oracle Terms of Use](#) and [Oracle Privacy Policy](#).

© Oracle
[Oracle Terms of Use for NetSuite Support Portal](#)

After you log in, the apps and processes that you can access may depend on your role. Some settings may also affect your access to a mobile app capability. See [Configuring SCM Mobile App Settings](#)

Data Entry on Mobile Apps

Mobile apps provide one or more ways to enter data through its pages and page elements. Some of these options depend on features or system rules that you use. You can perform the appropriate action based on the page element:

- In page element fields, you can enter data. In some fields, you can scan item bar codes to enter data.
- In lists and tables, you can tap data in the first column, which usually appear as a hyperlink, to select it. For some tables, you can tap an entire row.

If set up for your app, you can also upload supported image files or documents through an icon and save them to your file cabinet. For more information, see [Capturing and Attaching Files Through the App](#).

Settings and filters that you apply to page elements may affect the availability of data that you can enter, scan, or selection. For more information, see the following topics:

- [Filtering Table Data by Date](#)
- [Filtering Table Data Through Search Tags](#)
- [Grouping or Filtering Table Rows Based on Colors](#)

Scanning Item Bar Codes in Apps

To enter information using a scanner, verify that the cursor appears within the appropriate field before you scan an item bar code. These fields include the word, **Scan**, in the label.

Your mobile device configuration controls data entry behavior for scanning, as described in the following:

- If you configure your mobile device to perform the Enter action after a scan, you enter the information automatically after you scan it. Also, the next page in the process appears or the cursor appears in the next field on the same page.
- If you configure your mobile device to perform the Tab action after a scan, tap the button at the bottom of the page to enter the information and move to the next page in the process.

For more information about configuring your mobile device, contact your NetSuite account manager.

If a Scan field appears with related fields below it, after a scan, you can enter additional details in the other fields. Then, you must tap the button at the page footer to proceed, as shown in the following image.

A Scan field may be accompanied by a table on which you can tap boxes to select a row. In this case, you can scan multiple times to select the rows with matching data. After you scan and select rows, you must tap the button at the page footer to proceed.

You can activate system rules or settings that enable scanning of advanced bar codes for items, like GS1, HIBC, and composite formats. If you activate Tally Scanning, quantity pages within supported mobile processes display a field in which you can scan an item bar code. Each scan increments the quantity of a processed item, lot number, or serial number, by one. For information about item bar code scanning and supported apps, see [Bar Code Scanning for SCM Mobile](#).

Entering Data in Apps

Verify that the cursor appears within the page element field, and then type the text or number through your on-screen or physical keyboard. After you enter all the optional and required data, tap the button at the bottom of the mobile page.

As shown in the following image, to process purchase order #12345, enter **12345** in the **Scan/Enter PO # or Item** field. Then, **tap Enter PO/Item**.

PO Receiving

SCAN/ENTER PO # OR ITEM *

12345

1

Select PO From List

Find PO By Vendor

Find PO By Item

Find PO By MPN

2

< Enter PO/Item

Entering Dates in Apps

In a Date page element, you can enter a value in any of the following ways:

- Tap the calendar icon to select a month, day, and year.
- If you enter the month, day, and year without / separators, the app automatically adds them.

Selecting Data in Apps

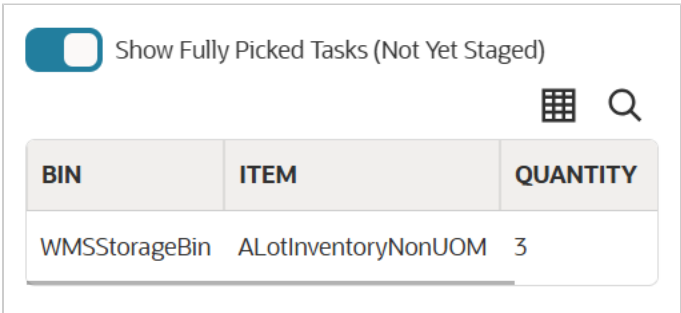
In dropdown fields, you can select an option from the list. If there are other fields on the page, usually you can tap a button at the bottom to save or submit all the data.

Beside a date field, you can tap the calendar icon to select a year, month, and day.

On page element tables, tap a link or row to select the data. When you select the data, you automatically enter or submit it without tapping a button. The cursor automatically moves to the next required field on the page or the next page in the mobile process appears.

Some tables and lists appear when you tap a toggle, such as the following table of fully picked tasks that have not been staged:

Note: For Data Table elements, your toggle remains switched on or off even if you log out, unless you clear your cache.




This table appears on the Select Pick Task page on which only the toggle appears after the initial page load. You can tap the toggle to display the table, and then tap a row to select a pick task.






Common Mobile Pages and Screens

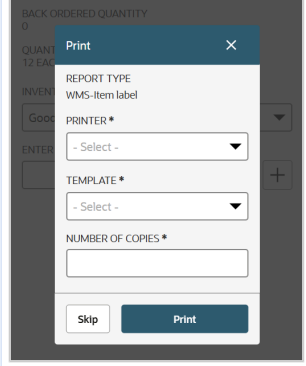
Common pages and screens include menus, search pages, information screens, popup windows, and list pages. Menus and some list pages, called independent pages, appear before you start a mobile process. The other pages and screens are process-dependent and contain page elements that enable you to complete tasks within a mobile process.

The Main Menu page includes icons that provide access to mobile processes. You can hide standard icons that appear on this page to prevent access to their corresponding standard mobile processes. For instructions, see [Configuring Menu Icons on Independent Mobile Pages](#).

The following table shows a list of common pages, most of which appear within standard mobile processes:

Page or Screen	Access	Example
Options Menu – The Options Menu displays the following NetSuite account details within all mobile apps: - NetSuite account name - NetSuite account number - Role of the logged in user It contains links to the following common mobile pages and the log out option: - Switch Application - Main Menu - Select Warehouse - Log Out - Switch Role – This option appears in the Options menu only for the Select Application page You can access the following Mobile Printing facilities from the Options menu: - Print Log - Printer Group	At the top-left corner of a mobile page, tap the Menu icon .	

Page or Screen	Access	Example
The rest of the Options menu links depend on the associated mobile app. For example, the Ship Central app includes links for Generate Manifest, Schedule Pickups, and Void Shipping Label, among others. The WMS app includes the Search Inventory link. Aside from the links, you can tap the following icons located at the header of the options menu: ■ Close icon  – Closes the options menu. ■ Expand icon  – Displays the Options Menu in full-screen mode.		
Information Screen – Within a mobile process, the Information Screen displays contextual information about a mobile process. The details vary depending on the input you provide as you complete the steps for a mobile process. Item details on the Info screen may include the bin number, item name, and item image. Transaction details include the order number and number of item lines. Quantities displayed on the info screen may pertain to inventory levels or total items processed, such as the received quantity.	To expand the screen, at the top-right corner of a mobile page, tap the Info icon . To close the screen, tap the arrow icon  or tap on the page outside of the information screen.	
Search Pages – Within a mobile process, you can access search pages to look for and select items or records. It provides a search box in which you can enter keywords of at least three characters. Below the search box, a list of results appears to display active and valid items or records. From the list, you can tap a row to select the item or record. For example, within the Bin Transfer process, you can search for an item contained in multiple bins. In the search results, NetSuite WMS displays the consolidated available quantity along with one of the bins.	On a mobile page, tap the Find button. 	
Select from List Pages – List pages display items, records, or transactions that you can select from. On a list page, you can tap the record or item link you want to select. If you want to refine the list, you can use the search tool. Entries in the list vary depending on the input required for the mobile process. For example, during the PO Receiving process, you want to view and select from the list of purchase orders. The list page displays only the open orders that are in Pending Receipt or Partially Received status.	On a mobile page, tap the Select button. 	

Page or Screen	Access	Example
Print Popup Window – This window displays printing options and details, including the following: ■ Report Type – The print report type associated with the label or document available for printing. It contains the list of printers and templates that you can choose from based on your printing setup. If you have multiple documents for printing within a process, the associated report types appear in sequence. ■ Printer Group – A list of printer groups that you have set up for Mobile Printing. This field does not appear if you do not set up any printer groups. For more information, see Creating Printer Groups. ■ Printer – A list of regular or ZPL printers. Without PrintNode integration, only the Print to File option appears in the list. For more information, see Setting Up Your Printers or Setting Up Print to File. ■ Template – The default print template associated with the report type. If you set up different standard or custom print templates for the report type, they can be selected from the list. For information about custom templates, see Creating Custom Print Templates and Files. ■ Number of Copies – The number of copies to print. If you set up a default number or rules for the number of copies for the report type, they appear in this field by default. ■ Page – If you set up selective page printing for the report type, this field enables you to specify a page or page range. For more information about report types, see Setting Up Printing Settings on Print Reports.	When you tap a Print button, the Print popup window appears. To view the list of mobile pages that display a Print button by default, see Setting Up Automatic or Required Printing. On the popup window, you can change the printing options, then tap Print to submit your print request. If you have another label or document for printing, its associated report type and default printing settings appear next on the popup window. Instead of printing or saving a label or document, the following options are available: ■ If you don't want to print a non-required label or document, tap Skip. ■ If you want to preview a PDF file, tap the page  icon. To open the Preview page, make sure that your browser does not have any popup blockers for mobile pages.	

SCM Mobile Page Elements (Buttons, Fields, Tables)

Mobile pages contain one or more of the following page elements for navigation, data entry, search, and data submission:

- Field element types – Text Box, Date, Drop Down, Dynamic Message, Text Area, UOM
To enter data in field elements, see [Data Entry on Mobile Apps](#).
UOM elements include a field for the quantity and a field for the unit. These fields appear side by side on a mobile page.
Date elements may include a time field that appears beside it.
- Button element types – Action Button, Back Button, Icon

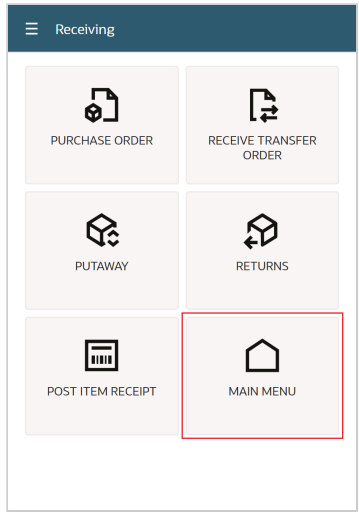
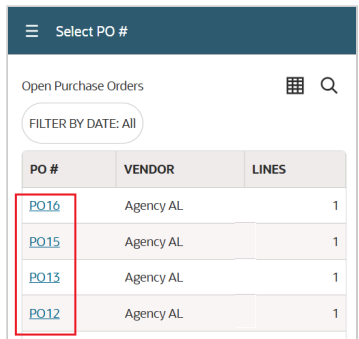

Both Capture Image Icon and Upload File Icon elements display an icon and a list that shows the captured image files or uploaded files, respectively. For more information, see [Capturing and Attaching Files Through the App](#).

Certain click actions may display a loading text to indicate ongoing processing or page loading.

- Table element types – Data Table, Search Grid, Transfer Table

Customized Data Table types of elements may include boxes for multiple selection of rows. Both customized or configured ones may show rows highlighted with colors of your choice. For more information, see [Customizing Mobile Table Elements](#).

The following tables describe how you can use page elements and other components to perform your mobile tasks.

Element	Example
Icons To select a menu item represented by an icon, tap the menu item icon. For example, tap the Main Menu icon to access it. Groups of related icons usually appear on menu pages. They provide access to mobile process available in the app. Some page elements appear with an icon by default. Date fields include a calendar icon. Data tables include an icon for accessing the table configuration popup window.	
Elements with hyperlinks Tap a hyperlink in a list, field, or table to select it. For example, to select from a list of open purchase orders, tap a hyperlinked order number.	
Buttons Tap a button on a mobile page to perform its task. For example, tap the Find PO By Vendor button if you want to search for a purchase order associated with a specific vendor. Be sure to tap a button only one time so that the app does not skip a task or a step in the process. To move to a previous page in a process, tap the Back button. Do not use your browser's back button to move to a previous page.	

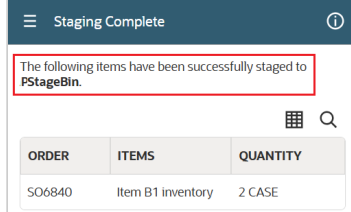
Element	Example
Dynamic messages Dynamic messages may contain additional information related to the mobile process. It may also contain messages that inform you about the status of a task or action. Messages and additional information may appear on mobile pages, information screens, and popup windows.	 The screenshot shows a mobile app interface. At the top, a dark blue header bar contains a hamburger menu icon, the text 'Staging Complete', and an information icon. Below the header, a red-bordered message box contains the text: 'The following items have been successfully staged to PStageBin.' Below the message, there is a table with three columns: 'ORDER', 'ITEMS', and 'QUANTITY'. The table has one data row with the following values: 'SO6840', 'Item B1 inventory', and '2 CASE'. To the right of the table, there are icons for a grid and a search function.

Table Elements

Within a mobile page, data may appear on any of the following table elements: Data Table, Search Grid, or Transfer Table. You can search for data within a table and change the columns that display on it.

You can tap a row or hyperlink from a table to make a selection. Transfer tables for the Ship Central app may include a box for each row that enables multiple selection.

 Select PO #

Open Purchase Orders

1

2

3

4

×

5

PO #	VENDOR	LINES
PO1925	Tax Agency AL	2
PO1860	Tax Agency AL	6
PO1858	ACME LTD	3
PO1849	ACME LTD	2
PO1836	Tax Agency AL	6
PO1819	ACME LTD	5
PO1369	Tax Agency AL	1
PO1366	Tax Agency AL	1
PO1362	vendor401	1
PO1341	Tax Agency AL	3

Load Next 10

<

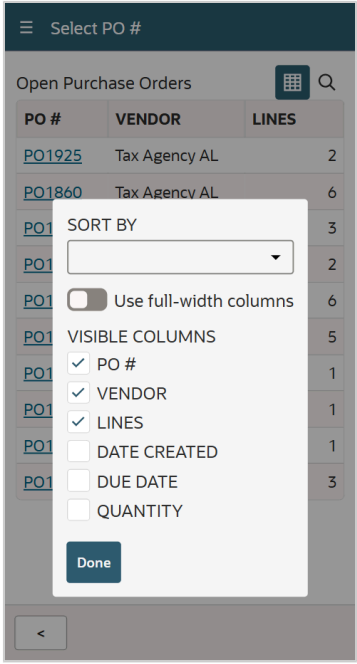


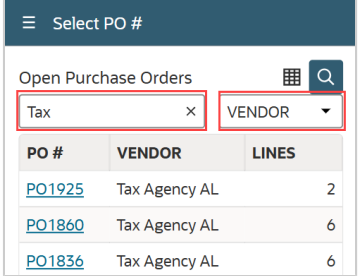

Table Element Controls	Example
1.  Access the Table Configuration popup window, on which you can set and do the following: Sort By – Select the column you want to use to sort the table data. Your sorting preference persists until you change it or clear the cache. It does not reset even if you log out and in again using the same credentials and role. Use full-width columns – Check this box to display visible columns in full width Visible Columns – Check the box for a column that you want to display on the table.	
2.  Access the search field to find data in tables. As you enter text in the search field, the mobile app filters the results in the table based on the entries that match the text you type. Results start to filter after you enter one character.	
3.  Remove the entire text from the search field.	

Table Element Controls	Example
4.  Open the column dropdown field to filter your search results. For example, you want to find all purchase orders that still need to be received from a specific vendor. Select the search icon and enter the vendor name in search field, then select Vendor in the dropdown field. To add search tags to filter column data, see Filtering Table Data Through Search Tags.	
5.  Load the next set of rows to display on the table.	
 Show Completed Display or hide a Data Table element. For mobile pages with multiple tables, a toggle that hides all or any of them by default could shorten the loading time. Toggles remain switched on or off even if you log out, unless you clear your cache.	

Label Printing and Reprinting

With the Mobile Printing capability, you can print as you process tasks on the mobile app. Depending on your printing setup, you can print a hard copy or save a soft copy of a label or document. Before you print supported labels in PDF format only, you can preview them.

To enable Mobile Printing, see the following topics:

- [Enabling Mobile Printing without PrintNode Integration](#)
- [Enabling Mobile Printing with PrintNode Integration](#)

Depending on the app you use, you can print standard labels and documents, such as item labels, packing lists, and shipping labels, as listed in the following topics:

- [Mobile Printing for NetSuite WMS](#)
If you use pick cartons for the order picking processes, you can print pick carton labels. If you activate the Advanced bar code rule for GS1 formats, you can print them for item labels during the Search Inventory process. For setup instructions, see the help topic [System Rules for NetSuite WMS](#).
- [Mobile Printing and Weighing Scale Setup](#) for Ship Central
To print packing labels and documents in bulk, see the help topic [Printing Multiple Packing Labels and Documents](#).
To set preferences that enable additional shipping labels and documents, see the help topic [Mobile Printing and Weighing Scale Setup](#).
If you enable preferences for return labels, refer to any of the following printing instructions

- [Generating and Printing Return Labels](#)
- [Generating Return Labels from an RMA](#)

Ship Central also enables you to print shipping manifests after you process shipments, as described in this topic: [Generating and Printing Shipping Manifests](#).

SCM Mobile provides the same printing options and settings across its supported apps, as well as Mobile Printing from a NetSuite page. The default optional printing mode displays the Print button on a mobile page. It opens a popup window on which you can modify printing settings such as the printer and template you want to use. By default, it also provides you with the option to skip printing. If you customize Mobile Printing or change the default settings, your printing flow may vary. To set your printing mode and view the list of mobile processes that contain the Print button by default, see [Setting Up Automatic or Required Printing](#). If you want to assign printer groups, see [Creating Printer Groups](#).

For PDF files or documents that you print using a regular printer, you can set up the option to specify the pages to print. To enable this setting, as well as assign default printers, standard or custom templates, and number of pages, see [Setting Up Printing Settings on Print Reports](#).

For printing instructions, see the following topics:

- [Manually Printing Labels from Your Mobile Device](#)
- [Reprinting Labels](#)

If you encounter setup or printing issues, see [Troubleshooting Mobile Printing](#)

Manually Printing Labels from Your Mobile Device

For labels or documents that you do not set to Automatic printing mode, you can manually print or save them from the mobile app. If you set up Mobile Printing on a NetSuite page, you can follow the same manual printing steps.

To manually print labels from your mobile device:

1. Begin by performing the tasks within one of the following processes until you reach the mobile page on which you can print the label:
 - [Receiving Orders](#)
 - [Receiving Inbound Shipment Orders](#)
 - [Searching for Inventory](#)
 - [Building Assembly Items for a Work Order](#)
 - [Replenishing Primary Bin Locations](#)
 - [Picking Orders](#)
 - For Ship Central, see the help topic [Ship Central Packing](#) or [Ship Central Shipping](#).
2. On the mobile page, tap **Print**.
3. On the Print popup window, do the following:

Note: The default settings in printing fields depend on the print report you use for the mobile process. See [Setting Up Printing Settings on Print Reports](#) or [Setting Up Automatic or Required Printing](#).

- a. If you set up printer groups, in the **Printer Group** field, select the group in which the printer belongs to.

List options in the Printer field appear based on both the printer type from the print report and the printer group of your choice. For more information, see [Creating Printer Groups](#).

- b. In the **Printer** field, select the printer you want to use, or without PrintNode integration, select **Print to File**.

If you do not find the printer you want to use, verify that it is set up correctly. See [Setting Up Your Printers](#) or [Setting Up Print to File](#).

- c. In the **Template** field, select the print template file.

If you select a supported PDF template, you can preview it before you print or save, as described in Step 3f.

- d. In the **Number of Copies** field, enter a number greater than **0** for the copies you want to print.

- e. In the **Page** field, enter the page number or a range of pages from the document you want to print. You can include a comma (,) or dash (-) symbol to specify multiple pages.



Note: This field appears for print reports that you set up with selective page printing. See [Setting Up Printing Settings on Print Reports](#).

Refer to the following examples of valid entries:

- **1** – prints page 1
- **3,10** – prints pages 3 and 10
- **4-8** – prints pages 4 up to 8
- **4-** – prints page 4 up to the last page
- **-5** – prints from the first page up to page 5
- **4, 8-** – prints page 4, then page 8 up to the last page

- f. Tap **Print**.

Alternatively, if Required printing is not set up for the process and you want to skip printing, tap **Skip**. If you want to preview a PDF file, tap the page icon beside the Print button.



Tip: To open the Preview page for a PDF file, make sure that your browser doesn't have any popup blockers.

If you encounter printing issues, see [Troubleshooting Mobile Printing](#).

You can repeat these steps to print other labels that you have configured for the process.

4. After you print the labels, documents, or both, continue with the rest of the mobile process flow.

For some processes, you can proceed to additional Print options for packing lists and international shipping documents, among others.

If you want additional copies or if you encounter a printing issue, you can reprint the label. See [Reprinting Labels](#).

Reprinting Labels

You can reprint the documents printed from a mobile device, even those that failed the initial printing. You can send reprint requests from a mobile device or from the NetSuite user interface, as described in the following topics in this section:

- [Reprinting from Your Mobile Device](#)

■ Reprinting from the NetSuite User Interface

Your file cabinet stores files for reprinting until they reach the retention time defined on your printing settings. By default, NetSuite WMS retains printable files in your file cabinet for 24 hours before it deletes them. If you want to view or update your file retention setting, see the help topic [Configuring Mobile App Settings](#).

Print or audit logs in your mobile device or NetSuite user interface display the list of files for reprinting. You can access the reprint link in these logs until the printable files get deleted from your file cabinet. You can also view printing errors from these logs.

Reprinting from Your Mobile Device

Follow the steps in this procedure to reprint existing labels or reports from your mobile device.

To reprint labels and reports from your mobile device:

1. From the Main Menu, tap **Print Log**.
2. On the Print Log page, in the **Scan/Enter Print Reference** field, scan or enter the transaction number, the item, lot, or serial number. If you enter the data, press **Enter** to proceed.
For item bar code scanning, composite and GS1 bar code formats are not supported
3. On the Print Log page, tap the date link for the document you want to reprint.
4. On the Print Record page, enter or select values in any of the following fields:
 - **Printer Group** – If you set up printer groups, select the one in which the printer belongs to.
List options in the Printer field appear based on the printer type from the print report and the printer group of your choice. For more information, see [Creating Printer Groups](#).
 - **Printer** – Select the name of the printer or without PrintNode integration, select **Print to File**.
If you do not find the printer you want to use, you can verify that it is set up correctly. See [Setting Up Your Printers](#) or [Setting Up Print to File](#).
 - **Number of Copies** – Enter a number greater than 0 for the copies you want to reprint.
 - **Page** – Enter the page number or a range of pages from the document you want to print. You can include a comma (,) or dash (-) symbol to specify multiple pages.



Note: This field appears for print reports that you set up with selective page printing. See [Setting Up Printing Settings on Print Reports](#).

Refer to the following examples of valid entries:

- **1** – prints page 1
 - **3,10** – prints pages 3 and 10
 - **4-8** – prints pages 4 up to 8
 - **4-** – prints page 4 up to the last page
 - **-5** – prints from the first page up to page 5
 - **4, 8-** – prints page 4, then page 8 up to the last page
5. Tap **Reprint**.
If you encounter reprinting issues, see [Troubleshooting Mobile Printing](#).

Your reprint request is sent to the printer.

Reprinting from the NetSuite User Interface

Follow the steps in this procedure to reprint existing labels or reports within the NetSuite user interface.

To reprint labels and reports from the NetSuite user interface:

1. Using the Mobile Administrator role, go to Setup > Label Printing > Audits.
2. From the Print - Audits List, click the reprint URL link for the document you want to reprint.
The Print - Reprint page appears.
3. (Optional) In the Reprint Details section, you can change the values in any of the following printing fields:
 - **Printer Group** – If you set up printer groups, select the one in which the printer belongs to.
List options in the Printer field appear based on the printer type from the print report and the printer group of your choice. For more information, see [Creating Printer Groups](#).
 - **Printer** – Select the name of the printer or without PrintNode integration, select **Print to File**.
If you do not find the printer you want to use, you can verify that it is set up correctly. See [Setting Up Your Printers](#) or [Setting Up Print to File](#).
 - **Copies** – Enter a number greater than 0 for copies you want to reprint.
 - **Page** – Enter the page number or a range of pages from the document you want to print. You can include a comma (,) or dash (-) symbol to specify multiple pages.

 **Note:** This field appears for print reports that you set up with selective page printing. See [Setting Up Printing Settings on Print Reports](#).

Refer to the following examples of valid entries:

- **1** – prints page 1
 - **3,10** – prints pages 3 and 10
 - **4-8** – prints pages 4 up to 8
 - **4-** – prints page 4 up to the last page
 - **-5** – prints from the first page up to page 5
 - **4, 8-** – prints page 4, then page 8 up to the last page
 - **Description** – Enter a short description of this reprint request for the audit logs.
4. Click **Reprint**.
If you encounter reprinting issues, see [Troubleshooting Mobile Printing](#).

Filtering Table Data Through Search Tags

In the **Search** box of a Data Table element, keywords that you enter can be saved and used until you clear the browser cache. For up to three columns of a table, you can assign up to five search tags each. Adding tags to multiple columns narrows down your filtering criteria.

For example, you want to search for specific items using the following keywords for each column:

- Item column – **Item M** and **Item N**
- Inventory Status column – **Damaged**

With these keywords as search tags, the Data Table displays only rows for Item M and Item N that have a Damaged inventory status. It does not display all rows for Item M regardless of status, or all rows of items with Damaged status.

To apply search tags to a Data Table element, tap the search **Q** icon above the Data Table element to display the Search box and filter icon. You may do one of the following:

- To add a tag per column, tap the filter **▼** icon and then from the dropdown field, select a column. In the **Search** box, enter your keyword or scan a bar code, and then press **Enter** to save it.
- To apply a search tag for all columns, tap the filter **▼** icon and then from the dropdown field, select **All columns**. In the **Search** box, enter your keyword or scan a bar code, and then press **Enter** to save it.
- If you set up colors to highlight table rows, the same dropdown field includes the **Colors** option. When you select it, you can apply a filter that displays only rows of a certain color. For more information, see [Grouping or Filtering Table Rows Based on Colors](#) or [Setting Up Table Row Colors](#).

To remove all the tags per column, you can select X the icon. To remove all tags from the mobile device, clear the cache. Note that this action applies to all users on the same mobile device.

Grouping or Filtering Table Rows Based on Colors

If you use colors to highlight table rows, you can group together rows that have the same color. On a Data Table element, you can tap the table icon to display the table configuration popup window. Then, you can tap the **Group By Color** toggle to display select a color.

On a Data Table element, you can also apply the color filter to view only rows of a certain color. You can tap the search icon to display the search box and filter selector. From the filter selector, tap **Colors** and then tap the box next to the color you want to select. Tap **Done** to apply your color filter.

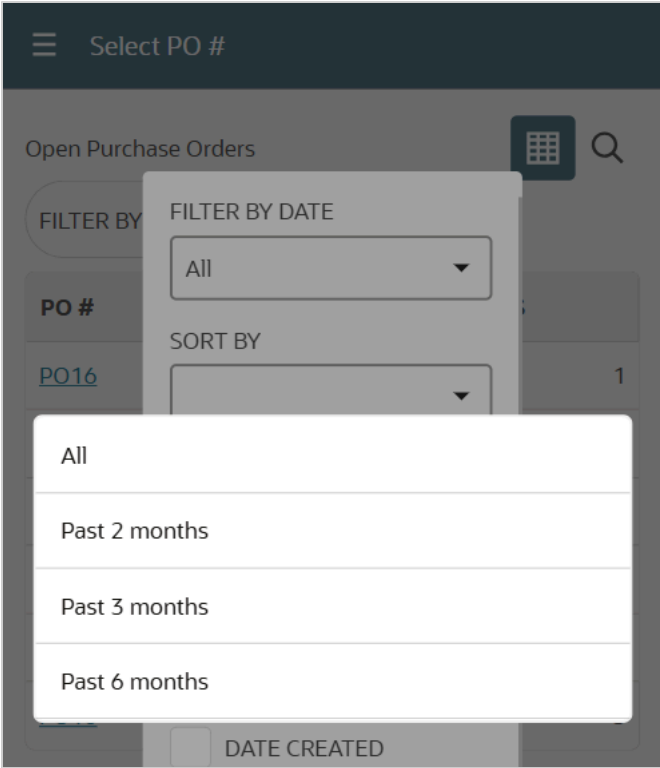
Beside the table icon, you can tap the info icon to view the descriptions that you set up for one or more colors.

To set up colors for Data Table rows, see [Setting Up Table Row Colors](#).

Filtering Table Data by Date

For the NetSuite WMS app only, you can activate the **Add Date Filtering** rule for Data Table elements that display transactions. On the app, the **Filter By Date** field appears on the Table Configuration popup window. Based on your rule configuration, you can select from this field the filter that you want to apply to the table data. It includes the an **All** option that displays all relevant transactions. For more information about the rule, see the help topic [System Rules for NetSuite WMS](#).

The following image shows the **Filter By Date** field for the Open Purchase Orders table within the PO Receiving process. The filtering options configured on the system rule include **Past 2 months**, **Past 3 months**, and **Past 6 months**.



Applying the **Past 2 months** filter displays only open purchase orders dated up to 2 months prior to the current date. Even when you log out of the mobile app, the date filter for a table persists unless you clear the browser's cache.

For mobile pages that include both an entry or scan field and a table for selection, transactions that you can enter or scan in the field may depend on the date filter. If a scanned transaction couldn't be found from the table, you can try choosing another date filter or the **All** option.

The following image shows the applied filter above the table header:

A screenshot of a mobile application interface. At the top, there is a dark blue header with a hamburger menu icon and the text 'Select PO #'. Below this, the main area is titled 'Open Purchase Orders' and contains a search icon and a 'FILTER BY' button. A dropdown menu is open, showing 'FILTER BY DATE' with a list of options: 'All', 'Past 2 months', 'Past 3 months', and 'Past 6 months'. Below the dropdown, there is a 'SORT BY' section and a 'DATE CREATED' label.

Open Purchase Orders		
FILTER BY DATE: <u>Past 2 months</u>		
PO #	VENDOR	LINES
PO16	AL	1
PO15	AL	1

Capturing and Attaching Files Through the App

If you set up the Image Capture Icon or File Upload Icon for a mobile process, you can access the icon on the associated mobile page. To capture or upload a file, you can tap the icon to open the camera or file browser, respectively. After you capture an image or upload a file, you can view the file ID and filename, which appears as a hyperlink. If you want to retake an image or delete a file, you can tap the delete icon next to it. After you complete the mobile process, the app saves it to your file cabinet, within the Images folder. From this folder, you can access the subfolder for the specific SCM Mobile app to view the captured or uploaded files. For more information about these icons, see [Setting Up Image Capture or File Upload](#).

Images and documents that you capture and upload cannot be more than 10 MB so that they could be saved in your file cabinet. The app automatically compresses images that exceed 10 MB by reducing the width to 600 pixels, maintaining the aspect ratio.

The app supports the following file formats only:

Image formats	Document formats	Other formats
BMPIMAGE	CSV	APPCACHE
GIFIMAGE	EXCEL	AUTOCAD
ICON	FREEMARKER	JSON
JPGIMAGE	PDF	MSPROJECT
PJPGIMAGE	PLAINTEXT	VISIO
PNGIMAGE	POWERPOINT	XMLDOC
SVG	RTF	XSD
TIFFIMAGE	WORD	

Your icon might be set up to attach images or files to NetSuite transactions not directly or immediately updated through the associated mobile process. An example would be mobile processes that may not directly or immediately update item fulfillments in NetSuite.

SCM Mobile provides a scheduled script to update the target NetSuite transaction separately from the mobile process. You can run this script after you capture or upload the file and complete the mobile process. Prior to running the script, also make sure that the target transaction has been created or is already existing.

If you want to define your own deployment to update multiple transactions based on a schedule, see [Creating Deployments for Target Transactions](#).

Complete the following procedure to attach files through the scheduled script.

To attach captured or uploaded files from mobile devices:

1. Using the Administrator role, go to Setup > Custom > Attach Mobile App File.
2. On the Attach Mobile App File page, in the **Target Transaction Type** field, select the type of transaction you want to update with the file attachments.
3. Click **Attach**.
Depending on the quantity of files, it may take a few moments to completely attach them all to the transactions.
4. To view the status of a job, within in the Processing banner, click the **here** link.

5. To view the image or document attachments, you can open the target transactions and go to the **Mobile App Attachments** subtab.

To view the file attachment records and statuses, open the Mobile - App Attachment list by going to Customization > Lists, Records & Fields > Record Types. For each reference transaction in the list, you can view the target transactions, including the processing and attachment statuses. A record without a target transaction ID means that the target transaction has not been created yet. In case of issues with attachments, you can also view the failure reason.

Creating Deployments for Target Transactions

Instead of running the script for one transaction at a time, you can create a deployment to attach files to multiple transactions. You can create separate deployments for transactions associated with the same mobile process. You can also group together transactions based on the frequency of uploads, volume, or file sizes. You can set the deployment schedule to attach files during certain periods. For more information about image capture or file upload through the app, see [Setting Up Image Capture or File Upload](#).

On deployment records, choose the ID of target transactions that you set up in one or more Capture Image or Upload File icons. You can choose custom records that you set up within a mobile process as the target. To view the supported target transactions, see [Supported Standard Target Transactions](#).

Instead of defining your own deployment, if you want to update target transactions one at a time, see [Capturing and Attaching Files Through the App](#).

To create deployments for target transactions:

1. Using the Administrator role, go to Setup > Custom > Attach Mobile App File.
2. On the Attach Mobile App File page, click **Attach in New Deployment**.
3. On the Script Deployment page, do the following:
 - a. Set the basic deployment fields to suit your business requirements.
 - b. Make sure that the **Script** field shows the name of the standard script, **Mobile - Update Pending Transactions**.
 - c. On the **Schedule** subtab, specify the frequency and dates in the appropriate fields.

For detailed instructions, see the help topic [Deploying a Script by using the Script Deployment Record](#).

4. On the **Parameters** subtab, in the **Transaction Type** field, enter the IDs of the target transactions, separated by a comma.
5. Click **Save**.

If you want to create another deployment, click **Actions**, and then select **Make Copy**.

The Attach Mobile App File page provides the **View Deployments** option, which gives you access to the list of existing deployments.

SCM Mobile App Customization

Mobile customization enables you to create your copy of a standard process and modify it according to your business requirements. Aside from page elements, which you can modify through mobile configuration, it lets you modify more components, including processes, event actions, information screen elements, and source data. On your copy of a mobile process, you can also add or remove pages and page elements, like buttons and fields.

Watch an overview of mobile customization and configuration:

 [SCM Mobile Basics: Configuration vs Customization](#)

As you begin your customization, you can address the following questions to identify the components and how you want to customize them:

 **Note:** Mobile customization does not support creation of custom mobile apps. For more information, see [Mobile Customization Guidelines and Limitations](#).

- Which mobile process, page, or page element do you want to customize?

Identify the existing mobile process you want to update or modify.

- If you want to modify a page or element, identify the process that contains it.
- When you add a page or element, choose the process in which you want to set it up.

On the mobile app, you can view the processes and pages that you can customize. To view the common pages and components, see [SCM Mobile App Basics](#).

- What customizations do you want to perform?

Within your custom mobile process, you can perform the following customizations:

- **Mobile processes** – Define process settings, such as the name and first page of your custom process. Choose the roles that can access the process. See [Customizing Mobile Processes](#).
- **Mobile pages** – Define page settings, such as the title and load events. Add or modify process or independent types of pages. See the following topics:
 - [Customizing Mobile Pages](#)
 - [Customizing Information Screen Elements](#)
 - [Customizing Mobile Popup Windows](#)
- **Mobile page elements** – Add fields, buttons, tables, and other elements. Set up mobile actions for tasks associated with page elements, such as loading of data or data submission. See the following topics:
 - [Customizing Mobile Page Elements](#)
 - [Customizing Mobile Table Elements](#)
 - [Customizing Mobile Actions](#)
 - [Setting Up Custom RESTlets](#)
 - [Adding Parameters to Mobile Actions](#)

If you enable Mobile Printing, you can customize templates, printing settings, and the print action. See the following topics:

- [Creating Custom Print Templates and Files](#)
- [Setting Up Printing Settings on Print Reports](#)
- [Mobile Printing Customization](#)

Example 1. Example

On your custom item receipt form, you add a custom field for country of origin. You want this field to be populated during purchase order receiving. On your mobile device, when you enter the quantity to receive, you also want to capture the country of origin.

For this scenario, customization involves adding a field to a page of your custom mobile process. It also includes customizing field and button elements to capture and save the data. To view the instructions for this sample scenario, see [Setting Up Additional Fields Through Mobile Customization](#).

Mobile Customization Guidelines and Limitations

SCM Mobile creates a configuration file that includes details about configurations or customizations for each mobile app that you update. The file is generated and stored in your file cabinet when you update the app.

Configuration files have a file size limit of 10MB, following the limitation for files that can be created in the file cabinet. If this limit is exceeded, you may encounter errors or the app update fails. Custom mobile processes not included in the file cannot be accessed on the app. For more information about updating apps, see [Compiling Mobile Customizations](#).

Here are some guidelines and options for maintaining these files:

- Configuration files can't be used for any custom mobile apps, which SCM Mobile doesn't support whether through mobile customization or configuration. For information about standard mobile apps supported by SCM Mobile, see [SCM Mobile Setup](#).
- Inactivate or delete custom mobile processes that you do not use. These are removed from configuration files.
For instructions, see [Customizing Mobile Processes](#).
- If you only want to change the settings of existing page elements in standard processes, you can make the changes through mobile configuration. See [Configuring Mobile Page Elements](#).
- You can disable the **Include Null Values in Configuration Files** setting to exclude empty and null field values from configuration files. This setting applies to all mobile apps on your account
For instructions, see [Configuring SCM Mobile App Settings](#).

You can export and import custom or standard mobile processes to migrate or test them on different accounts. See the following topics:

- [Exporting Mobile Processes](#)
- [Importing Mobile Processes](#)
- [Restoring Mobile Processes with Imported Updates](#)

For limitations on additional page elements, see [Setting Up Additional Fields Through Mobile Customization](#).

Customizing Mobile Processes

You can clone a standard mobile process to create your custom process and customize it according to your business requirements. Within your custom mobile process, you can add pages or page elements, set up the actions of a button, and perform other such customizations.

When you clone a mobile process, you create a duplicate version of its standard pages. If you modify a standard process through Mobile Configuration, your configurations do not carry over to the resulting custom process.

The pages of your custom process contain the same elements that appear on the standard process. By default, the same names are assigned to the custom processes and pages followed by an autogenerated sequence number.

For example, if you create a third clone of the purchase order receiving process, the following default names are assigned:

- Custom process – NSWMS_PORceiving_3
- Page name (Enter Bin page) – poReceiving_enterBin_3

To customize mobile processes:

1. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
2. On the Mobile - Applications List page, click **View** next to the mobile app that contains the process you want to customize.

The Mobile - Process List page appears.

3. Clone the standard mobile process that you want to customize by doing the following:
 - a. Next to the process you want to clone, click **Clone**.
 - b. On the Clone Process page, click **Clone**.

It may take a few minutes to completely clone the process.

Your custom mobile process appears on the Mobile - Process List page. To return to this page, repeat from step 1.

4. On the Mobile - Process List page, click **Edit** next to your custom process.

The Mobile - Process page appears.

5. In the following fields, you can customize the default settings for the process:

- **Name** – Enter the name of the process that you want to appear on a mobile device.
- **Parent Application** – For new processes, select the mobile app to which you want to associate this process.



Note: You should not change the standard mobile app associated with existing processes. It might break the process flows and cause errors.

You can't select or set up any custom mobile apps in this field. For information about standard mobile apps supported by SCM Mobile, see [SCM Mobile Setup](#).

Also, make sure you select the same mobile app for a process and all of its pages.

- **First Page** – Select the custom mobile page that you want to assign as the first page for this process.

Alternatively, to create a new first page, click the plus icon beside the field. See step 6.

- **Accessible Roles** – (Optional) Select the roles to which you want to provide access to this process.

If you do not select a role, the custom process becomes accessible to all available roles. Make sure you select an appropriate role for the mobile app. To view the list of roles, see the following topics:

- NetSuite WMS app roles – [Warehouse Management Roles and Permissions](#)
- NetSuite Ship Central app roles – [NetSuite Ship Central Roles and Permissions](#)
- Manufacturing Mobile app roles – [Manufacturing Mobile for Administrators](#)

6. On the **Pages** subtab, you can view, customize, or add pages within the mobile process. For instructions, you can proceed to step 2 of the procedure under [Customizing Mobile Pages](#).
7. After you complete your mobile process customizations, click **Save**.
8. If you want to remove access to the standard mobile process and show only your custom process, you can hide the icon of the standard one from the menu. For instructions, see [Configuring Menu Icons on Independent Mobile Pages](#).

On your mobile device, you can access your custom process on the same menu page that displays the standard process.

9. After you complete all your mobile customizations, update the app, See [Compiling Mobile Customizations](#).

Customizing Mobile Pages

Within your custom mobile process, you can customize the pages cloned from a standard process or add your own pages. You can change the default settings of existing pages or set them up for new pages. After you add or modify a page, you can customize the page elements and information screen elements associated with it.

The Mobile - Page page provides access to page elements and information screen elements associated with it. You can view, add, or change these elements as part of your mobile customization.

To customize mobile pages:

1. Access your custom mobile process:
 - a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile - Applications List page, click **View** next to the mobile app.
 - c. On the Mobile - Process List page, click **View** next to the custom mobile process that contains the page.
2. On the Mobile - Process page, on the **Pages** subtab, do one of the following:
 - To add a new page, click **New Mobile - Page**.
 - To modify an existing mobile page, click **Edit** next to the page name.

The Mobile - Page page appears.
3. In the following fields, you can change or enter the settings for your page:
 - **Name** – Enter a unique name for the mobile page.
 - **Title** – Enter the title that appears on a mobile device.
 - **Application** – For new pages, select the mobile app to which you want to associate this process.



Note: Make sure you select the same standard mobile app for a process and all of its pages.

You should not change the standard mobile app associated with existing pages. It might break the process flows that use the page and cause errors.

You can't select or set up any custom mobile apps in this field. For information about standard mobile apps supported by SCM Mobile, see [SCM Mobile Setup](#).

4. In the **Type** field, select one of the following types of mobile pages:

- **Process** – A page that belongs to a mobile process. You can access this page within the mobile process only.
To create a process page type, in the **Parent Process** field, select the mobile process to which you want to associate the page.
When you define your custom process settings, you can set this page as the first page for the process. For instructions, see [Customizing Mobile Processes](#).
 - **Independent** – A page that you do not assign to a mobile process, such as a menu page. You can access this page through other independent pages or within a mobile process.
Independent pages are not duplicated when you clone a mobile process.
5. In the **On Load Action** or **After Load Action** field, to set up mobile actions for page loads, see [Customizing Mobile Actions](#).
 6. If you want to set up a mobile page as a popup window, see [Customizing Mobile Popup Windows](#).
 7. On the **Page Elements** subtab, you can add or modify page elements like buttons, text box fields, and tables.
For more information, see [Customizing Mobile Page Elements](#).
For existing page elements, you can set up mobile actions for page navigation, data validation, and submission.
 8. On the **Information Screen Elements** subtab, you can add or modify elements that appear on information screens.
For more information, see [Customizing Information Screen Elements](#).
 9. Click **Save**.
To add or edit other pages, repeat steps 2 to 6.
 10. After you complete all your customizations, to apply your updates to the mobile app, see [Compiling Mobile Customizations](#).

Customizing Mobile Page Elements

Page elements enable you to display messages, enter data, or show data in table format. You can add elements to a page, information screen, or popup window. You can choose a page within a mobile process or an independent one, like a menu page.

For new and existing elements, you can apply the same basic settings available in mobile configuration. These settings include the label, layout, and visibility condition. In addition to these basic settings, you can set up actions and source records through mobile customization. The settings vary depending on the following types of page elements:

- **Field element types** – Date, Drop Down, Dynamic Text, Text Area, Text Box, UOM
- **Table element types** – Data Table, Search Grid, Transfer Table
- **Button element types** – Action Button, Back Button, Icon

To customize mobile page elements:

1. Access your custom mobile process:
 - a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile - Applications List page, click **View** next to the mobile app.
 - c. On the Mobile - Process List page, click **View** next to the custom mobile process that contains the page.

2. On the Mobile - Process page, on the **Pages** subtab, click the name of the mobile page on which you want to add an element or that contains the existing element you want to customize.
3. On the Mobile - Page page, on the **Page Elements** subtab, do one of the following:
 - To edit an existing element, click **Edit** next to the element name.
 - To add an element, click **New Mobile - Page Element**.

The Mobile - Page Element page appears.

4. In the following fields, you can change or assign the page element settings:
 - **Name** – Enter a unique name for the page element.
 - **Parent Page** – Select the custom mobile page to which you want to associate this element.
 - **Label** – Select an existing label or, to create a label, click the plus icon beside the field.
 - **Type** – Select the page element type.
5. Depending on your mobile requirements, you can customize additional settings based on the element type. For guidelines and instructions, see the following topics:
 - [Page Element Visibility and Loading](#)
 - [Arranging Page Elements](#)
 - [Data Sourcing for Drop Down Elements](#)
 - [Data Capturing and Storage for Page Elements](#)
 - [Assigning Default Values to Field Elements](#)
 - [Setting Up Additional Fields Through Mobile Customization](#)
 - [Time Settings for Date Fields](#)
 - [Displaying Messages in Dynamic Text Elements](#)
 - [Setting Up Image Capture or File Upload](#)
 - [Setting Up Autoclick for Buttons](#)
 - [Customizing Mobile Table Elements](#)
 - [Adding Columns to Table Elements](#)

Other optional settings enable you to set up date restrictions and disabled fields. To view the list of settings for each element type, see [Configuring Mobile Page Elements](#).

To set up mobile actions for button elements, see [Customizing Mobile Actions](#).

6. If you clone a standard table, you can check the **Override Standard Element** box to override selection from it.

Even if you tap a row on both the standard table and your copy, the app follows your selection from the copy. Along with this setting, you can hide the standard table from the mobile page. For more information, see [Configuring Mobile Table Elements](#).
7. Click **Save**.

To add more elements to the page, repeat from step 3.
8. After you complete your mobile process customizations, make sure you update the app. See [Compiling Mobile Customizations](#).

Page Element Visibility and Loading

By default, all page elements appear on a mobile page during the initial load. You can hide an element or apply a condition that controls how it appears on a mobile page. For field and table elements, you can also add a mobile action for loading.

On the Mobile - Page Element page, you can set up loading and visibility in the following fields:

- **Visibility Condition** – Enter one of the following settings for the page element's visibility:
 - **True** – To display the element on the mobile page, enter this value or leave the field blank
 - **False** – To hide the element, enter this value

Alternatively, you can enter an expression that evaluates to true or false and determines when the field should appear on a page. You can include a state path to the data you want to evaluate as true or false, as in the following example:

```
{{features:inventorystatus}} === 'T' && {{state:dataRecord:scriptParams:itemType}}!=  
"noninventoryitem")
```

With this condition, the element should appear only when you use the Inventory Status feature and the item is not a non-inventory type. It uses state data to determine the type of item selected on the app. For more information about state data, see [Working with Mobile States as Data Source](#).

- **Include Hidden Element in Load Events** – If the page element is hidden and you want to include it in page load events, check this box.

To reduce load time, NetSuite doesn't include hidden elements during a page load, by default.

To show dynamic text elements using toggles, see [Displaying Dynamic Text Through Toggles](#).

To hide icons from independent menu pages, see [Configuring Menu Icons on Independent Mobile Pages](#).

Disabling Page Elements

For button and some field elements, you can set the following fields to disable them on mobile pages:

- **Disable Field Condition** – You can disable a button, field, or an entire UOM page element.
- **Disable Condition for Quantity Only** – For UOM page elements, you can disable the quantity subfield only.
- **Disable Condition for Unit Only** – For UOM page elements, you can disable the unit subfield only.

In these condition fields, you can enter a **true** or **false** value. To set up a dynamic value, you can enter a condition or expression that evaluates to true or false. For more information about dynamic settings, see [Accessing Data Stored in the State](#) or [Displaying Messages in Dynamic Text Elements](#).

Disabled subfields can be automatically populated through bar codes that you scan or settings from the NetSuite UI. If you disable the quantity only, changing the unit on the app automatically converts the quantity value. It doesn't change the unit on the associated order transaction.

If you disable the UOM page element and it evaluates to false, its subfields remain enabled regardless of their individual settings.

Arranging Page Elements

You can arrange the elements on a mobile page, including those that appear based on a visibility condition. When you customize layout and position, consider the types and number of elements you want to show on a page.

A mobile page automatically displays a vertical scroll bar, depending on the screen size of your mobile device. It displays a horizontal scroll bar for table elements and grids to show more columns. A page also adjusts automatically to accommodate elements that appear based on a condition.

To arrange page elements on a mobile page, on the Mobile - Page Element page, you can set values in the following fields:

- **Layout** – For Action Button, Icon, Text Area, and Dynamic Text element types, select either of the following layout options.

- **Inline** – Arranges elements horizontally on a page.

- **Block** – Arranges elements vertically on a page.

Other element types follow the block layout and cannot be modified.

Icon element types occupy half the space of a line in an inline layout, even if you add only one icon. A line can display a maximum of two icons.

UOM element types include a set of two subfields that appear side by side in the same line: a quantity field and a dropdown list of units.

- **Display Order** – Enter the number that indicates the page element's position on a mobile page.

In an inline layout, page elements are arranged from left to right, starting with the lowest display order number.

- **Content Area** – For Action Button and Back Button element types, select either **Body** or **Footer**.

Other element types appear in the body of mobile pages.

The following image of the standard Enter Item page shows how elements appear based on the settings provided in the accompanying table.

The screenshot shows the 'Enter Item' mobile page. It features a dark blue header with a hamburger menu icon, the title 'Enter Item', and an information icon. Below the header is a text input field labeled 'SCAN/ENTER ITEM' with a callout '1'. To the right of the input field are a grid icon and a search icon, with a callout '2' pointing to the grid icon. Below these is a table with three columns: 'ITEM', 'RECEIVED', and 'REMAINING'. The first row of the table contains a link 'Item 1', the value '0', and the text '10 EACH'. Below the table is a toggle switch labeled 'Show Completed' with a callout '3'. At the bottom of the page is a dark blue footer bar containing a back button with a left arrow and a callout '4', and a large 'Enter Item' button with a callout '5'.

ITEM	RECEIVED	REMAINING
Item 1	0	10 EACH

Callout Number	Page Element Settings and Values
1	Element type: Text Box Display order: 1
2	Element type: Data Table Display order: 2
3	Element type: Data Table Toggle State: Hide Display order: 3
4	Element type: Back Button Content area: Footer Display order: 4
5	Element type: Action Button Content area: Footer Layout: Inline Display order: 5

Changing Button Sizes

You can change the size of an Action Button element that does not appear at the footer of a mobile page. The label of a button adjusts accordingly to its size.

In the **Button Size** field, the default size is the blank option. You can select one of the following options to increase the button size:

- **Medium** – increases the default size by 200%
- **Large** – increases the default size by 300%

When increasing the size of a button, consider its layout, whether Inline or Block. If it appears in the same line as other buttons in an Inline layout, the other ones might move to the next line. For more information about layouts, see [Arranging Page Elements](#).

Data Sourcing for Drop Down Elements

Drop Down element types can obtain data from saved searches or multiple sources, like records and sublists. From either of these data sources, you can choose the column that contains the values for selection in the dropdown list.

On the Mobile - Page Element page, you can map the element with the column from your data source using the following fields:

1. **Input ID** – Enter the internal ID of the column that uniquely identifies the values you want to show in the dropdown list.

Example: **internalid** – The internal ID of the column that contains the internal ID of each inventory status record.



Tip: If you want to set up a static dropdown list, you can enter an array of values in the Input ID and Input Value fields. Then, leave the On Load Action and Response Key fields blank.

For example, to display a list of statuses, enter the following array in both fields: **[“Good”, “Damaged”, “Undefined”]**.

2. **Input Value** – Enter the internal ID of the column that contains the values you want to show in the dropdown list.
Example: **name** – internal ID of the column that contains the inventory statuses
3. **On Load Action** – Select or create the mobile action that fetches data from the specified columns during the initial page element load.

Alternatively, to create an action, click the plus icon beside the field.

To match your data source, select or create an action that has the appropriate type. If your data source is a saved search, select a Saved Search type of action. Otherwise, select a Restlet type of action. Then, you can set up the saved search or the RESTlet script that references the data source.

If you create your custom RESTlet script, you can also add functionality that assigns a default value for the Drop Down element. For more information, see [Assigning Default Values to Field Elements](#).

4. **Response Key** – Based on your On Load Action setting, do one of the following:
 - If you specified a Saved Search action, enter **data**.
 - If you specified a Restlet action, enter the key that contains the RESTlet’s response. This key must contain the values you want to appear in the dropdown list.

For example, you can enter **status**, the key in the state that contains inventory statuses.

Assigning Default Values to Field Elements

For Date, Drop Down, Text Box, and UOM element types, you can set up static or dynamic default values. On the Mobile - Page Element page, you can set up default values through either of the following fields:

- **Default Value** – For a static value, you can enter the text that you want to assign as the default value for the element. For a dynamic value, you can enter a state path to the key that contains the text.

Example: `state:dataRecord:scriptParams:itemfrmBarcode:barcodeSerialname`

This example, taken from the Scan/Enter Serial Number field, retrieves the value stored in the `barcodeSerialname` key from the state.

For more information about state paths, see [Accessing Data Stored in the State](#).

For Text Box element types, you can enter if-else statements to set up a conditional expression that determines the default value. The expression must not exceed 300 characters.

- **On Load Action** – You can set up a custom RESTlet that provides the default value for the element during a page load.

For more information about mobile actions, see [Customizing Mobile Actions](#).

If you set up a default value for a Text Box element, you can also check the **Automatically Submit Default Value** box. For a standard mobile process, after the field is populated with a default value, NetSuite automatically submits the page. If the field is on the last entry page within the process, it submits data captured from the current and previous pages.

For example, you only have one staging bin location in your warehouse. You assign it as the default staging bin for the mobile picking process. On your mobile device, while the staging bin entry page loads, the bin field is populated with this default value. Without requiring any action from your end, NetSuite automatically submits the page and displays the confirmation page.

 **Note:** Through Mobile Configuration, you can set up automatic default value submission for Text Box elements in a standard mobile process. See [Configuring Mobile Page Elements](#).

Validations applied to a mobile page, its fields, or both, may affect automatic submission. NetSuite cannot perform a submit action when a page or field validation error occurs.

If you enable automatic submission for custom mobile processes, NetSuite automatically calls the mobile action for the primary button on the page. To set up a primary button, you can check the **Is Primary** box for the Action Button element. For its On Click Action, you can set up your own Restlet type of mobile action that performs the automatic submission. Make sure you customize an Action Button element that appears on the same page as the Text Box element. For more information about Action Button settings, see [Configuring Mobile Page Elements](#).

To set up mobile actions, see [Customizing Mobile Actions](#).

Note that the Automatically Submit Default Value box becomes hidden if you set up a mobile action for the After Load Action. This setting does not override the After Load Action, which you can set up on the same mobile page.

For more information, see [Mobile Actions for Page Element Events](#).

Data Capturing and Storage for Page Elements

You can store the data captured through field or table elements on a mobile page. The stored data are shared across the pages within a mobile process. You can also save them in NetSuite records.

In the standard process flows, the data from each page are stored in the state by default. If you add fields to your custom pages, you can also store their values in the state. At the end of the process flow, the stored data for NetSuite records are saved accordingly.

To set up data capturing and storage, map the page element to a field from a NetSuite record or sublist. If you want to store the data temporarily, you can map it to a NetSuite record or state object. Depending on the element type, on the Mobile - Page Element page, you can set the following fields:

1. **Record Name** - Enter the internal ID of the NetSuite record that contains the field you want to map to this page element

Example: **employee** – internal ID of the employee record

Alternatively, you can temporarily store data in the following ways:

- To store data used across the pages of a mobile process, but not saved in a NetSuite record, enter **aux**. This setting pertains to the auxParams state object that stores temporary data. When you reach the end of the process flow, any stored data gets deleted from the state.
- To store data used in a NetSuite record, but not saved, enter the record name only.
For example, the item receipt record does not contain a field for the purchase order ID, but this detail is required to create item receipts. You can temporarily store purchase order IDs during the purchase order receiving process to automatically generate item receipts.

For both cases, leave the Sublist Name and Field Name fields blank.

2. **Sublist Name** – For field element types, except Dynamic Text, you can save data in a field that belongs to a sublist of the NetSuite record. Enter the internal ID of the sublist.

 **Tip:** Leave this field blank if you want to save data in a transaction body field, which does not belong to sublists.

Example: **emergencycontact** – internal ID of the emergency contact sublist in the employee record.

3. **Field Name** – For field element types, except Dynamic Text, enter the internal ID of a standard or custom NetSuite field that belongs to the record or sublist.

Example: **firstname** – internal ID of the First Name field in the emergency contact sublist



Note: The data captured from the page element is saved in this NetSuite field.

4. **Regular Expression** – (Optional) For Text Box and UOM element types, you can enter an expression that validates the data you want to capture for the NetSuite record or sublist field you enter in the Field Name field.

Example: **^[0-9]*\$** – This expression indicates that only numbers are accepted in the NetSuite field, so the same restriction should be applied to the page element.

If you want to set up complex validations, you can set up a mobile action for the On Validate Action instead.

After you fill out these fields, you can add buttons that call the appropriate action to store data into the state or save them in NetSuite records. Standard pages in the middle of process flows contain a button for pushing data into the state. Those at the end of process flows contain a button for saving data in NetSuite records.

To view the instructions for a sample customization scenario, see [Setting Up Additional Fields Through Mobile Customization](#).

Setting Up Additional Fields Through Mobile Customization

NetSuite WMS enables you to customize mobile pages to save data to NetSuite transactions. When you add a field to a mobile page, you can save and display its value on a NetSuite transaction.

For example, you want to save an item's country of origin to an item receipt when you receive an order through the app. You can add a country of origin field to the item receipt form and to a mobile page of the PO receiving mobile process. On the app, you can select or enter the country of origin when you receive an item. The app saves country of origin to the corresponding field on the item receipt.

Limitations

The following limitations apply to the types of data and fields you can set up on custom mobile pages:

- You can only add text and dropdown fields.
- You cannot add custom fields as required fields on transactions.
- You cannot update data on sublist fields, but you can add a new entry to a sublist.
- You can save data to transactions only.
- You cannot save data to records, like item or bin records.

Prerequisites

The instructions in this topic use the country of origin example for setting up an additional field. To add a field to a mobile page, clone the standard mobile process first. On your custom mobile process, you can set up the text or dropdown field.

In this sample customization, the standard PO Receiving mobile process is cloned to create a custom PO Receiving process. For instructions on cloning a process, see [Customizing Mobile Processes](#).

The following optional prerequisites depend on your business requirements:

- If you want to save your data to a custom field, first make sure that you set it up on a NetSuite transaction. Create a custom transaction body field, and then apply it to the transaction. Take note of the ID of the new custom field, which you must set up for the corresponding field on the mobile page. To set up transaction body fields, see the help topic [Creating Custom Transaction Body Fields](#).

In this sample customization, a Country of Origin transaction body field is created and applied to the item receipt transaction. The ID of this custom field is **custbody_countryoforigin**.

- If you want to display dynamic values in the additional field, you can set up its data source. The data source may depend on the type of field that you want to add, such as a dropdown or text box. Data sources for fields on mobile pages can be a saved search, sublist, or body fields of a record. You can create or choose a saved search and use its columns as your data source. If you want to use a record, you can create a RESTlet script that obtains the data from its body fields. To create saved searches, see the help topic [Defining a Saved Search](#).

In this sample customization, the additional field on the mobile page displays the countries in a dropdown list. A saved search is used as the source of these countries. On the mobile page, the country you select from the list is saved to the Country of Origin field on the item receipt.

- SCM Mobile provides the following standard RESTlet for submitting data from additional fields
 - Script ID: customscript_mobile_rl_create_record
 - Deployment ID: customdeploy_mobile_rl_create_record

If you want to set up your own RESTlet, you can create the RESTlet script and script deployment. For information about setting up RESTlets, see the help topic [Deploying a RESTlet](#).

To set up additional fields on custom mobile pages:

1. Access the custom mobile page on which you want to set up the additional field by doing the following:
 - a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile - Applications List, click **View** next to the mobile application.
 - c. On the Mobile - Process List, click **View** next to the custom mobile process.
 - d. On the Mobile - Process page, click the **Pages** subtab, and then click the name of the mobile page.

For this sample customization, the field is set up on the Enter Quantity mobile page named **poReceiving_quantityScan_**.

2. On the Mobile - Page page, click the **Page Elements** subtab, and then click **New Mobile - Page Element**.

A new page element is added to the Enter Quantity mobile page. It captures the data for the Country of Origin field that is displayed on the item receipt transaction.

3. On the Mobile - Page Element page, to set up the new page element, set values in the following fields:

Note: The page element settings in the next steps apply to Drop Down elements. For the list of fields for Text Box elements, see [Configuring Mobile Page Elements](#).

Field	Description	Sample Value
Name	Enter a unique name for the page element.	Following the default page element naming convention: poReceiving_quantityScan_countryOfOrigin
Type	Select the supported page element type: Drop Down or Text Box .	Drop Down

Field	Description	Sample Value
	The other fields that appear on this page depend on the element type that you select.	
Label	Select the field label you want to show on the mobile page. Alternatively, to add a new label, click the new icon.	Country of Origin

4. Depending on the type of page element, to set up the data source for the additional field, do the following:

Field	Description	Sample Value
Input ID	In these fields, set up the data source for the dropdown list, as follows: In the Input ID field, enter the name of the column that contains the unique IDs for each value you want to include in the list. For static values, enter an array of unique identifiers for each value.	Internal ID The Internal ID column of the sample saved search results contains the internal IDs of the countries.
Input Value	In the Input Value field, enter the name of the column that contains the actual values you want to display in the list. For static values, enter the actual values in an array.	Name The Name column of the sample saved search results contains the country names that are displayed in the dropdown list.
On Load Action	For dynamic values, set up the on load action that runs when the dropdown field loads on the mobile page: - In the On Load Action field, click the new icon to add a new mobile action. On the Mobile – Action page, enter the details of the data source. - In the Response Key field, enter data if the on load action is a saved search. For RESTlet on load actions, enter the key that contains its response.	getCountryList On the Mobile – Action page, details of the sample saved search: - Name – getCountryList - Type – Saved Search - Saved Search – Custom Countries Search
Response Key		data

For more information about setting up these fields, see [Data Sourcing for Drop Down Elements](#).

5. To set up the NetSuite transaction to which you want to save the data from the additional field, do the following:

Field	Description	Sample Value
Record Name	Enter the ID of the transaction that contains the field in which you want to save the data.	itemreceipt
Field Name	Enter the ID of the transaction body field in which you want to save the data.	custbody_countryoforigin

For more information about setting up these fields, see [Data Capturing and Storage for Page Elements](#).

6. To set up the RESTlet action that submits and saves data for your additional field, do the following:

Note: In standard mobile processes, the last page of the process flow usually contains a button element that you can click to submit and save data. However, some processes also use table elements that can submit data when you click a row. Also, buttons and tables that submit data to NetSuite records might appear on other pages within the process flow. Depending on your process requirements, you can set up any or all of these page elements to submit data for your additional field.

- a. Access the Mobile - Process page as you did in step 1.
- b. On the **Pages** subtab, click the name of the mobile page that contains the button or table element you want to set up.

For this sample customization, the RESTlet action is set up on the button of the Enter Bin mobile page named poReceiving_enterBin_. This page is last page of the standard PO receiving process.

- c. On the Mobile - Page page, click the **Page Elements** subtab, and then click the name of the button or table element.

In this sample customization, the Enter Bin button element, named poReceiving_enterBin_, contains the mobile action for submitting data to NetSuite records.

- d. On the Mobile - Page Element page, in the **On Click Action** field, click the link for the mobile action.



Tip: For button elements, you can set up the RESTlet in the On Click Action. For table elements, you can set it up in the On Row Click Action.

For this sample customization, the button's On Click Action is named poReceiving_validateBinAndSubmit.

- e. On the Mobile - Action page, click **Edit**.

This On Click Action has the Submit Form type of mobile action. You can also set up a Forward Form type of action to submit data for your additional field. For more information about mobile actions, see [Mobile Actions for Page Validation and Navigation](#).

- f. Beside the **After Action Restlet** field, click the new icon.
- g. On the new Mobile - Action page, enter or select values in the following fields:

Field	Description	Sample Value
Name	Enter a unique name for the Restlet action.	updateAdditionalData
Type	Select Restlet .	
HTTP Method	Select POST .	
Script ID	Enter the ID of the RESTlet script.	customscript_mobile_rl_create_record For your mobile action, you can also use this standard RESTlet script, which submits additional data to NetSuite records.
Deployment ID	Enter the ID of the deployment for the RESTlet script.	customdeploy_mobile_rl_create_record

Field	Description	Sample Value
		For your mobile action, you can also use this standard deployment for the standard RESTlet script.

- h. Click **Save**.

Repeat this step if you want to set up another page element on the same page or a different page within the same mobile process. You can set up the same RESTlet in the After Action Restlet of other mobile actions.

7. After you save your customizations for the pages, page elements, and mobile actions, you must apply the updates to the app. Complete the following steps:
 - a. Go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile - Applications List, click the **Update App** link next to the mobile application.
 - c. To view the status of your update, click the link on the banner message at the top of the page.

Wait for the confirmation message to appear or for the update to complete before you use the app.

Time Settings for Date Fields

For Date page elements within mobile processes, time fields that you add appear beside the field for date entry. They follow your Time Zone general preference and appears in UTC format.

Through Mobile Configuration or Customization of a Date page element, you can check the following boxes for time settings:

- **Show Time Field** – To display the time field, check this box.
For Mobile Configuration, this box appears only if the **Is Preconfigured for Time** box is checked for the Date page element.
- **Make Time Mandatory** – If you check the **Show Time Field** box, you can check this box to require time entry in the time field.

For the following time value settings, you can enter a specific time or a state path for a dynamic value:

- **Default Time** – The value you want to appear in the time field initially and if no value is entered on the app.
- **Earliest Possible Time** – The earliest time that you can enter in the time field.
- **Latest Possible Time** – The latest time that you can enter in the time field.

To specify a static value in any of these fields, enter it in 24-hour (UTC) format, HH:mm. Based on this format, HH ranges from **0** to **23** and mm ranges from **0** to **59**.

To specify a dynamic value, enter a state path to the time key, as in the following default path:
{{state.dataRecord.scriptParams.time}}.

To access these settings on the Mobile – Page Element page for customization, see [Customizing Mobile Page Elements](#). To access them on the Mobile Configuration page, see [To configure mobile page elements](#).

Displaying Messages in Dynamic Text Elements

In standard mobile processes, Dynamic Text elements display packing instructions, warnings, and other additional details. You can set up messages for a Dynamic Text element within a custom mobile process

through Mobile Customization. NetSuite WMS provides the following fields in which you can set up static or dynamic messages: **Message**, **On Load Action**, or **On Click Action**.

For guidelines about using these fields, see the following topics:

- [Setting Up the Message Field](#)
- [Retrieving Messages Through Mobile Actions](#)
- [Displaying Dynamic Text Through Toggles](#)

Setting Up the Message Field

Static or dynamic messages that you set up in the **Message** field display in the Dynamic Text element. You can set up messages in the following ways:

 **Note:** SCM Mobile does not support nested dynamic messages.

- Enter the text or message that you want to appear in the page element.
Example: **Item Packing Instructions**
- To include a data source, enter either or both the path to a field of a record or to a key of a state.
Record Example: **More Order Details:{{record:purchaseorder:{{constant:1}}-memo}}**
State Example: **{{state:dataRecord:scriptParams:packInstAsStr}}**
- To specify a style for your message, enter HTML tags along with your static or dynamic message.
Example 1: **Warning<div> Voiding of return label
{{state:dataRecord:scriptParams:returnlabelId}} cannot be undone. </div>**
Example 2: *** Instructions for
{{state:dataRecord:scriptParams:fetcheditemname}} : {{record:purchaseorder:
{{state:dataRecord:auxParams:selectPOFromList_poListTbl:internalid}},item:line:
{{state:dataRecord:scriptParams:lineno}}-custcol_po_col_item_instruction}} **

Retrieving Messages Through Mobile Actions

In the On Load Action or On Click Action fields, you can assign a RESTlet or Show Message type of mobile action. To set up either of these actions, refer to the following guidelines:

- **RESTlet** type – You can assign a default RESTlet used in the standard On Load Action or On Click Action. You can also create your custom RESTlet and assign its script ID and deployment ID to your mobile action.
- **Show Message** type – This type of mobile action includes a **Message** field for text that you want to appear on a popup window. You can enter a message that displays during an on load or on click action. To set up this field, see [Setting Up the Message Field](#).

Displaying Dynamic Text Through Toggles

You can add a toggle to control when to display the label and message of a Dynamic Text page element on the mobile app. You can hide dynamic text that provide optional data to help improve the page load and show it as needed.

To set up toggles, you can select values in the following fields:

- **Toggle State** – Select one of the following toggle states that you want to set as the default: **Show** or **Hide**.
The appropriate toggle icon for the state appears on the mobile page. If you do not specify a state, the toggle appears in the default Hide state and its icon.
- **Toggle Label** – Select or create a label that shows on the mobile page for the toggle.
The label appears to the right of the toggle icon.

Toggles have a standard icon each for the show or hide action. When you set at least one of these toggle fields, you display the toggle icon on the mobile page.

For Dynamic Text elements, note the following if you set up the message through the On Load Action:

- The app does not load Dynamic Text data if you set the **Toggle State** to **Hide**.
- To implement loading of data for a **Hide** default toggle state, you can check the **Include Hidden Element in Load Events** box.

Setting Up Image Capture or File Upload

On mobile pages, you can add the following icon page elements that provide additional capabilities to a standard or custom mobile process:

- **Capture Image Icon** – Enables you to capture up to 15 images per page through your mobile device and upload it to the file cabinet.

The default image format is in JPEG, which is saved using the following default naming convention: <app name>_<state path>_<timestamp>_<filename>.jpg.

When you add this icon, you can configure the <state path> component of the format to set up a dynamic value. The <filename> component of the format follows the one you set on your mobile device.

Along with an icon image, this page element also displays a list of captured and uploaded image files by default. It opens the camera app of a mobile or tablet device only. If you access the mobile process on a kiosk or desktop device, it opens your file browser or selection window.

- **Upload File Icon** – Enables you to upload up to 15 image or document files per page to the file cabinet.

Along with an icon image, this page element also displays a list of uploaded image and document files by default.

When you add these icons, you automatically include the image or document files during submission as you complete the mobile process flow. You can add only one of each icon on the same mobile page.

Supported Standard Target Transactions

Based on the standard mobile processes available within the SCM Mobile apps, you can set up the following supported transaction types:

Transaction Type	ID
Purchase Order	purchaseorder

Transaction Type	ID
Return Authorization	returnauthorization
Item Receipt	itemreceipt
Sales Order	salesorder
Transfer Order	transferorder
Item Fulfillment	itemfulfillment
Work Order	workorder
Work Order Completion	workordercompletion
Work Order Issue	workorderissue
Assembly Build	assemblybuild
Inventory Count	inventorycount
Inventory Adjustment	inventoryadjustment

- If you create a custom record, you can also set it up to attach images or files.
You can attach files to these NetSuite transactions even if the mobile process does not directly update them. To update them separately, you can run the scheduled script provided by SCM Mobile. For more information, see [Capturing and Attaching Files Through the App](#).
- You cannot attach the files to the following transactions: bin transfer, inbound shipment, wave, and pick task.

On a target transaction, the app displays the **Mobile App Attachments** subtab that contains the list of attachments by default. Alternatively, you can choose the standard or custom field in which you want to display the image or document attachments.

To set up image capture or file upload:

1. Depending on the mobile process, follow the instructions in one of the following topics to add the page element until you reach the Mobile – Page Element page:
 - To add the icon page element to a custom mobile process, see [Customizing Mobile Page Elements](#).
If you want to start from creating a custom mobile process, see [Customizing Mobile Processes](#) or [SCM Mobile App Customization](#).
 - To add the icon page element to a standard mobile process, see [Configuring Mobile Page Elements](#).
2. On the Mobile – Page Element page, do the following:
 - a. In the **Name** field, enter a unique name for the page element.
 - b. In the **Label** field, select the label that you want to appear on the mobile page for this element.
 - c. In the **Type** field, select one of the following page element types: **Capture Image Icon** or **Upload File Icon**.
3. Specify how you want to attach images or files captured from the mobile page by doing one of the following:
 - To map the target transaction or custom record to which you want to attach the image or document files, set the **Record Name** field. In this field, you can enter the ID of the target transaction. To view the list of supported transactions and their IDs, see [Supported Standard Target Transactions](#).

If you want to display attachments in a specific field within the record, set up the **Field Name** field too.

- To display attachments in a sublist, set up the **Sublist Name** field instead.

If you want to display attachments in a specific field within the sublist, set up the **Field Name** field too.

- If you want to attach files to multiple transactions, set the same fields on the **No Code Settings** subtab instead. To map a new transaction, click **New Mobile – No Code Settings**.

For more information about these fields and IDs, see [Data Capturing and Storage for Page Elements](#).

4. To map your icon page element with the transaction associated with the mobile process, do the following:
 - a. In the **Reference Transaction Type** field, enter the internal ID of the transaction.
 - b. In the **Reference Transaction State Path** field, enter the state path to the key that contains the reference transaction's internal ID.

For more information about state paths, see [Accessing Data Stored in the State](#) or the example in this procedure.

Alternatively, to assign a static value, enter the internal ID of the specific reference transaction. You may also use the keyword, **constant**, following by the internal ID or another static value.

5. (Optional) For the Capture Image Icon, to include additional details in the filename, you can set up the **Image State Path** field. In this field, you can enter the state path to a key that contains the additional detail.

For example, if you want to include the warehouse name in the filename, you can enter the following path in this field: **state:dataRecord:auxParams:warehouse**.

6. Optionally, to control the visibility of the icon on the mobile page, you can set the following additional fields: **Visibility Condition** or **Disable Field Condition**.

For detailed instructions, see [Page Element Visibility and Loading](#).

7. Click **Save**.

You can perform other customizations or configurations on other pages or page elements within the mobile process.

8. If you add multiple target transactions on the **No Code Settings** subtab, as described in step 3, you must update the mobile actions used for data submission.

For example, data submission for the standard PO Receiving process occurs when you click the Enter Bin button for warehouses with bins. After you add the icon, you can access the Enter Bin page to configure the **After On Click Action RESTlet** for this button. You can set up the same mobile action used for standard mobile processes. See [Mobile Actions for Data Submission](#).

9. To apply all your updates to the app, you can click **Save and Update App** for Mobile Configuration. For Mobile Customization, see [Compiling Mobile Customizations](#).

Example 2. Example

Within the standard PO Receiving process, you want to add the Capture Image icon to the Enter Item page. On the Mobile Configuration page for this process, you access this page named, **page_poReceiving_selectItem**. Then, you click the **Additional Page Elements** subtab to access the Mobile – Page page on which you can add a new page element. On the Mobile – Page Element page, you provide the basic element settings, and then enter the following values for the new icon element:

- Type – **Capture Image Icon**
- Record – **itemreceipt**
This setting displays captured images on item receipts, the target transaction.
- Reference Transaction Type – **purchaseorder**
This setting assigns purchase orders, the transaction associated with the mobile process, as the reference transaction for item receipts to which images are attached.
- Reference Transaction State Path – **state:dataRecord:scriptParams:transactionInternalId**
This state path to the **transactionInternalId** key stores the internal ID of purchase orders processed through PO Receiving on the app. It maps the specific purchase order used to generate the item receipt to which the captured images are attached.

With this set up, you can view captured images on the **Mobile App Attachments** subtab of generated item receipts associated with specific purchase orders received through the app.

After you update the standard or custom mobile process, you can view the icon on the app.

For information about manually attaching captured or uploaded files, see [Capturing and Attaching Files Through the App](#).

If you encounter issues, see [Troubleshooting Customizations](#).

Setting Up Autoclick for Buttons

On a mobile page of a process, you can skip the manual tapping of a button by setting up its autoclick condition. This setting automatically triggers an Action Button's On Click Action right after a page load within a standard or custom mobile process.

To set up, in the **Autoclick Condition** field, you can enter a **true** or **false** value. You can also assign a condition or expression to control the action dynamically. To configure or customize this field, see [Configuring Mobile Page Elements](#) or [Customizing Mobile Page Elements](#), respectively.

For example, you can skip the confirmation pages of standard mobile processes by adding autoclick conditions to the appropriate navigation button.

You should not set up multiple conditions that may conflict or complicate mobile process flows. On a mobile page, the app executes the autoclick condition of one button only. If you want to add autoclick conditions to multiple buttons, see how the following Action Button settings affect the evaluation sequence:

- **Disable Field Condition** and **Visibility Condition** – The app evaluates only visible and enabled buttons.
- **Content Area** and **Is Primary** – Buttons in the footer of a mobile page are evaluated first before those in the body. Primary buttons on the footer or body are evaluated first before any nonprimary button.

For standard mobile processes, you can configure the Autoclick Condition of standard buttons that already appear in the footer or body. Like custom buttons, standard primary buttons on the app have a blue background.

- **Display Order** – Multiple primary or nonprimary buttons are evaluated based on their Display Order value.

Settings for the mobile page or other page elements may be affected by autoclick conditions, as described in the following:

- If the mobile page has an On Load Action or After Load Action, the app completes either or both these actions first before it triggers the autoclick condition. For more information about actions, see [Customizing Mobile Actions](#).
- Text Box elements have an autosubmit setting for default values, which could be ignored if you also add autoclick conditions to buttons. If you set up both on the same mobile page, the app evaluates autoclick conditions before autosubmit settings. If an autoclick condition evaluates to true, any autosubmit setting might no longer be evaluated. For more information about primary buttons and autosubmission, see [Assigning Default Values to Field Elements](#).

Customizing Mobile Table Elements

You can customize the rows and columns of a standard table or a custom one that you create. You can modify column settings and row click events for the following page element types for tables: Data Table, Search Grid, Transfer Table. For Data Table element types, you can set up a toggle that enables you to control visibility on the mobile page. For Transfer Table element types, you can add buttons that appear at the table's footer. You can enable these optional settings based on your table requirements.

For your copy of a standard table or custom tables added through Mobile Configuration, you can use the same settings to update them. Except for table settings available for custom mobile processes only, you can access them also on the Mobile - Page Element page. For instructions and guidelines on cloning or adding a Data Table element to standard mobile processes, see [Configuring Mobile Table Elements](#).

To customize page elements for tables:

1. Create a table or access an existing data table element.
For instructions, see [Customizing Mobile Page Elements](#).
2. On the Mobile - Page Element page, you can customize table element settings through the following fields:
 - **Row Size** – Enter the number of rows you want the table to show for each load.
The number you specify replaces the default size of 10 rows shown by the table at the initial load. On the mobile page, you can tap a button to load the next set of rows, following the same row size.
 - **Message** – Enter the text for the message you want to show when no data or records can be found for the table.
 - **Server-side Pagination** – If you want to implement server-side pagination, check this box.
When you check this box, searching and sorting of columns are also done on the server side.
 - **Cache Table Data on Back Navigation** – If you want to cache table data when you navigate back to a previous mobile page, check this box.
You can enable this setting for a table on a mobile page that has a Back Button element. If you create your own page, make sure you add a Back Button element type that navigates to the previous page. See [Customizing Mobile Page Elements](#).
 - **Retain Column Filters** – If you want to retain the filters that you select for a table on a mobile page, check this box.
By default, changes that you apply to table filters on a page are automatically removed when you leave the page. When you check this box, the table filters you apply remain throughout the

active session. Your filters are retained even when you navigate to another mobile page within the process.

3. To set up a toggle for Data Table element types, select values in the following fields:

- **Toggle State** – Select one of the following toggle states that you want to set as the default: **Show** or **Hide**.

The appropriate toggle icon for the state appears on the mobile page. If you do not specify a state, the toggle appears in the default Hide state and its icon.

- **Toggle Label** – Select or create a label that shows on the mobile page for the toggle.

The label appears to the right of the toggle icon.

Data Table element types that do not have a toggle appear automatically during the initial page load. When you fill out at least one of these toggle fields, you add a toggle to the table. You can choose to set up toggles for tables that provide additional or optional data.

4. To modify search settings for Search Grid element types, enter values in the following fields:

- **Search Character Count** – Enter the minimum number of characters that must be entered in the search field to start the search operation.
- **Search Delay** – Enter the number of seconds after which search results are displayed, when you have reached the search character count.

Standard search grids display results after you enter at least three characters with a one-second delay. You can customize the settings depending on the size of the data and other such factors.

5. To customize components, like rows and columns, for specific table element types, see the following topics:

- [Customizing Row Selection](#)
- [Setting Up Columns for New Tables](#)
- [Setting Up Table Row Colors](#)

The following topics apply only to custom table elements that you create: [Data Sourcing for New Table Elements](#) and [Setting Up Columns for New Tables](#).

To set up new columns for standard tables, see [Adding Columns to Table Elements](#).

6. Click **Save**.
7. After you complete your mobile process customizations, make sure you update the app. See [Compiling Mobile Customizations](#).

Data Sourcing for New Table Elements

When you create your own table element, you can use a saved search for your data source. If you want to access multiple data sources, you can use a RESTlet instead. The data retrieved from your source is stored in a state object. From the retrieved data, choose the columns you want to show in the table or grid.

 **Note:** Do not change the source data of standard table elements. It may cause issues to the standard mobile process flow. If you want to copy a load action of a standard Data Table, you can update it and assign it to your custom table or a copy. For more information, see [Configuring Mobile Table Elements](#).

On the Mobile - Page Element page, you can set up the data source for your table element in the **On Load Action** field. In this field, select or create the mobile action that retrieves the data during the initial page element load. Depending on the data source, you can set up a Restlet or Saved Search type of action. For more information, see [Mobile Actions for Page Element Events](#).

After you set up the data source for your new table, you can set up mobile actions for row clicks, column clicks, or both. See the following topics:

- [Customizing Row Selection](#)
- [Setting Up Columns for New Tables](#)

Customizing Row Selection

On the Mobile - Page Element page, you can customize row selection depending on the element type.

For Data Table and Search Grid element types, in the **On Row Click Action** field, you can select or create the mobile action called when you tap a row. Standard table elements call a Forward Form or Submit Form type of action when you tap a row. It enables you to skip the step of tapping a button to navigate to the next page and save or submit data. In your custom process, you can set up the appropriate type of action based on the location of the mobile page in the process flow.

For Data Table element types, you can override the row click event to let you select multiple rows, by doing the following:

- **Select Multiple Rows** – If you want to enable multiple row selection, check this box.
On the mobile page, the table displays a column of checkboxes. Instead of tapping a row, you can tap the box for each row that you want to select.
When you check this box, you can also set up one or more columns as row filters. See [Setting Up Columns for New Tables](#).

 **Note:** For Data Tables, this setting does not apply if you set up row colors. See [Setting Up Table Row Colors](#).

If you want to set up multiple row selection for Transfer Table elements, see [Multiple Row Selection for Transfer Tables](#).

- **Table Title Placeholder** – (Optional) If you check the Select Multiple Rows box, the table displays the following text at the header: **Number of rows selected: <#>**. To further describe the rows, you can insert text or select a record type or transaction type.
For example, if you enter or select **sales order**, the text at the header becomes **Number of sales order rows selected: <#>**.

For Transfer Table element types, you can specify the mobile action for the left and right tables in the following fields:

- **On Click Action for Left Row** – Select or create the mobile action called when you tap a row from the left table.
- **On Click Action for Right Row** – Select or create the mobile action called when you tap a row from the right table.

In the standard transfer tables for Ship Central, when you tap a row for an item in the left table, it moves to the right table. The opposite behavior occurs when you tap a row in the right table. These behaviors indicate that you have either packed an item from the left table or unpacked one from the right table.

For more information about setting up mobile actions, see [Customizing Mobile Actions](#).

For table columns, you can set up an action that is called when you tap data or a row in a specific column. See [Setting Up Columns for New Tables](#).

Setting Up Columns for New Tables

On the Mobile - Page Element page, you can click the **Table Columns** subtab to set up columns on new tables that you create. From this subtab, you can access the Mobile - Table Columns page and fill out the following fields for each column that you want to set up.

Note: If you want to add columns to standard tables, instead of one that you create, see [Adding Columns to Table Elements](#).

- **Name** – Enter a unique name for the column.
- **Label** – Enter the column's label, which appears on the mobile page.
- **Data Type** – Select the type of data you want to show in the column.
You cannot select the Password data type for columns.
- **Display Order** – Enter the number that indicates the column's position, with regard to other columns in the table.

For example, you want to display three columns on the table. Starting with number **1** for the first and leftmost column, assign the display orders to the columns accordingly.
- **Is Visible by Default** – If you want this column to appear on the table during page loads, check this box.
- **Visibility Condition** – If you want this column to appear based on a condition, you can enter an expression that evaluates to true or false.

When a condition evaluates to false, the column is hidden from the table. You cannot use the table configuration tool to display columns that are hidden based on a condition.

For more information about setting up visibility conditions, see [Page Element Visibility and Loading](#).
- **Include in Group Filter** – If you check the Select Multiple Rows box, you can check this box to assign this column as a row filter.

NetSuite applies this column's data for the selected row as a filter. It removes the rows from the table that do not contain the same column data. Row filters automatically appear above the table element when you select a row. You can set up multiple columns as row filters.

For example, you have a table of item with an Item Name column that you have set up as a row filter. When you select a row with the Item A name, NetSuite adjusts the table to show only the rows that have the same item name.
- **On Click Action** – Select or create the mobile action to call when you click a cell in this column. To display data in your column, you can set up a saved search or RESTlet that obtains the data.

Note: You can use the same action for row and column clicks. If you check the Select Multiple Rows box, NetSuite overrides the mobile action that you set up in this field. For more information, see [Customizing Row Selection](#).

- **Response Key** – If you set up a RESTlet in the On Click Action, you can enter the response key returned by the RESTlet. For RESTlets that obtain data for your column, you can enter the response key that contains the data.
- **Show Column Data as Buttons** – If you set up the On Click Action for this column and you want the column data to appear as buttons, check this box.

Each column cell appears as a button with its data as the button's label. If you do not check this box, the data in each cell appear as underlined blue links.

Multiple Row Selection for Transfer Tables

For Transfer Table elements, you can set the **Enable Multiselect Condition** field as follows:

- Enter **true** to display a column of boxes for selection of one or more rows on both sides of the table.
- Enter **false** or leave it blank if you want to keep the column of boxes hidden.

Then, set up the mobile action that you want to run during row or column clicks on the table. Based on your table requirements, you can set them up for either or both sides in the following fields:

- **On Click Action for Left Row**
- **On Click Action for Right Row**
- **On Column Click Action**

To set up mobile actions, see [Customizing Mobile Actions](#).

For each mobile action, you can include a condition that evaluates to true or false. It enables you to control when you want to run the action.

You can use the following transfer table APIs in your condition: `getSelection()`, `getLeftSelection()`, or `getRightSelection()`. You can retrieve the selected rows from either side of the table and include it in your condition. In the following examples, the **page** keyword is used followed by the name of the transfer table that contains the selected rows.

- **Left Row Click Condition** – If you set up a row click action for the left table, you can enter the condition in this field.
Example: `{{page:TransferTableSample:getLeftSelection()}}.length`
- **Right Row Click Condition** – If you set up a row click action for the right table, you can enter the condition in this field.
Example: `{{page:TransferTableSample:getRightSelection()}}.length == 0`
- **Column Click Action Condition** – On the **Table Columns** subtab, you can click **Edit** to open the specific column record. On the Mobile – Table Column page, in the **Column Click Action Condition** field, enter the condition. Based on the column's location on the table, you can use the appropriate API for left or right selections.

Adding Columns to Table Elements

You can add columns to standard Data Table elements within standard or custom mobile processes. For Transfer Table elements, you can add columns to the left table. You can add columns to standard Search Grid elements for custom mobile processes. For both process types, you can add custom or standard columns.

Use an existing or new saved search or RESTlet to retrieve the data for additional columns. Note the following when choosing either of these data sources:

- The saved search or RESTlet results must have a column that matches one on the standard table. This column is used to merge the data.
- New columns must contain text data. Those with images cannot be added to standard tables.
- For saved searches, the record associated with it must support the `search.load` method. Otherwise, you might encounter an error when trying to add the column.
For example, the wave record supports `search.create` only and not `search.load` for search operations. This record cannot be used directly for saved searches that you set up for additional table columns.

For instructions, see the help topic [Defining a Saved Search](#) or [SuiteScript 2.x RESTlet Reference](#).

To map the retrieved data with those from the standard table, define one or more merge criteria. The data from new columns that you add to a table can be saved to a NetSuite record.

To begin adding columns for each process type, see the following topics:

- For standard mobile processes, see [Adding Columns Through Mobile Configuration](#).
- For custom mobile processes, see [Adding Columns Through Mobile Customization](#).

Adding Columns Through Mobile Configuration

For standard mobile processes, you can add standard or custom columns through mobile configuration. Note that these columns are not carried over in case you decide to create a custom mobile process from the standard one. If you want to add columns to a custom mobile process, see [Adding Columns Through Mobile Customization](#).

For Data Table elements only, you can display a clickable URL in a custom table column. You can set it up to redirect to another page, an external site, or a file in your file cabinet. It does not consider clicking or tapping a column value as row selection.

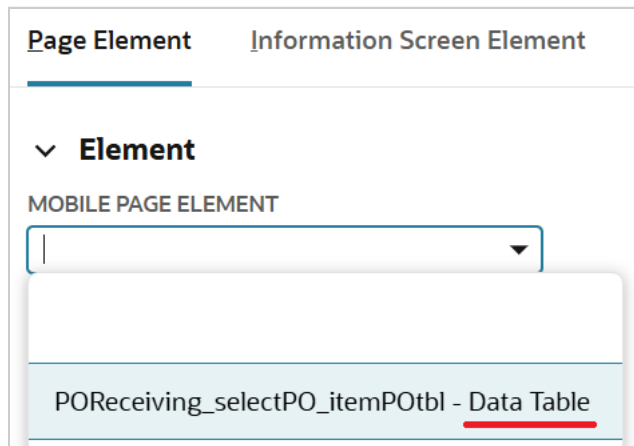
You can set up a single, dynamic, or multiple URLs. For single dynamic URLs, you can create a RESTlet or saved search to retrieve your data. For multiple URLs, you can create a RESTlet to retrieve your lists of URLs.

To add columns through mobile configuration:

1. Access the configuration page for the supported table element.
For instructions, see [Configuring Mobile Page Elements](#).

2. On the Mobile Configuration page, click the **Page Element** subtab, and then click the **Custom Columns Configuration** subtab.

This subtab appears for supported table element types only, which you can verify in the **Mobile Page Element** field.



The screenshot shows a configuration interface with two tabs: 'Page Element' (selected) and 'Information Screen Element'. Under 'Page Element', there is a dropdown menu labeled 'MOBILE PAGE ELEMENT'. The dropdown is open, showing a list of options. The selected option is 'POReceiving_selectPO_itemPOTbl - Data Table', which is highlighted with a red underline.

For more information, see [Adding Columns to Table Elements](#).

3. On the **Custom Columns Configuration** subtab, select an existing configuration, or click the plus icon to create one.
4. On the Mobile - Custom Column Setup popup window, set values in the following fields:

- a. **Name** – Enter a unique name for the column group.
- b. **On Load Action** – Select an existing action or click the plus icon to add a new one.

Based on your data source, create a Saved Search or Restlet type of action. For instructions, see [Setting Up the On Load Action for New Columns](#) or [Setting Up Custom RESTlets](#).

To set up multiple or dynamic URLs in columns, you can assign your RESTlet to the mobile action. You can also assign a saved search for single dynamic URLs only.

- c. **Response Key** – If you set up a RESTlet in the On Load Action, enter the key that contains the RESTlet's response. For RESTlets that retrieve multiple or dynamic URLs, do not set this field.

- d. Click **Save**.
5. To add a column, do the following:
 - a. On the **Custom Columns Configuration** subtab, next to the field, click the open icon.
 - b. On the Custom Column Setup popup window, click **Edit**.
 - c. On the **Columns** subtab, click **New Mobile - Custom Column**.
 - d. On the Mobile - Custom Column page, set values in the following fields:
 - **Name** – Enter a unique name for the custom column.
 - **Label** – Enter or select a label for the column that appears on the mobile page.
 - **Data Type** – Select the type of data you want to display in the column.
 For Data Table elements, you can select **URL** to display single, dynamic, or multiple URLs. Depending on your column requirements, you may also need to set up the following fields: **On Load Action**, **Response Key**, **Target URL**, or **Display Label**.
 - **Response Key** – Enter the response key that contains the values for the new column. To display multiple or dynamic URLs, enter the key from your RESTlet.
 If you want to display the list of keys from a saved search, click **Show Saved Search Columns**. A popup window appears that contains the columns from the saved search that you set up for the On Load Action in step 4. You can copy the key that appears to the left of the colon.
 - **Target URL** – To set up single static URLs, enter the website address or link for a page or a file in your file cabinet.
 If you set up this field along with dynamic or multiple URLs, the app does not follow your set up for single static URLs.
 - **Display Label** – For single static URLs, enter a label or readable text that you want to appear in each column cell instead of the actual URL. This label appears as a blue hyperlink only if you also provide a target URL.
 For multiple URLs, enter the label that you want to tap to open a popup window that contains the list of URLs.
 - e. Click **Save** to close the Mobile - Custom Column page.
 To add more columns, repeat from step c.
6. On the Mobile - Custom Column Setup popup window, define your merge criteria.
 For instructions, see [Defining Merge Criteria for New Columns](#).
7. To save data from your new table columns to a NetSuite record, see [Saving Data from Additional Columns](#).
8. After you set up the columns and merge criteria, click **Save**.
 At the top of the page, a message appears to inform you about the status of the update. To view the latest status, click the **view the status** link.
9. After you update the mobile app, you can display the additional columns on the mobile page. For instructions, see [SCM Mobile Page Elements \(Buttons, Fields, Tables\)](#).

Adding Columns Through Mobile Customization

Custom mobile processes contain duplicates of Data Table, Transfer Table, and Search Grid elements from the standard process. You can add columns to these types of tables copied from standard processes.

Before you add columns, make sure you clone the mobile process. From your custom process, access the customization page for the Data Table or Search Grid element. For instructions, see [Customizing Mobile Page Elements](#).

For Data Table elements only, you can display a clickable URL in a custom table column. You can set it up to redirect to another page, an external site, or a file in your file cabinet. It does not consider clicking or tapping a column value as row selection.

You can set up a single, dynamic, or multiple URLs. For single dynamic URLs, you can create a RESTlet or saved search to retrieve your data. For multiple URLs, you can create a RESTlet to retrieve your lists of URLs.

To add columns through mobile customization:

1. On the Mobile - Page Element page, enter values in the following fields:
 - **On Load Action for Custom Column** – Select an existing action or click the plus icon to create a new one.

Based on your data source, create a Saved Search or Restlet type of action. For instructions, see [Setting Up the On Load Action for New Columns](#) or [Setting Up Custom RESTlets](#).

To set up multiple or dynamic URLs in columns, you can assign your RESTlet to the mobile action. You can also assign a saved search for single dynamic URLs only.
 - **Response Key for Custom Column** – If you set up a RESTlet in the custom column's On Load Action, enter the key that contains the RESTlet's response. For RESTlets that retrieve multiple or dynamic URLs, do not set this field.
2. To add the columns, do the following:
 - a. On the **Table Columns** subtab, click **New Mobile - Table Column**.
 - b. On the Mobile - Table Column page, enter or select values in the following fields:
 - **Name** – Enter a unique name for the custom column.
 - **Label** – Enter or select a column label, which appears on the mobile page.
 - **Response Key** – Enter the response key that contains the values for the new column. To display multiple or dynamic URLs, enter the key from your RESTlet.

To display the list of keys from a saved search, click **Show Saved Search Columns**. A popup window appears that contains the columns from the saved search that you set up for the On Load Action in step 1. You can copy a key that appears to the left of the colon.
 - **Target URL** – To set up single static URLs, enter the website address or link for a page or a file in your file cabinet.

If you set up this field along with dynamic or multiple URLs, the app does not follow your set up for single static URLs.
 - **Display Label** – For single static URLs, enter a label or readable text that you want to appear in each column cell instead of the actual URL. This label appears as a blue hyperlink only if you also provide a target URL.

For multiple URLs, enter the label that you want to tap to open a popup window that contains the list of URLs.
 - c. Click **Save**.

To add more columns, repeat this step.
3. To define your merge criteria, see [Defining Merge Criteria for New Columns](#).
4. To save data from your additional columns to a NetSuite record, see [Saving Data from Additional Columns](#).

5. To apply your updates to the mobile app, see [Compiling Mobile Customizations](#).
6. After you update the mobile app, you can display the additional columns on the mobile page. For instructions, see [SCM Mobile Page Elements \(Buttons, Fields, Tables\)](#).
7. If you want to import your custom process to another account, see [Importing Mobile Processes](#).
If you use a saved search for the new columns, make sure you also create the saved search in the target account.

Setting Up the On Load Action for New Columns

Through mobile configuration or customization, you can add or edit the mobile action for the On Load Action of your custom columns.

The instructions in this topic continue from either of the following procedures:

- [Adding Columns Through Mobile Configuration](#)
- [Adding Columns Through Mobile Customization](#)

To set up the On Load Action for new columns:

1. On the Mobile - Action page, in the **Name** field, enter a unique name for the mobile action.
2. In the **Type** field, select **Saved Search** or **Restlet**, and then fill out their corresponding fields:
 - For Saved Search actions, in the **Saved Search** field, select the saved search that returns the columns you want to set up.
 - For Restlet actions, set values in the following fields: **HTTP Method**, **Script ID**, and **Deployment ID**.
For more information, see [Configuring Pages and Actions for Custom Mobile Processes](#).
3. For saved search actions, if you want to set a column as a filter, on the **Input Parameters** subtab, do the following:
 - a. Click **New Mobile – Input Parameter**.
 - b. On the Mobile - Input Parameter page, enter values in the following fields:
 - **Name** – Enter a unique name for the input parameter.
 - **Key** – Enter the key, from the saved search or RESTlet response, associated with the column.
To display the list of keys from a saved search, click **Show Saved Search Columns**. You can copy a response key that appears to the left of the colon.
 - **Value** – Enter the value of the key.
To view the possible values associated with the key, you can preview the results of your saved search.
For example, to set up the transaction ID as a filter, you can enter **tranid** for the key and **21007** for its value. On your mobile device, only the row that has a transaction or internal ID of 21007 appears on the table.
4. To set the other fields for the mobile action, see [Customizing Mobile Actions](#).
5. Click **Save**.

After you set up the new columns, you can define your merge criteria. For instructions, see [Defining Merge Criteria for New Columns](#).

Defining Merge Criteria for New Columns

Define your merge criteria to map rows from the new columns with those from the standard table. From the columns retrieved by your saved search or RESTlet, choose one that matches the data of a column from the standard table. New rows that cannot be merged or have an empty value for the column also appear on the table. If a new row maps with multiple rows from the table, modify the criteria or add another one.

Depending on your table requirements, you may need to add multiple merge criteria with regard to the following cases:

- If a new row maps with multiple rows from the table, you can modify the merge criteria or add another one.
- If your saved search or RESTlet obtains columns from multiple records, add multiple criteria to map data from each record.

For example, if your saved search returns columns from both a transaction and an item record, choose a column from each to map to columns on the standard table.

To define merge criteria for new columns:

1. Access the merge criteria page for the type of process to which you want to add columns:
 - For standard mobile processes, on the Mobile – Custom Column Setup page, click the **Merge Criteria** subtab, and then click **New Mobile Configuration - Merge**.
For more information, see [Adding Columns Through Mobile Configuration](#).
 - For custom mobile processes, on the Mobile - Page Element page, click the **Merge Criteria** subtab, and then click **New Mobile Customization - Merge Criteria**.
For more information, see [Adding Columns Through Mobile Customization](#).
2. On the merge page, enter values in the following fields:
 - **Standard Column Key** or **Standard Column ID** – Enter the response key associated with a column from the standard table.
To view the list of response keys, click **Show Standard Columns**. From the popup window, you can copy the key that appears to the right of the colon.
 - **Configured Column Key** or **Custom Column ID** – Enter the name of the new column from your saved search or RESTlet response.
To display the list of response keys from a saved search, click **Show Saved Search Columns**. From the popup window, you can copy the key that appears to the left of the colon.

The new and existing columns that you want to map must contain the same type of data.

For example, you want to map the new rows with the existing rows using the purchase order ID. Set up the key associated with the purchase order ID column from the saved search or RESTlet and from the standard table.
3. Click **Save**.
Repeat the steps for each merge criteria you want to add.
4. To perform other customizations for your additional columns, see the following topics:
 - [Setting Up the On Load Action for New Columns](#)
 - [Saving Data from Additional Columns](#)
5. After you complete your customizations, make sure you apply the updates to the mobile app. For more information, see [Compiling Mobile Customizations](#).

Saving Data from Additional Columns

When you add columns to a standard Data Table element, you can save their data to a NetSuite record. In standard mobile processes, a row or column click action on the table captures and stores the data in the state.

On the last entry page, a button click action saves the stored data to a NetSuite record. You can set up RESTlets that perform the same actions for the data retrieved from your additional columns. Your setup procedure depends on whether you have added the columns to a standard process through configuration or to a custom process through customization.

Before you start your configuration or customization, note the following:

- Make sure you have set up the new columns for the standard table. Also, verify that you can access the columns on the mobile app. For instructions, see [Adding Columns to Table Elements](#).
- If you want to save the data to a custom field, verify that you have set up the field in the NetSuite record.
- Create the RESTlet scripts and deployments that you want to set up for the table, button, or both.
- Saving of data to multiple NetSuite records at the same time is not supported.

See the following set up procedures for each process type:

- [Saving Data Through Mobile Configuration](#)
- [Saving Data Through Mobile Customization](#)

Saving Data Through Mobile Configuration

For standard mobile process configuration, follow the procedure in this topic to save data from your additional columns to a NetSuite record. For more information about new columns for tables in standard processes, see [Adding Columns Through Mobile Configuration](#).

If you want to follow the standard mobile process setup, you can configure the action for the table elements first. You can set up RESTlet actions for either or both the row click and column click actions. Then, you can set up the RESTlet action for the button element. For guidelines before you start your setup, see [Saving Data from Additional Columns](#).

To save data through mobile configuration:

1. Access the Mobile Configuration page for the standard mobile process you want to configure.
To access this page, see [Configuring Mobile Page Elements](#).
2. If you want to set up the action for the Data Table element, on the Mobile Configuration page, select values in the following fields:
 - a. In the **Page** field, select the page that contains the Data Table Element.
 - b. On the **Page Element** subtab, in the **Mobile Page Element** field, select the Data Table element that contains your additional column.
3. If you want to set up the row click action, in the **After Row Click Action RESTlet**, select an existing RESTlet action.
Alternatively, click the plus icon to create a new RESTlet action. For instructions, see step 6.
You can set up a RESTlet that captures data from the additional column and stores it in the state.
4. If you want to set up the column click action, click the **Table Columns** subtab, and then select values in the following fields:
 - a. **Column** – Select the additional column that you want to configure.

- b. **After Column Click Action RESTlet** – Select or create the RESTlet action that is triggered after the on click action. If you want to create a new RESTlet action, see step 6.
You can set up a RESTlet that captures data from the additional column and stores it in the state.
5. If you want to set up the Action Button element on the last entry page of the process, do the following:
 - a. In the **Page** field, select the page that contains the Action Button element.
 - b. On the **Page Element** subtab, in the **Mobile Page Element** field, select the Action Button element that you want to configure.
 - c. In the **After On Click Action RESTlet** field, select or create the RESTlet action that is triggered after the button click action. If you want to create a new mobile action, see step 6.
You can set up a RESTlet that submits the data captured from your additional column to a NetSuite record.
6. To set up a new RESTlet action for your row, column, or button click action, do the following:
 - a. On the Mobile - Action page, enter values in the following fields:
 - **Name** – Enter a unique name for the mobile action.
 - **Type** – Select **RESTlet**.
 - **HTTP Method** – Select **POST**.
 - **Script ID** – Enter the ID of the RESTlet script.
 - **Deployment ID** – Enter the ID of the script deployment.

Make sure you select the RESTlet script and deployment IDs for the appropriate action. You can repeat this step to set up another action.
 - b. Click **Save** to save your mobile action settings.
7. Click **Save**.

Saving Data Through Mobile Customization

For custom mobile process customization, follow the procedure in this topic to save data from your additional columns to a NetSuite record. For more information about new table columns for custom processes, see [Adding Columns Through Mobile Customization](#).

If you want to follow the standard mobile process setup, you can customize the action for the table elements first. You can set up RESTlet actions for either or both the row click and column click actions. Then, you can set up the RESTlet action for the button element. For guidelines before you start your setup, see [Saving Data from Additional Columns](#).

To save data through mobile customization:

1. Access the Mobile - Process page for the custom mobile process you want to customize.
To access this page, see [Customizing Mobile Page Elements](#).
2. On the Mobile - Process page, on the **Pages** subtab, access the page that contains the Data Table or Action Button element you want to customize.
3. On the Mobile - Page page, on the **Page Elements** subtab, access the Data Table or Action Button element.
4. If you want to set up the row click action for the Data Table element, on the Mobile - Page Element page, do the following:
 - a. Click the link in the **On Row Click Action** field.

- b. On the Mobile - Action page, in the **After Action RESTlet** field, select or create the RESTlet action that is triggered after the row click. If you want to create a new mobile action, see step 6.
 - c. Click **Save**.
- 5. If you want to set up the column click action for the Data Table element, on the Mobile - Page Element page, do the following:
 - a. On the **Table Columns** subtab, click the new column to which you want to set up the RESTlet action.



Tip: New columns that you add to a table element have the **Yes** value in the **Is Custom Column** column.

- b. On the Mobile - Table Column page, click the link in the **On Click Action** field.
 - c. On the Mobile - Action page, in the **After Action RESTlet** field, select or create the RESTlet action that is triggered after the row click. If you want to create a new mobile action, see step 6.
 - d. Click **Save**.
- 6. To set up a new RESTlet action for your row, column, or button click action, do the following:
 - a. On the Mobile - Action page, enter values in the following fields:
 - **Name** – Enter a unique name for the mobile action.
 - **Type** – Select **RESTlet**.
 - **HTTP Method** – Select **POST**.
 - **Script ID** – Enter the ID of the RESTlet script.
 - **Deployment ID** – Enter the ID of the script deployment.

Make sure you select the RESTlet script and deployment IDs for the appropriate action. You can repeat this step to set up another action.
 - b. Click **Save** to save your mobile action settings.
- 7. Click **Save**.
- 8. After you complete your mobile process customizations, make sure you update the app. See [Compiling Mobile Customizations](#).

After your mobile configuration or customization, you can display the additional columns on the mobile page. For instructions, see [SCM Mobile Page Elements \(Buttons, Fields, Tables\)](#).

Setting Up Table Row Colors

SCM Mobile provides six standard colors for highlighting rows of Data Table elements: blue, green, orange, purple, red, and yellow. You can choose up to three colors to set up on a single table. When a table has highlighted rows, you can group together rows with the same color or filter rows based on a color.

To set up a color, provide a condition that specifies the data to which you want to apply it. The app highlights entire rows that contain data that meet your condition to distinguish them from other rows.

To set up table row colors:

1. Access the Data Table element through mobile configuration or customization:

- If the table appears within a standard mobile process, see [Configuring Mobile Page Elements](#)
 - If the table appears within your custom mobile process, see [Customizing Mobile Page Elements](#)
2. On the **Row Colors** subtab, click **Add Color** for configuration or **New Mobile – Row Color** for customization.
 3. On the Row Color page, set values in the following fields:
 - a. **Name** – Enter a unique name for the color setting.
 - b. **Priority** – Enter a number greater than zero that indicates the priority of this color.
If multiple colors apply to a row based on their conditions, the app chooses the color with the first or highest priority.
 - c. **Column Condition** – Enter a conditional statement or expression based on data from one or more table columns. To reference a column, use the **column** keyword followed by the name from the column's record.



Tip: To view names of columns that you can use in your condition, click **Show Column Response Keys**. The list may include custom columns that you add to the table.

If a table references or sources data from a NetSuite record, you can use the same NetSuite record data for your column condition. Use the **record** keyword to reference a NetSuite record and the **state** keyword to specify the path to a state key. To use state paths, see [Accessing Data Stored in the State](#).

Examples:

- **column:quantity > 12** – Highlights rows that have a Quantity column value greater than 12
- **{{record:purchaseorder:{{state:dataRecord:scriptParams:transactionInternalId}}-priority}}=="Urgent"** – Highlights rows for purchase orders with an Urgent priority setting, obtained from a Priority custom field added to the purchase order
- **{{state:dataRecord:auxParams:warehouseLocation_LocationTbl:name}}=="West Coast" && DateValue({{column:duedate}},",") <=DateValue('0')** – Highlights rows for the West Coast location with due dates less than or equal to the current date

As shown in the third example, you can use the DateValue() API to specify, calculate, or compare dates in your condition. For information and more examples, see [DateValue\(\) API for Column Conditions](#).

- d. **Color** – Select the color that you want to set up for the table.
 - e. **Color Description** – Enter a brief description of how or when the color is used. You can provide details about conditions that you apply to a color.
 - f. On the app, you can click the info icon for a table to view the descriptions on a popup window.
4. Click **Save**.
 5. Be sure to apply all your updates to the mobile app before you try to access it. For instructions, you can return to the procedures listed in step 1.

Customizing Information Screen Elements

You can add elements that display on the information screen of your custom mobile process. On a mobile page, you can set up the elements for the data that you can retrieve from the page. The data appear on the information screen of each succeeding page within the process flow.

For example, the standard Enter PO and Enter Item mobile pages of the PO receiving process each have elements for the information screen. Information screen elements on the Enter PO page retrieve the purchase order details. These details appear on the information screen of the Enter Item page, which in turn retrieves the item details. The information screen on the Enter Quantity page displays all the details from the previous two pages.

Data from the mobile page are stored in the state, which makes them available for the screen. You can retrieve stored data from the keys in either of the following state paths:

- **state:dataRecord:scriptParams**

Example: state:dataRecord:scriptParams:vendorName

The vendorName key contains the name of the vendor associated with the selected purchase order.

- **state:dataRecord:auxParams**

Example: state:dataRecord:auxParams:poReceiving_scanEnterLot_Txt

The poReceiving_scanEnterLot_Txt key contains the lot number of the received item.

For more information about mobile states, see [Working with Mobile States as Data Source](#).

Aside from specifying the data source, you can also customize the layout and display order on the mobile page. When adding elements to an information screen, note the following customization guidelines:

- For the Inline layout, you can show up to two elements per line or row.
- A single element that appears on a line occupies the entire width.
- An image appears as a thumbnail. When you tap it on the information screen, it appears in full on a popup window
Before you can display an image, you must set it up on the item record in the Item Display Image and Item Display Thumbnail fields. For requirements and more information, see [SCM Mobile Setup and Using Images in your Web Store](#).
- The ability to display or hide the information screen on a mobile page is not supported. Custom mobile processes follow the predefined display and hide information screen settings of standard processes.

For more information about element layout and display settings, see [Arranging Page Elements](#).

To customize information screen elements:

1. Access the mobile page on which you want to set up the information screen element:
 - a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile - Applications List page, click **View** next to the mobile app.
 - c. On the Mobile - Process List page, click **View** next to the custom mobile process that contains the page.
 - d. On the Mobile - Process page, on the **Pages** subtab, click the page name.
2. On the Mobile - Page page, do the following:
 - a. Click the **Information Screen Elements** subtab.
 - b. To add an element, click **New Mobile - Info Screen Element**. If you want to modify an existing element, click **Edit** next to it.
3. On the Mobile - Info Screen Element page, set values in the following fields:
 - **Name** – Enter a unique name for the element.
 - **Label** – Select an existing label or create one.
 - **Is Dynamic** – Check this box to indicate that the data in the element is dynamic. NetSuite retrieves the value through the path at each screen load.

4. To configure the data source, in the **Path** field, enter the state path to the key that contains the data you want to show in this element.
To set up the image from an item's record, you can retrieve the image using one of the following default paths:
 - **state:dataRecord:scriptParams:imageUrl** – key for the image of a regular item
 - **state:dataRecord:scriptParams:info_imageURL_lineitemsubitemof** – key for the image of a kit item component
5. To customize the position and display settings, set values in the following fields:
 - **Layout** – Select either **Block** or **Inline**.
 - **Page** – (Optional) Select the mobile page from which you want to retrieve the data that display on the succeeding pages.
 - **Display Order** – Enter the number that indicates the element's position with regard to other elements on the screen.
 - **Show If No Value** – Check this box if you want to display this element even if it has no data to show.
6. Click **Save**.
You can repeat steps 2 to 6 to edit or add more elements to the information screen.
7. After you complete your mobile process customizations, make sure you update the app.
See [Compiling Mobile Customizations](#).

On the mobile app, you can view the information screen by tapping the info  icon on a page.

Customizing Mobile Actions


You can set up mobile actions for events associated with page or page elements. Both pages and page elements have on load events. Button, icon, and table elements have additional events for clicking or tapping. Field elements have events for selection, scanning, and validation.

The action types available for events on page and page elements are the same. You can choose the appropriate action type based on the event. For example, set up action types for page navigation and submission for on click rather than on load events.

To customize mobile actions:

1. To set up a mobile action for a page event, do the following:
 - a. Access the Mobile - Page page.
For instructions, see [Customizing Mobile Pages](#).
 - b. On the Mobile - Page page, select an action in the following fields:
 - **On Load Action** – Select the mobile action you want to trigger during the initial page load.
 - **After Load Action** – Select the mobile action you want to trigger after the initial page load.
2. To set up a mobile action for a page element event, do the following:
 - a. Access the Mobile - Page Element page.
For instructions, see [Customizing Mobile Page Elements](#).
 - b. On the Mobile - Page Element page, click **Edit**.

- c. Next to an event field, like the On Click Action field, click the plus icon to create a mobile action or the open icon to edit the currently selected one.

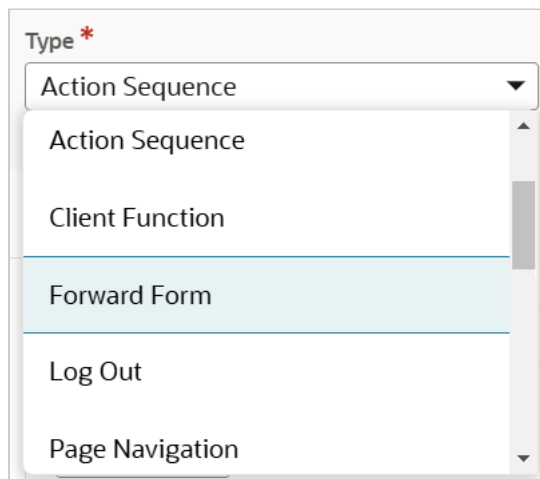


Alternatively, select a mobile action to replace the current one. You can skip step 3.

- d. On the Mobile - Page Element page, you can select the action for an event, like an on click or on scan event.

The events that are available depend on the page element type. For more information, see the following topics:

3. To create or edit a mobile action, on the Mobile - Action page, you can set or modify the following required fields:
 - a. **Name** – A unique name for the mobile action.
 - b. **Type** – The type of mobile action you want to set up.



- [Mobile Actions for Menu Navigation](#)
- [Mobile Actions for Page Validation and Navigation](#)
- [Mobile Actions for Page Element Events](#)
- [Mobile Action Sequence](#)
- [Setting Up Custom RESTlets](#)

4. Click **Save**.
5. After you complete your mobile process customizations, make sure you update the app. See [Compiling Mobile Customizations](#).

Mobile Actions for Menu Navigation

On menu pages, you can add button elements for navigation. For the on click event associated with each icon or button, you can set up the following action types on the Mobile - Action page:

- **Logout**
- **Page Navigation** – See [Mobile Actions for Page Validation and Navigation](#).

- **Process Navigation** – Used to navigate to the first page of a mobile process. If you select this action type, set up the following:
 - In one of the **Target** fields, select a standard or custom process.
 - Choose the first page for the mobile process. For more information, see [Customizing Mobile Processes](#).
- **URL Navigation** – Used to navigate to a web address. In the **Target URL** field, enter the absolute URL or external page.

Mobile Actions for Page Validation and Navigation

Button and table elements include on-click events to which you can assign mobile actions for navigation and data validation. Certain types of mobile actions enable you to store or save data as shown in the following list:

- **Page Navigation** – Used to navigate to an independent page or a dependent one within a mobile process. This action type includes the Retain State option to keep values stored in the state even after you visit the target page.
 For example, you check the **Retain State** box for the Page Navigation action on the standard Select Warehouse page. The mobile action redirects you to the Main Menu page. It carries over your selected warehouse, so you can process only the orders and items within that location.
 You can also set up this action on a menu page, to navigate to a process-dependent or an independent mobile page. See [Mobile Actions for Menu Navigation](#).
- **Forward Form** – Used to navigate to the next page within the mobile process, with an option to perform data validation. It pushes the data you enter on a mobile page to the state.
 In standard mobile process, the entry pages include an Action Button element that has a Forward Form action and a Back Button element. The Back Button element is predefined with the action that navigates to the previous page within the process flow.
- **Submit Form** – Used to save and submit data entered on a mobile page to a NetSuite record. It also navigates to another page.
 Like the Page Navigation action, you can also set the Retain State box for a Submit Form action. However, this setting for Submit Form actions does not retain state values if you have already visited the target page. This restriction prevents duplicate submission of data into NetSuite records.

Example 3. Example

Within the WMS work order picking process, the Enter Quantity page displays the Enter Quantity and Bin Empty buttons. The Enter Quantity button calls a Forward Form action to validate data, store data, and navigate to the next page in the process flow. In case of insufficient quantity, you can tap the Bin Empty button. It calls a Page Navigation action to redirect you to the Select Pick Task page without storing any data. On the last entry page of the process flow, the button calls a Submit Form action to validate, submit, and redirect to a target page.

To set up these action types, on the Mobile - Action page of the event, do the following depending on your customization requirements:

- For navigation with server-side validation, you can enter values in the following fields:
 - **Validation Script ID** and **Validation Deployment ID** – For Forward Form actions, enter the script and deployment ID for the RESTlet that validates data from the server side.
 The data from the RESTlet's response is stored in the state.
 - **Script ID** and **Deployment ID** – For Submit Form actions, enter the script and deployment ID for the RESTlet that validates and submits the data from the server side.
 The data from the RESTlet's response is saved in a NetSuite record.

- **HTTP Method** – Select the type of network request that calls the RESTlet configured in the action.
 - **Convert Response to Object** – (Optional) Check this box to indicate that you want to convert the response from the validation RESTlet into an object.
- For navigation with client-side validation through Submit or Forward Form actions, you can enter values in the following fields:
 - **Client File Path** – Enter the file cabinet path to the client script that validates data from the client side.
 - **Client Function Name** – Enter the name of the function you want to call from the client script to validate data from the client side.

For information about mobile APIs that you can use for NetSuite WMS, see the help topic [SCM Mobile API](#).

- For the three page navigation types, you must add an input parameter that defines your target page. For Submit or Forward Form actions, if you set up server-side validation and navigation, you can add more input or output parameters that pass data to or from the RESTlet, respectively. For more information, see [Input Parameters for Navigation](#).
- For Forward Form and Submit Form actions, you can set up a RESTlet that is called before or after the main action. In the following fields, select a Restlet type of action:
 - **Before Action RESTlet** – Restlet action called before a Forward Form or Submit Form's main action.
 - **After Action RESTlet** – Restlet action called after a Forward Form or Submit Form's main action.

For example, if you add fields to a mobile page, set up RESTlets in these two fields. Set up a Before Action RESTlet that validates the field data before a Forward Form or Submit Form action is called. Then, set up an After Action RESTlet that submits data from your additional fields after the action is called. You can assign the RESTlets used in the standard mobile processes. For more information, see [Setting Up Additional Fields Through Mobile Customization](#).

To add parameters to your Restlet actions, see [Input Parameters for Data Validation, Storage, or Submission](#).

To view the complete list of fields for each mobile action type, see [Configuring Pages and Actions for Custom Mobile Processes](#).

Mobile Actions for Data Submission

The Submit Form action type performs both data submission and page navigation usually during a click action on a button or table. These page elements appear toward the end of the standard mobile process flow. Some standard processes enable multiple ways of submitting data, which may depend on the item type or system rules. They all submit and save data collected from the previous pages to the NetSuite transactions associated with the mobile process. They also display the confirmation or summary page.

Along with the main Submit Form action, you can set up additional mobile actions that perform tasks before or after the click action. On the Mobile - Action page, when you select the **Submit Form** action type, you can set up these fields for additional mobile actions:

- **Before Action RESTlet**
- **After Action RESTlet** – In this field, you can choose the mobile action, **UpdateAdditionalData**, used in standard mobile processes. It submits data collected from additional page elements added to a mobile process using the script, **customscript_mobile_rl_create_record**, and its deployment, **customdeploy_mobile_rl_create_record**.

For sample customizations that include this field, see [Setting Up Additional Fields Through Mobile Customization](#) and [Setting Up Image Capture or File Upload](#).

For more information about these fields, see [Mobile Actions for Page Validation and Navigation](#).

Mobile Actions for Page Element Events

For the On Load Action of page elements, except table elements, you can assign a mobile action that loads data or default settings. To set up default values using the On Load Action, see [Assigning Default Values to Field Elements](#).

Depending on the page element type, you can set up other events such as the following:

- On Select Action for Drop Down element types
- On Scan Action or On Validate Action for Text Box element types

On the Mobile - Action page for the event, you can set up the following mobile actions:

 **Note:** For the On Scan Action, you can set up mobile actions for page navigation and validation, aside from those in this list. See [Mobile Actions for Page Validation and Navigation](#).

- **Client Function** – Runs a function from a custom client script. You can set up Client Function actions also for on load events of a page. See step 1 of the instructions in [Customizing Mobile Actions](#).

To set up, enter values in the following fields:

- **Client File Path** – Enter the file cabinet path to your custom client script.
- **Client Function Name** – Enter the name of the function you want to run from the client script.

For information about mobile APIs that you can use for NetSuite WMS, see the help topic [SCM Mobile API](#).

- **Restlet** – Runs a RESTlet that performs tasks based on the event. You can use Restlet actions also for on load events of a page. See step 1 of the instructions in [Customizing Mobile Actions](#).

 **Tip:** To retrieve data from NetSuite records, you can set up Restlet or Saved Search actions. With Restlet actions, you can retrieve data from multiple records or sources.

For example, the standard Print button has a Restlet action for the Before Print Action that is called before the main Print action. It retrieves and stores the data you use in the print templates. To see how you can set up this Restlet action, see [Setting Up Print Button Actions](#).

To pass data to and from the RESTlet, you can add input and output parameters. See [Adding Parameters to Mobile Actions](#).

- **Saved Search** – Runs a saved search from which you can retrieve data.

To set up, in the **Saved Search** field, select a saved search from the list.

- **State** – Retrieves the value of a key from the state. You can retrieve data captured from a previous page and stored in the state.

To set up, in the **State Path** field, enter the state path for the key that contains the value you want to retrieve.

Example: dataRecord:scriptParams:barcodeLotname

This example shows the state path for the on load event of the Scan/Enter Lot field on the Enter Lot page. The mobile action retrieves the name of the lot item, which is captured from the previous page in the process flow. It associates the lot item with the lot number you enter on the current page.

For more information about states, see [Working with Mobile States as Data Source](#).

- **Show Message** – For the on click event of Dynamic Text elements, this action displays a message on a popup window. You can use this action also for on load events of mobile pages.

To set up, in the **Message** field, select an existing message or add your own message. You can choose a dynamic or static message.

For more information, see [Displaying Messages in Dynamic Text Elements](#).

To view the complete list of fields for each mobile action type, see [Configuring Pages and Actions for Custom Mobile Processes](#).

Mobile Action Sequence

You can set up an action sequence for any of the following mobile action types: Restlet, Print, Forward Form, or Submit Form. You can set up multiple actions that are called by the main action of a single event. You can add conditions that determine when the main action can perform the sub-actions in the sequence.

Example 4. Example

In the Pack Station app, the Add Carton button has an action sequence for its On Click Action. The sequence includes sub-actions to store the carton details, print the carton label, and then redirect you to the Pack Items page.

On the Mobile - Action page of the event, add each action in the sequence on the **Action Sequence** subtab using the following fields:

- **Sub-action Sequence #** – Enter the number that indicates the position of the sub-action within the sequence. Assign the number **1** to the first sub-action to be called.
- **Sub-action Of** – Select the main action to which you want to associate this sub-action.
- **Sequence Condition** – (Optional) Enter an expression that evaluates to true, which calls the sub-action, or false, which skips the action.
- **Sequence Action** – Select or add the mobile action you want to set up for this sub-action.

To view the complete list of fields for each mobile action type, see [Configuring Pages and Actions for Custom Mobile Processes](#). For information about setting up dynamic values in parameters and other customization fields, see [Working with Mobile States as Data Source](#).

Setting Up Custom Loading Text for Mobile Actions

For an Action field, such as the On Click Action or On Row Click Action, you can set up your own custom loading text that appears on the app. You can enter it on the Mobile – Action page that contains the **Loading Text** field. Your entry in this field replaces the default “Loading...” message, which appears after you perform an action on the app.

For example, you can begin by accessing the Enter Bin button element that appears on the Enter Bin page within your custom PO Receiving process. To provide your loading text, you can click the On Click Action of this button to open the Mobile – Action page. On this page, in the **Loading Text** field, you can enter “**Submitting receiving details...**”.

Refer to the instructions in the following Mobile Customization or Mobile Configuration topic:

- For custom mobile processes, see [Customizing Mobile Actions](#).
- For standard mobile processes, see [Cloning Standard Mobile Actions](#).

Unless you want to create your custom action, you can clone a standard mobile action first, and then assign your loading text to your copy. Either way, you can set up a copy or custom action for similar Action fields, such as the On Click Custom Action of a standard button element.

To set up loading text for your copy or custom action that you want to add to a new page element, see the following topics:

- [Adding Action Buttons Through Mobile Configuration](#)
- [Configuring Mobile Table Elements](#)
- [Configuring Mobile Page Elements](#)

If you want to create a custom mobile action for a standard or custom process, you can assign it your own loading text. Make sure that the mobile action you want to set up doesn't belong to the following types: Restlet, Saved Search, Send to State, State, and URL Navigation.

For the Action Sequence type of mobile action, you can enter separate loading texts for each sub-action regardless of its type. To apply one loading text for all sub-actions, click the **Apply Loading Text to All Sub-Actions** box. It overrides any loading text that you set up for all sub-actions. It also displays the **Loading Text** field in which you can provide your own generic loading text. If you leave this field blank, the app applies the standard "Loading..." text for all sub-actions instead.

Setting Up Custom RESTlets

Standard mobile processes use RESTlets to perform actions like obtaining, evaluating, or submitting data, among others. The mobile app displays data in page elements, submits them to NetSuite transactions, or uses them to validate your entries. If you use Mobile Printing, supported mobile processes use RESTlets to obtain print template data, evaluate printing rules, and perform printing tasks. Depending on your app requirements, you can create custom RESTlets that perform similar or other actions within mobile processes.

You can assign custom RESTlets to mobile actions in one of the following ways:

- Forward Form and Submit Form action types include a script ID field and a deployment ID field in which you can directly map RESTlets. You can map custom RESTlets that validate data on the server side. For Submit Form actions, the custom RESTlet may also submit data to NetSuite transactions.

Standard mobile processes commonly use Forward Form and Submit Form action types on the On Click Action of button elements. Other page elements like data tables include the On Row Click Action, which may be assigned either of these actions. On the app, you can tap a button or a row to process data from the page and then navigate to another page. You can set up a custom RESTlet that performs additional data validation or submission along with the main action.

For more information, see [Mobile Actions for Page Validation and Navigation](#).

- SCM Mobile provides the Restlet type of mobile action on which you can set up custom RESTlets that perform actions within a mobile process. You can assign Restlet mobile actions to the following:

- On Load Action of a page or page element

You can assign Restlet mobile actions to the On Load Action to perform tasks on mobile pages or load data for page elements. You can load data for new fields, popup messages, dropdown list options, and additional table columns, among others.



Note: Field elements like a Text Box or Dropdown include fields in which you can directly set up values or a source record. For more dynamic values or to obtain data from multiple sources, you can set up a RESTlet in the On Load Action instead.

Mobile pages have an After Load Action and On Popup Close Action that you can set up. To view the list of action fields on pages, see [Configuring Pages and Actions for Custom Mobile Processes](#).

- On Click Action, On Select Action, or On Scan Action of a page element

Depending on the page element, you can set up Restlet actions that run when you click buttons, scan bar codes, or select data. To view other actions available for each page element, see [Configuring Mobile Page Elements](#).

- Before Action RESTlet or After Action RESTlet of a Forward Form or Submit Form action type

Forward Form and Submit Form action types include fields for the Before Action RESTlet and After Action RESTlet. If you add custom fields or columns to mobile pages of a process, you can assign a custom RESTlet that validates these fields in the Before Action RESTlet. For a custom RESTlet that submits data from your custom page elements, you can assign it to an After Action RESTlet. Along with validation of standard data or submission to associated NetSuite transactions, the app validates or submits your additional data.

For a sample customization that includes this setup, see [Setting Up Additional Fields Through Mobile Customization](#).

- If you use Mobile Printing, SCM Mobile provides the Print type of mobile action that includes the Before Print Action. You assign a custom RESTlet to this action to perform tasks that you want to run before the main Print action.

Standard Print buttons contain a preconfigured Restlet action for this event that obtains data for print templates. If you create custom print templates, edit the parameters of this Restlet action to set up the source of data added to templates.

The Print action includes the Get File Path Action that you can also edit or set up with a Restlet action. You can set it up with a custom RESTlet that generates labels or documents.

For more information, see [Setting Up Print Button Actions](#).

To set up custom RESTlets:

1. Add your custom RESTlet to the mobile app's folder in your file cabinet. To access the folder, follow this path: SuiteBundles > Bundle <SuiteApp ID> > src. You can create a new folder or choose an existing one within it for your custom RESTlet files. See the help topic [Uploading Files to the File Cabinet](#). For information about SuiteApp IDs, see [SCM Mobile Setup](#).
2. Create a script record from which you can upload, deploy, and release your RESTlet.
Be sure to take note of the script ID and deployment ID for your custom RESTlet.
For instructions, see the help topic [Creating a Script Record](#).
3. After you deploy and release your RESTlet, set it up in a page or page element by doing the following:
 - a. Access the page or specific page element on which you want to set up the RESTlet.



Note: For standard mobile processes, you can set up custom RESTlets on some page elements through Mobile Configuration. To access page elements through Mobile Configuration, see [Configuring Mobile Page Elements](#).

- b. On the Mobile - Page page or Mobile - Page Element page, in the action field, you can edit the existing mobile action or add a new one.

You can choose an action field like an On Click Action or On Load Action. Page elements for standard processes include action fields like On Click Custom Action or On Row Click Custom Action.
- c. On the Mobile - Action page, you can set up your custom RESTlet in an existing Submit Form or Forward Form type of action. You can enter the RESTlet's script ID and deployment ID in the appropriate fields.

You can set the other fields on the Mobile - Action page, which vary depending on the action type. For instructions, see [Customizing Mobile Actions](#).

4. On the Mobile – Action page, you can click the **Input Parameters** or **Output Parameters** subtab to set up parameters. To pass data from custom fields on the app to your RESTlet, add input parameters. To store the RESTlet's response to the mobile state, you can add output parameters. You can assign conditions to any of your parameters.
5. After you save and complete all your customizations, be sure to apply your changes to the app. See [Compiling Mobile Customizations](#).

To set up a new Restlet type of action, see the following example of settings for steps 3 and 4:

Example 5. Example

You add a column to the items table to display the manufacturing part number (MPN) of an item within the PO Receiving process. You create a RESTlet that obtains the MPN from item records for the list of items on the purchase order being processed. To set up the RESTlet for the column through Mobile Configuration, create a Mobile – Custom Column Setup record. On this record, in the **On Load Action** field, add a mobile action. On the Mobile – Action page, set up a Restlet type of action by doing the following

- In the **Type** field, select **Restlet**.
- In the **HTTP Method** field, select **POST**.
- In the **Script ID** and **Deployment ID** fields, enter the corresponding IDs for your custom RESTlet.

To set up the additional column, see [Adding Columns Through Mobile Configuration](#).

After creating and saving a Restlet type of mobile action, add an input parameter that obtains the specific purchase order being processed. The app displays the list of items from the purchase order along with their MPN. To set up, on the Mobile – Input Parameter page, enter details in the following fields:

- In the **Name** field, enter a unique name for the input parameter.
- In the **Value** field, enter **state:dataRecord:scriptParams:transactionInternalId**, the path to the value from the mobile state. The **transactionInternalId** key in the state stores the internal ID of the purchase order being processed.
- In the **Key** field, enter the key from the RESTlet that corresponds to the value that you set up.

The key-value pair for the input parameter passes the internal ID to the RESTlet to specify the purchase order from which to obtain the list of items.

For more information, see [Adding Parameters to Mobile Actions](#).

Adding Parameters to Mobile Actions

In a custom mobile process, you can set up parameters for RESTlets within specific types of mobile actions. You can also set up parameters when you add specific custom page elements to standard mobile processes using RESTlets. You can add input parameters to pass data from the mobile app to a RESTlet. You can also add output parameters to obtain and store a RESTlet's response to the mobile state.

On the Mobile - Action page, you can set up or modify your parameters. When you add parameters, you define the data source and where you want to pass or store the data. For setup guidelines, see the following topics:

- [Input Parameters for Navigation](#)
- [Input Parameters for Data Validation, Storage, or Submission](#)
- [Output Parameter Settings](#)

For instructions on how to access the Mobile - Action page, see the following topics:

- For Mobile Configuration of standard mobile processes – [Configuring Mobile Page Elements](#)
- For Mobile Customization of custom mobile processes – [Customizing Mobile Actions](#)

Input Parameters for Navigation

For the Page Navigation, Forward Form, and Submit Form action types, add an input parameter that specifies the target page. On the **Input Parameter** subtab of the Mobile - Action page, tap **New Mobile – Input Parameter**. On the Mobile – Input Parameter page, enter values in the following fields:

- **Name** – Enter a unique name for the input parameter.
- **Key** – Enter **page_id**, the key used in standard RESTlets for the target page.
- **Value** – Enter the target page using keywords and the page name as follows:
 - For standard mobile pages, enter **constant:page_<page name>**
Example: constant:page_NSWMS_Main_Menu
 - For custom mobile pages, enter **constant:custom_page_<page name>**
Example: constant:custom_page_poReceiving_selectPOFromList

To set up these mobile action types, see [Customizing Mobile Actions](#).

Input Parameters for Data Validation, Storage, or Submission

Standard mobile processes use input parameters for RESTlets in Forward Form and Submit Form types of mobile actions. These actions pass mobile app data to RESTlets that validate them, store them in a state, or submit them to NetSuite transactions or records. You can find them in On Click Action events of a button element or On Select Action events of a table or list.

Within your custom mobile processes, you can add input parameters to pass additional details by specifying the data source. On the **Input Parameter** subtab of the Mobile - Action page, tap **New Mobile – Input Parameter**. On the Mobile – Input Parameter page, enter values in the following fields:

- **Name** – Enter a unique name for the input parameter.
- **Key** – Enter the name of the key or page element that serves as your data source.
- **Value** – Enter a constant to specify the value of the key, or a path to a source key or page element.

If you want to include an API call, using getSourceData() or getValue(), to obtain data from a page element, see the help topic [Mobile Page Element APIs](#).

Examples:

Sample Key	Value Format	Sample Value
customerId	State key path –	state:dataRecord:scriptParams:customerId
warehouseLocationId	state:dataRecord: <state object><state key>	state:dataRecord:auxParams:warehouseLocation_LocationTbId For more information, see Accessing Data Stored in the State .

Sample Key	Value Format	Sample Value
binName	Page element path – page: <page name>:<page element name>	page:poReceiving_enterBin_binListTbl:binName
selectedLotNumber	Popup page element path – popup: <element name>	popup:enterLot_lotTbl
transactionType	Constant – constant: <value>	constant:purchaseorder
stagingBins	Page element path with API call – page:<page element name>:<function>()	page:stagingbin_binstbl:getSourceData()

To set up these mobile action types, see [Customizing Mobile Actions](#).

Output Parameter Settings

You can add an output parameter to obtain the RESTlet's response and store it in a mobile state. To set it up, map the response key to the state key. On the **Output Parameters** subtab of the Mobile - Action page, click **New Mobile – Output Parameter**. On the Mobile – Output Parameter page, enter values in the following fields:

- **Name** – Enter a unique name for the output parameter.
 - **Response Key** – Enter the keyword, **response**, followed by the key in the RESTlet that contains the response data.
 - **Destination Key** – Enter the key in the state to which you want to store the response data.
- You can include an API call to set values in page elements based on data returned by the RESTlet or perform a task like `refreshElement()`. You can enter it using the following format: **page:**<page element name>:<function>(). For more information, see the help topic [Mobile Page Element APIs](#).

Examples:

Sample Response Key	Sample Destination Key
response:inforemainingQuantity	inforemainingQuantity
response:itemInternalId	itemInternalId
response:transactionType	transactionType
response:binTransferObj	binTransferObj
response:selectResponse	page:stagingbin_binstbl:select()
response	page:packItems_itemsTbl:updateData()

To add output parameters for Print button actions, see [Setting Up Print Button Actions](#).

Working with Mobile States as Data Source

Mobile states store data to make them available within the app. Data captured from a process page can be stored in the state and accessed on succeeding pages within the mobile process. At the end of a

process flow, the stored data can be saved to a NetSuite record or transaction. Data from custom fields that you add to standard or custom mobile processes can only be saved on NetSuite transactions.

Depending on your app requirements, you can add more data to the state. When you add or customize a page element, you can set it up to capture data to be stored in the state or display data from the state. For certain mobile actions associated with a page or page element, you can use state data to set up parameters.

Mobile apps store data in key-value pairs. State keys serve as unique identifiers to the data or values that are gathered from page elements or fields. In the following example, the list of state keys with sample values, to the right of the colon, pertain to item data:

- "fetchedititemid": "2891"
- "fetchedititemname": "AS5488"
- "imageurl": "https://1111111.app.netsuite.com/core/media/media.nl?id=5283&c=1111111&h=KAi1NEblkGzVQ6LyasBPh8xY5iFvdRMEy4yngfgTKwAniCC8"
- "item_type": "inventoryitem"
- "lineno": "2"
- "itemDescription": "Standard Desktop 64 GB"

These are some of the keys that are stored in the state for the Enter Quantity page of the PO Receiving process. When you select an item from the previous page, you can access the corresponding state data on the Enter Quantity page.

To use key-value pairs from mobile states, see the following topics:

- [Storing Data in the State](#)
- [Accessing Data Stored in the State](#)
- [Viewing State Data](#)

Storing Data in the State

You can customize page elements to capture data and store them in mobile states. On succeeding process pages within the mobile process, you can access and use the stored data.

You can store the data you enter or select in a field. You can also store data sourced directly from a NetSuite record or saved search. At the end of a process flow, the state data captured for the mobile process is cleared.

When you add a custom field through mobile configuration or customization, you can also set it up to store data in the state. The name you assign to your custom field or page element is used as the name of the key, which holds its data. The customization fields that you can set up to store data depend on the page element type and source data, as shown in the following table:

Element Type	Required Fields and Sample Settings	State Path *
Drop Down Text Box Date	To store data for body fields of a NetSuite record, set the following fields: Record Name - employee Field Name - firstname	state:dataRecord:<record>:<field> Example: If the element's name is first_name, the path to the key is as follows: state:dataRecord:employee:firstname:first_name

Element Type	Required Fields and Sample Settings	State Path *
	Given the sample settings, the data stored is for the firstname field of the employee record.	
	To store data for a sublist field or saved search, set the following fields: Record Name - employee Sublist Name - emergencycontact Field Name - firstname Given the sample settings, the data stored is for the firstname field within the emergencycontact sublist of the employee record.	state:dataRecord:<record>:<sublist>:<field> Example: If the element's name is first_name, the path to the key is as follows: state:dataRecord:employee:emergencycontact:firstname:first_name
	To store data temporarily for use within the mobile process only, in the Record Name field, enter aux.	state:dataRecord:auxParams Example: If the element's name is first_name, the state path to the key is as follows: state:dataRecord:auxParams:first_name
Dynamic Text Data Table Transfer Table Search Grid	To store data for a NetSuite record, set the following field: Record Name - employee Given the sample setting, the table or text data stored is for the employee record.	state:dataRecord:<record> Example: If the element's name is employee_table, the path to the key is as follows: state:dataRecord:employee:employee_table
* You can use the state paths to retrieve stored data from the state. See Accessing Data Stored in the State.		

For instructions on how to access these customization fields, see [Customizing Mobile Page Elements](#).

Aside from these page elements, you can also store data through output parameters used by RESTlets of certain mobile actions. See the following topics:

- [Output Parameter Settings](#)
- [Mobile Actions for Page Validation and Navigation](#)
- [Mobile Actions for Page Element Events](#)

Accessing Data Stored in the State

For your customizations, you can use data stored in the state to set up dynamic values for messages, field entries, labels, input parameters, conditions, and other page element settings. Mobile states contain standard keys that you can use for pages or page elements within a mobile process. You can also use keys that hold data for custom page elements that you set up. For more information, see [Storing Data in the State](#).

You can access data through the state path to its key. For the path, use the **state** keyword followed by **dataRecord**, the object in the state that contains data from mobile pages. Within the dataRecord object, you can find groups of keys stored in the following objects:

- **scriptParams** – This object contains the standard keys for transaction and other data used within a standard mobile process.

State path: **state:dataRecord:scriptParams**

Example: state:dataRecord:scriptParams:vendorName

This state path to the standard key, vendorName, enables you to retrieve the name of a vendor associated with a purchase order. Within the PO Receiving process, when you select a purchase order on a page, the associated vendorName key and its value are stored in the state for the succeeding mobile pages.

- **auxParams** – This object contains the keys for additional data that you set up during configuration or customization. It also contains data for the warehouse location that you select on the app.

State path: **state:dataRecord:auxParams**

Example: state:dataRecord:auxParams:customVendorName

If you store data for a custom field called customVendorName, this state path enables you to retrieve its value.

For more information, see [Displaying Messages in Dynamic Text Elements](#) or [Input Parameters for Data Validation, Storage, or Submission](#).

Viewing State Data

When you access a mobile page, you can view state data captured from it and from the previous pages within the process flow. The values in the state appear beside their corresponding keys. Each key is named after its data source field or column.

One way of viewing state data is through a browser's inspect element tool. If you use the Google browser, you can right-click anywhere on the mobile page and then select Inspect to display the tool. From the tool's menu, click Application. From the left panel, under the Storage section, expand Local Storage and then click the URL for app.netsuite.com. From the right panel, in the Key column, click psg-mobile-state. From the panel below or beside it, expand dataRecord object to view the keys under auxParams and scriptParams objects.

The following screenshot shows the scriptParams keys with sample values stored in the state for the Enter Quantity page:

The screenshot displays the browser's developer tools, specifically the Application tab under the Storage section. The left pane shows the Local Storage for the URL https://5293284.app.netsuite.com. The right pane shows the expanded 'psg-mobile-state' entry, which is a JSON object. The 'dataRecord' property is expanded, showing 'auxParams' and 'scriptParams' objects. The 'scriptParams' object contains a 'roleList' array and several key-value pairs: locUseBinsFlag (true), fetchedItemid (2891), fetchedItemname (AS5488), imageUrl (https://...app....dRMEy4yngfgTKwAniCC8), itemType (inventoryitem), lineno (2), poInternalId (829178), transactionName (PO1916), and transactionInternalId (829178).

Key	Value
psg-mobile-state	{"storageName":"psg-..."}
sm.error	1
sm.schedule	0
sm.status	{"at":0,"it":0,"rs":[],"un"...

```

{
  "auxParams": Object,
  "scriptParams": Object
    {
      "roleList": Array,
      "locUseBinsFlag": true,
      "fetchedItemid": "2891",
      "fetchedItemname": "AS5488",
      "imageUrl": "https://...app....dRMEy4yngfgTKwAniCC8",
      "item_type": "inventoryitem",
      "lineno": "2",
      "poInternalId": "829178",
      "transactionName": "PO1916",
      "transactionInternalId": "829178"
    }
  }
}

```

Instead of using the browser's tool, you can display key-value pairs from the auxParams and scriptParams objects on mobile pages. Depending on your Administrator or Manager role, access the Mobile – Settings page, and then check the **Debug State** box. When you access a mobile page while on Debug State mode, the state data appears at the top. For more information about mobile settings, see [Configuring SCM Mobile App Settings](#).

Refer to the following examples of key-value pairs ("key": value) from the state for the Enter Quantity page of the PO Receiving process:

- auxParams object key-value pairs

- `disableField(elementName)`
- `enableField(elementName)`
- `getElementSourceData(elementName)`
- `getValueFromPage(elementName)`
- `hideField(elementName)`
- `setElementSourceData(elementName, sourceData)`
- `setFocusOnElement(elementName)`
- `setValueInPage(elementName, value)`
- `showField(elementName)`

disableField(elementName)

Disables an element that is hidden from or displayed on a mobile page.

Parameters

- `elementName {string} [required]` – Name of the page element you want to disable

Returns

- `void`

enableField(elementName)

Enables an element that is hidden from or displayed on a mobile page.

Parameters

- `elementName {string} [required]` – Name of the page element you want to enable

Returns

- `void`

getElementSourceData(elementName)

Gets the source data of a dropdown, search grid, or data table element.

Parameters

- `elementName {string} [required]` - Name of the page element that contains the source data

Returns

- Returns the source data for the page element, usually an array of objects

getValueFromPage(elementName)

Gets the value of an element on a mobile page.

Parameters

- `elementName {string} [required]` – Name of the page element that contains the value

Returns

- The value of the page element, in the element's data type

hideField(elementName)

Hides an enabled or disabled element from a mobile page.

Parameters

- elementName {string} [required] – Name of the page element you want to hide from a mobile

Returns

- void

setElementSourceData(elementName, sourceData)

Sets the source data of a dropdown or data table element.

Parameters

- elementName {string} [required] - Name of the dropdown or data table element to which you want to assign the source data
- sourceData {Array of objects} [required] – The source data you want to associate with the page element

Returns

- void

setFocusOnElement(elementName)

Gives focus to any of the following input field elements on a mobile page: Textbox, Date, UOM, or Search Grid.

Parameters

- elementName {string} [required] - Name of the element you want to assign the focus to

Returns

- void

setValueInPage(elementName, value)

Sets the value of an element on a mobile page in the following ways:

- For Action Button elements, it sets the button's label.
- For Data Table elements, it selects the row that contains the values.
- For Data entry or selection elements, it sets the field value.

 **Note:** If no value is provided, it does not select any row from table elements or leaves data entry elements blank.

For the UOM element, the behavior depends on the value you provide:

- String - Sets the value for the quantity.
- Object - Sets the value for a single unit and quantity.
- Array of Objects - Sets or adds rows of units and quantity values.

Note: If no value is provided, it sets the default unit and leaves the quantity blank.

Parameters

- elementName {string} [required] – Name of the page element to which you want to assign the value
- value [optional] – Value you want to set in the element, in the element's data type, as shown in the following table

Data Type	Page Element	Example
String	Action Button, Date, Dynamic Text, Search Grid Textbox, UOM	Action Button example: Enter Item Dynamic Text example: <pre> 1 Preferred bin {{state:dataRecord:auxParams:prefBin}} 2
 3 Previous bin {{state:dataRecord:auxParams:prevBin}} </pre>
Object	Data Table, Date, Drop Down, Search Grid, UOM	Date example: <pre> 1 {"value": "29-JUN-2021", "format": "DD-MMM-YYYY"} </pre> Drop Down example: <pre> 1 {"label": "Good", "key": "1"} </pre>
Array	Multi-Select Data Table	Multi-Select Data Table example: <pre> 1 [{"poid": "PO 01", "#items": 4, "qty": 10}, {"poid": "PO 02", "#items": 5, "qty": 5}] </pre>
	UOM	UOM example: <pre> 1 [{value: 1, unit: '1'}, {value: 2, unit: '2'}] </pre>

Returns

- void

showField(elementName)

Displays an enabled or disabled element on a mobile page.

Parameters

- elementName {string} [required] – Name of the page element you want to show on a mobile page

Returns

- void

DateValue() API for Column Conditions

Use the DateValue() API for column conditions that you want to set up for a color. It enables you to specify, calculate, or compare dates that result to the date or dates you want to highlight on a table. For more information, see [Setting Up Table Row Colors](#).

Parameters

- Date string {string} [required] – Date you want to specify or use to calculate or compare with another date. You can enter **0** to set the current date in your condition. For dynamic values, you can use the **column** keyword to reference a table column.

Sample values: **8/8/2024**, **28/8/2024**, **0**, **column:poDate**

- Date format {string} [optional] – Format of the dates you want to highlight on the table. If not specified, the Date Format preference for your account is followed. Otherwise, the default format, **MM/DD/YYYY**, is applied. For possible date formats, see the help topic [Formatting for Dates, Numbers, Phone Numbers, and Time](#).

 **Note:** The Date format becomes required when you provide an Add-on. You can use empty double "" or single " quotes without specifying a format.

The format you provide must match the format of your date string value. If not, the condition automatically evaluates to false.

- Add-on {string} [optional] – Variable for calculation based on the date string value. You can include a plus or minus sign and any of these keywords: **m** (month), **d** (day), **y** (year).

Sample values for addition: **+1y2m**, **2m5d**

Sample values for subtraction: **-12d**

Examples of column conditions using the DateValue() API:

- **DateValue('9/28/2024','M/D/YYYY', '1y2m')**
This condition results to 11/28/2025 by adding 1 year and 2 months to the specified date.
- **DateValue({{column:poDate}}) > DateValue("8/8/2024") && DateValue({{column:poDate}}) < DateValue("8/8/2024","", "+4d")**
This condition results to purchase order dates on or between 8/9/2024 and 8/11/2024.
- **DateValue ({{column:poDate}}) == DateValue ("8/8/2024","", "+2d")**
This condition results to a purchase order date equal to 8/10/2024.

Mobile Sublist APIs

The following APIs enable you to work with data in sublists:

- [sum\(sublistLocation, fieldname, filterCondition\)](#)
- [count\(sublistLocation, filterCondition, uniqueFieldName\)](#)

sum(sublistLocation, fieldname, filterCondition)

Use this method to calculate the total value of data in a sublist column on a mobile page.

Parameters

- sublistLocation {string} [optional] – Name of the mobile page that contains the sublist

- `fieldname {string} [optional]` – Name of the field or page element used in the column that contains the numeric values you want to compute
- `filterCondition {string} [optional]` – An expression that evaluates to true or false

Returns

- Number

count(sublistLocation, filterCondition, uniqueFieldName)

Returns the total number of rows or lines in a sublist on a mobile page.

Parameters

- `sublistLocation {string} [optional]` - Name of the mobile page that contains the sublist
- `filterCondition {string} [optional]` - An expression that evaluates to true or false
- `uniqueFieldName {string} [optional]` - Name of the field or page element used in the column that you want to count. Only rows or lines that contain data in the field are counted

Returns

- Number

Mobile State APIs

The following APIs enable you to retrieve from or insert data into a state:

- [getRecordFromState\(\)](#)
- [setRecordInState\(dataRecord\)](#)

getRecordFromState()

Use this method to get the entire `dataRecord` object from a state.

Parameters

- None

Returns

- The `dataRecord` object that is stored in the state

setRecordInState(dataRecord)

Sets the `dataRecord` object for a state.

Parameters

- `dataRecord {Object}[required]` – The `dataRecord` object you want to add to a state

Returns

- void

Example


```
1 mobile.setRecordInState({ "sublistNames": [], "sublists": {}, "auxParams": { "recordLink": "", "Config_DropDown": { "label": 1, "value": 1 }, "Config_DropDown_1": { "value": 3, "label": 3 }, "UOM1_EnterItemID": "7" }, "scriptParams": {}, "process": { "name": "ConfigurationTest" } })
```

APIs to Call RESTlets

The following APIs enable you to call RESTlets and primary mobile actions:

- [callRestlet\(scriptId, deploymentId, restletParams, callback\)](#)
- [callPrimaryAction\(\)](#)

callRestlet(scriptId, deploymentId, restletParams, callback)

Use this method to call or execute a custom RESTlet. You can add parameters and a callback function to which you can pass the RESTlet's response.

Parameters

- `scriptId` {string} [required] – ID of the custom script record associated with the RESTlet you want to call
- `deploymentId` {string} [required] – ID of the custom deployment record for the script
- `restletParams` {Object} [optional] – Any parameters that you want to pass to your RESTlet
- `callback` {string} [optional] – Name of the function to which you want to pass the RESTlet's response

Returns

- void

callPrimaryAction()

Use this method to call the action associated with the Action Button element that is tagged as the primary action. In standard mobile processes, the primary action usually performs a data validation or submission, along with a move to the next page.

 **Note:** The Action Button element of the primary action must be located at the footer of a mobile page.

Parameters

- None

Returns

- void

Mobile Table APIs

If you enable multiple selection for Transfer Table elements, you can use mobile table APIs to specify a row or column click condition. These APIs retrieve the list of selected data from one side of the transfer table.

For more information, see [Multiple Row Selection for Transfer Tables](#).

getSelection()

Use this method to get all the selected rows from a Transfer Table element. It obtains selections either from the left or right side, but not both.

Parameters

- None

Returns

- Array of Objects

getLeftSelection()

Use this method to get all the selected rows from the left side of a Transfer Table element.

Parameters

- None

Returns

- Array of Objects

getRightSelection()

Use this method to get all the selected rows from the right side of a Transfer Table element.

Parameters

- None

Returns

- Array of Objects

Mobile Popup Window APIs

The following functions are available for elements on popup windows associated with a mobile page:

 **Note:** These functions cannot be called from a mobile page.

- [callPopupPrimaryAction\(\)](#)
- [setPopupElementSourceData\(elementName, sourceData\)](#)

callPopupPrimaryAction()

Use this function to call the action associated with the Action Button element on a popup window that is tagged as the primary action.

 **Note:** The Action Button element of the primary action must be located at the footer of a popup window.

Parameters

- None

Returns

- void

setPopupElementSourceData(elementName, sourceData)

Sets the source data of a dropdown or data table element on a popup window.

Parameters

- elementName {string} [required] - Name of the dropdown or data table element on a popup window
- sourceData {string} [optional] - The source data that contains the values you want to assign to the element

Returns

- void

Error

- Invalid or missing reference to a popup window

Customizing Mobile Popup Windows

You can create a custom mobile page and set it up as a popup window. Popup windows enable you to display messages, such as warnings and errors, without transferring to another mobile page. You can also use them to perform additional actions, aside from those included in the main process flow.

Within a custom mobile process, you can choose the page from which you want to display the popup window. On the mobile page, you can set up a popup window to appear through either of the following ways:

- An action done on a page element like a button click
For example, the Add Carton popup window appears when you try to pack an item before you add a pack carton.
- A call on, before, or after an action occurs, such as a page or page element load
For example, the Add Carton popup window can appear immediately after the Pack Items Into Cartons page is loaded.

For both options, you must set up a Forward Form action that points to the popup window as the target page.

Other customizations for your popup window may include adding elements to capture data, submitting data, or navigating to a page or another popup window. Note that any validations on the page that displays the popup window are still triggered during a popup window navigation or submission. If a validation error occurs on the page, the popup window action cannot be completed.

To customize mobile popup windows:

1. Access your custom mobile process by doing the following:
 - a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
 - b. On the Mobile - Applications List page, click **View** next to the mobile app.

- c. On the Mobile - Process List page, click **View** next to the custom mobile process that contains the popup window.
2. On the Mobile - Process page, on the **Pages** subtab, do one of the following:
 - To create a popup window, click **New Mobile - Page**.
 - To modify an existing popup window, click **Edit** next to its name.

The Mobile - Page page appears.
3. Enter or edit details in the following fields:
 - a. **Name** – Enter a unique name for the popup window.
 - b. **Title** – Enter the title, which appears on the mobile app.
 - c. **Type** – Select the type of mobile page, which is usually the **Process** type.
 - d. **Is Pop Up** – Check this box.
 When you check this box, the On Popup Close Action field appears. To set up the On Popup Close Action field, see step 5. If you clear this box, you also clear the field.
 - e. (Optional) To set up the On Load or After Load actions, see [Customizing Mobile Actions](#).
4. Add or edit page elements on your popup window.
 You can add a Dynamic Text element that displays a message on the popup window. To implement navigation on the popup window, you can add button elements such as the following:
 - You can add a button or other element that closes the popup window. Then, you can set up the On Close Popup Action to set up an additional action, such as data validation, that runs when you close the window. See step 5.
 - If you want to set up multiple popup windows that appear in sequence, you can add a button on each popup window. You can also add the Back button element to return to a previous popup window.

For instructions, see [Customizing Mobile Page Elements](#).
5. To set up page navigation and data submission in the On Close Popup Action field, see [Navigation and Data Submission for Mobile Popup Windows](#).
6. To set up the mobile page that displays your popup window, see [Displaying a Popup Window from a Mobile Page](#).
7. Click **Save**.
8. To apply your updates to the mobile app, see [Compiling Mobile Customizations](#).

Navigation and Data Submission for Mobile Popup Windows

You can set up a mobile action that is called when you close a popup window. You can assign an action that validates data in the popup window fields and saves them to a NetSuite record. Depending on your business requirements, you can also include navigation to another page or popup window.

On the Mobile - Page page for the popup window, in the **On Popup Close Action** field, you can choose an existing action or create a new one.

 **Note:** The On Popup Close Action does not apply to the **X** button, which is a default button on popup windows. This button closes the popup window to return the focus back to the mobile page.

If you want to create or edit a mobile action, on the Mobile - Action page, set values in the following fields:

1. **Name** – Enter a unique name for the mobile action.
2. **Type** – Select one of the following types of mobile actions:
 - **Forward Form** – Use this action type to redirect to the mobile page that displays the popup window.
 - **Submit Form** – Set up this action type to submit data from the popup window, before you are redirected to a target page.
 - **Action Sequence** – Set up this action type if you want to assign different actions to multiple buttons on your popup window. You can set up a different target page for each action that you assign to a button or other element.

3. Depending on the mobile action type, you can set up the other fields, such as those for the RESTlets that validate or submit data.

For more information, see [Mobile Actions for Page Validation and Navigation](#) or [Mobile Action Sequence](#).

4. Depending on your popup window requirements, you can add input and output parameters. For the Forward Form action type, you must set up an input parameter for the target page, which is the page that displays the popup window.

To add a parameter, on the **Input Parameter** subtab, click **New Mobile - Input Parameter**. On the Mobile - Input Parameter page, set values in the following fields:

- **Name** – Enter a unique name for the input parameter.
- **Key** – To set up a target page, enter **page_id**, the default key in the state that stores the name of a mobile page



Tip: If you set up a RESTlet, you can add input and output parameters that handle the transfer of data. See step 3.

- **Value** – Enter the keyword, **constant:custom_page_**, followed by the name of the target mobile page.

For example, if the name of the mobile page is pagename_abc, enter constant:custom_page_pagename_abc.

- (Optional) You can use the **Condition** and **Resolution** fields to set up conditional page navigation.

You can use a condition to set up navigation either to the mobile page or another popup window.

Repeat this step to add more parameters to the mobile action. For more information about mobile actions, see [Customizing Mobile Actions](#).

5. Click **Save**.

To continue your popup window setup, see [Customizing Mobile Popup Windows](#).

Displaying a Popup Window from a Mobile Page

From a mobile page, choose the element, usually a button, that displays the popup window. Alternatively, you can set it up in the On Load or After Load Action of the page. Then, set up a Forward Form action by following the instructions in this procedure.

To display a popup window from a mobile page:

1. Access the Mobile - Page page that contains the page element or load action.

- a. Using the Administrator role, go to Setup > Custom > Mobile - Applications.
- b. On the Mobile - Applications List page, click **View** next to the mobile app.
- c. On the Mobile - Process List page, click **View** next to the custom mobile process that contains the popup window.
- d. On the Mobile - Process page, on the **Pages** subtab, do one of the following:
 - To create a new page, click **New Mobile - Page**.
 - To modify an existing page, click **Edit** next to its name.

The Mobile - Page page appears.

2. Depending on how you want to display the popup window, do one of the following:
 - Next to the **On Load Action** or **After Load Action** field, select the Forward Form action that displays the popup window.
 - On the **Page Elements** subtab, click **Edit** next to the page element. Then, on the Mobile - Page Element page, next to the action field, select the Forward Form action that displays the popup window. For button elements, you can set it up in the On Click Action field.

Alternatively, if you want to edit an existing Forward Form action, click the open icon. To create a mobile action, click the plus icon.

3. On the Mobile - Action page, enter or select values in the following fields:
 - **Name** - For a new action, enter a unique name for the Forward Form action.
 - **Type** - Select **Forward Form**.
 - (Optional) Set the other Forward Form action fields.

See [Customizing Mobile Actions](#).
4. For a new action, click **Save**, and then edit the saved action to set up its input parameter.
5. On the **Input Parameters** subtab, click **New Mobile - Input Parameter** to add a parameter or click **Edit** next to an existing one.
6. On the Mobile - Input Parameter page, enter values in the following fields:
 - **Name** - For new parameters, enter a unique name for the input parameter.
 - **Key** - Enter **page_id**, the key in the state that stores the name of a mobile page or popup window.
 - **Value** - Enter the keyword, **constant:custom_page_**, followed by the name of the mobile page that you have set up as a popup window.

For example, if the name of your popup window is popupwindow_123, enter constant:custom_page_popupwindow_123.
7. Click **Save**.

To continue your popup window setup, see [Customizing Mobile Popup Windows](#).

Compiling Mobile Customizations

After you save all your customizations, you must compile them to update the mobile app.

To compile your mobile customizations:

1. Go to Setup > Custom > Mobile - Applications.
2. On the Mobile - Applications List, click the **Update App** link next to the mobile application.

Wait for the confirmation message to appear before you try to access the mobile app. To view the status of your update, click the link on the processing message at the top of the page.

If you encounter an error or if you do not see the updated process on the app, the updates may have exceeded the file size limit. For more information, see [Mobile Customization Guidelines and Limitations](#).

Exporting Mobile Processes

After you complete your customizations on a custom process, you can export it. For standard processes, you can export updates made through Mobile Configuration.

When you export standard and active custom mobile processes, you generate an appConfig.js file. You can export standard processes one at a time and multiple custom processes at a time. One file is generated for each export.

You can save exported appConfig.js files to a local folder on your computer. You can import it into another NetSuite account that uses the same app.



Note: NetSuite accounts for exports and imports cannot be on different NetSuite versions and different SuiteApp versions. The accounts should also have the same language preference setting. See [Language Preference Setup for SCM Mobile](#).

For example, you can export from and import into accounts that have the same latest NetSuite version, NetSuite WMS SuiteApp version, and SCM Mobile SuiteApp version. You cannot import from an account with a Spanish language setting to an account with an English language setting.

To export custom mobile processes:

1. Go to Setup > Custom > Mobile - Applications.
2. On the Mobile – Applications List page, click **View** next to the mobile app that contains the process.
3. On the Mobile – Process List page, click **Export Processes**.
4. On the Mobile – Export Process page, select either **Custom Process** or **Standard Process**.
5. In the **Mobile Process** field, select a standard process or multiple custom processes.
6. Click **Export**.

On the Processing banner, a message appears with a link, which you can click to view the status of the export.

7. After your export has been completed, a confirmation message appears with a link to view the exported files. This opens the download history panel on your browser.

Alternatively, to view the appConfig.js file, you can access your Downloads folder or the default folder in which you store downloaded files.

You can import the appConfig.js file for the exported mobile processes into another NetSuite account. See [Importing Mobile Processes](#).

Importing Mobile Processes

You can import standard and custom mobile processes. You can import a custom process to create a copy for the same app within another NetSuite account. The other account must not contain a custom

process that has the same name as the custom process you want to import. For a standard process, you can import updates made through Mobile Configuration. You apply the updates to the corresponding standard process of the same app within another NetSuite account.

Note: NetSuite accounts for exports and imports cannot be on different NetSuite versions and different SuiteApp versions. The accounts should also have the same language preference setting. See [Language Preference Setup for SCM Mobile](#).

For example, you can export from and import into accounts that have the same latest NetSuite version, NetSuite WMS SuiteApp version, and SCM Mobile SuiteApp version. You cannot import from an account with a Spanish language setting to an account with an English language setting.

To import custom mobile processes:

1. Using the Mobile – Administrator role, go to Setup > Configuration > Import Custom Process. The Import Assistant page appears.
2. For Step 1: Scan and Upload Application File, do the following:
 - a. In the **Custom Application File** field, click **Browse**.
 - b. On the **File Upload** popup window, search for the folder that contains the exported appConfig.js file for the custom mobile processes.
 - c. Select the file from the folder, and then click **Open** to close the popup window.
 - d. Click **Next**.
3. For Step 2: Start Import Process, do the following:
 - a. In the **Start Import: Custom Mobile Process** field, select the process you want to import.
 - b. Click **Finish**.
The Scheduled Script Status page appears on which you can monitor the status of your import.
4. On the Scheduled Script Status page, monitor the status of a custom process import by doing the following:

Note: For standard processes, you can view the import status by going to Setup > Configuration > Import Status.

- a. Click **Refresh** to view the latest status.
 - b. Make sure that the processes for the following scheduled scripts have been completed:
 - Script 1: Mobile - Process Cloning On Demand
Deployment: customdeploy_mobile_ss_ondemand_cloning
 - Script 2: Mobile - Synchronization On Demand
Deployment: customdeploy_mobile_ss_ondemand_sync
5. After you have verified that the import scripts have been completed, apply your updates to the mobile app. For instructions, see [Compiling Mobile Customizations](#).
To make sure that mobile app has been updated, verify that the processes for the following scheduled scripts have been completed:
 - Script 1: Mobile - Scheduled Generate App Config
Deployment: customdeploy_mobile_ss_ondemand_app_conf
 - Script 2: Mobile - Update Process Labels
Deployment: customdeploy_mobile_ss_upd_process_lab2

Repeat the procedure if you have more custom mobile processes to import. To view the imported processes of a mobile app, you can go to Setup > Configuration > Applications.

Restoring Mobile Processes with Imported Updates

When you perform a standard mobile process import, a backup file is generated or updated to store the current state of the process. The mobile app uses this file to restore a process and return it to the state prior to the latest import. It does not restore to the original state, in case you have imported a process multiple times.

Restoring standard mobile processes removes only the updates obtained from the latest import.

Before you restore a standard process, you can view the details of the latest import. Using the Mobile - Administrator role, go to Setup > Configuration > Import Status.

To restore mobile processes:

1. Go to Setup > Custom > Mobile - Applications.
2. On the Mobile - Applications List page, click **View** next to the mobile app that contains the process.
3. On the Mobile - Process List page, click **Restore Backup Process**.
4. On the Mobile - Restore Backup Process page, do the following:
 - a. In the **Standard Mobile Process** field, select the process you want to restore.
 - b. Click **Restore**.

A message appears with a link that you can click to view the job processing status. Verify that the job has been completed before you access the mobile app.

Troubleshooting Customizations

This section provides troubleshooting guidelines and procedures for mobile app customizations. It covers the issues that you may encounter when mobile page elements or processes are set up incorrectly or if components and requirements are missing.

Example 6. Issue

Images captured through the app do not appear on the Mobile App Attachments subtab of the target transaction.

Action Required: Check for errors by going to Setup > Custom > Attach Mobile App File. On the Attach Mobile App File page, click **More**, and then select **View App Attachments**. On the Mobile - App Attachment List page, see if any of the following entries appear in the **Attachment Failure Reason** column.

- If there is no entry, you can return to the Attach Mobile App File page to run the script for attaching uploaded files. See [Capturing and Attaching Files Through the App](#).
- **Invalid or Empty Source/Transaction ID** – This message appears if the reference transaction is not set correctly. The **Reference Transaction ID** column may not show any value.

To check your settings, access the associated Capture Image icon or Upload File icon record. In the **Reference Transaction State Path** field, update any spelling or capitalization errors. For detailed instructions, see [Setting Up Image Capture or File Upload](#).