

ORACLE
NetSuite

Customization



2025.2

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

Customization	1
Customization Overview	2
Forms	4
Forms Use Case	5
Record Types	7
Equipment Service Example using Custom Record Types	8
Transaction Types	11
Segments	11
Advanced Templates	12
Centers	13
Customization Best Practices	15
Optimize Your Custom Fields and Custom Forms	15
Plan Ahead and Make Use of Existing Standard Features	15
Set Up Internal Controls	16
Know When to Use SuiteFlow and SuiteScript	16
SuiteFlow vs. SuiteScript	17
Conventions for Naming Custom Objects	17
Changing the ID of a Custom Object	19
Customizing Field Level Help for Standard Fields	20
Standard Field Level Help Customization Page	23
Custom Fields	25
Custom Fields Videos	26
Field Type Descriptions for Custom Fields	27
System Notes for Changes Made in Text Type Fields	31
Custom Field Types	32
Available Standard Fields and Field Types	33
Transaction Body Fields	33
Transaction Line Fields	35
Transaction Item Options	37
CRM Fields	37
Entity Fields	39
Item Fields	40
Creating a Custom Field	41
Creating Custom Fields by Type	44
Assigning Custom Fields to Specific Record Types	61
Behavior of View from Order Only Settings on Transaction Line and Transaction Body Custom Fields	63
Setting Display Options for Custom Fields	66
Setting Validation and Defaulting Properties	70
Setting Sourcing Criteria	74
Sourcing and Filtering Examples	78
Setting Filtering Criteria	80
Dependent Dropdown Lists	81
Restricting Access to Custom Fields	97
Restricting Access to Employee Custom Fields	99
Creating Read-Only Custom Fields	100
Adding Translations for Custom Fields	100
Adding Custom Fields to Transaction Forms	101
Tracking Changes to Custom Fields	102
Inactivating a Custom Field	103
Editing a Custom Field	104
Maintaining Saved Searches that Include Edited Custom Fields	106
Converting the Field Type of a Custom Field	106

Account-Specific Domains in Custom Fields	109
Renaming Custom Fields	109
Mass Updating Custom Fields	110
Advanced Features for Custom Fields	110
Encrypted Custom Field Stored Values	111
Creating Custom Fields with Values Derived from Summary Search Results	111
Dynamic Defaults and Dynamic Hyperlinks	114
Creating Formula Fields	118
Custom Lists	122
Creating a Custom List	123
Adding Translations for Custom Lists	124
Managing Large Custom Lists	125
Custom Forms	127
Form Templates	128
Advanced PDF/HTML Templates	129
Basic Layouts for Transaction Forms	129
Creating Custom Entry and Transaction Forms	130
Viewing Completed Custom Entry and Custom Transaction Forms	131
Custom Entry Form Properties	132
Custom Transaction Forms Properties	133
Storing Custom Forms with Transactions	134
Configuring Subtabs for Custom Entry and Transaction Forms	136
Moving Fields and Lists Between Subtabs	136
Configuring Field Groups	137
Configuring Fields or Screens	139
Configuring Buttons and Actions	143
Configuring Printing Fields	146
Configuring Sublists	147
Configuring Sublist Fields	148
Configuring QuickViews	149
Associating Custom Code (Client SuiteScript) Files With Custom Forms	152
Defining Preferred Forms	153
Adding Disclaimers to Transaction Form Footers	155
Specifying Check Layout by Subsidiary	156
Customizing Multiple Page Transaction Forms	156
Linking Transaction Forms	157
Transaction Form Printing Preferences	157
Transaction Forms and Company Printing Preferences	158
Setting Transaction Forms to Print in Landscape	158
Transaction Forms and User Printing Preferences	159
Browser Print Settings for Transaction Forms	159
Creating Custom Subtabs	159
Creating a Subtab from the Custom Subtabs Page	160
Creating Custom Note Forms	161
Creating a Custom Note Form	161
Creating a Custom Field for use in Custom Note Forms	162
Using Custom Note Forms	162
Customizing Address Forms	162
Creating a Custom Address Form	163
Change to Required Permission for Attaching Scripts to Custom Address Forms	164
Creating Custom Address Fields	164
Country-Specific Address Forms	165
Custom Sublists	165
Saved Searches for Custom Sublists	165
Applying Custom Sublists to Standard Records	167

Applying Custom Sublists in SDF-Enabled Accounts	169
Applying Custom Sublists to Custom Record Types	170
Example of Dynamically Filtering a Custom Sublist by a Record Field	173
Custom Child Record Sublist Creation with SuiteScript	174
Customizing a Transaction Sublist	182
Filtering and Sorting Bills by Custom On Hold Field Example	183
Custom Records	185
Creating Custom Record Types	186
Creating a New Custom Record Type	187
Entering Name and Display Settings	187
Specifying Permission and UI Settings	188
Configuring File and Child Record Settings	192
Defining Search and Edit Settings	193
Adding Fields to Custom Record Types	198
Limiting Search Access to Custom Records	199
Applying Role-Based Restrictions to Custom Records	199
Adding Subtabs to a Custom Record	201
Choosing an Icon for a Custom Record	202
Numbering Custom Record Types	207
Adding Custom Forms for a Record	208
Online Custom Record Forms	208
Setting Up a Permissions List for a Custom Record Type	215
Creating Links to Custom Records	216
Adding Translations for Custom Records	217
Parent-Child Record Relationships	221
Establishing a Parent-Child Relationship	222
Creating a Parent-Child Relationship	224
Types of Parent-Child Relationships	226
Using Child Records	234
Sourcing with Custom Records	235
Available Standard Fields and Field Types for Custom Record Types and Source Lists	237
Updating Custom Record Types	238
Viewing or Editing a Custom Record Type	239
Updating Custom Record Type Print Templates	240
Custom Record Types Associated with a Custom Segment	241
Using Custom Record Entries	242
Searching Custom Record Entries	245
Custom Segments	247
Benefits of Custom Segments	248
Configure Segment Values to Be Hierarchical	249
Configure a Segment to Default Statically or Dynamically	249
Filter a Segments Values Based on Other Segments	250
Filter a Segment's Values Based on Class, Department, Location, and Subsidiary	250
Configure a Segment to Appear on the GL Impact Page	251
Create Segments as Multi-Select Fields	251
Display Segments Selectively	252
Set Custom Segment Values	252
Custom Segments Overview	253
Enabling the Custom Segments Feature	253
Transaction Types Supported by Custom Segments	253
Settings that Affect Where Custom Segments are Applied	255
Permissions for Managing Custom Segments and Values	257
Granting a Role Permission to Manage Custom Segments	257
Granting a Role Permission to Manage Custom Segment Values	259
Custom Segment Creation	261


Custom Segment Types	261
Creating a Custom Segment	263
Configuring GL Impact for a Custom Segment	266
Filtering for a Custom Segment	268
Applying a Custom Segment to Record Types	279
Apply to Kit or Assembly Components Setting for Custom Segments and Transaction Line	
Custom Fields	280
Dynamic Default Value Sourcing for Custom Segments	282
Validation and Static Default Values for Custom Segments	288
User Permissions for a Custom Segment	289
Dependent Segments	292
Setting Display Order of All Custom Segments	292
Editing Custom Segments	293
Required Permissions for Editing Custom Segments	294
Inactivating a Custom Segment	295
Deleting a Custom Segment Definition	295
Custom Segment Values	296
Value Creation for Custom Segments	297
Creating Hierarchies Among the Values of a Custom Segment	300
Edit the Values of a Custom Segment	302
Changing the Order of Values for a Custom Segment	304
Making Values of a Custom Segment Inactive	305
Deleting the Values of a Custom Segment	306
Using the Script ID to Access Custom Segment Body, Line, and Filter By Fields	308
Custom Segments in Record Searches	308
Customizing a Report by Using Custom Segments	309
Using Custom Segments in Workflows	309
Custom Segments as Fields	310
Records that Represent Custom Segment Values	311
SuiteScript and Custom Segments	312
SOAP Web Services and Custom Segments	313
CSV Import and Custom Segments	313

Customization

- [Customization Overview](#)
- [Customization Best Practices](#)
- [Custom Fields](#)
- [Custom Forms](#)
- [Advanced PDF/HTML Templates](#)
- [Advanced Template Reference](#)
- [Basic Printing Layouts](#)
- [Custom Records](#)
- [Custom Transactions](#)
- [Custom Segments](#)
- [Custom Centers](#)
- [Deploying Upgraded Forms](#)

Customization Overview

With the customization tools, you can tailor NetSuite to your individual business needs and processes. Customization provides a point-and-click interface for creating various components, such as fields, forms, and record types. Customization also lets you define how information is accessed and entered by each user of your NetSuite account.

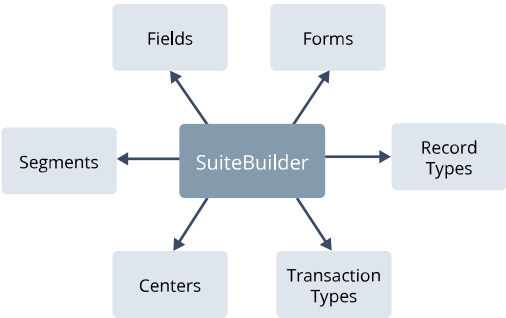

Customization Users

There are three types of Customization users:

- **Administrators** – Administrators spend time customizing transaction forms, adding custom record types, and setting up custom centers for roles within the company. Some of the customization work is unique to a specific business. Administrators also assign roles to each NetSuite user. Each user's role determines which information they can access in your NetSuite account.
- **IT Staff** – Issues addressed by the IT department often include requests for changes to the NetSuite account. These issues can range from small tasks such as adding a field to a form, to larger work items like creating custom record types. IT staff members can access administrative tools to manage data and schedule batch processing jobs.
- **Developers** – For developers of partner solutions and independent software vendors (ISVs), most of their time with NetSuite is spent coding SuiteScript and SOAP web services. To use these features, developers need to understand how customization objects interact with their code.

Customizing NetSuite Components

No matter your experience with other software applications, Customization can help you set up NetSuite quickly. Use Customization to customize the components that control how your users interact with NetSuite.

Access Information

To define how users interact with NetSuite and what data they have access to, you can configure these components.

Component	Description	More Information
Role	Set of permissions that can be assigned to a NetSuite user	Customizing and Creating Roles

Component	Description	More Information
Center	Configuration of NetSuite created for a specific group of roles with similar tasks.	Creating and Editing Custom Centers
Center tab	Section of NetSuite that groups similar links and other information. Standard tabs include Home, Reports, Documents, Activities, and Setup. You can also create custom center tabs.	Creating Center Tabs

Set Up Data

To define how to get the most out of your NetSuite implementation, use these components to configure your data.

Component	Description	More Information
Record	A single entry of information related to a single business concept. Use custom records to collect information specific to the needs of your business.	Custom Records
Segment	A single entry of information related to a single business concept. Use custom segments to create custom classification fields similar to class, department, and location.	Custom Segments
Transaction	A single entry of information related to a single business concept. Use custom transactions to create transaction types tailored to your business needs.	Custom Transactions
List	List of values that can be selected in a custom field. Use custom lists to set up predefined choices for your employees and customers to select when entering transactions and records.	Custom Lists
Template	A single entry of information related to a single business concept. Use advanced templates to customize printed and emailed forms, records, and saved searches.	Advanced PDF/HTML Templates

Collect and Display Data

To collect and display data within NetSuite, you must use forms. A form is a page through which you enter records and transactions. Use these components to build your own forms or customize an existing form.

Component	Description	More Information
Field	Place on a record or transaction where information is entered.	Custom Fields
Subtab	Section of a record or transaction that groups similar fields. An example of a standard subtab is the Address subtab where the shipping and billing addresses are entered on transactions and records.	Creating Custom Subtabs
Sublist	The results of a saved search displayed on a custom or standard record. Sublists can also be generated through parent-child relationships.	Custom Sublists

Component	Description	More Information
Script	SuiteScript JavaScript file that runs against a specific form or record type or that creates a custom portlet. Scripts can also be scheduled to perform periodically.	SuiteScript Overview

Customization Objects in SDF

You can manage custom objects in SuiteCloud Development Framework (SDF). SDF uses XML definitions of custom objects to work with the object attributes, fields, fields structures, field properties, field values, and other details. For more information, see .

If the Multi-Languages feature is enabled in your account, you can define translated labels of customization objects, records, or fields to be used for various language settings. For more information, see the help topics [Manage Translations](#) and [SuiteApp Translatability Support](#).

When working with custom objects that have translatable fields, you can use a translation string from a collection. For more information about translatable fields, see the help topics [Translatable Fields on SDF Custom Objects](#) and [Translatable Fields in SuiteCloud Development Framework](#).

For more information about developing custom objects in SDF, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

Customize Your NetSuite Account

Now that you know what components can be customized, explore the following topics to learn more about customizing your NetSuite account:

- [Forms](#)
- [Record Types](#)
- [Transaction Types](#)
- [Segments](#)
- [Advanced Templates](#)
- [Centers](#)

Forms

NetSuite offers standard forms for entering business-related data, and you can use them to store various types of records. There are forms for every record you can store in your NetSuite account, including transactions, entities (for example, Customers and Vendors), Items, and CRM activities. For a complete list of supported record types, see the help topic [NetSuite Record Types](#).

You can tailor standard forms to meet your business needs using customization options.

Project Office Refurb Roswell Studios

Save Cancel Search Actions

Primary Information

Custom Form * Standard Project Form 1

Job Id * Office Refurb ☒ Auto

Project Name Office Refurb

Customer Roswell Studios

Project Manager

Status In Progress

Language English (U.S.)

> Project Overview

> Project Dates

☐ Export To Openair

Schedule Resources Financial Project Indicators P&L Work Breakdown Structure Budget Relationships Communication Related Records Preferences System In

Project Tasks / Milestones

View Planning

New Project Task New Milestone View Gantt Chart Customize View

Edit	ID	Milestone	Name	Expand All	Collapse All	Predecessors	Start Date	End Date	Planned Work	Calculated Work	Estimated Cost	Copy Task
Edit	1	Yes	Schematic				1.8.2013	1.8.2013	0	0	0.00	Copy
Edit	2	No	Installation				1.8.2013	12.8.2013	120	120	12,000.00	Copy

Save Cancel Search Actions

Forms consist of the following key components:

1. **Fields** – Fields are used to display and enter data. If you don't see the information you need on a form, you're able to create custom fields and add them to the form. After the form is submitted, custom field information is stored in the same way as standard field information. For more information, see [Custom Fields](#).
2. **Subtabs** – Most forms are divided into subtabs, which group similar fields together. For example, the Schedule subtab contains project tasks and milestones. Custom subtabs let you to organize custom fields on records in a way that makes sense for your business. Note that the field area displayed at the top of a form by default is considered to be on the Main subtab. For more information, see [Creating Custom Subtabs](#)
3. **Sublists** – You can also add custom sublists to your forms. Sublists can display either saved search results relating to the record on which they're shown, or can display child record instances related to parent record using the relationship field. For example, you can add a custom sublist to track specific milestone details. For more information, see [Custom Sublists](#).

For an example use case, see [Forms Use Case](#).

For more information, see [Custom Forms](#).

Forms Use Case

This topic provides an example use case for forms. For general information about forms, see [Forms](#).

A custom field has been added to this sales order form to show the approval status.

Sales Order SORD10003 James Page Billed

☐ Accounting Approval ☐ Accounting Approved Approval Status: **Approved**

Primary Information

Order # SORD10003
Customer James Page
Date 10.3.2003
Start Date
End Date
Po #

Sales Channel
Memo
☐ For Invoice Grouping

Summary

Total (alt. Sales)	0.00
Subtotal	700.00
Discount Item	
Tax Total	
Shipping Cost	
Handling Cost	
Gift Certificate	
Total	700.00

Sales Information

Sales Rep Jon Baker
Opportunity
Sales Effective Date 10.3.2003
☐ Exclude Commissions
Lead Source 561 Spring Catalog
Partner

Forms are often organized into subtabs, which group similar fields together. Subtabs bring together fields with similar information, making it easier to find what you need. For example, the Address subtab is where shipping and billing addresses are entered. In addition to using standard subtabs, you can create subtabs for custom fields.

A custom Warranty subtab has been added to this sales order form to track warranty details through the **Warranty Number** and **Warranty Term** custom fields.

Sales Order SORD10003 James Page Billed

☐ Accounting Approval ☐ Accounting Approved Approval Status: **Approved**

Primary Information

Order # SORD10003
Customer James Page
Date 10.3.2003
Start Date
End Date
Po #

Sales Channel
Memo
☐ For Invoice Grouping

Summary

Total (alt. Sales)	0.00
Subtotal	700.00
Discount Item	
Tax Total	
Shipping Cost	
Handling Cost	
Gift Certificate	
Total	700.00

Sales Information

Sales Rep Jon Baker
Opportunity
Sales Effective Date 10.3.2003
☐ Exclude Commissions
Lead Source 561 Spring Catalog
Partner

Warranty

Warranty Number: WRNT-EC1243020
Warranty Term: 1 year - parts & labor

Forms can also include custom sublists, which display relevant information. Sublists show saved search results that are relevant to the current record. For instance, a custom sublist on a vendor form can display frequently purchased items.

To get started, create a saved search for items. On the Results subtab, select the columns you want to appear on the sublist. On the Available Filters subtab, select **Vendor: Name/ID**. The filter enables the sublist to show only items purchased from the vendor. For more information about saved search filters, see the help topic [Selecting Available Filters for Saved Searches](#).

Currencies • Pricing Schedules • ACH Transactions • Items • Rates Preferred Items •					
EDIT	NAME	DISPLAY NAME	DESCRIPTION	TYPE	BASE PRICE
Edit	Bio Therapy : Hirudo Medicinalis	Hirudo Medicinalis	Hirudo Medicinalis for Bio Surgery	Inventory Item	140.00
Edit	Bio Therapy : Phaenicia Sericata Larvae	Phaenicia Sericata Larvae	Phaenicia Sericata Larvae for Debridement Therapy	Inventory Item	70.00

You can also create a sublist that displays child record instances using the Parent is Child relationship field. For example, you can create a custom field and assign the parent record and child record so that the parent record pulls in the child record information through the custom field. The following example shows a list of customers associated with case records. In this example, the parent record is Case, the child record is Customer, and the parent subtab where the sublist appears is Related Records.

First, you create an entity custom field called Customer Records. For Type, select List/Record. For List/Record, select Case. Check the Record is Parent box. On the Applies to subtab, check Customer. On the Display subtab, for Parent Subtab, select Related Records.

Now, when you view a Case record, a Customers sublist appears with a Customer field that displays a list of customers associated with the case.

Record Types

You can create custom record types to collect and store information not included in NetSuite. For example, your company may need to track computer and electronic equipment information. If there isn't a suitable standard record type in NetSuite, you can create a custom record type called Equipment. Next, add custom fields to collect and store the necessary equipment information. For more information about the platform tools supported by custom record types, see the help topic [SuiteCloud Supported Records](#).

Custom Record Type
Equipment

Save Cancel Change ID Actions

Name: Equipment
ID: customrecord26
Internal ID: 26
Originating Custom Segment

Owner: Wolfe, J Wolfe, J
Description:
☒ Include Name Field
☐ Show ID
Show Creation Date: ☐ On Record ☐ On List

Show Last Modified: ☐ On Record ☐ On List
Show Owner: ☒ On Record ☐ On List ☐ Allow Change
Access Type: Use Permission List
☒ Allow UI Access
☒ Allow Mobile Access
☒ Allow Attachments
☒ Show Notes
☐ Enable Mail Merge
☐ Records Are Ordered
☒ Show Remove Link ☐ Allow Child Record Editing ☐ Allow Delete

☐ Allow Quick Search
☐ Allow Quick Add
☒ Enable System Notes
☒ Include in Global Search
☒ Include in Search Menu
☐ Enable Optimistic Locking
☒ Enable Inline Editing
☐ Enable Name Translation
☐ Hierarchy
☐ Inactive

Fields • Subtabs • Sublists • Icon • Numbering • **Forms** • Online Forms • Permissions • Links • Managers • Translation • Child Records • Parent Records • History • System Notes

☐ Show Inactives

Edit	Name	Preferred
Customize	Standard Equipment Form	☐
Edit	Custom Equipment Form	☐
Edit	Custom Equipment Form 2	☐
Edit	Custom Equipment Form 3	☐

Save Cancel Change ID Actions

Custom records can be linked to standard records and other custom records, creating child record types. These child record types help track specific information that needs multiple fields on a record. For more information, see [Parent-Child Record Relationships](#).

You can customize forms for custom record instances and set them up for different roles, as you can with standard transactions and records. When customizing a form, you decide which fields to display, how to arrange them, and which roles can use the form.

For an example of using custom record types, see [Equipment Service Example using Custom Record Types](#).

For information about customizing the form used, see [Customizing the Form Used to Enter Custom Records](#).

Equipment Service Example using Custom Record Types

This topic provides a high-level overview of the process for creating a custom record type. For general information about custom record types, see [Record Types](#)

In this scenario, we'll assume your company needs to track information about computer and electronics equipment.

Complete the following steps:

1. [Creating the Equipment Custom Record Type](#)
2. [Creating the Parent-Child Relationship](#)
3. [Creating a New Service Record Instance](#)
4. [Customizing the Form Used to Enter Custom Records](#)

Creating the Equipment Custom Record Type

Your company needs to track information about computer and electronic equipment. Because there's no such standard record type in NetSuite, you create a custom record type called Equipment. Then, on the

Equipment record, you add custom fields in which you enter serial numbers, location, purchase date, and service and warranty information.

Equipment

Evernon 3000 Laptop 3

Edit
BackActions

Name	Evernon 3000 Laptop 3	Serial Number	287892898-898982
Owner	Wolfe, J Wolfe, J	Location	
☐ Inactive		Purchase Date	8.10.2008
Manufacturer	Evernon	Vendor	Ingram Micro
Model	3000 Laptop		

Notes
Files
Workflow
Warranty
Service

Warranty Number	39893893	Warranty Vendor	Ingram Micro
Warranty Term	3 years; parts and labor	Vendor Phone	(650) 589-8000

Edit
BackActions

Your custom records can be attached to standard records and other custom records. For example, on the Equipment record type, you want to track details each time you service your equipment, so you create a new custom record called Equipment Service.

Creating the Parent-Child Relationship

To create the parent-child relationship, you add a custom field to the Equipment Service record in which you can select the associated Equipment record. You select a field type of List/Record and select Equipment in the List/Record field. To create the parent-child relationship, check the Record is Parent box.

Equipment Service Field

Save

Cancel

Apply to Forms

Label *

Id

Owner

Description

Type

List/record

☒ Store Value ☐ Use Encrypted Format
☐ Show In List

☐ Global Search
☒ Record Is Parent
☐ Inactive
☐ Apply Role Restrictions

Display

Validation & Defaulting

Sourcing & Filtering

Access

Translation

Insert Before

Subtab

Display Type

Help

Parent Subtab

☐ Allow Quick Add

Save

Cancel

Apply to Forms

Creating a New Service Record Instance

When service is performed, the technician opens the Equipment record, clicks the Service subtab, and clicks a button to create the Equipment Service record instance.

In our example, you click New Equipment Service and enter the service information in the new record. The equipment field fills in automatically. The child service record shows on the parent Equipment record.

Equipment

Evermon 3000 Laptop 3

Save

Cancel

Change ID

Actions

Custom Form *

Name *

Owner

☐ Inactive

Manufacturer

Model

Serial Number

Location

Purchase Date

Vendor

Notes

Files

Workflow

Warranty

Service

Last Service

Service Technician

CRM Records

Equipment Service

Items

Service Notes

View

Equipment service

Default View

New Equipment Service

Attach

Customize View

Edit

Name

Remove

Edit

Cleaning

Remove

Edit

Install New Sound Card

Remove

Edit

Routine maintenance

Remove

Edit

Routine maintenance

Remove

Edit

Routine Maintenance

Remove

Edit

Upgrade Memory

Remove

Edit

Upgraded hard drive

Remove

Save

Cancel

Change ID

Actions

The equipment record in this scenario most useful for IT staff involved in purchasing, maintenance, and tracking. However, some information that may be relevant to others in the company.

Customizing the Form Used to Enter Custom Records

When you create a new custom record, a custom form for that custom record is automatically created.

You can customize the forms used to enter custom records in the same way that you customize standard transactions and standard records. You can set up forms for various roles. Customizing a form involves determining which fields show, their arrangement, and which roles use the form.

To customize the forms

1. On the Custom Record Type page, click **Customize** next to the standard form on the **Forms** subtab.
2. On the Custom Entry Form page, clear the boxes in the Show column next to the **Warranty** and **Service** subtabs. Then click **Save**.
3. In the **Access Type** field, ensure that **Use Permission List** is selected.
4. On the **Permissions** subtab, select the roles that should use the new custom equipment form only. In this example, we add all non-IT roles. When someone with a non-IT role views the equipment record, the hidden fields and subtabs aren't shown.

With the preceding custom record form, employees outside of your IT department can view basic information about the equipment, like manufacturer and model. They can't see information related to service and warranty that's relevant to only your IT staff.

For more information, see [Custom Records](#) and [Adding Custom Forms for a Record](#).

Transaction Types

You can create a custom transaction to record unique business events in your general ledger. The custom transactions feature lets you to create custom transaction types that meet your specific needs and business logic. For instance, create a custom transaction to record adjustments for nonoperational income, like investment income or currency exchanges.

Custom transaction types share the same features as standard NetSuite transaction types, including purchases, payables, sales, billing, customers, and more. Custom transaction types share the same features as standard NetSuite transaction types, including purchases, payables, sales, and more. These features enable each transaction type to have unique behavior and processing. For example, restrict access to certain users, add custom transactions in bundles, and reference them in workflows.

For more information about custom transactions, see the help topic [Custom Transactions](#).

For more information about standard transaction types, see the help topic [Transaction Types Included in Monthly Transaction Lines Metric](#).

Segments

Classifications help identify and categorize NetSuite records, making it easier to organize and manage your data. Custom segments let you to create custom classifications like the class, department, and location classifications provided by NetSuite. You can use custom segments as search filters and columns in NetSuite reports. If a custom segment is configured for GL impact, it can be displayed on the GL Impact page.

For instance, you might need to classify records by profit center. You can create a custom segment called Profit Center and use it to sort and search your data.

The screenshot shows the 'Classification' section of a NetSuite form. It includes several dropdown menus for 'Department', 'Class', 'Location' (set to 'East Coast'), 'Order Type', 'Deferred Revenue Reclassification Account', 'Foreign Currency Adjustment Revenue Account', 'Sales Rep Phone', 'Points', 'Preferred Contact Method', and 'Profit center'. A 'Marketing Order' checkbox is also present. On the right, a list of items is displayed, with 'Outerwear' selected and highlighted in blue. The list includes '- New -', 'Clothing', 'Outerwear', and 'Jewelry'.

For more information about custom segments, see [Custom Segments](#).

Advanced Templates

Customize printed and emailed forms, records, and saved searches using the Advanced PDF/HTML Templates feature. NetSuite provides standard templates for each supported print type, which can be customized with your own template. Use the Template Editor to modify standard templates and make them your own.

The screenshot shows the 'Custom Transaction Form' editor in NetSuite. It includes a 'Save' button, a 'Cancel' button, and a 'Move Elements Between Subtabs' button. The form is titled 'Custom Purchase Order 2' and has an ID of 'custform_182_563214_536'. The 'Type' is 'Purchase Order' and the 'Printing Type' is 'Advanced'. A red box highlights the 'Print Template' dropdown menu, which is set to 'Custom Purchase PDF/HTML Templat'. Other templates listed include 'Standard Purchase PDF/HTML Templat' and 'Standard Transaction Email Template'. The 'Email Template' is set to 'Standard Purchase PDF/HTML Templat' and the 'Email Message Template' is set to 'Standard Transaction Email Template'. The 'Columns Width' is 17.75 and the 'Layout Space' is 7.5. The 'Allow Add Multiple' checkbox is checked, and the 'Inactive' and 'Form Is Preferred' checkboxes are unchecked. The bottom of the screen shows a tabbed interface with 'Tabs', 'Screen Fields', 'Actions', 'Sublists', 'Sublist Fields', 'Custom Code', 'Roles', 'Linked Forms', and 'History'.

For more information about standard templates, see the help topic [Advanced PDF/HTML Templates](#).

The Template Editor lets you to build a custom print template in WYSIWYG mode or by editing the source code. In WYSIWYG mode, click the New Element toolbar to add HTML-based elements like fields, images, tables, and printing elements.

Advanced PDF/HTML Template
CC Invoice PDF/HTML Template

Save Template Setup Cancel Change ID Actions

New Element Styles Source Code Preview Copy to Account

Company Name
Address

Title
#Invoice #
Date

ORACLE + NETSUITE

Bill To	Ship To	Total
Bill To	Ship To	Total
		Due Date: Due Date

Terms	Due Date	PO #	Sales Rep	Shipping Method	Partner
Terms	Due Date	PO #	Sales Rep	Shipping Method	Partner

Quantity	Item	Weight	Options	Unit Price	Amount
Quantity	Item Description	record.exp ense.custc ol_cc_overs ize	Options	Unit Price	Amount

Subtotal		Subtotal
Tax Total (record.taxrate %)		Tax Total
Total		Total

Page Number of Page Count

For more information about using the template editor, see the help topic [WYSIWYG Editing in the Template Editor](#).

Centers

Employees get access to necessary NetSuite pages when assigned a specific role. A center is assigned to each standard role. A center is a customized NetSuite setup for roles with similar tasks. For instance, all sales roles – sales representatives, sales managers, and sales administrators – use the Sales Center by default. Although the information varies by role, the Sales Center's basic layout remains the same for each of the standard sales roles. The headings at the top of the page are called center tabs.

The screenshot displays the NetSuite Home dashboard with a customized layout. The top navigation bar includes links for Activities, Leads, Opportunities, Customers, Forecast, Reports, Analytics, Documents, Setup, SuiteApps, and Support. The main content area is divided into several portlets:

- Quick Search:** A search bar with a "Search" button and a dropdown for "Name/ID".
- Key Performance Indicators:** A table showing performance metrics for New Customers, Sales (Billings), and Sales (Orders).
- Customers:** A list view of customer records with columns for Name, Sales Rep, Primary Contact, Phone, Email, Status, and sales rep email.
- Shortcuts:** A section for quick access to Tasks and Calendar.
- Settings:** A section for personalizing the dashboard, setting preferences, changing email, and changing password.

The Customers table data is as follows:

Indicator	Period	Current	Previous	Change
New Customers	This Month vs. Same Month Last FQtr to Date	0	0	0.0%
Sales (Billings)	This Month vs. Same Month Last FQtr to Date	\$0	\$0	0.0%
Sales (Orders)	This Month vs. Same Month Last FQtr to Date	\$0	\$0	0.0%

New	Edit View	Name	Sales Rep	Primary Contact	Phone	Email	Status	sales rep email
		71					CUSTOMER-Closed Won	
		27					LEAD-Unqualified	
		26					CUSTOMER-Closed Won	
		25					LEAD-Unqualified	
		24					LEAD-Unqualified	
		23					CUSTOMER-Closed Won	

With Customization, you can create custom centers and assign them to custom roles, giving you full control over a role's NetSuite experience. You can customize the center by adding tabs, portlets, and links to tasks the role needs. You can assign custom center access only to new custom roles you create. You can't give custom center access to standard roles or customized versions of standard roles.

For more information about creating custom centers, see the help topic [Custom Centers](#).

Customization Best Practices

This section contains best practices to consider when building customization. See the following topics in this section:

- [Optimize Your Custom Fields and Custom Forms](#)
- [Plan Ahead and Make Use of Existing Standard Features](#)
- [Set Up Internal Controls](#)
- [Know When to Use SuiteFlow and SuiteScript](#)
- [Conventions for Naming Custom Objects](#)
- [Changing the ID of a Custom Object](#)

Optimize Your Custom Fields and Custom Forms

Remove unneeded fields when you customize forms. For more information, see [Configuring Fields or Screens](#).

Document and use consistent naming conventions so users can easily identify objects. You can change the ID of a custom object (except for custom segments) after it's been created, using the **Change ID** button at the top of the page. For more information, see [Conventions for Naming Custom Objects](#) and [Changing the ID of a Custom Object](#).

Check the **Form is Preferred** box when creating a new custom form. This lets you decide which forms your employees use and helps maintain consistency across your company. For more information, see [Defining Preferred Forms](#).

Choose the right field type when creating Custom Fields and understand the differences. For example, a free-form text field type can have up to 300 text characters, whereas a text area field can have up to 4000 characters. For more information about various field types, see [Field Type Descriptions for Custom Fields](#).

Creating a nonstored custom field that uses formulas or searches slows down the database because many logs are created. To improve performance, check the Store Value box and use a server-side script. For more information, see the help topic [Record.setValue\(options\)](#).

When working with multiple records, to set up ongoing updates, consider using CSV import, mass update, scheduled script, or map/reduce script features during off-peak hours. For more information, see the help topics [CSV Imports](#), [SuiteScript 2.x Mass Update Script Type](#), [SuiteScript 2.x Scheduled Script Type](#) and [SuiteScript 2.x Map/Reduce Script Type](#).

Plan Ahead and Make Use of Existing Standard Features

Before you start, understand the scope of your customization to choose the right technology for your business goal. Before building your customization:

- Consider whether the new customization solution is required, nice to have, or can be implemented in a future release.
- Write a roll-out plan and conduct an impact analysis before implementing your solution. Make sure you understand what existing business processes, scripts, workflows and other customizations will be affected.

- Write flexible solutions that consider performance and scalability.
- After your plan is ready, prototype in a sandbox account to avoid potential problems with your production account.
- Think about existing standard features you can use instead of building a customization. For example, you can use Mail Merge to send and attach an email message in a custom record rather than building a new customization. Or you can set the default tax code for line items using existing standard features instead of scripting a solution. To set the default tax code, use the Default Tax Code field in Setup > Accounting > Set Up Taxes. For more information, see the help topics [Working with Mail Merge](#) and [Set Up Taxes](#).

Consider using Suite Script for more complex customizations. For more information, see the help topic [What You Can Do with the SuiteScript API](#).

Set Up Internal Controls

Internal controls help to protect your company from risk and avoid serious errors. NetSuite provides many controls that don't require customizations. Customizations for internal controls are tracked in the System Notes.

Consider the following when setting up your internal controls:

- Set up logical access and application security to control who can access your system. Users should have access only to the information they need to do their jobs.
- Separate duties and transaction processing to reduce risk.
- Regularly review permissions for each role to ensure they're up-to-date.
- Keep the number of Administrator role users to a minimum.

For more information, see the help topics [Internal Controls in NetSuite](#) and [Auditing Data Changes using Searches](#).

Know When to Use SuiteFlow and SuiteScript

SuiteScript and SuiteFlow share similar features and can help you achieve your goals.

SuiteFlow is used for automating business processes and doesn't require prior programming knowledge. Before you start developing, define what you want to achieve with your SuiteFlow workflow. Modifying it on the go can be difficult if multiple states and actions are involved, so it's better to plan. For more information, see the help topics [SuiteFlow Overview](#) and [SuiteFlow Best Practices](#).

SuiteScript is a powerful API that uses JavaScript to extend NetSuite's capabilities. You need programming knowledge to use SuiteScript. SuiteScript lets you create custom interfaces, programmatically run saved searches, create custom dashboard portlets, run batch processes, and more. For more information, see the help topics [What You Can Do with the SuiteScript API](#) and [SuiteScript Best Practices](#).

You can perform these actions in both SuiteFlow and SuiteScript:

- Show messages
- Validate fields
- Set up default values
- Change display characteristics
- Set a field as required or optional

- Send email messages
- Create transactional and nontransactional records
- Redirect end user
- Approval routing
- Manipulate sublists

Most tasks you can do in SuiteFlow can also be done in SuiteScript. Consider your technical knowledge when choosing between SuiteFlow and SuiteScript. If you don't have JavaScript developers, use SuiteFlow.

For a comparison of SuiteFlow and SuiteScript, see [SuiteFlow vs. SuiteScript](#).

SuiteFlow vs. SuiteScript

This topic provides a comparison of when to consider using SuiteFlow vs. SuiteScript. For a general overview, see [Know When to Use SuiteFlow and SuiteScript](#).

SuiteFlow is used to automate business processes. Consider using SuiteFlow for:

- Basic field defaulting, which makes it easier for users with the Administrator role to make future edits.
- Complex approval processing
- Approval reminder email messages
- Lead nurturing (or drip marketing)
- Automation based on changes to related records
- Using existing saved searches to process the search data

SuiteScript offers these exclusive features:

- Create custom server requests from the browser
- Redirect user to a Suitelet
- Update related records.
- Copy, print, delete, and attach records
- Create dynamic searches, add filters or results to the search
- Perform web service calls
- Create scripted portlets
- Build new applications

Conventions for Naming Custom Objects

When creating a custom object, such as a custom field, custom record, custom list, and so on, you can assign a unique alphanumeric ID. Establish naming conventions for your customizations to help users identify the correct object. Think about the custom object's purpose and location before assigning an ID. Make sure your custom object IDs are meaningful to your users. If you don't enter an ID, the system will automatically create one when you save the custom object.

If your company name is First Software and your team decides to use the prefix “_fs_” with all custom objects, your list of custom objects would resemble the following:

- custentity_fs_travel_approval_limit
- custitem_fs_gift_wrap_price

■ `custrecord_fs_system_role`



Important: For all custom objects except for custom segments and integration records, you can change an existing ID value using the Change ID button at the top of the page. However, changing the value of an ID that's being used in a script can cause the script to break with no warning messages. You can avoid the need to change IDs in the future by planning your naming conventions before creating the IDs.

When you create an ID for a custom object, the system automatically prepends the file name with a standard string of text. This string varies by custom object type and can't be changed. As a best practice, you should enter a unique ID name that begins with an underscore. Including the underscore provides a separation between the prepended string of text and your ID.

When planning your naming conventions for custom object IDs, consider including a prefix. For instance, you may want to identify all custom fields by the department to which the custom field applies. We'll assume your company has the following departments: Marketing, Customer Support, Service, and Sales. When creating the unique IDs for each department, you should add prefixes such as **_mktg** for Marketing, **_cs** for Customer Support, **_serv** for Service, and **_sales** for Sales. For example, you want to create a new Keyboard Style item field to be used by the Sales department. The automatic prepended string of text for custom item fields is `custitem`, and you enter an ID of `_sales_keyboard_style`. If we follow the naming conventions mentioned previously, the final ID for the custom field would be **`custitem_sales_keyboard_style`**.

The following table lists the prepended string used for each custom object type ID or Script ID. It also shows the character limit for the ID or Script ID field.

Custom Object	Prepending String	Character Limit
List	<code>customlist</code>	28
Record Type	<code>customrecord</code>	28
Custom Segment	<code>cseg</code>	15
Transaction Type	■ Purchase: <code>custompurchase</code> ■ Sales: <code>customsale</code> ■ Basic, Journal, and Header Only: <code>customtransaction</code>	23
Field	■ CRM: <code>custevent</code> ■ Entities: <code>custentity</code> ■ Items: <code>custitem</code> ■ Record: <code>custrecord</code>	30
Transaction Body Field	<code>custbody</code>	30
Transaction Line Field	<code>custcol</code>	30
Transaction Item Options	<code>custcol</code>	30
Item Number Field	<code>custitemnumber</code>	30
Other Record Fields	<code>custrecord</code>	30
Other Sublist Fields	<code>custrecord</code>	30
Sublist	<code>custsublist</code>	30
Subtab	<code>custtab</code>	40

Custom Object	Prepending String	Character Limit
Forms	■ Entry Forms: custform ■ Transaction Forms: custform ■ Address Forms: custform	91

Changing the ID of a Custom Object

You can update the ID of any custom objects after creation, except for custom segments. Use this feature with caution, as changing an ID used in a script can break the script without warning.

For information about best practices and naming conventions, see [Conventions for Naming Custom Objects](#).


To change the ID or Script ID of a custom object:

1. Go to the custom object page and click **Change ID**.
2. In the **New ID** field, enter the new ID.
3. Click **Save**.

Customizing Field Level Help for Standard Fields

This topic describes how to create and customize help text for standard NetSuite fields, including support for multiple languages, HTML markup, and examples. For information about editing or removing existing field-level help, see [Standard Field Level Help Customization Page](#).

You can customize field-level help for standard NetSuite fields and add help for other languages if you have Multi-Language feature enabled. Administrators or users with full permission to Customize Field Level Help can edit or remove custom help for a field. The view, none, and edit levels of the Customize Field Level Help permission aren't used.

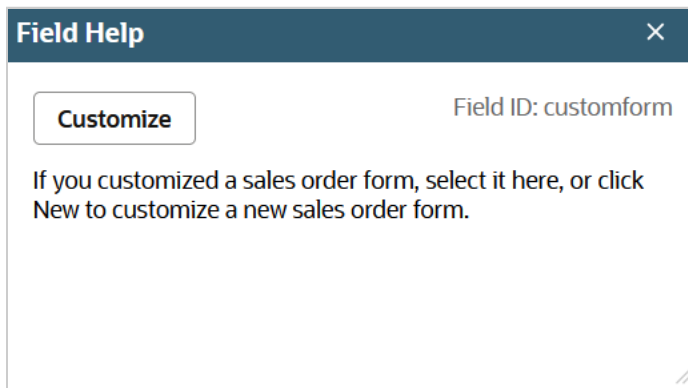

To customize help for a field:

1. View the field-level help for the field and then click the **Customize** button.

Customize Standard Field Level Help

Form Type

Sales Order

Field Label

Custom Form

Field ID

customform

Help Text

If you customized a sales order form, select it here, or click New to customize a new sales order form.

Translations

Language	Help Text	
Chinese (China)	如果自定义销售订单表单，则在此选择	Remove
French (Canada)	Si vous avez personnalisé un écran de	Remove
French (France)	Si vous avez personnalisé un écran de	Remove
German (Germany)	Wenn Sie ein	Remove
Spanish (Spain)	Si ha personalizado un formulario de	Remove

☒ Make as default for other forms of the same type

Save

Remove Customization

Cancel

- In the **Help Text** field, enter your default help text for the field in the current language. Note that you can include URL links, such as a link to a saved search.
- In the **Translations** section, select a language and enter the help text for the field. Enter custom help for as many languages as required.
If you don't have Multi-Language feature enabled, you can customize help text for English only.
- Check the **Make as Default for Other Forms of the Same Type** box to make this custom help the default for other forms generated from this form type.
- Click **Save**.

You can enter HTML markup source for the custom field-level help. The following HTML tags are supported in upper case or lower case:

- <p>
-
-
-
- <i>
- <u>

-
-

- <a>

The <a> tag supports these attributes:

- href – Required attribute. Only absolute paths are allowed, that is, URLs starting with http or https. In addition, JavaScript isn't supported.
- target – Required attribute. Only _blank and custom name values are supported. If the target attribute is missing, it's automatically added with the _blank attribute so that clicking a link does not open the link in the field-level help popup window.
- title
- download
- hreflang
- rel
- media

For more information about the <a> tag, see the [HTML <a> Tag page](#) on the w3schools website.

 **Note:** Because HTML tags are supported, use < and > to display the < less than and > greater than symbols in the custom field-level help.

The following example of custom field level help uses some of the possible HTML markup options:

Customize Standard Field Level Help
×

Form Type	Field Label	Field ID
Purchase Order	Approval Status	approvalstatus

Help Text

When you use SuiteFlow for purchase approvals, purchase orders and requests include the Approval Status field. The Approval Status field reflects the state of the transaction in the approval process.

Purchase orders and requests may have one of the following statuses:

Pending Approval – The purchase has not yet been approved.Approved – The purchase has been given approval for processing.Rejected – The purchase approval is refused and the order will not be processed.You may manually select a different status in this field if needed.

If you want to restore the standard help for a field, open the Customize Standard Field Level Help window and click **Remove Customization**.

An icon beside the field name indicates that the field has custom help. Only administrators can see this icon.

Custom Form *

Standard Employee Form

Template

Employee Id *

Copied From Name ☒ Auto

Mr./ms...

Also, the word (customized) in the Field Help title bar indicates that the field has custom help.

Field Help (customized) X

Customize Field ID: firstname

Enter the employee's first name.

What you enter here automatically appears first in the Employee field. The first letter of what you enter here appears in the Initials field.

This field is required for the Online Bill Pay feature.

Note: After an administrator or a user with the full level of the Customize Field Level Help permission changes the field-level help, the changes might not take effect for users immediately. Field-level help can be stored in cache for users, and there are multiple caches, so it can take a few hours for all users to see updated field-level help entries.

Standard Field Level Help Customization Page

This topic explains how to view, edit, or remove existing custom field-level help entries using the Standard Field Level Help Customization page in NetSuite. For information about creating new custom field-level help, see Customizing Field Level Help for Standard Fields.

To edit or remove the custom field-level help, use the Standard Field Level Help Customization page.

Go to Customization > Lists, Records, & Fields > Custom Help for Standard Fields.

You need full permission to Customize Field Level Help to edit or remove custom help for one or more fields. The view, none, and edit levels of the Customize Field Level Help permission aren't used.

If needed, filter the help list by form type.

Standard Field Level Help Customization							
Form Type							
- All -							
☐	Actions	Form Type	Form Title	Form Name	Field Label	Field ID	Default Help Text
☐	Edit Remove	Custom Segment	Custom Segment		USE AS FIELD ID	superid	☒ Check to use one ID for all scripting on this custom segment. When this box is checked, the field ID boxes on the Application & Sourcing subtabs are not visible because one ID is used for all fields. If you change this setting on existing custom segments, any customizations that include custom segments might stop working.
☒	Edit Remove	Sales Order	Sales Order	Standard Sales Order - Invoice	Actual	actualshipdate	☒ This field shows the actual ship date, after the shipping department has fulfilled the order. 
☐	Edit Remove	Setup: Company Features	Enable Features	Worldwide Support for Phone Number Formatting		internationalphonenumber	☒ Check the Worldwide Support for Phone Number Formatting box to enable this feature in your account. This feature allows you to use proper phone number formatting for 245 world countries and territories.
Remove Customization of Selected							

To remove the custom help for multiple fields, check the box in the appropriate rows and click **Remove Customization of Selected**.

Custom Fields

Custom fields let you add information specific to your business needs to records and transactions. You can create custom fields for records or transactions. Record custom fields can be added to existing and custom subtabs on the entry forms you use to enter records in your NetSuite account. Transaction custom fields can be added to the top (body) or the line items (columns) of transactions. Custom fields are based on standard fields and field types. For more information about custom field types, see the following:

- [Field Type Descriptions for Custom Fields](#)
- [Custom Field Types](#)
- [Available Standard Fields and Field Types](#)



Important: SuiteScript doesn't support direct access to the NetSuite UI through the Document Object Model (DOM). You should access the NetSuite UI only by using SuiteScript APIs. For information about using SuiteScript APIs to customize the UI, see the help topic [SuiteScript 2.x Custom Pages](#).

The following table lists required steps you must follow to create a custom field:

Required Steps	Related Help Topics
Set the basic properties for the field	Creating a Custom Field
Assign the field to forms, as needed	Assigning Custom Fields to Specific Record Types
Set the display properties for the field	Setting Display Options for Custom Fields
Set up validation and defaulting, and create dynamic defaults and hyperlinks if needed	■ Setting Validation and Defaulting Properties ■ Dynamic Defaults and Dynamic Hyperlinks
Set any sourcing criteria needed for the field	Setting Sourcing Criteria
Set any access restrictions to the field based on department, role, or subsidiary	■ Restricting Access to Custom Fields ■ Restricting Access to Employee Custom Fields
Set any filtering criteria needed for the field	Setting Filtering Criteria

Here are some optional tasks you can do when creating a custom field:

Optional Tasks	Related Help Topics
Filter dropdown list field options	Dependent Dropdown Lists
Make a field read-only	Creating Read-Only Custom Fields
Add field-level help for a custom field	Adding Field-Level Help for Custom Fields
Translate the field label and help text	Adding Translations for Custom Fields
Add a custom transaction field to a custom transaction form	Adding Custom Fields to Transaction Forms
Add a formula to a field	Creating Formula Fields

Optional Tasks	Related Help Topics
Create a custom list	Custom Lists
Change a custom field's type	Converting the Field Type of a Custom Field
Track changes to a custom field	Tracking Changes to Custom Fields
Inactivate a custom field	Inactivating a Custom Field
Create custom fields from summary search results	Creating Custom Fields with Values Derived from Summary Search Results
Maintain saved searches with edited custom fields	Maintaining Saved Searches that Include Edited Custom Fields

For step-by-step instructions about creating and editing custom fields, see the following:

- [Creating a Custom Field](#)
- [Inactivating a Custom Field](#)
- [Editing a Custom Field](#)
- [Advanced Features for Custom Fields](#)
- [Custom Lists](#)

 **Warning:** Be aware of what happens when you delete a custom field. When you delete a field, instances of the field are removed from forms and lists, and all related data is deleted. Reports and searches with the deleted field may remove the field or error out, depending on how the field is used. If you inactivate the field, the data remains in NetSuite. Changing the field's data type or permissions can cause errors in reports and searches that use it. For information about deleting a custom field, see the help topic [Buttons and Menus in NetSuite](#).

Custom fields work with SuiteCloud Development Framework (SDF). SDF is a development framework for creating SuiteApps or customizing NetSuite accounts using a local integrated development environment (IDE). SuiteCloud projects are file-based and use XML definitions of custom NetSuite objects. For more information, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

Watch this video for an overview of custom field setup options.

 [Creating Custom Fields Overview](#)

To view a list of custom fields training videos, see [Custom Fields Videos](#).

Custom Fields Videos

To view help videos for creating custom fields, see the following:

- [Creating Custom Fields – Overview](#)
- [Creating and Adding a Custom Field to a Record Type](#)
- [Adding a Default Selection to a Custom Field](#)
- [Using Sourcing and the Store Value Feature with a Custom Field](#)
- [Adding Sourcing and Filtering Criteria to a Custom Field](#)
- [Access Control for Custom Field Values](#)
- [Adding a Custom Field that Spans the Top of Bottom of a Page](#)
- [Adding Field-Level Help for Custom Fields](#)

Field Type Descriptions for Custom Fields

When creating a custom field, you select the type of field based on the information you want to store.

The following table describes all available field types for custom fields. Note that character limits are for English letters (1 byte per letter). For non-English languages, character limits are lower (up to 4 bytes per character). Non-English characters affect field limits, which may be lower than stated.

Field Type	Description	Example
Check box	Use a check box to record a true or false answer.	For example, create a Delivery check box custom field to track orders on sales transactions. Check the box for delivery orders.
Currency	Enter currency amounts up to 15 digits and 15 decimal points (999,999,999,999,999.999999999999999). Custom currency fields work differently than standard NetSuite currency fields. Without the Multi-currency feature, custom currency fields won't be hidden like standard NetSuite currency fields.	For example, create a currency field on employee records to track employee spending limits.
Date	Enter or select dates. Changing Date fields to Date/Time fields converts dates in existing records to date/times. The time defaults to midnight in your company's time zone.	For example, create a Projected Start Date custom field to track start dates on estimates. Dates entered must follow the date format selected at Setup > Company > General Preferences.  Note: The date and time are based on the user's NetSuite Time Zone preference, set at Home > Set Preferences, not on the browser client time zone.
Date/Time	Store date and time in a single field. Date/time values are displayed in the user's preferred format and time zone. Time values are stored down to the second. you can also add Date/Time custom fields using the <code>form.addField(options)</code> method. Important: When using the <code>addField</code> method, you must specify 'datetimetz' for the type parameter.	For example, use a single field for date and time timestamp data.  Note: Date and time are based on your NetSuite Time Zone preference, set at Home > Set Preferences, not your browser's time zone.
Decimal Number	Enter a decimal number in a custom field. The maximum input is 20 digits (10,000,000,000,000,000,000). Numbers larger than the maximum will be rounded down.	For example, you want to record the distance your customers are from your nearest retail outlet. Create a decimal number field to store this information in employee records.
Document	Select a File Cabinet document to preview or download. The field is searchable and can be added to search results. Note: Users of this field need File Cabinet access to view, select, or upload documents.	For example, let employees search customer survey results.
Entity	Create custom fields of type Entity . To create a custom entity field, set the field type to List/Record	For example, on the custom field's definition page, on the Sourcing & Filtering subtab, specify

Field Type	Description	Example
	and the List/Record type to Entity. By doing so, the new generic custom entity field will automatically include all records of type contact, customer, employee, group, other name, partner, and vendor. You can also use sourcing and filtering to limit the choices in the custom field's list to a subset of the supported entities.	Type in the Filter Using column. In the Value Is column, select customer, partner, and vendor names. When the custom field of type Entity appears on your record, entities of only type customer, partner, and vendor will appear as available options in the field's list.
Email Address	Enter an email address (up to 254 characters). The email address field creates a link to open your default email client.	For example, create a custom record type for interns that includes a field for their email addresses. Click the email address on their records to send them an email message.
Free-Form Text	Enter up to 300 characters of text. Use your account-specific domain for URLs in custom fields. For more information, see Using Account-Specific Domains.	For example, offer your customers monogramming on certain items by creating a Free-Form Text field as an item option to record the monogram.  Note: Calculations in free-form text fields use scientific notation. To avoid scientific notation, use the ROUND({cost}/0.65,3) syntax to round digits.
Help	Add helpful text to record pages where users enter information (up to 999 characters). This help is for informational purposes only. It's not stored in your account. Use your account-specific domain for URLs in custom fields. For more information, see Using Account-Specific Domains.	To create a Help custom field, select Help in the Type field and enter your text in the Help field.
Hyperlink	Enter a URL to link to another web page (up to 999 characters, with a hyperlink text limit of 10 characters). Hyperlink fields should start with http://, https:// or ftp://.  Note: For safety reasons, files starting with file:// or \\ aren't supported. You can enter a file in this format, but the link won't work. Use your account-specific domain for URLs in custom fields. For more information, see Using Account-Specific Domains.	For example, you want to link to a vendor's website. You create a hyperlink custom field called Website that appears on vendor records. First, you enter the company's URL. When you return to the vendor's record, you can click the URL to open the vendor's site in a new window. You can enter up to 999 characters in the field.
Image	Attach an image to a record. The image is rendered with a maximum width of 250 pixels in the form layout, and the image is resized proportionally. Image custom fields support the following file formats: ■ .bmp ■ .gif ■ .jpg	For example, you can attach pictures of your employees to their records.

Field Type	Description	Example
	■ .jpeg ■ .jpg ■ .jpeg ■ .png ■ .tiff ■ .tif  Note: The TIF/TIFF file format may not be supported by all browsers.	
Inline HTML	Use Inline HTML on all types of fields. You can use HTML to create custom fields on record forms or to create custom fields to use on Suitelet custom pages. For more information about using HTML with Suitelets, see the help topic SuiteScript 2.x Suitelet Script Type. The Inline HTML field has a 4000-byte limit. In English, 4000 bytes is 4000 characters, but in other languages, the character number may be fewer.  Important: NetSuite Forms does not support manipulation through the Document Object Model (DOM) and custom scripting in Inline HTML fields. The use of Inline HTML fields on Form pages (except for Forms generated by Suitelets) won't be supported with a new user interface in a future NetSuite release. URLs in custom fields should use your account-specific domain. For more information, see Using Account-Specific Domains.  Important: The Inline HTML field type does not support labels, the UI does not display labels for Inline HTML fields.	For example, you could display to customers how many reward points they have earned.
Integer Number	Enter integers in a custom field. The maximum number is about 18000000000000000000 (20 digits). Note that this maximum can be affected by rounding and technical limitations.	For example, use this field to record a special ID number.
List/Record	Attach lists and records to custom fields. In the List/Record field, select the list or record type to attach. You can also select from public saved searches. You can use this option to script a custom printing solution. For more information, see Scripting a Custom Printing Solution.	For example, track orders by the employee working on them by creating a custom body field for sales transactions. Attach your employee list to the List/Record field. Then, on sales transactions, select the employee for the order.
Long Text	A text area that can hold up to one million (1,000,000) characters. Use Long Text fields when you need more than 4,000 characters for a text area without rich text formatting.	For example, use a Long Text custom field in a custom record to hold the text of an item Warranty. Or, add to an Online Form to hold the text of a End User License Agreement.

Field Type	Description	Example
	In the UI, long text field types have a 1,000,000 character limit. With SuiteScript, long text field types have a 100,000 character limit.  Note: You can convert free form text or text area fields to long text fields. However, after the conversion is complete, the field can't be converted back. Use your account-specific domain for URLs in custom fields. For more information, see Using Account-Specific Domains.	
Multiple Select	Create a field for multiple selections from a list or list of records.  Note: Multiple Select fields in saved search results have a 4000-character display limit.	For example, track how customers found your business. Create a multiple select field on customer records with possible sources. Sales reps use the field to select where customers heard about your business.
Password	Create a field that's encrypted in the database (up to 15 characters). The field always shows a fixed number of characters, regardless of password length. When validating, you pull the encrypted password value into a hidden field and use custom code to encrypt the value the user typed. Then, compare it with the real encrypted value. Make sure customizations handle sensitive fields properly.	For example, add a password field to a web page.
Percent	Create a field to store a percentage. The field accepts only integers from 0 to 100.	For example, track employee test results as a percentage. The percent sign (%) is added automatically.
Phone Number	Create a field for phone numbers on records and transactions (up to 32 characters). If phone number formatting is enabled, numbers are localized. The user's subsidiary country determines the localization.	For example, add a contact number to an event record using a CRM field.
Rich Text	Enter and format up to one million (1,000,000) characters of text in a custom field. Use your account-specific domain for URLs in custom fields. For more information, see Using Account-Specific Domains.	For example, include a brief employee bio with details like marital status and family members. You can also format the text with lists, bold/italic text, and custom font sizes and colors.
Text Area	Enter up to 4,000 characters of text in a custom field. The Text Area field has a 4000-byte limit. Note that 4000 bytes is 4000 characters in English, but may be fewer characters in other languages. Use your account-specific domain for URLs in custom fields. For more information, see Using Account-Specific Domains.	For example, record notes about closing a customer by entering information into a text area field on the customer record.
Time of Day	Create a field for entering the time of day.	For example, create a Best Time To Call field for sales reps to enter the best time to call a prospect.

Field Type	Description	Example
URL Fragment	Create a field for entering a URL Fragment in a custom field.	For example, use the URL Fragment field to create a precise web reference.

 **Note:** This field has a 200-character limit.

For information about creating a custom field, see [Creating a Custom Field](#).

Using Account-Specific Domains

Use your account-specific domain for URLs in custom fields. For more information about account-specific domains in specific field types, see the following:

- **Free Form Text**
If you include a URL, ensure that it uses your account-specific domain. Data center-specific URLs are automatically modified to an account-specific domain URL, but the configuration remains unchanged. You should update all links in custom fields to use the correct account-specific domain. For more information, see [Account-Specific Domains in Custom Fields](#).
- **Inline HTML**
Use URLs that include your account-specific domain. If the default URL value for this field contains a data center-specific domain, for an active session, it's automatically modified to the account-specific domain. However, the configuration remains unchanged. You should update all links in custom fields to use account-specific domains. For more information, see [Account-Specific Domains in Custom Fields](#).
- **Help, Hyperlink, Long Text, Rich Text, and Text Area**
Use URLs that include your account-specific domain fields. If you enter a URL that includes a data center-specific domain, it's automatically modified to the account-specific domain. However, the configuration remains unchanged. You should update all links in custom fields to use account-specific domains. For more information, see [Account-Specific Domains in Custom Fields](#).

System Notes for Changes Made in Text Type Fields

System Notes usually track changes to records, fields, and custom fields.

Text type fields let users enter alphanumeric characters. These field types are included:

- Text Area
- Long Text
- Rich Text
- Free-Form Text

System Notes record exact changes in values for Text Area and Free-Form Text type fields only. The recorded values are taken from the transaction where the field was used. This only applies if the Store Value setting is checked. If Store Value isn't checked, no changes are recorded. For Long Text and Rich Text fields, System Notes only record changes in the number of characters entered.

On the System Notes subtab of a transaction, the line related to the custom field shows the old and new values after editing the transaction. The following table provides examples of what this could look like:

On the System Notes subtab of a transaction, the line related to the custom field shows the old and new values after the user edits the transaction. The following table shows examples:

Field Type	Old Value	New Value
Text Area	This is a test note.	This is a new test note.
Free-Form Text	This is a test note.	This is a new test note.
Long Text	Old: 20 Chars	New: 24 Chars
Rich Text	Old: 519 Chars	New: 523 Chars

Use Text Area and Free-Form Text fields to track changes to custom field values. System notes for these field types show the previous and new values entered in the field.

For more information, see the help topic [System Notes Overview](#).

Custom Field Types

Here are the types of custom record and transaction fields you can create:

Type	Description	Instructions for Creating Field Type
Custom CRM Fields	Used to add fields to CRM records. These records include Activity, Marketing and Support records — such as tasks, events, campaigns, or cases.	Creating Custom CRM Fields
Custom Entity Fields	Used to add fields to entity records. These records include Relationship and Employee records — such as customers, vendors, employees, contacts, partners, or groups.	Creating Custom Entity Fields
Custom Item Fields	Used to add fields to item records. These records include Accounting and website item records — such as inventory, noninventory, service, other charge, group, kit/package, and assembly/bill of materials item records.	Creating Custom Item Fields
Custom Transaction Body Fields	Used to add fields to the body of transaction records. These records include, for example, purchase, sale, journal entry and expense report records — such as sales orders, invoices, purchase orders, opportunities, Web store transactions, or item receipts.	Creating Custom Transaction Body Fields
Custom Transaction Line Fields	Used to add fields to the lines of transaction records. These fields display in the line-item columns of transaction records and include fields such as expense items, purchase items, sales items, store items, or opportunity items.	Creating Custom Transaction Line Fields
Custom Transaction Item Fields	Used to add fields to the line items of your transaction records such as purchase items, sales items, and Web store items. When adding a custom field to the line items of a transaction, apply it to the specific line item type.	Creating Custom Transaction Item Options
Custom Item Number Fields	Used to add fields to serial and lot numbered inventory records to track information specific to each item or workflow unique to your business.	Creating Custom Item Number Fields

Type	Description	Instructions for Creating Field Type
	For example, track quality control procedures or recall information.	
Other Custom Fields	Used to add fields to custom records not defined by the preceding categories, including campaign events, classes, competitors, departments, and locations.	Creating Other Record Fields
Other Sublist Fields	Used to add fields to the columns of a custom sublist. These fields appear in sublist line-item columns.	Creating Other Sublist Fields

You can tell custom and standard fields apart on NetSuite pages. To do this, enable the Show Internal IDs preference at Home > Set Preferences under the Defaults section of the General subtab. With this preference enabled, clicking a field shows its ID in the bottom right corner of the field-level help popup. If it's a custom field, the ID from the custom field record is shown.

Available Standard Fields and Field Types

Custom fields can be sourced from a standard field based on its field type. The following topics contain tables listing standard fields and required field type available for custom fields.

- [Transaction Body Fields](#)
- [Transaction Line Fields](#)
- [Transaction Item Options](#)
- [CRM Fields](#)
- [Entity Fields](#)
- [Item Fields](#)

Transaction Body Fields

You can source from Entity, Ship To, or Sales Rep fields.

Source From Entity

The type of entity used to source from depends on the type of transactions you apply your field to. **Purchase** transactions source values from **vendor** records. **Sales** transactions source values from **customer** records, and **expense reports** source from **employee** records.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type	Sales Transactions	Purchase Transactions	Expense Reports
Name	Free-Form Text	×	×	×
Bill To	Text Area	×	×	×
Ship To	Text Area	×	×	—

Field	Type	Sales Transactions	Purchase Transactions	Expense Reports
Phone	Phone Number	×	×	×
Fax	Phone Number	×	×	—
Email	Email Address	×	×	×
City	Free-Form Text	×	×	×
State	Free-Form Text	×	×	×
Zip	Free-Form Text	×	×	×
Country	Free-Form Text	×	×	×
Sales Rep	List/Record	×	—	—
Expected Close Date	Date	×	—	—
Renewal Date	Date	×	—	—
Contact	Free-Form Text	×	×	—
Alt. Contact	Free-Form Text	×	×	—
Alt. Phone	Phone Number	×	×	—
Balance	Currency	×	×	—
Credit Limit	Currency	×	×	—
Account	Free-Form Text	×	×	—
1099 Eligible	Check Box	—	×	—
Tax ID	Free-Form Text	—	×	—
Legal Name	Free-Form Text	—	×	—
Supervisor	List/Record	—	—	×
Soc. Sec. #	Free-Form Text	—	—	×

Source From Ship To

When you select Ship To, information is sourced from the customer record selected in the **Ship To** field of **purchase** transactions.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type
Name	Free-Form Text
Bill To	Text Area
Ship To	Text Area
Phone	Phone Number

Field	Type
Fax	Phone Number
Email	Email Address
City	Free-Form Text
State	Free-Form Text
Zip	Free-Form Text
Country	Free-Form Text
Sales Rep	List/Record
Expected Close Date	Date
Renewal Date	Date
Contact	Free-Form Text
Alt. Contact	Free-Form Text
Alt. Phone	Phone Number
Balance	Currency
Credit Limit	Currency

Source From Sales Rep

When you select Sales Rep, information is sourced from the employee record selected in the **Sales Rep** field of **customer** records.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type
Name	Free-Form Text
Bill To	Text Area
Phone	Phone Number
Email	Email Address
City	Free-Form Text
Country	Free-Form Text
Supervisor	List/Record
Soc. Sec. #	Free-Form Text

Transaction Line Fields

You can source from Item or Customer fields.

Source From Item

 **Note:** To source correctly, select the Vendor in the List/Record field.

Field	Type
Name	Free-Form Text
Display Name	Free-Form Text
Vendor Name	Free-Form Text
Online Name	Free-Form Text
Available Online	Check Box
Base Price	Currency
Cost	Currency
Preferred Vendor	List/Record
On Hand	Decimal Number

Source From Customer

When you select Customer, information is sourced from the customer record selected in the **Customer:Project** field of **purchase** transactions.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type
Name	Free-Form Text
Bill To	Text Area
Ship To	Text Area
Phone	Phone Number
Fax	Phone Number
Email	Email Address
City	Free-Form Text
State	Free-Form Text
Country	Free-Form Text
Sales Rep	List/Record
Expected Close Date	Date
Renewal Date	Date
Contact	Free-Form Text
Alt. Contact	Free-Form Text

Field	Type
Alt. Phone	Phone Number
Balance	Currency
Credit Limit	Currency
Account	Free-Form Text

Transaction Item Options

You can source from Item fields.

Source From Item

 **Note:** To source correctly, select the Vendor list in the List/Record field.

Field	Type
Name	Free-Form Text
Display Name	Free-Form Text
Vendor Name	Free-Form Text
Online Name	Free-Form Text
Available Online	Check Box
Base Price	Currency
Cost	Currency
Preferred Vendor	List/Record
On Hand	Decimal Number

CRM Fields

You can source from Company, Contact, Item, or Assigned field.s

Source From Company or Contact

When you select Company, information is sourced from the record selected in the **Company** field of **case** records.

When you select Contact, information is sourced from the record selected in the **Contact** field of **case** records.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type
Name	Free-Form Text

Field	Type
Bill To	Text Area
Ship To	Text Area
Phone	Phone Number
Fax	Phone Number
Email	Email Address
City	Free-Form Text
State	Free-Form Text
Country	Free-Form Text
Sales Rep	List/Record
Expected Close Date	Date
Renewal Date	Date
Contact	Free-Form Text
Alt. Contact	Free-Form Text
Alt. Phone	Phone Number
Balance	Currency
Credit Limit	Currency
Account	Free-Form Text

Source From Item

When you select Item, information is sourced from the record selected in the **Item** field of **case** records.

 **Note:** To source correctly, select the Vendor list in the List/Record field.

Field	Type
Name	Free-Form Text
Display Name	Free-Form Text
Vendor Name	Free-Form Text
Online Name	Free-Form Text
Available Online	Check Box
Base Price	Currency
Cost	Currency
Preferred Vendor	List/Record
On Hand	Decimal Number

Source From Assigned

When you select Assigned, information is sourced from the record selected in the **Assigned To** field of **case** records.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type
Name	Free-Form Text
Bill To	Text Area
Phone	Phone Number
Email	Email Address
City	Free-Form Text
Country	Free-Form Text
Supervisor	List/Record
Soc. Sec. #	Free-Form Text

Entity Fields

You can source from Sales Rep or Supervisor fields.

Source From Sales Rep or Supervisor

When you select Sales Rep, information is sourced from the record selected in the **Sales Rep** field of **customer** records.

When you select Supervisor, information is sourced from the records selected in the **Supervisor** field of **employee** records.

 **Note:** To source correctly, select the Employee list in the List/Record field.

Field	Type
Name	Free-Form Text
Bill To	Text Area
Phone	Phone Number
Email	Email Address
City	Free-Form Text
State	Free-Form Text
Zip	Free-Form Text

Field	Type
Country	Free-Form Text
Supervisor	List/Record
Soc. Sec. #	Free-Form Text

Item Fields

You can source from Preferred Vendor fields.

Source From Preferred Vendor

When you select Preferred Vendor, information is sourced from the record selected in the **Preferred Vendor** field of **item** records.

 **Note:** To source correctly, select the Vendor list in the List/Record field.

Field	Type
Name	Free-Form Text
Bill To	Text Area
Ship To	Text Area
Phone	Phone Number
Fax	Phone Number
Email	Email Address
City	Free-Form Text
State	Free-Form Text
Zip	Free-Form Text
Country	Free-Form Text
Contact	Free-Form Text
Alt. Contact	Free-Form Text
Alt. Phone	Phone Number
Balance	Currency
Credit Limit	Currency
Account	Free-Form Text
1099 Eligible	Check Box
Tax ID	Free-Form Text
Legal Name	Free-Form Text

Creating a Custom Field

Create various types of custom record and custom transaction fields to track business-specific information.

For an overview of custom field types, see [Custom Field Types](#).

To create a custom field:

1. Go to Customization > Lists, Records, & Fields > [Custom Field] > New, where [Custom Field] is the required field type. The Custom Field page appears with options that vary by field type. The Custom Item Field page looks similar to this:

To display all settings for a custom field, click the **Expand Tabs** icon.

2. In the **Label** field, enter a meaningful name or description for the field. Labels can be up to 200 characters, but consider how long labels will look on pages and printed forms.
The label appears by the field on the transactions you select. Changing a custom field's name doesn't update it on custom forms that use the field. For information, see [Renaming Custom Fields](#).
3. In the ID field, enter a unique alphanumeric ID. For best practices and naming conventions, see [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see [Changing the ID of a Custom Object](#).
4. Select the owner of the custom field.
Only the owner can modify the record. Your name is selected by default.
5. In the **Description** field, enter a description of the custom field.
6. For custom item fields, to indicate that the field is an option for matrix items, check the **Matrix Items** box. Checking this box automatically sets the Type field to Multiple Select and the Subtab field on the Display subtab to Matrix. Changing any of these settings clears the Matrix Option box. For more information about matrix items, see the help topic [Matrix Items](#).
7. In the **Type** field, select the type of custom field you want to create.
For more information about custom field types, see [Field Type Descriptions for Custom Fields](#).

The type of field you select determines the other options you can set on the page.

 **Note:** If you later edit a field and change it to a type that isn't supported, any data stored for the field is deleted. If you change a field type or a list/record that's used for sourcing or filtering on other custom fields to a field type that isn't supported, all sourcing and filtering based on the field is removed.

Type conversion of the field takes a significant amount of time because many records are affected. A timeout can occur. For more information, see [Converting the Field Type of a Custom Field](#).

8. If you selected **List/Record** or **Multiple Select** in the **Type** field, select the list or record in the **List/Record** field that contains the items for the list field.

 **Important:** For List/Record or Multiple Select custom field types, standard security restrictions aren't applied to the options in the related List/Record list. It's possible to select a record from the list even if you don't have permission to view the record. However, you can't edit the record if you don't have edit permission.

9. By default, the **Store Value** option is enabled so that custom field values are stored in your NetSuite account. If you don't want any changes entered stored in the custom field, clear the **Store Value** box. Not storing the value enables you to look at data that's stored elsewhere. If you don't store the value, changes will be discarded, so you may want to make the field read-only. If you clear the **Store Value** box, the field value is accessible in the current workflow instance only.

You can't clear the **Store Value** box if the value is used for criteria in duplicate detection. You'll get an error message if you try. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

10. Some custom field data types provide a **Use Encrypted Format** option. To encrypt the field values stored in the database, check the box.

 **Warning:** After a custom field has been saved, the **Use Encrypted Format** setting can't be changed. Before you set the option, review [Encrypted Custom Field Stored Values](#) and ensure you fully understand the consequences of your selected setting.

When you specify that a field be encrypted, any value in the encrypted field displays as **ENCRYPTED** in all accounts except the account where the value was first created.

11. If you're creating a custom item field, to use this custom item as a merchandise hierarchy attribute, check the **Merchandise Attribute** box. When the box is checked, the custom item field is available to apply to items assigned to a merchandise hierarchy. The Merchandise Attribute box appears only on a custom item field and when the Merchandise Hierarchy feature is enabled.

For more information about merchandise hierarchies, see the help topic [Merchandise Hierarchy](#)

12. To have the field automatically show in the list of records the field is applied to, check the **Show In List** box. The lists the custom field appears in depends on the field type. For example, entity fields appear in applicable entity lists, transaction body fields appear in transaction lists, CRM fields appear in CRM record lists, and so on.

13. To index this custom field for global search, so that this field's values are searched for matches to global search keywords, check this box. You can index the field for global searches if **Store Value** is checked, and if you've selected any of the following in the **Type** field: Currency, Decimal Number, Email Address, Free-Form Text, Help, Hyperlink, Inline HTML, Integer Number, Percent, Phone Number, Text Area.

You can't index a custom field for global search if **None** is selected for any **Level for Search/Reporting** option on the **Access** subtab of the custom field record.

After you check the **Global Search** box for a custom field, each global search compares keywords to that custom field's values, in addition to comparing with record name and ID field values. For more information, see the help topic [Global Search](#).

14. If you're creating a List/Record custom field, and the record type selected is a parent record, check the **Record is Parent** box.

The field is used to create a parent-child relationship between two record types.

For more information about parent-child relationships, see [Parent-Child Record Relationships](#).

15. If you want to inactivate the field after it's created, check the **Inactive** box. For more information, see [Inactivating a Custom Field](#).

You can't clear the **Inactive** box if the custom field is used for criteria in duplicate detection. If you try to do so, you'll receive an error message. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

16. To enable the Enhance Text feature Long Text, Text Area, or Rich Text field types, check the **Enable Generic Text Enhance Actions** box. When this feature is enabled for a field, you can clean up, make longer, or make shorter the text entered in the field. You can also select specific text to clean up. For more information, see the help topic [Text Enhance](#).



Note: Users with access to Prompt Studio can add custom Text Enhance actions and their corresponding prompts for custom records and custom fields. For example, when creating a custom field, if you want to add a Text Enhance action specific to that field, you can create a Text Enhance action and a prompt for the record and field combination. For more information, see the help topic [Prompt Studio](#).

17. After you've created a custom field, you should define which record types the field can be used in. See [Assigning Custom Fields to Specific Record Types](#).



Note: If you're creating an other record field, you don't assign the field to a specific record type. Continue with [Setting Display Options for Custom Fields](#).

Watch this video for an example of creating and adding a custom field to a record type.



[Creating and Adding a Custom Field to a Record](#)

You can hide a field on a form by setting it to not display or by hiding its subtab. For more information, see [Setting Display Options for Custom Fields](#) and [Configuring Subtabs for Custom Entry and Transaction Forms](#). Note that if a field is hidden on your preferred form, you can't make inline edits to it on saved search results.

Use your account-specific domains for custom field types.

When you create a custom field, if add a URL that includes a data center-specific domain, the URL is automatically modified to your account-specific domain for users in their current session. Your account-specific domain is in the format **https://<accountID>.app.netsuite.com**, where **<accountID>** represents your account ID. The modification happens for these custom field types

- hyperlink
- rich text
- long text
- free-form text
- text area
- help
- inline HTML

The configuration stays the same. You should update all links in custom fields to use your account-specific domain. For more information, see [Account-Specific Domains in Custom Fields](#).

See the following topics.

- [Creating Custom Fields by Type](#)
- [Converting the Field Type of a Custom Field](#)
- [Assigning Custom Fields to Specific Record Types](#)
- [Behavior of View from Order Only Settings on Transaction Line and Transaction Body Custom Fields](#)
- [Setting Display Options for Custom Fields](#)
- [Setting Validation and Defaulting Properties](#)
- [Setting Sourcing Criteria](#)
- [Sourcing and Filtering Examples](#)
- [Setting Filtering Criteria](#)
- [Dependent Dropdown Lists](#)
- [Restricting Access to Custom Fields](#)
- [Restricting Access to Employee Custom Fields](#)
- [Creating Read-Only Custom Fields](#)
- [Adding Translations for Custom Fields](#)
- [Adding Custom Fields to Transaction Forms](#)
- [Tracking Changes to Custom Fields](#)

Creating Custom Fields by Type

You can create the following types of custom fields:

- Custom CRM fields (see [Creating Custom CRM Fields](#)).
- Custom Entity fields (see [Creating Custom Entity Fields](#)).
- Custom Item fields (see [Creating Custom Item Fields](#)).
- Custom Transaction Body fields (see [Creating Custom Transaction Body Fields](#)).
- Custom Transaction Line Fields (see [Creating Custom Transaction Line Fields](#)).
- Custom Item Number fields (see [Creating Custom Item Number Fields](#)).
- Custom Transaction Item options (see [Creating Custom Transaction Item Options](#)).
- Other Custom fields (see [Creating Other Record Fields](#)).
- Other Sublist fields (see [Creating Other Sublist Fields](#)).

Creating Custom CRM Fields

Custom CRM fields help you gather business-specific information in your CRM records.

These records include:

- task records
- phone call records
- campaign records

- case records
- solution records
- event records
- issue records

To create or modify custom CRM fields:

1. Go to Customization > Lists, Records, & Fields > CRM Fields.
2. On the Custom CRM Fields page, custom fields are listed with details about each field and the records it's applied to.
3. Choose an option:
 - To edit a custom CRM field, click its name in the Description column and modify the definition as needed.
 - To add a new custom CRM field, click **New**.
 For more information, see [Creating a Custom Field](#).
4. Complete fields on the Custom CRM Field page as needed, and then click **Save**.

Note: Custom CRM fields can be indexed for global search. To include a custom field in global searches, check the Global Search box on its record. You can't index a custom field for global search if None is selected for any **Level for Search/Reporting** option on the Access subtab of the custom field record. For more information, see [Creating a Custom Field](#) and [Including Custom Fields in Global Search](#).

You can use SuiteCloud Development Framework (SDF) to manage custom CRM fields as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom CRM field to another of your accounts. Each custom CRM field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Here is an example of a custom CRM field.

Custom CRM Field List

Save Cancel Apply to Forms

Label *
Followup

Id

Owner
Zwaniga, Jennifer

Description

Type
Check Box

List record

☐ Global Search
☐ Record Is Parent
☐ Inactive

☒ Store Value ☐ Use Encrypted Format
☐ Show In List

Applies To Display Validation & Defaulting Sourcing & Filtering Access Translation

☒ Task
☐ Project Task
☐ Manufacturing Operation Task
☐ Resource Allocation

☒ Phone Call
☒ Event
☐ Case
☐ Campaign ☐ Per Keyword

☐ Solution
☐ Issue ☐ Show Changes
☐ Available Externally

Save Cancel Apply to Forms

When the custom CRM field is included on a form, it could look like this example.

The screenshot shows the NetSuite 'Event' form. At the top, there are tabs for 'List', 'Search', 'Customize', and 'More'. Below these are 'Save' and 'Cancel' buttons. The form is divided into sections: 'Primary Information' with fields for Custom Form (dropdown), Title, Location, Status (dropdown), Event Access (dropdown), and Organizer (dropdown); 'Date and Time' with fields for Date, Start Time, End Time, and Reminder Type. The 'Followup' checkbox is highlighted with a red box. Below the form is a 'Message' section with a rich text editor and another 'Save' and 'Cancel' button.

Creating Custom Entity Fields

Custom entity fields let you add information specific to your business needs to your entity records. You can add entity custom fields to existing and custom subtabs on entry forms used to enter entity records in your NetSuite account.

These records include the following relationship and employee records:

- customer records
- project records
- vendor records
- other name records
- contact records
- partner records
- entity group records
- employee records
- website registration
- generic resource

To create or modify custom entity fields:

1. Go to Customization > Lists, Records, & Fields > Entity Fields.
2. On the Custom Entity Fields page, each custom field is listed, with columns providing detailed information about the field and which records the field has been applied to.
3. Choose an option:
 - To edit an existing custom entity field, click the field name in the Description column and then modify the field definition as needed.
 - To add a new custom entity field, click **New**.

For more information, see [Creating a Custom Field](#).

- Fill in the required fields on the Custom Entity Field page and then click **Save**.

Note: You can also index custom entity fields for global search. To include a custom field in global searches, check the Global Search box on its record. You can't index a custom field for global search if None is selected for any **Level for Search/Reporting** option on the Access subtab of the custom field record. For more information, see [Creating a Custom Field](#) and [Including Custom Fields in Global Search](#).

You can use SuiteCloud Development Framework (SDF) to manage custom entity fields as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom entity field to another of your accounts. Each custom entity field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Here is an example of a custom entity field.

Custom Entity Field

← → List Copy to Account

Save Cancel Change ID Apply to Forms Actions

Label *
Travel Approval Limit

Id
custerntity_travel_approval_limit

Internal Id
253

Owner
K Wolfe

Description

Type
Currency

List/record

☒ Store Value ☐ Use Encrypted Format

☐ Show In List
☐ Global Search
☐ Record Is Parent
☐ Available To Suitesignon
☐ Inactive

Applies To Display Validation & Defaulting Sourcing & Filtering Access Translation History

☐ Customer ☐ Contact ☐ Available Externally
☐ Project ☐ Partner ☐ Print On Statement
☐ Vendor ☐ Generic Resource ☐ Print On Price List
☒ Employee ☐ Web Site ☐ Project Template
☐ Other Name ☐ Group

Save Cancel Change ID Apply to Forms Actions

When the custom Entity field is included on a form, it could look like the following example.

Communication Address **Human Resources** ACH/Direct Deposit Time Tracking Payroll Commission Marketing Access System Information Custom Outbound SSO Geography

Social Security Number Birth Date

> Job Information

Expense and Purchasing

Expense Limit

Expense Approver

Expense Approval Limit

Purchase Limit

Travel Approval Limit

Purchase Approver

Purchase Approval Limit

Account

Default Account For Corporate Card Expenses

Emergency Contacts Education Personal Rates Expense Report Currencies Corporate Cards Employee Courses Approval Delegation Approval Information

Creating Custom Item Fields

Custom item fields let you add information specific to your business needs to your item records.

These records include the following Accounting and website item records:

- inventory item
- noninventory items
- service items
- expense items
- other charges
- item groups
- kit/packages
- assembly/bill of materials

To create or modify custom item fields:

1. Go to Customization > Lists, Records, & Fields > Item Fields.
2. On the Custom Item Fields page, each custom field is listed, with columns providing detailed information about the field and which records the field has been applied to.
3. Choose an option:
 - To edit an existing custom item field, click the field name in the Description column and then modify the field definition as needed.
 - To add a new custom Item field, click **New**.

For more information, see [Creating a Custom Field](#).
4. Fill in the required fields on the Custom Item Field page, and then click **Save**.

Note: You can also index custom item fields for global search. Check the Global Search box on the record to include it in global searches. You can't index a custom field for global search if None is selected for any **Level for Search/Reporting** option on the Access subtab of the custom field record. For more information, see [Creating a Custom Field](#) and [Including Custom Fields in Global Search](#).

You can use SuiteCloud Development Framework (SDF) to manage custom items fields as part of file-based customization projects. For information about SDF, see . The Copy to Account feature lets you copy a custom item field to another one of your accounts. Each custom item field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Here is an example of a custom item field.

Custom Item Field

Save Cancel Change ID Apply to Forms Actions

Label * Gift Wrap Price

Id custitem23

Internal Id 1034

Owner Letang, Sabina

Description

Matrix Option ☐

Type Currency

List/record

Store Value ☒ Use Encrypted Format ☐

Merchandise Attribute ☐

Show In List ☐

Global Search ☐

Record Is Parent ☐

Inactive ☐

Applies To Display Validation & Defaulting Sourcing & Filtering Access Translation History

☒ Inventory Item ☐ Select Individual Items

☒ Non-inventory Item

☐ Service

☐ Expense Item

☐ Other Charge

☐ Group

☐ Kit/package

☐ Assembly/bill Of Materials

Subtype ☒ Both ☐ Purchase ☐ Sale

☐ Print On Price List

☐ Subscription Plan

Save Cancel Change ID Apply to Forms Actions

When the custom item field is included on a form, it could look like the following example.

Inventory Item 10 Person-First-Aid Kit

Edit Back Supply Chain Snapshot Print Label Actions

Primary Information

Internal Id 1184

Item Name/Number 10 Person-First-Aid Kit

Upc Code

Display Name/code 10 Person-First-Aid Kit

Vendor Name/code

Primary Units Type

Primary Stock Unit

Primary Purchase Unit

Primary Sale Unit

Primary Consumption Unit

Primary Base Unit

Product Name

Subitem Of

Classification

Subsidiary

Parent Company

☐ Include Children

Department

Class

Location

Profit Center

Purchasing/Inventory Inventory Detail Sales / Pricing Accounting Revenue Recognition / Amortization Hazmat/Dangerous Goods Web Store System Information Custom Allergen Tax

☒ Show In List

Alternate Image

store_price

Gift Wrap Price 1.50

Risk Test Image

Issue An Id Card

Item Options

Edit Back Supply Chain Snapshot Print Label Actions

Creating Custom Transaction Body Fields

Custom transaction body fields let you add information specific to your business needs to the body of transaction records.

These records include:

- purchase transactions
- sales transactions
- revenue arrangements
- opportunities
- journal entries
- expense reports
- transfer orders
- item receipts
- item fulfillments
- fulfillment requests
- store pickup fulfillments
- inventory adjustments
- work orders / assembly builds
- customer payments
- vendor payments
- vendor prepayments
- deposits
- deposit applications
- pay checks
- other transaction types

You can also display custom transaction body fields on your web store transaction's checkout page. If you do this, the fields are automatically added to the body of sales transaction records.

To create or modify custom transaction body fields:

1. Go to Customization > Lists, Records, & Fields > Transaction Body Fields.
2. The Custom Transaction Body Fields page lists each custom field, with details about the field and the records that use it.
3. Choose an option:
 - To edit an existing custom transaction body field, click the field name in the Description column and then modify the definition as needed.
 - To add a new custom transaction body field, click **New**.

For more information, see [Creating a Custom Field](#).
4. Fill in the required fields on the Transaction Body Field page, and then click **Save**.



Note: You can also index custom transaction body fields for global search. Check the Global Search box on the record to include it in global searches. You can't index a custom field for global search if None is selected for any **Level for Search/Reporting** option on the Access subtab of the custom field record. For more information, see [Creating a Custom Field](#) and [Including Custom Fields in Global Search](#).

You can use SuiteCloud Development Framework (SDF) to manage custom transaction body fields as part of file-based customization projects. For information about SDF, see . The Copy to Account feature lets you copy a custom transaction body field to another one of your accounts. Each custom transaction body

field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

The following screenshot shows the Custom Transaction Body Field page configured for a custom **Entered By:** field.

After it has been created, the custom transaction body field can be applied to a transaction form. The following screenshot shows the **Entered By:** field included on a Purchase Order form.

If you set the Display Type to Hidden, the field is still included on all forms, but it won't be visible. The system ignores any changes you make to show or hide the field on all forms that apply to the custom transaction body field.

If the Log System Notes on Update Only preference is off, and you have the View access level to a custom transaction body field, its default value will show up in system notes fields when you create a transaction search. For more information, see the help topic [Searching System Notes](#).

Creating Custom Transaction Line Fields

Custom transaction line fields let you add information specific to your business needs to the line items of your transaction records.

These records include:

- expense items
- purchase items
- sale items
- store items
- revenue arrangements – available if Advanced Revenue Management is enabled
- journal entries
- expense reports
- item receipts or fulfillments
- opportunity items
- time cards
- inventory adjustment
- inventory transfer
- fulfillment requests
- store pickup fulfillments
- work orders
- paycheck earnings
- paycheck deductions
- paycheck employee taxes
- paycheck company taxes
- paycheck company contributions

Note: Additional options for custom transaction line fields include controls for displaying fields on printed forms (such as picking tickets or packing slips), grouping on invoices, storing with item groups, and applying to kit/assembly component lines. These options do not represent separate transaction types, but rather define display and storage behaviors for the custom field.

To create or modify custom transaction line fields:

1. Go to Customization > Lists, Records, & Fields > Transaction Column Fields.
2. On the Custom Transaction Line Fields page, each custom field is listed, with columns providing detailed information about the field and which records the field has been applied to.
3. Choose an option:
 - To edit an existing custom Transaction Line field, click the field name in the Description column and then modify the field definition as needed.
 - To add a new custom Transaction Line field, click **New**.

For more information, see [Creating a Custom Field](#).

4. Fill in the required fields on the Transaction Line Field page, and then click **Save**.

You can use SuiteCloud Development Framework (SDF) to manage custom transaction line fields as part of file-based customization projects. For information about SDF, see . The Copy to Account feature lets you copy a custom transaction line field to another one of your accounts. Each custom transaction line field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Here is an example of a custom transaction line field.

When the custom transaction line field is included in a form, it could look like the following example.

If you set the Display Type to Hidden, the field is still included on all forms, but it won't be visible. Any changes you make to show or hide the field on forms won't affect the custom transaction line field.

Check Box Type Limitation

There's a limitation on custom transaction line fields when all of these conditions are met:

1. Type = Check Box

2. Store Value = checked
3. Applies To = only Item Fulfillment is checked
4. On the Validation & Defaulting subtab, Default Checked is checked
5. Create a sales order and add at least one item
6. Click Save & Fulfill

However, on the item fulfillment transaction, you'll notice the transaction line field isn't checked, even with the previous settings. This happens because NetSuite takes the custom field info from the sales order, and if the check box isn't applied, it defaults to the system value. To work around this, you can apply the field to sales orders and hide it on the sales order forms, if needed.

Creating Custom Item Number Fields

Custom item number fields let you track item-specific information or workflows that are unique to your business on inventory records. For instance, you can track the status and results of quality control procedures specific to each serialized item or track recall information on lot records.

These records include:

- serial numbered items – see the help topic [Serial Numbered Items](#)
- lot numbered items – see the help topic [Lot Numbered Items](#)
- gift certificate items – see the help topic [Gift Certificates](#)



Note: To use custom item number fields, make sure at least one of the features in the preceding list is enabled.

To create a custom item number field

1. Go to Customization > Lists, Records, & Fields > Item Number Fields.
2. The Custom Item Number Field page lists each custom field, showing details about the field and which records use it. Choose an option:
 - To edit a custom item number field, click the field name in the Description column and then modify the field definition as needed.
 - To add a new custom item number field, click **New**.
For more information, see [Creating a Custom Field](#).
3. Fill in the required fields on the Item Number Field page, and then click **Save**.

When you create a lot numbered or serialized inventory item or edit an existing record, you can add the custom field to the item if it's not already applied to all items. On the item record, click the **Custom** subtab. In the **Inventory Number Options** field, press Ctrl and select all the item number fields you want to add to the item. Then click **Save**.

You can use SuiteCloud Development Framework (SDF) to manage custom item number fields as part of file-based customization projects. For information about SDF, see . The Copy to Account feature lets you copy a custom item number field to another one of your accounts. Each custom item number field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Here is an example of a custom item number field.

When the custom item number field is included on a form, it could look like the following example.

The custom item number field is found in the serial number record or lot number record of the inventory detail subrecord. To view the custom field, create a new transaction that uses the field. Enter an item and then click Inventory Detail. Select and open the details of a serial or lot number. The custom item number field appears on the Serial Number Record page, as shown in the preceding screenshot.

For more information, see the help topic [Advanced Bin / Numbered Inventory Management](#).

Creating Custom Transaction Item Options

Transaction item options let you add information, specific to your business needs, to line items on transaction records.

Item options can be used to track item characteristics. For instance, you can use item options to record different colors of an item.

You can create item options for:

- purchase items
- sales items

- opportunities
- web store items
- transfer orders
- kits and assemblies

Note: Be aware that too many characters in item option fields can cause performance issues. It's best to limit custom item option fields to 50, with a total character count of 4000 or fewer. Note that the total character count includes both field names and values.

To create or modify custom transaction item option fields:

1. Go to Customization > Lists, Records, & Fields > Transaction Item Option.
2. On the Custom Transaction Item Option Fields page, each custom field is listed, with columns providing detailed information about the field and which records the field has been applied to.
3. Choose an option:
 - To edit an existing custom **Transaction Item Option** field, click the field name in the description column and then modify the field definition as needed.
 - To add a new custom **Transaction Item Option** field, click **New**.

For more information, see [Creating a Custom Field](#).
4. Fill in the required fields on the Item Option page and then click **Save**.

Note: You can define a formula for an item option's default value (by checking the Formula box on the [Setting Validation and Defaulting Properties](#)), but it can't reference non-item option fields. You may be able to save an item option successfully with a reference to a non-item option field. However, users will encounter errors when they try to save a line item with the item option selected.

Offer your customers free promotional gift wrapping

After you've enabled the Item Options feature, you can offer your customers complementary gift wrapping on select items as a promotion. With item options, create a Gift Wrapping check box on items so customers can indicate if they would like gift wrapping.

To create an item option for gift wrapping:

1. Go to Customization > Lists, Records, & Fields > Transaction Item Options > New > New.
2. In the **Label** field, enter the name of your option, **Gift Wrapping**.
3. To create a check box field, in the **Type** field, select **Check Box**.
4. On the **Applies To** subtab, check the **Sale** and **Web Store** boxes for the option to appear on sales transactions and in your website.
5. In the **Items** field, select the individual items you want to offer gift wrapping for.
You can select multiple items by holding down the Ctrl key as you select the items with the mouse.
6. On the **Display** subtab, in the **Label for Input** field, enter the name for the option as it should appear to customers on your website.
7. Click **Save**.

Now, you can offer customers complementary gift wrapping for items. The choice your customers make appears in the **Options** column of each sales transaction.

Here's an example of a custom transaction item option field.

Item Option

Save Cancel Change ID Actions

Label * Gift Wrap

Type Check Box

Id custcolgiftwrapped

List/record

Internal Id 1036

Owner Wolfe, K

Description

☒ Store Value

☐ Inactive

Applies To Display Validation & Defaulting Sourcing & Filtering Access Translation History

☐ Purchase

☒ Sale

☐ Opportunity

☒ Web Store ☐ Hidden

☐ Transfer Order

☐ Apply To Kit/assembly Components

☐ All Items

Items

Autopsy Saws : M-Pact Autopsy Saw

Autopsy Saws : Stryker Autopsy Saw

Bio Therapy : Hirudo Medicinalis

Bio Therapy : Phaenicia Sericata Larvae

☐ Include Child Items

When the custom transaction item option field is included on a form, it could look like the following example.

Set Options

Submit Cancel

Gift Wrap Cost

☐ Gift Wrap

Creating Other Record Fields

Other record fields are used for records that don't have custom forms associated with them. You can add other record fields to these record types to gather information specific to your business needs.

Other record fields can be added to the following record types:

Account	Location
Accounting Book	Location Costing Group
Address (See Creating Custom Address Fields)	Manufacturing Cost Template
Allocation Type	Manufacturing Routing

Automatic Location Assignment Configuration	Note
Automatic Location Assignment Rule	Payroll Batch
Bill of Distribution	Payroll Item
Bill of Materials	Planned Order
Bill of Materials Revision	Planned Standard Cost
Billing Rate Card	Planning Item Group
Bin	Planning Rule Group
Campaign Event	Product
Charge	Product Version
Charge Rule	Project Budget
Class	Promotion Code
Company	Region
Competitor	Role
Department	Retirement Plan
Distribution Category	Sales Channel
Distribution Network	Shipping Partner Package
Domain	Shipping Partner Registration
Expense Category	Shipping Partner Shipment
Format Profile	Standard Cost Version
GL Numbering Sequence	Subsidiary
Global Account Mapping	Subsidiary Setting
Global Inventory Relationship	Supply Change Definition
Imported Employee Expense	Supply Change Order
Inbound Shipment	Supply Chain Snapshot
Inventory Cost Template	Supply Chain Snapshot Simulation
Inventory Status	Tax Code
Invoice Group	Tax Type
Item Account Mapping	Timesheet
Item Demand Plan	Vendor-Subsidiary Relationship
Item Location Configuration	Work Breakdown Structure
Item Source	Workflow
Item Supply Plan	Workplace

To create or modify other record fields:

1. Go to Customization > Lists, Records, & Fields > Other Custom Fields.
2. On the Other Record Fields page, each custom field is listed, with columns providing detailed information about the field and which records the field has been applied to.
3. Choose an option:
 - To edit an existing record field, click the field name in the **Description** column and then modify the field definition as needed.
 - To add a new custom record field, click **New**.

For more information, see [Creating a Custom Field](#).
4. Complete fields on the Other Record Field page as needed, and then click **Save**.

You can use SuiteCloud Development Framework (SDF) to manage custom other record fields as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom other record field to another of your accounts. Each custom other record field page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Here is an example of an other record field.

The screenshot displays the 'Other Record Field' configuration interface. At the top, there are navigation links for 'List' and 'Copy to Account'. Below this is a header bar with 'Save', 'Cancel', and 'Change ID' buttons, along with an 'Actions' menu. The main form area is divided into several sections:

- Record Type:** Includes fields for 'Role' (set to 'System Role'), 'Id' (set to 'custrecord9'), and 'Internal Id' (set to '153').
- Owner:** A dropdown menu showing 'Wolfe, K'.
- Description:** A text area for describing the field.
- Type:** A dropdown menu showing 'Check Box'.
- List/record:** A dropdown menu.
- Options:** Checkboxes for 'Store Value' (checked), 'Use Encrypted Format', 'Show In List', and 'Inactive'.

Below the main form is a tabbed interface with tabs for 'Display', 'Validation & Defaulting', 'Sourcing & Filtering', 'Access', 'Translation', and 'History'. The 'Display' tab is currently active, showing options for 'Insert Before' (set to '- Unchanged -') and 'Display Type' (set to 'Normal'). A 'Help' text area is also present. At the bottom, there are 'Save', 'Cancel', and 'Change ID' buttons, along with an 'Actions' menu.

When the other record field is included in a form, it could look like the following example.

Role

← → List Search System Notes

Edit **Back**

▼ **General**

Name
Inside Sales Representative

Id
customrole1012

Custom/standard
Custom

Center Type
Inside Sales

Employee Restrictions
own, subordinate, and unassigned ☐ Allow Viewing

Issue Role

☐ Do Not Restrict Employee Fields

☐ Restrict Time And Expenses

☒ Sales Role

☐ Support Role

☐ Partner Role

☐ Inactive

Internal Id
1012

☐ Core Administration Permissions

▼ **Authentication**

☐ Single Sign-on Only

☐ Web Services Only Role

☐ Restrict This Role By Device Id

☐ System Role

☐ Allow Manual Sending Of E-document

☐ Allow Manual Generation Of E-document

☐ Restrict This Role By Ip Address

Two-factor Authentication Required
Not required

Duration Of Trusted Device
Per session

☐ Allow Sending Of E-document For Certification

☐ Allow Manual Update Of Network Status

Creating Other Sublist Fields

Custom sublist fields are fields that you can add to the column of your sublists to gather information specific to your business needs.

To create or modify custom sublist fields:

1. Go to Customization > Lists, Records, & Fields > Other Sublist Fields.
2. On the Other Sublist Fields list page, each custom sublist field is listed, with columns providing detailed information about the field and which record type the field applies to.
3. Choose an option:
 - To edit an existing custom sublist field, click the field name in the Description column and then modify the field definition as needed.
 - To add a new custom sublist field, click **New**.

For more information, see [Creating a Custom Field](#).

4. Complete fields on the Other Sublist Field page as needed, and then click **Save**.

Here's an example of a custom sublist field.

Other Sublist Field ← → List

Save **Cancel** **Change ID** **Actions**

Sublist Record Type
Bill of Materials Revision Component

Type
Free-Form Text

Label *
Update

List/record
[Dropdown]

Id
custrecord120

Owner
45 Wolfe, K

Description
[Text Area]

☒ Store Value ☐ Use Encrypted Format

☐ Inactive

Display **Validation & Defaulting** **Sourcing & Filtering** **Access** **Translation** **History**

Insert Before
- Unchanged -

Display Type
Normal

Display Width
[Input]

Help
[Text Area]

Save **Cancel** **Change ID** **Actions**

When the other sublist field is included in a form, it could look like the following example.

Bill of Materials Revision

Save **Cancel** **Customize Form** **Actions**

NAME *
Update 1

MEMO
[Text Area]

BILL OF MATERIALS
Standard Installation

EFFECTIVE START DATE
11/16/2017

EFFECTIVE END DATE
[Text Field]

☐ INACTIVE

DATE CREATED
11/16/2017

Components **System Notes**

ITEM *	DESCRIPTION	COMPONENT YIELD	BOM QUANTITY	ITEM SOURCE	QUANTITY *	VERSION	UPDATE
⋮ Ergonomic Keyboard	Ergonomic Keyboard	100.0%	1	Stock	1	6	
		100.0%	1		1		

Add **Cancel** **Insert** **Remove** **Move Up** **Move Down** **Move To Top** **Move To Bottom**

Save **Cancel** **Customize Form** **Actions**

Assigning Custom Fields to Specific Record Types

You can assign custom fields to display on specific record types. When you assign the field to a record type, it's automatically available as a possible field when creating a custom form for that record type. The field will also be available on all standard forms.

For custom entity fields, you must select the record types where the field is available. If you select a record type, the field automatically displays on all forms of that record type, including any custom forms. You can then edit custom forms to not show the new custom field.

Conversely, all custom transaction fields are automatically available in form customization, regardless of what you select on the **Applies To** subtab. For example, if you apply a custom transaction field to sales transaction forms, the field is also available when you customize purchase transaction forms.

For more information about available custom field types, see [Field Type Descriptions for Custom Fields](#).

To apply a custom field to a record type:

1. On the custom field setup page, click the **Applies To** subtab.

Applies To	Display	Validation & Defaulting	Sourcing & Filtering	Access	Translation
☒ Customer					
☐ Project					
☒ Vendor					
☐ Employee					
☐ Other Name					
	☐ Contact				☐ Available Externally
	☐ Partner				☐ Print on Statement
	☐ Generic Resource				☐ Print on Price List
	☐ Web Site				☐ Project Template
	☐ Group				

Save Cancel Apply to Forms

2. Check the boxes to select the records you want the field to display on.

Note the following:

- When a new transaction is created from a transaction that has a custom field value, the field value is copied to the new transaction.
- You can add record custom fields to existing and custom subtabs on the entry forms you use to enter records in your NetSuite account.
- You can add transaction custom fields to the top (body) or the line items (columns) of transactions. When adding a custom field to the body of a transaction, you apply the field to the type of transaction.
- When adding a custom field to the line items of a transaction, you apply the field to the type of line item.
- To apply a custom item field to a portion of the item, check the Select Individual Items box. Then in the Items field, hold down the Ctrl key and click each item that should have the custom field.
- To specify that the settings for a custom item field or custom transaction item option field also apply to its child items, check the Include Child Items box. Any child item fields added later will inherit the parent settings.
- When you have the Advanced Employee Permissions feature enabled and you select **Employee** from the **Applies To** subtab, an **Employee Access** subtab appears. From this subtab you can select the custom advanced employee permission you want to associate the custom field with. For more information, see the help topic [Advanced Employee Permissions Overview](#).
- You can set up the kit or assembly transaction line custom field to copy values from sales order items to fulfillment items. For more information, see [Apply to Kit or Assembly Components Setting for Custom Segments and Transaction Line Custom Fields](#).
- For custom item fields, there's a **Subtype** field with options to select **Both**, **Purchase**, or **Sale**. This selection applies the custom field to items available only for purchase, only for sale, or for both purchase and sale. Item subtypes apply only to non-inventory, service, and other charge item records
- For custom transaction body fields, if the Log System Notes on Update Only preference is off, and you have the View access level to a field, the default value of your custom transaction

body field will show up in system notes fields when you create a transaction search. For more information, see the help topic [Searching System Notes](#).

You can't clear the **Applies To** box if the custom field is used for criteria in duplicate detection. If you try to do so, you'll receive an error message. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

- After you've defined a custom field to display on specific record types, you should define the display properties for that field. See [Setting Display Options for Custom Fields](#).

Warning: If you assign a custom field to a record type that's a child of another record, that custom field may not always show on the parent record forms. A child record may not be available on a form for a parent record that was created through transformation from another record type. For example, if you define a custom record as a child record of sales order, the custom child record isn't available on forms for sales orders transformed from quotes.

Behavior of View from Order Only Settings on Transaction Line and Transaction Body Custom Fields

This topic provides an overview of the View from Order Only setting for custom transaction fields. For detailed configuration steps and specific behavior scenarios, see [Behavior of View from Order Only Settings on Item Receipts and Item Fulfillments](#).

The Applies To subtab of transaction body and transaction line custom fields have settings for Item Receipt and Item Fulfillment fields. These settings also have View from Order Only fields. When you check a View from Order Only box, here's what happens:

- (Item Receipt) View from Order Only – the custom field will always show the purchase order value on item receipts, but you won't be able to edit it on the receipt.
- (Item Fulfillment) View from Order Only – the custom field will always show the sales order value on item fulfillments, but you won't be able to edit it on the fulfillment.

Here's an example of a transaction body field with View from Order Only boxes checked.

Note: On a Transaction Line Field, the Purchase and Sale boxes are named Purchase Item and Sale Item.

Transaction Body Field

Save Cancel Apply to Forms

Label *
OWNER: Mel Blank
DESCRIPTION

TYPE: Free-Form Text
LIST/RECORD: [dropdown]
☒ STORE VALUE ☐ USE ENCRYPTED FORMAT
☐ SHOW IN LIST

GLOBAL SEARCH
RECORD IS PARENT
INACTIVE

Applies To Display Validation & Defaulting Sourcing & Filtering Access

☒ PURCHASE	☒ ITEM FULFILLMENT	☒ VIEW FROM ORDER ONLY	☐ DISPLAY IN WEBSITE
☒ SALE	☐ INVENTORY ADJUSTMENTS		☐ PRINT ON STANDARD FORMS
☐ OPPORTUNITY	☐ CUSTOMER PAYMENT		☐ PRINT ON PICKING TICKET
☐ JOURNAL	☐ VENDOR PAYMENT		☐ PRINT ON PACKING SLIP
☐ EXPENSE REPORT	☐ DEPOSIT		☐ PRINT ON STATEMENT
☒ ITEM RECEIPT	☐ DEPOSIT APPLICATION		☐ OTHER
☒ VIEW FROM ORDER ONLY			

Save Cancel Apply to Forms

To use these fields, you must check the following boxes.

Field	Available when these boxes are checked
(Item Receipt) View from Order Only	■ Purchase or Purchase Item ■ Item Receipt ■ Store Value
(Item Fulfillment) View from Order Only	■ Sale or Sale Item ■ Item Fulfillment ■ Store Value

Behavior of View from Order Only Settings on Item Receipts and Item Fulfillments

This topic describes the specific behaviors and outcomes of enabling or disabling the View from Order Only setting, including example scenarios. For a general explanation of this setting, see [Behavior of View from Order Only Settings on Transaction Line and Transaction Body Custom Fields](#).

When you click Receive on a purchase order, an Item Receipt page appears. The custom Item Receipt field gets its value from the original (parent) purchase order.

When you click Fulfill on a sales order, an Item Fulfillment page appears. The custom Item Fulfillment field gets its value from the original (parent) sales order.

If the View from Order Only box is checked on the field definitions page, the values in the related custom Item Receipt or custom Item Fulfillment fields are read-only. Even after saving and editing, the fields stay read-only. If you update the custom field value on the parent record, the value also updates on the related Item Receipt page or Item Fulfillment page. To edit the values, you first need to clear the View from Order Only box.

The following table describes how purchase order transactions and item receipts work with different settings. The same behavior applies to sales order transactions using the Sale box, Item Fulfillment box, and Fulfill button.

Boxes		Actions				
Purchase or Purchase Item	Item Receipt	View from Order Only	Create New Item Receipt from Purchase Order by Clicking the Receive Button	Clear the View from Order Only box after Item Receipt is Created	Update Field Value on Purchase Order	Check or Clear the View from Order Only Box
Cleared	Checked	Cleared	Item Receipt page has no value in the related custom field. You can enter and save a value.	N/A	Can't update field on purchase order because the Purchase field isn't applied.	N/A
Checked	Checked	Cleared	Item Receipt page has a value	N/A	Value on related Item Receipt	N/A

Boxes		Actions				
			in the related custom field that's copied from the parent purchase order. You can edit and save this value.		page custom field does not update.	
Checked	Checked	Checked	Item Receipt page has a value in the related custom field that's copied from the parent purchase order. The value is read-only and can't be changed.	Value isn't taken from the parent purchase order. Instead, the value loads from a database, and contains the value that was sourced during the creation of the item receipt.	Value on related Item Receipt page custom field does update.	Clear: Field displays the value that was in the field when the item receipt was created from the purchase order. If you change the value on the purchase order, the value on the item receipt remains the same. Check: Field displays the updated value taken from the purchase order.

Here's an example of an Item Receipt page, where the custom Item Receipt field gets its value from Purchase Order #2.

The same behavior applies to custom Item Fulfillment fields on sales orders, where the field gets its value from the parent sales order.

Item Receipt External ID = ""

2 Vendor 1

Save Cancel New Actions

Primary Information

REFERENCE #
2

DATE *
4/25/2024

VENDOR
Vendor 1

POSTING PERIOD
Apr 2024

CREATED FROM
Purchase Order #2

MEMO

Items & Expenses Relationships Communication System Information **Custom**

ITEM RECEIPT FIELD
Some Value - Updated

SOURCED FROM PO #2

ITEM RCPT AND PURCHASE - NO VIEW
Some Value 2

ITEM RECEIP - NO VIEW FROM ORDER
Some Value 3

Save Cancel New Actions

Setting Display Options for Custom Fields

You can choose exactly where each custom field appears on a form, relative to other fields and subtabs.

To set the display properties of a custom field:

1. On the custom field setup page, click the **Display** subtab.

The fields available on the subtab depend on the field type you're modifying.

The screenshot shows the 'Display' subtab of the custom field setup page. The subtab is selected and highlighted. The page contains several input fields: 'Insert Before' (a dropdown menu), 'Subtab' (a dropdown menu), 'Display Type' (a dropdown menu with 'Normal' selected), 'Width' and 'Height' (input fields), and 'Display Size' (a dropdown menu). There are also 'Save', 'Cancel', and 'Apply to Forms' buttons at the bottom.

2. In the **Insert Before** field, select where to place your new field on records.

The field lists existing custom fields of the same type.

Note: The Insert Before field affects the placement of fields on standard forms and on newly created fields. To rearrangement of fields on a custom form, need to edit the custom form itself.

You can also choose to have the custom field span the entire column at the top or bottom of a subtab or section. This is useful for adding a text area field to provide additional context. For more information, see [Adding a Field that Spans the Top or Bottom of a Page](#).

3. In the **Subtab** field, select the subtab you want the field to display on.

For instance, select **Main** to display the field at the top of the record.

Important: If you don't select a subtab, the field will default to a custom subtab for the record. Select a subtab that's relevant for the type of information the custom field stores.

Note: To include the field in saved searches, make sure it's set up to display on your preferred form and included on a subtab that displays the form. For more information, see [Configuring Subtabs for Custom Entry and Transaction Forms](#).

4. In the **Display Type** field, select the display type.

Display types let you specify how your custom fields behave in NetSuite. You can use display types to make fields only for informational purposes and not have them stored in your account. You can also create fields that aren't editable or that have default information or custom code calculations.

Following are the available display types.

- **Normal:** A normal field can be edited. You can use the field with custom code calculations, defaulting, and sourcing information.

For example, you create a custom field on employee records for a spending limit. The Spending Limit field has a display type of normal because you want to edit and store the information entered in the field.

Custom transaction fields are available in the custom form setup for **all** record types. The custom transaction fields are available in the Screen Fields > Custom subtab.

If you specify normal display for a transaction field, and then hide it on the custom form, it still appears in the custom form setup.

- **Disabled:** A disabled field can't be edited. You can use the field with custom code calculations, defaulting, and sourcing information only. Any field with a display type of disabled that does not have default, sourced, or custom code information won't display on forms.

For example, you create a custom field on expense reports for a spending limit. The Spending Limit field on expense reports is sourced from the Spending Limit custom field on employee records. When an employee enters an expense report, they automatically see their spending limit on the expense report. The field has a display type of disabled because you want the information in the field to be updated but not edited.



Note: You can't disable a required field unless the field has a default value.

- **Inline Text:** An inline text field is for informational purposes only. The information in the field is the result of custom code calculation, defaulting, or sourcing information only. Note that a value for a field with an Inline Text display type will be interpreted as HTML markup source. The value will be evaluated by the browser when a record containing the field is displayed. Inline text fields of the List/Record or Check Box type aren't available for use with custom code. These fields are also not available for transaction line fields.

For example, you create a Tax ID custom field for your purchase orders. When creating the custom field, you can enter your tax ID in the Default Value field. Your Tax ID then appears on purchase orders. The field has a display type of inline text because your tax ID is for informational purposes only. The information won't be stored with each transaction.

- **Hidden:** A hidden field can't be seen on the record or transaction you apply it to. You can perform a search to display the value of the field. The information in the field is the result of custom code calculations and defaulting information. You must use custom code or set a default for the field. Note that you can also define a field as shown in its custom field definition, and then selectively hide it on a form-by-form basis.

If a custom field is marked as hidden, it isn't available to add to custom forms. Also, the custom field isn't available in the Fields list when customizing the form.

For example, you can use a hidden field to indicate if a customer requires special handling based on internal guidelines. Customer service agents won't see this field directly, but management can still search and report on the information.

In SuiteScript, only user event, scheduled, and Suitelet scripts can set the value of a custom field that has a display type of hidden. For more information about custom coding with SuiteScript, see the help topic [SuiteScript 2.x Script Types](#).

Note for custom transaction body and custom transaction line fields: If the Display Type field is set to Hidden, the field is still included on all forms, even if it isn't displayed. The system ignores any changes you make to show or hide the field on all forms that apply to that custom transaction body or custom transaction line field.

If the Log System Notes on Update Only permission isn't set, when you create a new transaction, the default value of a hidden field appears on the System Information subtab on transaction forms where the field is applied. For more information, see the help topic [Setting General Account Preferences](#).



Warning: Hiding a custom field doesn't provide field-level security. It's for display purposed only. Keep in mind that hidden custom fields are still visible in the page source.

5. Set the height and width of your custom field.

The height and width you enter only affect how the field looks on the page. The permitted size of the custom field (number of pixels or lines permitted) is controlled by default options. For more information about defaulting options, see [Setting Validation and Defaulting Properties](#).

- **Height:** Set the height for the custom field in number of lines. The default is three lines.
- **Width:** Set the width for your custom field in columns.



Important: Field configurations on each custom form interact with the values you set here. Actions such as setting up field groups, adding column breaks, and setting fields to be **Same Row as Previous** on custom forms can cause custom field text to be displayed in an unexpected way based on the custom field width. For details about configuring fields on custom forms, see [Configuring Field Groups](#), [Configuring Fields or Screens](#), and [Associating Related Fields on Custom Forms](#).

6. (Hyperlink fields only) If needed, in the **Link Text** field, enter text to display instead of a URL for hyperlink fields.

Users will see the custom text instead of the URL on records and transactions. Clicking the text will take you to the URL.

7. (Decimal Number, Integer Number, and Percent fields only) Review the **Apply Formatting** setting and change if needed. To enable the setting, **check** the box. To disable the setting, **clear** the box.
 - When Apply Formatting is enabled, the field follows the company's number format settings in the Number Format and Negative Number Format preferences at Company, Subsidiary, or User level.
 - When Apply Formatting is disabled, the custom field's values aren't formatted, meaning they have no commas or decimal points. (The setting is appropriate for Integer Number type fields used as unique identifiers.)



Note: Default settings are as follows: disabled for custom fields created prior to 2012.1 upgrade, to preserve pre-upgrade behavior, and enabled for custom fields created after 2012.1 upgrade.

8. In the **Help** field, enter a brief description of the purpose of the field and the information that should be entered into the field.

The help is available when a user clicks the name of the field.

You can enter HTML in the field. Be sure to begin your markup source with `<html>` and end with `</html>`.



Note: You should always enter information in the Help field to increase the usability of customized forms or records.

9. In the **Label for Input** field, enter the label for the item option as you want it to appear to customers on your website.
10. If the custom field is of type list/record or multi-select, and the selection in the List/Record list is hierarchical, a Show Hierarchy box is available.

To show the record hierarchy, or the full name, check the **Show Hierarchy** box. To show the field name without the hierarchy, or the short name, clear the **Show Hierarchy** box.

In the case of accounts, when the Use Account Numbers preference is enabled, custom account fields display the account numbers together with account names.
11. After you've set the display properties, you should define any validation and defaulting properties. See [Setting Validation and Defaulting Properties](#).

Adding Field-Level Help for Custom Fields

Field-level help is a brief description of the purpose of a field and the information that should be entered into a field. To increase the usability of customized forms or records, you should always provide field-level help for custom fields. The help is available when a user clicks the name of the field.

You add custom field-level help to custom fields on the Display subtab of the custom field setup page.

For information about adding field-level help for custom fields, watch the following help video.

 [Adding Field-Level Help for Custom Fields](#)

To add custom field-level help:

1. Go to Customization > Lists, Records, & Fields > [Custom Field], where [Custom Field] is the required field type.
2. To create and provide help for a new custom field, click **New**. Otherwise, to add help to an existing custom field, select the field from the list.
3. Click the **Display** subtab.
4. In the **Help** field, enter the field-level help description.
5. Click **Save**.

For more information about the Display settings for custom fields, see [Setting Display Options for Custom Fields](#).

You can define translations for the Field-Level Help of a custom field on the Translation subtab of the custom field page. For more information, see [Adding Translations for Custom Fields](#).

Adding a Field that Spans the Top or Bottom of a Page

When determining where a custom field displays on a form, for some field types you can optionally have the field span the column at the top or bottom of a subtab or section.

When determining where a custom field displays on a form, for some field types you can optionally have the field span the column at the top or bottom of a subtab or section. This is useful for adding a text area field to provide additional context.

To make a field span, on the Insert Before field of the Display subtab, select either **Outside columns at top** or **Outside columns at bottom**. You can also set the initial size of the field by entering a width, height, or both in the Display Size field. You can always adjust the field's size later if you need to. If you don't set a size, it'll default to three columns wide and three lines high.

The field displays on the form above or below the other fields on the subtab or section. To resize the field, drag the control in the bottom right corner of the field. The column width will adjust to fit the field's size. If the column spans beyond the page width, a horizontal scroll bar is added to the subtab or section. This scroll bar applies only to the subtab or section where the field appears.

The following screenshot shows the Miscellaneous Instructions field spanned across the page of the Purchasing/Inventory subtab.

Purchasing/Inventory | **Inventory Detail** | **Sales / Pricing** | **Accounting** | **Revenue Recognition / Amortization**

Miscellaneous Instructions

▼ **Item/Cost Detail**

☐ Track Landed Cost

Costing Method: Average

Cost Category *: Default Cost Category ▼

Average Cost

Purchase Price

Last Purchase Price

Total Value

Purchase Description

Stock Description

☐ Match Bill To Rec

For more information about creating a field that spans the top or bottom of a page, watch the following video.

[Adding a custom Field that Spans the Top or Bottom of a Page](#)

For more information about Display Options, see [Setting Display Options for Custom Fields](#).

Setting Validation and Defaulting Properties

Validation options are constraints you can place on your custom fields to help control what's entered in your custom fields. Defaults are pre-set values that appear in your custom fields when you create a new record or transaction.

Watch the following video for an example of setting a default selection to a custom field.

[Adding a Default Selection to a Custom Field](#)

To set validation and defaulting properties:

1. On the custom field setup page, click the **Validation & Defaulting** subtab.

Applies To | **Display** | **Validation & Defaulting** | **Sourcing & Filtering** | **Access** | **Translation**

☐ Mandatory

☐ Check Spelling

Maximum Length

Default Value

Search

Field

☐ Formula

Save | Cancel | Apply to Forms

2. Set the validation options, which may vary depending on the field type selected and its data type. Here are some possible options.
 - **Mandatory:** Enable to require information to be entered in the custom fields before saving a record or transaction.

For instance, you can create a mandatory contact number field for your sales transactions. Sales representatives will need to enter a contact number for the customer before saving the transaction.



Note: You can also make fields mandatory when customizing a form. When using the same custom field on various forms, consider setting required field at the form level, rather than on the field itself. Applying the setting at the form level is useful in cases where the field information is required on one form but not on another form.

- **Minimum Value:** Set the minimum number that can be entered in the custom field. You won't be able to save a record or transaction if the value is less than the minimum.

For example, you can create a sales quota field for your employee records. If you set a limit of \$500.00, you won't be able to enter less than 500 in the field.

You can set a minimum value for a percent field that's less than 0. If you don't enter a minimum, it'll default to 0.

- **Maximum Value:** Set the maximum number that can be entered in the custom field. You won't be able to save a record or transaction if the value exceeds the maximum.

For instance, you can create a spending limit custom field for employee records. Set a limit of \$700.00 when creating the custom field to cap employee spending limits at \$700.00.

You can set a maximum value for a percent field that's over 100. If you don't set the maximum, it'll default to 100.

- **Maximum Length:** Set the maximum number of characters that can be entered in the custom field. You won't be able to save a record or transaction if the field exceeds the character limit.

For example, you can create a gift message field for your sales transactions to record a special message from your customers. You can set a character limit to keep messages concise.

- **Allow Delete of List/Record Values:** Controls how the system handles deletions of records referenced by the custom field. This field is available for custom field definitions that have a type of List/Record or Multiple Select and have the Store Value box checked.
 - To prevent deletions and return an error message stating that the record could not be deleted due to dependencies and providing a link to dependent records, select **Prevent and Return Error**.
 - To permit deletions, null out field values that use the deleted record, and log system notes for deletions, select **Allow and Set Dependent Field Values to Null**.

For more information, see [Customizing Delete Behavior for Records Referenced by Custom Fields](#).

- **Formula:** Enable to validate SQL formula expressions for formula fields. For more information about defining a custom formula field, see [Creating Formula Fields](#).
- **Search:** Select a search with summary results to be used to calculate a value for the custom field. Search fields display a rollup value for a selected search results field. The value is dynamically calculated each time a form containing the summary search field is displayed. For example, you can display the total quantity of all line items on a transaction.

The Search option is available only for custom fields and data types that support summary search derived values. For details, see [Creating Custom Fields with Values Derived from Summary Search Results](#).

- **Field:** You can base values for the custom field on summary search results. Optionally, select a comparison field to join related records in cases where you want to place the custom field on a form for a record type that's different from the summary search record type. For example, you may want to place a custom entity field showing the result of a customer record summary search on an employee custom form. To do so, you could select an employee record field

whose values could be matched to the values for the search's Available Filter field. Search results field values for all records with matching values for the Compare To field and Available Filter field would be used to calculate the value of the summary search custom field.

The Field option is available only for custom fields and data types that support summary search derived values. For details, see [Creating Custom Fields with Values Derived from Summary Search Results](#).

3. If needed, enter default parameters for the field.

To set values into an Inline Text or Disabled field, you **must** specify a default value or source the information for the field from another field.

Depending on the field type, various default values can be specified. Possible options include:

- **Default Checked:** To indicate that the check box custom field should display checked by default, check the box. The custom fields can still be cleared on individual transactions and records.

For example, you can add a Subscribe to Newsletter check box to your customer records. When you set the field to default checked, new customers are automatically subscribed to your newsletter.

Custom transaction line fields have a limitation that occurs when several conditions are met. For more information, see [Creating Custom Transaction Line Fields](#).

- **Default Value:** If needed, enter a value to display in the field by default. The value can still be changed on individual records and transactions if the field isn't locked.

When working with Inline HTML field, the default value is applied when you create a new record or when you load an existing record.

When working with Free-form text, Text area, Rich Text or Hyperlink fields, you can include NetSuite tags in the default definition. These tags are populated with field values when the page is loaded or saved. For more information, see [Dynamic Defaults and Dynamic Hyperlinks](#).

For example, you can add a spending limit field to your employee records with a default value of \$150.00. When you enter new employee records, the field automatically fills with the amount.

Default values defined here are applied only at creation time for any specified record. After a record has been created, subsequent edits to that record store the previously stored value unless it also has been edited.

- **Dynamic Default:** Dynamic default enables you to select from preset default options specific to the custom field you're creating based on its field type. There are six types of dynamic defaults:

- **Current Date/Time:** For Date fields, your custom field is automatically filled with the current date or time.

For example, you can add an information-only date field to your sales orders. Setting the field to current date and time lets you track when your sales representatives are most productive.



Important: The date and time for the field are based on the user's NetSuite Time Zone preference. The preference is set at Home > Set Preferences, not on the browser client time zone.

- **Current User:** For Entity List/Record fields, have the name of the entity entering the record or transaction automatically filled in the field. For example, you have data entry employees as well as sales representatives. You can add a field to your transactions to record who enters the transaction as well as the sales representative who made the sale.
- **Current User's Supervisor:** For Entity List/Record fields, have the name of the supervisor selected on the entity record automatically filled in the field. For example, you can create a field for your task records that lists the Assignee's supervisor. This information can help your management team stay informed of team projects.

- **Current User's Department:** For Entity List/Record fields, have the department of the entity entering the record or transaction automatically filled in the field. For example, you have data entry employees in various departments. You can add a field to your transactions to record the department of the employee who enters the transaction.
- **Current User's Location:** For Entity List/Record fields, have the location of the entity entering the record or transaction automatically filled in the field. For example, you have data entry employees in various locations. You can add a field to your transactions to record the location of the employee who enters the transaction.
- **Current User's Subsidiary:** For Entity List/Record fields, have the subsidiary of the entity entering the record or transaction automatically filled in the field. For example, you have data entry employees in various subsidiaries. You can add a field to your transactions to record the subsidiary of the employee who enters the customer.
- **Default Selection:** Set a selection list to display in the custom field by default. The choices are limited to the list selected in the List/Record field when creating the custom field.

For example, you can create a custom field to record advertising preferences for your customers. You can set a default of Email if you know that the majority of your customers prefer to receive ads by email. When a customer loads the page, Email is displayed in the selection list by default but they can choose Fax or Mail if needed.

4. After you've entered validation and defaulting properties, you should set any sourcing criteria. See [Setting Sourcing Criteria](#).

Customizing Delete Behavior for Records Referenced by Custom Fields

List/record and multiple select type custom fields let users select from a list of values. The list is populated by records of the list/record type set in the custom field definition. Deleting referenced records can cause issues because list/record and multiple select fields depend on them. For example, a custom field called Color can be dependent on a custom record type called Color List. If a value is deleted from Color List, for example Purple, any records with a Color custom field value of Purple are impacted.

For custom field definitions that have a type of List/Record or Multiple Select and have the Store Value option enabled, the **Allow Delete of List/Record Values** option is available. The Allow Delete option lets you override the default system behavior when a delete is attempted of a record referenced by values in the custom field.

The screenshot shows the 'Custom Entity Field' configuration interface. The 'Label' field is 'Account type'. The 'Type' is 'Multiple Select'. The 'List/Record' is 'List'. The 'Store Value' checkbox is checked. The 'Allow Delete of List/Record Values?' dropdown is set to 'Prevent and Return Error'. The 'Validation & Defaulting' tab is active, showing options for Mandatory, Check Spelling, and the 'Allow Delete of List/Record Values?' dropdown.

Default settings for the option depend on the record type selected in the List/Record field:

- For entity, item, event, and transaction type records: default is **Allow and Set Dependent Field Values to Null**.

When a delete of a referenced record sets a dependent custom field to a null value, a system note is logged on the record containing the dependent custom field value. The note specifies the user who deleted the referenced record as the Set by value, and Unset as the Type.

- For other record types (including custom records): default is **Prevent and Return Error**.

When a delete of a referenced record is prevented due to dependent custom field values, the error message includes a link to a page listing the dependent records. The Dependent Records page includes the name of the referenced record at the top of the page. The list on the page includes a line for each dependent custom field, with the following details: custom field type, name of custom field, and name of record containing the custom field with a clickable link to the record.

Note the following:

- The **Allow Delete of List/Record Values** setting isn't available for Workflow or Workflow Action custom fields.
- The **Allow Delete of List/Record Values** setting for a custom field overrides whether the field is mandatory. Therefore, so a setting of **Allow and Set Dependent Field Values to Null** can produce nulled values even for mandatory fields. To avoid nulled values, select a setting of **Prevent and Return Error** for mandatory fields.
- SuiteBundler ignores the **Allow Delete of List/Record Values** setting. If a referenced record is deleted as part of a bundle operation, such as uninstall, the treatment of dependent custom field values conforms to SuiteBundler rules.

Setting Sourcing Criteria

This topic introduces the sourcing and filtering capabilities available for custom fields, including when to store sourced values.


Custom fields can pull values from other records in your account. The information populated in the custom field is then dependent on fields associated with a record selected on another field within

that form. Sourcing helps reduce data-entry errors and keeps your forms up-to-date with the latest information your customers and employees need.

You can source data from both standard and custom fields.

For instance, you can have two custom fields, Sales Rep and Sales Rep Email, on a custom case form. When a customer record is selected in the Customer field, the sales representative already defined in the selected customer record is automatically filled in on the Sales Rep field on the case form. The Sales Rep Email field then defaults to the email address defined for the sourced Sales Rep.

The following diagram shows the custom field sourcing and filtering setup required to populate the Sales Rep and Sales Rep Email fields on a custom case form with data from the customer record:

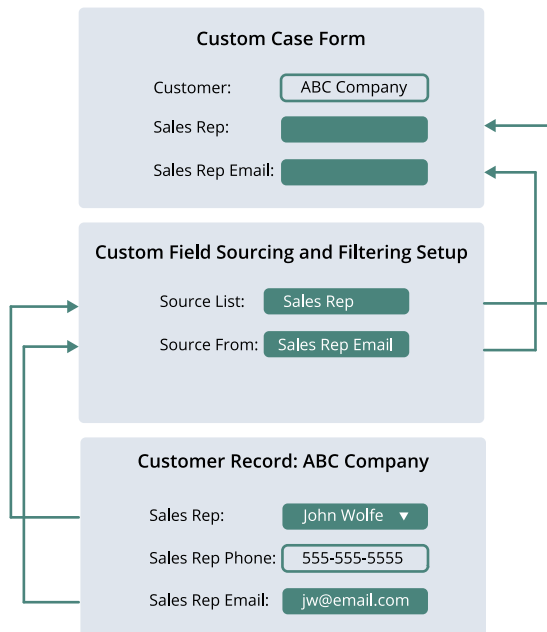

Note: The custom field gets updated when the record is created or when specific fields are changed when editing a record. In the preceding example, if you change the sales representative selected on the customer, the sourced field will update to show the new sales representative's email address.

When setting up sourcing, you can choose to store the sourced value in the custom field. If you don't store the value, it's not saved in the custom field. Instead, the field will dynamically pull data from another source stored elsewhere. By not saving the value in the custom field, the field information is instead dynamically populated with data that's stored elsewhere.

You can store a sourced value to prevent it from being overwritten if the source field content changes. To store a value, you need to set up the Source List and Source From fields on the custom field's Sourcing & Filtering subtab. The sourcing automatically fills the custom field with a value when the primary field, defined in the Source List field, is changed. If Store Value is checked, then the value populated in the field is stored on the record. You can optionally change the value on the custom field to have that value stored instead of the populated value. If the value in the source field changes, the stored value won't be overwritten.

For information about how to set up sourcing and filtering criteria, see [Setting Sourcing and Filtering Criteria for a Custom Field](#)

For more information about storing values, see [Setting the Store Value Field](#).

For information about custom transaction line field sourcing prior to 2021.2, see [Note about Custom Transaction Line Field Sourcing](#).

Example of Storing a Value

The following example describes a situation where it could make sense to store a value.

Let's say John Wolfe is the sales representative for a specific region, and he makes some sales on order SO-123. John Wolfe's name is automatically added to the sales order as the sales representative for the region. You always want John Wolfe to be associated as the sales representative on sales order SO-123. In the future, Mary Brown replaces John Wolfe as the region's sales representative. You don't want Mary's name to replace John's name on sales order SO-123. In this situation, it makes sense to store the sales rep value on the sales order.

Setting Sourcing and Filtering Criteria for a Custom Field

This topic provides steps for setting up sourcing and filtering criteria for custom fields. For an overview of sourcing concepts, see [Setting Sourcing Criteria](#).

To set sourcing and filtering criteria:

1. Edit the custom field you want to add sourcing and filtering criteria to.
2. If you don't want to store the value, clear the **Store Value** box. Typically, you won't want to store the value. For an example of a situation where it could make sense to store a value, see [Example of Storing a Value](#).
3. On the **Display** subtab, review the **Display Type** field. If the **Display Type** field is set to **Hidden**, sourcing won't work. For sourcing to work, select a **Display Type** other than **Hidden**.
4. Click the **Sourcing & Filtering** subtab.

Applies To	Display	Validation & Defaulting	Sourcing & Filtering	Access	Translation
Source List Partner Source From Account					

5. From the **Source List** list, select the field that references the record you want to source information from.

For instance, you might create a custom field to show a sales representative's email address on a customer record. In this case, you'd select **Sales Rep** from the **Source List** field.

When entering sourcing information for transaction body or transaction line fields, the **Entity** field varies depending on the transaction type. For example, on an expense report, entity refers to an employee, but on a purchase order, it's the vendor. For a purchase order, select **Vendor** in the **Source List** field instead of **Entity** to get the required results.

When working with entity fields, you can also define the field to source from a field on the parent record by selecting **Parent** from the **Source List** list.

Note: Information for a Multiple Select field type can't be sourced.

6. From the **Source From** list, select the field you want to source information from. The Source From field is on the record you selected from the **Source List** list.

In the **Source From** list, you can select any field from the record you selected in the **Source List** field.

In the preceding example, select **Email** from the **Source From** list.

When you select a record, the field is filled with the value stored in the selected field. The field you select here must match with the type selected for the custom field. For instance, if you select **E-mail** as the field type and then select an address field from the **Source From** list, you'll get an error.

 **Note:** If your field is a List/Record field, the field selected for the Source From field **must** be in the record type selected as the List/Record.

7. If your field is a List/Record field, you can filter the choices that can be selected.

When defining a List/Record Type field, you can have the custom field populate with values that meet specific parameters in the sourced list or record. First, select the required item to filter by from the **Source Filter by** list. Then select an item from the **Source List** and, optionally, from the **Source From** list. When you select an element from the source list, it fills the option-sourced custom field with all elements where the source filter by field matches the source list (or the source from field of the source list).

The record you're sourcing from must be associated with the type of record you want to appear in your custom field.

 **Note:** The field selected from the Source Filter by list **must** be in the record type selected as the List/Record.

For more information, see [Sourcing and Filtering Examples](#).

8. After setting the sourcing criteria, you should set any needed filtering criteria. See [Setting Filtering Criteria](#).

 **Note:** You can't mass update or inline edit a custom field with a sourcing relationship. For more information, see the help topic [Mass Updates](#).

Custom Fields Sourcing Videos

This topic includes helpful video resources demonstrating how to use sourcing, filtering, and the Store Value feature with custom fields.

Watch the following help video for information about using sourcing and the store value feature with a custom field.

 [Using Sourcing and the Store Value Feature with a Custom Field](#)

Watch the following help video for information about setting sourcing and filtering criteria for a custom field.

 [Adding Sourcing and Filtering Criteria to a Custom Field](#)

Note about Custom Transaction Line Field Sourcing

Before Version 2012.2, you could source a custom transaction line field's values from a body field by selecting <Record_Name> (Line) in the Source List list on the Sourcing & Filtering subtab of the Transaction Line Field page. Now, to source a field's values from a body field, you need to select

<Record_Name> in the list. If you select <Record_Name> (Line), sourcing is from a field in the sublist and if the field doesn't exist, values for the sourced custom transaction line field are blank.

For example, let's say you have a custom field on the Items sublist of Sales Order records. Because the sublist doesn't have a Customer field, selecting Customer (Line) for the new custom field will result in blank values. But if you select Customer, the new custom field's values are sourced from the Customer body field on Sales Orders.

Sourcing and Filtering Examples

This topic provides some examples of how you can use the Source Filter by field to create dynamic custom fields.

Let's say you want to link two transactions, such as a sales order and a subsequent credit memo. First, create a transaction custom field and add it to customer credit memos (using a custom form to limit it to the credit memo form only). For more information, see [Creating Custom Fields by Type](#) and [Adding Custom Fields to Transaction Forms](#)

On the transaction custom field record, set these field values:

- List/Record – Transaction
- Source List – Entity
- Source Filter by – Customer

When you select a customer on the credit memo, NetSuite fills the new list field with transactions for that customer only.

Here's an example of the setup for a new transaction body field called Associated Transaction that uses the setup criteria described previously. In addition, The Sale box is checked on the Applies To subtab, so that the new field appears only on Sale transaction types, such as credit memo.

Transaction Body Field

Save Cancel Change ID Apply to Forms Actions

Label * Linked Order
ID custbody31
Internal ID 4576
Owner Jones, Kay

Description
Type List/Record
List/Record Transaction
☒ Store Value ☐ Use Encrypted Format

☐ Show In List
☐ Global Search
☐ Record is Parent
☐ Inactive

Applies To Display Validation & Defaulting **Sourcing & Filtering** Access Translation History

Source List Entity Source Filter By Customer
Source From <Type then tab>

Filter Using *	Is Checked	Compare Type	Compare Value to	Value Is	Is Not Empty	Is Empty	Compare to Field
Type		equal		Sales Order			

✓ Add X Cancel + Insert Remove

Save Cancel Change ID Apply to Forms Actions

On the credit memo, the associated transactions for the selected customer are available in the new Associated Transaction field. All associated transactions are listed because no filters were applied.

Items Shipping Billing Accounting Relationships Communication Related Records System Information Address **Custom** E-Document France Tax Reporting Warranty

☐ Add Res. Add Res.
Notes from Opportunity
does this field display on checkout?
packing slip test
☐ This is WE Sales Order Form
test delete field
shipinfo
Requested Ship Date

Website
ERROR: Field 'linenumber' Not Found
Customer Contacts
Transaction Logo
<Type then tab>
Related Transaction
☐ CC Special Promotion
Related Item Fulfillment
<Type then tab>
Related Item Fulfillment - Memo
new test take 2

☐ Requisition Type
Linked Order
Associated Transaction
<Type then tab>
Cash - Sales Order #sord100356
Type & tab... Search
Cash Sale #CASH10052
Cash Sale #CASH10065
Credit Memo #CRED10015
Credit Memo #CRED10019
Credit Memo #CRED10022
Customer Deposit #2
Customer Refund #1375
Customer Refund #3
Deposit Application #1

4599 Transaction Child old user notes Transformations Transactions
View: 4599 Transaction Child
Default View
New 4599 Transaction Child Attach Customize View
Edit

Now, suppose you want to create a similar field called Associated Sales Order on the same credit memo that lets you choose only a sales order from the available sales order for that customer.

Create the new field using the same setup that was used to create the previous Associated Transaction field. For this example, also include a filter to limit the list to include only transactions of a particular type (sales orders). When you create a new credit memo, and select a customer, the Associated Sales Order list will show only sales orders from that customer.

The following example shows the setup for a transaction body field called Associated Sales Order that uses the setup criteria described previously. In addition to the sourcing criteria, this example contains filtering criteria that includes only the Sales Order transaction type.

Transaction Body Field

Save Cancel Change ID Apply to Forms Actions

Label * Associated Sales Transaction
ID custbody33
Internal ID 4578
Owner Zwaniga, Jennifer

Description
Type List/Record
List/Record Transaction
☒ Store Value ☐ Use Encrypted Format

☐ Show In List
☐ Global Search
☐ Record is Parent
☐ Inactive

Applies To Display Validation & Defaulting **Sourcing & Filtering** Access Translation History

Source List Entity Source Filter By Customer
Source From <Type then tab>

Filter Using *	Is Checked	Compare Type	Compare Value to	Value Is	Is Not Empty	Is Empty	Compare to Field
Type		equal		Sales Order			

✓ Add ✕ Cancel + Insert Remove

Save Cancel Change ID Apply to Forms Actions

On the credit memo, only sales orders for the selected customer are available in the new field.

Custom Entity Field

Save Cancel Apply to Forms

Label * Account type
ID
Owner Zwaniga, Jennifer
Description

Type Multiple Select
List/Record
☒ Store Value ☐ Use Encrypted Format
☐ Show In List

☐ Global Search
☐ Record is Parent
☐ Available to Suite SignOn
☐ Inactive

Applies To Display **Validation & Defaulting** Sourcing & Filtering Access Translation

☐ Mandatory
☐ Check Spelling

Allow Delete of List/Record Values?
Prevent and Return Error
Prevent and Return Error
Allow and Set Dependent Field Values to Null

Save Cancel Apply to Forms

Setting Filtering Criteria

When creating a list/record or multiple select custom field, you can filter the choices available in that field on records and transactions based on selections made in other fields. Filtering enables you to tailor the exact choices offered to users entering records and transactions.

You can filter based on the selections in multiple list fields. For more information, see [Dependent Dropdown Lists](#).

Note: Filtering applies only to lists of records. It doesn't apply to custom lists.

To filter a list/record or multiple select custom field:

1. Click the **Sourcing & Filtering** subtab.
2. In the **Filter Using** field, select a field to filter on.

The field you select here is a field on the record you selected in the **List/Record** field.

The selected field limits the results based on your filter criteria. For instance, to show only sales representatives in an employee list, you'd select the **Sales Rep** field in the Filter Using column. Sales Rep is the field on the employee record being filtered.

 **Note:** If you specify two or more filters, the custom field uses a popup list instead of a dropdown list.

3. If the field selected in the **Filter Using** column is a check box, check the **Is Checked** box to show only records with that box checked.
In the sales representative example, check the **Is Checked** column.
4. In the **Compare Type** column, select how you want to compare the information to your filter criteria.
For example, select **equal** to ensure that the information you set as criteria matches the selections available in the list exactly.
5. In the **Compare Value to** column, enter the value you want to filter the list by.
For example, if you select **State** in the **Filter Using** field, enter **GA** to filter the list to records only with the state listed as Georgia.
6. If the field selected in the **Filter Using** field is a list, select the value to show in the **Value Is** column.
7. To include all records with a value entered in your filter field, check the **Is Not Empty** box.
The Is Not Empty option isn't available for check box fields.
8. To include all records with no value entered in your filter field, check the **Is Empty** box.
9. In the **Compare To Field** column, select which field on the record selected in the **List/Record** field you want to compare to the field in the **Filter Using** column.
10. Click **Add/Edit**.
11. Add all necessary filters to the custom field.
The more filters you add, the fewer options will be available in the field. To be included, each selection must match each filter.
12. Click **Save**.

Watch the following help video for information about setting sourcing and filtering criteria for a custom field.

 [Adding Sourcing and Filtering Criteria to a Custom Field](#)

Next, you can set up access to your custom field. For more information, see [Restricting Access to Custom Fields](#).

 **Warning:** Custom field filters are type sensitive. If you change the type of a custom field, filters defined for the field can become incompatible. This incompatibility results in unexpected errors when a form containing the field is displayed. Before changing a custom field's type, review its existing filters and remove or change these filters to avoid errors. For information about various custom field types, see [Field Type Descriptions for Custom Fields](#).

Dependent Dropdown Lists

You can create a dependent dropdown list using a List/Record type custom field. Dependent dropdown lists let you filter the choices in a list based on the selections in other fields. For instance, you can add two custom transaction line fields to a transaction form and a third that filters based on selections in the first two.

Watch the following video for an overview of dependent dropdown lists.


 [Dependent Dropdown Lists Overview](#)

To understand the content in this topic, you should be familiar with creating custom lists, custom record types, and custom transaction types. For more information, see the following help topics:

- [Creating a Custom List](#)
- [Creating Custom Record Types](#)
- [Creating a Custom Transaction Type](#)

To set up field dependencies, you use the Compare To Field column on the Sourcing & Filtering subtab on the custom field page. Use the Compare To Field column to compare values entered in multiple fields on a transaction type or other record type with the values defined on a custom record.

The following screenshot of a Transaction Line Field page for Shirt Style shows the Compare To Field setup.

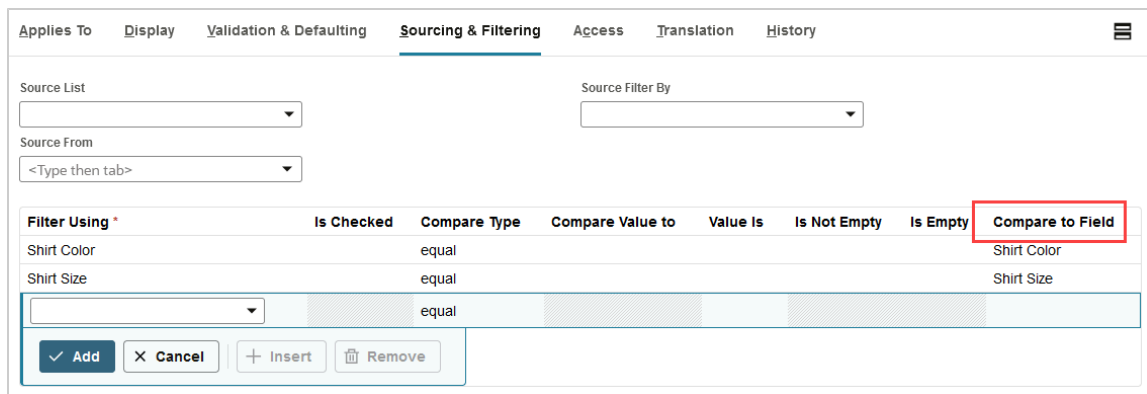

Filter Using *	Is Checked	Compare Type	Compare Value to	Value Is	Is Not Empty	Is Empty	Compare to Field
Shirt Color		equal					Shirt Color
Shirt Size		equal					Shirt Size
		equal					

To understand how the feature works, it helps to think in terms of controlling fields versus dependent fields. Controlling fields are used to determine the selections that are available in dependent fields.

For instance, you have a Shirt Style transaction line field that filters based on the selections in the Shirt Color and Shirt Size transaction line fields. Shirt Color and Shirt Size are the controlling fields, and Shirt Style is the dependent field. You create the Shirt Style field on the custom record type.

For an example that illustrates the use of multiple dependent dropdown lists, see [Creating Dependent Dropdown Lists](#).

Creating Dependent Dropdown Lists

The procedures in this section provide high-level steps for creating dependent dropdown lists. To understand the process, you should be familiar with creating custom lists, custom record types, and custom transaction types.

For a detailed example, see [Dependent Dropdown Lists Example](#).

To create a field that's filtered by multiple other List/Record fields, follow these steps:

1. [Creating the Custom Lists and Custom Record Type for Dependent Dropdown Lists](#)
2. [Creating Custom Fields and Setting up Filtering for Dependent Dropdown Lists](#)

There may be situations where creating a hierarchical custom record is a better approach than creating a dependent dropdown list. For a comparison of the two approaches, see the following video.

 [Comparison of Dependent Dropdown Lists and Hierarchical Custom Records](#)

Creating the Custom Lists and Custom Record Type for Dependent Dropdown Lists

To understand how the dependent dropdown list feature works, it helps to think in terms of controlling fields versus dependent fields. Controlling fields determine the selections available in dependent fields. For instance, you could have Shirt Color and Size as controlling fields and Shirt Style as the dependent field. The available shirt styles depend on the selected color and size.

Before you can create fields that filter based on selections you make in other fields, you have to create a custom list for each controlling field. Then you create the custom record type for the dependent field. You'll use these custom lists and custom record type when creating fields for transaction types or other record types.

To create the custom lists and custom record type:

1. Create a custom list for each controlling field.
2. Create a custom record type whose field provides the options to be available in the dependent field. The custom record type must contain List/Record fields that reference the custom lists you created for the controlling fields in the preceding step.
3. Create a custom record instance for each option you want to appear in the dependent field.

Next, you can create the necessary custom fields and filtering. For more information, see [Creating Custom Fields and Setting up Filtering for Dependent Dropdown Lists](#)

Creating Custom Fields and Setting up Filtering for Dependent Dropdown Lists

You use the custom list and custom records created in [Creating the Custom Lists and Custom Record Type for Dependent Dropdown Lists](#) to create and add custom fields to the transaction type or other record type. Using the shirt example, you'd create fields for Shirt Color, Shirt Size, and Shirt Style and apply them to Sale Item. You set up the filtering options on the dependent field, in this case Shirt Style.

To create custom fields and set up filtering:

1. Create a List/Record type custom field for each controlling field.
2. For the dependent field, create the same type of List/Record custom field that you created for the controlling fields.

In the **List/Record** field, select the custom record type you created in Step 2 of [Creating the Custom Lists and Custom Record Type for Dependent Dropdown Lists](#).

3. Click the **Sourcing & Filtering** subtab, and complete the following steps:
 - a. In the **Filter Using** column, select one of the controlling fields.
 - b. In the **Compare Type** field, select the qualifier you want to use to determine the filtering. For example, if you want the selections in the fields to match, select **equal**.
 - c. In the **Compare To** column, select the field on your custom record type that refers to the field you selected in the **Filter Using** column.
 - d. Repeat these steps for each controlling field.
 - e. Click **Save**.

You can create multiple layers of dependencies. For example, you could have another field that filters based on your Shirt Style field selection. You must create a custom record type for each additional dependent field in the same way you created the Shirt Style custom record type.

Dependent Dropdown Lists Example

You can create dependent dropdown lists that enable you to filter the choices in a list based on the selections in one or more other fields. The topics in this section describe the steps of creating multiple dependent dropdown lists for a company that sells shirts in various sizes, colors, and styles.

To understand the content in this topic, you should be familiar with creating custom lists, custom record types, and custom transaction types. For more information, see the following help topics:

- [Creating a Custom List](#)
- [Creating Custom Record Types](#)
- [Creating a Custom Transaction Type](#)

A company sells shirts of multiple sizes (small and large), colors (black and white), and styles (v-neck and crew). The company sells any combination of size and color, but the selection of styles is limited to a set of color-size combinations. For instance, they don't sell large, black, v-neck shirts, but they do sell large, black, crew neck shirts.

Shirt Color and Shirt Size are List/Record transaction line fields that refer to custom lists. Shirt Style is a custom record type that includes the Shirt Color and Shirt Size fields. There's also a Shirt Style transaction line field that refers to the list of Shirt Style custom record instances.

To understand how the feature works, it helps to think in terms of controlling fields versus dependent fields. Controlling fields are used to determine the selections that are available in dependent fields.

The Shirt Style transaction line field filters according to what is selected in the Shirt Color and Shirt Size transaction line fields. Shirt Color and Shirt Size are the controlling fields. Shirt Style is the dependent field.

For the steps to create the dependent dropdown lists for the preceding scenario, see [Steps for Creating Dependent Dropdown Lists](#).

Steps for Creating Dependent Dropdown Lists

This example describes the steps for creating dependent dropdown lists for the shirt style scenario described in [Dependent Dropdown Lists Example](#), which you should read before continuing. For this example, the available shirt style selections depend on what is entered for the shirt size and shirt color.

Complete the following steps:

1. [Steps for Creating the Custom Lists and Custom Record Type for Dependent Dropdown Lists](#)
2. [Steps for Creating Custom Transaction Line Fields and Setting up Filtering for Dependent Dropdown Lists](#)

Steps for Creating the Custom Lists and Custom Record Type for Dependent Dropdown Lists

Before you can create the custom fields, you must first create the custom lists that will be used in those fields. In this example, you need custom lists for Shirt Size and Shirt Color. Then you create the custom record type for Shirt Style. You use these custom lists and the Shirt Style custom record when you create the custom transaction line fields.

To create the custom lists and custom record type:

1. Create a custom list named **Shirt Color** that includes the colors black and white. Then create a custom list named **Shirt Size** that includes the sizes small and large.
2. Create a custom record type named **Shirt Style** with two fields: **Shirt Size** and **Shirt Color**.

Note: You must save the custom record before you can add the two fields.

For these fields, set the **Type** to **List/Record** and then, in the **List/Record** field, enter the corresponding list from the previous step.

The following screenshot shows the Shirt Style custom record type with the Shirt Color and Shirt Size fields that reference the custom lists:

Fields • Subtabs • Sublists • Icon • Numbering • Forms • Online Forms • Permissions • Links • Managers • Translation • Child Records • Parent Records • History • System Notes					
☐ Show Inactives					
New Field Move To Top Move To Bottom					
Description	ID	Type	List/Record	Tab	Show In List
Shirt Color	custrecord107	List/Record	Shirt Color		No
Shirt Size	custrecord108	List/Record	Shirt Size		No

- After you save the Shirt Style custom record type, create a custom record instance for each Shirt Style combination. Select the appropriate shirt size and shirt color in the related fields for each shirt style. Name these custom record instances as follows:

- Large, Black, Crew
- Small, Black, Crew
- Large, White, Crew
- Small, White, Crew
- Large, White, V-neck
- Small, White, V-neck

The following screenshot shows the shirt style combinations created for the Shirt Style custom record type:

Shirt Style List

View

Default

Customize View

New Shirt Style

+ Filters

Next, you can create the necessary custom fields and filtering. For more information, see [Steps for Creating Custom Transaction Line Fields and Setting up Filtering for Dependent Dropdown Lists](#)

Steps for Creating Custom Transaction Line Fields and Setting up Filtering for Dependent Dropdown Lists

After creating the custom lists and record type, you create the custom fields using the Shirt Color and Shirt Size custom lists and the Shirt Style custom record type. In this example, you need to create three custom transaction line fields: Shirt Color, Shirt Size, and Shirt Style. On the Shirt Style custom field, you configure how the fields are filtered. These custom fields are used on the transaction or record instance.

To create custom transaction line fields and set up filtering:

1. Create a custom transaction line field for each controlling field:
 - **Shirt Color** — Of type List/Record with your shirt color custom list selected in the List/Record field
 - **Shirt Size** — Of type List/Record with your shirt size custom list selected in the List/Record field
2. Create a custom transaction line field for the dependent field:

Shirt Style — Of type List/Record with your shirt style custom list selected in the List/Record field.
3. On the **Applies To** subtab, select where the field should be applied. For example, select **Sale Item** to have the field appear on sales orders.
4. On the **Shirt Style** custom field configuration, click the **Sourcing & Filtering** subtab. Complete the following steps:
 - a. In the **Filter Using** column, select **Shirt Color**, which represents the field on your custom record that references the **Shirt Color** custom field.
 - b. In the **Compare Type** field, select **equal**.
 - c. In the **Compare To** field, select **Shirt Color**.
 - d. Repeat these steps for the **Shirt Size** field.

- e. Click **Save**.

Now, the Shirt Style field is filtered by the selections in the Shirt Size and Shirt Color fields, as shown on the transaction line field of the following sales order example. That is to say that based on the shirt color and shirt size selected, the shirt style is available in small, white, crew and small, white, v-neck styles.

Dependent Dropdown Lists Vehicle Specification Example

This example describes a scenario where a user selects a vehicle from a Vehicle Specification field on the main body section of a custom Vehicle Sales Form. The selections available in this list depend on the selections made in two previous fields: **Vehicle Make** and **Vehicle Model**.

In this scenario, users make selections in the following order:

- Vehicle make (such as Ford, Toyota, or Honda)
- Vehicle model (such as Camry or Corolla) filtered by the selected make
- Vehicle specification (such as engine size or color) filtered by the selected model

This topic outlines the foundational setup needed to create and organize dependent dropdown lists for the vehicle specification selection. It provides a high-level overview of the sequence and requirements for creating the necessary custom lists, record types, record instances, and fields.

The content in this topic will help you:

- Understand the structure and flow of multilevel dependent dropdown lists.
- Know the order in which to create and connect lists, records, and fields for successful filtering.
- Be prepared to create forms that enable users to select from valid combinations of makes, models, and specifications.

See the following sections in this topic:

- Vehicle Specification Setup Video with detailed steps
- Vehicle Specification Diagram showing the different elements needed and how they relate
- Summary of Setup Requirements to Create the Vehicle Specification Example


Vehicle Specification Setup Video

Watch the following help video for details about how to create dependent dropdown lists for the vehicle specification scenario described in this topic.

 [Dependent Dropdown Lists Example](#)

Vehicle Specification Diagram

The following diagram shows the elements needed to create the vehicle specification example.

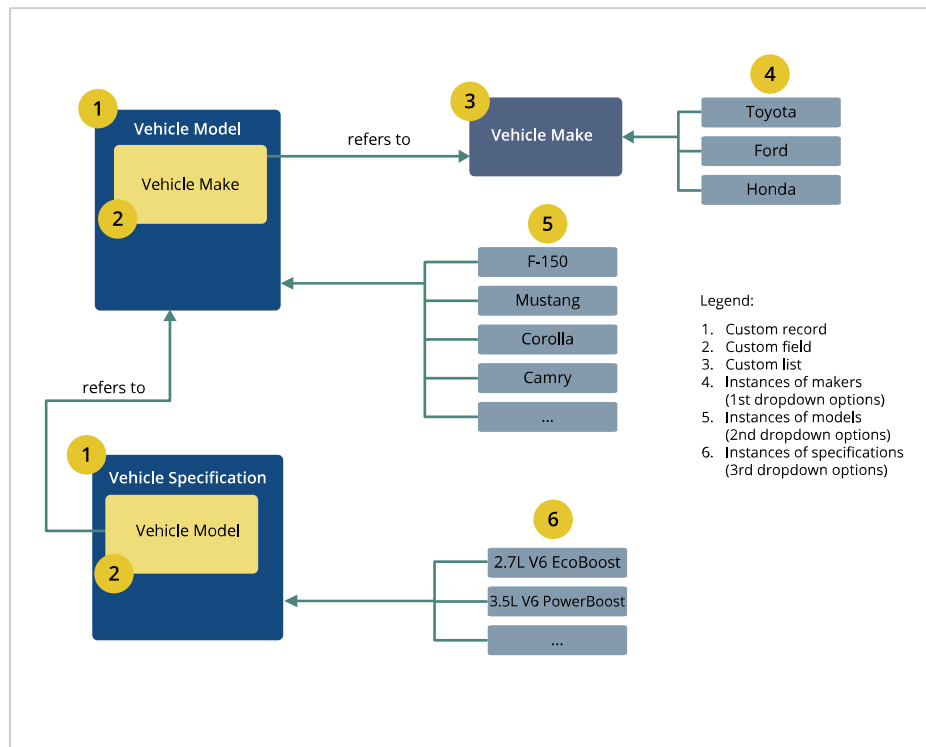

For more information about creating this vehicle specification example, see [Summary of Setup Requirements to Create the Vehicle Specification Example](#).

Summary of Setup Requirements to Create the Vehicle Specification Example

The setup described in the following table provides a summary of the requirements to create the vehicle specification example in the preceding [Dependent Dropdown Lists Vehicle Specification Example](#) topic. The setup is specific to this example and doesn't describe all possible setup options.

Step	What to Create	Where to Create	Type	Source and Examples	Required Step
1	Vehicle Make list	Customization > Lists, Records, & Fields > Lists > New	Custom List	Ford, Toyota, Honda	Name: Vehicle Make (List) Name: Vehicle Make (List) Values: Vehicle makes to include in the list (Ford, Honda, Toyota) Save.
2	Vehicle Model record type	Customization > Lists, Records & Fields > Record Types > New	Custom record type	Vehicle Model	Label: Vehicle Model (Record) Save and reopen. New field: - Label: Vehicle Make - Type: List/Record - List/Record: Vehicle Make (list)
3	Vehicle Model record instances	Customization > Lists, Records, & Fields > Record Types > Vehicle Model (Record) – New Record	Custom record type – record instances	Model Name: Mustang Vehicle Make: Ford Model Name: F-150 Vehicle Make: Ford Model Name: Corolla Vehicle Make: Toyota Model Name: Camry Vehicle Make: Toyota Model Name: Civic Vehicle Make: Honda Model Name: Accord Vehicle Make: Honda	On the Record Types list, click New Record for Vehicle Model (Record). For each model, create a record, such as: - Name: Mustang - Vehicle Make: Ford

4	Vehicle Specification record type	Customization > Lists, Records, & Fields > Record Types > New	Custom record type	Vehicle Specification	Name: Vehicle Specification (Record) Save and reopen. New field 1: - Label: Vehicle Make - Type: List/Record - List/Record: Vehicle Make (List) Save. New field 2: - Label: Vehicle Model - Type: List/Record - List/Record: Vehicle Model (Record) Save.
5	Vehicle Specification record instances	Customization > Lists, Records, & Fields > Record Types > Vehicle Specification (Record) – New Record	Custom record type – record instances	2025 Ford F-150 XL – 2.7 L EcoBoost V6 (325 hp / 400 lb-ft) – Agate Black Metallic 2025 Ford F-150 XLT – 3.5 L PowerBoost Hybrid V6 (430 hp / 570 lb-ft) – Space White Metallic 2025 Ford F-150 XLT – 3.5 L PowerBoost Hybrid V6 (430 hp / 570 lb-ft) – Space White Metallic 2024 Toyota Corolla LE – 2.0 L engine – Ruby Flare (deep red) 2024 Toyota Corolla XSE – 2.0 L engine – Blueprint (deep blue) 2025 Honda Civic LX Sedan – 2.0 L 4-Cyl – Crystal Black Pearl 2025 Honda Civic Sport Sedan – 2.0 L 4-Cyl – Rallye Red	On the Record Types list, click New Record for Vehicle Specification (Record). For each valid combination, create a record instance, such as: - Name: 2025 Ford F-150 XL, 2.7L EcoBoost V6, Black - Vehicle Make: Ford - Vehicle Model: Mustang Save. Repeat for all make and model combinations you want to include.

6	Vehicle Make field	Customization > Lists, Records, & Fields > Transaction Body Field > New	Transaction body field	List/Record: Vehicle Make (custom list)	Label: Vehicle Model Applies To (subtab): Sale Display (subtab) > Subtab: Main Sourcing & Filtering (subtab): ■ Filter Using: Vehicle Make ■ Compare Type: equal ■ Compare To: Vehicle Make (on Vehicle Model record). Save & New.
7	Vehicle Model field	Customization > Lists, Records, & Fields > Transaction Body Field > New	Transaction body field	List/Record: Vehicle Model (custom record type)	Label: Vehicle Model Applies To (subtab): Sale Sourcing & Filtering (subtab): ■ Filter Using: Vehicle Make ■ Compare Type: equal ■ Compare To: Vehicle Make (on Vehicle Model record). Save & New.
8	Vehicle Specification field	Customization > Lists, Records, & Fields > Transaction Body Field > New	Transaction body field	List/Record Vehicle Specification (custom record)	Label: Vehicle Specification Applies To (subtab): Sale Display (subtab) > Subtab: Main Sourcing & Filtering subtab: ■ Filter 1 □ Filter Using: Vehicle Make □ Compare Type: equal □ Compare To: Vehicle Make (on Vehicle Specification record) ■ Filter 2 □ Filter Using: Vehicle Make □ Compare Type: equal □ Compare To: Vehicle Model (on Vehicle Specification record) Save.
9	Custom sales form	Customization > Forms > Transaction Forms	Form	–	Customize the Standard Sales Order form to create a new form called Vehicle Sales Order. For more information, see Custom Forms.

10	Add fields to forms	Customization > Forms > Transaction Forms > Edit Vehicle Sales Order	Form	–	Screen Fields (subtab) > Main (subtab) Show (column): Check for each field (Vehicle Make, Vehicle Model, Vehicle Specification) Arrange order: Vehicle Make, Vehicle Model, Vehicle Specification. Save.  Note: When creating fields, if you don't select a subtab for the fields to display on, they default to the Custom subtab. You can use the Save & Move Elements button to move them to another area of the form, such as the Main section
11	Test filtering	Transactions > Sales > Enter Sales Orders > New	Sales order transaction	–	Custom Form: Vehicle Sales Order Test fields by making selections. Vehicle Make: Select a vehicle make, such as Ford. The list should include all vehicle makes set up in the list. Vehicle Model: Select a vehicle model, such as Mustang. The list should include only Ford models when the Ford make is selected. Vehicle Specification: Select a vehicle specification. The list should include only the Ford Mustang specification options when the Mustang model is selected.

Troubleshooting Dependent Dropdown List Issues

Dependent dropdown lists let you filter the options in one field (for example, Vehicle Model) based on the selection in another (for example, Vehicle Make). If you're having trouble setting up or using these dropdown lists, this section covers some of the most common issues and how to fix them.

To diagnose and resolve common issue, refer to:

- [Filter Using Dropdown List is Empty in Dependent Dropdown List](#)

- [Dependent Dropdown List Filtering Doesn't Restrict Options](#)
- [Options Missing in Dependent Dropdown List Fields](#)
- [Dependent Dropdown List Doesn't Update After Changing the Field Source](#)
- [Dependent Dropdown Fields List Don't Appear on the Form](#)
- [Filtering for a Dependent Dropdown List Doesn't Work on the Form as Expected](#)
- [SuiteScript or Workflow Interference with Dependent Dropdown List Filtering](#)
- [Role or Permission Issues Affect Dependent Dropdown List Field Visibility](#)
- [Dependent Dropdown Lists with Multiple Dependencies Don't Filter as Expected](#)
- [Test Dependent Dropdown List Filters with Sample Data](#)
- [Browser Cache or UI Caching Prevents Field Updates for Dependent Dropdown Lists](#)
- [Dependent Dropdown List Fields Show Unexpected Results in Reports](#)
- [General Troubleshooting Steps for Dependent Dropdown Lists](#)

If you've tried the above solutions and still have issues, refer to these resources:

- [Custom Records](#)
- [Custom Fields](#)
- [Custom Lists](#)
- [Dependent Dropdown Lists](#)
- [Dependent Dropdown Lists Example video](#)

Filter Using Dropdown List is Empty in Dependent Dropdown List

Issue:

When setting up filtering, the Filter Using dropdown list is empty or missing your intended controlling field.

What to Check:

- Did you create and save the controlling field (for example, Vehicle Make) as a field on the same record type as the dependent field?
- Did you save the record type after adding the controlling field?
- If using multiple custom forms or record subtypes, is the controlling field present and visible on the specific form/subtype?

How to Fix:

- Ensure you create and save the controlling field on the correct record type before creating or editing the dependent field.
- Always save the record type after adding a new field, then return to the dependent field and configure filtering.
- For setups with multiple forms or subtypes, add the controlling field to every required form type.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Dependent Dropdown List Filtering Doesn't Restrict Options

Issue:

The dependent dropdown list shows all options, regardless of the values in the controlling field.

What to Check:

- Is the dependent field a List/Record custom field that points to a custom record type (not a custom list)?
- Does the custom record type for the dependent field have a field referencing the controlling value?

How to Fix:

- Use a custom record type (not a custom list) for the dependent field.
- Ensure that the custom record type includes a field that references the controlling field.
- Ensure that each instance of the custom record type has a value filled that references one of the options of the controlling field.
- Set up filtering using the Filter Using option and verify correct configuration.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Options Missing in Dependent Dropdown List Fields

Issue:

The dropdown list is missing options.

What to Check:

- Do the necessary custom record instances (for example, Vehicle Model records) exist and are they active?
- Are the controlling field values set correctly on each record instance?
- Are any of the records or options set to inactive or restricted by permissions?
- Are user roles and field/record permissions correctly set?

How to Fix:

- Verify all necessary record instances exist and are active.
- Confirm each instance is linked to the correct controlling value.
- Review permissions and field access, and test as different user roles if needed.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Dependent Dropdown List Doesn't Update After Changing the Field Source

Issue:

Dropdown lists or filter options didn't update after changing the field's source.

What to Check:

- Have you resaved all related fields and the record type after making changes?
- Have you cleared your browser cache or tried using a private/incognito window?

How to Fix:

- After changing a field source, resave the field, any dependent fields, and the record type or form.
- Refresh your browser or log out and back in if changes don't appear immediately.
- Clear cache or try a different browser window to rule out UI caching delays.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Dependent Dropdown Fields List Don't Appear on the Form

Issue:

Custom fields (for example, Vehicle Make, Vehicle Model, Vehicle Selection) don't show up on the intended form.

What to Check:

- Did you add the fields to the form layout (Fields subtab for custom records, Screen Fields/Columns for transactions)?
- Are the fields set to Show on the form?
- Are you editing and using the right form (if multiple forms exist)?
- Are fields hidden by role-level or conditional display logic?

How to Fix:

- Edit the form layout and check the Show box for each field. Ensure fields are present on all required or relevant forms.
- Move fields to correct section or subtab as needed.
- Adjust field display logic and role-based visibility as required.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Filtering for a Dependent Dropdown List Doesn't Work on the Form as Expected

Issue:

Filtering works in setup but not when entering data on the form.

What to Check:

- Are the controlling fields placed before the dependent fields on the form?
- Are you testing with the correct form layout?
- Has the form been customized or changed recently?

How to Fix:

- Place controlling fields before dependent fields.
- Test by creating a new record and selecting controlling values first.
- If fields were reordered, verify that filtering logic still functions.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

SuiteScript or Workflow Interference with Dependent Dropdown List Filtering

Issue:

Dependent dropdown filtering doesn't work as expected, even though configuration seems correct.

What to Check:

Are there any client scripts (SuiteScript) or workflows applied to the form or record type that reference the controlling or dependent fields?

How to Fix:

- Temporarily disable or bypass any associated scripts/workflows and test the dropdown filtering again.
- If disabling scripts resolves the issue, review their logic for interference with field values or filtering behavior.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Role or Permission Issues Affect Dependent Dropdown List Field Visibility

Issue:

Some users see different dropdown options or fields compared to others.

What to Check:

- Are custom roles or permissions restricting access to certain fields, lists, or record types?
- Are field or record restrictions set at the role level?

Issue:

- Test the form as users with different roles.
- Adjust permissions to ensure all required users can access needed options.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Dependent Dropdown Lists with Multiple Dependencies Don't Filter as Expected

Issue:

Dropdown lists with multiple controlling and dependent fields don't filter as expected across the chain.

What to Check:

- Does each field in the dependency chain correctly reference the previous controlling or dependent field?
- Is each filtering step set up and tested individually?

How to Fix:

- Validate and test each dependency layer independently, before testing the combined setup.
- Confirm each custom record type and field setup supports the necessary dependencies.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Test Dependent Dropdown List Filters with Sample Data

Issue:

Dropdown lists are missing expected options, especially in new or complex setups.

What to Check:

- Do test records exist for every expected combination of controlling field values?

- Are all data records active and correctly linked?

How to Fix:

- Create test records that cover all combinations of controlling and dependent fields.
- Use this data for thorough end-to-end testing.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Browser Cache or UI Caching Prevents Field Updates for Dependent Dropdown Lists

Issue:

After changes to field setup, dropdown filtering doesn't reflect recent updates or old options continue to display.

What to Check:

- Have you cleared your browser cache?
- Have you tried accessing the form in a private/incognito window or after a full logout/login?

How to Fix:

- Clear your browser cache and cookies.
- Try the form in a private/incognito window.
- If changes still aren't showing, log out of NetSuite and back in.
- If needed, resave the related fields and record types.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Dependent Dropdown List Fields Show Unexpected Results in Reports

Issue:

Dropdown-driven fields don't filter correctly or show unexpected results in SuiteAnalytics or saved searches.

What to Check:

- Are the related fields included in the dataset or saved search criteria?
- Are permissions for those fields correct in reporting tools?

How to Fix:

- Ensure all controlling and dependent fields are included in reports or searches.
- Review SuiteAnalytics dataset settings and permissions.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

General Troubleshooting Steps for Dependent Dropdown Lists

Here are some general troubleshooting steps you can follow if you're having issues with dependent dropdown lists:

- Clearly name your fields and lists to avoid confusion, for example Vehicle Make (List) vs. Vehicle Make (Record).

- Walk through field type, source, order, filtering setup, and test with verified data.
- Temporarily disable client scripts or workflows during troubleshooting.
- If stuck, resave all fields and the record type, then refresh your browser.
- Before updating production, try the setup in a sandbox first, especially if there are lots of dependencies.

For more troubleshooting tips, see [Troubleshooting Dependent Dropdown List Issues](#).

Restricting Access to Custom Fields

You can control who can access the information in custom fields, enabling you to maintain the security of your business information. The access you define determines how the field can be accessed both on the record as well as through search results and reports.

You can control access to custom field data based on roles, departments, and subsidiaries. For details about how to set up these access restrictions, details about tracking access changes, or guidance for bundling custom fields with access restrictions, see the following topics:

- [Setting Role, Department, or Subsidiary Access Restrictions for a Custom Field](#)
- [Access Level History for Custom Fields](#)
- [Bundling Fields with Access Restrictions](#)

Note: When the Advanced Employee Permissions feature is enabled, use the **Employee Access** subtab to assign custom fields to custom advanced employee permissions. For more information, see [Restricting Access to Employee Custom Fields](#).

Access to a field can be based on role, department, or subsidiary. The following custom access levels can be assigned to each department and subsidiary.

- **Edit** – The field and its contents can be viewed and changed.
- **View** – The field can be seen, but its contents can't be changed. (The permission level affects how the form is accessed on records.)
- **Run** – The field can be seen through reports and search results, but its contents can't be changed. (The permission is applicable only to reports and search.)
- **None** – The field can't be seen, and its contents can't be changed.

For cases when various access levels are defined for a user's role, department, or subsidiary, the highest level of access is granted. For example, an employee is assigned to a department that has Edit access to a custom field, and the employee's role has been granted View access. The employee has the higher level of access – in the preceding example, Edit access.

In addition to search and reporting, the access level granted to a custom field includes instances where it's referenced by online forms, mail merge operations, and when it's sourced by other custom fields, or referred to by formula fields.

Note: If you remove the administrator role's access to a custom field, the field won't be accessible to scripts that are run by an administrator. To access the field through scripting, you must edit and restore administrator access to the field.

You can set the level of access you want to grant by default to custom fields. The default access level applies to the roles, departments, and subsidiaries, that you don't define on the Role, Department, and Subsidiary subtabs.

To set default access, edit the custom field record, and click the Access subtab. In the Default Access Level, set the level of access you want to give by default. In the Default Level for Search/Reporting field, select the level of access you want to give through search and reporting.

The access you define on the Role, Department, and Subsidiary subtabs overrides the default access levels.

Setting Role, Department, or Subsidiary Access Restrictions for a Custom Field

You can restrict access to custom fields by role, department, or subsidiary to protect sensitive information and manage data visibility according to your organization's needs. Access levels determine whether a field can be viewed, edited, or included in search results or reports by specific users or groups.

To set role, department, or subsidiary access restrictions:

1. Edit the custom field record.
2. Click the **Access** subtab.
3. In the **Default Access Level** field, set the access level you want to grant to roles, departments, and subsidiaries that you don't specifically define in the following steps.
4. In the **Default Level for Search/Reporting** field, set the level of access you want to grant through search and reports to roles, departments, and subsidiaries that you don't specifically define in the following steps.
5. Click the **Role**, **Department**, or **Subsidiary** subtab.
6. In the first column, select the role, department, or subsidiary you want to define access for.
7. In the **Access Level** column, select the level of access you want to grant.
8. In the **Level for Search/Reporting** column, select the level of access you want to give the role, department, or subsidiary for search and reporting.
9. Click **Add**.
10. Repeat these steps for each role, department, or subsidiary.
11. Click **Save**.



Important: The preceding procedure describes how to limit access to a custom field. When available, you also can check the **Apply Role Restrictions** box to limit access to an entire custom record, according to a custom field's values. Applying role restrictions extends access restrictions based on class, department, location, or subsidiary, that are set on role definition pages. For example, if you've set location-based restrictions on roles, and you want to apply these same restrictions to Subscription custom records, you can check **Use Role Restrictions** for the Subscription record type's custom field that stores location values. For more information, See [Applying Role-Based Restrictions to Custom Records](#).

Watch the following help video for information about access control setup for custom field values:



[Access Control Setup for Custom Field Values](#)

Access Level History for Custom Fields

For auditing purposes, you can view any changes that have been made to custom field access levels.

To view custom field access changes, open the custom field record. Click the **Access** subtab, and then click the **History** subtab.

You can view the date and time a change was made, the user who made the change, and the changes that were made.

Bundling Fields with Access Restrictions

 **Note:** SuiteBundler is still supported, but it won't be updated with any new features.

To take advantage of new features for packaging and distributing customizations, you can use the Copy to Account and SuiteCloud Development (SDF) features instead of SuiteBundler.

Copy to Account is an administrator tool that lets you copy custom objects between your accounts. The tool can copy one custom object at a time, including dependencies and data. For more information, see the help topic [Copy to Account](#).

SuiteCloud Development Framework is a development framework that lets you create SuiteApps from an integrated development environment (IDE) on your local computer. For more information, see .

If you include a custom field in a bundle that has access restrictions, custom roles that have access aren't automatically included in the bundle. If, however, you include those custom roles in the same bundle, the access restrictions are preserved.

The access level assigned to standard roles is preserved when you bundle a custom field that has access restrictions.

Custom field restrictions based on subsidiary or departments aren't carried over into the target account because departments and subsidiaries can't be included in a bundle.

Restricting Access to Employee Custom Fields

You can control who can access the information in employee custom fields, enabling you to maintain the security of your business information. The access you define determines how it can be accessed both on the record, as well as through search results and reports.

An **Employee Access** subtab is available on the Custom Entity Field page when the following conditions are met:

- The custom entity field is applied to the employee record, that is, the **Employee** box on the **Applies To** subtab is checked.
- The Advanced Employee Permissions feature is enabled.

When the preceding conditions are met, access to the custom field is defined by the configuration on the **Employee Access** subtab.

When the preceding conditions aren't met, access to the field is defined by the configuration on the **Access** subtab.

To restrict access, edit the custom field record, and click the **Employee Access** subtab. In the Permissions list, select the appropriate permissions to restrict access to the custom field. Your organization may have custom permissions that you can choose. The standard permissions are:

- Employees and Employee Administration — Uses the restrictions defined on the Role page.

- Employee Confidential — Restricts access to direct reports and below.
- Employee Public — Restricts access to active, nonterminated employees.
- Employee Self — Restricts access to self.

For more information, see the help topic [Advanced Employee Permissions](#).

Creating Read-Only Custom Fields

You can create custom fields that display information but don't store that information with any record or transaction. You can create a read-only field of any type with any display, default, validation, or sourcing options.

A read-only field is especially useful when used with information sourcing. Sourced fields show information stored elsewhere in NetSuite. That information is retrieved from the source every time the page is loaded. Because any changes you make to the field aren't saved, making the field read-only prevents editing attempts.

To create a read-only custom field:

1. Edit an existing custom field or create a new one.
If you want to create a new field, see [Custom Field Types](#) to determine the type of field you want to create. You'll find step-by-step instructions for each custom field type.
2. Clear the **Store Value** box.
3. Click the **Display** subtab.
4. Set the **Display Type** field to **Disabled**.
5. Click **Save**.

For more information about using display types, see [Setting Display Options for Custom Fields](#).

Adding Translations for Custom Fields

If the Multi-Language feature is enabled on your account, you can translate the label and field-level help for a custom field so that they match the language of the NetSuite user interface. For details, see the following:

- [Translating a Custom Field Label](#)
- [Translating Custom Field Help](#)



Important: Before you can add these translations, you must select translation languages at Setup > Company > General Preferences, on the Languages subtab. The Languages subtab lists both system-supported languages that can be used for the NetSuite user interface (and are available at Home > Set Preferences), and additional languages that can be used for website translations only (and aren't available at Home > Set Preferences). You should enter translations only for system-supported languages, because these are the only languages that can be displayed in the user interface. For details, see the help topic [Configuring Multiple Languages](#).

Translating a Custom Field Label

You can define translations for a custom field label on the Translation subtab of the custom field page.

Custom Item Field

Save Cancel Change ID Apply to Forms Actions

Label * Export to OpenAir

ID custitemexport_to_openair

Owner 45 Wolfe, K

Description

Matrix Option

Type Check Box

ListRecord

Store Value Use Encrypted Format

Merchandise Attribute

Show In List

Global Search

Record is Parent

Inactive

Applies To Display Validation & Defaulting Sourcing & Filtering Access **Translation** History

Language	Label
Croatian	
Czech	
French (Canada)	

Help

Translating Custom Field Help

You can define translations for the Field Level Help of a custom field on the Translation subtab of the custom field page. Field level help is available when the name of the field is clicked. You can enter HTML in the field by beginning the markup with `<html>` and ending it with `</html>`.

Custom Item Field

Save Cancel Change ID Apply to Forms Actions

Label * Export to OpenAir

ID custitemexport_to_openair

Owner 45 Wolfe, K

Description

Matrix Option

Type Check Box

ListRecord

Store Value Use Encrypted Format

Merchandise Attribute

Show In List

Global Search

Record is Parent

Inactive

Applies To Display Validation & Defaulting Sourcing & Filtering Access **Translation** History

Language	Label
Croatian	
Czech	
French (Canada)	

Help

Adding Custom Fields to Transaction Forms

After you create a custom transaction field, the field automatically appears on the Custom subtab of standard and custom transaction forms. If you did not specify a subtab for the custom field to appear on, it appears on the Custom subtab. You can then configure if the custom field should or shouldn't be shown on a specific custom transaction form.

To show a custom transaction field on a custom transaction form:

1. Go to Customization > Forms > Transaction Forms.
2. Click **Edit** next to your custom form.

3. On the Custom Transaction Form page, click the **Screen Fields** subtab.
4. Click the subtab you specified on the custom field record and locate your custom field name in the **Description** column. If you did not specify a subtab on the custom field record, the custom field appears on the Custom subtab.
5. If you want the field to show when the transaction is being entered, check the box in the **Show** column next to your custom field. Newly-created custom transaction fields automatically have this box checked.
6. If you use basic printing, click the **Printing Fields** subtab.
 - a. Click the subtab for the area of the printed form your field appears in.
For body fields, click **Body**.
For column fields and item options, click **Columns**.
 - b. If you want the field to show up when you print or email the form, check the box in the **Print/Email** column next to your custom field.
 - c. Enter a label for each field as you want them to print.
7. Click **Save**.

Your custom transaction field now shows up on your custom transaction form.

To use a specific custom transaction form for your transaction, select the appropriate form in the Custom Form field on the transaction page.

For more information, see the following topics.

- [Adding Subtabs to a Custom Record](#)
- [Customizing Transaction Form PDF Layouts](#)
- [Transaction Form HTML Layouts](#)

Tracking Changes to Custom Fields

The History subtab on a custom field setup page has History and System Notes subtabs. Information on these subtabs provide historical and system notes details about changes made to the custom field.

In the History subtab for each custom field, information about every saved change is displayed with the following summary information:

- Date and time the change was made
- User who made the change
- Field label change
- Field type change
- Record type change
- Store value setting change
- Notes about the change

The System Notes subtab displays information about any saved setting change for the custom field:

- Date and time of the change
- User who made the change (Set By)
- How the change was made (Context)
- Type of change

- Field that was changed
- Old field value
- New field value

 **Note:** History and system notes currently aren't supported for custom segments.

Inactivating a Custom Field

If required, you can remove a custom field from a specific record type or delete the field completely. Alternatively, you can make a custom field inactive instead of deleting it. Data and associated forms for an inactive custom field are maintained in NetSuite. Maintenance in NetSuite is useful in cases where you may need to use a custom field again, or you simply want to preserve custom field data in the system.

 **Warning:** Be aware of the consequences of deleting a custom field. Instances of the deleted field will be removed from forms and lists and all associated data will be deleted. Reports and searches containing the deleted field will either have the field removed or may error out, depending on how the field is used. If you inactivate the field, the data is retained in NetSuite. Also note that changing the data type or permissions associated with a custom field can result in errors for reports and searches containing that field.

When a custom field is inactive, the field no longer appears on any forms, isn't available in searches, and isn't available to SuiteScript or SuiteAnalytics Connect, the same as a deleted field.

You can make a custom field inactive on the record page for the custom field or in a list of custom fields:

- On a Custom Field record, check the **Inactive** box to make a custom field inactive.
- A **Show Inactives** box is available on all custom field list pages. The **Show Inactives** box is also available for the list of custom fields on each custom record type's Fields subtab. For more information, see [Adding Fields to Custom Record Types](#). By default, the **Show Inactives** box is cleared, so that inactive custom fields are filtered out of lists. When Show Inactives is checked, the list displays both inactive and active custom fields, and each custom field in the list has an **Inactive** box next to it. You can check the box and submit to make a custom field inactive. You can clear the box and submit to reactivate an inactive custom field.

When you inactivate a custom field, it's removed from forms and reports, and it's not returned by global search – it's not available anywhere, the same as a deleted field. However, data and associated forms for an inactive custom field are maintained in NetSuite, whereas a deleted field is completely removed. However, data and associated forms for an inactive custom field are maintained in NetSuite, whereas a deleted field is completely removed from the system. If you reactivate an inactive field, its data is restored, and the field reappears on all of the same forms as before it was made inactive.

 **Note:** Some settings aren't maintained for inactive fields, including display formatting. Additionally, NetSuite doesn't verify if custom fields are referenced in SuiteScripts. If you inactivate a field, update any SuiteScripts that reference it, or they won't work.

You can't inactivate a custom field if other NetSuite records depend on it. For example, you can't make a custom field inactive if any of the following conditions apply:

- It's sourced by another custom field.
- It's used in lead conversion mapping.
- It's used in the Parameter, Values section for a workflow action.

- It's used in a workflow definition condition.
- It's used in a filter or a condition for a saved search.

In addition to the preceding examples, there are other dependencies that can prevent you from making a custom field inactive.

When you try to inactivate a custom field that has dependencies, you'll receive an error message. The message contains a link to a Dependent Records page, where you can review details about these dependencies.

Before you try to make custom fields inactive, you can use the Check Inactivate Dependencies option under the Actions menu on each custom field record to check for dependencies. Another option is available to check dependencies that can prevent you from deleting a field. When you do one of these checks, a Dependent Records page appears. If the list has no records, you can make the custom field inactive or delete it without errors.

You can't delete or inactivate the custom field if it's used in duplicate detection criteria. If you try to do so, you'll receive an error message. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

 **Note:** You can't make script custom fields inactive.

 **Note:** If a bundle contains an inactive custom field and in the target account that field is active, and you update the bundle, the custom field remains active in the target account after the bundle update. If the bundle contains an active custom field and in the target account that field is inactive, the field is changed to be active in the target account. For more information, see the help topic [Bundle Update Reference](#).

Editing a Custom Field

 **Warning:** If you edit a custom field ID, the field is removed from any saved searches that it's used in. Before you change a custom field ID, make a list of any saved searches that reference the field, then update the searches with the new ID. For more information, see [Maintaining Saved Searches that Include Edited Custom Fields](#).

You can modify custom fields.

To find out if a field on a form is custom, open its field-level help and look for the field ID. If the field ID isn't visible, you need to show the field IDs in your account.

For more information, see the following topics.

- [Getting Field-Level Help](#)
- [Exposing Internal IDs and Field IDs](#)
- [Showing Record and Field IDs in Your Account](#)

If the field ID begins with one of the following, the field is a custom field.

- custevent (CRM)
- custentity (entities)
- custitem (items)
- custcol (transaction column)

- custbody (transaction body)

To edit a custom field:

1. Go to Customization > Lists, Records, & Fields > [Custom Fields], where [Custom Fields] is the type of custom field you want to modify. The Custom Fields page appears, listing all custom fields configured for that field type.
2. Click the name of the custom field you want to modify. The Custom Field page is displayed for the selected field. You can modify the following:
 - Label
 - Field ID
 - Field Owner
 - Description
 - Type
 - Whether to store values for the field
 - Whether to use an encrypted format
 - Whether to have the field automatically shown in the list of records the field is applied to
 - Whether to index the field for global searches
 - Whether the record selected is the parent record. For more information, see [Parent-Child Record Relationships](#).
3. To make other changes to the custom field, select the appropriate subtab:
 - Applies To — Assign the custom field to specific record types.
 - Display — Specify the size of the field and its exact location on the form relative to other fields and subtabs on the page.
 - Validation & Defaulting — Restrict the information that's entered in the field, and specify values that display automatically when a record or transaction is first created.
 - Sourcing & Filtering — Source information for the field from another record in your account, or tailor the choices available when entering records and transactions.
 - Access — Specify who can access the information in the field.
 - Employee Access — If Advanced Employee Permissions is enabled for your organization, specify access restrictions for custom employee fields.
 - Translation — Translate the label and field-level help for the field.

For more information about the Custom Field page and subtabs, see [Creating a Custom Field](#).
4. Make necessary edits. Then click **Save**.

When making changes to the settings for custom fields, the following options are available:

- [Renaming Custom Fields](#)
- [Mass Updating Custom Fields](#)

 **Note:** To edit a custom field in a custom record type, open the custom record type and select the custom field from the **Fields** subtab. For more information about the **Fields** subtab, see [Adding Fields to Custom Record Types](#).

Also, see the following topics:

- [Converting the Field Type of a Custom Field](#)

■ Account-Specific Domains in Custom Fields

Maintaining Saved Searches that Include Edited Custom Fields

If there are saved searches in your account that reference custom fields and you change the custom field ID, the field is removed from the search. To maintain your search results, make a list of any searches that include the custom field before you edit the ID. Then, after you edit the ID, complete the following procedure to update the search.

To update a saved search that includes an edited custom field:

1. Log out of NetSuite and log back in to clear the search cache.
2. Locate and edit the affected searches to add the field with the new ID wherever the field with the old ID was used.
For more information, see the help topic [Editing or Deleting a Saved Search](#).
3. If the field with the old ID was used as part of a custom formula field, you must also update the formula definition to reference the field with the new ID.
For more information, see the help topic [Formulas in Searches](#).
4. Save the search.
5. Run the search to verify the results.

Converting the Field Type of a Custom Field

NetSuite supports field type conversions for some custom field types. After you've created a custom field, you can edit the type definition to change the Type field to another supported field type. Whenever possible, you should avoid changing a field type. For more information, see [Creating a Custom Field](#).

Note: Converting an unsupported field type will result in data loss. For a list of supported field types, see [Supported Field Type Conversions](#).

Warning: Custom field filters are type-sensitive. Changing the type of a custom field can make its filters incompatible. This incompatibility causes unexpected errors when a form using the field is displayed. Before changing a custom field's type, review its existing filters and remove or change these filters to avoid errors. For information about field filtering, see [Setting Filtering Criteria](#).

You can't change the custom field type if the Type is used in duplicate detection criteria. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

Before you convert the field type of a custom field, confirm that you need to change the field type. You may not need to convert the field type if:

- You use the field only to store data but don't use it anywhere else in NetSuite. In this case, you can have two parallel fields of data, meaning the original field and the new field.
- You use the field only as criteria to search for a specific value. In this case, you have an alternate option to create the new field and add a condition to the field in the Criteria subtab of a search. The results display a row for the original field and a row for the new field.

When large numbers of records are affected, converting a field type can take a significant amount of time to run. During the time that the conversion is running, the system is unusable. Therefore, you should consider running the conversion during off-peak hours. Before running the conversion, you should also verify the number of affected records to decide if you want to continue with the field type conversion. For information, see [Verifying the Amount of Data for Conversion](#).

When large numbers of records are affected, a timeout can occur during the conversion process. If a timeout occurs, all data changes revert to the state they were in prior to the conversion. Field customizations made prior to clicking Save are lost, but the data itself remains in its reverted state. You can try to run the conversion again during off-peak hours.

Alternately, you can convert the field types by performing a mass update or running a mass update script.

For more information, see [Converting Field Types for Custom Fields Using Mass Update](#) (SuiteAnswers article: 98734).

See the following Topics:

- [Converting Field Types Through a Bundle or SDF](#)
- [Verifying the Amount of Data for Conversion](#)
- [Supported Field Type Conversions](#)

Converting Field Types Through a Bundle or SDF

Note: SuiteBundler is still supported, but it won't be updated with any new features.

To take advantage of new features for packaging and distributing customizations, you can use the Copy to Account and SuiteCloud Development (SDF) features instead of SuiteBundler.

Copy to Account is an administrator tool that lets you copy custom objects between your accounts. The tool can copy one custom object at a time, including dependencies and data. For more information, see the help topic [Copy to Account](#).

SuiteCloud Development Framework is a development framework that lets you create SuiteApps from an integrated development environment (IDE) on your local computer. For more information, see .

If a field type conversion occurs through a managed bundle or SDF, you can't control when the field type is changed. For bundles or SDF applications installed manually, you can decide when to update the bundle or SDF applications. For more information, see [SuiteBundler Overview](#) and [SuiteCloud Development Framework](#).

Warning: If you change a field type on the target account for custom fields installed by a bundle or SDF, ensure the type conversion is backward compatible. If the type isn't backward compatible, you can lose data when the field is updated to the original field type by the bundle or SDF.

Verifying the Amount of Data for Conversion

Large amounts of data can potentially cause a timeout that can result in lost field customizations. Before running a field type conversion, you should verify the number of affected records included in the conversion.

Some ways you can verify the number of affected records include:

- Review field usage. Depending on what the field is used for, you may know if it affects a large numbers of records.
- Create a saved search or workbook of the data with a condition such as the custom field value isn't empty, or the custom checkbox field isn't checked. The results can help you determine how many records would be affected by a type conversion. If a field is applied to more than one record type, such as Employee and Contact, you must complete two searches or queries and combine the totals.

Supported Field Type Conversions

When you edit a custom field and change the field type, the existing field data is preserved whenever possible.

If you change the field type to a fundamentally different field type, existing data you had entered in that field is deleted. A warning message displays when you make a change. For example, changing a phone number field to a rich text field would preserve your data, whereas changing a date/time field to a check box field would not.

If you change the source list for a list/record or multiple select field, the existing data won't be preserved. You'll get a warning message if you make this kind of change.

Some types of conversions, such as a rich text field to another field type aren't possible.

The following table lists supported field type conversions.

From Field Type	To Field Type	Notes
■ Decimal Number ■ Percent ■ Currency	Integer Number	Value rounded to 0 decimal numbers.
■ Decimal Number ■ Percent	Currency	Value rounded to 2 decimal numbers.
Integer	■ Decimal ■ Currency ■ Percent	Converted without change.
Currency	■ Decimal ■ Currency ■ Percent	Converted without change.
Decimal	Percent	Converted without change.
Percent	Decimal	Converted without change.
■ Check Box ■ Currency ■ Date ■ Date/Time ■ Decimal Number ■ Email Address ■ Free-Form Text	■ Free-Form Text ■ Text Area	Check Box is converted as follows: ■ Checked is converted to T ■ Cleared is converted to F

From Field Type	To Field Type	Notes
■ Help ■ Hyperlink ■ Inline HTML ■ Integer Number ■ Password ■ Percent ■ Phone Number ■ Text Area ■ Time of Day		
Select	Multiple Select	List/Record type field remains unchanged. For example, you can't change from Account to Customer.
■ Text ■ Text Area	■ Rich Text ■ Long Text	Converted without change.
Date	Date/Time	Date/Time is the date and time in the user's current time zone and is converted.

For information about the available field types in NetSuite, see [Field Type Descriptions for Custom Fields](#).

Account-Specific Domains in Custom Fields

You should use URLs that include account-specific domains in all custom fields.

In the past, NetSuite domains contained an identifier of the data center where your account was hosted. Links in custom fields used these data center-specific domains. NetSuite domains no longer include data center identifiers. Instead, the domain identifies your account, not to the data center where your account is hosted. These are called account-specific domains.

Currently, a data center-specific domain in the URL will automatically be modified to an account-specific domain in the NetSuite center. This modification happens for hyperlink, rich text, long text, free-form text, text area, help, and inline HTML custom field types.

The automatic modification from data center-specific URLs to account-specific domain URLs is applied to your active session. The URL configuration remains the same. Links that use account-specific domains are faster than links modified in the current session. You should update all links in custom fields to use your account-specific domain.

Renaming Custom Fields

Changing a custom field's name doesn't automatically update it on custom forms that use the field.

To apply the new name to custom forms:

1. After changing your custom field, click **Apply to Forms**.
2. On the Apply Custom Field to Forms page, in the **Label** field, change the field label for each form where you want to reflect the change.

If no forms are listed, the Display Type field may be set to Hidden. Hidden fields aren't shown on any form.

Note: Custom transaction body and custom transaction line fields are included on all forms, even if they aren't displayed. If the Display Type field is set to Hidden, the field is still included on all forms for those two field types. The system ignores any changes you make to show or hide the field on all forms that apply to that custom transaction body or custom transaction line field.

3. Click **Save**.

Mass Updating Custom Fields

To be available for mass update, a custom field must meet the following criteria:

- It must support inline editing. For more information, see the help topic [Using Inline Editing](#).
- It must be displayed on your preferred form for the record type being updated.
- It must be stored.
- It must not have a sourcing relationship.
- It must not be encrypted.
- It must not be an Email custom field.
- If it's an Item custom field, the field script ID must not end with 'description'.

For more information about performing mass updates, see the help topic [Mass Updates](#).

Advanced Features for Custom Fields

You can tailor custom fields for your organization by using the advanced features available.

- [Encrypted Custom Field Stored Values](#)
- [Creating Custom Fields with Values Derived from Summary Search Results](#)
- [Dynamic Defaults and Dynamic Hyperlinks](#)
- [Creating Formula Fields](#)
- [SQL Expressions](#)

Scripting a Custom Printing Solution

If you use the List/Record field type, Advanced PDF/HTML Templates is available in the list. The Advanced PDF/HTML Templates option provides users with a list of all available advanced templates. You can incorporate the option in a scripted custom printing solution that lets users select the form to be used for printing.

Note: The Advanced PDF/HTML Templates option lists all available templates and isn't filtered for users. Use the Advanced PDF/HTML Templates option only with a scripted custom printing solution that specifies what action to perform when the user selects a form from the list.

Viewing Custom Images and Custom Image Files

After you add a custom image to a form using a custom image field, the image is shown on the form when you view it. You can interact with the image in two ways:

- Clicking the thumbnail takes you to the image file in the File Cabinet.

- Hovering over the image makes the Open button appear. When you click the Open button, a full-size preview of the image appears in the pop-up window.



Encrypted Custom Field Stored Values

As of 2014.1, a Use Encrypted Format option is available for new custom field definitions with specific text types. When Use Encrypted Format is enabled, field values are encrypted in the database. (Values are still displayed in the user interface.)

 **Warning:** After you save a custom field definition, you can't change the Use Encrypted Format setting.

When you specify that a field be encrypted, any value in the encrypted field displays as **ENCRYPTED** in all accounts except the account where the value was first created.

The encrypted format option isn't supported for Transaction Item Option, Suitelet, Workflow, or Workflow State custom field definitions. For custom field definitions where it's supported, the encryption format option defaults to disabled.

You can encrypt the following text types:

- Email Address
- Free-Form Text
- Long Text
- Phone Number
- Rich Text
- Text Area

For all other text types, the Use Encrypted Format box isn't available.

Be aware of the following precautions for fields with encrypted stored values:

- Fields with encrypted stored values aren't available to reporting, SuiteAnalytics Connect, or for sourcing or filtering. Other than the Rich Text and Long Text text types however, they can be returned in the results of searches and saved searches.
- The nlapiLookupField SuiteScript API doesn't work for fields with encrypted stored values. Other SuiteScript APIs that rely on search may not be supported.
- Encryption of stored field values increases their size and can have performance implications.
- You can't change the data type of a field with encrypted stored values to one that doesn't support encrypted store values.

For security reasons, system notes for fields with encrypted stored values mask old and new field values, displaying asterisks only.

Creating Custom Fields with Values Derived from Summary Search Results

You can create a custom field that can display values derived from summary saved search results. Each summary search field displays a rollup value for a selected search results field. The value is dynamically

calculated each time a form containing the summary search field is displayed. For example, you can use a summary search field to display the total quantity of all line items on a transaction. The summary search field provides an alternative to using SuiteScript to calculate the values of a custom field.



Note: Note the following

- The rollup functionality is similar to that of custom sublists, except the search results display in a field rather than a sublist.
- To ensure a smoother checkout process for your customers, avoid adding too many values to custom fields.

For details about custom fields with summary search derived values, see the following:

- [Steps for Creating a Summary Search Custom Field](#)
- [Custom Field Types](#)
- [Custom Field Data Types that Support Summary Search Derived Values](#)
- [Example Summary Search Custom Field](#)
- [Current Limitations for Summary Search Custom Fields](#)

Steps for Creating a Summary Search Custom Field

You can create a custom field with a value derived from a summary search.

To create a custom field with a value derived from a summary search:

1. Create or edit a summary saved search that rolls up to the result you want to display in the custom field. For more information, see the help topic [Defining a Saved Search](#).
 - Add search criteria to filter out any records/lines you don't want included in the rollup value. For more information, see the help topic [Advanced Search Criteria Filters](#).
 - Define a search results field for which values will be rolled up, and select a summary type. You can use these summary types: Count, Sum, Minimum, Maximum, and Average. (Group summary type isn't supported.) For instance, you could use Quantity as the results field and Sum as the summary type. For information about summary types, see the help topic [Summary Type Descriptions](#).
 - Define an available filter field. The field is used to filter search results to include only those records with available filter field values that match the available filter field value of the current record. The value displayed for the summary search custom field is a rollup of search results field values for the records that have matching available filter field values. For more information, see the help topic [Selecting Available Filters for Saved Searches](#).
2. Create or edit the custom field. For general instructions, see [Creating a Custom Field](#).
 - Select the search on the custom field's Validation & Defaulting subtab.
 - Optionally, you can select a Compare To field. You can use the Compare To field in cases where you want to place the custom field on a form for a record type that's different from the summary search record type. For example, you may want to place a custom entity field showing the result of a customer record summary search on an employee custom form. To do this, you could select an employee record field whose values could be matched to the values for the

search's Available Filter field. Search results field values for all records with matching values for the Compare To field and Available Filter field would be used to calculate the value of the summary search custom field.

- Don't enable the Store Value option, because values for rollup custom fields aren't stored.

Custom Fields that Support Summary Search Derived Values

You can select a summary search to provide rollup values for the following custom field types:

- Entity Fields
- CRM Fields
- Transaction Body Fields
- Other Record Fields
- Custom Record Custom Fields

Custom Field Data Types that Support Summary Search Derived Values

You can select a summary search to provide rollup values for custom fields of the following types:

- Currency
- Date
- Date/Time
- Decimal Number
- Email Address
- Free-Form Text
- Hyperlink
- Integer Number
- Long Text
- Percent
- Phone Number
- Rich Text
- Text Area
- Time of Day

Example Summary Search Custom Field

The following example shows the creation of a custom field to be displayed on custom purchase order forms. The value of the field is calculated by a purchase order summary search that sums the values for the purchase order line items' Amount field. No Compare To field is needed, because the Internal ID field set as the Available Filter for the search can be matched to the Internal ID of the purchase order record displayed on the form.

Current Limitations for Summary Search Custom Fields

- Custom field values from summary search results are never stored. Field values are always calculated dynamically at runtime. A user may be able to edit values, depending on the display options set for the custom field, but the edited values aren't stored. Also, because its values aren't stored, the field can't be used in search results, including lists based on saved searches.
- If you have a use case for running a saved search on a formula field where the value isn't stored, there's an alternative solution available. For more information, see [Running a Saved Search on a Formula Field Where the Value is Not Stored](#) (SuiteAnswers ID: 1017388).
- Calculated values for summary search custom fields can vary for users with various permissions. Summary search results are rolled up for the records to which the current user has access. Because users with various permissions can have access to different sets of records, the calculated value of the field can vary per user.

Dynamic Defaults and Dynamic Hyperlinks

When working with free-form text, text area, rich text or hypertext fields, in the Default Value field on the Validation & Defaulting subtab, you can include NetSuite tags in the default definition. NetSuite tags are populated with field values when the page is loaded or saved.

Dynamic defaults can be used in the hyperlink fields to include information from the record or the current session in the URL for the website.

To include NetSuite tags in the default definition of a field, enclose each tag within curly braces, defining field tags in a dynamic default as **{tag}**, where **tag** is the ID of the field. Each field in NetSuite has a unique ID and therefore a unique tag definition.

Note: Because field IDs are incorporated into tag definitions for fields, when creating custom fields, enter meaningful IDs for each custom field and use consistent naming conventions that meet your business needs. The default NetSuite IDs are meaningless, and in your dynamic defaults it'll be difficult to know exactly what the field references.

Dynamic defaults are evaluated, and each NetSuite tag is substituted on page load and page save. However, if you check the **Store Value** box, the tag substitution values are saved when the page is

created as a true default. The default value is saved and doesn't dynamically change when page fields on the page change. This lets you create a dynamic default that retains its initial value. If you leave the default empty on the initial creation, it remains empty on the next edit. The default value doesn't effect previously saved records. The field must be edited manually or updated with custom code to change its initial value.



Important: If you need to ensure that NetSuite tags defined in a dynamic default are substituted on each page load and save, clear the **Store Value** box.

See the following topics:

- [NetSuite Tags](#)
- [Dynamic Hyperlinks](#)
- [Setting the Store Value Field](#)
- [Setting the Formula Field](#)
- [Predefined Formula Tags](#)

NetSuite Tags

Currently any field on the page that has a custom code ID can be used in a NetSuite tag. You can find the code ID for standard NetSuite fields in the [SuiteScript Records Browser](#).

To determine the code ID of custom fields on your forms, go to the Custom Field list page for the field type, for example, Customization > Lists, Records, & Fields > CRM Fields. The code ID is displayed in the ID column.

You can also use these special tags that work only when the Formula box **is not** checked:

- **{useremail}** - Email of the user currently logged in
- **{now}** - Current date
- **{today}** - Current date
- **{nlversion}** - The full internal NetSuite release number
- **{nlsessionid}** - The browser's session ID, which could be used when creating a hyperlink for passing a session to a web service
- **{nluser}** - ID of the user currently logged in
- **{nlrole}** - Role ID of the user currently logged in

Dynamic Hyperlinks

For hyperlink fields, you can create a link to a website by defining dynamic defaults. Dynamic defaults are especially useful when the exact URL is unknown until information is collected for the record. You may also want to use information specific to the current logged in session as part of a URL parameter. When creating a dynamic hyperlink, in the Default Value field enter the http address as usual followed by **?=** and the required NetSuite tags embedded in curly braces.

For example, suppose that you want to include an address lookup feature on a customer form. Create a custom Entity field with the following parameters specified:

- Label: Map
- ID: `_map`
- Type: Hyperlink

- Store Value: Not checked
- Applies To: Customer
- Display / Subtab: Main
- Display / Link Text: Click Here for Google Map
- Validation & Defaulting / Default Value:
http://maps.google.com/maps?q={billaddr1}%20{billcity}%20{billstate}%20{billzip}
- Validation & Defaulting / Formula: Not checked (after you save the field, return to the custom field configuration page and ensure that Formula is cleared)

The default value includes NetSuite tags that identify the specific address of the current customer. These tags are resolved when the page is loaded so that the URL will direct the user to the customer's address as defined in the current customer record.

 **Note:** When creating dynamic hyperlinks, ensure that NetSuite tags embedded in the default value definition represent required fields. If the fields **aren't** required, and the associated form **doesn't** include a value for the tag, then the resulting URL will be not be valid.

Setting the Store Value Field

On page load and page save, dynamic defaults are evaluated and each NetSuite tag is substituted. For these substitutions to be made each time, the Store Value box for the custom field must be cleared.

If you check the Store Value box, the tag substitution is performed one time, when the custom field is created. The value is saved, but it won't update dynamically when the fields on the page change.

To ensure that NetSuite tags defined in a dynamic default are substituted every time a page is loaded and saved, clear the Store Value box.

For example, let's say you have a custom field on employee records for the phone number of the employee's supervisor. You want the field to automatically pull in the supervisor's phone number from the supervisor's employee record into the Supervisor's Phone Number field. If the supervisor's phone number changes, you want the phone number in the Supervisor's Phone Number field to update to that new number. In this situation, the Store Value box must be unchecked for the field to dynamically update. If the Store Value box isn't checked, the Supervisor's Phone Number field on employee records won't update to the new number if the supervisor's phone number changes.

Watch the following help video for information about using sourcing and the store value feature with a custom field.

 [Using Sourcing and the Store Value Feature with a Custom Field](#)

Setting the Formula Field

When entering a default value for a field, you can enter a formula.

 **Note:** A default value with the Store Value box checked is set **only** when the form for the new record is loaded. The value is then stored on the field. To evaluate the field default value every time the form is loaded, you must clear the Store Value box. For more information, see [Setting the Store Value Field](#).

When you check the Formula box, the contents of the Default Value field are treated as an SQL expression, executing **SELECT <formula text> FROM dual** in the database to obtain the results. Formulas that contain tags will have the values substituted before the formula is executed.

However, if a value contains tags, it doesn't necessarily mean it's a formula. Make sure you're entering a formula before checking the Formula box. For example, if you enter **Welcome, {firstname}** as the default for a text area field, the content is substituted correctly only if the Formula box is cleared.

If you're entering a dynamic default for a hyperlink and you clear the Formula box, the following default value results in a valid URL: `http://maps.google.com/maps?q={billaddr1}%20{billcity}%20{billstate}%20{billzip}`

For more information about the setup for the preceding example, see [Dynamic Hyperlinks](#).

However, if the Formula box is checked, the preceding URL results in an Error: Invalid Expression message. To use a formula for the preceding example, enter the formula like this: `'http://maps.google.com/maps?q=' | | {billaddr1} | | '%20' | | {billcity} | | '%20' | | {billstate} | | '%20' | | {billzip}`



Note: In the preceding example, the bill address can't be filled for a new record. Therefore, for this example to work, clear the Store Value field.

When you enter information in the Default Value field, the Formula box may be checked automatically. If you get an Error: Invalid Expression error or the default doesn't appear as expected, verify the Formula setting.

For more information, see [Creating Formula Fields](#).

For a detailed example of creating a formula field, see Example of Creating a Formula Field (SuiteAnswers ID 1014946).

Predefined Formula Tags

The following tags can be used in formulas:

- Date – Current date and time:
 - {TODAY}
 - {NOW}
- User ID:
 - {ME}
 - {USER}
 - {USER.ID}
- User role:
 - {USERROLE}
 - {USERROLE.ID}
- User department:
 - {USER.DEPARTMENT}
 - {USERDEPARTMENT.ID}
- User location:
 - {USER.LOCATION}
 - {USERLOCATION.ID}
- User subsidiary:
 - {USER.SUBSIDIARY}

- {USERSUBSIDIARY.ID}
- User class:
 - {USER.CLASS}
 - {USERCLASS.ID}

Creating Formula Fields

In addition to defining a custom field that's populated with dynamic data as described in [Dynamic Defaults and Dynamic Hyperlinks](#), you can define fields to be dynamically **calculated** based on the values returned in the dynamic fields.

To define formula fields, click the Validation & Defaulting subtab of the custom field. Check the Formula box. In the Formula field, use [NetSuite Tags](#) to define the dynamically defaulted fields to be used in the calculation and use [SQL Expressions](#) to define the formula.

The screenshot shows the 'Validation & Defaulting' subtab of a custom field setup. On the left, there are checkboxes for 'Mandatory' and 'Check Spelling', both of which are unchecked. Below them is a 'Maximum Length' input field. On the right, there is a 'Default Value' input field containing the formula '{amount}-(creditlimit)'. Below this is a 'Search' dropdown menu and a 'Field' dropdown menu. A 'Formula' checkbox is checked on the right side of the subtab.

To dynamically recalculate a formula, clear the Store Value box, and if needed, use the NULLIF function in your formula to prevent division by zero.

Important: The **Formula** box must be checked for the field to be processed as a formula. Also, as with any defaulted field, the **Store Value** box must be cleared to dynamically recalculate the value each time the field is viewed. Additionally, when a record is loaded, custom formula fields are calculated. However, if you change fields used in the formula definition while the record is loaded, the formula field won't recalculate until you reload the record.

Note: If the formula field doesn't have the **Store Value** box checked, the field isn't available in search results, including lists based on saved searches. If you have a use case for running a saved search on a formula field where the value isn't stored, there's an alternative solution available. For more information, see [Running a Saved Search on a Formula Field Where the Value is Not Stored](#) (SuiteAnswers ID: 1017388).

For more information about storing values, see [Setting the Store Value Field](#).

You might get these inline errors during validation:

- **ERROR: Field Not Found** – returned when either a custom field or search formula isn't recognized.
If you get a Field Not Found error, ensure that the user or role has the necessary access level in the **Default Level for Search/Reporting** list and permissions table. You can find these settings on the Access subtab of the custom field record.
- **ERROR: Invalid Formula** – returned when there's a syntax or data type error in the custom formula field.

When custom formula fields appear in search results, they show the dynamically calculated value at the time of the search. You can also define search criteria as formula fields without using a custom formula field. For more information, see the help topic [Formulas in Searches](#).



Warning: If a field on a record is referred to by a formula custom field, you can't edit the referenced field with inline editing.



Note: Knowledge of SQL will help you to fully leverage the flexibility and power of SQL functions to define complex formulas, but the Formula popup window can help you to correctly define formula expressions. The popup includes a Function list that lets you select SQL functions to be included in expressions, and Filter or Field lists that let you to select field names and have their IDs included in expressions. For more details, refer to [SQL Expressions](#). Also, you can refer to the SuiteScript Reference Guide for tables of NetSuite field IDs.

Referencing Related Records in Formula Fields

When creating a formula field, you can reference data contained in fields on related records.

For example, you create a custom entity field to apply to customer records. You can add a formula field that references a field on the employee record of the sales rep assigned to the customer.



Note: When referencing fields on other records, you're restricted to the records with search joins.

The format for formula field references is:

{fieldOnAppliedRecord.fieldOnJoinedRecord}

For example, if you wanted to display the partner email address on customer records, the format for the formula would be:

The screenshot shows the 'Validation & Defaulting' tab of the Custom Field Setup window. On the left, there are checkboxes for 'Mandatory' and 'Check Spelling', and a 'Maximum Length' input field. On the right, there is a 'Default Value' text box containing '{partner.email}', a 'Search' dropdown menu, and a 'Field' dropdown menu. A 'Formula' checkbox is checked on the far right.

partner is the field ID for the Partner field on the customer record. **email** is the field ID for the email field on the partner record.

The following example displays the email address on the record for the partner assigned to each customer.

Customer 3 ABC Co.

Save Cancel Merge Actions

Primary Information

Custom Form * SuiteDreams Customer Form

Customer ID * 3

Name ABC Co.

Type ☒ Company ☐ Individual

Company Name * ABC Co.

Email | Phone | Address

Email smarting@abc.com

Phone (212) 555-9065

Classification

Subsidiary

Parent Company

☐ Export to Openair

☐ Apply Coupon

Coupon Code

Support Email

Support Frequency

Parent Company

Status * CUSTOMER-Closed Won

Web Address

Category

Alt. Phone

Fax

Address

Project *

Favorite Movie

Preferred Contact Method

Map http://maps.google.com/?q=320%20%20

☐ Followed Up

Last Sales Activity

General Relationships Communication Address **Sales** Marketing Support Financial Preferences System Information Custom Bank Payment Details (Debit) Bank Payment Details (Credit) D&B Information DNS

Territory

Partner Email jason@xyzresellers.com

Note: Knowledge of SQL will help you to fully leverage the flexibility and power of SQL functions to define complex formulas, but you can click Set Formula next to the Formula box to add SQL functions or field IDs to your formula.

Custom Entity Field

Save Cancel Change ID Apply to Forms Actions

Label * Partner Email

ID customity7

Owner J Wolfe Flanagan, Jason

Description

Type Email Address

List/Record

☐ Store Value ☐ Use Encrypted Format

☐ Show in List

☐ Global Search

☐ Record is Parent

☐ Available to Suite Sign On

☐ Inactive

Applies To Display **Validation & Defaulting** Sourcing & Filtering Access Translation History

☐ Mandatory

☐ Check Spelling

Default Value {partner.email} ☒ Formula

Search

Field

Save Cancel Change ID Apply to Forms Actions

Note: For more details, refer to [SQL Expressions](#). Also, you can refer to the [Working with the SuiteScript Records Browser](#) for tables of NetSuite field IDs.

For information about field types in formulas, see [Formulas with Various Field Types](#).

Formula Field Example

Suppose, for example, you want to display the remaining credit available to a customer on the customer record. Create a custom entity field of the type Currency called **Remaining Credit**. Apply the field to the Customer record and set it to display on the Financial subtab. Define the field with the following formula in the Validation & Defaulting subtab:

```
{creditlimit}-nvl({balance},0)
```

(where `creditlimit` and `balance` are standard customer fields and the `nvl` NULL handling function forces the value to be set to the second parameter when the field is NULL)

Make sure that you enable the Formula field and clear the Store Value box to ensure that the value is always dynamically recalculated as a formula.

When a customer record is viewed, the Remaining Credit field returns a calculated value based on the credit limit and customer balance fields.

For an additional detailed example of creating a formula field, see Example of Creating a Formula Field (SuiteAnswers ID 1014946).

Creating a Formula Field to Display Transaction Line Numbers

You can display line numbers on the Items subtab of transactions when they're viewed online and in printed transactions. To do so, create a custom field that uses the `{linenumber}` formula, and apply the field to transaction forms.

To create a custom field that uses the `{linenumber}` formula:

1. To create a custom line number field, go to Customization > Lists, Records, & Fields > Transaction Column Fields > New.
2. Enter a label for the field, select a **Type** of **Integer Number**, and clear the **Store Value** box.
3. On the **Applies to** subtab, check boxes for the transactions that should display line numbers, and check the **Print on Standard Forms** box.
4. On the **Display** subtab, select a **Display Type** of **Disabled**.
5. On the **Validation & Defaulting** subtab, check the **Formula** box, and enter `{linenumber}` as the **Default Value**.
6. Save the new field.
7. To enable the line number field to be printed on a custom transaction form, edit the form. On the **Printing Fields, Columns** subtab, check the **Print/Email** box for the new field.

Note the following:

- Line numbers display when a transaction record is in View mode. In Edit mode, line number value is shown as 1.
- Line numbers correspond to the printed or viewed results, meaning they're contiguous even when transaction lines are omitted.
- If you're using a line number formula field for viewed and printed transactions, and you also want to include the line number in search results, set up the search as follows. This setup ensures that search results match viewed and printed transaction items:
 - Set a criteria of **Main Line = No (false)**.
 - Filter out transaction line items related to taxes.
 - Add the **Item** field as a results field.
 - Add the **Amount (Gross)** field as a results field; don't use the **Amount** field.

- Add a **Formula(Numeric)** field as a results field, with the following formula expression: `RANK() OVER (PARTITION by {internalid} ORDER BY {linesequencenumber})`.

Using a Field Formula to Remove Extra Spaces After Date/Time Field Values

You can remove the extra spaces that appear after a Date/Time custom field value by using the `{TO_CHAR(SYSDATE, 'FMMonth DD, YYYY')}` formula.

Formulas with Various Field Types

The following sections describe using various field types in formulas. For information about formula fields, see [Creating Formula Fields](#).

Using List/Record Field IDs in Formula Fields

You can reference the ID value for any List/Record type field in a formula field. Use the format `{field_name.ID}`.

Using Transaction Memo Fields in Formulas

Transactions that have line items, such as sales orders, can have values for both a memo body field and memo line item fields. Transaction line memo fields are set when you save a transaction. The **memo** field returns both the body field and line item field from the transaction, unless the memo body field is blank. If the memo body field is blank, the **memo** field returns the value of the first non-blank line item memo field.

Note: The **memobody** field is a placeholder that can be used to return the memo body field value, even if it's blank. However, memobody can be used only in a related record, for example, `{salesorder.memobody}`. The **memobody** field can't be accessed through SuiteScript.

Custom Lists

A custom list is a list of values you can use in custom fields on your forms and records. Custom lists enable you to set up predefined choices for your employees and customers to select when entering transactions and records.

Important: Custom lists are intended for use with small, fixed, related sets of data. Each custom list should include no more than 1000 values. You can't import CSV files for custom lists with over 25,000 values.

To see a list page for custom lists, go to Customization > Lists, Records, & Fields > Lists. Choose an option:

- To edit the settings of an existing custom list, click the list name. For lists with fewer than 1000 values, edit the list as needed. For lists of more than 1000 values, click **Manage Values** on the **Values** subtab to edit the list values.
- To edit the list values, click **List**. A list page appears where you can view, edit, add, or delete any values as required.
- To create a new custom list, click **New**
- To show all lists, check the Show Inactives box

To save time, you should create any custom lists or subtabs that may be needed when implementing the more advanced customizations for your account.

For help on defining a custom list, see [Creating a Custom List](#), [Adding Translations for Custom Lists](#), and [Managing Large Custom Lists](#).

For information about running saved searches on custom lists, see [Saved Searches for Custom Sublists](#).

Creating a Custom List

A custom list is a list of values that you can use in custom fields on your forms and records. Custom lists enable you to set up predefined choices for your employees and customers to select when entering transactions and records. You can create an unlimited number of custom lists and an unlimited number of values for each list.

You can use CSV import to import large custom lists. For information, see the help topic [Custom List Import](#).



Important: Custom lists can be used to set up options for matrix items. For details, see the help topic [Setting up an Item Matrix](#).

To create a custom list:

1. Go to Customization > Lists, Records, & Fields > Lists > New. The Custom List page appears.
2. In the **Name** field, enter a name for the list.
3. In the ID field, enter a unique alphanumeric ID for the custom list. For information about best practices and naming conventions, see [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see [Changing the ID of a Custom Object](#).
4. Select the owner of the custom list (default is you).
Only the owner and users with edit or full permission levels can modify the custom list.
5. Enter a description for the custom list.
6. By default, values are listed in the order in which they're entered. To list values in alphabetical order, click the **alphabetical order** radio button.
7. If the list is for matrix items, check the **Matrix Option List** box.
If you check the box, an **Abbreviation** column is added to the **Values** list.



Note: The Accounting Matrix Items feature must be enabled to use the matrix lists option. If it **isn't** enabled, the **Matrix Option List** box **isn't** displayed.

8. In the **Value** field, enter a value for the list.
9. Click **Add**.
10. Add values to the list as needed.
11. Click **Save**.

The custom list can now be used in your custom fields. For details, see [Creating a Custom Field](#) and [Adding Translations for Custom Lists](#).

You can use SuiteCloud Development Framework (SDF) to manage custom lists as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom list to another of your accounts. Each custom list page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Important: Custom lists are intended for use with small, fixed, related sets of data. Custom lists should include no more than 1000 values.

Adding Translations for Custom Lists

If the Multi-Language feature is enabled in your account, you can translate the name of a custom list, and its available values, so that they match the language of the NetSuite user interface. For details, see the following:

- [Translating a Custom List Name](#)
- [Translating Custom List Values](#)

Important: Before you can add these translations, you need to select translation languages at Setup > Company > General Preferences, on the Languages subtab. The Languages subtab lists both system-supported languages that can be used for the NetSuite user interface (and are available at Home > Set Preferences), and additional languages that can be used for website translations only (and aren't available at Home > Set Preferences). You should enter translations only for system-supported languages, because these are the only languages that can be displayed in the user interface. For details, see the help topic [Configuring Multiple Languages](#).

Translating a Custom List Name

You can define translations for a custom list name on the Translation subtab of the Custom List page.

Custom List

Save Cancel Change ID Actions

Name *
Number

ID
customlist40

Owner
45 Wolfe, K

Description

Show options in: ☒ the order entered ☐ alphabetical order

☒ Matrix Option List

☐ Convert to Custom Record

☐ Inactive

Values • **Translation •** History System Notes

Language ^	Translation
Croatian	
Czech	
French (Canada)	
Hebrew	
Italian	
Latin American Spanish	
Spanish	Numero
Ukrainian	

Info

Note: The maximum length for a custom list name's translation is 30 characters.

Translating Custom List Values

You can define translations for a custom list's values, on the Values subtab of the Custom List page:

The screenshot shows the 'Custom List' page with the 'Values' subtab selected. The page includes fields for Name (Number), ID (customlist40), Owner (45 Wolfe, K), and Description. A modal window is open for translating values, showing a list of languages: Croatian, Czech, French (Canada), Hebrew, Italian, Latin American Spanish, Spanish (cincuenta), and Ukrainian. The 'Done' button is visible in the modal. Below the modal, there is a table with columns 'Value' and 'Translation'. The table contains rows for values 250, 500, 1000, and 50. The '50' row is highlighted. At the bottom, there are buttons for 'OK', 'Cancel', 'Insert', 'Remove', 'Move Up', 'Move Down', 'Move To Top', and 'Move To Bottom', along with an 'Add Row' button.

Note: Custom list value translations have a 60-character limit.

Managing Large Custom Lists

Custom lists larger than 1000 values are displayed on a list page, enabling you to page through and manage the values of large lists. If you have a large custom list (over 1000 values) imported into NetSuite, the Values subtab on the Custom List page contains a Manage Values button. To manage the list values, click Manage Values.

Custom List More

Name *

Package Size

ID

customlist311

Owner

Default User

Description

Show options in: ☒ the order entered ☐ alphabetical order

☐ Matrix Option List

☐ Convert to Custom Record

☐ Inactive

Values • Translation • History • System Notes •

Manage Values

On the Custom List page, the values can be viewed only in alphabetical order. Use the page controls to view, edit, add, or delete any values as required. If your organization permits inline editing, you can't add or edit the abbreviation or translation from this page. Edit the individual values to change the value, abbreviation, or translation.

Package Size List Transactions Overview List Search Audit Trail

View Default Customize View New Package Size

Filters

☐ Show Inactives ☐ Edit ☐ Quick Sort 1 — 1042 < > Total: 1050

Billing	Edit View	Name ^
Customers	Edit View	1
Order Management	Edit View	10
Employees	Edit View	100
Commissions	Edit View	1000
Inventory	Edit View	1001
Manufacturing	Edit View	1002
Quota/Forecast	Edit View	1003
Financial	Edit View	1004
Management	Edit View	1005
	Edit View	1006
	Edit View	1007
	Edit View	1008
	Edit View	1009
	Edit View	101
	Edit View	1010
	Edit View	1011
	Edit View	1012
	Edit View	1013
	Edit View	1014

Custom Forms

Forms are the pages used to enter information into the NetSuite database. The standard set of forms provided with your NetSuite account can be customized to better suit your business needs. For example, you may want to reorganize subtabs or rename fields to better match your business workflow and terminology. After you create a custom form, you can set it as the preferred or default form for a page or select it as needed from a custom form list.

Note the following details:

- Form preferences are controlled by settings on the custom forms page as well as settings defined for each role.
- The Manage Translations feature enables you to manage your language translations using translation collections. You should edit translations for custom forms using a translation collection because it's more efficient than making the edits on the Translation subtabs in the user interface. For more information, see the help topic [Managing Translation Collections](#).

Translations used in custom forms are primarily taken from custom field and custom segment definitions. You can override a field label on the custom form definition page, but it's often not the best approach. When you translate a field label on the Translation subtab of a custom field, the translated label overrides the language set up in Home > Set Preferences. Language changes will be visible only to users with the same language preference. For example, if you change the language from English (US) to English (International), only users with the English (International) language preference will see the changes. For more information about translations, see the help topic [Configuring Multiple Languages](#).

- If you use SDF and the Multi-Language feature is enabled, you can enter translations in forms in SDF XML. You should define translations using a translation collection. For more information, see the help topic [Translation Collections as XML Definitions](#).

If you modify a form and enter a translation string directly in the form, the translations aren't connected to terms or translations collections and are visible only to users with the same language preference. If you change your language preference, then you must also define the translations for that language.

- Any settings defined for a specified role override the preferred form settings on the forms page. For Employee Center roles, only one form is ever made available to this type of role.



Important: SuiteScript does not support direct access to the NetSuite UI through the Document Object Model (DOM). You should access the NetSuite UI only by using SuiteScript APIs. For information about using SuiteScript APIs to customize the UI, see the help topic [SuiteScript 2.x Custom Pages](#).

Custom forms are supported in SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SDF SuiteApps, or to customize NetSuite accounts, using an integrated development environment (IDE) on your local computer. SuiteCloud projects are file-based and use XML definitions of custom NetSuite objects. For more information, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

Custom Entry Forms

You use entry forms to enter information into NetSuite. To create your own custom entry forms, start with an existing standard form and customize it. On the custom form, you can rearrange, rename, hide, or disable fields, subtabs, and buttons. You can also make specific fields required, add custom fields, or apply custom code.

For detailed information about how to customize an entry form, see [Creating Custom Entry and Transaction Forms](#) and [Customizing Address Forms](#).

After you've created a custom entry form, you can set it as the default form or preferred form for specific user roles. For more information, see [Defining Preferred Forms](#) and [Setting Default Forms for Roles](#).

Custom Transaction Forms

You use transaction forms to enter and print transactions in NetSuite. To create your own custom transaction form, start with an existing standard form and customize it. On your custom form, you can rearrange, rename, hide, or disable fields, subtabs, and buttons. You can also make specific fields required, add custom fields, or apply custom code.

For detailed information about how to customize a transaction form, see [Creating Custom Entry and Transaction Forms](#).

After you create a custom transaction form, you can set it as the default or preferred form for specific user roles. For more information, see [Defining Preferred Forms](#) and [Setting Default Forms for Roles](#).

You can also link transaction forms together to create transaction workflows. For more information, see [Linking Transaction Forms](#).

Important Note about New Fields and Custom Forms

Be aware that as part of a new release, new fields are sometimes added to NetSuite standard record types. When new fields are added to a record type, they're automatically added to your customized forms for that record type. These fields are set to show on customized forms. If you don't want new fields to show on your customized forms, you'll need to modify them after an upgrade to remove or hide the fields. Keep in mind that newly created fields are typically coupled with forms and can be needed for some forms to function properly. You should test any customized forms where you remove or hide fields, to ensure that the forms still function properly.

Optimizing Custom Form Performance

To optimize form performance, use a minimalist approach with your custom forms. Ensure that you:

- Limit the number of fields and sublists.
- Keep client scripts and workflows on forms to a minimum and manage them carefully. For more information, see the help topic [SuiteScript 2.x Client Script Type](#).
- Implement server callbacks only when needed.
- Use the browser built-in code inspection tools to audit the scripts on a form page.

For information about form templates for customizing entry and transaction forms, see [Form Templates](#).

Form Templates

You can customize your transaction and entry forms using basic layouts or advanced PDF/HTML templates. For more information, see the following:

- [Advanced PDF/HTML Templates](#)
- [Basic Layouts for Transaction Forms](#)

For information about custom entry and custom transaction forms, see [Custom Forms](#).

Advanced PDF/HTML Templates

You can use advanced PDF/HTML templates to create custom transaction and entry forms that fit your business needs. Custom templates let you personalize the look and feel of your transaction and entry forms for printing or emailing.

You can define various custom transaction layouts for printing forms as PDF and HTML to suit your needs. With custom advanced templates, you can hide or show fields, move and resize fields, and change fonts and colors on forms.

Advanced PDF/HTML templates provide extensive customization capabilities, new feature enhancements, and they support current industry standards for HTML-based editing.



Important: To use advanced templates, ensure that the Advanced PDF/HTML Templates feature is enabled. For information, see the help topic [Enabling the Advanced PDF/HTML Templates Feature](#).

You can create custom templates for the following types of printed forms:

- Bill of Materials
- Check
- Item Label
- Mailing Label
- Packing Slip
- Payment Receipt
- Payment Voucher
- Picking Ticket
- Price List
- Remittance Slip
- Return Form
- Shipping Label
- Statement
- Transaction

You can set custom forms for supported transaction types to use standard advanced PDF/HTML templates provided by NetSuite. Or you can create custom templates in a template editor that's available in the NetSuite user interface. This editor supports both rich text editing and HTML markup source editing and uses industry-standard tools and syntax.

For more details, see the help topic [Advanced PDF/HTML Templates](#).

For information about basic layouts for transaction forms, see [Basic Layouts for Transaction Forms](#).

Basic Layouts for Transaction Forms

You can create basic layouts for your custom transaction forms. Basic layouts include labels above information and a black background.

To define whether to print using PDF or HTML, go to Home > Set Preferences. On the Transactions subtab, check or clear the Print Using HTML box, and click Save.



Important: In a future release, basic layouts will no longer be supported. We encourage you to use Advanced PDF/HTML Templates instead because new features are added exclusively to advanced printing.

To create a basic custom layout, go to Customization > Forms > Transaction Form PDF Layouts or Customization > Forms > Transaction Form HTML Layouts, and click **Customize** next to a layout. Make your changes and click Save. You can choose default layouts to apply to one or more types of forms by checking boxes in the Preferred column at Customization > Forms > Transaction Form PDF Layouts or Customization > Forms > Transaction Form HTML Layouts, and clicking Submit, and clicking Submit.

For more details, see the help topics [Customizing Transaction Form PDF Layouts](#) and [Transaction Form HTML Layouts](#).

For information about advanced PDF/HTML templates, see [Advanced PDF/HTML Templates](#).

Creating Custom Entry and Transaction Forms

You can create your own custom entry and transaction forms by starting with an existing standard form and customizing it.

To create a custom entry or transaction form:

1. Choose a form to customize by doing one of the following:
 - To customize an entry form, go to Customization > Forms > Entry Forms. Click **Customize** or **Edit** next to a form in the Custom Entry Forms list.
 - To customize a transaction form, go to Customization > Forms > Transaction Forms. Click **Customize** or **Edit** next to a form in the Custom Transaction Forms list.
 - If available, in view mode of a custom form, click the **Customize** link in the upper right, and then click **Customize Form**.



Note: Forms labeled as (External) are used in the Customer Center and My Account section of your website.

2. In the **Name** field, enter a name for your custom form.
3. In the **ID** field, enter a unique alphanumeric ID for the custom form. For information about best practices and naming conventions, see [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see [Changing the ID of a Custom Object](#).



Note: You can't specify an ID for a transaction form when you create it, but you can change the ID after the form has been created.

4. Set the custom form properties. Options vary depending on the type of form being customized. See the following topics:
 - [Custom Entry Form Properties](#)
 - [Custom Transaction Forms Properties](#)
5. Click **Save**.

For information about how to see what a completed form looks like, see [Viewing Completed Custom Entry and Custom Transaction Forms](#).

You can use SuiteCloud Development Framework (SDF) to manage custom entry and transaction forms as part of file-based customization projects. For more information about SDF, see . You can use the Copy to Account feature to copy an individual custom entry or transaction form to another of your accounts. You can use the Copy to Account feature to copy an individual custom entry or transaction form to another of your accounts. Each custom entry or transaction form page has a Copy to Account option in the upper-right corner. For more information about Copy to Account, see the help topic [Copy to Account](#).

For more information about customizing Entry forms, see [Custom Entry Form Properties](#).

For more information about customizing Transaction forms, see [Custom Transaction Forms Properties](#).

For more information, see the following topics.

- [Moving Fields and Lists Between Subtabs](#)
- [Configuring Field Groups](#)
- [Configuring Fields or Screens](#)
- [Configuring Buttons and Actions](#)
- [Configuring Printing Fields](#)
- [Configuring Sublists](#)
- [Configuring QuickViews](#)
- [Associating Custom Code \(Client SuiteScript\) Files With Custom Forms](#)
- [Defining Preferred Forms](#)
- [Adding Disclaimers to Transaction Form Footers](#)
- [Specifying Check Layout by Subsidiary](#)
- [Customizing Multiple Page Transaction Forms](#)
- [Linking Transaction Forms](#)

After you've created a custom form, you should configure the subtabs. For more information, see [Configuring Subtabs for Custom Entry and Transaction Forms](#).



Important: As you configure your custom form, consider whether the transactions to use the form require tax data. Only a form that includes required tax-related fields can be used for a transaction with tax consequences. You can't set tax field names through form customization. You must go to Setup > Accounting > Set Up Taxes. For more information, see the help topic [Customizing Tax Fields on Transaction Forms](#).



Note: If you create or edit custom project forms when the Project Management feature is enabled, be aware that these forms can be altered if you later disable this feature. Immediately after you disable Project Management, you should review custom project forms to see if they have been changed, and if necessary, edit them to fit your requirements. For more information, see the help topics [Enabling Project Features](#) and [Using Project Management](#).

Viewing Completed Custom Entry and Custom Transaction Forms

To preview a completed form, create an entry or transaction that uses the custom form. For example, click the tab where you access transactions, and click the kind of transaction you want to create. From the Custom Entry or Custom Transaction page, in the Custom Form field, select the custom form to use.

To see a list of all transactions that use the custom form, click List in the upper right of the Custom Entry or Custom Transaction page. Then, to view a specific transaction instance, click View beside the transaction you want to view.

For more information, see the help topic [Working with Transactions](#).

Custom Entry Form Properties

Note that the options available on your form vary, depending on the type of entry form being customized.

- **Form is Preferred** – Check to make the form your default form when entering transactions of this type. You can have only one preferred form per transaction type. Checking this box clears any previously defined preferred forms of the same transaction type and replaces it with your new preferred form. For details about how preferred forms are defined, see [Defining Preferred Forms](#).
Note the following about marking an entry or transaction form as Preferred for the Customer Center role:
 - External forms, meaning forms with names appended with (External), can be marked preferred for Customer Center roles, but not for other roles.
 - Non-external forms can't be marked preferred for Customer Center roles.
 - When you mark a nononline order form as preferred for the Customer Center, it's saved as the form for the order. Even if an online form is marked as preferred, it's not saved as the form for an order. The preferred nononline order form is used instead.

Employee Center roles have limited access to forms. Only one form is ever made available to this role, and the form set on the Role record takes precedence over the preferred form.

- **Store Form with Record** – Check to store this custom form with each record created using this form. When viewed or edited, any record that was entered with this form is displayed using this form rather than your preferred form.
 - For custom entry forms, the Store Form with Record box is cleared by default.
 - The Store Form with Record box is available only for a subset of transaction forms. For this subset, the box is checked by default. This box isn't available for other transaction forms because custom forms are stored with records automatically. For more information, see [Storing Custom Forms with Transactions](#).



Important: If a custom form is stored with a record, users who access that record will see the custom form, even if it's not enabled for their role.

- **Print Template** – This field is available only when the Advanced PDF/HTML Templates feature is enabled, and the **Printing Type** is set to **Advanced**. Select a template to be used when transactions associated with this form are printed.
- **Enable Field Editing on Lists** – Check to permit inline editing on this form. Inline editing lets users edit fields on this form from within the record view. When enabled, fields that can be edited from within the record view display the inline editing icon. This option also provides a New menu that lists options to create new related records.
- **Use for Pop-ups** – Check to use this form in popup windows when you add a record of this type from another record. This capability is available only for entity forms, item forms, and custom record forms. For each type of form, only one form can be set as the popup form. Checking this box clears any previously defined popup forms of the same transaction type and replaces it with your new popup form.



Note: The Use for Pop-ups box is automatically checked for the custom form of a custom record, no other form is already enabled.

- **Popup Only** – When **Use for Pop-ups** is checked, you can check **Popup Only** to use this form only when adding a record of this type from another record. You can't change the form in the popup window if it's a standard popup form.

Custom Transaction Forms Properties

Note that the options available on your form vary, depending on the type of transaction form being customized.

- **Form is Preferred** – Check to make the form your default form when entering transactions of this type. Only one form can be defined as the preferred form per transaction type. Checking this box clears any previously defined preferred forms of the same transaction type and replaces it with your new preferred form. For details about how preferred forms are defined, see [Defining Preferred Forms](#).

When marking an entry or transaction form as Preferred for the Customer Center role, keep the following in mind:

- External forms, meaning forms with names appended with (External), can be marked preferred for Customer Center roles, but not for other roles.
- Non-external forms can't be marked preferred for Customer Center roles.
- When a nononline order form is marked as preferred for the Customer Center, it's saved as the form for the order. Even if an online form is marked as preferred, it's not saved as the form for an order. The preferred nononline order form is used instead.

Employee Center roles have limited access to forms. Only one form is ever made available to this role, and the form set on the Role record takes precedence over the preferred form.

- **Store Form with Record** – Check to store this custom form with each record created using this form. When viewed or edited, any record that was entered with this form is displayed using this form rather than your preferred form.
 - For custom entry forms, the Store Form with Record box is cleared by default.
 - The Store Form with Record box is available only for a subset of transaction forms. For this subset, the box is checked by default. This box isn't available for other transaction forms because custom forms are automatically stored with records. For more information, see [Storing Custom Forms with Transactions](#).



Important: If a custom form is stored with a record, users who access that record will see the custom form, even if it's not enabled for their role.

- **Print Template** – This field is available only when the Advanced PDF/HTML Templates feature is enabled, and the **Printing Type** is set to **Advanced**. Select a template to be used when transactions associated with this form are printed.
- **Allow Add Multiples** – Check to permit the **Add Multiple** button to appear on transaction item lists. You should clear the box on any forms that rely on custom code line item validation scripts. The **Add Multiple** button is displayed on Items lists and lets you add multiple items at a time to the item list. However, when items are added with the **Add Multiple** button, any Validate Line custom code events defined for the form **aren't** triggered.
- **Printing Type** – This field is available only when the Advanced PDF/HTML Templates feature is enabled. The Advanced option that's selected by default enables your custom form to use an advanced PDF/HTML template. For more details, see the help topic [Advanced PDF/HTML Templates](#). Select **Basic** to enable your custom form to use transaction form PDF layouts and HTML layouts.
- **Email Template** – (Available only when the Advanced PDF/HTML Templates feature is enabled, and the **Printing Type** is set to **Advanced**.) Select a template to use for email attachments when transactions associated with this form are sent by email.
- **Email Message Template** – (Available only for transactions that support custom email templates.) Select which template to use for the message body for this transaction type when NetSuite sends email messages with a PDF attachment. If you select Default Email Template, NetSuite will send transaction email messages using a hard-coded template and body message that you can set up at

Setup > Company > Email > Email Preferences (Administrator). For more information, see the help topic [Assigning an Email Template to a Transaction Type](#).

- **PDF Layouts** – Select a PDF layout for your form.
- **HTML Layouts** – Select an HTML layout for your form. Standard and Classic layouts exist for all the standard form types other than shipping labels.
- **Remittance Slip** – Specify which remittance slip is used on invoices, statements, return authorizations, and packing slips. To prevent the current transaction from printing with a remittance slip, select **None**.



Note: To use this feature, set the Print Remittance Form with Invoices & Statements feature. For more information, see the help topic [Printing Remittance Forms](#).

- **Disclaimer** – Enter a disclaimer message to appear at the bottom of your form. The message can be up to 4,000 characters long, including spaces.
- **Address** – Enter an address to be used only on this form. If you don't enter an address, the default address entered at Setup > Company > Company Information is used.
- **Logo** – Select a logo to be used only on this form. You must first upload the image to your File Cabinet at Documents > Files > Images. If you don't select a logo, the default logo selected at Setup > Company > Company Information is used.

Logos aren't displayed on the following transaction forms when basic printing is used: picking ticket, bill of materials, shipping label, opportunity, item fulfillment, item receipt, store pickup fulfillment, and custom transactions.
- **Columns Width** – This is the total width of all the columns on your form. If the total width of your columns is greater than the available column space, NetSuite adjusts the width proportions to fit on the page.
- **Layout Space** – This number is the maximum number of inches of printable space permitted on your form. The measurement is determined by the Page Width of the layout you choose. You can change the page width by creating a custom layout.

Storing Custom Forms with Transactions

Store Form with Record is an option available for custom entry and some custom transaction forms. The option indicates whether a reference to the form should be stored with each record created by it. When enabled, you see the referenced form, rather than your preferred form, when you view or edit a related record. This option is enabled by default for custom transaction forms.

For some transaction types, the custom form is always stored with each transaction where it was used. For these transaction types, the Store Form with Record box isn't available to administrators when you're configuring your custom form.

The following table lists custom transaction form types and whether users have the choice of changing the Store Form with Record option.

Custom Transaction Form Type	Can Choose Not to Store Form with Record?
Assembly Build	Yes
Assembly Unbuild	Yes
Bill of Materials	No, form always stored with record
Bill Payment	No, form always stored with record
Cash Refund	No, form always stored with record

Custom Transaction Form Type	Can Choose Not to Store Form with Record?
Cash Sale	No, form always stored with record
Check	Yes
Credit Card Charge	Yes
Credit Memo	No, form always stored with record
Customer Deposit	No, form always stored with record
Customer Refund	Yes
Deposit	Yes
Estimate (Quote)	No, form always stored with record
Expense Report	Yes
Inventory Adjustment	Yes
Inventory Cost Revaluation	Yes
Inventory Worksheet	Yes
Invoice	No, form always stored with record
Item Fulfillment	No, form always stored with record
Item Receipt	No, form always stored with record
Journal Entry	Yes
Opportunity	Yes
Packing Slip	No, form always stored with record
Payment	No, form always stored with record
Picking Ticket	No, form always stored with record
Price List	No, form always stored with record
Purchase Order	No, form always stored with record
Remittance Slip	No, form always stored with record
Return Authorization	No, form always stored with record
Return Form	No, form always stored with record
Sales Order	No, form always stored with record
Shipping Label	No, form always stored with record
Statement	No, form always stored with record
Transfer Inventory	No, form always stored with record
Transfer Order	Yes
Vendor Bill	Yes
Vendor Credit	Yes

Custom Transaction Form Type	Can Choose Not to Store Form with Record?
Vendor Return Authorization	Yes
Work Order	Yes



Important: If a custom form is stored with a record, users who access that record will see the stored form, even if it's not enabled for their role.

Configuring Subtabs for Custom Entry and Transaction Forms

On the **Subtab** subtab, you can select which subtabs to display on your form and provide a custom heading for each subtab. For example, you have a OneWorld account and you don't want to let users associate vendors with multiple subsidiaries. You can create a custom vendor entry form and specify that the **Subsidiaries** subtab not be shown.

To modify the available subtabs:

1. In the **Show** column, check the boxes for the subtabs you want to display on the form. Clear the boxes for the subtabs you don't want to display.



Note: On saved search results, you can perform inline edits on a field only if the subtab for the field is set to display on your preferred form. Field editing on lists must also be set on your preferred form. For information about setting up field editing on lists for a form, see [Creating Custom Entry and Transaction Forms](#)

If you've set up field editing but can't edit inline on saved search results, make sure the subtab for that field is set to display on your preferred form. Alternatively, move the field to a different subtab that's set to display on the form. For more information, see [Moving Fields and Lists Between Subtabs](#).

2. In the **Label** column, edit the headings for the subtabs as needed.
3. Rearrange the order of subtabs as needed. To rearrange the subtabs, click the required line and then drag it to the preferred position, or click **Move to Top** or **Move to Bottom**.
4. After configuring the subtabs, you should configure the fields or screens. See [Configuring Fields or Screens](#).

To add a subtab that does not yet exist to a form, you need to first create the subtab at Customization > Forms > >Subtabs. You can also rename custom subtabs there. See [Creating Custom Subtabs](#).

Moving Fields and Lists Between Subtabs

You can move fields and lists (the Contacts list on entry forms, for example) between subtabs on entry forms.

After making changes on the Custom Form page, click **Save & Move Elements** to move fields and lists on the form to other subtabs.

Note: The Move Form Elements page lets you to move elements between subtabs and some specific sublists. Available sublists depend on the type of form you're editing. You can view a full list of available sublists for each transaction type in the SuiteScript Records Browser. For more information, see the help topic [SuiteScript Records Browser](#).

To move fields and lists between subtabs:

1. Click **Save & Move Elements**. Your form is saved, and the Move Form Elements page opens.
The **Fields** subtab lists fields that appear on each subtab of the customized form that include fields. Subtabs with lists (the **Contacts** subtab on entry forms or the **Items** subtab on transactions, for example) are shown on the **Lists** subtab of the Move Form Elements page.
2. For each field on each subtab, select the subtab where you want that field to appear. Note that you can select multiple fields and move them to the same subtab by using the same Select and Set Subtab dropdown list. At any time, you can click **Save and Move More** to save your field changes, and reload the page with the fields moved to the specified subtab.
3. Click the **Lists** subtab.
4. Select the subtab where you want each list to appear.
You can move a field or list to a subtab that **isn't** displayed because it doesn't contain items of that type. When a field or list is moved to a previously undisplayed subtab, you **can't** move the field back until the Move Form Items page is saved. To move a field again, go back to the Move Form Items page after saving and move it.
5. Click **Save**.

Fields and lists now appear on the chosen subtabs. If a field or list has been moved to a subtab that isn't shown on the form, those items are no longer available on the form.

Configuring Field Groups

This topic provides an overview of field groups in NetSuite and describes how to configure field groups on standard forms. If you want to add or manage field groups on custom record custom forms, see [Adding Field Groups to Custom Forms of Custom Records](#).

Use the Field Groups subtab to customize the field groups that appear on your forms. Field groups support body fields only. You can't create a field group for sublist fields.


You can use the Field Groups subtab to change the UI label of a field group, the fields within the field group, and the placement of a field group on the page. You can also use the Field Groups subtab to create new field groups and organize all fields into specific field groups. The order of field groups on the Field Groups subtab determines the order of field groups on your form.

Any unassigned fields are listed together below all other fields that are assigned to field groups. These unassigned fields are always displayed last and can be reordered among all other unassigned fields. If you want to move a field up higher on a subtab, assign it to a field group.

Be aware that adding custom fields to field groups can cause field text to be displayed in a way you may not expect based on the display size attributes set for custom fields. For more information, see [Setting Display Options for Custom Fields](#).

To configure field groups:

1. Click the **Field Groups** subtab.
2. To customize field groups that appear in the main body area of a page, click **Main**. To customize the field groups that appear on other subtabs on the form, click another field group subtab.

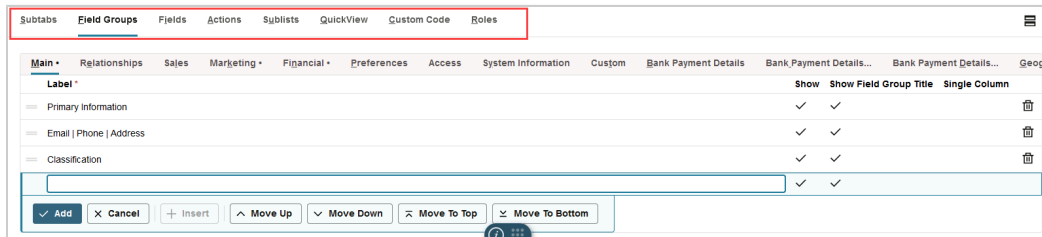

3. In the **Label** column, edit field group headings.
4. In the **Show** column, clear a field group to hide it on the form.
5. In the **Single Column** column, to have the column display vertically rather than horizontally, check a field group. The following screenshot provides an example of the Primary Information field group displayed vertically.

Note that if you select **Single Column** for three field groups together, the field groups appear side by side in the UI, because three field group columns make a row.

6. To delete a field group, click the **X** icon. The fields display at the bottom of the page. However, the fields aren't assigned to any field group because that field group has been deleted.
7. After configuring your field groups, you can click the **Fields** subtab (for Entry forms) or the **Screen Fields** subtab (for Transaction forms) to configure the fields that appear in each field group. For more information, see [Configuring Fields or Screens](#).

For information about managing field groups on custom forms for custom records, see [Adding Field Groups to Custom Forms of Custom Records](#).

Adding Field Groups to Custom Forms of Custom Records

You can add field groups to new and existing custom record custom forms.

To add field groups to the custom form of a custom record:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. On the Record Types list page, select your record type.
3. Click the **Forms** subtab.
4. On the **Forms** subtab, click **Edit** next to the custom form for the custom record.

Note: If you don't yet have a custom form, click **Customize** next to the record type to create one.

5. Click the **Field Groups** subtab.
6. Enter a UI label for the first field group, set all other field group attributes, and click **Add** to add the new field group.
7. After adding all field groups, click **Save**.
8. After configuring your field groups, you can click the **Fields** subtab (for Entry forms) or the **Screen Fields** subtab (for Transaction forms) to configure the fields that appear in each field group. For more information, see [Configuring Fields or Screens](#).

Configuring Fields or Screens

When the following subtabs are available on the current entry or transaction form, you can configure fields for that form:

- **Screen Fields** subtab on transaction forms
- **Fields** subtab on entry forms
- **Sublist Fields** subtab on transaction forms

These fields can also be moved to display on an alternate subtab or in alternate field groups.

 **Note:** Even if you've disabled a subtab as described in [Configuring Subtabs for Custom Entry and Transaction Forms](#), you can still configure fields for that subtab. This is useful if you later decide to include the subtab on your form.

To configure fields in the Screen Fields, Fields, or Sublist Fields subtab:

1. In the **Show** column, check the boxes next to the fields you want to display.

 **Note:** When configuring fields, be aware of the following:

- Hiding fields on a form can hide other related fields. For example, hiding **Credit Card Approved** on the sales order form also hides fields related to **Address Verification System (AVS)**.
- If you use multiple locations, you must show the **Location** field on the sales order form you use for your website to calculate shipping correctly.
- If an advanced template relies on a hidden sublist field, the template can fail to print. For more information, see the help topic [Using FreeMarker to Work with Hidden Fields Used in Advanced Templates](#).
- If Termination Reason Tracking is enabled, you can't save employee records if required termination fields are hidden. For more information, see the help topic [Termination Reason Tracking](#).

2. In the **Quick Add** column (Entry forms only), check the boxes next to the fields you want to define as inline editable and available in Quick Add portlets.

If a field has both **Quick Add** and the **Enable Field Editing on Lists** checked, then that field can be directly edited, and the record is saved when you click off of the field. Inline editable fields are also available when attaching contacts or scheduling activities to records. For more information, see the help topic [Using Inline Editing](#).

You can add Quick Add portlets to your dashboards. Quick Add portlets permit the quick addition of a selected record type without navigating to the record type page. For more information, see the help topic [Quick Add Portlet](#).

3. In the **Mandatory** column, check the boxes next to the fields that are required on your entry form.

 **Note:** You can't clear mandatory boxes for required NetSuite fields or custom fields defined as required in the custom field definition.

4. In the **Display Type** column, select the display type for each field. For more information, see [Setting Display Options for Custom Fields](#).

5. In the **Check Box Default** column, choose one of the following options for each check box field on the form:
 - **Use Field Default** — Use the default value set in the field definition.
 - **Checked** — Set the default to checked, possibly overriding the default set in the field definition.
 - **Unchecked** — Set the default to cleared, possibly overriding the default set in the field definition.
6. In the **Label** field, edit the name of any of the fields as needed. Labels can be up to 200 characters long. However, you should consider how the length of a label appears on printed forms.
 - If you change the label of a field on the **Sublist Fields** subtab, the new label is also applied to the field on the **Printing Fields** subtab.
 - In accounts where the Multi-Language feature is enabled, the label you edit here applies only to your current language, as set at Home > Set Preferences. For more information, see the help topic [Configuring Multiple Languages](#).
7. In the **Field Groups** list, select the group where you want the field to appear.

 **Note:** After you assign a field to a field group, the field can be moved only within the group. If you want to move the field elsewhere on a form, you must change its field group.

8. In the **Column Break** column, check any field to insert a column break beginning with that field. Be aware that inserting a column break after a field can cause field text to display in a way you may not expect based on the display size attributes set for custom fields. For more information, see [Setting Display Options for Custom Fields](#).
9. To include a blank line before a field, enter the number of blank lines in the **Space Before** column.
10. To associate a field with the field immediately above it, check the **Same Row as Previous** box. An associated field shares the same **Show** or **Hide** setting as the previous field. The field belongs to the same field group as the previous field and is displayed together on the form with the previous field. For more information, see [Associating Related Fields on Custom Forms](#).
11. Rearrange fields as needed.
 - To move each field to the preferred subtab, click **Move Elements Between Subtabs**. For more information, see [Moving Fields and Lists Between Subtabs](#).
 - Rearrange the order of the fields on each subtab. Select and drag each line item to the preferred position or click **Move to Top** or **Move to Bottom**.

 **Note:** Fields that belong to a field group can be moved only within the group. If you want to move the field elsewhere on a form, either change the field group for the field or rearrange the field groups.

Unassigned fields are listed together below all other fields that are assigned to field groups. These unassigned fields are always displayed last and can be reordered among all other unassigned fields. If you want to move a field up higher on a subtab, assign it to a field group.

12. For transaction forms only, set the following options:
 - In the **Check Box Default** column, set the default value for check box fields. If you set the **Check Box Default** field to **Checked** for a transaction form field, the box for that field will automatically be checked. You can clear the box if needed.
 - Click the **Sublist Fields** and arrange the line-item columns for your transaction entry form by moving fields as needed. The order of the columns on the screen does **not** have to match the order of the printed columns of your form.

13. On the **Sublist Fields** subtab, in the **Items Filter** field, select a saved search to use to filter the items that appear in the Items list on this form. For more information, see the help topic [Defining a Saved Search](#).
14. On the **Total Box** subtab, specify which fields to show in the form totals.
If you use SuiteTax, additional tax fields are available. For more information, see the help topic [Tax Details on Transactions in SuiteTax](#).
15. Click **Save**.
16. If required, to create any new custom fields, click **New Field**.



Note: Ensure that you save any changes before creating new fields from within the form. When you click **New Field**, you leave the custom form to go to the custom field page. For more information, see [Custom Fields](#).

17. For transaction forms only, after configuring the fields or screens, you should configure the printing fields. For more information, see [Configuring Printing Fields](#).



Important: As you configure your custom form, consider whether the transactions to use on the form require tax data. You can't specify tax field names through form customization. You must go to Setup > Accounting > Set Up Taxes. For more details, see the help topic [Customizing Tax Fields on Transaction Forms](#).

Filtering the Items Dropdown List on Transactions

You can use a saved item search to limit the items that appear in the **Items** list on transactions. The items in the **Items** dropdown list will meet the criteria of the saved item search. For more information, see the help topic [Defining a Saved Search](#).

To filter the Items dropdown list on transactions:

1. Create a saved items search to filter the items list.
2. Customize the transaction form where you want the filtered items list to appear.
3. On the Custom Transaction Form page, click the **Sublist Fields** subtab.
4. In the **Item Filter** list, select the appropriate saved item search.
5. Click **Save**.

When this custom transaction form is used, the item field is filtered to display only the items that meet your search criteria. For more information, see [Creating Custom Entry and Transaction Forms](#).

Associating Related Fields on Custom Forms

You can define an association among closely related fields on custom entry and transaction forms. Your definition of one or more fields as associated with a previous field on the form causes the associated fields to:

- Share the same Show/Hide setting as the previous field
- Belong to the same Field Group as the previous field
- Be displayed together on the form with the previous field

You define associated fields on the Fields subtab of a custom form by checking the Same Row as Previous box. You also can remove a field's association with another field by clearing this box.

Custom Entry Form

Name: Custom Campaign Form
ID: customform_100_1013519_482
Type: CRM
SuiteApp: Campaign

☐ Inactive
☒ Enable Field Editing on Lists
☐ Store Form with Record
☒ Form is Preferred

Subtabs: Field Groups **Fields** Actions Sublists Custom Code Roles History

Main • Statistics • Keyword • System Information • Custom •

Move To Top Move To Bottom New Field

Description	Show	Mandatory	Display Type	Label	Field Group	Column Break	Space Before	Same Row as Previous
Custom Form	☒	☐	Normal	Custom Form	Primary Information	☐		☐
Campaign ID	☒	☐	Normal	ID	Primary Information	☐		☒
Auto Name	☒	☐	Normal	Auto	Primary Information	☐		☒
Title	☒	☐	Normal	Title	Primary Information	☐		☐
Category	☒	☐	Normal	Category	Primary Information	☐		☐
Owner	☒	☐	Normal	Manager	Primary Information	☐		☐
Owner Role	☒	☐	Normal	Manager Role	Primary Information	☐		☒
Start Date	☒	☐	Normal	Start Date	Primary Information	☐		☐
End Date	☒	☐	Normal	End Date	Primary Information	☐		☐
Base Cost	☒	☐	Normal	Base Cost	Primary Information	☐		☐

Setting custom fields to be Same Row as Previous on custom forms can cause field text to display in a way you may not expect based on the display size attributes set for custom fields. For more information, see [Setting Display Options for Custom Fields](#).

In a previous release a change was made so that all fields previously defined as child fields are defined as associated fields of former parent fields. This change provides greater flexibility because you can remove the association if needed.

Configuring Buttons and Actions

On the Actions subtab of custom forms, you can configure standard NetSuite buttons and custom buttons. You can use the Standard Actions subtab to customize built-in, standard NetSuite buttons. For more information, see [Working with Standard Buttons](#). Use the Custom Actions subtab to create or modify custom buttons you've associated with client SuiteScripts. For more information, see [Working with Custom Buttons](#).

Also note that you can use point-and-click customization to translate the button labels for both standard and custom buttons.

Note: You can also use SuiteScript to hide and rename buttons. For a list of standard buttons that are supported in SuiteScript, see the help topic [Button IDs](#). Additionally, you can use the [Remove Button Action](#) action in SuiteFlow to conditionally hide buttons from specific users or when a record is in a certain state.

Important: SuiteScript and point-and-click customization don't support customizing the Save, Edit, Cancel, Back, and Reset buttons.

After you've configured your buttons, you should configure the printing fields. For more information, see [Configuring Printing Fields](#).

See the following topics:

- [Working with Standard Buttons](#)
- [Working with Custom Buttons](#)
- [About Button and Action Layout](#)

Working with Standard Buttons

[Customizing Buttons in Custom Forms](#)

Use the following steps to configure standard buttons through point-and-click customization.

To customize standard buttons:

1. On the **Actions** subtab of the Custom Forms page, click the **Standard Actions** subtab.
2. In the **Label** field, enter a UI label for the button.
3. In the **Show** column, to display the button on the form, check the box. Buttons are shown by default.
4. In the **Display As** column, to display the button as an inline button, select **Button**. To have the button appear as an action on the **More Actions** menu or as a menu item in a button group, select **Menu**. For more information, see [About Button and Action Layout](#).
5. Click **Save**.

Working with Custom Buttons

You can add custom buttons to forms to initiate client SuiteScript. For example, you could add Create Invoice button on a customer form that performs a specific function when the button is clicked. The Custom Actions subtab is visible when the Client SuiteScript feature is enabled in your account.



Important: Custom buttons appear only when a record is in Edit mode. To make a button appear in View mode, use a User Event Script or Workflow.

To add a custom button to associate with client SuiteScript:

1. On the **Custom Code** subtab of the form, in the **Script File** field, add the client SuiteScript. For more information, see [Associating Custom Code \(Client SuiteScript\) Files With Custom Forms](#).
The primary object used to encapsulate custom buttons is `serverWidget.Button`. For more information, see the help topic [serverWidget.Button](#).
2. On the **Custom Actions** subtab of the Custom Forms page, click the **Custom Actions** subtab.
3. In the **Label** field, enter the UI label for the button. The label can be up to 99 characters long.
4. In the **Function** field, enter the name of the function to perform when the button is clicked. The function can exist in your client SuiteScript file or any library file attached to the **Custom Code** subtab.
5. In the **Display As** column, select **Button** to display the button as an inline button. Select **Menu** to have the button to appear as an action in the **More Actions** menu. For more information, see [About Button and Action Layout](#).
6. Click **Save**.

About Button and Action Layout

On the Action subtab of a custom entry form, use the **Display As** list to customize the layout of a button or action.

Custom Entry Form List Copy to Account

Save Cancel Move Elements Between Subtabs Change ID Actions

Name * Custom Event Form

ID custform_222_563214_989

Type CRM

Subtype Event

☐ Inactive

☒ Enable Field Editing on Lists

☐ Store Form with Record

☒ Form is Preferred

Subtabs Field Groups Fields **Actions** Sublists QuickView Custom Code Roles History

Standard Actions Custom Actions

The following buttons are not supported in point-and-click customization or in SuiteScript: Save, Cancel, Reset, Edit, Back.

Action Name	Label	Show	Display As
Accept	Accept	☒	Button
Decline	Decline	☒	Button
Delete	Delete	☒	Menu
Make Copy	Make Copy	☒	Menu
New	New	☒	Menu
Print	Print	☒	Button
Quick Accept	Quick Accept	☒	Menu
Save & Copy	Save & Copy	☒	Menu

On the Actions subtab, the display type for each action defaults to either Button or Menu. **Button** means that the action displays as a button that can be clicked on the top and bottom of a form. **Menu** means that the action displays as an action in the More Actions menu, **or** as a menu item in a button group.

For certain buttons such as the **Save &** buttons (for example, Save & New and Save & Print), display as **Menu** means that they display as an item in a button group. For these buttons, **Menu** does not mean the button displays as an item in the More Actions menu.

Actions are grouped in sub-groups represented from left to right. Core actions such as Save appear as buttons and appear in the left-most group. Functional buttons specific to a record are in a middle group, and More Action actions are in the right-most group.

Marketing Campaign Trade Show

Save Cancel New Event Field Actions

Save & New

Save & Copy

Also note, if you choose to display a custom button as **Button**, it appears inline in front of the **Create New** button (highlighted in the following image). If you choose to display both standard and custom buttons as an action in the **Actions** menu, the action appears at the top of the Actions list.

Configuring Printing Fields

Configuration of Printing Fields is required for Transaction Forms only that use basic printing.

On the Printing Fields subtab, you can customize the way your form appears when printed. The Printing Fields subtabs represent the various areas of a printed form.

To configure how each section of your printed form displays:

- For all subtabs on the Printing Fields subtab:
 - In the **Print/Email** column, check the boxes next to fields you want to appear on printed and emailed forms.
This column also controls the visibility of a field in the Customer Center. Check the boxes next to fields you want to appear in the Customer Center.
 - In the **Label** column, edit the labels of the fields as needed.

Note: If you change the label for a field on the **Printing Fields** subtab, the label is also automatically applied to the field on the **Sublist Fields** subtab.

- For the **Body** and **Columns** subtabs:
 - In the **Width** column, enter the width for transaction column fields appearing on your printed and emailed forms.

Note: To change the width of custom body fields, you must make the change on the Custom Form page. The width you set on the custom field does not affect printed transaction body fields.

- Rearrange fields as needed. Select and drag each line item to the preferred position.

- Click **Save**.

Note: Any configurations made on the Printing Fields subtab are visible only on the printed form.

Important: If the Advanced Taxes feature is enabled in your account, or if you're using NetSuite OneWorld, which requires Advanced Taxes, you can't directly rename tax fields on a custom transaction form. To change names of tax fields that appear on the custom form, you must rename them in the appropriate languages on the Field Naming subtab of the Set Up Taxes page, at Setup > Accounting > Taxes > Set Up Taxes (Administrator). For more information, see the help topic [Customizing Tax Fields on Transaction Forms](#).

For fields on the **Header** subtab, some fields represent **values** that are inserted and some represent **labels** of field data that's inserted. For the value fields that are values, the defaults from the company setup page are used unless overridden on the printing fields subtab.

The available fields listed by type are as follows:

Values

- Company Name
- Company Phone
- Company URL
- Form Title
- Page Number

Labels

- Business Number
- Acct. No.
- Date
- Doc. No.
- Bill To
- Ship To

After you've configured the printing fields, you should configure sublists. For more information, see [Configuring Sublists](#).

Configuring Sublists

Sublist configuration applies to entry forms only. On the Sublists subtab, you can customize which sublists are available on each subtab of the form.

To configure sublists for each available subtab:

1. In the **Show** column, check the boxes for the sublists you want to display on the form.
2. In the **Never Empty** column, to specify that a sublist entry is required, check the box. If this box is checked, at least one row must be entered for the sublist.

The **Never Empty** box is supported only for sublists that are listed in the SuiteScript Records Browser. The following sublists don't appear on the Sublists subtab because they require at least one row by default.

- Items
- Lines
- Components

3. In the **Label** column, enter headings as needed.
4. Rearrange sublists as needed.
 - Click **Move Elements Between Subtabs**. On the **Lists** subtab, move each sublist to the preferred subtab. For more information, see [Moving Fields and Lists Between Subtabs](#).

- To rearrange the sublists on the **Sublists** subtab, select and drag each line item to the preferred position. Or click **Move to Top** or **Move to Bottom**.

5. Click **Save**.

After you've configured the sublists, you should configure sublist fields. For more information, see [Configuring Sublist Fields](#).

Configuring Sublist Fields

On the **Sublist Fields** subtab, you can change the label of custom sublist fields and rearrange the columns, if required.

You can use the **Item Filter** on this subtab to select the saved search to determine which items are shown in the Items list on the transaction form. For more information, see [Filtering the Items Dropdown List on Transactions](#).

Note: If you use the Item Filter on this page, only saved searches marked as Public appear in the list. For more information about creating a saved search, see the help topic [Defining a Saved Search](#).

To configure sublist fields:

1. In the **Show** column, check the boxes for the sublist fields to display on the form.
2. In the **Label** column, enter labels as needed.


Note: If you change the label of a field on the **Sublist Fields** subtab, the new label is also applied to the field on the **Printing Fields** subtab.

3. Rearrange the fields as needed. To rearrange the fields, select and drag each line item to the preferred position, or click **Move to Top** or **Move to Bottom**.
4. Click **Save**.

Note: You can delete custom fields from sublists only by going to Customization > Lists, Records, & Fields and finding the field under the correct field type or under Custom Record Types. Standard fields can't be deleted, but you can hide them from forms by clearing their Show box. If you can't locate a field, try checking Custom Record Types or confirm whether the displayed label has been customized on the form.

Tip: You may find it easier to identify custom fields using a Custom Field Definition dataset in Analytics. For more information about creating datasets, see the help topic [Defining a Dataset](#).

Here's an example of a Custom Field Definition dataset.

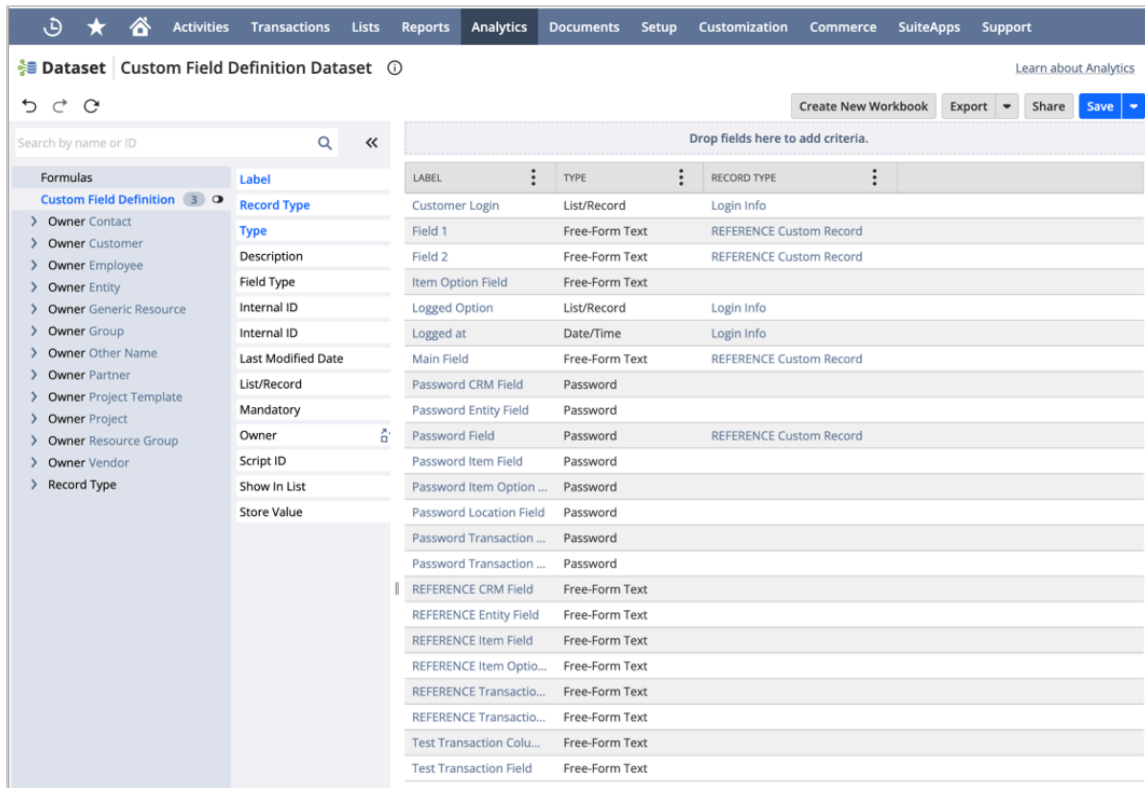


Configuring QuickViews

This topic provides an overview of configuring QuickViews in NetSuite, which enables you to control which key fields appear in QuickView pop-ups across entry and transaction forms. For specific instructions, see:

- [Configuring QuickViews for Upgraded Forms](#)
- [Configuring QuickViews for Custom Records](#)

For both entry and transaction forms you use the QuickViews subtab to customize which fields appear in the QuickView for that transaction or record. The following screenshot shows an example of a QuickView for a phone call record.

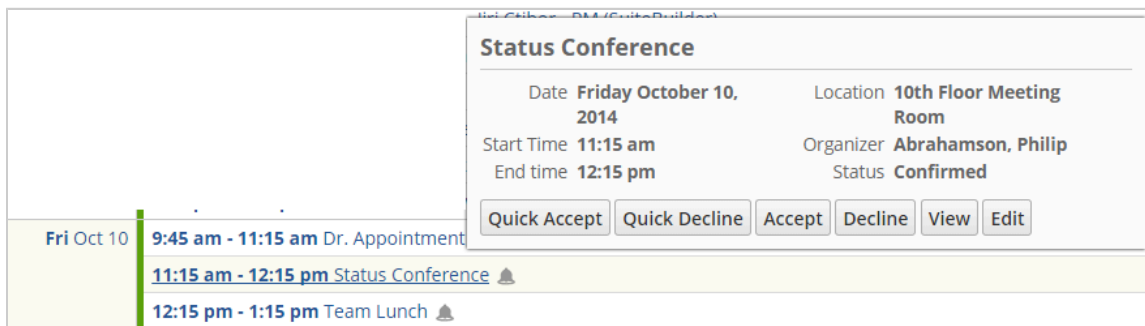

Body fields and custom fields are supported in QuickViews. However, you can't add sublist fields. You can add up to 20 fields to a QuickView.

Note that you can also configure QuickViews on forms associated with custom records. For more information, see [Configuring QuickViews for Custom Records](#).

On the list page for this custom record type, you can hover over a record to see the QuickView.

Configuring QuickViews for Upgraded Forms

This topic describes how to configure QuickViews on upgraded entry and transaction forms. For more information about QuickViews or instructions for custom records, see [Configuring QuickViews](#).

QuickView customization works best if you've upgraded the custom forms in your account to include field groups and all other look-and-feel enhancements introduced in NetSuite in a previous release. After a form has been upgraded, a **QuickView** configuration subtab appears on the form customization page. You use this subtab to add, remove, and rearrange the fields in a QuickView.

To configure QuickViews:

1. Open the Custom Form or Custom Transaction form you want to edit. For more information, see [Creating Custom Entry and Transaction Forms](#).
2. On the Edit Custom Entry [or Transaction] Form page, click the **QuickView** subtab.
If the page doesn't have a **QuickView** subtab, this means that the form hasn't been upgraded/deployed yet. For more information, see the help topic [Deploying Upgraded Forms](#).
3. In the **Field Description** column, add the fields you want to appear in the QuickView for records that use this form. After you select the field, click **Add**. To remove a field, click the X icon on the right side of the field.
4. Click **Save**.

Note these additional guidelines when customizing your QuickViews:

- If you customize a form's QuickView and select **Store Form with Record**, these customizations supersede any customization made to a form set to **Form is Preferred**.
- During form customization, if you make field updates on the **Fields** subtab, you must save the form customization page before those updates appear on the **QuickView** subtab.
- On the **Fields** subtab, if a field isn't set to **Show**, the field doesn't appear in the QuickView, even if you add the field on the **QuickView** subtab.
- The fields that appear on the QuickView subtab match the fields listed in the **Description** column on the **Fields** subtab. However, on the QuickView subtab the custom label for the field displays.
- The list of fields available on the **QuickView** subtab includes all of the fields that are on a record. The list includes fields that appear on a record when it's in View mode and Edit mode. Fields that appear on a record **only** when the record is in Edit mode don't appear in QuickViews. If you add a field to a QuickView, yet the field does not appear when the QuickView displays, you may have added a field that's visible only when the record is in Edit mode.

See also: [Configuring QuickViews for Nonupgraded Forms](#).

Configuring QuickViews for Custom Records

This topic explains how to configure QuickViews for custom records. Unlike standard records, custom records don't have default QuickView fields because each custom record type is unique. Therefore, you must manually define which fields appear in QuickView for each custom record type. For general background on QuickViews, see [Configuring QuickViews](#).

To configure QuickViews:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. Select the custom record type you want to display QuickViews.
3. On the Edit Custom Record Type page, click the **Forms** subtab.
4. Click **Customize** next to the standard version of the custom record form. Or, if you already have an existing custom form, click **Edit** next to this form.
5. On the page that appears, click the **QuickView** subtab.
6. In the **Field Description** column, add the fields you want to appear in the QuickView for this custom record type. After adding each new field, click **Add**. To remove a field, click the X icon that appears to the right of the field.
7. Click **Save**.

On the list page for this custom record type, you can hover over a record to see the QuickView.

Configuring QuickViews for Nonupgraded Forms

This topic explains the limitations of customizing QuickViews on nonupgraded forms and shows how you can indirectly control QuickView fields by configuring and deploying an upgraded form. For information about checking the upgrade status of your forms, see [How to Tell if the Custom Forms in Your Account are Upgraded](#).

If you haven't upgraded the custom forms in your account to include the look-and-feel changes introduced in a previous version, you can't directly edit or customize the default QuickView fields assigned by NetSuite. Nonupgraded forms don't include the QuickViews configuration subtab on entry and transaction form customization pages.

You can, however, indirectly affect which fields appear in a QuickView by creating an equivalent upgraded form. You can then use the QuickViews subtab on the newly upgraded form to make QuickView customizations. Then you must set this form to Form is Preferred. By doing so, even the records in your account that use the nonupgraded version of the form show the QuickView customizations of the upgraded form.

Also note the following when attempting to customize QuickViews for nonupgraded forms:

- A nonupgraded stored form shows the customizations of an upgraded preferred form or standard form if there's no preferred form.
- Even if you click Store Form with Record on a nonupgraded form, the QuickViews that appear for records using this form show the QuickView customizations (if any) on the upgraded form.
- If a standard form is marked as preferred, then all QuickViews for both nonupgraded and upgraded forms show the NetSuite default QuickView fields for that record type.

See also: [Configuring QuickViews for Upgraded Forms](#)

How to Tell if the Custom Forms in Your Account are Upgraded

This topic describes how to determine whether your entry or transaction forms have been upgraded in NetSuite. Knowing the upgrade status is important if you want to use advanced customization features such as QuickViews. For information about QuickView behavior and options for nonupgraded forms, see [Configuring QuickViews](#) and [Configuring QuickViews for Nonupgraded Forms](#).

Records that use upgraded forms have all fields organized into field groups. For an example of what a field group looks like, see [Configuring Field Groups](#).

If you've noticed any records in your account with a field group layout, then at least the form associated with that record type has been upgraded.

If you're still unsure if any of the forms in your account have been upgraded, go to Customization > Forms > Entry Forms (Administrator) [or Transaction Forms]. Click **Upgrade Checklist** in the far-right corner. The page shows specifically which forms have been upgraded and that their upgrades have been **Deployed** into NetSuite. Forms that haven't been upgraded or deployed have **Skip Upgrade | Deploy Form** links.

If forms in your account have been upgraded and you want to see specifically which forms, click **Return to Upgrade Checklist**.

The page shows specifically which forms have been upgraded and that their upgrades have been Deployed into NetSuite. Forms that haven't been upgraded/deployed have **Skip Upgrade | Deploy Form** links.

To customize a QuickView for any form, the form must be **Deployed**.

Associating Custom Code (Client SuiteScript) Files With Custom Forms

If the Client SuiteScript feature is enabled, the Custom Code subtab is available on custom entry and transaction forms. On this subtab, you can define existing client SuiteScript files to be used with the form. When the script's executing function is called, the actions defined within the script (and any built-in NetSuite actions for that form type) are performed.

You can also add a custom button to the form to call the client script. For more information, see [Working with Custom Buttons](#).

To associate client SuiteScript files with a form, click the plus sign to the right of the Script File field, and add a new script file.

Permission for Attaching Scripts to Custom Entry and Transaction Forms

Users who have the Custom Entry Forms or Custom Transaction Forms permission, but who don't have the SuiteScript permission, can't access the Custom Code subtab of custom forms.

Users must have at least the Edit level of the SuiteScript permission to attach a script to a custom form on the Custom Code subtab. For users with the Edit or Full level of the SuiteScript permission, the Custom Code subtab is displayed and is fully editable. Users with the View or Create level of the SuiteScript permission can see the Custom Code subtab but can't edit it. Users who don't have SuiteScript permission can't view the Custom Code subtab.

To associate client SuiteScript files with a form:

1. Go to the Custom Code subtab of the form record.
2. In the **Script File** field, select the client SuiteScript file that contains the scripts you want to add to this form. To add a new script file, click the New icon on the right side of the **Script File** field.
Note: Client scripts or scripts needed on the client side, such as library files, can't have the **Hide in SuiteBundle** preference enabled.
3. In one or more of the client event type fields, enter the names of the functions you want to perform. When entering function names, don't include parentheses or arguments. For example, type **sampleFunction** for a function that appears as `sampleFunction(param1, param2)` in your SuiteScript file.
 - **Page Init Function** — Executing function to be called when this form is first loaded.
 - **Save Record Function** — Executing function to be called when this record is saved.

- **Validate Field Function** — Executing function to be called when a field on this entry form is changed.
 - **Field Changed Function** — Executing function to be called when a change made to a field is accepted.
 - **Post Sourcing Function** — Function that runs on Post Sourcing events. These events occur following a field change after all the field's child field values are sourced from the server. This enables fieldChange style functionality to occur after all dependent field values have been set.
 - **Line Init Function** — Function that runs on Line Init events. These events occur when an existing line is selected.
 - **Validate Line Function** — Function that runs on Validate Line events. These events occurs prior to a line being added to a sublist (inlineeditor or editor sublists only). It can be thought of as the saveRecord equivalent for sublist line items.
 - **Validate Insert Function** — Function that runs on Validate Insert events. These events occur when you insert a line into an edit sublist. The UI equivalent of this event is when a user selects an existing line in a sublist and then clicks the Insert button. Note that returning false on a validateInsert blocks the insert.
 - **Validate Delete Function** — Function that runs on Validate Delete events. These events occur when you try to remove an existing line from an edit sublist. Returning false blocks the removal.
 - **Recalc Function** — Script name to be called from the attached script file. This script is called when a line item is added. For example, after entering the information you add an item to a transaction.
4. If your client SuiteScript file references any functions in a library file, add the library files in the **Library Script File** list.
 5. Click **Save**.

Defining Preferred Forms

Setting preferred forms for your employees lets you control the entry and transaction forms employees use to enter data. This helps maintain consistency in your company and lets you to capture important business information.

In NetSuite, you can define form preferences in three places.

- **On the Form:** When you create or edit a custom form, you can check the Form is Preferred box to set the current form as the default form for all users whose role form preferences **aren't** defined. On the Roles subtab, you can also define the form as preferred for specific roles.
- **On the Custom Forms list page:** On the custom forms list page at Customization > Forms > [Entry Forms or Transaction Forms], you can check the Preferred box for any form you want to set as the default form for all users whose role form preferences **aren't** defined.
- **On the Manage Roles page:** Define form preferences for specific roles at Setup > Users/Roles > Manage Roles > Edit [Role]. In addition to setting preferred forms for a role, you can also restrict access to the preferred form.

For custom records, you can select a preferred form on the Forms subtab or set preferred forms for specific roles on the Permissions subtab. The preferred form you set on the Permissions subtab takes precedence over the preferred form set on the Forms subtab.

For example, you set **Custom Form A** as the preferred form on the Forms subtab. On the Permissions subtab, you set the default form for the Sales Rep role to **Custom Form B**. When a sales rep creates a new record, **Custom Form B** is selected by default.

Note: In some cases with transactions, the form you choose is selected automatically the next time you create a transaction of that type during your current NetSuite session. For example, if you go to the Invoice Customers page, you'll see the Form list set to the form you used the last time you invoiced customers. When you begin a NetSuite session, the preferred form is selected by default on the transaction.

To set the preferred form for a specific role:

1. Go to Setup > Users/Roles > Manage Roles.
2. Click **Edit** next to the role for which you want to set form preferences.



Important: You **can't** edit standard roles. To define new settings for one of these roles, click **Customize** next to the role, and enter a name for your custom role. Then set the needed custom settings and assign this custom role to the appropriate users.

3. Click the **Forms** subtab.
4. Click the subtab for the section you want to set preferences for.
 - **Transaction** — Set defaults for cash refund, cash sale, credit memo, invoice, estimate, opportunity, purchase order, return authorization and sales order transaction forms.
 - **Entity** — Set defaults for contact, customer, lead, prospect, employee, project, partner and vendor entry forms. When you define preferences for entities, you can set a preferred form for each Customer subtype in the corresponding fields at the top of the Entity subtab — Preferred Lead Form, Preferred Prospect Form and Preferred Subcustomer Form.
 - **CRM** — Set defaults for phone call, campaign, case, event, solution and task entry forms.
 - **Item** — Set defaults for inventory part, noninventory part, service, other charge, description, subtotal, discount, markup, group, kit, assembly and payment item entry forms.
5. Set the form defaults. Note that for some roles, you **can't** modify all of these settings.
 - In the **Enabled** column, for any forms you **don't** want this role to have access to, clear the boxes. This option isn't available for Customer Center roles.
 - In the **Preferred** column, for any form you want to be set as the preferred form for this role, check the box.
 - If you want this form to be the only form available to this role, check the box in the **Restricted** column. This option isn't available for Customer Center roles.

The preferred form settings here override any settings on the Custom Forms page.

Note the following about marking a transaction or CRM form **Preferred** for the Customer Center role:

- External forms, meaning forms with names appended with (External), can be marked preferred for the Customer Center roles, but not for other roles.
- Non-external forms can't be marked as preferred for Customer Center roles, so they aren't listed on the Forms subtab of Customer Center role records.



Warning: If you set preferred forms **without** restrictions, your employees can still change the form they use when entering transactions or records.

6. Click **Save**.

You can specify the entry or transaction form to use as the preferred form for a role. For more information, see [Defining Preferred Entry and Transaction Forms for Roles](#)

Defining Preferred Entry and Transaction Forms for Roles

To specify which roles should have this form set as preferred, on the Roles subtab for the form, check the Preferred box for roles that should have this form set as preferred. Preferred forms are selected by default in the Custom Form field when a transaction or record is created.

Note the following about marking an entry or transaction form Preferred for the Customer Center role:

- External forms, meaning forms with names appended with (External), can be marked Preferred for Customer Center roles, but not for other roles. The Customer Center role is available on the Roles subtab only for external forms.
- Non-external forms can't be marked Preferred for Customer Center roles.
- When a nononline order form is marked Preferred for Customer Center, it's saved as the form for the order. However, an online form isn't saved as the form for an order, even if it's preferred. The preferred nononline order form is used instead.



Note: You can also define preferred forms from the Manage Roles page. **Restrictions** to a form must be defined from the Manage Roles page. For more information, see the help topic [Setting Default Forms for Roles](#).

Adding Disclaimers to Transaction Form Footers

You can add a footer to the bottom of your standard transaction forms. Footers can be used to add text and space for a variety of reasons such as:

- Adding a salutation or company slogan
- Familiarizing customers with disclaimers, company policies, or procedures
- Providing space for an approval signature

To add a disclaimer to standard transaction forms:

1. Go to Setup > Company > Preferences > Printing & Fax.
2. Click the **Printing** subtab.
3. Enter a disclaimer or other message in one or more of the disclaimer fields. Disclaimers can have up to 4000 characters and appear at the bottom of the form indicated.
 - **Sales Form Disclaimer** – Standard sales forms.
 - **Purchase Form Disclaimer** – Standard purchase forms.
 - **Statement Disclaimer** – Standard statements.
 - **Payment Receipt Disclaimer** – Standard payment receipts.
 - **Packing Slip Message** – Standard packing slips.
 - **Return Policy** – Return forms.
 - **Remittance Slip Message** – Remittance slips.
4. When you've finished, click **Save**.

For the disclaimers to appear, you must print your forms using HTML. To set this preference, go to Home > Set Preferences. On the Transactions subtab, check the **Print Using HTML** box and click **Save**.

Disclaimers defined aren't used in printed forms based on advanced PDF/HTML templates. To include disclaimers on this kind of printed form, you can add disclaimer text to the template on which the printed form is based.

You can also add disclaimers to specific forms using transaction form customization. For more information about customizing transaction forms, see [Custom Forms](#).

Specifying Check Layout by Subsidiary

If your organization uses basic printing, you can configure varying check templates for each subsidiary.

To specify check layout by subsidiary in basic printing:

1. Go to Setup > Company > Classifications > Subsidiaries.
2. Click **Edit** beside the subsidiary you want to edit.
3. Click the **Preferences** subtab.
4. In the **Default Check Type** field, to use the standard check type, select **Standard**. To use the voucher type, select **Voucher**. For more information, see the help topic [Setting Check Printing Preferences](#).
5. In the **Check Default Chart Type** field, select the template to use when printing checks from this subsidiary.
6. Click **Save**.

Customizing Multiple Page Transaction Forms

You can create a custom layout to customize how your multiple-page transaction forms look.

You can add page numbers and header information to subsequent pages of your PDF transaction forms.

Adding Page Numbers to your PDF Transaction Forms

You can add page numbers to pages of your PDF transaction forms.

To customize your multiple page transaction forms to have page numbers:

1. Go to Customization > Forms > Transaction Forms.
2. Click **Customize** next to the kind of form you want to change.
3. Click the **Printing Fields** subtab.
4. Click the **Header** subtab.
5. Check the box in the **Print/Email** column next to **Page Number**.
Page number appear beginning on the second page of your transaction.
6. In the **Label** column you can change the way the numbers appear on your transactions.
For example, if you wanted the numbers to appear 2/3, you'd replace Page {1} of {2} in the label field with {1}/{2}. The entries {1} and {2} act as placeholders for your page number formatting.
7. Click **Save**.

Your printed PDF transaction forms now include page numbers for multiple pages.

Adding More Header Information to Multiple Page Transaction Forms

You can add more header information to multiple page transaction forms.

To customize your multiple page transaction forms to have more header information:

1. Go to Customization > Forms > Transaction Form PDF Layouts (or Transaction Form HTML Layouts).
2. Click **Customize** next to the kind of layout you want to change.
3. On the **Border & Placement** subtab, check the boxes in the **Show on Addl. Pages** column for each field you want to appear on subsequent transaction pages.
4. Click **Save**.

Your printed PDF transaction forms now include additional header information for multiple pages.

Linking Transaction Forms

On the Linked Forms subtab, you can specify which transaction form is used when you transform one transaction into another. You can create a chain of transaction forms that mirror your business workflow.

For example, a company has three custom sales order forms that are each used for a certain set of items they sell. When one of these sales orders is used to create a picking ticket, the specific picking ticket form created for each type of sales order is used. The employee creating the picking ticket does not have to search the custom form list to find the proper picking ticket form.

To set up this form workflow, the company administrator edits the custom sales order form, and selects the picking ticket form on the Linked Forms subtab.

When you transform a transaction you created with a custom transaction form, the custom form set on the Linked Forms subtab is selected by default. In the preceding example, when one of the sales orders is used to print a picking ticket, the custom picking ticket form selected on the sales order form is used by default.

To set up linked forms:

1. Open the custom entry form or custom transaction form you want to create the linkage from. For more information, see [Creating Custom Entry and Transaction Forms](#).
2. Click the **Linked Forms** subtab.
A list of the transactions that you can transform to from the type of transaction form you're customizing is shown. For example, if you're customizing an estimate form, you can link forms for cash sales, invoices, and sales orders.
3. In the **Custom Form** column, select the standard or custom form for each transaction.
If you want to use the preferred form for the transaction type, don't specify a linked form for that transaction type.
4. Click **Save**.

When the transaction is transformed, the correct transaction form is used automatically.

Note: If the person is assigned a role that's restricted to use only specific transaction forms, the forms set for that role override the forms you've set on the **Linked Forms** subtab.

Transaction Form Printing Preferences

NetSuite provides a variety of options for customizing how transaction forms are printed. Preferences can be set at the company and user level, and there are separate settings for browser and layout behavior. For detailed information about each area, see the following topics:

- [Transaction Forms and Company Printing Preferences](#)
- [Setting Transaction Forms to Print in Landscape](#)
- [Transaction Forms and User Printing Preferences](#)
- [Browser Print Settings for Transaction Forms](#)

Transaction Forms and Company Printing Preferences

Company printing preferences are defined at Setup > Company > Printing & Fax. The company preferences that affect printed transactions are on the Printing subtab of this page, in the following sections:

- Transactions – includes some specialized printing preferences for specific transaction types, as well as general printing preferences for all transaction types.
 - For more information about the general printing preference Print Transactions Form Landscape, see [Setting Transaction Forms to Print in Landscape](#).
 - For information about which of these preferences are supported for transactions associated with custom forms that use advanced templates, see the help topic [Advanced Templates Support for Company Printing Preferences](#).
- Advanced PDF/HTML Printing – includes preferences that can be enabled to use advanced templates to format printed Item Detail Statements, Item Labels, and Mailing Labels.
- Check Printing – includes preferences for printed checks using basic layouts.
- PDFs – includes general preferences that apply to all printed records that use basic layouts except reports.

For more details about the preferences available in these sections, see the help topic [Setting Printing and Fax Preferences](#).

Setting Transaction Forms to Print in Landscape

You can set your transaction forms to print in landscape format on the Printing and Fax Preferences page. When you print in landscape format, the long edge of the page is on top and the short edge is on the side.

By printing in landscape format, you can have wider columns on your transaction forms to include more detailed information for your customers.

To set transaction forms to print in landscape format:

1. Go to Setup > Company > Preferences > Printing & Fax.
2. On the Printing subtab, check the **Print Transaction Forms Landscape** box.
3. Click **Save**.



Note: To use this preference, you must use a standard transaction PDF layout. Use either a standard transaction form with a standard transaction PDF layout or use a custom transaction form associated with a standard PDF layout.

To print transaction forms, go to Transactions > Other > Print Checks and Forms. Alternatively, click **Print** on any transaction page as you save the transaction.

If you print using HTML, you can override the landscape format by changing your printer settings when you print the form.

Transaction Forms and User Printing Preferences

You can set a variety of preferences at Home > Set Preferences to apply to your own instance of NetSuite only. The user preferences that affect printed transactions are on the Transactions subtab of this page.

- **Print Using HTML** – If you prefer to print transaction forms in HTML rather than the default of PDF, check this box.
- **Transaction Email Attachment Form** – If you prefer to send email attachments of transactions in PDF rather than HTML, select **PDF**.
- **Horizontal Print Offset** – To move text in the printed transaction form to the right, enter a positive number in inches. To move text to the left, enter a negative number. This setting applies only to basic layouts.
- **Vertical Print Offset** – To move text in the printed transaction form lower, enter a positive number in inches. To move text higher, enter a negative number. This setting applies only to basic layouts.

The PDF preferences on the SuiteAnalytics subtab apply only to printed reports and searches.

Browser Print Settings for Transaction Forms

When you print a form, a preview page shows you what the printed transaction will look like. When you click Print on the preview page, the browser opens a print options page. The print preview looks different in each browser, which isn't related to NetSuite. You may need to change the browser print settings or the printer settings so that the printout looks the same as it did in the NetSuite preview.

Creating Custom Subtabs

Custom subtabs are used to organize custom fields on your transaction, entity, CRM, and item records. You should first create custom subtabs and then assign any custom fields to the custom subtabs. For each custom subtab, you can define an existing subtab as the parent subtab. This parent-child definition enables you to include an additional layer of information for your subtab categories.

 **Important:** For custom subtabs to appear on a record, you must assign a field to the subtab.

To create a custom subtab:

1. Go to Customization > Forms > Subtabs > New.
2. In the **Script ID** field, enter a unique alphanumeric ID for the custom subtab. For more information about best practices and naming conventions, see [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see [Changing the ID of a Custom Object](#).
3. From the **Type** list, select the type of record for which you want to create the subtab.
4. If applicable, from the **Parent** list, select the parent subtab.
5. In the **Title** field, enter a name for the subtab.
6. Click **Save**.

Now, when you create a custom field, you can select your new subtab in the **Subtab** field. After you assign the custom field to the subtab, the subtab then displays on the record.

You can also create a new subtab by clicking **New** on the Custom Subtabs list page, or you can create new subtabs from the Custom Subtabs page. For more information, see [Creating a Subtab from the Custom Subtabs Page](#).

Creating a Subtab from the Custom Subtabs Page

You can add new subtabs directly from the Custom Subtabs page, as well as provide translation details for the subtab. This method of creating custom subtabs lets you to quickly create multiple subtabs for a specific record type. You can't, however, specify your own script ID from this location. NetSuite generates the ID automatically. You can later edit this system-generated ID using the **Change ID** button available on the Custom Subtab page for the subtab. For more information, see [Changing the ID of a Custom Object](#).

To create a custom subtab from the Custom Subtabs page:

1. Go to Customization > Forms > Subtabs.
2. Click the subtab for the type of record for which you want to create a new subtab.
The following options are available:
 - **Transaction** — subtabs for cash refund, cash sale, credit memo, estimate, invoice, opportunity, purchase order, return authorization, sales order, and other transaction records.
 - **Entity** — subtabs for customer, project, vendor, employee, other name, contact, partner, and group records.
 - **Item** — subtabs for inventory, noninventory, group, other charge, assembly/bill of materials, kit/package, service item and other item records.
 - **CRM** — subtabs for task, phone call, event, case, campaign, solution, and other CRM records.
3. In the **Title** field, enter a name for the sublist.
4. If required, in the **Translation** field, enter translations for this subtab.
 - Before you can add translations, you need to select translation languages at Setup > Company > General Preferences, on the Languages subtab. This subtab lists both system-supported languages that can be used for the NetSuite user interface (and are available at Home > Set Preferences), and additional languages that can be used for website translations only (and aren't available at Home > Set Preferences). You should enter translations only for system-supported languages, because these are the only languages that can be displayed in the user interface. For details, see the help topic [Configuring Multiple Languages](#).
 - The maximum length for a custom subtab's translation is 50 characters.
5. If required, make the subtab a child of an existing parent subtab. From the **Parent** list, select a parent subtab.
 - The parent list includes any standard subtabs associated to the selected record type as well as any custom subtabs that you've defined for that record type.
 - After you've defined a child subtab, you can't select it as a parent for another custom subtab. In other words, you **can't** create a child-grandchild relationship.
6. Click **Add**.
7. If necessary, rearrange your custom subtabs by using the **Move Up**, **Move Down**, **Move to Top**, and **Move to Bottom** buttons. Insert new subtabs using the **Insert** button.
8. Click **Save**.

Now, when you create a custom field, you can select your new subtab in the **Subtab** field. After assigning the custom field to the subtab, the subtab then displays on the record.

After creating a custom subtab, you may need to manage it over time, such as moving fields, renaming the subtab, or using advanced tools like SuiteCloud Development Framework. For more information about these management tasks, see [Managing Custom Subtabs](#)

Managing Custom Subtabs

You can move an existing field or list from one subtab to another. You can also move a field from a subtab to the main section of a form. For more information, see [Moving Fields and Lists Between Subtabs](#) and [Configuring Fields or Screens](#).

You can rename a custom subtab at any time in one of the following ways:

- From the Custom Subtab list, click **Edit** beside the applicable subtab. In the **Title** field, enter the new subtab name, and click **Save**.
- On the Custom Subtabs page, click the appropriate subtab (Transaction, Entity, Item, CRM). Select the applicable subtab and in the **Title** field, enter the new subtab name. Then click **Save**.

You can rename a custom subtab at any time by going to the appropriate subtab on the Custom Subtabs page (Transaction, Entity, Item, CRM), selecting the subtab name and editing it, clicking **Done**, and saving the Custom Subtabs page.

You can use SuiteCloud Development Framework (SDF) to manage custom subtabs as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom subtab to another of your accounts. Each custom subtab page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Creating Custom Note Forms

The note form displays as a popup window when a user adds a note to a record. You can vary note form fields by hiding standard fields, adding custom fields, and changing field order. You can configure note form actions by setting actions to display as buttons or menus, changing labels, hiding standard actions, and adding custom actions. You also can attach a form-level script to custom note forms.

For more information, see the following topics:

- [Creating a Custom Note Form](#)
- [Creating a Custom Field for use in Custom Note Forms](#)
- [Using Custom Note Forms](#)

 **Note:** The Note form includes a **Type** field for selecting the type of note (for example, email, phone call, meeting, and so on). To add a new note type, you must create it in CRM Lists. For more information, see the help topic [CRM Lists](#).

Creating a Custom Note Form

You can create a custom note form that can be used to add notes to a record.

To add a custom note form:

1. Go to Customization > Forms > Entry Forms.
2. Click **Customize** beside the Standard Note Form.
3. On the Custom Entry Form edit page, make changes as needed. For more information, see [Creating Custom Entry and Transaction Forms](#).

4. Click **Save**.

Creating a Custom Field for use in Custom Note Forms

You can create a custom field that can be displayed on custom note forms. The note record has a type of Other Record, so its custom fields must be of the type Other Custom Field.

To create a custom field that can be displayed on custom note forms:

1. Go to Customization > Lists, Records, & Fields > Other Custom Fields > New.
2. In the **Record Type** field, select **Note**.
3. Complete the remaining fields, as needed. For more information, see [Creating Other Record Fields](#).
4. Click **Save**.

After you save this type of custom field, the field is displayed by default on all custom note forms. You can hide the field on specific custom note forms by clearing the Show box.

Using Custom Note Forms

The standard note form is used by default for all note popup windows. If at least one custom note form has been created in an account, this standard note form includes a Custom Form list where the user can choose to use a custom form for a note popup window. You can't remove this list from the standard note form if any custom note form exists.

You can set a custom note form to be used by default for the note popup window. You can either check the Preferred box for the custom note form in the Entry Forms list or edit the custom note form and check the Form is Preferred box. If you want to permit users to choose among the standard note form and custom note forms each time they enter a note, you should leave the Custom Form field displayed on custom note forms. To ensure users don't change the note form to anything other than the preferred custom form, on that form you can clear the Show box for the Custom Form field.

Customizing Address Forms

You can tailor address entry and display for various business needs and countries by using custom address forms. For information about creating custom address forms or for details about script permissions, see the following topics:

- [Creating a Custom Address Form](#)
- [Change to Required Permission for Attaching Scripts to Custom Address Forms](#)

Custom address forms can be used to support address format localization for international customers, and unique business requirements for all customers. A standard address form is provided for all accounts and assigned by default to all countries. Account administrators and other users with the Custom Address Form permission can create as many customized versions of the address form as needed, and assign each custom address form to one or more countries.

When users view or edit addresses on entity, transaction, subsidiary, company information, location, and workplace records, the custom address form assigned to the selected country is the one that displays in the popup address window. Custom address forms inherit the permissions set on the parent record.

Custom address forms support the following capabilities:

- Multiple custom address forms supported per account
- Assignment of custom address forms to countries
- Addition of custom fields to custom address forms (For details, see [Creating Custom Address Fields](#).)
- Rearrangement of standard and custom address fields on forms
- Hiding nonrequired address fields
- Setting address fields to be required
- Setting address fields display type to be normal, inline text, or disabled
- Customized labels for address fields
- Customized formatting for addresses displayed in UI and printed on shipping labels
- Form-level client scripting

Creating a Custom Address Form

Custom address forms let you control how address information is entered, displayed, and printed across NetSuite records. You can create customized versions of the address form for different countries or unique business requirements.

To create a custom address form:

1. Go to Customization > Forms > Address Forms, and click **Customize** for the standard address form.
2. In the body area of a custom address form record, you can define a name for the form, and modify the template representing how addresses are rendered in the user interface and on printed shipping labels.

In the **Address Template** field, address fields are represented by the template field IDs listed on the **Fields** subtab.

3. On the **Fields** subtab, you can:
 - Rearrange fields on the form, using the **Move to Top** and **Move to Bottom** buttons, and the **Column Break**, **Space Before**, and **Same Row as Previous** fields.
 - Hide fields by clearing the **Show** box.
The **Show** box can't be cleared for required fields.
 - Make fields required by checking the **Mandatory** box.



Warning: The **Country** field is always required, because the value for this field determines the address form to be displayed.

- Set fields' display type to inline text or disabled.
- Modify field labels.
- Click the **New Field** button to add a custom field to the address form. For details, see [Creating Custom Address Fields](#).
- 4. On the **Custom Code** subtab, you can attach a script file containing functions for any of the supported SuiteScript client events.
For information about creating scripts to be attached to custom forms, see the help topic [SuiteScript 2.x Client Script Type](#).
- 5. On the **Country** subtab, you can assign the custom address form to one or more countries.
A multi-select list of countries is available when you click the icon to the right of the **Country** field on this subtab. For more information, see the help topic [Country-Specific Address Forms](#).
- 6. Click **Save**.

Change to Required Permission for Attaching Scripts to Custom Address Forms

Users who have the Custom Address Form permission, but who don't have the SuiteScript permission, can no longer access the Custom Code subtab of custom forms. Previously, these users could edit the Custom Code subtab of an address form record to attach a script to the form.

Now users must have at least the Edit level of the SuiteScript permission to attach a script to a custom form by editing the Custom Code subtab of the form record. For users with the Edit or Full level of the SuiteScript permission, the Custom Code subtab is displayed and is fully editable. Users with the View or Create level of the SuiteScript permission can see but not edit the Custom Code subtab. For users who don't have SuiteScript permission, the Custom Code subtab isn't visible.

Creating Custom Address Fields

If you're an account administrator or have another role with the Custom Fields permission, you can create a custom field to include in custom address forms.

To create a custom address field:

1. Click the **New Field** button on the **Fields** subtab of a custom address form record, or go to Customization > Lists, Records, & Fields > Other Custom Fields > New.
2. In the **Record Type** field, select **Address**.
3. Enter a label for the field and complete other body fields as needed.
4. On the **Applies To** subtab, choose whether to apply the address field to all custom address forms or to selected custom address forms.
 - By default, the field is applied to all custom address forms.
 - If you choose the **Apply to Selected Custom Address Forms** option, select a custom form in the **Address Form** list. To select multiple forms, click **Add**.
5. Complete fields on other subtabs as needed. For details, see the following:
 - [Setting Display Options for Custom Fields](#)

- [Setting Validation and Defaulting Properties](#)
- [Setting Sourcing Criteria](#)
- [Setting Filtering Criteria](#)
- [Restricting Access to Custom Fields](#)

6. Click **Save**.

Country-Specific Address Forms

This topic has been moved under [Region-Specific SuiteApps](#). For more information, see the help topic [Country-Specific Address Forms](#).

Custom Sublists

You can add a custom sublist to any transaction or entry form, including forms for custom record types. Custom sublists use results from a selected saved search of the form record type or a related record type. The custom sublists use the saved search results to provide information related to the record you're viewing. For example:

- You could attach a customers sublist on customer records listing other customers with the same sales representative. The sublist is based on a customers search with a filter of Sales Rep.
- You could attach an employees sublist on employee records listing other employees with the same supervisor. The sublist is based on an employees search with a filter of Supervisor.
- You could attach a transactions sublist on customer records listing transactions for that customer, based on a transactions search with a filter of customer name.

The creation of custom sublists is controlled by the Custom Sublists permission. You can assign this permission to a custom role on the Setup subtab of the role record.

Custom Sublists are supported in SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SDF SuiteApps, or to customize NetSuite accounts, using an integrated development environment (IDE) on your local computer. SuiteCloud projects are file-based and use XML definitions of custom NetSuite objects. For more information, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

You can use the Copy to Account feature to copy an individual custom sublist to another of your accounts. Each custom sublist page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

For details about creating saved searches to be used as custom sublists and applying custom sublists to records, see:

- [Saved Searches for Custom Sublists](#)
- [Applying Custom Sublists to Standard Records](#)
- [Applying Custom Sublists in SDF-Enabled Accounts](#)
- [Applying Custom Sublists to Custom Record Types](#)
- [Custom Child Record Sublist Creation with SuiteScript](#)

Saved Searches for Custom Sublists

To be used for a custom sublist, a saved search must have at least one list/record type field defined as an available filter. Custom sublist results are joined to the form record based on this field's values. That

is, the first item listed on the Available Filters subtab of the saved search must be a list/record type. The custom sublist results that are displayed on each form have the same value for the available filter field as the record currently displayed on the form.

For example, in a saved search for a transactions sublist on a customer record, you could set an available filter of Name (the customer name) so that all transactions for the customer show in the sublist.

For details about available filters, see the help topic [Selecting Available Filters for Saved Searches](#).

Be aware of the following when you choose a field to be the available filter for a custom sublist search:

- If the saved search has more than one available filter, only the first one listed on the Available Filters subtab is used to filter the custom sublist.
- The available filter field must be of the List/Record type, meaning it's displayed in the user interface as a list. Constant value fields and numeric fields don't work as available filters.

Note that the searches you can select for custom sublists don't include searches where the type of the first available filter is check box or date, because these types of fields don't work.

- If the sublist represents a different record than the form record, the available filter field should be a logical choice to produce joins with the form record. Many fields that are listed on a search's Available Filters subtab aren't logical choices for this type of join.

For example, in a saved search for a transactions sublist on customer record, it would not work to set an available filter of Type. This choice would most likely result in no joins with the customer record, and a blank sublist would display.

To be a good choice as an available filter, a field should identify a record type.

- The filter field can be the same as the form record. For example, use the Name field for a transactions sublist on a customer record that displays all of that customer's transactions.
- Or, the filter field can be a field on the form record that's a list of records. For example, use the Location field for a transactions sublist on a customer record that displays the customer's transactions for a particular location only.

For information about creating a saved search, see [Creating a Saved Search for a Custom Sublist](#).

Creating a Saved Search for a Custom Sublist

This topic describes how to create a saved search for a custom sublist. For general information about saved searches for custom sublists, see [Saved Searches for Custom Sublists](#)

To create a saved search:

1. Go to Reports > Saved Searches > New Saved Search. Click the record type you want to display in the custom sublist.
The results of this search should include the information you want to show on your sublist.
For information about creating saved searches, see the help topic [Defining a Saved Search](#).
2. Enter a name for the search.
3. Set criteria for the search.
4. On the **Available Filters** subtab, add at least one available filter to the search, and ensure that the first filter listed is a List/Record type. Otherwise, the saved search can't be used as a sublist.

You can attach a saved search as a sublist only if the search has at least one available filter. The sublist shown is filtered by the first filter listed on the saved search. Ensure the search and filter both apply to the record you're attaching the sublist to.

For information about setting available filters, see the help topic [Selecting Available Filters for Saved Searches](#).

5. Click **Save**.

Applying Custom Sublists to Standard Records

You can add a custom sublist to any standard entity or transaction record, including custom transaction and entry forms.

For example, you may want to show a list of customers on the sales order form that are assigned to the sales representative on the order.



Note: If SDF is enabled in your account, you use a different page for adding custom sublists. For more information, see [Applying Custom Sublists in SDF-Enabled Accounts](#).

To add a custom sublist to a standard record:

1. First, create a saved search for the information you want to show. The results of this search should include the information you want to show on your sublist. See [Saved Searches for Custom Sublists](#).
2. Go to Customization > Forms > Sublists.
3. Click the subtab that corresponds with the kind of record to which you want to add the sublist.
4. In the **Search** column, select the saved search that returns the results you want to appear on the record.

If the saved search does not appear in the list, check the saved search settings. The first item listed on the Available Filters subtab must be a List/Record type, otherwise the saved search isn't available to assign as a sublist.

5. Enter a label for this sublist.
6. In the **Tab** column, select the subtab where you want the sublist to appear.
7. Check the box for each record where you want this sublist to appear.
This sublist shows on the standard and custom forms of the types you select.
8. In the **Field** column, select the field to use for filtering the sublist.
9. Click **Add**.
10. Click **Save**.

Now, these search results show on the records you selected. For an example of applying custom sublists to standard records, see [Example of Adding Custom Sublist to Standard Record](#).

When a transaction is created by transformation from another record type, custom child record sublists are available for editing on the new transaction. Sublists are also available when users select the Make Copy action on an original transaction. The sublists are empty to prevent problems when copying child records, so the user should enter new sublist values.

Example of Adding Custom Sublist to Standard Record

You want to add a custom sublist to the employee record to display customers who haven't had any activity in the last month.

First, create a saved search that shows the information that you want to include in the sublist. On the Criteria > Summary subtab, enter the following:

- Summary Type — Maximum
- Field — Activity : Date

- Description — is not after 1 month ago

On the Results subtab, set the summary type for Name to Group, and set Activity : Date to Maximum.

Criteria **Results** Highlighting Available Filters Audience Roles Email Audit Trail Execution Log Search Title Translation

Use this tab to indicate columns to be included in the search results as well as sort order.

Sort By: ID [v] ☐ Descending
 Then By: [v] ☐ Descending
 Then By: [v] ☐ Descending

Output Type: Normal [v]
☐ Show Totals
☐ Run Unrestricted [v] Max Results ☐ Disallow Drill Down
☐ My Preferred Search Results

Columns • Drill Down Fields •

Remove all Add Multiple

Field	Summary Type	Function	Formula	When Ordered By Field	Custom Label	Custom Label Translation	Summary Label	Summary Label Translation
ID								
Name	Group							
Email								
Phone								
Office Phone								
Fax								
Activity : Date	Maximum							
Primary Contact								

On the Available Filters subtab, the first filter listed must be of type List/Record for this saved search to be available as a custom sublist. The ID of a record is used as the parameter for this filter. When a sublist has the Field column defined, the value from the selected field is used instead of the record ID.

This example uses Sales Rep as the filter, and assumes that the employee is the sales representative for the records being searched. Filtering by sales representative ensures that sales representatives see results for their own customers only. If the employee isn't the sales representative for the records being searched, the save search will return no results.

Saved Customer Search List Search More

Save [v] Cancel Preview Pivot Report Actions

Search Title * CC No Recent Activity Custom Search
 ID [v]
☐ Public
☐ Available as List View
☐ Available as Dashboard View
☐ Available as Sublist View
☐ Available for Reminders
☐ Show In Menu

Criteria **Results** Highlighting **Available Filters** Audience Roles Email Audit Trail Execution Log Search Title Translation

Limit the set of filters available on the form when you reuse this search, or to set filters for the results (such as when used as a list view). Remove all filters to use advanced search.

☐ My Preferred Search Form ☐ Hide Filter Dropdowns Default Text Field Filter starts with [v]

Remove all Add Multiple

Filter	Show in Filter Region	Show as Multi-Select	Label	Translation
Sales Rep				

[v] Add [x] Cancel [+ Insert] [x Remove] [^ Move Up] [v Move Down] [↕ Move To Top] [⇓ Move To Bottom]

Save [v] Cancel Preview Pivot Report Actions

Custom Sublist Definition

Script ID

Tab

Type *

Search *

Label *

Field

☐ Purchase
☐ Sale
☐ Opportunity
☐ Journal
☐ Expense Report
☐ Inventory Adjustments
☐ Assembly Build
☐ Item Receipt
☐ Item Fulfillment

3. In the **Script ID** field, enter an ID for the custom sublist, starting with an underscore.
4. In the **Tab** field, select the subtab where you want this sublist to appear.
5. In the **Type** field, select the sublist type.
6. In the **Search** field, select the saved search that returns the results you want to appear on the record. If the saved search does not appear in the list, check the saved search settings. The first item listed on the Available Filters subtab must be a List/Record type, otherwise the saved search isn't available to assign as a sublist.
7. In the **Label** field, enter a label for this sublist.
8. In the **Field** field, select the field to use for filtering the sublist.
9. Check the box for each record where you want this sublist to appear. This sublist shows on the standard and custom forms of the types you select.
10. Click **Save**.

Now, these search results appear on the subtab of the records you selected. To view an example of applying a custom sublist to a standard record, see [Example of Adding Custom Sublist to Standard Record](#).

Applying Custom Sublists to Custom Record Types

You can add custom sublists to custom record types.

First, you create a saved search that obtains the results that you want to show on your custom records. See [Saved Searches for Custom Sublists](#). Then you add the search as a custom sublist to your custom record type.

 **Note:** If the saved search isn't available in the sublist setup, check the saved search settings. The first item listed on the Available Filters subtab must be a List/Record type, otherwise the saved search isn't available to assign as a sublist.

To add the search as a custom sublist to a custom record type:

1. Go to Customization > Lists, Records, & Fields > Record Types. Click the name of the record type to which you want to add the sublist.
2. Click the **Sublists** subtab.
3. In the **Search** column, select the saved search.
4. In the **Label** column, enter a label for the subtab where you want the search results to display.
5. (When the Multi-Language feature is enabled) In the **Translation** column, enter one or more translations of the label. You can enter up to 50 characters in the **Translation** column.
6. In the **Tab** column, select the custom subtab where you want this sublist to display.
7. In the **Field** column, select the field to use for filtering this sublist.
8. Click **Add**.
9. Click **Save**.

Now, these search results show on the custom record. For an example of applying a custom sublist to a custom record type, see [Example of Adding Custom Sublists to Custom Record Types](#).

Example of Adding Custom Sublists to Custom Record Types

You have a custom Warranty Claim record, and when a new record is created, you want to show information about previous claims.

First you create the saved search. From the custom record list page, click Search beside the record for which you want to create the custom sublist.

Saved Warranty Claim Search List Search More

Warranty Claim Search2

Save Cancel Preview New Template Pivot Report Change ID Actions

Search Title *
Warranty Claim Search2

ID
customsearch_product_search

Owner *
44 Wolfe, C M

☒ Public
☐ Available as List View

☐ Available as Dashboard View
☒ Available as Sublist View
☐ Available for Reminders
☐ Show in Menu

Criteria Results Highlighting **Available Filters** Audience Roles Email Audit Trail Execution Log Search Title Translation

i Limit the set of filters available on the form when you reuse this search, or to set filters for the results (such as when used as a list view). Remove all filters to use advanced search.

☐ My Preferred Search Form ☐ Hide Filter Dropdowns Default Text Field Filter starts with

Remove all Add Multiple

Filter *	Show in Filter Region	Show as Multi-Select	Label	Translation
Technician			Technician	

✓ Add ✕ Cancel + Insert 🗑 Remove ^ Move Up v Move Down ⇄ Move To Top ⇄ Move To Bottom

Save Cancel Preview New Template Pivot Report Change ID Actions

You want to filter the search to show the warranty claims that were worked by the same technician only.

On the Available Filters subtab, the first filter listed must be of type List/Record for this saved search to be available as a custom sublist.

In the custom record definition, click the **Sublists** subtab and select the search that you created.

Fields • Subtabs **Sublists** • Icon • Numbering • Forms • Online Forms Permissions Links • Managers Translation • Child Records Parent Records History

Search *	Label *	Translation	Tab	Field
Warranty Claim Search2	Service			Technician

✓ Add ✕ Cancel + Insert 🗑 Remove ^ Move Up v Move Down ⇄ Move To Top ⇄ Move To Bottom

The sublist appears as a subtab on the custom record.

The screenshot shows a NetSuite record for a 'Warranty Claim' with the title '30 Day Warranty Coverage'. The record details include: Name '30 Day Warranty Coverage', Inactive checkbox, Date of Claim '9/22/2017', Claim Details 'Product broke within the first 30 days.', Technician 'Wolfe, S Wolfe, S S', and Claimant '2 Acme Inc.'. Below the record details is a custom sublist tab labeled 'Custom'. The sublist is titled 'Service' and contains two entries: '30 Day Warranty Coverage' and 'ACME Co - shipping damage'. Each entry has an 'Edit' button. The sublist also has its own 'Edit', 'Back', and 'Actions' buttons.

Example of Dynamically Filtering a Custom Sublist by a Record Field

You can use NetSuite custom sublists and saved searches to automatically filter records displayed on a sublist for a record, based on a specific field value selected in the parent record. This capability enables users to see only the most relevant related records for the context of each parent record, which helps streamline content and simplify record review.

To use this feature, you should be familiar with creating custom lists, custom record types, and saved searches. For more information, see the following topics:

- [Creating a Custom List](#)
- [Creating Custom Record Types](#)
- [Saved Searches for Custom Sublists](#)

Scenario Example

Suppose your company tracks sales activity across different seasons. You have two custom record types: one for summary sales (Tracked Sales) and another for individual sales entries (Specific Sales). Each Tracked Sales record has a Season field designating the relevant season. Each Specific Sales record also includes its own Season field.

You want to provide users with a focused view of sales activity that matches the season selected on a particular Tracked Sales record. By configuring a custom sublist for Tracked Sales and linking it to a saved search filtered by season, you can display only those Specific Sales entries relevant to the selected season in the sublist. If you change the season on the parent record, the sublist updates automatically to display only the corresponding Specific Sales.

This setup creates a dynamic, data-driven relationship in your records. The value selected in the filter field of the parent record acts as a controller, and the related records shown in the sublist depend on this value.

General Steps to Set Up a Dynamically Filtered Custom Sublist

To implement this behavior, follow these high-level steps:

1. Create custom record types as needed.

For example, create a parent record type such as Tracked Sales and a related record type such as Specific Sales.

2. Add a shared field to both record types.
Include a field (such as Season) on both the parent and related record types. This field could be based on a custom list, custom record, or use an existing standard list/record field.
3. Create a saved search on the related (child) record type.
Set up a saved search for Specific Sales, making sure the shared field (such as Season) is added as the first available filter. This enables the saved search to filter results based on the corresponding value from the parent record.
4. Add and configure the custom sublist on the parent record type.
Attach a custom sublist to the parent record (such as Tracked Sales), select the saved search to provide the sublist data, and specify the relevant field (such as Season) for dynamic filtering. Selecting the correct field in the sublist definition ensures the displayed results match the current value on the parent record.
5. Test and refine your setup.
Review the behavior of the sublist as you change the filter field on the parent record and make adjustments as needed to ensure that only the relevant related records appear in the sublist.

Custom Child Record Sublist Creation with SuiteScript

For information about custom child record sublist creation with SuiteScript, see the following topics:

- [Custom Child Record Sublists](#)
- [Creating Custom Child Record Sublists](#)
- [Custom Child Record Sublist IDs Overview](#)
- [Scripting with Custom Child Record Sublists](#)

Custom Child Record Sublists

When working with custom child record sublists you can use all the [N/record Module](#) or [N/currentRecord Module](#) provided in SuiteScript. If you're new to custom child record sublists, you should read these topics in order:

- [Custom Child Record Sublists Overview](#)
- [Creating Custom Child Record Sublists](#)
- [Custom Child Record Sublist IDs Overview](#)
- [Scripting with Custom Child Record Sublists](#)

Custom Child Record Sublists Overview

Custom child record sublists are Inline Editor Sublists that contain a list of custom records.

You can do the following tasks with Inline Editor Sublists:

- add/edit/remove lines dynamically before submitting the form
- add/edit/remove lines using the UI or SuiteScript
- when writing client scripts, use [Record.commitLine\(options\)](#) or [CurrentRecord.commitLine\(options\)](#) after each sublist line change. Otherwise, changes won't be saved.
- when writing server scripts, you must call [Record.commitLine\(options\)](#) or [CurrentRecord.commitLine\(options\)](#) to save sublist updates. Note that you must do this in addition to calling [Record.save\(options\)](#), which saves the entire record object to the database.

The following screenshot shows a custom child record sublist of fixed assets records. These records appear as line items on a custom Fixed Assets subtab. The parent record that contains the sublist of custom fixed assets records is the customer record.

In the UI, click **New Fixed Assets** to create a new fixed assets child record. The new record is added to the Fixed Assets sublist and is scriptable. In SuiteScript, add a new fixed assets child record by adding a new line to the sublist.

Fixed Assets Name	Cost *	Useful Life in Years *
Fixed asset 1	200.00	10
Fixed asset 2	400.00	2
Fixed asset 3	1000.00	3
	1	1

When the **New Fixed Assets** button is clicked, a new fixed assets record opens (see the following screenshot). Note that the fixed assets record contains a **New Customer** field. This field is a List/Record field that references the parent record – in this case, the Abe Simpson customer record.

Note: The parent-child relationship between the fixed assets record type and the customer record type was defined on the Custom Record Type definition page for the fixed assets record. (For general information about creating parent-child relationships between records, see [Parent-Child Record Relationships](#).)

The Fixed Assets fields that appears in the sublist are the required fields (those body fields that appear with the asterisk on the fixed assets record) and those fields that have been set to **Show in List** in the Custom Field definition page for the fixed assets record type. You can use [N/record Module](#) or [N/currentRecord Module](#) to set or get values for all fixed assets fields in a Fixed Assets sublist.

Title	Memo *	Date	Time	Type	Direction
		17.3.2025	12:57 pm		

The New Customer field is a List/Record field that references the parent record of the fixed assets (child) record.

If you know the internal ID of a fixed assets field, you can update the field through sublist scripting. (See [Custom Child Record Sublist IDs Overview](#) to learn how to get field IDs for all fields on a custom child record sublist.)

The screenshot shows the NetSuite interface for a Customer record named 'Abe Simpson'. The 'Fixed Assets' tab is selected, displaying a table of assets. The table has columns for 'Name', 'ID', and 'Remove'. The assets listed are:

Name	ID	Remove
2003 Ford Expedition	2	Remove
Dell Dimension XPS	1	Remove
Fixed asset 1	3	Remove
Printer	17	Remove
Salvage Value	14	Remove

Fields set to **Show in List** on the fixed assets record type appear in the sublist. However, you can update any fixed assets field through scripting.

When a transaction is created by transformation from another record type, custom child record sublists are available for editing on the new transaction. Sublists are also available when users select the Make Copy action on an original transaction. The sublists are empty to prevent problems when copying child records, so the user should enter new sublist values.

Creating Custom Child Record Sublists

The following high-level steps are provided for users who are already familiar with NetSuite customization. This procedure provides a general frame of reference for building a custom child record sublist. For more information, see the following.

- [Custom Records](#)
- [Custom Fields](#)
- [Creating Custom Subtabs](#)

To create a custom child record sublist:

1. Define a custom record type (such as the fixed assets record mentioned earlier).



Important: On the Custom Record Type page, check the **Allow Child Record Editing** box. If this preference isn't enabled, your records aren't scriptable when they appear as sublist line items on the parent record.

Custom Record Type
Fixed Assets

Save Cancel Change ID Actions

Name

ID customrecord3
Internal ID 3
Originating Custom Segment

Owner <Type then tab>

Description

☒ Include Name Field
☒ Show ID

Show Creation Date ☒ On Record ☐ On List
Show Last Modified ☒ On Record ☐ On List
Show Owner ☐ On Record ☐ On List ☐ Allow Change

Access Type

☒ Allow UI Access
☒ Allow Mobile Access
☒ Allow Attachments
☒ Show Notes
☐ Enable Mail Merge
☐ Records are Ordered
☒ Show Remove Link
☐ Allow Quick Search

☒ Allow Child Record Editing ☐ Allow Delete

☐ Allow Quick Add
☒ Enable System Notes
☒ Include In Global Search
☒ Include In Search Menu
☐ Enable Optimistic Locking
☒ Enable Inline Editing
☐ Enable Name Translation
☐ Hierarchy
☐ Inactive

Fields • Subtabs Sublists Icon • Numbering • Forms • Online Forms • Permissions Links • Managers Translation • Child Records Parent Records • History • System Notes

☐ Show Inactives

New Field Move To Top Move To Bottom

Description	ID	Type	List/Record	Tab	Show In List
Cost	custrecord1	Currency			No
Salvage Value	custrecord2	Currency			No
Depreciable Cost	custrecord3	Currency			No



Note: If Allow Child Record Editing is checked, then Allow Delete becomes enabled. You can check the Allow Delete box to enable users to delete records of this type when they appear as child records in a sublist on a parent record.

2. Establish the parent-child relationship between your new custom record type (fixed assets) and another record type. Parent-child relationships are established through custom fields.
 - a. Add a custom field to your new custom record type.
 - b. On the field definition page for the new field, set the field **Type** to **List/Record** (see the following screenshot).
 - c. Specify the record type that's the parent of your custom record type. In the following screenshot, the customer record type is the parent.
 - d. Check the **Record is Parent** box to attach your custom record type (fixed assets) to a parent record type (customer).

In this case, the **New Customer** field ties the fixed assets record type to the customer record type.

Your custom child record sublist can appear on a standard or custom subtab of the parent record.

3. If you want the custom child record sublist to appear on its own subtab on the parent record, create a subtab with a name that reflects the sublist type. The preceding screenshot shows that a sublist of child fixed assets records appears on a custom **Fixed Assets** subtab. This subtab appears on all customer (parent) records.

Note: See [Adding Subtabs to a Custom Record](#) for steps on creating custom subtabs and adding subtabs to specific record types.

4. After defining the customer–fixed assets (parent–child) relationship (through the **New Customer** field), go to a customer record in NetSuite and notice the Fixed Assets sublist, as shown in the following screenshot.

Note: If you haven't specified a parent subtab for this sublist, the custom record child sublist appears on a system-generated subtab called **Custom**.

Name	ID	Remove
2003 Ford Expedition	2	Remove
Dell Dimension XPS	1	Remove
Fixed asset 1	3	Remove

The preceding screenshot shows the fixed assets sublist. When the **New Fixed Assets** button is clicked, a custom (child) fixed assets record opens. After adding data to the fixed assets record and saving it, the record appears as a sublist line item. This screenshot shows that three fixed assets (child) record have been added as sublist line items to the (parent) customer record for Abe Simpson.

Custom Child Record Sublist IDs Overview

Unlike other sublists, there are no standard IDs that can be documented for custom child record sublists. The internal ID for the sublist itself, and all of its associated fields, is unique to each custom child record sublist.

See these topics for guidelines about determining which IDs to reference in [N/record Module](#) or [N/currentRecord Module](#):

- [Determining the Sublist ID for a Child Record](#)
- [Determining Field IDs on a Child Record Sublist](#)

Determining the Sublist ID for a Child Record

This topic explains where and how to find the internal ID of a custom child record sublist in NetSuite. For a general overview, see [Custom Child Record Sublist IDs Overview](#).

The internal ID for a custom child record sublist is **recmach** + `field_id_for_the_parent_field` (for example: `recmachcustrecord102`).

Use [Record.getSublistValue\(options\)](#) or [CurrentRecord.getSublistValue\(options\)](#).

```

1 // Add code.
2 ...
3 var sublistFieldValue = objRecord.getSublistValue({ sublistId: 'item', fieldId: 'item', line: 3
4 });
5 ...
6 // Add code.
```

Finding the Internal ID of a Custom Child Record Sublist

The following steps describe where to look in NetSuite to get the internal ID of a custom child record sublist.

To get the internal ID of a custom child record sublist (the field ID for the parent record):

1. Go to the record definition for the custom record type. For example, Fixed Assets, as shown in the following screenshot.
2. On the **Fields** subtab, notice that the **ID** column lists a List/Record field type.

The **New Customer** field (internal ID: **custrecord102**) is the parent field for the fixed assets records that appear as children on customer records. Therefore, the internal ID for the custom child Fixed Assets sublist on customer records is **recmachcustrecord102**.

Custom Record Type
Fixed Assets

Save Cancel Change ID Actions

Name * Fixed Assets
ID custrecord102
Internal ID 3
Originating Custom Segment

Owner * -Type then tab-
Description

☒ Include Name Field
☒ Show ID
Show Creation Date ☒ On Record ☐ On List
Show Last Modified ☒ On Record ☐ On List
Show Owner ☐ On Record ☐ On List ☐ Allow Change

Access Type
☒ Require Custom Re...ries Permission
☒ Allow UI Access
☒ Allow Mobile Access
☒ Allow Attachments
☒ Show Notes
☐ Enable Mail Merge
☐ Records are Ordered
☒ Show Remove Link ☒ Allow Child Record Editing ☒ Allow Defaults
☐ Allow Quick Search

☐ Allow Quick Add
☒ Enable System Notes
☒ Include in Global Search
☒ Include in Search Menu
☐ Enable Optimistic Locking
☒ Enable Inline Editing
☐ Enable Name Transaction
☐ Hierarchy
☐ Inactive

Fields * Sublists Sublists Icon * Numbering * Forms * Online Forms * Permissions Links * Managers Translation * Child Records Parent Records * History * System Notes

☐ Show Inactive

New Field Move To Top Move To Bottom

	Description	ID	Type	List/Record	Tab	Show In List
Cost		custrecord1	Currency			No
Salvage Value		custrecord2	Currency			No
Depreciable Cost		custrecord3	Currency			No
Useful Life in Years		custrecord4	Decimal Number			No
Description		custrecord5	Text Area			No
New Customer		custrecord102	List/Record	Customer		Yes

Obtaining the Internal ID of the Parent Field

The following is an alternative approach for obtaining the internal ID of the parent field.

To obtain the internal ID of the parent field:

1. On the custom child record sublist, click the New child record button. In the following example, the button is New Fixed Assets.

Customer Abe Simpson

Edit Back Accept Payment Update LSA Auto Close Items Accept Customer Payment Actions

Primary Information
Customer ID Abe Simpson
Type Partner
Company Commission Partner
Contact Name Abe Simpson
Status CUSTOMER-Closed Won
Email | Phone | Address
Email aaron@simpson@yahoo.com
Phone (804) 221-1113
Address 5100 Campus Drive
Suite 100
San Mateo CA 94403
United States

Classification
Preferred Contact Method
☐ Report to Operator
Contact Preference Email
Type 15.1.2021
Usual Revenue (2) Less Than \$5 million
No. of Employees

Relationships Communication Address Sales Support Assets System Information E-Document SuiteCommerce Extensions Outbound SSO Fixed Assets Geography

Fixed Assets

New Fixed Assets Attach Customer View

Edit	Name	ID	Remove
Edit	2020 First Equipment	2	Remove
Edit	Old Computer IPS	1	Remove
Edit	Fixed asset 1	3	Remove
Edit	Fixed asset 2	4	Remove
Edit	Fixed asset 3	5	Remove

2. When the new child record opens, notice the field that ties the child record to the parent record.

In this case, the **New Customer** field shows that the customer record for Abe Simpson is the parent of the fixed assets record. The field level help popup window for **New Customer** lists the field's internal ID as custrecord102. Therefore, the internal ID for the Fixed Assets sublist appearing on the (parent) customer record is **recmachcustrecord102**.

Note: Internal IDs for custom child record sublists also appear in the SuiteScript Debugger when you load the record that includes the sublist.

Determining Field IDs on a Child Record Sublist

This topic outlines the process for identifying field internal IDs on a custom child record sublist. For a general overview, see [Custom Child Record Sublist IDs Overview](#).

Use these steps to get internal field IDs on a custom child record sublist:

1. Go to the custom record definition page (for example, go to Customization > Lists, Records, & Fields > Record Types and select your custom record in the **Record Types** list).
2. On the Fields subtab of the Custom Record Type page, all field internal IDs appear in the ID column. These are the IDs you reference as the `fieldId` value in `Record.getSublistValue(options)` or `CurrentRecord.getSublistValue(options)`.

Description	ID	Type	ListRecord	Tab	Show in List
Cost	custrecord1	Currency			No
Salvage Value	custrecord2	Currency			No
Depreciable Cost	custrecord3	Currency			No
Useful Life in Years	custrecord4	Decimal Number			No
Description	custrecord5	Text Area			No
New Customer	custrecord102	ListRecord	Customer		Yes

Example:

```
1 //Get the value of the Cost field on the first line (see the following figure) ...
2 var sublistFieldValue = objRecord.getSublistValue({ sublistId: 'irecmachcustrecord102', fieldId: 'custrecord1', line: 1
```

```
3 | };
```

You can get or set values for fields that appear in the Fixed Assets sublist. You can also set or get values that exist on the record, but don't appear in the sublist UI.

For example, the following line sets the value of the **Salvage Value** field in the fixed assets record 14 (see the following screenshot). The internal ID for Salvage Value is custrecord2. See this value on the Custom Record Type definition page for the fixed assets record type.

```
1 | objRecord.setCurrentSublistValue({ sublistId: 'recmachcustrecord102', fieldId: 'custrecord2', });
```

The screenshot shows the NetSuite Customer record page for 'Abe Simpson'. The 'Fixed Assets' tab is selected, displaying a table with three line items. The third line item, 'Salvage Value' with ID 14, is highlighted with a red border. The table has columns for 'Name', 'ID', and 'Remove'.

Name	ID	Remove
2003 Ford Expedition	2	Remove
Dell Dimension XPS	1	Remove
Salvage Value	14	Remove

Scripting with Custom Child Record Sublists

Custom child record sublists are inline editor sublists. Consequently, they support all standard [Scripting Subrecords that Occur on Sublist Lines](#). A custom child record sublist is unique only because it's not identified by a standard sublist internal ID, nor does it contain a standard set of field IDs. Otherwise, like all other inline editor sublists, you can add and remove line items. You can get and set values on existing line items, and the first line number (linenum) for all sublists is 1, not 0.



Important: Validate line functions aren't supported on custom child record sublists. Validate line functions are performed when a client event occurs prior to a line being added to a sublist.

Customizing a Transaction Sublist

On most pages where you run bulk operations on a list of transactions, you can customize the list displayed. For example, on the Approve Sales Orders page, you can change the default column, filter, and sorting options. If a transaction list can be customized, a **Customize** button is available in the upper left corner of the sublist. For more information, see the help topic [Customizing Sublist Views](#).



Note: The **Customize** button is useful for displaying information that's captured by a custom field defined in your account. Custom fields **aren't** included in the transaction sublist by default.

To customize a transaction sublist:

1. On the transaction page, click **Customize**.
For example, go to Transactions > Sales > Mark Orders Shipped. Click **Customize**.
2. On the **Additional Columns** subtab, check any fields that you want to display as columns in the sublist.
You can add columns to the list, but you can't remove any of the default columns.
3. On the **Additional Filters** subtab check any fields that you want to add as filters for the sublist.



Important: In the **Adjust Inventory Worksheet** and **Print Item Labels** pages, the available column and filter fields are taken from the item record rather than from transactions.

For an example of customizing a transaction sublist to filter and sort bill payments using a custom On Hold field, see [Filtering and Sorting Bills by Custom On Hold Field Example](#).

Filtering and Sorting Bills by Custom On Hold Field Example

The example in this topic shows how you can filter and sort transaction sublists using a custom On Hold field for bills. For an overview and general instructions on customizing transaction sublists, see [Customizing a Transaction Sublist](#).

You may want to delay paying bills until certain criteria are met. To identify these bills on the Bill Payments page, you can add a custom **On Hold** field to the bill record. Add this as filter criteria to the Bill Payments page and then sort by the wanted setting to view bills that you must pay versus bills that should wait.

To set up this scenario, create a custom Transaction Body field of the Type Check Box and apply it to purchase records.

Transaction Body Field

Save Cancel Change ID Apply to Forms Actions

Label *
On Hold

ID
custbody_on_hold

Owner
44 Wolfe, C M

Description

Type
Check Box

ListRecord

☒ Store Value ☐ Use Encrypted Format

☐ Show In List

☐ Global Search
☐ Record is Parent
☐ Inactive

Applies To Display Validation & Defaulting Sourcing & Filtering Access Translation History

☒ Purchase

☐ Sale
☐ Opportunity
☐ Journal
☐ Period End Journal

☐ Inventory Adjustments
☐ Work Order / Assembly Build
☐ Tegata
☐ Customer Payment
☐ Vendor Payment

☐ Print on Picking Ticket
☐ Print on BoM
☐ Print on Packing Slip
☐ Print on Statement
☐ Paycheck

After bills are entered, go to the Bill Payments page, click Customize View and then select On Hold on the Additional Filters subtab.

Results Available Filters Search Title Translation

Use this tab to specify what filters you would like in the filter region of the search results page.

Remove all Add Multiple

Filter *	Show in Filter Region	Show as Multi-Select	Label ^{Label}	Translation
Type	Yes			
Employee	Yes			
UOM Type	Yes			
On Hold (Custom Body)	Yes			
	Yes	Yes		

Add the On Hold field to the Results subtab and save.

Results Available Filters Search Title Translation

Use this tab to indicate columns to be included in the search results as well as sort order.

Sort By
Date ☐ Descending

Remove all Add Multiple

Field *	Custom Label	Custom Label Translation
Date		
Print		
Type		
On Hold (Custom Body)		
Payroll Batch		
Document Number		

You can now filter results to display only records that aren't On Hold.

Bill Payments List Search Audit Trail

View Custom Default Edit View New Transaction

Filters

Type Employee On Hold Status Style

Bill Payment - All - - All - - All - Normal

Custom Records

In NetSuite, you track all the information in your account using records. Users with the Administrator role and users with the Custom Record Entries permission can create custom records that collect information specific to the needs of your business. You can attach information from custom records to entities, items, or transactions using custom fields.

For example, you may want to keep track of training courses your employees have taken. Because a record type specific for this purpose doesn't not exist in NetSuite, create a custom record type titled Employee Courses. In the custom record type, create custom fields to store information that you want to be included on the record. You could have fields for the course names, class start date, class end date, course level, certificate achieved, certification expiry date, and so on.

You can also set up the custom record so that it appears as a subtab on another record. So, you could have an Employee Courses subtab on the employee record.

To enable the Custom Records feature, go to Setup > Company > Enable Features > SuiteCloud. Then, on the SuiteCloud subtab, check the **Custom Records** box.

To modify Custom Records, go to Customization > Lists, Records, & Fields > Record Types. You can do the following:

- Create a new custom record type
- Edit an existing custom record type
- View a list of record instances that have been created using each custom record type
- Create a new record instance for a selected custom record type, by clicking **New Record**
- Create a new search record for a selected custom record type

For information about adding a new record instance using the Lists menu, see the help topic [NetSuite Record Types](#).

To make adding new records quicker, add shortcuts from the new instance page using the shortcuts menu (the star icon on the navigation menu). Or, add a shortcut to your shortcut portal. For more information, see the help topic [Shortcuts Portlet](#).

For more information, see the following:

- [Creating Custom Record Types](#)
- [Online Custom Record Forms](#)
- [Parent-Child Record Relationships](#)
- [Sourcing with Custom Records](#)
- [Updating Custom Record Types](#)
- [Using Custom Record Entries](#)



Important: SuiteScript doesn't support direct access to the NetSuite UI through the Document Object Model (DOM). You should access the NetSuite UI only by using SuiteScript APIs. For information about using SuiteScript APIs to customize the UI, see the help topic [SuiteScript 2.x Custom Pages](#).

Custom records are supported in SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SDF SuiteApps, or to customize NetSuite accounts, using an integrated development environment (IDE) on your local computer. SuiteCloud projects are file-based and use XML definitions of custom NetSuite objects. For more information, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

Creating Custom Record Types

To create a custom record type, perform the following steps:

1. [Creating a New Custom Record Type](#).
2. [Entering Name and Display Settings](#).
3. [Specifying Permission and UI Settings](#).
4. [Configuring File and Child Record Settings](#).
5. [Defining Search and Edit Settings](#).
6. To create a custom record type, click **Save**.

 **Note:** To enable QuickViews for your custom record, use form customization for the custom record. For more information, see [Configuring QuickViews for Custom Records](#).

The following subtabs are available to help you further define your custom records before saving:

- **Subtabs** – Create and arrange subtabs on your custom record type. For more information, see [Adding Subtabs to a Custom Record](#).

 **Note:** To save time, create and arrange subtabs for your custom records before defining your custom fields.

- **Sublists** – Add search results as sublists on your custom record type.
For more information, see [Applying Custom Sublists to Custom Record Types](#).
- **Icon** – Select the PNG sprite you want to use to represent this record type in the New Bar, Create New menu, Recent Records menu, Recent Records portlet, and QuickViews. You can choose from built-in icons or create your own custom icon.
For more information, see [Choosing an Icon for a Custom Record](#).
- **Numbering** – Specify the numbering format for the custom record types. For more information, see [Numbering Custom Record Types](#).
- **Permissions** – Select the roles you want to access custom record entry forms, choose a default form, and restrict the forms available here. For information, see [Setting Permissions for a Custom Record Type](#) and [Applying Role-Based Restrictions to Custom Records](#).

 **Important:** For these permissions to apply, you must select **Use Permission List** from the **Access Type** list.

- **Links** – Create links that take you to the list of record entries for this custom record type and select where to place the links. For more information, see [Creating Links to Custom Records](#).
- **Managers** – Define specific employees as managers of the current record type, which enables the employee to modify the custom record type. When defined as a manager, employees are automatically granted custom record view permission. The custom record view permission permits managers to see the list of custom record types but **not** drill down on them.

 **Note:** If an employee has a role that includes the Custom Record Type permission, they have edit access to **all** custom record types. The Managers subtab enables you to grant permission for an employee to the current record type only.

- **Translation** – (when Multi-Language feature is enabled) Define translations for the custom record type name to be used when users change the language preference. For more information, see [Adding Translations for Custom Records](#).

After you save a custom record type, the following subtabs are added:

- **Fields** – Create and arrange the fields for your custom record type. For more information, see [Adding Fields to Custom Record Types](#).
- **Forms** – Customize and select a preferred entry form for your custom record type. For more information, see [Adding Custom Forms for a Record](#).
- **Online Forms** – Create and manage online forms for your custom record types. For more information, see [Adding Custom Online Forms for a Record](#).
- **Child Records** – If this record type is a parent record, its child records are listed here.
- **Parent Records** – If this record type is a child record, its parent records are listed here.

For information about parent and child records, see [Parent-Child Record Relationships](#), [Creating a Parent-Child Relationship](#), and [Using Child Records](#).

You can use SuiteCloud Development Framework (SDF) to manage custom record types as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom record type to another of your accounts. Each custom record type page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Creating a New Custom Record Type

You can create new custom record types, as needed.

To create a new custom record type

1. Go to Customization > Lists, Records, & Fields > Record Types > New.



Note: The custom record type is created after you've filled in all required fields and clicked **Save**.

2. See [Entering Name and Display Settings](#).

You can use SuiteCloud Development Framework (SDF) to manage custom record types as part of file-based customization projects. For information about SDF, see . You can use the Copy to Account feature to copy an individual custom record type to another of your accounts. Each custom record type page has a clickable Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Entering Name and Display Settings

After you create a new custom record type, you enter a name and description for the custom record type as well as display settings for custom record entries.

To enter a name and display settings for the custom record type:

1. In the **Name** field, enter a name for the record type.
The **Name** field has a 40-character limit.
2. In the **ID** field, enter a unique alphanumeric ID for the custom record. For information about best practices and naming conventions, see [Conventions for Naming Custom Objects](#). For information about changing an existing ID, see [Changing the ID of a Custom Object](#).

3. In the **Owner** field, select the owner of this custom record type.
Only the owner can modify this record type.
4. In the **Description** field, enter a description of this record type.
5. To include a required **Name** field on each record entry, check the **Include Name Field** box.
If you check this box, the **Name** field becomes the first field on the record and in the record list. If you don't check this box, your records are automatically assigned a number based on the order in which they're entered.
6. To display the record entry ID that's automatically assigned by NetSuite to each new record entry, check **Show ID**.

 **Note:** Internal IDs are assigned sequentially to new records. However, the sequence of internal IDs doesn't indicate when or in which order records were added.

7. In the **Show Creation Date** field, to display the creation date and time on each record entry, check the **On Record** box. To display the creation date and time for each record entry in your list for this record type, check the **On List** box.
8. In the **Show Last Modified** field, to display the last modified date and time on each record entry, check the **On Record** box. To display the last modified date and time for each record entry in your list for this record type, check the **On List** box.
9. In the **Show Owner** field, choose an option:
 - To display the record owner on each record entry, check the **On Record** box. The record owner is the person who creates the record entry.
 - To display the record owner for each record entry in your list for this record type, check the **On List** box.
 - To permit the record entry owner to be changed, check the **Allow Change** box. If you permit the owner to be changed, you must also show the owner on the record entry. An Owner field is displayed on your record entries as a list of people with login access to your NetSuite account. The Owner field on each record entry defaults to the current person entering the record.
10. Enter permission and UI settings. For more information, see [Specifying Permission and UI Settings](#).

Specifying Permission and UI Settings

After you've entered name and display settings for the custom record type, you enter permission and UI settings.

To enter permission and UI settings:

1. On the Custom Record Type page, select a permissions model from the **Access Type** list:
 - **Require Custom Record Entries Permission** indicates that only users logging in with a role with permission granted to the custom record type can access it.
 - **Use Permission List** grants access to the custom record type according to the permissions set up on the Permissions subtab of this page.
 - **No Permission Required for Internal Roles** makes instances of the custom record available to internal roles without requiring permission. If you select this option, the following configuration options appear:
 - **External Roles Access** makes instances of the custom record type available to external users according to the access level selected.

When you permit access to external roles, you make instances of the custom record types available to users outside of your organization, including partners, customers, and registered shoppers.



Warning: Use abundant caution when granting external users access to custom records, as this can impact your organization's security.

- **Unauthenticated Users Access** makes instances of the custom record types available to unauthenticated users according to the access level selected.

When you permit access to unauthenticated external users, those users can access instances of this custom record type unless it's protected by another custom mechanism, such as SuiteScript or SuiteFlow (Workflows) controls.



Warning: Use abundant caution when granting anonymous users access to custom records, as this can impact your organization's security.

For more information, see [Setting Permissions for a Custom Record Type](#).

2. To indicate that this record can be accessed only through SuiteScript, clear the **Allow UI Access** box. By default, this box is checked.

When this box isn't checked, users can't access instances of the custom record type from the NetSuite user interface. Also, the following custom record options are disabled: Allow Mobile Access, Allow Quick Search, Allow Quick Add, and Include in Search Menu.

3. To indicate that this record should be accessible on mobile devices through the NetSuite iPhone application, check the **Allow Mobile Access** box.

This box, which is disabled by default, isn't available if the **Allow UI Access** box is cleared.

4. Enter file and child record settings. For more information, see [Configuring File and Child Record Settings](#).

Setting Permissions for a Custom Record Type

The topics in this section provide an overview of managing access to custom record type data in NetSuite. To meet different business and security needs, you can define permission models, understand recent changes to access options, and restrict user interface access to custom records.

To manage access to custom record type data, you can:

- [Define the Permission Model for a Custom Record Type](#) to use permissions on role records, use permissions defined on the custom record itself, or provide public access to the custom record type.
- [Prevent Access to a Custom Record Type through the User Interface](#) so that users can't access custom record type data through the NetSuite user interface.

For information about recent changes to access types, see [Changes to 'No Permission Required' Access on Custom Record Types](#)

Define the Permission Model for a Custom Record Type

This topic explains the available models for controlling access to custom record types in NetSuite. Learn how to assign permissions based on roles, customize permission lists, and provide public access where needed.

You can use the **Access Type** list on a custom record type page to define a permissions model for a custom record type. You can base your permission model on any of the following:

- Custom record entries permissions defined on role records

- Permissions defined on the **Permissions** subtab of a custom record type
- No permissions required for internal roles
 - Permission level defined for external users, such as customers, vendors, and partners.
 - Permission level defined for unauthenticated users (meaning users (for example, anonymous shoppers – online form users) who did not log in to NetSuite).



Note: The No Permission Required access type has changed to No Permission Required for Internal Roles. For more information, see [Changes to 'No Permission Required' Access on Custom Record Types](#).

The **Access Type** list includes the following options:

■ **Require Custom Record Entries Permission**

- This option is the default.
- Custom record types created prior to 2012.1 that did not have the **Use Permissions** box checked have this option set.
- This option indicates that only users logging in with a role with permission granted to the custom record type can access it. This permission can be set on the **Lists** subtab of the **Permissions** subtab on each Role page. For more information, see the help topic [Customizing or Creating NetSuite Roles](#).

Note that this limitation doesn't apply to the owner of the custom record type. The owner always has full permission to access the custom record type in any role.

■ **Use Permission List**

- Custom record types created prior to 2012.1 that had the **Use Permissions** box checked have this option set.
- This option indicates the users logging in with a role with permissions defined on the **Permissions** subtab of the custom record type can access it. This permission can also be set on the **Custom Records** subtab of the **Permissions** subtab on each Role page.

Note that the owner of the custom record type isn't affected by this limitation. The owner always has full permission to access the custom record type in any role.

- For details about creating a permission list, see [Setting Up a Permissions List for a Custom Record Type](#).

■ **No Permission Required for Internal Roles**

- Use this option for non-sensitive custom record types when you want to give all employees create, read, update, and delete access. This option denies external users or unauthenticated users from accessing the custom record type.
- New roles have immediate access to relevant custom record types without having to explicitly grant access.
- You can add custom access controls using SuiteFlow or SuiteScript.
- For more information, see [Changes to 'No Permission Required' Access on Custom Record Types](#).

■ **External Roles Access**

- This option is available only if you selected No Permission Required for Internal Roles as the access type. It permits public access to users such as customers, vendors, and partners. The default access is None.
- **None** – User doesn't have access any instance of the custom record type. The user can't create new, view existing, edit existing, or delete existing instances.
- **View** – User has access to view existing instances of the custom record only. The user can't create new, edit existing, or delete existing instances.

- **Create** – User can create new and view existing instances of the custom record type. The user can't edit or delete existing instances.
- **Edit** – User has access to create new, view existing, and edit existing instances of the custom record type. The user can't delete existing instances.
- **Full** – User has access to create new files, and view, edit, and delete existing instances of the custom record type.
- **Unauthenticated Users Access**
 - This option is available only if you selected No Permission Required for Internal Roles as the access type. It permits public access to users (such as shoppers – online form users) who haven't logged in to NetSuite. The default access is None.
 - **None** – User doesn't have access any instance of the custom record type. The user can't create new, view existing, edit existing, or delete existing instances.
 - **View** – User has access to view existing instances of the custom record only. The user can't create new, edit existing, or delete existing instances.
 - **Create** – User can create new and view existing instances of the custom record type. The user can't edit or delete existing instances.
 - **Edit** – User has access to create new, view existing, and edit existing instances of the custom record type. The user can't delete existing instances.
 - **Full** – User has access to create new files, and view, edit, and delete existing instances of the custom record type.

Changes to 'No Permission Required' Access on Custom Record Types

This topic details updates to the “No Permission Required” access setting for custom record types, including increased control for internal, external, and unauthenticated users.

To provide more control over who may access your custom record entries, NetSuite has introduced a more precise setup to users with the required permissions. The access type option of **No Permission Required** has changed to **No Permission Required for Internal Roles**. When this option is selected, two additional more granular dropdown list fields will appear from which you can select additional access levels to permit with no permission required:

- External Roles Access
- Unauthenticated Users Access

To review and update the access type of your custom records:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. For each unlocked Record Type (no lock icon), review the Access Type setting and consider changing it to either **Require Custom Record Entries Permission** or **Use Permission List**.
 - If you select **Require Custom Record Entries Permission**, on each Role page, go to the **Lists** subtab of the **Permissions** subtab and set the appropriate access level.
 - If you select **Use Permission List**, go to the **Permissions** subtab and define which roles should have permission to access this custom record type.
 - If you agree with and want to keep the updated settings, no additional changes are needed

If you choose to use No Permission Required for Internal Roles, External Roles Access, or Unauthenticated Users Access, you should provide additional restrictions through the use of scripts, workflows, or both to tightly control access to your record instances consistent with your business needs.



Important: When NetSuite automatically adjusts your No Permission Required custom records to use the best possible setup, some users may have insufficient access to these custom record types and their entries.

Prevent Access to a Custom Record Type through the User Interface

This topic describes how you can block access to custom record types from the NetSuite user interface to enhance security, allowing record access only through programmatic means such as SuiteScript and web services.

You can clear the **Allow UI Access** box for a custom record type, to indicate that it can only be accessed programmatically. For example, you can access it using SuiteScript or SOAP web services. The **Allow UI Access** box is checked by default.

When this box is cleared:

- You can't access the custom record type from the NetSuite user interface.
- If you attempt to list, search, view, edit, or create a record of this type in the user interface, the following error message appears: Access to that record type from the user interface isn't allowed.
- The following custom record options are locked as disabled: Allow Mobile Access, Allow Quick Search, Allow Quick Add, and Include in Search Menu.



Important: You need to take additional steps to control access to custom record data through searches. For more information, see [Limiting Search Access to Custom Records](#).

Configuring File and Child Record Settings

After you've specified permission and UI settings, you enter file and child record settings.

To enter file and child record settings:

1. On the Custom Record Type page, to use a **File Cabinet** subtab to attach documents and images to your record entries, check the **Allow Attachments** box.
2. To add a Notes subtab to your child record entries, check the **Show Notes** box.
Notes are added to this subtab automatically when any change is made to individual records.
3. To enable mail merge capabilities for records of this type, check the **Enable Mail Merge** box.
For more information about using mail merge, see the help topic [Working with Mail Merge](#).
4. To be able to edit the order in which your child records appear on each parent record, check the **Records are Ordered** box.
 - If you **don't** check this box, child records display in alphabetical order in both View and Edit modes.
 - If you check this box, in View mode, child records continue to display in alphabetical order. In Edit mode, child records initially display in the order in which they were entered. After editing, child records will be listed in the custom order you set. After editing, child records will display in the custom order you set.
5. To hide child record sublist **Remove** links and prevent users from separating child records from the parent record, clear the **Show Remove Link** box.

By default, each child record in a sublist on a parent custom record includes a **Remove** link for users with Edit permission. Clicking this link results in the removal of the child record from the sublist but not from the system. This removal separates the child record from the parent record,

in effect deleting the relationship between records. This removal does not delete the child record from the system.

If **Remove** links are available, users can separate child records even if child record editing isn't permitted.

6. To permit records of this type to be edited directly when they display as child records in a sublist on a parent record, check the **Allow Child Record Editing** box. Note the following:
 - When the **Show Remove Link** option is disabled, the **Allow Child Record Editing** box isn't available.
 - Checking the box does not supersede users' role-based permissions. Only users who have permission to edit the record type can edit child records when this option is enabled.
 - The box was formerly labeled Allow Inline Editing. Its label was changed because it isn't related to the Inline Editing feature or to the Inline Editing toggle that displays on list pages when that feature is enabled. The name change also was intended to avoid confusion with the Enable Inline Editing option.

Note: Editing a parent record in a parent-child custom record relationship with Allow Child Record Editing enabled causes NetSuite to process all related child records, which may lead to slow saves or timeouts if many child records are present. For improved performance, edit child records directly and consider clearing Allow Child Record Editing when working with large child record lists or frequent updates.

Warning: Child records are never editable in parent records that have more than 10,000 child record lines, even when the Allow Child Record Editing box is checked for the record type.

7. To permit users to delete records of this type when they are child records in a sublist on a parent record, check the **Allow Delete** box. The box is available only if you have checked the **Allow Child Record Editing** box. When the box is checked, the following occurs:
 - When the **parent** record is in Edit mode and users click the Remove button on the **child** record in the sublist, the entire child record type is deleted from NetSuite.
 - When the **parent** record is in View mode and users click the Remove button on the **child** record in the sublist, the child record is removed from the sublist. The child record type remains in the system.

Note: This behavior also applies to any process that involves modifying records, such as scripts, SDF, and so on.

Warning: Child records can't be deleted in parent records that have more than 10,000 child record lines, even when the Allow Delete box is checked for the record type.

8. Enter search and edit settings for the custom record type. For more information, see [Defining Search and Edit Settings](#).

Defining Search and Edit Settings

After you've specified child and record settings, you enter search and edit settings.

To enter search and edit settings:

1. On the Custom Record Type page, if you want to permit this record type to be searched using the Quick Search portlet on dashboards, check the **Allow Quick Search** box

This option isn't available if the **Allow UI Access** box is cleared.

2. If you want to permit this record type to be added using the Quick Add portlet on dashboards, check the **Allow Quick Add** box. For more information, see the help topic [Quick Add Portlet](#).

This option isn't available if the **Allow UI Access** box is cleared.

3. If you don't want system notes to be created for changes to this record type, clear the **Enable System Notes** box. System notes are enabled by default.
4. If you don't want keywords entered in the global search box in the upper right corner of the page to apply to this record type, clear the **Include in Global Search** box.
5. If you don't want this record type to be available for searches in the UI, clear the **Include in Search Menu** box.

If the **Allow UI Access** box is cleared, this option is disabled and can't be changed.

6. Review the setting for the **Enable Optimistic Locking** option.

Enabling this option causes the system to check for conflicting updates whenever a user or script attempts to save updates to a custom record entry. If another user or script has saved updates to the same custom record entry during the time that the first user or script was entering updates, an error appears. For more information, see [Enabling Optimistic Locking for Custom Records](#).



Note: By default, this option is enabled for custom record types created in 2012.2 and later, and disabled for custom record types created prior to that release. You should enable this option.

7. If available, review the setting for the **Enable Inline Editing** option.
 - This option is available only if the Inline Editing feature has been enabled at Setup > Company > Setup Tasks > Enable Features, on the Company subtab, Data Management area.
 - This option is enabled by default.
 - When this option is enabled, an Inline Editing switch on list pages for this custom record type is set to **on**. Users can update record instances quickly by changing data directly in each record row. For more information, see the help topic [Using Inline Editing](#).
 - When this option is disabled, the Inline Editing switch isn't available on list pages for this custom record type. Users must drill down from the list to each record entry to edit it.
8. To permit the translated display name of custom record instances to be included in saved searches, check the **Enable Name Translation** box.
9. To permit the definition of hierarchical relationships between records of this type, check **Hierarchy**. This hierarchy can be defined either on the parent record entry or on the child record entry. For more information, see [Defining Hierarchies among Custom Record Values](#).
10. Note that if you check the **Inactive** box, this record type no longer appears on the Record Types list unless you check the **Show Inactives** box at the top of the page. Also, you can no longer select this kind of record from any lists on entities, items, or transactions.

The following subtabs are available to help you further define your custom records before saving:

- **Subtabs** – Create and arrange subtabs on your custom record type. For more information, see [Adding Subtabs to a Custom Record](#).



Note: To save time, create and arrange subtabs for your custom records before defining your custom fields.

- **Sublists** – Add search results as sublists on your custom record type.
For more information, see [Applying Custom Sublists to Custom Record Types](#).

- **Icon** – Select the PNG sprite you want to use to represent this record type in the New Bar, Create New menu, Recent Records menu, Recent Records portlet, and QuickViews. You can use a built-in icon or create a custom one.

For more information, see [Choosing an Icon for a Custom Record](#).

- **Numbering** – Specify the numbering format for the custom record types. For more information, see [Numbering Custom Record Types](#).
- **Permissions** – Select the roles you want to access custom record entry forms, choose a default form, and restrict the forms available here. For information, see [Setting Permissions for a Custom Record Type](#) and [Applying Role-Based Restrictions to Custom Records](#).



Important: For these permissions to apply, you must select **Use Permission List** from the **Access Type** list.

- **Links** – Create links that take you to the list of record entries for this custom record type and select where to place the links. For more information, see [Creating Links to Custom Records](#).
- **Managers** – Define specific employees as managers of the current record type, which enables the employee to modify the custom record type. When defined as a manager, employees are automatically granted custom record view permission. The custom record view permission permits managers to see the list of custom record types but **not** drill down on them.



Note: If an employee has a role that includes the Custom Record Type permission, they have edit access to **all** custom record types. The Managers subtab enables you to grant permission for an employee to the current record type only.

- **Translation** – (when Multi-Language feature is enabled) Define translations for the custom record type name to be used when users change the language preference. For more information, see [Adding Translations for Custom Records](#).

After you save a custom record type, the following subtabs are added:

- **Fields** – Create and arrange the fields for your custom record type. For more information, see [Adding Fields to Custom Record Types](#).
- **Forms** – Customize and select a preferred entry form for your custom record type. For more information, see [Adding Custom Forms for a Record](#).
- **Online Forms** – Create and manage online forms for your custom record types. For more information, see [Adding Custom Online Forms for a Record](#).
- **Child Records** – If this record type is a parent record, its child records are listed here.
- **Parent Records** – If this record type is a child record, its parent records are listed here.

For information about parent and child records, see [Parent-Child Record Relationships](#), [Creating a Parent-Child Relationship](#), and [Using Child Records](#).

Defining Hierarchies among Custom Record Values

A custom record type can be set up to permit users to define hierarchies among values for that custom record type. Note that this hierarchy applies to the relationships between individual instances of the same custom record type, rather than between different custom record types themselves.

For example, a custom record type has been created to store employee information. You can set up hierarchies between instances of this record type to indicate supervisory relationships.

First you must set up the custom record type with the Hierarchy option enabled.

Custom Record Type
Custom Employee

Copy to Account More

Edit Back Actions

Name
Custom Employee

ID
customrecord320

Internal ID
320

Originating Custom Segment

Owner
Sloan, Cindy

Description

☒ Include Name Field

☐ Show ID

Show Creation Date ☐ On Record ☐ On List

Show Last Modified ☐ On Record ☐ On List

Show Owner ☐ On Record ☐ On List ☐ Allow Change

Access Type
Require Custom Record Entries Permission

☒ Allow UI Access

☐ Allow Mobile Access

☒ Allow Attachments

☒ Show Notes

☐ Enable Mail Merge

☐ Records are Ordered

☒ Show Remove Link

☒ Allow Child Record Editing

☒ Allow Delete

☐ Allow Quick Search

☒ Allow Quick Add

☒ Enable System Notes

☒ Include in Global Search

☒ Include in Search Menu

☒ Enable Optimistic Locking

☒ Enable Inline Editing

☐ Enable Name Translation

☒ Hierarchy

☐ Inactive

Fields Subtabs Sublists Icon • Numbering • Forms • Online Forms Permissions Links Managers Translation • Child Records Pare

When the hierarchy functionality is enabled on the custom record type definition page, you can define a parent-child hierarchy between two record instances of the same type. You can define this hierarchy either on the parent record or on the child records.

On a parent record instance, you can click **New Custom Employee** on the Child Records subtab to create a child record.

Custom Employee
Celia Johnson

← → List Search

Edit Back Actions

Name
Celia Johnson

☐ Inactive

Parent

Child Records Notes Files Workflow

View
Default View

New Custom Employee Customize View

Edit Name ^

Edit	Celia Johnson : Cindy
Edit	Celia Johnson : Sandy Sinclair

Edit Back Actions

On a child record instance, you can select the parent record from the list, or create a new record instance to be the parent.

Custom Employee List Search Customize More

Save Cancel

Name *

☐ Inactive

Notes Ellis

User Notes
Remove all

Parent
- New -
Celia Johnson
Celia Johnson : Cindy
Celia Johnson : Cindy : Lewis

Title Memo * Date Time Type Direction

5.11.2024 10:44 am

✓ Add ✕ Cancel + Insert 🗑 Remove

Save Cancel

The Custom Record List page shows the hierarchy for the records in the format <parent record>:<child record>.

Custom Employee List List Search Audit Trail

View Default Customize View New Custom Employee

+ Filters

📄 📄 📄 📄 📄 Show Inactives Edit Quick Sort Total: 4

Edit View	Internal ID	Name ^
Edit View	3	Celia Johnson
Edit View	1	Celia Johnson : Cindy
Edit View	2	Celia Johnson : Cindy : Lewis
Edit View	4	Celia Johnson : Sandy Sinclair

Important: Although this example illustrates only two levels of hierarchy, this feature supports multiple levels of hierarchy among custom record instances.

Enabling Optimistic Locking for Custom Records

Each custom record type has a Enable Optimistic Locking option that can be enabled to protect custom record data integrity.

Custom Record Type Copy to Account More

Warranty

Save Cancel Change ID Actions

Name *

ID
customrecord29

Internal ID
29

Originating Custom Segment

Owner

Description

☒ Include Name Field

☐ Show ID

Access Type

☒ Allow UI Access

☐ Allow Mobile Access

☒ Allow Attachments

☒ Show Notes

☐ Enable Mail Merge

☐ Records are Ordered

☒ Show Remove Link

☐ Allow Child Record Editing

☐ Allow Delete

☐ Allow Quick Search

☐ Allow Quick Add

☒ Enable System Notes

☒ Include In Global Search

☒ Include In Search Menu

☒ Enable Optimistic Locking

☒ Enable Inline Editing

☐ Enable Name Translation

☐ Hierarchy

☐ Inactive



Important: Optimistic locking prevents concurrent updates of custom record entries. This includes updates done by a single user (or script) if they're done in concurrent manner (for example, through two browser tabs).

Be aware that when you update a parent record, the child records associated with this parent may also update. If the child record has enabled optimistic locking, an error will appear if you try to concurrently update the child record entry and its parent.

Enabling this option causes the system to check for conflicting updates whenever a user or script attempts to save updates to an instance of this custom record type. If another user, script, or action has saved updates to the same custom record instance during the time that the first user, script, or action was entering updates, one of the following message is returned:

- "Record has been changed."
- "Unable to save record. Record was changed by a different user. Please reload and try again."

The Enable Optimistic Locking option is enabled by default for all custom record types created as of 2012.2 and later. For backward compatibility, this option is disabled by default for custom record types created prior to 2012.2. You should enable this option, but first review any scripts that may be affected by this change and edit them as needed.

This support for optimistic locking makes custom records' concurrency control consistent with the optimistic locking used generally for NetSuite standard records. Optimistic locking assumes that multiple concurrent transactions can usually complete without affecting each other, so data resources don't have to be locked during the time that transactions are in process. Instead, a check for conflicts occurs before each transaction is committed. For more information about optimistic locking, you can review a related article at http://en.wikipedia.org/wiki/Optimistic_concurrency_control.

Adding Fields to Custom Record Types

You can use the Fields subtab to add fields to your record. Add as many fields as needed to your custom record. If any custom segments have been applied to this custom record type, they're listed on the Fields subtab. Custom segments have an ID that begins with **cseg**.



Important: This subtab is available only after the record type has been saved.

To show inactive fields in the list, check Show Inactives.

To add fields to your custom record:

1. To create a new field for this record type, click **New Field** on the **Fields** subtab.
For step-by-step instructions for creating a new field, refer to [Creating a Custom Field](#).
2. Rearrange the fields as needed.
Select a line and drag it to the required position, or click **Move To Top** or **Move To Bottom**. If you've placed the fields on subtabs, moving a field here will affect its position within that subtab only.
3. To edit a field, click the name of the field in the **Description** column.
4. Make changes as needed, and then click **Save**.
Before saving, NetSuite validates any parent-child combinations to ensure that the values are unique. If the same parent-child combination already exists, an error message appears showing the existing entry, and you can't save the duplicate.

Note: If you want this field to be available for data entry in the Quick Add portlet, check the **Allow Quick Add** box. By default, this option isn't enabled. For more information, see the help topic [Quick Add Portlet](#).

Limiting Search Access to Custom Records

The restrictions to custom record type access set up on the Permissions subtab don't apply to custom record data access by searches. If you want to prevent searches from returning custom record type data, you can:

- restrict search access to specific custom record type fields on a field-by-field basis
- restrict the audience for custom record type saved searches on a search-by-search-basis

Limiting Search and Reporting Access to a Custom Field

You can limit search and reporting access to a custom field.

To limit search and reporting access to a custom field:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Click a custom record type.
3. On the **Fields** subtab for the custom record, click a field.
4. To prevent any searches or reports from returning data for this field, on the **Access** subtab for the field, set the **Default Level for Search/Reporting** option to **None**.

You also can prevent searches or reports run by users with specific roles from returning data for this field. To do so, set the **Default Level for Search/Reporting** option to **None** for specific roles on the **Role** subtab.

For more information, see [Restricting Access to Custom Fields](#).

Limiting Access for a Custom Record Saved Search

You can limit access for a custom record saved search.

To limit access for a custom record saved search:

1. Go to Lists > Search > Saved Searches.
2. Click **Edit** beside the saved search that you want to restrict.
3. On the search page, click the **Audience** subtab and make changes, as needed, to the users who have access.

For example, you can clear the **Public** box or the **Select All** box for roles. Instead, select only the specific roles that will have access to the custom record.

For more information, see the help topic [Defining Audiences for Saved Searches](#).

Applying Role-Based Restrictions to Custom Records

On a role record, you can restrict the access of users with that role to standard records, based on these records' values for department, class, location, employee, and subsidiary (OneWorld) fields. For example,

you could set an employee-based restriction for the Sales Manager role so that those users see only records where they or their subordinates are the sales rep.

For details about setting these restrictions, see the following topics.

- [Setting Employee Restrictions](#)
- [Setting Department, Class, and Location Restrictions](#)
- [Restricting Role Access to Subsidiaries \(OneWorld Only\)](#)
- [Customizing or Creating NetSuite Roles](#)

You can apply the restrictions set on role records for a particular category (department, class, location, employee, or subsidiary) to a custom record, by checking the Apply Role Restrictions box for a list/record custom field that stores values in one of these categories. For example, if you check this box for an Employee list/record custom field, the employee-based restriction set on the Sales Manager role record is applied to this custom record. Those users see only custom records where they or their subordinates are the value for the custom field.

When a custom record has a field that permits restrictions, and the Apply Role Restrictions box is checked, empty fields aren't included when the restrictions are applied. With role restrictions enabled for a custom record, you can't view or edit records where the role-related field is empty. For example, if your user role is restricted to Subsidiary A, and a custom record is created that does not specify a subsidiary, your view is restricted to Subsidiary A. You'll only see records with Subsidiary A selected, and you won't see any records with blank subsidiary fields.

Choose the next step, based on your needs:

- [Applying Role-Based Access Restrictions to Custom Records if the Class, Department, Location, or Subsidiary Field Does Not Yet Exist.](#)
- [Applying Role-Based Access Restrictions to a Custom Record if the Field Already Exists.](#)

Applying Role-Based Access Restrictions to Custom Records if the Class, Department, Location, or Subsidiary Field Does Not Yet Exist

The following procedure describes how to apply role-based access restrictions to a custom record if the class, department, location, or subsidiary field does not yet exist.

For more details about setting role-based restrictions, see [Applying Role-Based Restrictions to Custom Records](#).

To apply role-based access restrictions to a custom record if the class, department, location, or subsidiary field does not yet exist:

1. On the **Fields** subtab of a custom record definition page, click **New Field**.
2. On the new field definition page:
 - a. In the **Label** field, enter a name for the field.
 - b. From the **Type** list, select **List/Record**.
 - c. From the **List/Record** list, select **Class**, **Department**, **Location**, **Employee**, or **Subsidiary**.
 - d. Check the **Apply Role Restrictions** box.
 - e. Complete other settings for the custom field as needed, and click **Save**. For more information, see [Adding Fields to Custom Record Types](#).

Applying Role-Based Access Restrictions to a Custom Record if the Field Already Exists

The following procedure describes how to apply role-based access restrictions to a custom record if the field already exists.

For more details about setting role-based restrictions, see [Applying Role-Based Restrictions to Custom Records](#).

Note: Applying center-based restrictions to custom records is similar to applying role-based restrictions to custom records. For more information about how you can prevent sensitive data from being displayed to unauthorized contacts, see [Limiting Search Access to Custom Records](#).

To apply role-based access restrictions to a custom record if the field already exists:

1. On the **Fields** subtab of a custom record definition page, click the field name.
2. On the field definition page, check the **Apply Role Restrictions** box and click **Save**.

Adding Subtabs to a Custom Record

The Subtabs subtab of a custom record form lets you add custom subtabs to your record to better organize fields. To save time when creating custom fields, create any required custom subtabs first.

To add subtabs:

1. In the **Title** column of the **Subtabs** subtab, enter the name of your new subtab for this record type.

The screenshot shows the 'Custom Record Type' configuration page for 'Equipment'. The 'Subtabs' subtab is selected, displaying a table with the following data:

Title	Translation	Parent
Warranty		
Service		
Purchase Details		

Below the table are buttons for 'Add', 'Cancel', 'Insert', 'Remove', 'Move Up', 'Move Down', 'Move To Top', and 'Move To Bottom'. The 'Add' button is highlighted with a blue box. The 'Title' column header is highlighted with a red box.

2. If needed, designate this subtab as a child of an existing subtab.

In the **Parent** column, select an existing subtab from the list. This list includes any custom subtabs already saved for the current custom record type and any custom subtabs that you've defined for that record type.

Note: Because the parent field is populated with subtabs created for the current custom record type, you can define the subtab as a child only if the custom record has already been saved with predefined subtabs.

3. Click **Add**.
4. Repeat this process for each subtab you want to add.
5. Click **Save**.

Important: For the subtabs to be available to place fields on, you must first create the subtabs and save the record. You can place fields on the new subtabs by editing the field record from the **Fields** subtab.

6. Rearrange the fields as needed. If you haven't yet created fields for your custom record, you must define them first. You can assign a subtab on the Display subtab when you create custom fields. For more information, see [Adding Fields to Custom Record Types](#).
Select a line and drag it to the required position, or use the **Move** buttons.
7. To edit the name of a subtab, click the line for that subtab and change the name in the **Title** column.
8. Click **Save**.

Choosing an Icon for a Custom Record

You can choose an icon to represent a custom record in the NetSuite user interface. Users can quickly identify the record type through this visual cue. These icons are used in the following places:

- Create New menu on records and New column on list pages and list portlets
- Recent Records menu
- Recent Records portlet
- QuickViews

Choose from 70 prebuilt icons or create a custom icon.


The following image shows the available prebuilt icons:



To associate an icon with a custom record:

1. On the **Icon** subtab of the custom record, choose the **Use Built-In Icon** or the **Use Custom Icon** option.
2. If you choose **Use Built-In Icon**, you can select an icon from the list.

Alternatively, you can click the picker to view available icons and select the one you want to use.

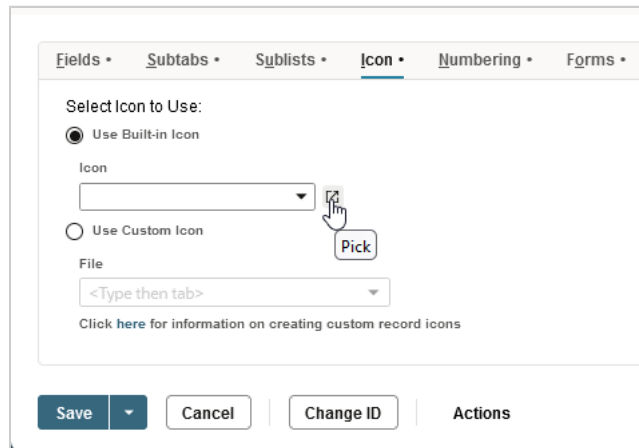

The screenshot shows the 'Icon' subtab in the NetSuite interface. Under 'Select Icon to Use:', the 'Use Built-in Icon' radio button is selected. Below it is an 'Icon' dropdown menu. To the right of the dropdown is a small icon picker button. A hand cursor is clicking this button. Below the 'Icon' dropdown is a 'File' dropdown menu with the placeholder text '<Type then tab>'. To the right of the 'File' dropdown is a 'Pick' button. At the bottom of the subtab are buttons for 'Save', 'Cancel', 'Change ID', and 'Actions'.


3. If you choose **Use Custom Icon**, select its file. For requirements for custom icons and instructions for creating them, see [Creating Icons for Custom Records](#).
4. Click **Save**.

Creating Icons for Custom Records

You can create custom icons to represent custom records in the NetSuite user interface.

To use a custom record icon:

1. Create an image file for your icon.
2. Open the custom record you want to add the icon to.
3. On the **Icon** subtab, select the **Use Custom Icon** option.
4. Click the **New** button next to the **File** field.

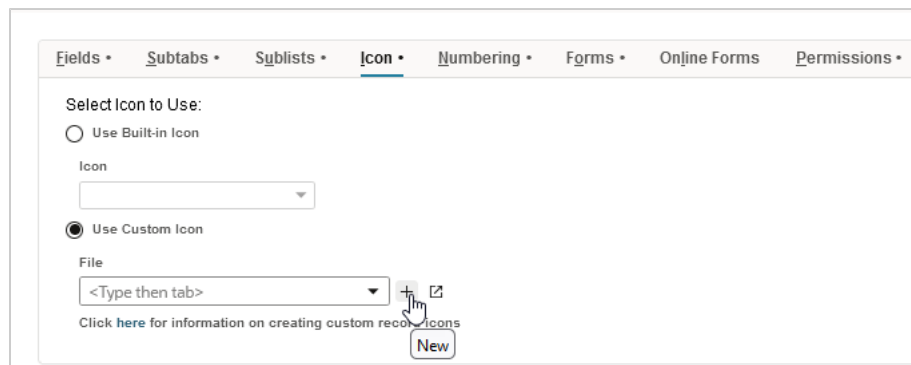

The screenshot shows the 'Icon' subtab in the NetSuite interface. Under 'Select Icon to Use:', the 'Use Custom Icon' radio button is selected. Below it is an 'Icon' dropdown menu. Below the 'Icon' dropdown is a 'File' dropdown menu with the placeholder text '<Type then tab>'. To the right of the 'File' dropdown is a small icon picker button. A hand cursor is clicking this button. Below the 'File' dropdown is a 'New' button. At the bottom of the subtab are buttons for 'Save', 'Cancel', 'Change ID', and 'Actions'.

5. In the File popup window, select an icon image.
6. Click **Save**. Then save the custom record.



Important: Make sure your custom icons meet the requirements outlined in the following sections. Take the time to thoroughly read and understand the requirements, and test your icon. You should read these requirements thoroughly and give yourself enough time to test your icon. You'll need basic image-editing skills and software like Adobe Photoshop to create and edit your icons, and save as transparent PNG files.

Creating custom icons for custom records in NetSuite involves understanding version requirements, file specifications, and image construction techniques. For more details on each step and technical requirement, see the following topics:

- [The Four Icon Versions for Custom Records](#)
- [The Icon Sprite Image File for Custom Records](#)
- [File Format for Custom Record Icons](#)
- [Constructing Your Custom Record Icon File](#)
- [Sample Icons for Custom Records](#)

The Four Icon Versions for Custom Records

This topic describes the versions of icons available creating custom icons. For an overview of general requirements and file specifications, see [Creating Icons for Custom Records](#).

A custom record icon is made up of a set of four slightly varied versions of your icon, ranging from grayscale to full-color. These four versions are required so that the icon can be displayed with maximum clarity and contrast on a variety of backgrounds.



Image 1: Grayscale icon for dark backgrounds. This icon is an outline version of the full-color icon, used on dark color themes. Because the default color theme is dark-colored, this version is used most often.

Image 2: Grayscale icon for light backgrounds. This is another outline version of the icon, used on light color themes. This version is used less often because most color themes have dark backgrounds.

Image 3: Color icon for dark backgrounds. This is a full-color version of the icon, optimized for use on dark backgrounds. This version is used as the color icon that replaces the grayscale version when a cursor is nearby.


Image 4: Color icon for light backgrounds. This is another full-color version of the icon, optimized for use on light backgrounds. This version is used in menus, which always have a light background.

The Icon Sprite Image File for Custom Records

This topic describes the icon sprite image file for creating custom icons. For information about the four icon versions, see [The Four Icon Versions for Custom Records](#). For an overview of general requirements and file specifications, see [Creating Icons for Custom Records](#).

The four icon versions reside, side-by-side, in a single image file known as a sprite. Using coordinates and other data stored in CSS, NetSuite displays the proper icon version needed and crops out and hides the rest of the sprite image. Therefore, for your icons to display properly, they must be an exact size and at an exact location within the image file.

Each icon must be no larger than 16 pixels by 16 pixels. Any artwork that goes beyond the 16x16 boundary will not be displayed.

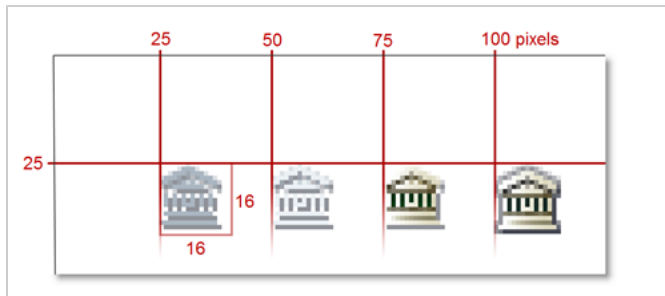

Each icon version must be located at the following locations within the image file, as measured from the upper-left corner of the image:


Icon Version	x Coordinate	y Coordinate
Grayscale icon for dark backgrounds	25	25
Grayscale icon for light backgrounds	50	25
Color icon for dark backgrounds	75	25
Color icon for light backgrounds	100	25

Most image-editing applications have guides that you can set up to help you keep track of these spacing requirements. You can also download the sample icon file pack at the bottom of this topic, which contains various template files that will help keep your icons in order.

File Format for Custom Record Icons

This topic describes the file format for custom record icons. For an overview of general requirements and file specifications, see [Creating Icons for Custom Records](#).

Save the icon image file as a 24-bit .png file with an 8-bit alpha channel for the transparent background. Your image editing application may refer to this file format as **PNG-24**. You should always use the PNG-24 format when saving your icon image file. Using .gif or .jpeg formats is discouraged due to their limited (or lack of) transparent backgrounds. Other image file formats aren't accepted.

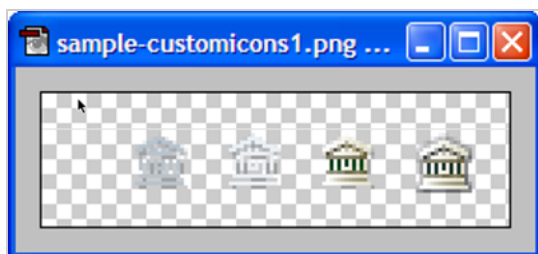

Constructing Your Custom Record Icon File

These steps explain how to create an icon image file that meets NetSuite's custom record icon requirements. For an overview of general requirements and file specifications, see [Creating Icons for Custom Records](#).


To Construct Your Icon File:

1. You can create the icon yourself or obtain one from a royalty-free source. When you have the icon, the first step in creating the final icon image file is to create an outline of it. This outline is used to create the two grayscale icon versions.




The outline version of your icon should be plain, but it should also have sufficient detail so that it can be recognized when it appears on your dashboard's New Bar. Start by using a 1-pixel pencil tool in your image editing application, and trace an outline of your icon. In addition to the outline, trace some of the internal components of your icon to make it be easier to recognize.

2. Take the outline tracing of your icon and follow these directions to create your grayscale icon for dark backgrounds:

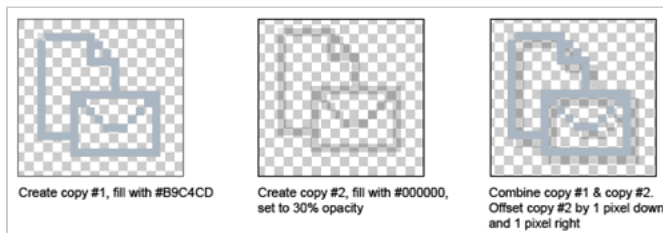

3. Take the outline tracing of your icon and follow these directions to create your grayscale icon for light backgrounds:

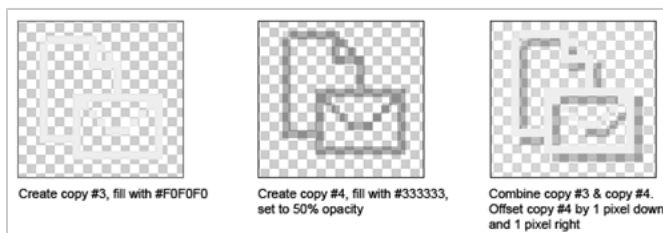

4. After the two grayscale versions are complete, create the color versions. This involves placing the color icon that you already have on a variety of background colors to check its appearance. Try these background colors:

- #5A759C – default color for the New Bar
- #F1F4F9 – default color for the Recent Records menu
- #EBECEP – default color for the Create New menu

Try other colors, such as light and dark reds and then test the colors of your NetSuite color theme. After you see how your color icon looks on various background colors, you can create the last version of your icon.

If you believe that your color icon looks fine regardless of background color, make a copy of it to be placed in the fourth slot of your .png image.

5. Place the four versions of your icon in a single PNG image, using the proper spacing previously described. Save your icon image file as a PNG-24 file, and upload it to your NetSuite account.

Sample Icons for Custom Records

Click [here](#) to download our sample set of custom icons (.zip archive, 14 KB), designed to help you get started.

For an overview of general requirements and file specifications, see [Creating Icons for Custom Records](#).

Numbering Custom Record Types

You can have numbers automatically assigned to your custom record instances for easier tracking and designation.

 **Note:** Note the following:

- Prefixes and suffixes are applied to numbering as configured on the custom record. However, the internal ID assigned to a custom record instance can differ from the autogenerated number or manually-specified ID number.
- With autonumbering enabled, simultaneously creating custom records or scripts may cause duplicate IDs for the custom records. To avoid duplicates, process records one by one, and let the system finish processing each entry before creating a new one.
- The maximum number of instances (MAXINT) permitted for a record type is 2,000,000,000. When the internal ID limit for a custom record type is reached, NetSuite reports an error if you attempt to create a new instance of the record type. Existing records are not affected, but you won't be able to add new records of that type.

 **Warning:** After you enable autonumbering, numbers can't be removed from records. If you disable autonumbering later, only new records won't be numbered.

To assign automatic numbers to a custom record type:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. In the **Edit** column, click the name of the record type you want to have autonumbered.
3. Click the **Numbering** subtab.
4. To turn on automatic numbering, check the **Enable** box.
5. In the **Prefix** field, enter any numbers or letters you want added before each automatically-generated number.
6. In the **Suffix** field, enter any numbers or letters you want added after each automatically-generated number.
7. In the **Minimum Digits** field, enter the number or total digits you want as the minimum for autogenerated numbers.
This adds placeholder zeros to numbers that don't have the number of minimum digits you set. For example, enter **4** to have the first number added as **0001**. You can enter a value between 0 and 20.
8. In the **Initial Number** field, enter the number you want to use to start automatic numbering.
For example, if you enter **20**, the first record instance created is numbered **20**, and no record instances are numbered below **20**. The next record instance numbered would be **21**.
9. If you want to be able to enter a custom number when you edit the record instance, check the **Allow Override** box.
10. To number record instances that have already been created, check the **Update** box.

If you have already enabled automatic numbering, checking this box does not change any existing numbers, because those numbers have already been referenced in the system.

11. Click **Save**.



Important: Be aware that, as of 2010.2, handling of the Name criteria for custom records searches has been modified. These changes particularly affect autonumbered custom record types. Previously, the value specified for the Name criteria was compared to the Name field values of custom records, to IDs containing prefixes, and to IDs with prefixes. Now, the Name criteria value is compared only to Name field values, providing a more clearly delineated set of results. To search for ID values, users can use the ID criteria.

Adding Custom Forms for a Record

The Forms subtab on the Custom Record Type page lets you create custom entry forms for your records. You can create an unlimited number of entry forms for your record type. After you have created custom entry forms, you can select which form is the preferred entry form.



Important: This subtab is available only after the record type has been saved.

By default, at least one form is automatically assigned to the custom record type. This custom record form can be customized as needed.

To create custom forms for the record:

1. In the **Forms** subtab, click **Customize** or **Edit** next to the entry form you want to customize. Selecting **Customize** enables you create a new custom form based on a standard form. Selecting **Edit** enables you customize an existing custom form.
2. Customize the form as needed and then save it. For step-by-step instructions on how to customize a form, see [Creating Custom Entry and Transaction Forms](#).
3. In the **Preferred** column, check the entry form to set as the preferred form for this record type.



Note: If you have also set preferred forms on the **Permissions** subtab, the preferred form set on the **Permissions** subtab takes precedence over the role set on the **Forms** subtab.

For example, you set Custom Form A as the preferred form on the **Forms** subtab. On the **Permissions** subtab, you set the default form for the Sales Rep role to Custom Form B. When a sales rep creates a new record, Custom Form B is selected by default.

4. Click **Save**.

Online Custom Record Forms

An online custom record form is used to receive information from customers on your website. Information received from online forms automatically creates or updates records in your NetSuite account.

For example, you may link to a warranty custom record form from your website. You require your customers to include their name, the end date of the warranty, the item purchased, serial number, the start date and the type of warranty.

You can customize the appearance of online forms as well as the information you require from anyone who submits these forms. When creating an Online Form, start with either a default template or your own HTML template and then modify as needed for the current form.

- **Default NetSuite Template:** provides the ability to customize page messages, field labels and properties, and so on.
- **HTML Template:** provides the ability to customize HTML templates that have already been created.

For more information, see the following:

- [Adding Custom Online Forms for a Record](#)
- [Creating Online Custom Record Forms](#)
- [Linking Online Custom Record Forms to My Website](#)
- [Creating HTML Templates for Online Custom Record Forms](#)

Adding Custom Online Forms for a Record

The Online Forms subtab lets you create online entry forms to capture information and create new records from outside of your NetSuite account.



Important: This subtab isn't available until the record type has been saved.

To add custom online forms:

On the **Online Forms** subtab, do one of the following:

- To create an online form for this record type, click **New Online Form**.
- To create an online form based on an HTML template, click **New Online HTML Form**.
- To edit an existing online form, click the name of the form.

Creating Online Custom Record Forms

You can create an online custom record form to receive information from customers on your website.

To create an online custom record form:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. In the **Edit** column, click the name of the record you want to create an online form for.
3. In the **Online Forms** subtab, click **New Online Form** or **New Online HTML Form**.

Selecting **New Online Form** enables you to create a form based on the NetSuite default template. Selecting **New Online HTML Form** lets you create a form based on a custom HTML template you've created. You must first create the custom HTML template before you can use it for an online form.

The steps involved for creating an Online Form versus an Online HTML Form are the same with a couple of exceptions as noted in the following procedure.

4. Enter a title for this form.

This title is displayed at the top of the form.

5. If creating an HTML template (these options **aren't** available for Default templates):
 - In the **Template** field, select the HTML template you want to use for this form.
You can create online HTML form templates at Lists > Marketing > Marketing Templates.
 - To have NetSuite insert labels for your form fields, check the **Include Field Labels** box.
If you leave this box unchecked, you must include field labels in your HTML template file.
6. If creating a Default template (these options **not** available for HTML templates):
 - In the **Message** field, enter a message to display at the top of the form.
This message can include up to 500 HTML characters.

 **Note:** The message can be formatted using built-in rich text formatting tools. If you prefer to edit the message directly with HTML tags, click **Source**.

 - In the **Detail Message** field on the **Detail Message** subtab, enter a message to display at the bottom of the form.
This message can include up to 4000 HTML characters. Again, you can use the built-in rich text formatting tools or view as HTML only.
7. If you want to link to this form from a website, check the **Enable Online** box.
8. If required, check the **Inactive** box. You can always reactivate it at a later date.
9. In the **Select Fields** subtab, edit any existing fields or add new fields as needed.
10. Rearrange the order of fields as needed. Click a line and drag it to the required position or click **Move Up, Move Down, Move to Top** or **Move to Bottom**.
11. In the **Set Up Workflow** subtab:
 - To receive notification when this form is submitted, enter the addresses you want email messages to be sent to in the **Notify by Email** field.
 - To specify a page for customers to be sent to after they submit the form, enter the URL for that page in the **Redirect to URL** field. By default, the user who submits the form is redirected the home page of your primary website.
 - In the **Handle Duplicate Records** field, select how you want NetSuite to handle records that are duplicates of existing records.
12. In the **Set Up Appearance** subtab:

With the exception of the Font, the fields described in the following list apply only to default templates.

 - In the **Number of Columns Shown** field, select the number of columns for the form.
 - In the **Color Theme** field, select a color theme for the form.
 - In the **Font** field, select a font for the form.
 - To expand any subtabs on the form, check the **Unlayered Sections** box.
 - In the **Button Alignment** field, select where to place the buttons on the form.
 - In the **Form Logo** field, select a logo to place at the top of the form.
You can upload new logos at Setup > Intranet > Images or Commerce > Site Builder > Content > Images.

As you define the appearance options for your form, keep in mind that your end users use various sized browsers and types. For example, if you're designing on a high-resolution large monitor, several columns may display fine. However, for smaller low-resolution monitors it can be better to construct your layout with fewer columns. Also, if customers may need to print the form, ensure that the colors you select will properly display for both color and black and white printers.

13. In the **Custom Code** subtab:

The **Custom Code** subtab is available only if you have a SuiteScript feature enabled. For detailed information about using custom JavaScript files to perform functions, refer to [SuiteScript](#).

- In the **Script File** field, select the JavaScript file that contains the required scripts for this form.



Important: You must upload your file to the File Cabinet before you can select it. Client script file records or files referenced in client scripts must not have the **Hide in SuiteBundle** preference enabled.

- In the **Page Init Function** field, enter the script name to be called from your script file when this entry form is first loaded.
- In the **Save Record Function** field, enter the script name to be called from your script file when this record is saved.
- In the **Validate Field Function** field, enter the script name to be called from your script file when a field on this entry form is changed.
- In the **Field Changed Function** field, enter the script name to be called from your script file when a change made to a field is accepted.

14. Click **Save**.

15. If needed, preview your new form.

Select the form from the Online Form subtab and then click **Preview**.

16. Add links to your online form to your website.

For details on how link to your online form see [Creating Links to Custom Records](#).

Now, customers can enter information about your website, and records are automatically created or updated in NetSuite.

Linking Online Custom Record Forms to My Website

You can link to an online custom record form from your website.

If you have a NetSuite website, you can create a link to an online form in one of your information items, category descriptions, and from any other HTML description field.

To link to an online custom form from your NetSuite website:

1. Click the **Setup** tab.
2. On the Setup page, under the Customization heading, click **Record Types**.
The Custom Record Types list opens.
3. In the **Edit** column, click the name of the record type you want to edit.
4. Click the **Online Forms** subtab.
5. Click the name of the form you want to link to.
6. On the Online Custom Record Form page, click the **External** subtab.
7. Copy the URL from the **Publishable Form URL** field.
You can highlight the URL with your mouse, right-click, and then click **Copy**.
8. Go to Commerce > Site Builder > Content > Information Items.
9. Click **Edit** next to the information item you want to link to your online custom record form.
10. Select the **Basic** subtab.

11. Enter or paste the link in the description field you want the link to appear in.

For example, the account administrator of Wolfe Electronics wants to include a line in a **Detailed Description** field that says, "Click here to register for your warranty." The word "here" links to the custom record form.

You'd enter the following HTML code:

```
1 | <p>Click <a href='the Online Custom Record Form's URL''>here</a> to register for your warranty.</p>
```

12. Click **Save**.

Now your customers can follow the link to your online custom record form on your website. After this form is submitted, a record is created with the customer's information.

You can also link to your online custom record form from an external website or from an email message. To do this, copy and paste the form's URL into a link in your HTML document.

For more information about entering HTML in your website, see the help topic [Using HTML in Description Fields](#).

For more information about online custom record forms, see [Creating Online Custom Record Forms](#).

Creating HTML Templates for Online Custom Record Forms

To use an HTML template when creating your online forms, you must first create the template and store it within NetSuite. You can create your HTML templates locally on your own machine and then upload them to the NetSuite File Cabinet or you can use the built-in NetSuite template creator. See the following topics:

- [Creating an HTML Template Locally](#)
- [Using NetSuite Tags](#)
- [Uploading an HTML Template](#)
- [Creating an HTML Form Template](#)



Note: Online HTML form templates are particularly useful if you **don't** use a NetSuite website, but you use NetSuite online forms.

Creating an HTML Template Locally

When creating an online form template on your local machine, you can define how the fields are arranged, which fields to include on the form and the style of the page. Use standard HTML code to create the template as you would for any other HTML form and include the following elements:

- `<NLFORM>` and `</form>` tags to define the beginning and end of the form.
- Tags for each NetSuite field included on the form. For more information, see [Using NetSuite Tags](#).
- An input tag that defines the button your customers use to submit the form.

```
1 | <input type="submit" value="Button Text">
```

You can substitute text in the button by changing the value in the code. For example, if you want the text in the button to read Submit Form, the code would be:

```
1 | <input type="submit" value="Submit Form">
```

For example, the following HTML code is a representation of an acceptable form template:

```

1 <html>
2 <head>
3 </head>
4 <body>
5 <NLFORM>
6 <p>Enter the name of your company: <NLNAME></p>
7 <p>Enter an email address we can use to contact you: <NLCUSTRECORD1></p>
8 <p><input type="submit" value="Submit Form"></p>
9 </form>
10 </body>
11 </html>

```



Important: The resulting file must include all tags, including `<html>`, `<head>` and `<body>` tags, to ensure that it's a valid HTML file recognizable by NetSuite.

Using NetSuite Tags

Field tags in an HTML form are defined as `<NLTAG>`, where TAG is the ID of the field. Each field in NetSuite has a unique ID and therefore a unique tag definition.



Note: Field IDs are incorporated into tag definitions for fields. When creating custom fields to use in HTML templates, you should specify IDs for each field and use consistent naming conventions that make sense in your business environment. If the default NetSuite IDs are accepted when creating your custom fields, the tags may not make sense in your HTML code. The result can make it more difficult to know exactly what the field references.

If you've chosen to include a required Name field on your custom record, you must include the tag, `<NLNAME>`, for that field in your template.

To determine the tags to use for each field on your custom record:

1. Click Customization > List, Records, & Fields > Record Types.
2. In the **Edit** column, click the name of the record type you want to create a template for.
3. On the **Fields** subtab, click the name of the field you want to place in your template.
4. The URL for this page is displayed in the Address bar of your browser. The ID for the selected field is at the end of the URL.

Uploading an HTML Template

After you create your own HTML template, you must upload the template to NetSuite to make it available when creating online HTML forms.



Note: HTML templates are saved by default in the Marketing Templates folder in your File Cabinet. To change the folder you use to store your templates, an account administrator or sales administrator can go to Setup > Sales > Preferences > Sales Preferences.

To upload an HTML template:

1. Click Documents > Files > File Cabinet.
2. In the File Cabinet, go to Templates > Marketing Templates.
3. Click the **Add File** button.
4. Browse your system files to locate and select the HTML template you want to add.

5. Click **Open**. The template is added to the folder.

Creating an HTML Form Template

HTML form templates can be created by selecting an existing template and setting additional properties for it or by designing a new HTML template in NetSuite.

To create an HTML form template record:

1. Go to Lists > Marketing > Marketing Templates > New.
2. On the Select Type page, click **Online Form**.
3. In the **Name** field, enter a name for the template.
4. In the **Description** field, enter any additional information for this template.
The information should describe the template — it's not a component of the displayed form. Useful information includes details about where and how this template should be used or descriptions of any unusual fields or field relationships.
5. Click the **Template** subtab.
6. If needed, enter a title for the template in the **Title** field. If you don't provide a title, the title is sourced from the **Name** field.
7. Choose a **Create Template From** option:
 - To base the current template record on an existing record, select **File**. This option enables you to choose a file from the file cabinet or upload a new template file.
 - To create a new template using your own layout, select **Text Editor**. This option enables you to enter text and fields for the new template in the text editor.
8. If you chose the **File** option, select an existing template to use as the base for the current template. Otherwise, continue to the next step.

You can select a template in the following ways:

- Enter the first few letters of the template name in the file selection field and then press the Tab key to automatically select a matching template. If multiple templates match the text, a list displays, enabling you to select the required template.
- To select from a list of templates, click the down arrow in the file selection field to display a list from which you can select the required template.
- To upload an HTML template from your system, click the **New** icon, and upload the appropriate file. For information about creating your own HTML templates, see [Creating an HTML Template Locally](#).

After a template is selected, you can view detailed information about the template by clicking the **Open** icon.

9. If you chose the **Text Editor** option, enter text, as needed, in the text editor. To include fields in the template, do the following:
 1. To select the type of record the field appears on, select a field type from the **Field Type** list.
 2. To add a NetSuite field into the HTML template, select a field from the Insert **Field** list.



Note: If you previously selected the File option instead of the Text Editor option, you don't need to enter template tags because the file selected in the create template from file steps contains the tag information.

10. If required, you can limit access to this template to yourself or to a specific group. To do so.
 1. Click the **Restrict Access** subtab.

2. To make yourself the only person in your company who can use this template, check the **Private** box
 3. To restrict the template to members of a specific group, in the **Restrict to a Group** field, enter the name of the group.
11. Click **Save**. Now, when you create an HTML online form, you can select this template.

Setting Up a Permissions List for a Custom Record Type

You can manage access to a custom record type's data by setting up a permissions list on the Permissions subtab of the record type page.

The Permissions subtab lets you restrict access by role to your custom records and the forms used to enter the records. By restricting access to custom records, you can have greater control over who sees the information specific to your business. By restricting access to the entry form, you can control the entry form used by your employees to enter custom records.

When you set permissions for your custom records, you restrict access to the record entries, **not** the record type. To edit, view, or enter a custom record type, you must have a role with permission to access to custom record types.

If you **don't** set permissions here, anyone with access to custom record entries can view, edit, and enter custom records for this type.

The role-based restrictions you set on this subtab are also available on the record for each role. Changes made on role records related to this custom record's permissions are reflected here.



Important: For the permission settings in the Permissions subtab to take affect, the Use Permission List option must be selected for Access Type. Be aware that these permission settings aren't used to restrict search access to custom record data. You can limit searches' access to custom record data on a per-field or per-search basis. For more information, see [Limiting Search Access to Custom Records](#).

To set up a permissions list for a record type:

1. On a custom record type page, click the **Permissions** subtab.



Note: If the custom record type is associated with a custom segment, the Permissions subtab isn't available. The permissions must be set on the custom segment configuration page.

2. In the **Role** column, select the role you want to have access to custom record entries of this type.
3. In the **Level** column, select a level of access for this role. Available options include:
 - **None:** People with this role can't use custom records of this type.
 - **View:** People with this role can view custom records of this type.
 - **Create:** People with this role can view and create custom records of this type.
 - **Edit:** People with this role can view, create, and edit custom records of this type.
 - **Full:** People with this role can view, create, edit, and delete records of this type.
4. Select a value in the **Restrict** column to limit the access of users with the selected role to custom records of this type:
 - To restrict users with this role to viewing or editing the records of this type that only they or their subordinates created, select **Viewing and Editing**.

- To permit users with this role to view all records of this type but restrict them to editing the records that only they or their subordinates created, select **Editing Only**.
 - To permit users with this role to view and edit all records of this type, leave this column blank.
5. In the **Default Form** column, select a default entry form for this role to use when entering records of this type.



Note: The default form you set here for a role takes precedence over the preferred form setting on the **Forms** subtab.

For example, you set Custom Record Form A as the preferred form on the **Forms** subtab. On the **Permissions** subtab, you set the default form for the Sales Rep role to Custom Record Form B. When a sales rep creates a new record, Custom Form Record B is selected by default.

6. To make the default form the only entry form available to this role, check the box in the **Restrict Form** column.
7. From the **Search Form** list, select a custom search form to be used for searches of this record type, if one is available.
8. From the **Search Results** list, select a custom search to be used to limit results for searches of this record type, if one is available.
9. From the **List View**, **Dashboard View**, and **Sublist View** lists, select a custom search to be used to limit displayed results for these lists, if one is available. To make the selected view the only one available to this role, check a box in one of the **Restricted** columns.
10. Click **Add**.
11. Repeat these steps for each role you want to give access to.
12. Click **Save**.

Creating Links to Custom Records

The Links subtab lets you create links throughout your account to access your custom records. When determining where to place links for the records, it's important to consider all roles that will be using the record type and how they will be using it to determine the most logical place for the links.



Important: After you create a link to a custom record type, this link displays only for users with permission to access the custom record type

To add a link to a custom record:

1. In the **Center** column of the **Links** subtab, select the center you want the link to be visible in.
If needed, you can add links to this custom record in each center.
2. In the **Section** column, select the tab you want the link to display on.
The available tabs depend on the selected center. If a center **hasn't** been selected, no tabs are listed.
3. In the **Category** column, select a category for your link, either a built-in one or a custom one you've created. For more information about creating custom categories, see the help topic [Creating Center Categories](#).
4. In the **Links** column, select the type of link you want to add to the menu:
 - To have the custom record list option display in the menu and open to the Custom Record List page, select **Custom Record**, where Custom Record is the name of the custom record. This option also adds New and Search to the menu.

- To have the new custom record option display in the menu and open to the New Custom Record page, select **New Custom Record**, where Custom Record is the name of the custom record.
 - To have the search custom record option display on the menu and open to the Custom Record Search page, select **Search Custom Record**, where Custom Record is the name of the custom record.
5. In the **Label** column, enter a name for this link.
If you don't enter a label, the name defaults to the custom record type name.
 6. (Optional) In the **Translation** column, enter any translated names required for the link. Then click **Done**.
 7. (Optional) In the **Insert Before** column, choose where you want to place the link. If you don't provide a value in the **Insert Before** column, the link will appear below the last link in your chosen category.
 8. Click **Add**.
 9. Repeat these steps for each link you want to add.
If you want to edit a link, click the line for that link and make changes as needed.
 10. Click **Save**.

Adding Translations for Custom Records

If the Multi-Language feature is enabled in your account, you can translate the name of a custom record, its custom subtab titles, and its custom sublist labels, so that they match the language of the NetSuite user interface. You can also translate the names of instances of a custom record. For more details, see the following:

- [Multiple Languages Translation Management](#)
- [Translating a Custom Record Name](#)
- [Translating Custom Record Subtab Titles](#)
- [Translating Custom Record Sublist Labels](#)
- [Translating Custom Record Instance Names](#)

Note: If you use the multi-language feature, you should manage your translations using translation collections maintained in Manage Translations. It's more efficient to use a translation collection for managing translations for multiple languages than it is to define translations on the Translation subtab. For more information, see [Multiple Languages Translation Management](#).

Before you can add translations, you must select translation languages in general company preferences on the Languages subtab. For more information, see the help topic [Setting General Account Preferences](#). The language subtab lists:

- System-supported languages that can be used for the NetSuite user interface (available at Home > Set Preferences)
- Additional languages that can be used for website translations only (not available at Home > Set Preferences)

You should enter translations for system-supported languages only, because these are the only languages that can be displayed in the user interface. For custom records, NetSuite uses the user's language preference for translations. For standard records, translations are returned and updated in the company's primary language. For more information, see the help topic [Configuring Multiple Languages](#).

Multiple Languages Translation Management

This topic provides information about managing multiple language translations. For an overview of translation options for custom records, see [Adding Translations for Custom Records](#).

The Manage Translations feature enables you to manage your language translations using translation collections. If you use the multi-language feature, you should edit translations for custom records using a translation collection because it's more efficient than making the edits on the Translation subtab of custom records.

Language customizations made on the Translation subtab of custom records override the language set up in Home > Set Preferences. If you choose to edit translations using the Translation subtab, language changes will be visible only to users with the same language preference.

If you use SDF, you can enter translations in forms in the SDF XML. You should define translations using a translation collection. If you modify a form and enter a translation string directly in the form, the translations aren't connected to terms or translations collections and are visible only to users with the same language preference. If you change your language preference, then you must also define the translations for that language.

For more information, refer to these topics:

- [Configuring Multiple Languages](#)
- [Translation Collections Overview](#)

Translating a Custom Record Name

This topic describes how to translate a custom record name. For an overview of translation options, see [Adding Translations for Custom Records](#).

You can define translations for a custom record type name (at Customization > Lists, Records & Fields > Record Types) on the Translation subtab of the custom record page:

Custom Record Type

Save Cancel

Name *
Book

ID

Originating Custom Segment

Owner
Wolfe, S

Description

☒ Include Name Field

☐ Show ID

Show Creation Date ☐ On Record ☐ On List

Show Last Modified ☐ On Record ☐ On List

Show Owner ☐ On Record ☐ On List ☐ Allow Change

Access Type
Require Custom Re...tries Permission

☒ Allow UI Access

☐ Allow Mobile Access

☒ Allow Attachments

☒ Show Notes

☐ Enable Mail Merge

☐ Records are Ordered

☒ Show Remove Link ☐ Allow Child Record Editing ☐ Allow Delete

☐ Allow Quick Search

☒ Allow Quick Add

☒ Enable System Notes

☒ Include In Global Search

☒ Include In Search Menu

☒ Enable Optimistic Locking

☒ Enable Inline Editing

☐ Enable Name Translation

☐ Hierarchy

☐ Inactive

Language	Translation
Chinese (Simplified)	
Chinese (Traditional)	
Czech	Rezervovat
Danish	Boek
Dutch	
Finnish	
French (Canada)	Livre
French (France)	

The **Name** field has a 300-character limit.

Note: Translated names that are available on a menu are truncated to 128 characters.

Translating Custom Record Subtab Titles

This topic describes how to translate custom record subtab titles. For an overview of translation options, see [Adding Translations for Custom Records](#).

You can define translations for a custom record type's subtab titles, on the Subtabs subtab of the custom record page:

The screenshot shows the 'Subtabs' subtab of a custom record configuration page. The 'Translation' column is highlighted with a red box, indicating where to click to edit the translation. The subtab title is 'Chapter'. Below the table are buttons for 'Add', 'Cancel', 'Insert', 'Remove', 'Move Up', 'Move Down', 'Move To Top', and 'Move To Bottom'.

For details about custom record subtabs, see [Adding Subtabs to a Custom Record](#).

Translating Custom Record Sublist Labels

This topic describes how to translate custom record sublist labels. For an overview of translation options, see [Adding Translations for Custom Records](#).

You can define translations for custom record type sublist labels on the Sublists subtab of the custom record page:

The screenshot shows the 'Sublists' subtab of a custom record configuration page. A modal window is open for editing the translation for the 'Purchasing View' sublist. The modal shows input fields for Spanish, Swedish, Thai, Turkish, and Vietnamese translations. The 'Spanish' field is filled with 'Compres'. Below the modal are buttons for 'Add', 'Cancel', 'Insert', 'Remove', 'Move Up', 'Move Down', 'Move To Top', and 'Move To Bottom'.

Custom sublists present information related to the record you're viewing, based on results from a selected saved search of the record type or a related record type. You can apply a custom sublist to a custom record, so it displays on forms for that record. For more information, see [Applying Custom Sublists to Custom Record Types](#).

Translating Custom Record Instance Names

This topic describes how to translate custom record instance names. For an overview of translation options, see [Adding Translations for Custom Records](#).

In addition to providing translations for the name of the custom record type itself, you can provide translations for individual instances of that record type. For example, in addition to providing the Spanish translation "Muebles" for a custom record type named Furniture, you can provide translations for the individual instances of that record type, such as chair, table, bed.

To permit translation of custom record instance names, check the Enable Name Translation box for the custom record type. This option is disabled by default.

Custom Record Type More

Save Cancel

Name * Furniture

ID

Originating Custom Segment

Owner Wolfe, A

Description

☒ Include Name Field

☐ Show ID

Show Creation Date ☐ On Record ☐ On List

Show Last Modified ☐ On Record ☐ On List

Show Owner ☐ On Record ☐ On List ☐ Allow Change

Access Type Require Custom Re...ries Permission

☒ Allow UI Access

☐ Allow Mobile Access

☒ Allow Attachments

☒ Show Notes

☐ Enable Mail Merge

☐ Records are Ordered

☒ Show Remove Link ☐ Allow Child Record Editing ☐ Allow Delete

☐ Allow Quick Search

☒ Allow Quick Add

☒ Enable System Notes

☒ Include in Global Search

☒ Include in Search Menu

☒ Enable Optimistic Locking

☒ Enable Inline Editing

☒ Enable Name Translation

☐ Hierarchy

☐ Inactive

Subtabs Sublists Icon Numbering Permissions Links Managers Translation

Title * Translation Parent

✓ Add X Cancel + Insert Remove Move Up Move Down Move To Top Move To Bottom

Save Cancel

You can enable the Enable Name Translation option for a custom record type if **all** of the following are true:

- The Multi-Language feature is enabled for the account.
- The Include Name Field option is enabled for the custom record type.
- Numbering isn't enabled for the custom record type. (The Enable box on the Numbering subtab isn't checked.)

When the Enable Name Translation box is checked for a custom record type, each custom record instance has a Translation subtab.

In addition, you can use the translated display name in saved searches to help users find custom record instances in their language preference. When setting up a saved search, add Display Name (Translated) and Language to the Results subtab, and add Language as a filter to the Criteria subtab. This way, the saved search results are filtered by the user's language preference

Furniture List Search Customize More

Save Cancel

Name * Chair ☐ Inactive

Notes Files Translation

Language ^	Name
Chinese (Simplified)	
Chinese (Traditional)	
Czech	
Danish	
Dutch	Stoel
Finnish	
French (Canada)	Chaise
French (France)	
German	

Parent-Child Record Relationships

A child record type is a record that's referenced from another record in NetSuite. The information in the child record is associated with another record at a higher level, which is the parent record. You can use a child record to track multiple fields of specific information that are related to the parent record. Child records are always of the List/Record type. For more information, see [Using Child Records](#).

For example, a typical customer record includes sublists, represented as tables in subtabs on a form, for note and message record instances. In this case the customer record is a parent of the note and message records, and therefore the notes and messages are child records of the customer record. The child record sublist name on the parent record is the plural form of the parent record type.

Parent Record: Customer


Child Records: Notes, Messages (sublists)

You can also create custom parent-child relationships. For example, you can create a custom record type called Service Note and associate it with an Equipment custom record type. In this example, the Service Note record is associated as the child of the parent Equipment record type. On the Service Note record type definition, you can create custom fields for service person, price of service, whether the service was covered under warranty, and the equipment's next date of service. With this parent-child relationship established, defined as a custom field, employees can then view these service notes when working on the parent Equipment records.

Parent-child relationships can exist between:

- Two standard records
- Two custom records
- One standard record and one custom record

The following diagram demonstrates the parent-child record relationship. In this example both the parent and child records are custom records.

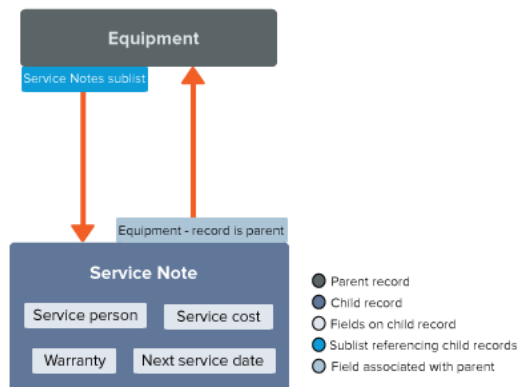

To add a child record to a parent record, the parent record must already exist, meaning that previously it must have been created and saved. When you reopen the parent record in edit mode, you can then add existing child records or create new ones. You can't add child records at the time when you're creating a new parent record.

Note: A child record may not be available on a form for a parent record that was created through transformation from another record type. For example, if you define a custom record as a child record of sales order, this custom child record isn't available on forms for sales orders transformed from quotes

For more information, see the following topics:

- [Establishing a Parent-Child Relationship](#)
- [Creating a Parent-Child Relationship](#)
- [Types of Parent-Child Relationships](#)
- [Using Child Records](#)

Watch the following video for an overview of parent-child record relationships.

 [Overview of Parent-Child Record Relationships \(video 1 of 5\)](#)

Also, see:

- [Creating a Parent-Child Record Relationship \(video 2 of 5\)](#)
- [Example of Creating a Parent-Child Relationship Between a Standard Record and a Custom Record \(video 3 of 5\)](#)
- [Example of Creating a Parent-Child Relationship Between Custom Records \(video 4 of 5\)](#)
- [Types of Relationships Between Parent-Child Instances \(video 5 of 5\)](#)

Establishing a Parent-Child Relationship

You can establish parent-child relationships in NetSuite between standard or custom records using custom fields. The process varies slightly depending on whether you're working from the Custom Field configuration page or the Custom Record Type page. You can also specify where child records display on the parent record. For detailed steps, see the following topics:

- [Defining a Parent-Child Relationship Using the Custom Field Configuration Page](#)
- [Defining a Parent-Child Relationship from a Custom Record Type Page](#)
- [Setting the Display Subtab for Child Records](#)

To establish a parent-child relationship between records, you must create a custom field and define both the parent and the child. This applies to both custom and standard records.

You can define the parent and child on the:

- Custom Field configuration page, when creating a new custom field
- New Field configuration page from a Custom Record Type page

Watch the following video about creating a parent-child record relationship.

 [Creating a Parent-Child Record Relationship \(video 2 of 5\)](#)

Defining a Parent-Child Relationship Using the Custom Field Configuration Page

This topic describes how to define a parent and child relationship between records using the Custom Field configuration page. For a general overview of establishing parent-child relationships, see [Establishing a Parent-Child Relationship](#).

To define the parent-child relationship

1. Create or open a custom field. For more information, see [Creating a Custom Field](#).

- a. Select a field type of **List/Record** or **Multiple Select**.
- b. In the **List/Record** field, select a record type.
- c. Check the **Parent is Record** box.

The screenshot shows the 'Custom CRM Field' configuration page. The 'TYPE' is set to 'List/Record'. The 'LIST/RECORD' field is set to 'W.E. Equipment'. The 'STORE VALUE' checkbox is checked. The 'RECORD IS PARENT' checkbox is checked. The 'GLOBAL SEARCH' checkbox is unchecked. The 'INACTIVE' checkbox is unchecked. The 'APPLIES TO' subtab is selected, showing 'TASK' and 'PHONE CALL' checkboxes. The 'SAVE' button is highlighted.

The record entered in the List/Record field is the parent record.

2. To define the child record, complete the following steps:
 - a. Select the **Applies To** subtab.
 - b. Check the box next to the child record. If applicable, you can select multiple records as child records.

The screenshot shows the 'Custom CRM Field' configuration page with the 'Applies To' subtab selected. The 'TASK' checkbox is checked. The 'PHONE CALL' checkbox is unchecked. The 'EVENT' checkbox is unchecked. The 'AVAILABLE EXTERNALLY' checkbox is unchecked. The 'SAVE' button is highlighted.

Defining a Parent-Child Relationship from a Custom Record Type Page

This topic describes how to define parent and child records using the New Field configuration page from a custom record type page. For a general overview of establishing parent-child relationships, see [Establishing a Parent-Child Relationship](#).

To define parent-child records:

1. Create a custom child record as described in [Creating Custom Record Types](#).
2. On the **Fields** subtab, to define the parent record, click **New Field**.

Custom Record Type
W.E. Equipment Service Note

Save Cancel Change ID Actions

NAME *
W.E. Equipment Service Note

ID
customrecord_we equip_sn
ORIGINATING CUSTOM SEGMENT

OWNER
JL Wolfe

DESCRIPTION

ACCESS TYPE
Require Custom Rec...Entries Permission

ALLOW UI ACCESS
ALLOW MOBILE ACCESS
ALLOW ATTACHMENTS
SHOW NOTES
ENABLE MAIL MERGE
RECORDS ARE ORDERED
SHOW REMOVE LINK
ALLOW CHILD RECORD EDITING
ALLOW DELETE
ALLOW QUICK SEARCH

ALLOW QUICK ADD
ENABLE SYSTEM NOTES
INCLUDE IN GLOBAL SEARCH
INCLUDE IN SEARCH MENU
ENABLE OPTIMISTIC LOCKING
ENABLE INLINE EDITING
ENABLE NAME TRANSLATION
HIERARCHY
INACTIVE

INCLUDE NAME FIELD
SHOW ID
SHOW CREATION DATE ON RECORD ON LIST
SHOW LAST MODIFIED ON RECORD ON LIST
SHOW OWNER ON RECORD ON LIST ALLOW CHANGE

SHOW INACTIVES

Fields Subtabs Sublists Icon Numbering Forms Online Forms Permissions Links Managers Translation Child Records Parent Records History System Notes

New Field Move To Top Move To Bottom

DESCRIPTION	ID	TYPE	LIST/RECORD	TAB	SHOW IN LIST
Equipment Name	custrecord29	List/Record	W.E. Equipment		No
Service Person	custrecord19	List/Record	Employee	Service Notes	No
Service Cost	custrecord15	Free-Form Text		Service Notes	No

3. Complete the following steps:
 - a. In the **Label** field, enter a field name.
 - b. Select a field type of **List/Record** or **Multiple Select**.
 - c. In the **List/Record** field, select a record type.
 - d. Check the **Record is Parent** box.

The record entered in the List/Record field becomes the parent record of the child record. If applicable, you can define multiple custom fields for multiple child records related to the parent record.

Setting the Display Subtab for Child Records

This topic describes how to define the subtab on the parent record where the child record appears. For a general overview of establishing parent-child relationships, see [Establishing a Parent-Child Relationship](#).

On the child field definition page, click the Display subtab. Then on the Parent Subtab field, enter of the subtab where the child record appears.

Display Validation & Defaulting Sourcing & Filtering Access Translation History

INSERT BEFORE
- Unchanged -

SUBTAB

DISPLAY TYPE
Normal

HELP

PARENT SUBTAB

ALLOW QUICK ADD

Save Cancel Change ID Apply to Forms Actions

Creating a Parent-Child Relationship

The following process describes an example of creating a parent-child relationship using a custom field. For this example, we're going to create a custom field and assign the parent record and child record.

The parent record uses the custom field to pull in child record information. We want to associate a list of customers to our case records, so we'll create an entity custom field called Customer Records. In this example, the parent record is Case, and the child record is Customer. This Customer field displays a list of customers associated with the case.

To create the parent-child relationship:

1. Go to Customization > Lists, Records, & Fields [Custom Field] > New, where [Custom Field] is the required field type.
The type of field you select depends on the type of record you want to associate.
2. In the **Label** field, enter a name for your custom field. For this example, enter **Customer Records**.
3. In the **Type** field, select **List/Record** or **Multiple Select**.
To associate multiple records to another record, select **Multiple Select**. In our example, Multiple Select lets you associate multiple customer records to a case.
4. In the **List/Record** field, select the parent record you want to associate this list (of customer records, in this case) with. For this example, select **Case**. Note that this field is available only if you selected a type of List/Record or Multiple Select.
5. To make the Case record a parent of the Customer child record, check the **Record is Parent** box. With this box checked, a child sublist appears on the parent record. The Record is Parent box is available after you select a valid record type in the List/Record field.
6. On the **Applies To** subtab, you specify the child record. Check the box beside the type of child record you want to associate with the parent record previously selected in the List/Record field. If applicable, you can check more than one record type. For this example, check **Customer**.
7. Click the **Display** subtab.
8. In the **Parent Subtab** field, select the subtab where you want this list to display on the parent record. Note that this field is available only when **Record is Parent** is checked.
9. Click **Save**.

You'll now have a parent record of Case with a subtab called Customers that lists all customers affected by this case.

Note: When associating a list with a transaction, you can select only transactions with forms that can be customized. For example, you can associate a list of cases with a cash sale but not to a bill.

The following transaction types are available as parents:

- Cash Refund
- Cash Sale
- Credit Memo
- Estimate
- Invoice
- Opportunity

- Purchase Order
- Return Authorization
- Sales Order

To watch training videos about creating parent-child relationships, see [Parent-Child Record Relationship Training Videos](#).

For information about triggering user events, see [Triggering User Events for Parent-Child Records](#).

Parent-Child Record Relationship Training Videos

The videos in this topic provide examples of how to create parent-child record relationships. For details about how to create parent-child relationships, see [Creating a Parent-Child Relationship](#).

Watch the following video for an example of creating a parent-child relationship between a standard record and a custom record.

 [Example of Creating a Parent-Child Relationship Between a Standard Record and a Custom Record \(video 3 of 5\)](#)

Watch the following video for an example of creating a parent-child relationship between custom records.

 [Example of Creating a Parent-Child Relationship Between Custom Records \(video 4 of 5\)](#)

Triggering User Events for Parent-Child Records

This topic describes when user events are triggered for parent-child records. For details about how to create parent-child relationships, see [Creating a Parent-Child Relationship](#).

User events are triggered when a custom child record is associated with or separated from its parent record, unless the custom field referencing the parent record is of type Multiple Select. A beforeLoad, beforeSubmit, or afterSubmit event occurs if a record is associated or separated.

The user events support scripting and workflows based on association and separation of custom child records. The event is audited on the custom child record as an edit execution event type and is supported in SuiteScript 2.0. For more information about user events, see the help topic [SuiteScript 2.x User Event Script Type](#).

Types of Parent-Child Relationships

Parent-child relationships can exist between two standard records, two custom records, or a combination of standard and custom records. For more information, see [Parent-Child Record Relationships](#).

Watch the following video about types of relationships between parent-child instances.

 [Types of Relationships Between Parent-Child Instances \(video 5 of 5\)](#)

You can create a parent and child record relationship in various ways, including:

- One parent record type to one child record type
- Many parent record types to many child record types
- Hierarchy of parent-child instances of the same record type

The topics in this section refer to both record types and record instances. Parent-Child relationships are established between the record types during record type configuration. Record types can have multiple instances. For example, a child record type of Address can have multiple instances such as home address, mailing address, and shipping address.

To learn more about parent-child record relationships, see the following sections:

- [Types of Relationships Between Parent-Child Record Instances](#)
- [Custom Record Type Fields that Affect Parent-Child Relationship on Custom Record](#)
- [One Parent Record Type to One Child Record Type](#)
- [Many Parent Record Types to Many Child Record Types](#)
- [Hierarchy of Parent-Child Instances of the Same Record Type](#)
- [Parent-Child Relationship Limitations](#)

Types of Relationships Between Parent-Child Record Instances

There are limits to how many child record instances can be associated with or separated from a parent record instance. There are also limits to the number of parent record instances that a child record can associate to. These limits are based on the relationships between the parent and child record types.

The most common association between record instances permits a one-to-many relationship, where you can have either of the following:

- One parent record instance associated with many child record instances
- One child record instance associated with many parent record instances

In these cases, a single child record type is associated with a single parent record type. However, there can be multiple instances of either the child record or the parent record. For more information, see [One Parent Record Type to One Child Record Type](#).

You also have an association between instances that permits a many-to-many relationship. In this case, you have many parent record types and many child record types. Each parent record instance can have many associated child record instances. At the same time, each child record instance can have many associated parent record instances. For more information, see [Many Parent Record Types to Many Child Record Types](#).

Currently, it's possible to define a one-to-one relationship by workflows or custom scripts only. For more information, see [One-to-One Parent-Child Relationship Between Instances of Different Record Types](#).

Custom Record Type Fields that Affect Parent-Child Relationship on Custom Record

The following fields on the custom record definition page affect the functionality of the parent-child relationship on instances of custom records. For more information about these fields, see:

- [Configuring File and Child Record Settings](#)
- [Defining Search and Edit Settings](#)

Show Remove Link – When cleared, child record sublist Remove links aren't visible on the parent record, which prevents users from separating child records from the parent record.

Allow Child Record Editing – When checked, users can directly edit record instances of this custom record type when they display as children in a sublist on a parent record.

Allow Delete – When checked, users can delete record instances of this type when they appear as child records in a sublist on a parent record.

Hierarchy – When checked, users can create parent-child relationships between records of the same custom record type. To do so, create a custom field which will be used to establish the relationship


between the custom records, as described in [Hierarchy of Parent-Child Instances of the Same Record Type](#).

One Parent Record Type to One Child Record Type

In a one record type to another record type parent-child association, you have one field on a child record with Record is Parent checked. When the Record is Parent box is checked on the child record, a child record sublist is automatically added to the parent record. Therefore, the parent record has one sublist to which it can associate with one or more child record instances. These record instances all are of the same record type. The records can be custom or standard.

Example of One Parent Record Type to One Child Record Type

An example of a one-to-one record type relationship is a customer parent record type with an address child record type. Typically, in a one record type to another record type scenario, the child record has multiple instances, but the parent record has only one instance. For example, a customer record instance can have three unique addresses. The addresses are the child record instances.

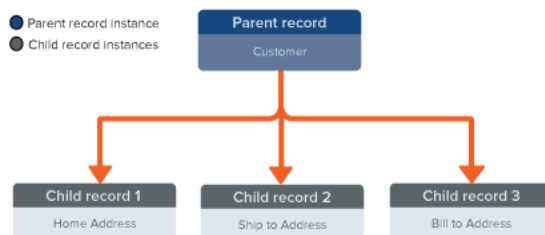

One-to-One Parent-Child Relationship Between Instances of Different Record Types

A parent-child relationship where one parent instance can associate with only one child instance is currently possible only by creating a custom script or workflow. By default, users can associate one or more instances.

One Child Instance Associated with Many Parent Instances

The one child instance associated with many parent instances scenario has the same relationship as the one parent instance associated with many child instances scenario. There's one parent record type and one child record type. However, the relationship between instances is unique. Usually, one parent instance associates with one or more child instances. The parent record has a sublist where each row in the list shows a specific associated child record instance.

On the child record instance, there's a link to the parent record instance. An example, illustrated by the Equipment field with Record is Parent box checked, is shown in the [Parent-Child Record Relationships](#) topic diagram.


In the less common one-to-many scenario, you associate the same child record instance with multiple parent record instances of the same record type. In other words, many parent record instances associate with the same child record instance. The individual parent record instances have sublists showing the associated child record instance. On the child record instance there's a multi-select field in which many parent records are listed.

You create this type of relationship by checking Record is Parent on the custom field and selecting a field type of Multiple Select instead of List/Record.

Example of Many Parent Instances to One Child Instance

The following example shows a relationship of one child record type to one parent record type. In this case, there are multiple parent record instances for one child record instance. The specific hotel room, the parent record, has multiple booking reservations, the child records, for that room.

In this example, Child record 3 (Reservation#3) associates with two parent records.

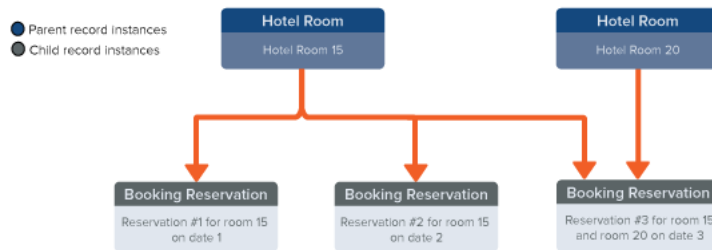

Hotel Rooms 15 and 20 are both instances of the Hotel Room custom record type.

Child record instances are of the custom record type Booking Reservation, where:

- The first Booking Reservation instance is booked for date 1 and is a child record of Hotel Room 15. On the parent record instance for Hotel Room 15, the booking reservation instance is shown as the first row in a Booking Reservation sublist. For example, Booking Reservation- name of child record type.

Note: The child record sublist on the parent record, in this case, Booking Reservation, has the same name as the child record type.

- The second Booking Reservation for Hotel Room 15 is similar but reserved for date 2. On the parent record instance for Hotel Room 15, the booking reservation instance is shown as the second row in the Booking Reservation sublist.
- The third Booking Reservation for date 3 has two parent record instances. On the parent record instance for Hotel Room 15, the booking reservation instance is shown as the third row in the Booking Reservation sublist. On the parent record instance for Hotel Room 20, the booking reservation instance is shown as the first row in the Booking Reservation sublist.

Many Parent Record Types to Many Child Record Types

In a many-to-many record type relationship, more than one field is defined on multiple child record types with Record is Parent checked. Each field can refer to one or more parent record types as well. If many parent to many child associations are created, many sublists show on the parent record type instances. Each parent record can associate with various child records of various types.

Example of Many Parent Record Types to Many Child Record Types

For example, consider a many-to-many relationship with:

- Two parent record types: Hotel Room and Parking Space
- Two child record types: Booking Reservation and Pricing Rate

Hotel rooms have:

- Booking reservations
- Seasonal pricing information

Parking spaces have:

- Booking reservations

Example setup:


- Two parent record types: 1 – Hotel Room, and 2 – Parking Space
- Two child record types: A – Booking Reservation, and B – Pricing Rate
- Two list/record type custom fields applied to child record type A, where:
 - Both fields have Record is Parent checked
 - The first field is a list/record type that refers to parent record type 1
 - The second field is a list/record type that refers to parent record type 2, creating a many-to-many relationship

When the field definitions are saved, the Hotel Room parent record type shows sublists for Booking Reservation and Pricing Rate.

- One list/record type custom field applied to child record type B, has the Record is Parent box checked, and the List/Record selection refers to parent record type 1

On parent record instances of type 1, there are two sublists. The first can associate instances of child record type A, and the second can associate instances of child record type B. On parent record instances of type 2, there's only one sublist which can associate instances of child record type A.

The following diagram shows the relationships between the parent and child instances.

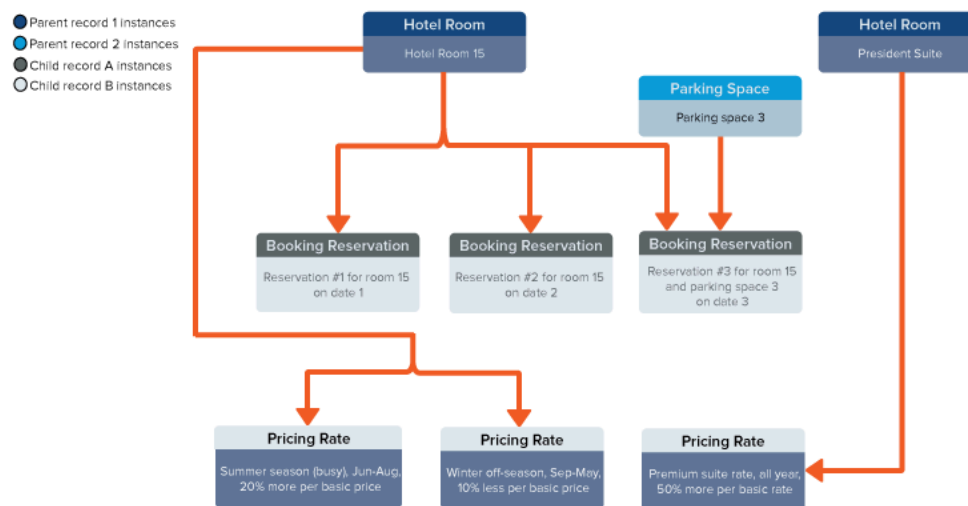

Hotel Room 15 and the President Suite are instances of parent record type Hotel Room. These instances have two sublists:

- The first sublist refers to Booking Reservations
- The second sublist refers to Pricing Rates of hotel rooms

Hotel Room 15 has three associated reservations, shown as rows in a sublist on the parent record instance. These reservations are numbered 1, 2, and 3. Reservation #3 is also associated as a child of Parking Space 3, which is of record type Parking Space. This means that the customer reserved the hotel room together with the parking space.

Hotel Room instances have associated Pricing Rate instances that determine how hotel room rates are calculated. In this example, Hotel Room 15, which is a standard room, has two seasonal rates. Based on the reservation date, the room could have rates associated in a:

- Summer Season Rate (Jun-Aug, 20% more) sublist
- Winter Off-season Rate (Sep-May, 10% less) sublist

The President Suite hotel room has only one year-round Premium Rate associated with it (50% more). In this example, the room has no associated reservation.

Hierarchy of Parent-Child Instances of the Same Record Type

You can create a hierarchy of records where parent and child records are of the same type. Each instance can be a parent of another instance of the same type. A parent record can be a parent of another instance of the same record type. Such behavior can be configured on the custom field definition of the child record, where:

- The Record is Parent box is checked
- List/Record selection is the same record type as the record type where the relation field is applied


Note: Administrators can alternately model this behavior more easily on custom record types by checking the **Hierarchy** box on the custom record definition. For more information, see [Custom Record Type Fields that Affect Parent-Child Relationship on Custom Record](#).

Example of Hierarchy of Parent Instances of the Same Record Type

An example of a hierarchy of the same record type relationship is a locomotive with several wagons. The record type is Train Carriage. Parent record instance 1 is Locomotive. Parent record instance 2 is Wagon 2 and is a child of parent record 1. Parent record 3 is Wagon 3 and is a child of parent record 2. This pattern continues until the last wagon. The last wagon is the terminal child record. This terminal child record has an empty sublist with no other child records and is a child of the preceding parent record wagon.

The following example has four instances of the same the record type, Train Carriage.

- Parent record instance Locomotive 1 has no associated parent but has associated instance (Wagon 2) in the child sublist
- Parent record Wagon 2 has an association with its parent instance (Locomotive 1) and has an associated child record (Wagon 3) in the child sublist
- Parent record Wagon 3 has an association with its parent instance (Wagon 2) and has an associated child record (Wagon Last) in the child sublist
- Terminal Wagon Last has no instances associated in its child sublist but holds an association with its parent instance (Wagon 3)

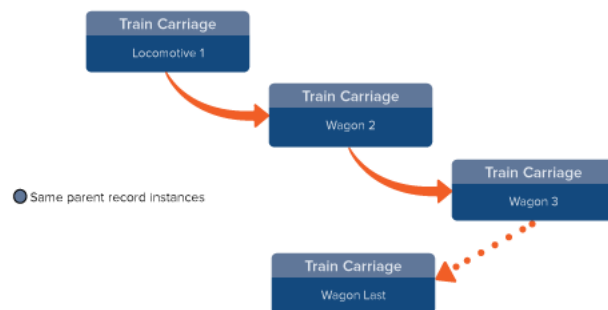

For detailed steps about how to create this example, see [Steps for Creating Hierarchical Custom Records](#).

Steps for Creating Hierarchical Custom Records

This example describes the steps for creating a hierarchical custom record for the train carriage scenario described in [Hierarchy of Parent-Child Instances of the Same Record Type](#), which you should read before continuing. For this example, all record instances are created using a single custom record.

Watch the following help video for details about how to create the example described in this topic.



Complete the following steps:

1. [Creating the Custom Record Type for Steps in Creating Hierarchical Custom Records](#)
2. [Creating the Record Instances for Steps in Creating Hierarchical Custom Records](#)
3. [Creating the Custom Field for Steps in Creating Hierarchical Custom Records](#)

Creating the Custom Record Type for Steps in Creating Hierarchical Custom Records

To create the example described in the [Steps for Creating Hierarchical Custom Records](#) topic, first, create the custom record type to be used for the hierarchy. In this example, the custom record type is Train Carriage.

To create the custom record type

1. Go to Customization > Lists, Records, & Fields > Record Types > New.
2. In the **Name** field, enter **Train Carriage**.
3. Check the **Hierarchy** box to enable parent-child relationships.
4. Click **Save**.

Next steps:

- [Creating the Record Instances for Steps in Creating Hierarchical Custom Records](#)
- [Creating the Custom Field for Steps in Creating Hierarchical Custom Records](#)

Creating the Record Instances for Steps in Creating Hierarchical Custom Records

After creating the custom record type described in [Creating the Custom Record Type for Steps in Creating Hierarchical Custom Records](#), you can create the required record instances.

For this example, assume your company has multiple locomotives, each with associated wagons. The following steps create record instances for one locomotive and its wagons.

To create the record instances:

1. From the **Record Types** page, locate **Train Carriage** and click **New Record**.
2. In the **Name** field, enter **Locomotive 1** (the parent record).
3. Leave the **Parent** field blank.
4. Click **Save & New**.
5. In the **Name** field, enter **Wagon 2** (the first child record instance).
6. In the **Parent** field, select **Locomotive 1**.
7. Click **Save & New**.
8. In the **Name** field, enter **Wagon 3** (the second child record instance).
9. In the **Parent** field, select **Locomotive 1 : Wagon 2**.
10. Click **Save & New**.
11. In the **Name** field, enter **Wagon Last** (the final child record).
12. In the **Parent** field, select **Locomotive 1 : Wagon 2 : Wagon 3**.
13. Click **Save**.

The final list of record instances looks like this:

Edit View	Internal ID	Name ↑
Edit View	1	Locomotive 1
Edit View	2	Locomotive 1 : Wagon 2
Edit View	3	Locomotive 1 : Wagon 2 : Wagon 3
Edit View	4	Locomotive 1 : Wagon 2 : Wagon 3 : Wagon Last

Next, complete the steps described in [Creating the Custom Field for Steps in Creating Hierarchical Custom Records](#).

Creating the Custom Field for Steps in Creating Hierarchical Custom Records

After completing the steps to create the record instances described in [Creating the Record Instances for Steps in Creating Hierarchical Custom Records](#), you can create the custom field that will be used on forms. For this example, the following steps create a custom entity field.

To create the custom field:

1. Go to Customization > Lists, Records, & Fields > Entity Fields > New.
2. In the **Label** field, enter **Train Carriage**.
3. In the **Type** field, select **List/Record**.
4. In the **List/Record** field, select **Train Carriage**.
5. On the **Applies To** subtab, select where the field should apply. For this example, check **Customer** and **Project**.
6. Click the **Display** subtab.
7. In the **Subtab** field, select where you want the field to appear. For this example, select **Main**.
8. Click **Save**.

You can now add this field to your forms as needed. For more information, see [Configuring Fields or Screens](#).

The field on a form looks similar to this:

Parent-Child Relationship Limitations

Note: This section describes some limitations to the types of parent-child relationships you can create by customizing records. However, through scripting, you can enforce the type of relationship described here.

Users with the Administrator role can't enforce an exclusive parent-child relationship, where:

- One child record belongs exclusively to one parent record, and
- The child record can't exist without the parent record

This means, the child record is inseparable from the parent record and exists only if the parent does. The child record has no meaning on its own.

For example, a serial number child record can't belong exclusively to an item number parent record. The serial number is an essential part of the item number and has no meaning without it. You can't load the serial number record without the context of the item.

The following behaviors must be possible:

- You can change the parent field on the child record
- The child record exists only with its parent
- The life cycle of the child record matches the life cycle of the parent record.
- You can access the child record only from the parent record (the child record does not have its own entry form)
- The child record is deleted when the parent record is deleted

You must use scripting to enforce the behaviors required for exclusive parent-child relationships. For more information, see the help topic [SuiteScript 2.x Scripting Records and Subrecords](#).

Using Child Records

After you've created your child record types, you can enter data into records from the child record list or parent records.

See the following:

- [Entering Data in Child Records from the Child Record List](#)
- [Entering Data in Child Records from the Parent Record](#)

Entering Data in Child Records from the Child Record List

You can enter data in child records from the child record list.

To enter data in child records from the child record list:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. Click **New Record** next to the name of the child record type you want to enter records for.
3. In the field that links to the parent record, select the record you want this child record to link to.
For example, in the **Equipment** field, you'd select the machine you're entering service notes for.
4. Enter data in the remaining fields on the record.

5. When you're finished, choose one of these options to submit the information to NetSuite:
 - Click **Save** to submit the information and return to the child record list.
 - Click **Save & New** to submit the information and add another record.

You can now view this child record from its parent record.

Entering Data in Child Records from the Parent Record

You can enter data in child records from the parent record. To do so, open the list of records where your parent record appears. Choose one of the following options:

- If the parent record is a custom record:
 1. Go to Customization > Lists, Records & Fields > Record Types.
 2. Click the name of the custom record list you want to open.

If you have a link in your center directly to your parent record list, you can click that link instead of the performing the preceding steps.

- If your parent record is a standard NetSuite record, on the Lists page, click the name of the list you want.

You can associate child records with any of the standard NetSuite records. However, for records that are transformed from other records, child record association can't occur when the records are first created. The association occurs only after the records have been saved.

1. Click **View** next to the name of the record you would like to enter data for.
2. Click the subtab where the child record list appears.
3. Click **New** above the list to enter a new child record.
4. Enter data in the fields on the record.
5. When you're finished, choose one of two options to submit the information to NetSuite:
 - To submit the information and return to the parent record, click **Save**.
 - To submit the information and add another child record, click **Save & New**.

To view a child record from the parent record, click the link for the child record in the list of child records. To edit a child record from the parent record, click **Edit**.

By default, inactive child records aren't shown on the parent record. If you customize the sublist and the saved search filters by the **Inactive** box, inactive records can be shown in the sublist.

 **Warning:** A child record may not be available on a form for a parent record that was created through transformation from another record type. For example, if you define a custom record as a child record of sales order, this custom child record isn't available on forms for sales orders transformed from quotes. The child record doesn't exist on the quote, so it can't be included when transforming the quote to a sales order. However, if you define a custom record as a child record of quote, the custom child record will be available on forms for sales orders transformed from quotes.

Sourcing with Custom Records

You can use sourcing with custom record types for both standard and custom records. You must first create a List/Record field on your custom record type for the kind of record you want to source information from. After creating that field, you can select it in the Source List field.

For example, let's say you've created an Intern custom record type. You want to include information for your intern records about the employees supervising each intern. You can do this by first creating an Employee field with a list of your employees. Then you can source information from employee records to other fields on your intern records.

For information about sourcing and custom fields, see [Setting Sourcing Criteria](#).

To use sourcing with custom record types:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. In the **Edit** column, click the name of the record type you want to create a sourced field for.
3. Click the **Fields** subtab.
4. Click **New Field**.
5. In the **Label** field, enter the name of your new field.
For example, if you're creating a field to list your employees, you'd enter **Employee**.
6. In the **Type** field, select **List/Record**.
7. In the **List/Record** field, select the kind of record you want to include information from in other fields on your record type.
For example, if you want to include information about your employees you'd select **Employee**.
8. Click **Save**.
Now, you can create your sourced fields.
9. Click the **Fields** subtab.
10. Click **New Field**.
11. In the **Label** field, enter a description for your field.
For example, if you wanted to include an employee's email address you would enter **Employee Email**.
12. In the **Type** field, select a type of custom field.
The type you select must match the type of field you want to source from.
For example, if you wanted to include an email address you would select **Email Address** in the **Type** field.
For a list of standard fields and their types, see [Available Standard Fields and Field Types for Custom Record Types and Source Lists](#).
13. If you're creating a List/Record field, select the appropriate list or record in the **List/Record** field.
For example, if you're sourcing from the **Sales Rep** field on Customer records, select **Employee** in the **List/Record** field because your sales reps are employees.
14. Click the **Sourcing & Filtering** subtab.
15. In the **Source List** field, select the record type you want to source information from.
This field lists the field you created in Steps 1-9.
You can create multiple source lists for your custom records. To do so, repeat Steps 1-9 for each kind of record you want to be able to source information from.
16. In the **Source From** field, select the field you want to include information from. If you click to view the list, sourcing and filtering options are available.
You must select a **Source List** before you can select a field.
The selected field's type must match the type selected in the **Type** field.
17. When you have finished, click **Save**.

18. To add **Source List** fields, repeat Steps 1-9.

To add sourced fields, repeat Steps 10-17.

You can now include information from standard and custom fields and records on your custom record types. For more information about available standard fields and field types, see [Available Standard Fields and Field Types for Custom Record Types and Source Lists](#)

Available Standard Fields and Field Types for Custom Record Types and Source Lists

Custom record types and source lists can use sourcing with the standard fields and records listed in the following table. In addition to standard records, you can use custom fields and record types for sourcing. When using custom fields and record types for sourcing, the field type selected depends on the field type of the custom field being sourced from.

For example, let's say you've created a custom entity check box field for Quarterly Mailing. If you want to source information from the Quarterly Mailing field to a custom CRM field for cases, you must select Check Box in the Type field when creating your CRM field.

Customer, Employee, Partner, and Vendor Fields

Field	Type	Customer	Employee	Partner	Vendor
Name/ID	Free-Form Text	×	×	×	×
Bill To	Text Area	×	×	—	×
Ship To	Text Area	×	—	—	×
Phone	Phone Number	×	×	×	×
Fax	Phone Number	×	—	×	×
E-mail	E-mail Address	×	×	×	×
City	Free-Form Text	×	×	—	×
State	Free-Form Text	×	×	—	×
Zip	Free-Form Text	×	×	—	×
Country	Free-Form Text	×	×	—	×
Sales Rep	List/Record*	×	—	—	—
Expected Close Date	Date	×	—	—	—
Renewal Date	Date	×	—	—	—
Contact	Free-Form Text	×	—	—	×
Alt. Contact	Free-Form Text	×	—	—	×
Alt. Phone	Phone Number	×	—	—	×
Balance	Currency	×	—	—	×
Credit Limit	Currency	×	—	—	×

Field	Type	Customer	Employee	Partner	Vendor
Account	Free-Form Text	×	—	—	×
1099 Eligible	Check Box	—	—	—	×
Tax ID	Free-Form Text	—	—	—	×
Company Name	Free-Form Text	—	—	×	×
Supervisor	List/Record*	—	×	—	—
Soc. Sec. #	Free-Form Text	—	×	—	—

* In the List/Record field, you must select the Employee list for sourcing to work properly.

Item

Field	Type
Name	Free-Form Text
Display Name	Free-Form Text
Vendor Name	Free-Form Text
Online Name	Free-Form Text
Available Online	Check Box
Base Price	Currency
Cost	Currency
Preferred Vendor	List/Record*
On Hand	Decimal Number

* In the List/Record Field, you must select the Vendor list for sourcing to work properly.

Updating Custom Record Types

If you no longer need a custom record type, you can inactivate or delete the custom record type.

Inactivating a Custom Record Type

If a custom record type isn't actively being used, you can inactivate it. The custom record type becomes inactive but isn't deleted.

To inactivate a custom record type:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. At the top of the page, check the **Show Inactives** box.
3. Check the box in the **Inactive** column next to the record type you want to inactivate.

4. Click **Submit**.

Deleting a Custom Record Type

If a custom record type isn't being used by any custom fields or workflows and is no longer needed, you can delete it.

To delete a custom record type:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. In the **Edit** column, click the name of the custom record type you want to delete.
3. In the Actions menu, click **Delete**.

After the deletion, the list of custom records no longer includes the deleted record type.



Important: You can't delete a custom record type that's used by custom fields or workflows. When you attempt to delete a custom record type that has this kind of dependency, you receive error messages with lists of custom field names, custom workflow names, or both that depend on the custom record. You must delete any dependent custom fields and workflows before you can delete the record type.

Viewing or Editing a Custom Record Type

The following procedure describes how to view or edit a custom record type.

To view or edit a custom record type:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. In the **Edit** column, click the name of the custom record type you want to view or edit.
3. Record types have the following subtabs for you to further define them:
 - **Fields** – Create and rearrange the fields for your custom record type. For more information, see [Adding Fields to Custom Record Types](#).
 - **Subtabs** – Create and arrange subtabs for your custom record type. For more information, see [Adding Subtabs to a Custom Record](#).



Note: To save time, create and arrange subtabs for your custom records before defining your custom fields.

- **Sublists** – Add search results as sublists on your custom record type. For more information, see [Applying Custom Sublists to Custom Record Types](#).
- **Icons** – Select the PNG sprite you want to use to represent this record type in the New Bar, Create New menu, Recent Records menu, Recent Records portlet, and QuickViews. You can choose from built-in icons or create your own custom icon. For more information, see [Choosing an Icon for a Custom Record](#).
- **Numbering** – Specify the numbering format for custom records types. For more information, see [Numbering Custom Record Types](#).
- **Forms** – Customize and select a preferred entry form for your custom record type. For more information, see [Adding Custom Forms for a Record](#).

To print your custom record, you can choose the standard print template or a custom print template when editing the preferred entry form for your custom record type. For more information, see [Updating Custom Record Type Print Templates](#).

- **Online Forms** – Create online entry forms to capture information and create new records from outside your NetSuite account. You can customize the appearance of online forms as well as the information you require from anyone who submits these forms.

 **Note:** This subtab is available only after the record type has been saved.

- **Permissions** – select the roles you want to access custom record entry forms, choose a default form and restrict the forms available here. For more information, see [Setting Up a Permissions List for a Custom Record Type](#).

 **Important:** You must select **Use Permission List** from the **Access Type** list for these permissions to take effect. For custom record types that are associated with a custom segment, you can't edit the permissions of the custom record. Custom record permissions are set on the custom segment definition page.

- **Links** – Create links that take you to the list of record entries for this type and choose where to place the links. For more information, see [Creating Links to Custom Records](#).
- **Managers** – Define specific employees as managers of the current record type, which enables the employee to modify the custom record type. When defined as a manager, the employee is automatically granted custom record view permission. The custom record view permission permits managers to see the list of custom record types but **not** drill down on them.

 **Note:** If an employee has a role that includes the Custom Record Type permission, they have edit access to **all** custom records types. The **Managers** subtab enables you to grant permission for an employee to the current record type only.

- **Translation** – (when Multi-Language feature is enabled) Define translations for the custom record type name to be used when users change the language preference. For more information, see [Adding Translations for Custom Records](#).
- **Child Records** – If this record type is a parent record, the child records are listed here. For more information, see [Using Child Records](#).
- **Parent Records** – If this record type is a child record, the parent records are listed here. For more information, see [Parent-Child Record Relationships](#).

4. When you have finished making changes, click **Save**.

For information about editing existing records, see the help topic [Viewing and Editing Records](#).

Updating Custom Record Type Print Templates

Each custom record type has a standard print template that's dynamically generated when you create a custom record type. If you edit the custom record type, the standard template is automatically updated to reflect the changes made in the custom record type.

You can use the advanced template editor to create a custom print template for the custom record.

 **Note:** Customized record type print templates aren't updated when the custom record type is changed.

For more information about using the Template Editor, see the help topic [Advanced Templates Customization in the Template Editor](#).

- You can't edit the permissions of the custom record. The custom record permissions are set on the custom segment definition page.
- You can't inactivate the custom record type because it's associated with a custom segment.

When you add a new field to the record, it appears as a column on the Values subtab of the custom segment definition page.

Using Custom Record Entries

Custom record instances or entries are the specific custom records you create. You can create, edit and search your custom record instances from the list of record types. You can also inactivate or delete a record type that's no longer being used. To provide users with access to all custom records, user roles

must have the Custom Record Entries permission enabled. For more information about role permissions, see the help topic [Setting Permissions for Custom Records](#).

Note: The maximum number of instances (MAXINT) permitted for a record type is 2,000,000,000. When the internal ID limit for a custom record type is reached, NetSuite reports an error if you attempt to create a new instance of the record type. Existing records are not affected, but you won't be able to add new records of that type.

For details, see the following:

- [Inactivating a Custom Record Type](#)
- [Deleting a Custom Record Type](#)
- [Viewing a Custom Record Entries List](#)
- [Viewing or Editing a Custom Record Entry](#)
- [Creating a Custom Record Entry](#)
- [Copying a Custom Record Entry](#)
- [Making a Custom Record's Entries Inactive](#)
- [Viewing or Editing a Custom Record Type](#)
- [Custom Record Types Associated with a Custom Segment](#)
- [Searching Custom Record Entries](#)

Viewing a Custom Record Entries List

You can view a custom record entries list for a custom record type.

To view a custom record entries list:

1. Go to Customization > Lists, Records & Fields > Record Types.
You can also reach the custom record entries list by placing a link directly to the list in your center. For more information, see [Creating Links to Custom Records](#).
2. Click **List** for the custom record entries list you want to see.
Your list of custom records appears.
You can also reach the custom record entries list by placing a link directly to the list in your center. For more information, see [Creating Links to Custom Records](#).

Viewing or Editing a Custom Record Entry

You can view or edit a custom record entry for a custom record type.

To view or edit a custom record entry:

1. Go to Customization > Lists, Records & Fields > Record Types, and click **List** for the custom record entries list you want to view.
You can also reach the custom record entries list by placing a link directly to the list in your center. If you want a link to appear on a standard category, you must set the link on the Custom Record Type definition page. Also, if you want to copy the custom record and center link to another

account, you must set the link on the Custom Record Type definition page. For more information, see [Creating Links to Custom Records](#).

2. In the records list, click **View** or **Edit** for the record you want.
3. If you're editing, click **Save** when you're finished.

Creating a Custom Record Entry

You can create a new custom record entry for a custom record type.

To create a custom record entry:

1. Go to Customization > Lists, Records & Fields > Record Types, and under the New Record column, click **New Record**.
2. Enter a name for the custom record entry. Then complete fields as needed and include any notes you want to add.
3. Click **Save**.

Copying a Custom Record Entry

You can copy a custom record entry for a record type.

To copy a custom record entry:

1. Go to Customization > Lists, Records & Fields > Record Types, and click **List** for the custom record entries list you want to view.
2. Click **View** next to the record you want to copy.
3. In the **Actions** menu, select **Make Copy**.
4. Enter a name for your new record, and click **Save**.

You can't create another record with the same name. The information from the original record is copied except for the name.

Making a Custom Record's Entries Inactive

In some cases, you may need to hide one or more of a custom record's entries. To hide an entry, you make it inactive. Be aware that when you make an entry inactive, it does not appear as a choice in the record's list.

Inactivating a record's entries has the following results:

- The entry no longer appears as a choice in the records list on new forms or on existing forms where it wasn't already selected. However, if the entry is a parent to another entry, it still appears as a parent.
- If an inactive entry was previously selected on an existing form, the entry continues to appear on that form. A search on that entry will also turn up in search results.
- When filtering, if one record is dependent on another record, entries filtered by an inactive entry won't be available. This is true even if the inactive entry on which other entries depend is already selected.

To Make an Entry in a Record's List Inactive:

1. Go to Customization > Lists, Records & Fields > Record Types, and click **List** for the custom record entries list you want to view.
2. Click **List** for the record type
3. Click the **Inactive** box.
4. Click **Save**.

Searching Custom Record Entries

The following procedure describes how to search a list of custom record entries.

To search a list of custom record entries:

1. Go to Customization > Lists, Records & Fields > Record Types.
2. In the Search column, click **Search** for the record type you want to search.
3. On the Search page, enter or select criteria to filter search results:
To enter specific criteria:
 - To search for all information of that kind, select **Any**.
 - To enter the information or part of the information you want to find, select **Is**, **Starts With**, or **Contains**.
 - To enter the information you want to exclude, select **Is Not**, **Does Not Start With**, or **Does Not Contain**.
 - Select a choice or choices from a list or a list of options.
 - To select from a popup list, click **List** next to an empty list field, or enter the first few letters and press the Tab key.
 - If you selected custom in the date field, enter or select dates in the **From** and **To** fields.
 - Select **Either**, **Yes**, or **No** for the option you want.

The best way to find what you're looking for is to use a combination of these fields.
4. After entering search criteria, choose one of the following options:
 - To run the search and open a NetSuite page with a list of results, click **Submit**.
 - To run the search and save results as a .csv file that you can save to disk or open on your desktop, click **Export**. For more information, see the help topic [Exporting Search Results](#).
 - To open a saved search page with no filters defined, where you can define a custom search form to be your default search form for the record type, click **Personalize Search**. For more information, see the help topic [Defining a Saved Search as a Preferred Search Form](#).
 - To open a saved search page that includes the filters you defined, click **Create Saved Search**. For more information, see the help topic [Saved Searches](#). In a saved search, you can include the translated display name of custom record instances in saved searches. See the help topics [Saved Searches](#) and [Adding Translations for Custom Records](#).
5. After you have submitted a search and a search results page has opened, you can do the following:
 - Export search results as a .csv or .xls file. For more information, see the help topic [Exporting Search Results](#).
 - Email search results to one or more recipients. For more information, see the help topic [Emailing Search Results](#).
 - Create a saved search with the same definitions as the search. For more information, see the help topic [Saved Searches](#).

6. If the list of results is too large or too small, you can add, remove or expand criteria. To return to the search criteria page, click **Return To Criteria**.
 - To set more complex search criteria and define search results display options, enable the **Use Advanced Search** box on the Search page. For information about using advanced search functionality, see the help topic [Defining an Advanced Search](#).
 - Saved searches can be run on demand, include all advanced search functionality and provide additional capabilities, including scheduling, email alerts, audience definition, and highlighting of results. For more information, see the help topic [Saved Searches](#).

Custom Segments

The Custom Segments feature lets you create custom classification fields similar to class, department, and location.

Applying Custom Segments to Custom Records with Standard Segment Classification Filtering

For information specific to Not-for-Profit (NFP), see creating values from

[Custom Segments for NFP Financials](#).

This feature, also known as SuiteSegments, is part of the SuiteGL feature set. Other SuiteGL features include Custom Transactions and Custom GL Lines. For more information about SuiteGL, see the help topic [SuiteGL Features Overview](#).

For information about the Balancing Segments feature, which depends on custom segments, see the help topic [Balancing Segments and Journals](#).



Important: SuiteScript doesn't support direct access to the NetSuite UI through the Document Object Model (DOM). You should access the NetSuite UI only by using SuiteScript APIs. For information about using SuiteScript APIs to customize the UI, see the help topic [SuiteScript 2.x Custom Pages](#).

Custom segments are supported in SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SDF SuiteApps, or to customize NetSuite accounts, using an integrated development environment (IDE) on your local computer. SuiteCloud projects are file-based and use XML definitions of custom NetSuite objects. For more information, see the help topic [SDF Custom Object and File Development in SuiteCloud Projects](#).

For more details about custom segments, see the following topics:

- [Benefits of Custom Segments](#)
- [Custom Segments Overview](#)
- [Permissions for Managing Custom Segments and Values](#)
- [Custom Segment Creation](#)
- [Filtering for a Custom Segment](#)
- [Custom Segment Values](#)
- [Using the Script ID to Access Custom Segment Body, Line, and Filter By Fields](#)
- [Custom Segments in Record Searches](#)
- [Customizing a Report by Using Custom Segments](#)
- [Using Custom Segments in Workflows](#)
- [Deleting a Custom Segment Definition](#)

For more information about working with classifications, departments and locations, and using the custom GL lines plug-in, see the following.

- [Custom GL Lines Plug-in](#)
- [Classifications Overview](#)
- [Departments and Classes Overview](#)

■ [Locations Overview](#)

Benefits of Custom Segments

The Custom Segments feature lets you create custom classification fields similar to class, department, and location. Create as many custom segments as you need, define their possible values, and add them to specific record types. NetSuite users can then classify records using these segments.

▼ Classification

Department *

Class

Deferred Revenue Reclassification Account

Foreign Currency Adjustment Revenue Account

Sales Rep Phone

Points

0

Location

East Coast ▼

Order Type

Last Modified Date

Created Date

Document Date

☐ Marketing Order

Preferred Contact Method

Profit center

- New -

Clothing

Outerwear

Jewelry

0.00

You can configure segments to display on the GL Impact page. Additionally, standard NetSuite reports can be customized to use custom segments as filters and columns. When a segment is used as a column, it can also be grouped with other columns. For example, the following screenshot shows a customized version of the Sales by Item report. This report groups two segments in the column at the left.

Sales by Audience and Profit Center

[View Detail](#)

PROFIT CENTER	QTY. SOLD	ITEM NAME	TOTAL REVENUE	SALES CHANNEL	SALES REGION
Women's					
Shoes					
		1 Ballet Flat	\$65.00	Web Store	Madrid
		2 Jeweled Sandal	\$90.00	Brick-and-Mortar Stores	New York
		1 Patent Heel	\$452.00	Partner Outlet	Paris
		1 Slingback Sandal	\$115.00	Web Store	Sao Paulo
Total - Shoes	5		\$722.00		
Accessories	16		\$2,575.00		
Clothing	141		\$12,156.00		
Outerwear	46		\$5,519.00		
Jewelry	16		\$11,048.00		
Total - Women's	224		\$32,020.00		
Men's					
Outerwear	28		\$6,154.00		
Clothing	36		\$13,852.61		
Total - Men's	64		\$20,006.61		
Unisex					
Accessories	20		\$1,270.00		
Total - Unisex	20		\$1,270.00		
Total	308		\$53,296.61		

In these ways and more, custom segments enhance your ability to categorize data and meet your organization's unique reporting and analysis needs.

To create custom segments, you must first enable the feature, as described in [Enabling the Custom Segments Feature](#). After you've done so, you can create custom segments at Customization > Lists, Records, & Fields > Custom Segments > New. Almost all segment-configuration options can be managed from this page, including the following:


■ [Configure Segment Values to Be Hierarchical](#)

- [Configure a Segment to Default Statically or Dynamically](#)
- [Filter a Segments Values Based on Other Segments](#)
- [Filter a Segment's Values Based on Class, Department, Location, and Subsidiary](#)
- [Configure a Segment to Appear on the GL Impact Page](#)
- [Create Segments as Multi-Select Fields](#)
- [Display Segments Selectively](#)
- [Set Custom Segment Values](#)
- [Custom Segments](#)

Custom segments are part of the SuiteGL feature set. For more information about SuiteGL, see the help topic [SuiteGL Features Overview](#).

Configure Segment Values to Be Hierarchical

In the list of available segment values, you can create hierarchical relationships. For example, a segment called Sales Region can have values such as Americas, APAC, and EMEA. However, you may also want to add options that are more specific. When you create the new options, you can specify in the segment definition that they're children of the broader geographic categories. These relationships are shown in the list of values from which the user can select.



For more details, see [Creating Hierarchies Among the Values of a Custom Segment](#).

Also, see [Benefits of Custom Segments](#).

Configure a Segment to Default Statically or Dynamically

If needed, you can configure a segment to default to a specific value. You have two options:

- You can configure a segment to default to a static choice. This default is used on any record type where the segment appears, unless overridden. For example, suppose you have a segment called Sales Region, which includes the values Americas, EMEA, and APAC. If most of your records require a value of Americas, you could make Americas the default.
- You can create dynamic defaulting for specific categories of record types, such as transactions and entities. For example, you may have a segment called Sales Region that you've applied both to the Customer record type and to all sales transactions. You can configure the segment so that, when it occurs on a sales transaction, it defaults to the value selected on the corresponding customer record. Dynamic defaulting overrides static defaulting.

For details about defaults, see [Validation and Static Default Values for Custom Segments](#).

Also, see [Benefits of Custom Segments](#).

Filter a Segments Values Based on Other Segments

In some cases, you may want to limit a segment's available values based on choices the user made for other segments on the same record.

For example, suppose your organization sells merchandise worldwide. You may have multiple sales channels, such as brick-and-mortar stores, a web store, and partner outlets. However, although you can permit customers everywhere to use your web store, other channels may be available only in certain geographic regions.

In this case, you could create two segments, Sales Region and Sales Channel. You could configure a record's Sales Channel values to be filtered based on the selection the user makes for Sales Region. For example, you could configure a Sales Region called Denmark to permit the selection of only two Sales Channel values.

The screenshot shows a 'Classification' section with two columns of dropdown menus. The left column includes: Department (with an asterisk), Class, Location (set to 'East Coast'), Order Type, Preferred Contact Method, Deferred Revenue Reclassification Account, and Foreign Currency Adjustment Revenue Account. The right column includes: Sales Channel, Departments_2, CC Sales Region (set to 'EMEA : Denmark'), and CC Sales Channel. The CC Sales Channel dropdown is open, displaying a list with '- New -' at the top, followed by 'Web Store' and 'Catalog'.

You can also set up more advanced filtering. You can configure a segment's available values to be dependent on multiple segments and on other classification fields, as described in the next section.

For details about filtering, see [Filtering for a Custom Segment](#).

Also, see [Benefits of Custom Segments](#).

Filter a Segment's Values Based on Class, Department, Location, and Subsidiary

You can set up a segment so that its values are filtered based on choices the user made in the Class, Department, Location, and Subsidiary fields. This is similar to the behavior described in [Filter a Segments Values Based on Other Segments](#).

For example, consider a company that sells clothing and accessories. This company may have a segment called Profit Center, with values such as Clothing, Shoes, and Jewelry. If the company markets products to both men and women, it may also have departments called Men's and Women's.

Both the Men's and Women's departments may sell clothing and shoes, but jewelry may be available only for women. In this case, you could configure the Profit Center segment so that its values are filtered

based on the value of the Department field. A record with a Department value of Men's would show only two of the three Profit Center values.

CC Sales Region

CC Sales Channel

CC_Department

Men's

CC Profit Center

- New -

Clothing

Shoes

Balance Remaining

0.00

For details about filtering, see [Filtering for a Custom Segment](#).

Also, see [Benefits of Custom Segments](#).

Configure a Segment to Appear on the GL Impact Page

You may want to apply segments to transactions in certain situations. You can apply segments to the body of a transaction or make them columns in a transaction sublist. In either case, you can set up the segments to show their values on the GL Impact page for the transactions where they're used.

GL Impact											Return to Credit Memo #CRED10030
											Total: 2
Account	Amount (Debit)	Amount (Credit)	Posting	Memo	Name	Department	Class	Location	Business Unit	Activity Code	Product Line
11000 Accounts Receivable		\$1,201.00	Yes		Anonymous Customer			Corporate HQ			
29000 Deferred Revenue	\$1,201.00		Yes	Subscription	Anonymous Customer			Corporate HQ			


For custom segments that have GL impact, the Custom GL Lines Plug-in can set and read custom segment values from custom and standard lines and from transaction records.

For details, see [Configuring GL Impact for a Custom Segment](#).

Also, see [Benefits of Custom Segments](#).

Create Segments as Multi-Select Fields

If needed, you can set up a segment to let a user save multiple selections. This option differs from the Class, Department, and Location fields, where users can select only one option.

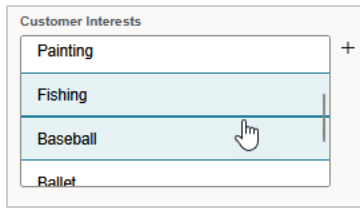

Some limitations exist for this capability. For example, if a segment is configured to display on the GL Impact page, it can't be a multi-select field. For more details, see [Custom Segment Types](#).

Also, see [Benefits of Custom Segments](#).

Display Segments Selectively

Custom Segments offers various permissions options. One option is that you can choose to make a segment visible only to users with specific roles. For example, you can create a segment called Rating that's applied to the Employee record type. This segment may contain sensitive information that should be available only to supervisors. In this case, you can configure the segment to be available to users in a Supervisor role but hidden for all other users. Additionally, you can make the segment read-only for certain roles.

You also have several options for controlling how users manage custom segments. For example, many roles in your account likely won't have permission to create or edit segments. However, if needed, you can give these roles permission to create and edit values for a specific segment. Note also that you can create and update values using the CSV Import Assistant. For details, see the help topic [Custom Segment Value Import](#).

For more details about managing permissions for segments, see [Permissions for Managing Custom Segments and Values](#).

Also, see [Benefits of Custom Segments](#).

Set Custom Segment Values

Custom segment values can be set or created using Custom GL Lines Plug-in, SuiteScript, SOAP web services, or CSV import.

The Custom GL Lines Plug-in can set and read custom segment values from custom and standard lines and from transaction records, if the custom segment has GL impact. The default values for column segments are sourced from the body. The Custom GL Lines Plug-in can change this value, even for segments that are applied only to the body. For details, see the help topic [Custom GL Lines Plug-In Interface Definition](#).

On record types that are exposed to SuiteScript, you can use SuiteScript to set values for custom segments that exist as fields. You can also use SuiteScript to create values for existing custom segments. For details see the help topic [SuiteScript 2.x API Reference](#).

In many cases, you can use SOAP web services to set values for custom segments that exist as fields. You can set values on instances of record types that are exposed to SOAP web services and have a CustomFieldList defined as part of the exposure. You can also use SOAP web services to create values for existing custom segments. For details, see the help topic [CustomFieldLists for Setting Custom Segment Values](#).

You can create and update custom segment values using the CSV Import Assistant. For details, see the help topic [Custom Segment Value Import](#).

Also, see [Benefits of Custom Segments](#).

Custom Segments Overview

For help getting started with the Custom Segments feature, see the following topics:

- [Enabling the Custom Segments Feature](#)
- [Transaction Types Supported by Custom Segments](#)
- [Permissions for Managing Custom Segments and Values](#)

Enabling the Custom Segments Feature

Before you can create custom segments, you must enable the feature. Go to Setup > Company > Enable Features. On the **SuiteCloud** subtab, check the **Custom Segments** box and click **Save**.

After you enable the feature, you can begin creating custom segments, as described in [Creating a Custom Segment](#).

Transaction Types Supported by Custom Segments

Custom segments are supported for the following transaction types. Support is for defining a custom segment in the body of the transaction, unless otherwise indicated.

- Assembly build
- Bad debt (transaction lines)
- Bill
- Bill (expense transaction columns)
- Bill credit
- Bill credit (expense transaction columns)
- Bin putaway worksheet
- Bin transfer
- Blanket purchase order
- Blanket purchase order (expense transaction columns)
- Budget
- Cash refund
- Cash sale
- Check
- Check (expense transaction columns)
- Commission
- Credit card
- Credit card (expense transaction columns)
- Credit card refund
- Credit memo
- Currency revaluation (Fx)
- Custom (expense transaction columns)
- Customer payment
- Deposit application
- Depreciated custom transactions
- Estimate

- Expense report (transaction lines)
- Expense transaction columns
- Finance charge
- Inventory
- Inventory adjustment (transaction lines)
- Inventory count
- Inventory distribution
- Inventory part (transaction lines)
- Inventory transfer (transaction lines)
- Invoice
- Item fulfillment
- Item fulfillment (transaction lines)
- Item receipt (expense transaction columns)
- Item receipt (transaction lines)
- Journal entry (transaction lines)
- Opportunity (transaction line)
- Other charge item (transaction line)
- Partner commission
- Payable Tegata
- Paycheck (derives custom segments from time entries)
- Paycheck earning
- Paycheck earning (transaction lines, derived from time entries)
- Paycheck journal
- Payment end journal
- Payroll adjustment
- Payroll liability check
- Period end journal
- Period end journal (transaction line)
- Purchase contract
- Purchase order
- Purchase order (expense transaction columns)
- Receivable Tegata
- Request for quote
- Requisition
- Requisition (expense transaction columns)
- Return authorization
- Revenue arrangement
- Revenue contract
- Revenue commitment
- Revenue commitment reversal
- Sales order
- Sales tax payment
- Statement charge
- Store pickup fulfillment

- Tax liability check
- Time tracking (time transaction columns)
- Transfer order
- Vendor payment
- Vendor request for quote
- Vendor return authorization
- Vendor return authorization (expense transaction columns)
- Transfer order (transaction lines)
- Work order
- Work order (transaction lines)

Custom segments are also supported on transaction lines for the following item types.

- Apply to Kit
- Assembly/bill of materials
- Item fulfillment
- Item group
- Kit item
- Non-inventory part
- Nonmodifiable type
- Service
- Store with item groups

Settings that Affect Where Custom Segments are Applied

Be aware that certain configurations of a custom segment can affect where that segment is applied. These configurations include:

- [Dynamic Defaults for Custom Segments](#)
- [Filtering Custom Segments by Another Custom Segment](#)
- [Filtering Custom Segments by Class, Department, Location, or Subsidiary](#)
- [GL Impact for Custom Segments](#)
- [Custom Segment Type Constraints](#)

Dynamic Defaults for Custom Segments


When you use dynamic defaults, you essentially create a relationship between multiple record types that use a segment. If you try to create this relationship before you've applied the segment to all of the applicable record types, the system displays a message regarding record application. This message states that the system will apply the segment to the record type referenced in the Source List choice that you've made. You can cancel the change, or you can let the system apply the segment to the additional record types.

For more information about sourcing, see [Dynamic Default Value Sourcing for Custom Segments](#).

Filtering Custom Segments by Another Custom Segment

In some cases, you may configure a segment so that it's filtered by another segment. For example, you can have two segments, Sales Region and Sales Channel. You could configure the Sales Channel segment's values to be filtered based on the selection the user makes for Sales Region.

To achieve this type of configuration, edit the Sales Channel segment's Filtered by field. In this field, select Sales Region.



When you use this type of configuration, the segment in the Filtered by field must be applied to all of the same records as the segment that you're editing. Therefore, if you edit a segment to create a filtering relationship between it and a second segment, you may receive a message regarding record application. This message may state that the system will apply the second segment, the one named in the Filtered by list, to more record types.

Additionally, you may receive this message if you're editing a segment that's already filtered by another segment. If you apply the segment to additional record types, this change can affect the segment named in the Filtered by list. If that segment isn't already applied to the new types you've selected, the system displays a message stating that it'll be applied to them.

In both of these cases, you can cancel the change, or you can let the system apply the segment to the additional record types.

For more details about filtering, see [Filtering for a Custom Segment](#).

Filtering Custom Segments by Class, Department, Location, or Subsidiary

In some cases, you may want to create a filtering relationship between a custom segment and the Class, Department, Location, or Subsidiary field. In this case, you edit the custom segment and select one of these classifications in the Filtered by field.

As described in [Filtering Custom Segments by Another Custom Segment](#), the classifications selected in the Filtered by field must be applied to all of the same record types as the segment that you're editing. However, in the standard NetSuite configuration, Class, Department, Location, and Subsidiary don't exist on certain record types. By using custom fields, you can customize the entry forms for these record types and make these classifications available. However, custom fields can't be used for filtering custom segments, so these custom fields aren't listed in the Filtered by field. Even if you name the fields Class, Department, Location, and Subsidiary, they aren't represented by the options listed in the custom segment's Filtered by field.

For this reason, in some cases when you try to filter a segment by Class, Department, Location, or Subsidiary, the system displays a warning. You're prompted to let the system change either the Filtered by field or the record application of the segment you're editing. The following limitations exist:

- Class, Department, and Location can't be used for filtering on the record types listed on the following subtabs: CRM, Other Record Types, Custom Record Types, and Custom Segments.
- Subsidiary can't be used for filtering on the record types listed on the Custom Record Types or Custom Segments subtabs.

GL Impact for Custom Segments

The purpose of the GL Impact option is to add the segment to the GL Impact page for transactions where it's used. For this reason, you may receive a warning if you check the GL Impact box without applying the segment to a transaction. The GL Impact option has no function if the segment isn't applied to a transaction type. However, you're not required to apply these segments to transaction types.

You set the GL Impact when creating a custom segment. After that, GL Impact can't be changed.

For more information about GL Impact, see [Configure a Segment to Appear on the GL Impact Page](#).

Custom Segment Type Constraints

If a custom segment's Type field is set to Multiple Select, that segment can't be applied to a transaction sublist.

For more information about custom segment types, see [Custom Segment Types](#).

Permissions for Managing Custom Segments and Values

By default, only administrators can create and configure segments and segment values. However, you can permit other roles to complete these tasks. At a high level, you can permit a role to do the following:

- **Create and configure custom segments and their values** – To grant a role permission to view, edit, and delete custom segment definitions, you use the global Custom Segments permission. For details, see [Granting a Role Permission to Manage Custom Segments](#).
- **Create and edit values for a particular custom segment** – For each segment, you can grant a role permission to create, edit, and delete the segment's values. You grant this access by using the segment's Value Management Access permission. For details, see [Granting a Role Permission to Manage Custom Segment Values](#).
- **Use segments after they have been created, configured, and applied to records types** – To give a role this type of access, you use two permissions, each of which are segment-specific: Record Access and Search/Reporting Access. For more information, see [User Permissions for a Custom Segment](#).

Note that the first two types of permissions have interdependencies. For example, if a role has some level of the Custom Segments permission, the role also has permission to view segment values, even if the role hasn't specifically been granted Value Management Access for any segment.

Granting a Role Permission to Manage Custom Segments

By default, only administrators have permission to view custom segment definitions, create segments, edit segments, and delete them. However, you can assign this permission to other roles. You grant this access by using a permission called Custom Segments, which is available on the Permissions > Setup subtab of the role record.

For more details, see the following topics:

- [Scope of the Custom Segments Permission](#)
- [Assigning the Custom Segments Permission](#)

Scope of the Custom Segments Permission

The following table describes the access associated with the various levels of the Custom Segments permission. Except where noted, this table assumes that the user has no other permissions. For an overview of granting roles permission to manage custom segments, see [Granting a Role Permission to Manage Custom Segments](#).

Level	Users can:	Users can't:
View	■ View custom segment definitions.	■ Create, edit, or delete custom segments.

Level	Users can:	Users can't:
	- View the values defined for existing custom segments. - Use the Custom Segment search type.	Create, edit, or delete values on a custom segment (unless the role has the appropriate Value Management Access level for that segment).
Create	- View custom segment definitions. - View the values defined for existing custom segments. - Use the Custom Segment search type. - Create custom segments. - Create values for new segments that the user is creating.	- Edit or delete custom segments. - Create, edit, or delete values on an existing custom segment (unless the role has the appropriate Value Management Access level for that segment).
Edit	- View custom segment definitions. - View the values defined for existing custom segments. - Use the Custom Segment search type. - Create custom segments. - Create values for new segments that the user is creating. - Edit body fields and sublist fields on an existing segment.	- Delete custom segments. - Edit, create, or delete values on an existing custom segment (unless the role has the appropriate Value Management Access level for that segment). Note that these users have the ability to give themselves that permission. They can change the Value Management Access level on the Permissions subtab of the Custom Segments definition.
Full	- View custom segment definitions. - View the values defined for existing custom segments. - Use the Custom Segment search type. - Create custom segments. - Create values for new segments that the user is creating. - Edit body fields and sublist fields on an existing segment. - Delete custom segments.	Edit, create, or delete values on an existing custom segment (unless the role has the appropriate Value Management Access level for that segment). Note that these users have the ability to give themselves that permission. They can change the Value Management Access level on the Permissions subtab of the Custom Segments definition.

As shown in the preceding table, even if a role doesn't have the Value Management Access permission for any segment, the Custom Segments permission always gives the user permission to view segment values.

Similarly, the Create, Edit, and Full levels of the Custom Segments permission give the role some ability to create values, even if they don't have the Value Management Access permission.

However, if you want any of these users to be able to edit values on an existing custom segment, you may want to actively assign them the Value Management Access permission for the appropriate segments. Be aware that they can also grant themselves this permission on the Permissions subtab of the custom segment.

Assigning the Custom Segments Permission

This topic describes how to assign custom segment permissions. For an overview of granting roles permission to manage custom segments, see [Granting a Role Permission to Manage Custom Segments](#).

Use the following procedure to assign the Custom Segments permission to a role.

To assign the Custom Segments permission:

1. Go to Setup > Users/Roles > Manage Roles.
2. Find the role you want to change and click **Edit** or **Customize**.
3. On the **Permissions** subtab, click **Setup**.
4. Do one of the following:
 - To grant the role access, add a line to the sublist: In the **Permission** column, set the list to **Custom Segments**. In the **Level** column, select the appropriate access level. Then click **Add**.
 - To remove a role's existing access, find the Custom Segments permission in the sublist. Click it to enable a series of buttons. Then click **Remove**.
 - To change the role's existing access, find the Custom Segments permission in the sublist. Edit the corresponding value in the **Level** column. Then click **OK**.
5. Click **Save**.

Granting a Role Permission to Manage Custom Segment Values

In some cases, you may want to give a role permission to add values for a specific segment. This can be helpful when certain users are responsible for one segment but shouldn't be able to change the values of another.

Users need the Value Management Access permission to edit or delete the values of an existing segment.

You give users the ability to manage segment values using the Value Management Access permission. You can configure this permission by making changes on the Permissions subtab of the custom segment definition.

For details, see the following topics:

- [Required Permissions for Creating Custom Segment Values](#)
- [Scope of the Value Management Access Permission](#)
- [Assigning the Value Management Access Permission](#)

Required Permissions for Creating Custom Segment Values

To be able to create values, a user must have the necessary privileges. There are several permission configurations that can result in users having this access.

The following table describes examples of users with different permissions and how each group can create values.

Description	When Can the User Add Values?	Permitted Methods for Creating Values
Users assigned to the Administrator role	At any time	Creating Values Within the Segment Definition Creating Values by Clicking Manage Values Creating Values Using the New Button
Users with the Create level of the Custom Segments permission	Only during the time that the user is creating the segment (unless the user has additional privileges).	Creating Values Within the Segment Definition
Users with the following: ■ The Create, Edit, or Full level of the Value Management Access permission	At any time	Creating Values Within the Segment Definition Creating Values by Clicking Manage Values
Users with both of the following: ■ The Create, Edit, or Full level of the Value Management Access permission ■ Permission to work with the segment when it's displayed on another record	At any time	Creating Values by Clicking Manage Values Creating Values Using the New Button

Note: Be aware that even if users have only the Edit or Full value of the Custom Segments permission, they can assign themselves the Value Management Access permission for any custom segment.

Scope of the Value Management Access Permission

Refer to the following table for details about the privileges associated with the Value Management Access permission.

Value Management Access Level	Users can:	Users can't:
View	■ View values for the segment. (In addition, by having the View level of the Custom Segments permission, the user can view values for all segments.)	■ Create, edit, or delete the segment's values.
Create	■ Create values for the segment for which they have the Value Management Access permission.	■ Edit or delete the segment's values.
Edit	■ Create and edit the values for the segment.	■ Delete the segment's values.
Full	■ Create, edit, and delete the values for the segment.	—

Assigning the Value Management Access Permission

Use this procedure to grant a role permission to work with a custom segment's values.

Note: A role doesn't require the Custom Segments setup permission to be able to change segment values.

To assign the Value Management Access permission:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. Find the segment you want to give access to and click **Edit**.
3. Click the **Permissions** subtab.
4. For a role to have access, the role must be referenced in the Permissions sublist. Review the sublist to see if the role is already listed, then do one of the following:
 - If the role isn't listed, add a line to the sublist: In the **Role** column, select the needed role. In the **Value Management Access Level** column, select the required access level. Review the values for this role in the columns labeled **Record Access Level** and **Search/Reporting Access Level**. Make any necessary changes and click **Add**. For details about the Record Access and Search/Reporting Access permissions, see [User Permissions for a Custom Segment](#).
 - If the role is already listed but doesn't have the ability to manage values, then edit the role's access. Find the role in the sublist, and edit the corresponding value in the **Value Management Access Level** column. Then click **OK**.
5. Click **Save**.

Note: You can also set the Value Management Access Level by editing the role. On the role record, go to the Permissions > Custom Record subtab. The names of all custom segments are displayed in the Record column.

Custom Segment Creation

After the Custom Segments feature has been enabled, authorized users can create and configure segments. For more details, see the following topics:

- [Custom Segment Types](#)
- [Creating a Custom Segment](#)
- [Configuring GL Impact for a Custom Segment](#)
- [Applying a Custom Segment to Record Types](#)
- [Validation and Static Default Values for Custom Segments](#)
- [Making a Custom Segment Mandatory](#)
- [User Permissions for a Custom Segment](#)
- [Editing Custom Segments](#)

Custom Segment Types

Every custom segment has a type. The type determines how the segment behaves when a user encounters a segment on a record and sets a value for it.

A segment can be one of two types:

- **List/Record** (default) – The user can save only one selection.

- **Multiple Select** – The user can save multiple selections.

For more information about types, see these topics:

- [Limitations of the Multiple Select Custom Segment Type](#)
- [Ramifications of Changing the Type Field of a Segment](#)
- [Changes that Can Indirectly Modify the Type Field of a Segment](#)

Custom segment types can be included in SuiteApps packaged with SuiteCloud Development Framework (SDF). SDF is a development framework that you can use to create SuiteApps from an integrated development environment (IDE) on your local computer. For more information, see [Custom Segments as XML Definitions](#)

Limitations of the Multiple Select Custom Segment Type

This topic describes the primary limitations and restrictions when using the Multiple Select type for custom segments in NetSuite. For an overview of custom segment types and additional considerations, see [Custom Segment Types](#).

If you select a type of Multiple Select for a segment, be aware of the following limitations:

- The segment can't have GL Impact.
- You can't apply the segment to transaction columns.
- The segments don't support dynamic defaulting. (Dynamic defaulting is configured by using the Source List field on the Application & Sourcing subtab of the segment definition, as described in [Creating a Custom Segment](#).)
- Multiple selects on multiple custom segments aren't supported.

Ramifications of Changing the Type Field of a Segment

This topic explains the consequences and risks associated with changing the type of a custom segment after it has been created. For an overview of custom segment types and additional considerations, see [Custom Segment Types](#).

It's possible to change a segment's type when editing the segment. However, use caution when changing a segment's type. Changing the segments type can have these effects:

- Changing the type from Multiple Select to List/Record can cause data loss. For example, suppose you create a segment of type Multiple Select and apply it to a record type. In this case, users can create records that store multiple values for that segment. If the segment's type is later changed to List/Record, the saved values are discarded.
- Changing the type from List/Record to Multiple Select can affect where the segment has been applied. For example, suppose you have a segment of type List/Record that's applied to one or more transaction sublists. If you change the type to Multiple Select, the system generates a warning explaining that the segment will be removed from these transaction sublists. You can cancel or proceed with changing the type and application of the segment.

Changes that Can Indirectly Modify the Type Field of a Segment

This topic details scenarios where a custom segment's type might be changed indirectly because of how segments are used in filtering relationships. For an overview of custom segment types and additional considerations, see [Custom Segment Types](#).

Be aware that in some cases, you can indirectly change a segment's type. For example, this type of change can occur when you have a filtering relationship between two segments, one of type List/Record and one of type Multiple Select.

For example, suppose that Segment A is of type List/Record. You may decide to filter Segment A's values by the choice a user made in another segment, Segment B, on the same record. Suppose that Segment B is of type Multiple Select.

With filtering, both segments must be applied to the same record types and transaction columns. So in this example, you're choosing to filter Segment A's values according to Segment B. In this case, if Segment B isn't already applied to the same records as Segment A, the system makes changes. It automatically updates Segment B to apply it to all of the records where Segment A has been applied.

Now, suppose that Segment A has been applied to a transaction sublist, such as Sales Item or Expense. In this scenario, when you create the filtering relationship between Segment A and Segment B, the system must apply Segment B to the transaction sublist that Segment A is associated with. However, because a segment of type Multiple Select can't be applied to transaction sublists, the system changes Segment B's type to List/Record. In this case, you're not warned that the type of Segment B will be changed.

For more details about filtering, see [Filtering for a Custom Segment](#).

Creating a Custom Segment

When you create a custom segment, you can choose a label, define its values, and configure other settings. Only the Label field is required to save the segment.

To create a segment, you'll need the right permissions. Authorized users are:

- **Administrative users** – Users who have the Administrator role assigned.
- **Other users** – Users who have the Create, Edit, or Full level of the Custom Segments permission.

 **Note:** When you create a custom segment, NetSuite automatically sets up a corresponding custom record type to hold its dropdown values. The custom segment is made available as a field across a broad range of record types (including entities, items, CRM, transactions, and more), providing flexibility regardless of record family. Technically, the system creates five underlying custom field component types for each segment—Body, Column, Entity, Event, and Item—which enable the segment to appear in different record contexts. Previously, these each had separate script IDs, but now a unified field ID is used for all components.

For more information, see [Custom Records](#) and [Custom Field Types](#).

To create a custom segment:

1. Go to Customization > Lists, Records, & Fields > Custom Segments > New.
2. In the **Label** field, enter a name for your segment. This name will be used when the segment appears on records or as a transaction column. The custom segment name can't be the same as any other custom object or any classification.
3. In the **ID** field, enter a unique alphanumeric ID for your custom segment. For information about best practices and naming conventions, see [Conventions for Naming Custom Objects](#). You can't change this value after you save the segment.
4. The **Use as Field ID** box is available only for custom segments created before 2019.1. All newer custom fields automatically use the unified ID.

To use a unified ID for the entire custom segment definition, check the **Use as Field ID** box. When the box is checked, no field ID fields or columns are shown on the Application & Sourcing subtabs because one ID is used for all fields.



Important: If you change the **Use as Field ID** setting on existing custom segments, your scripting solutions can stop working, or may not work as expected. Verify SuiteScripts, CSV imports, SOAP web services, workflows, formula fields, bundles, SDF, searches, printing templates, and any other customizations that include custom segments. SuiteAnalytics Connect **doesn't** use the unified ID.

5. After you save the new custom segment, the **Custom Record Type** field shows the custom record type linked to your segment. Click the custom record type name to open its configuration page. For more information, see [Custom Record Types Associated with a Custom Segment](#).
6. (Optional) Change the **Type** list from the default **List/Record** to **Multiple Select**. This setting controls whether users can select one or multiple values for the segment:

- **List/Record** – Users can save only one selection.
- **Multiple Select** – Users can save more than one value.

Multiple Select has some limitations. For details, see [Custom Segment Types](#).

7. If you no longer need a custom segment, mark it as inactive by checking the **Inactive** box. For details, see [Inactivating a Custom Segment](#).
8. Select the **Display Type** to control how your custom segment behaves in NetSuite. You can use display types to make a segment informational only (not stored in your account), non-editable, or to set default values or custom code calculations.
 - **Normal:** The segment can be edited and used for defaulting and sourcing information.
 - **Disabled:** The segment can't be edited, but it can be used for defaulting and sourcing information. If there's no default or sourced value, the segment won't appear on forms.



Note: To set the display type option to Disabled for a mandatory custom segment, the segment must define a default value.

- **Hidden:** The segment isn't shown on records or transactions, but you can find its value using search. The value is set by defaulting, so you must set a default for the field.

Hidden segments can't be added to custom forms.

In SuiteScript, only user event, scheduled, and Suitelet scripts can set the value of a hidden segment.




Warning: Hiding a custom segment only affects how it's displayed—it doesn't provide field-level security. Hidden segments are still included in the page output and can be viewed in the page source.

9. (Optional) To show the customer segment as a column on custom record lists or sublists, check the **Show In List** box.

CURRENCY	AMOUNT (FOREIGN CURRENCY)	AMOUNT	UNIT SIZE
USA	\$0.00	0.00	Medium
Canadian Dollar	\$0.00	0.00	Large
British pound	£0.00	0.00	Large

10. You can set up filtering for a segment's values if you want their availability to depend on other field selections. This lets you make a segment value available only when certain classifications are selected in other classification fields on the same record. For full details about filtering, see [Filtering for a Custom Segment](#).

To use filtering, select the classifications you want to use to filter the segment's available values in the **Filtered by** list. Hold down Ctrl to select more than one.

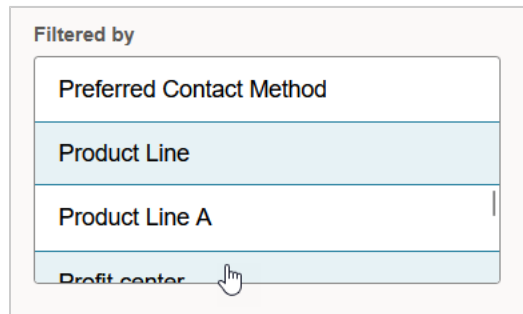

After you set up filtering, use the **Set Filters** button to configure which values are available for each classification.

11. If appropriate, check the **GL Impact** box. Checking this box means that, when the segment is used on a transaction, the segment's value is displayed on the GL Impact page.



Important: You can't change the GL Impact setting after you create the segment. For more details about creating GL impact, see [Configure a Segment to Appear on the GL Impact Page](#).

12. In the **Help** field, enter field-level help for the segment. When you provide help text, users can click the segment's label to view your instructions.
13. If needed, enter notes about the segment in the **Description** field. These notes are visible only on this segment configuration page.
14. (Optional) Configure additional settings on the segment's subtabs:
 - **Values** – Create values for the custom segment by adding lines to the Values sublist. If you selected options in the **Filtered by** field, be sure to fill in the **Filtering** column for each value you want users to access. For details about configuring filtering for a value, see [Setting Filters for Each of the Segment's Values](#). For details about each column in the Values sublist, see [Creating Values Within the Segment Definition](#).
 - **Application & Sourcing** – On this subtab, you can do both of the following:
 - Apply the segment to one or more record types. You can also make the segment available on another custom segment or as a column in a transaction sublist. For more details, see [Applying a Custom Segment to Record Types](#).
 - If the segment applies to more than one record type, you can set up dynamic defaulting using the **Source List** field. This lets you default the segment value on one record to the value saved on another. For more details about configuring dynamic defaulting, see [Dynamic Default Value Sourcing for Custom Segments](#).
 - **Validation & Defaulting** – On this subtab, you can do both of the following:
 - Make the segment required on a record type by checking the **Mandatory** box. Note that a custom form can be set up to hide the field, which prevents it from being required. For more details, see [Making a Custom Segment Mandatory](#).
 - Choose a static default value for the segment using the **Default Selection** list. If you've configured dynamic defaulting using the **Source List** field on the **Application & Sourcing** subtab, it overrides the static default. For more details, see [Configuring Static Defaults for Custom Segments](#).
 - **Permissions** – Specify the roles needed to use this segment. You can set:

- ▣ **Value Management Access Level** – Choose which roles can create and edit values for the segment. For details, see [Granting a Role Permission to Manage Custom Segment Values](#).
- ▣ **Record Access Level** – Choose which roles can view and set values for a segment on a record. For details, see [Granting Roles Permission to Set Segment Values on Records](#).
- ▣ **Search/Reporting Access Level** – Choose which roles can search based on segment values, customize reports to include segment values as columns and filters, and view segment values on custom reports. For details, see [Granting Roles Permission to Use Segments in Searches and Reports](#).
- **Dependent Segments** – When editing an existing segment, use this subtab to view segments that use the current segment for filtering.

 **Note:** This subtab is empty when you create a new segment.

- **Display Order** – Set the order in which custom segments appear in the body and lines of transactions, other records, and the GL Impact page, if applicable. You can set the display order to reflect the priorities and dependencies. For details see [Setting Display Order of All Custom Segments](#).
- **Translation** – Define translations for the segment's label and help text. The Translation subtab appears only if the Multi-Language option is enabled. For more information, see the help topic [Multi-Language Setup](#).

15. To create your segment, click **Save**.

After you save, NetSuite creates the custom segment and an associated custom record type. The custom record type uses the same name as your custom segment and appears on the Custom Record Types list page. To add values to the custom segment, edit the custom record type directly.

You can use SuiteCloud Development Framework (SDF) to manage custom segments as part of file-based customization projects. For information about SDF, see . You can use Copy to Account to copy an individual custom segments to another account. Each custom segment page has a Copy to Account option in the upper right corner. For information about Copy to Account, see the help topic [Copy to Account](#).

Configuring GL Impact for a Custom Segment

If you've applied a custom segment to transaction types or columns, the segment can have GL impact. When you enable GL Impact, segment values that are saved on transaction instances are displayed on the GL Impact page for those transactions.

If wanted, you can select the GL Impact option even when the segment isn't applied to transaction types or columns. However, until you apply the segment to a transaction type or column, this option has no effect.

Any user who has permission to create a custom segment can enable GL impact for that segment. However, after the segment has been created, this option can't be modified.

For custom segment values, if a period is closed, you can't change custom segment values that impact GL on any transactions in the period.

GL Impact Hidden Lines

Custom segments on GL Impact hidden lines are supported to ensure appropriate financial reporting. The hidden lines get the custom segment values from the item line or transaction body, where applicable.

Hidden line support ensures that GL Impact is correctly reflected for landed cost, tax lines, and currency revaluations.

GL Impact and Hidden Custom Segment Fields

If a custom segment with GL impact is set for both the transaction body and transaction line fields, NetSuite automatically uses the body value for the line when the line field is hidden (by clearing the Show option in the Sublist Fields subtab of the form). This keeps financial reporting accurate, even if you can't set or see the segment at the line level.

However, when the line field is visible, NetSuite doesn't automatically copy the body value to the line. In this case, you must enter a value in the line field if you want it to be different from, or the same as, the body value—there's no default carry-over.

This default behavior changes only if a customization, like a Custom GL Lines plug-in or script, overrides it. If the line field is visible, you can enter a different value. This applies only to custom segments with GL impact enabled, ensuring correct reporting on all affected transactions.

Example Scenario

Suppose you have enabled GL impact for a custom segment and use it on Transfer Orders and Item Receipts. When an Item Receipt is created from a Transfer Order, you expect the custom segment value set on the Transfer Order to carry over automatically. If the custom segment's line field on the Item Receipt form is hidden, NetSuite automatically copies the body value, and the correct segment value will appear. However, if the line field is visible on the form, NetSuite will not auto-populate the value from the body, which may result in the segment value being blank on the Item Receipt lines. In such cases, you must manually enter the value, or edit and save the record to populate it. Consider hiding the line field or using a customization if you want the value to always carry over automatically during record transformations.

For details about supported transformations that should be automatically populated, see the help topic [Supported Transformation Types](#).

Segment Values Available for Generated COGS and Revenue Lines

When a sale order or sale order item custom segment has GL impact, the appropriate GL segment value is assigned to the generated COGS and revenue GL lines to ensure appropriate financial reporting. The autogenerated COGS and revenue lines get the segment value from the item line or transaction body, where applicable, even if they belong to alternate business transactions.

Automatically-Generated Journals

Custom segments are supported on automatically-generated journals that include classification, department, and location. The following automatically-generated journals include custom segments:

- Advanced Revenue Recognition Journal
- Amortization Journal
- Bill Variances Journal (SCM)
- Collect Tegata and Pay Tegata
- Entity Open Balance Journal Entry

- Intercompany Elimination Journal Entry
- Offset Journal Entry (Absolute Balance Update)
- Recognize Gift Certificate (SCIS)
- Revaluation Journal (FX Revaluation)
- Revenue Reclassification Journal
- Revenue Recognition Journal Entry
- Time Posting to Journal Entry (PSA)
- Transactions created during historical transaction processing (HTP)

You can apply custom segments to revenue arrangement and revenue element records, which are part of the Advanced Revenue Management (Essentials) feature.



Important: You can set GL impact only when creating a new custom segment. You can't change the GL impact option after saving the segment.

Examples

You enter a standard invoice or cash sale and set or source a GL segment value on the body, line, or both. The autogenerated COGS and revenue lines on the transaction have the same segment value.

You enter a sales order with the GL segment value on the item, and then you fulfill the item. The COGS line on the GL impact page gets the segment value from the item line. When you invoice the sales order later, the revenue line on the GL Impact gets the same segment value. Both COGS and revenue lines source the GL segment value from the sales order item line unless the user manually overwrites the values.

For more information, see the help topics [GL Impact Page](#) and [Cost of Goods Sold \(COGS\) GL Impact](#).

To configure GL impact for a custom segment:

1. Go to Customization > Lists, Records, & Fields > Custom Segments > New.
2. Check or clear the **GL Impact** box as needed.
3. Click **Save**.

Filtering for a Custom Segment

If needed, you can set up a segment so that, when it appears on a record, its values are filtered. Values can be filtered based on choices the user made in other classification fields on the same record.

For example, consider a company that markets entertainment media. This company has a segment called Profit Center, with values such as Books, Games, Music, and Video. The company operates in APAC, EMEA, and North America, and has Location values that represent each of those geographic areas.

Suppose that both Profit Center and Location are available on sales transactions, but for some locations only certain Profit Centers are available. For example, all profit centers may be available in North America. However, in the other three locations, only games, music, and video are available.

In this case, you can configure the Profit Center segment so that its values are filtered based on the value selected for Location. With this configuration, you can specify that, if the selected Location is EMEA, the Books value is hidden from the list of Profit Center values.

The image shows a user interface for filtering custom segments. It consists of two main sections. The first section, titled 'Location', contains a dropdown menu with 'East Coast : New York' selected. The second section, titled 'Profit center', contains a dropdown menu with a blue vertical bar on the left and a list of options: 'NEW', 'Clothing', 'Outerwear', 'Jewelry', and 'Shoes'. The 'NEW' option is currently selected.

In addition to Location, you can filter based on the values selected in the Class and Department fields, if those features are enabled. You can also filter based on choices made in another segment. In OneWorld accounts, you can also filter by the Subsidiary field.

Note also that you can filter by one field or by multiple fields.

Notes:

- Custom segments don't support filtering for revenue arrangements and revenue recognition journal entries. If you set up filtering on a custom segment, the creation of those transactions might not work. You may get an error similar to "Invalid cseg_product_line reference key <number> for cseg_product <NULL>." If you get an error like this, remove the filters on the custom segment. For more information about these transactions, see [Updating Revenue Arrangements](#) and [Generating Advanced Revenue Recognition Journal Entries](#).
- Custom records don't have Class, Department, Location, or Subsidiary standard fields. Therefore, if you apply a custom segment to any custom record or custom segment, you can't filter the custom segment values using those fields. You can, however, apply custom segments to custom record types, custom segments, and standard records, even when filtering by classification is selected. If you apply a custom segment to a custom record type and select a standard record type that supports standard classification filtering, the classification filtering options will be applied only to the standard record type. Consequently, selected filtering options to other custom segments that are applied on the currently configured segment will be applied to the custom record type. For more information, see [Filtering Segments by Class, Department, Location, or Subsidiary](#).

For more details about filtering, see the following topics:

- [Setting Up Filtering for a Custom Segment](#)
- [Removing Filtering from a Custom Segment](#)
- [Viewing a Custom Segment's Filtering Relationships](#)

Filtering Segments by Class, Department, Location, or Subsidiary

You can filter segments using standard fields that are available on a record, including the Class, Department, Location, and Subsidiary fields. However, you can't always filter a segment using these fields.

Custom records don't have these standard fields. Therefore, if you apply a custom segment to any custom record type or custom segment, you can't filter the custom segment values using these fields. For more information, see [Applying a Custom Segment to Record Types](#).

However, custom segments can be applied to custom records and standard records, such as transactions and items, while filtering by classifications (class, department, location, and subsidiary) is selected. For more information, see [Viewing a Custom Segment's Filtering Relationships](#).

For more information about filtering custom segments, see [Filtering for a Custom Segment](#) and [Setting the Segment's Filtered by Field](#).

For information about record types that do and don't support filtering by Class, Department, Location, and Subsidiary, see the following topics:

- [Record Types that Support Filtering by Class, Department, Location, and Subsidiary](#)
- [Record Types that Do Not Support Filtering by Class, Department, Location, and Subsidiary](#)

Record Types that Support Filtering by Class, Department, Location, and Subsidiary

The following record types support Class, Department, Location, and Subsidiary filtering:

- Transaction types
- Transaction line types
- Entities
- Items
- Some other record types, specifically:
 - Allocation Schedule Destination Line
 - Allocation Schedule Source Line
 - Budget Import

For general information about filtering segments by Class, Department, Location, or Subsidiary, see [Filtering Segments by Class, Department, Location, or Subsidiary](#).

Record Types that Do Not Support Filtering by Class, Department, Location, and Subsidiary

The following record types don't support Class, Department, Location, and Subsidiary filtering:

- Custom records
- Custom segments
- CRM record types
- Other record types not listed in [Record Types that Support Filtering by Class, Department, Location, and Subsidiary](#).

For general information about filtering segments by Class, Department, Location, or Subsidiary, see [Filtering Segments by Class, Department, Location, or Subsidiary](#).

Applying Custom Segments to Custom Records with Standard Segment Classification Filtering

You can apply custom segments to custom record types, custom segments, and standard records, even when filtering by classification is selected.

Note the following:

- When filtering by classification is selected in the main section Filter by field on the custom segment configuration page, the filtering options apply only for segments on standard records.
- Simultaneously, the segment can be applied on custom records and other custom segments, but classification filter by options are ignored. Only other custom segment filter by options are used.

When applying a custom segment to a custom record type, you can select the custom record type on the Application & Sourcing subtab. This lets you apply the custom segment to both custom record types and standard record types, such as transactions and items, all within the same subtab. If you select a custom record type and a standard record type, and you want to filter by standard classification, the classification filtering options will be applied only to the standard records.

A read-only Filter by column on the Custom Segment configuration page displays the custom segment filter that's applied to the custom record instance. The Filter by column displays only non-standard segment classification options. If the custom segment isn't applied to the custom record type, or if there's no filtering, the field is blank. Inactive custom segments are displayed followed by (inactive) in brackets. This column is visible only in view mode and links to specific segments.

This Filter by display happens automatically, so you don't have to configure anything. The filtering settings are determined by the Filtered by field in the Main section of the Custom Segments configuration page.

Here's an example of the Filter by display field on the Custom Record Types subtab.

The screenshot shows the 'Custom Segment' configuration page in NetSuite. The 'Application & Sourcing' subtab is active. The 'Custom Record Types' section at the bottom contains a table with the following data:

APPLIED	RECORD TYPE	SOURCE LIST
Yes	Cloth Manufacturer	
No	Cloth Quality	

The 'FILTER BY' field is highlighted with a red box, showing 'Vendor Origin'.

Filtering Behavior

Here's an outline of the filtering behavior for custom segments applied to custom records.

Selected Filter by Options (C/D/L/S)	Selected Filter by Options to Custom Segments	Behavior on Custom Record Instances
No	No	All segment values are available. (No filtering applied.)
No	Yes	Filtering works. The segment displays only values permitted by the custom segment.
Yes	No	All segment values are available. (No filtering applied.)
Yes	Yes	Filtering works, but only by another custom segment. Filtering by class, department, location, and subsidiary are ignored.

For a detailed example and more information, see [Filtering Custom Segment Values on Custom Records Example](#).

Filtering Custom Segment Values on Custom Records Example

You can apply segments to both standard and custom record types—even when filtering by standard segments (Class, Department, Location, Subsidiary) is enabled. However, it's important to understand how filtering behaves differently on custom records compared to standard records.

This topic illustrates a real-world example of custom segments for U.S. State and U.S. City and discusses how filtering behaves under different conditions.

Filtering U.S. City by U.S. State and Subsidiary

Suppose your company operates in multiple subsidiaries and you want to track city and state information for both standard transactions and a custom record type called Contract.

You create two custom segments:

On Standard Records

On a standard record, such as a transaction, when you select a value for Subsidiary and U.S. State, the available values in the U.S. City segment are filtered based on both selections. For example, if Subsidiary = US Subsidiary and U.S. State = California, only cities in California for the US Subsidiary (for example, Los Angeles, San Francisco) are available.

Here's how the custom segment filtering setup for this scenario looks:

Custom Segment

EditBackManage ValuesActions

Primary Information

LABELUS City

IDcseg11

RECORD IDcustomrecord_cseg11

CUSTOM RECORD TYPEUS City

TYPEList/Record

☐ INACTIVE

DISPLAY TYPENormal

☐ SHOW IN LIST

FILTERED BYSubsidiaryUS State

Accounting

☐ GL IMPACT

Details

HELPDESCRIPTION

ValuesApplication & SourcingValidation & DefaultingPermissionsDependent SegmentsDisplay Order

DISPLAY ORDERXSUBLISTALPHABETICAL

VALUE	TRANSLATION	PARENT	INACTIVE	FILTERING
New Jersey				US State: New York Subsidiary: Parent Company : US Subsidiary
New York				US State: New York Subsidiary: Parent Company : US Subsidiary
San Francisco				US State: California Subsidiary: Parent Company : US Subsidiary
Los Angeles				US State: California Subsidiary: Parent Company : US Subsidiary

On Custom Record

The Contract custom record doesn't have a Subsidiary field. When you select a value for U.S. State, the available values in the U.S. City segment are filteredcreating a only by U.S. State. Filtering by Subsidiary is ignored because the Subsidiary field doesn't exist on the custom record.

For example, if U.S. State = California, all cities in California are available, regardless of subsidiary, as shown in this image:

The screenshot shows the 'Contract' custom record form in NetSuite. At the top, there are tabs for 'List', 'Search', 'Customize', and 'M'. Below the title, there are 'Save' and 'Cancel' buttons. The form includes several fields: 'NAME' with a star icon, an 'INACTIVE' checkbox, 'SEGMENT A' dropdown, 'A' dropdown, 'B' dropdown, 'C' dropdown with a hint '<Type then tab>', 'US STATE' dropdown (set to 'California'), and 'US CITY' dropdown (open, showing options: '- New -', 'San Francisco', and 'Los Angeles'). At the bottom left, there is a 'Notes' section with 'User Notes' and a 'Remove all' button.

Filtering by class, department, location, and subsidiary applies only to records that contain these fields. For custom records that don't have these fields, this type of filtering isn't applicable and is ignored.

Example Walkthrough

How this works in practice:

1. You create a custom segment U.S. City filtered by U.S. State and Subsidiary.
2. You apply both segments to the Contract custom record.
3. On a Contract record:
 - You select California in the U.S. State segment.
 - The U.S. City segment displays Los Angeles and San Francisco—both cities in California.
 - Because the Contract record doesn't have a Subsidiary field, subsidiary filtering isn't applied.

Consequently, you can still choose the correct city for the selected state, but the subsidiary filter isn't considered.

Benefits of Filtering Custom Segment Values on Custom Records

Previously, if you wanted to use filtering by Subsidiary but also needed to apply the segment to custom records, you faced difficult workarounds—such as duplicating segments or building complex validations. Now, you can use the same segment across standard and custom records, and NetSuite automatically applies only the filters that are relevant to each record type.

Notes:

- The Filter by field on the segment setup page displays the intended filtering, but on custom records, only filters for fields that are present on the record are applied.
- When a segment is filtered by another custom segment, NetSuite automatically ensures both segments are applied to the record.

Setting Up Filtering for a Custom Segment

As described in [Filtering for a Custom Segment](#), you can configure segments to filter values based on selections made in other classification fields.

To configure filtering, at a high level, you complete two steps:

- [Setting the Segment's Filtered by Field](#)
- [Setting Filters for Each of the Segment's Values](#)

Note: When you're configuring filtering, be aware that filtering choices can be overridden by a static default. That is, if you configure a static default for a segment, that value can always be saved on a new record, even if your filtering configuration would otherwise make the value impermissible. If you want to avoid this behavior, avoid choosing a static default that isn't permitted by your filtering configuration. For details about static defaults, see [Configuring Static Defaults for Custom Segments](#).

Setting the Segment's Filtered by Field

To enable filtering, you edit the Filtered by field of the segment whose values are being filtered. For example, if you had a Profit Center segment whose available values depend on the selection made in the Location field, you edit the Profit Center segment. No changes are required to the other classification field (in this case, the Location field).

Note: Custom segments don't support filtering for revenue arrangements and revenue recognition journal entries. For more information, see [Filtering for a Custom Segment](#).

To configure the segment's Filtered by field:

1. Edit the custom segment you want to filter.
2. In the **Filtered by** field, select all the classifications to use for filtering. (In the preceding example, you select Location.) To select more than one value, hold down the Ctrl key.

Notes:

- In some cases, you may want to select another custom segment in the Filtered by list, but that segment isn't listed. In these cases, the problem may be that the other segment already has a filtering relationship with the segment you're editing. To find out, go to the other segment definition, and view the Dependent Segments subtab. This subtab lists all the segments that currently filter by the segment you're viewing.
- Custom records don't have Class, Department, Location, or Subsidiary standard fields. Therefore, if you apply a custom segment to any custom record or custom segment (on the Application & Sourcing subtab), you can't filter the custom segment values using those fields. You can, however, apply custom segments to custom record types, custom segments, and standard records, even when filtering by classification is selected. If you apply a custom segment to a custom record type and select a standard record type that supports standard classification filtering, the classification filtering options will be applied only to the standard record type. Consequently, selected filtering options to other custom segments that are applied on the currently configured segment will be applied to the custom record type. For more information, see [Filtering Segments by Class, Department, Location, or Subsidiary](#).

3. Click **Save**.

Setting Filters for Each of the Segment's Values

After the segment's **Filtered by** field has been configured, you must edit each of the segment's values. (In the example from the [Setting the Segment's Filtered by Field](#) topic, you edit the Profit Center segment's values.) If you don't edit a value, that value won't be available for users to select. You can edit values in two ways:

- [Editing Values Within the Segment Definition](#)

■ Editing Each Segment Value Directly

Important: Make sure you edit every value, if you want every value to be available under some circumstance. If you don't set the filtering conditions for a value, that value is never displayed in the segment's list.

Note: Custom segments don't support filtering for revenue arrangements and revenue recognition journal entries. For more information, see [Filtering for a Custom Segment](#).

Editing Values Within the Segment Definition

This topic describes how to set filter conditions for each segment value by editing the Values sublist within the segment definition. For general information about value filtering, see [Setting Filters for Each of the Segment's Values](#).

If you have permission to edit the segment definition, you can set filters for each value by editing the Values sublist.

To edit values within the segment definition:

1. Edit the custom segment for which you want to add filtering.
2. In the Values sublist, edit each value as follows:
 - a. For the value that you want to configure, click anywhere in that row to enable a series of buttons.
 - b. Click **Set Filters** to open a popup window. The popup window includes a **Filter** list. Its value is the field selected in the segment's **Filtered by** field. Directly below the list is a list of that field's values.
 - c. In the popup window, select the values of the **Filter** field that permit this value to be displayed as an option. For example, suppose you're editing the Book value of the Profit Center segment. If you want this value to be available only when the West Coast: California location is selected, select West Coast: California. To select more than one value, hold down the Ctrl key.

- d. If the segment's **Filtered by** field includes more than one selection, use the **Filter** list to select another classification and set its values.

- e. When you've selected values for all fields in the **Filter** list, click **Set**.



Important: You **must** set values for all of the fields available in the **Filter** list, or the value is never available to users.

- f. Click **OK**.
3. If there are other values that should be available, and don't have filters set, repeat the preceding editing steps for that value.
4. Click **Save** on the segment definition.


Editing Each Segment Value Directly

This topic describes how to set filters for individual segment values when you do not have permission to edit the segment definition itself. For general information about value filtering, see [Setting Filters for Each of the Segment's Values](#).

If you don't have permission to edit the segment definition, but you do have permission to edit its values, use the following procedure.

To edit each value directly:

1. If it isn't already open, open the value for editing. For more information, see [Editing Values of a Custom Segment by Clicking Manage Values](#).
2. Find the **Filter by [Classification Field]** field, where [Classification Field] is the field selected in the segment's **Filtered by** field. This list includes all possible values of the field by which you're filtering.
3. Select the values of the classification field that should permit the user to select the value that you're editing. For example, suppose you're editing the Book value of the Profit Center segment. If you want this value to be available only when the West Coast: California location is selected, select West Coast: California. To select more than one value, hold down the Ctrl key.

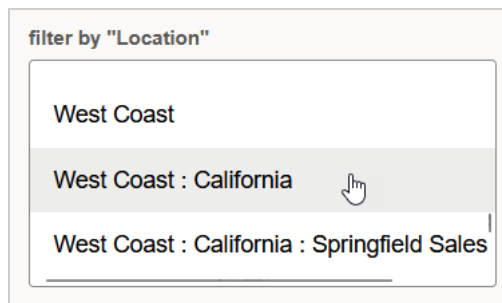

4. If the page includes additional fields labeled **Filtered by [Classification Field]**, make selections in each of these fields.



Important: You **must** set values for all of the **Filtered by** fields, or the value you're editing is never available to users.

5. Click **Save**.

Filtering Across Body and Line Segments

Segment values on transaction lines can be filtered by the segment value set in the body of a transaction. When you select a value for a parent segment, child segments of only that parent are available for selection on transaction lines.

Note: You can have issues with filtering if you have the following scenario:

- A parent field exists on the expense line.
- You hide the parent field on the expense line using form customization.

Custom segment filtering on an expense line uses the parent field to filter. When you hide the parent field, the field still exists as a hidden field. Filtering from a parent body field won't work because the custom segment on the line continues to filter by the hidden parent line field. The custom segment doesn't filter by the parent body field.

For example, you have a parent custom segment called Business Unit that's available on purchases at the body level and includes a list of various areas of the business, such as grocery, bakery, and cafe.

Custom Segment List Search Copy to Account More

Save Cancel Change ID Manage Values Actions

Primary Information

Label *

ID ☐ USE AS FIELD ID

Record ID

Custom Record Type

Type ☐ List/Record ☐ Inactive

Display Type

☐ Show in List

Filtered by

Accounting

☒ GL Impact

Details

Help

Description

Values Application & Sourcing Validation & Defaulting Permissions Dependent Segments Display Order Translation

Display Order ☒ Sublist ☐ Alphabetical

ID	Value *	Pastries	Translation	Parent	Inactive	Filtering
1	Cafe					
2	Grocery					
3	Bakery					

✓ Add ✕ Cancel + Insert 🗑 Remove ⬆ Move Up ⬇ Move Down ⬆ Move To Top ⬇ Move To Bottom + Set Filters

Save Cancel Change ID Manage Values Actions

The child custom segment, Product Line, is filtered by Business Unit and available on purchase transaction lines. Items include food, cold beverages, hot beverages, and frozen desserts. For each list value, you set filtering to specify for which business unit the item will be available.

Custom Segment

ListSearchCopy to AccountMore

SaveCancelChange IDManage ValuesActions

Primary Information

Label *
Product Line

ID
cseg_product_line ☐ USE AS FIELD ID

Record ID
customrecord_cseg_product_line

Custom Record Type
Product Line

Type
List/Record

☐ Inactive

Display Type
Normal

☐ Show in List

Filtered by

Activity Code

Business Area

Class

Accounting

☐ GL Impact

Details

Help

Description

Values

Application & Sourcing

Validation & Defaulting

Permissions

Dependent Segments

Display Order

Translation

Display Order ☒ Sublist ☐ Alphabetical

ID	Value *	Translation	Parent	Inactive	Filtering
1	Cold Beverages				
4	Soda		Cold Beverages		
5	Coffee		Cold Beverages		
2	Hot Beverages				
3	Coffee		Hot Beverages		

On a purchase order, selecting a business unit at the body level filters the items available in the Product Line list at the line level, making order entry less cumbersome.

SUBSIDIARY

CLASS

LOCATION *

DEPARTMENT

ItemsShippingBillingAccountingRelationshipsSales Team

BUSINESS UNIT

Cafe

- New -

Hot Beverages

Cold Beverages

Desserts

Save

Cancel

Auto Fill

Reset

Actions

Removing Filtering from a Custom Segment

When you remove filtering from a segment, all of its values become available for selection. Use the following procedure to remove filtering from a segment.

To remove filtering from a segment:

1. Edit the custom segment that no longer needs filtering.
2. To remove filtering, clear the **Filtered by** field selections. To clear a selection, hold down the Ctrl key and click a selected field. Note that you may have to use the scroll bars to see all classifications that have been selected.
3. Click **Save**.

Viewing a Custom Segment’s Filtering Relationships

When working with a custom segment, you may want to know what filtering relationships it has with other segments. You can find this information in two places on the segment definition:

- The **Filtered by** body field – Shows the segments that the current custom segment uses to filter its values.
- The **Dependent Segment** subtab – Shows the segments that use the current segment for filtering their values.

To edit a custom segment definition, go to Customization > Lists, Records, & Fields > Custom Segments. Find the segment and click **Edit** or **View**.

To view a custom segment definition, you need at least the View level of the Custom Segments permission. For details about this permission, see [Granting a Role Permission to Manage Custom Segments](#).

Applying a Custom Segment to Record Types

For a custom segment to be available on records, you must apply the segment to one or more record types or transaction sublists. After you do, the segment is available as a field on instances of that records. Depending on where you apply the segment, it's available either as a body field or as a column in a transaction sublist. Authorized users can use the segment to classify the record or transaction line. On standard forms, the segment displays on the Custom subtab of the record instance.

You can also apply segments to groups of record types, in some cases, or make them columns in transaction sublists, or groups of transaction sublists. For example, you can apply a segment to all sales transactions or to all sales item sublists. You can also apply a segment to another segment.

You apply segments to record types when creating or editing a segment by using the Application & Sourcing subtab.

The options available in the Application field group of the Transactions and Transaction Columns subtabs enable you to specify the transactions and transaction columns where the custom segment is available.

See also: [Applying Custom Segments to Custom Records with Standard Segment Classification Filtering](#)

For more information about the transactions where custom segments can be used, see [Transaction Types Supported by Custom Segments](#).

 **Note:** Custom segments can't be applied to custom lists.

To apply a segment to a record type, transaction sublist, or group:

1. Edit the custom segment.
2. Click the **Application & Sourcing** subtab.

The subtabs available from the Application & Sourcing subtab include the following.

- Transactions, including the following items:
 - Custom transaction types
 - To apply the custom segment to Collect Tegata and Pay Tegata transactions, check the Tegata box
 - To apply the custom segment to single vendor payments and bill payments to multiple vendors, check the Vendor Payment box.
- Transaction columns, and custom transaction sublists

You can configure the kit or assembly custom segment column field to copy values from sales order items to fulfillment items. For more information, see [Apply to Kit or Assembly Components Setting for Custom Segments and Transaction Line Custom Fields](#).

- Entities
- CRM
- Items
- Other Record Types, including the following items:
 - Advanced revenue recognition records
 - Allocation Schedule destination line – Applies the custom segment to the destination lines on an allocation schedule
 - Allocation Schedule source line – Applies the custom segment to the source lines on an allocation schedule

For more information about allocation schedules, see the help topic [Expense Allocation Overview](#).

- Budget Import – If a custom segment is applied to a budget record, and budget transactions exist, the custom segment can't be inactivated, deleted, or removed from the budget record.



Important: To avoid data corruption, the Custom Segments feature can't be disabled if a custom segment is applied to a budget record.

- Multi-book accounting records



Note: Some records aren't available unless the feature is enabled. For example, the accounting book record isn't available if the Multi-Book Accounting feature isn't enabled.

- Custom Record Types, which includes any custom record types available in the account
- Custom Segments, which includes all custom segments available in the account

If the **Use as Field ID** box is checked for the custom segment, no field ID fields or columns are shown on the Application & Sourcing subtabs because one ID is used for all fields.

3. Specify where the custom segment is available by checking the appropriate boxes on each of the subtabs.
 - Some of the subtabs have an Application field group, where you specify the transactions where this custom segment is available.
 - All of the subtabs include a list of record types, where you specify the record types where the custom segment is available.
4. Click **Save**.

Apply to Kit or Assembly Components Setting for Custom Segments and Transaction Line Custom Fields

You can configure kit or assembly custom segments or transaction line custom fields to copy values from sales order items to fulfillment items.

Custom Segments

You can configure the kit or assembly custom segment column field to copy values from sales order items to fulfillment items.

To configure the custom segment column field on items with kit or assembly components:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. Click the **Application and Sourcing** subtab. Then click the **Transaction Columns** subtab.
3. To have kit or assembly segments copy values from sales orders to related item fulfillments, check the **Kit/Assembly Components** box.

Transaction Line Custom Field

You can configure the kit or assembly transaction line custom field to copy values from sales order items to fulfillment items.

To configure the transaction line custom field on items with kit or assembly components:

1. Go to Customization > Lists, Records, & Fields > Transaction Column Fields.
2. Click the **Applies To** subtab
3. To have kit or assembly transaction line fields copy values from sales orders to related item fulfillments, check the **Apply to Kit/Assembly Components** box.

Kit and Assembly Components Behavior

The following table describes the behavior of the Kit/Assembly Components box for custom segment columns and the Apply to Kit/Assembly Components box for transaction line custom fields.

Behavior	Kit/Assembly Component box or Apply to Kit/Assembly Components box Checked	Kit/Assembly Component box or Apply to Kit/Assembly Components box Cleared
Field is visible on item sublist	Yes*	Yes*
Field value is saved on item sublist	Yes	No
Field value is carried over from transformed record (sales order to item fulfillment)	Yes	No
Can override segment of line field when kit component items are visible	Yes (can override)	No (can't override)

*Even if the Apply to Kit/Assembly Component box is used to hide the field, the kit or assembly field is available on the record through SuiteScript

*You can configure whether the field or segment is visible on the item fulfillment lines of the form. To make the field or segment visible, check the Item Fulfillment box on the Transaction Columns subtab of the Application & Sourcing subtab. You can override the Item Fulfillment setting of the custom field or custom segment on the Custom Form definition page where the fields and segments are listed.

Example of Overriding the Value of a Segment of Field on a Line with an Assembly Component

In the following example, for the Inventory and Child terms, you can override the original values in the Kitlinefield and the Kitsegment columns.

Primary Information

CUSTOM FORM: Standard Item Fulfillment
 REF. NO.: 5
 CUSTOMER: 1 Test Customer

CREATED FROM: Sales Order #506
 DATE: 11/26/2020

POSTING PERIOD: Nov 2020
 MEMO:

Classification

SEGMENT 1: 1
 SEGMENT 2:
 STATUS: Picked

Items | Shipping | Packages | Relationships | Communication | System Information | Custom

SELECT ITEM

Mark All | Unmark All

FULFILL	ITEM	DESCRIPTION	LOCATION	ON HAND	REMAINING	QUANTITY	INVENTORY DETAIL	DROP SHIP PO	OPTIONS	EXCLUDE ITEM FROM RATE REQUEST	KITLINEFIELD	KITSEGMENT
☒	Kit Item		Location 1	0	1	1					1	1
	Inventory Item			1,005	1	1					One	3
	Child Inventory Item			1,005	2	2						3
☒	Inventory Item		Location 1								2	2

Example of Kit and Assembly Values Being Copied to the Item Fulfillment

The following example shows kit and assembly custom segment columns or transaction line custom field values (S01 and S02) that have been copied from the sales order to the item fulfillment. The values are copied based on the configuration of the Kit/Assembly Components box on the custom segment definition page or the Apply to Kit/Assembly Components box on the transaction line custom field definition page.

ORACLE NETSUITE

Transaction Line Field

NAME: David Bager
 DESCRIPTION:

Custom Segment

NAME: S01
 TYPE: Line Record
 STORE FROM: KIT/ASSEMBLY COMPONENTS

Item Fulfillment

8 Customer UK SHIPPED

Primary Information

REF. NO.: 8
 CUSTOMER: Customer UK
 TEST NUMBER:

Items | Shipping | Packages | Relationships | Communication | System Information | Custom | GL Impact

ITEM	DESCRIPTION	LOCATION	ON HAND	QUANTITY	UNITS	ROW	CUSTOM SEGMENT
KitPackageItem		Location UK	0	1		111	S01
AssemblySerializedItem			0	1		112	S02
KitPackageItem		Location UK	0	1		113	S01
AssemblySerializedItem			0	1		114	S02

Dynamic Default Value Sourcing for Custom Segments

In some cases, you can apply a custom segment to two record types that have a relationship with each other. In these situations, you may want the segment value on one record to populate with the value selected on the other.

For example, in the standard NetSuite configuration, each sales transaction is associated with a particular customer record. You may want the segment value on a new sales transaction to populate with the

segment value saved on the corresponding customer record. You can configure this behavior by specifying dynamic default logic.

Note: Custom segments don't support sourcing for revenue arrangements and revenue recognition journal entries. If you set up sourcing, the value is correctly sourced on the original transaction. However, the value might not be transferred during creation of revenue arrangements or revenue recognition journal entries through **Schedule Revenue Recognition Journal Entries** and **Update Revenue Arrangements and Revenue Recognition Plans**. For more information, see the help topics [Scheduling Revenue Recognition Journal Entries](#) and [Updating Revenue Recognition Plans](#).

For more information about dynamic defaults, see the following topics:

- [Dynamic Defaulting for Custom Segments](#)
- [Creating Dynamic Default Logic for Custom Segments](#)
- [Dynamic Default Values in Custom Segments Example](#)

Dynamic Defaulting for Custom Segments

In some cases, you may want to apply a custom segment to two record types that have a relationship. In these cases, you may want the segment on one record to populate automatically with the value of the segment on the other. To configure this behavior, you must specify dynamic default logic for the segment.

With this approach, at a high level, you create a relationship between the following:

- One or more **target record types** – The group of record types, or single record type, whose instances receive the dynamically loaded default value.
- A field on the target record type – This field is used to identify the particular record instance that provides the default value. This record is the **source record instance**.

For more details, see the following topics:


- [Source List Choices for Custom Segments Dynamic Defaulting](#)
- [Choose a Target for Custom Segments Dynamic Defaulting](#)
- [Prerequisites for Creation of a Dynamic Default](#)

Source List Choices for Custom Segments Dynamic Defaulting

This topic describes how to use the Source List field to set up dynamic defaulting relationships for custom segments and clarifies what each option in the Source List represents. For general information about dynamic defaulting for custom segments, see [Dynamic Defaulting for Custom Segments](#).

You use the Source List field to set up dynamic defaulting.

Each choice in the Source List shows two terms. The first term represents the label of a field. The second term represents a record type.



Call out	Description
	This term represents the name of a field on the target record types. The selection that you make in this field always represents another record. For example, some transaction types have a field called Sales Rep. When a value for that field is saved on a transaction, that value identifies a specific employee record.
	This term represents the record type of the source record instance. To follow the example from the preceding row, a field labeled Sales Rep identifies a record of type Employee.

Choose a Target for Custom Segments Dynamic Defaulting

This topic describes how to select which record types and fields will receive dynamically defaulted values when configuring custom segments. For general information about dynamic defaulting for custom segments, see [Dynamic Defaulting for Custom Segments](#).

The Application & Sourcing subtab has several child subtabs. Each subtab represents a category of record type.

When you display some of these subtabs, you'll see only one Source List field. The choice you make in this field affects all of the record types selected on that subtab. When you go to certain other subtabs, you can select a alternate Source List option for those record types.

On two of the subtabs, you can specify a Source List choice for each record type listed. This option is possible for the types listed on two subtabs: Other Record Types and Custom Record Types.

Prerequisites for Creation of a Dynamic Default

This topic outlines the essential requirements and conditions that must be met for dynamic default values to be generated for custom segments. For general information about dynamic defaulting for custom segments, see [Dynamic Defaulting for Custom Segments](#).

Sometimes you may save a Source List choice, but a dynamic default isn't always generated for the applicable record types. For a default to be generated, the following statements must be true:

- **The source record instance must have a value saved in the segment field** – If the segment field on the source record instance hasn't been populated with a value, no dynamic default is created. For example, suppose you have configured the segment on sales transactions to populate with the segment value saved on the corresponding customer record. If the corresponding customer record doesn't have a value saved in the segment field, no dynamic default is created. To avoid this situation, make the segment required, as described in [Making a Custom Segment Mandatory](#).
- **The Source List field must exist on the entry form for the target record type** – On the subtabs where one Source List is used for many record types, not all record types have all of the fields listed. If you select an option in the Source List field, and one of the record types doesn't have that field, no default is ever created for instances of that record. For example, on the Transactions subtab, the Source List includes an option labeled Sales Rep (Employee). If you select that option, dynamic defaults are created for transactions with a Sales Rep field. For example, instances of the Cash Sale record type could receive the dynamic default value. However, for transactions such as Journal Entry, which doesn't have a Sales Rep field, no dynamic default can be created.
- **A value for the Source List field must be selected on the instance of the target record type** – Sometimes not every field on a record has a value saved. If an instance of the target record type is saved with no value selected for the field identified by the Source List, no default is created. For example, suppose you have configured account records to populate with a default value. In the Source List for the Account record type, you may have selected **Restrict to Location (Location)**. If an instance

of the account record doesn't have a value selected in the **Restrict to Location** field, no dynamic default can be created for that record.

Creating Dynamic Default Logic for Custom Segments

If needed, you can create dynamic defaulting for a custom segment. This capability can be useful when a segment is applied to multiple record types. For example, suppose you have a segment that has been applied to sales transactions and customer records. You can configure the segment so that, when it occurs on a sales transaction, the segment is populated with the segment value selected on the corresponding customer record. This type of defaulting overrides static defaulting.

You can configure dynamic defaults at the time you're creating the segment. You can also edit the segment later to add this configuration.

To create dynamic default logic for a custom segment:

1. Edit the custom segment.
2. Click the **Application & Sourcing** subtab.
3. Go to the subtab that represents the group or record type for which you want to configure dynamic defaulting. For example, to configure a default for transaction types, click the **Transactions** subtab. If you want to configure a default for one of the record types listed on the **Other Record Types** or **Custom Record Types** subtab, click one of those subtabs.
4. Set the **Source List** field to the appropriate value. The choices in this list each represent a field on the target record type, which is used to identify another record. For help understanding these options, see [Source List Choices for Custom Segments Dynamic Defaulting](#).
5. Click **Save**.

Example

In the following example, a Preferred Contact Method custom segment is set up to appear on sales orders, and be sourced from the customer record.

The screenshot shows the 'Application & Sourcing' configuration page for a custom segment. The 'Transactions' subtab is selected. The 'Field ID' is 'custbody_cseg_preferred_cont'. Under 'Sourcing', the 'Source List' is set to 'Customer (Customer)'. Under 'Application', 'Sales Transactions' is selected. A table at the bottom lists record types with checkboxes for application.

Applied	Record Type
☐	Work Order / Assembly Build
☐	ABC Cust Purchase Type Trans
☐	Bad Debt Accrual
☐	CC-Custom Sales Transaction
☐	Customer Payment
☐	Deposit

NetSuite automatically checks the Customer box on the Entities subtab to make the custom segment available on the customer record.

Values Application & Sourcing Validation & Defaulting Permissions Dependent Segments Display Order Translation

Transactions • Transaction Columns • **Entities** • CRM • Items • Other Record Types Custom Record Types Custom Segments

Field ID
custentity_cseg_preferred_cont

▼ Sourcing

Source List
▼

▼ Application

☐ Web Site Registration Form

Mark All Unmark All

Applied	Record Type
☐	Contact
☒	Customer
☐	Employee
☐	Entity Group
☐	Generic Resource
☐	Other Name
☐	Partner
☐	Project
☐	Project Template
☐	Vendor

If the preferred contact method is specified on the customer record, it defaults in automatically when you select the customer on a sales order.

Sales Order

Save & Print Cancel Auto Fill Actions

☐ Accounting Approval ☐ Accounting Approved? Approval Status ▼

▼ Primary Information

Custom Form *
Custom Sales Order 5

Order #
SORD100600

Customer *
W.E. Electronics

Date *
8/11/2024

Status *
Pending Fulfillment

Start Date

End Date

PO #

Memo

☐ For Invoice Grouping

▼ Sales Information

Opportunity

Sales Effective Date

☐ Exclude Commissions

Lead Source

▼ Classification

Sales Channel

Department *

Class

Location
East Coast

Order Type

Preferred Contact Method
Email

Profit center

Summary

Total (All Sales)	0.00
Subtotal	0.00
Discount Item	0.00
Tax Total	0.00
Shipping Cost	0.00
Handling Cost	0.00
Gift Certificate	0.00
Total	0.00

When the customer is selected on the sales order, the Preferred Contact Method field is filled in automatically with the value from the customer record.

Dynamic Default Values in Custom Segments Example

You can use sourcing to create a dynamic default on a filtered segment. The steps in this example outline how you can set up a state to filter by city on a sales order. Then when you enter the city name on a sales order, the state fills in automatically.

To complete the steps in this example, you'll need to create custom segments. For more information, see [Creating a Custom Segment](#).

Complete the following steps

1. [Creating a Custom Segment Type that Determines the Dynamic Default Value.](#)
2. [Creating a Custom Segment Type that Displays the Dynamic Default Value.](#)
3. [Setting Dynamic Default Values.](#)
4. [Using the Segments on a Transaction Form.](#)

Creating a Custom Segment Type that Determines the Dynamic Default Value

This topic describes Step 1 of the example for creating dynamic default values in custom segments. For a complete list of steps for this example, see [Dynamic Default Values in Custom Segments Example](#).

Create the custom segment whose value is used to determine the dynamic default value of another field. In this example, the custom segment is for the name of the city and is used to determine the default state name.

To create the segment:

1. Go to Customization > Lists, Records, & Fields > Custom Segments > New.
2. In the **Label** field, enter the name of the segment, for example, **City**.
3. Complete the fields, as required.
4. Select the **Application & Sourcing** subtab. Then select the **Transactions** subtab.
5. Under the **Application** subheading, check the box beside the transactions you want to apply this segment to. For this example, check the **Sales Transactions** box.
6. Click **Save**.

Creating a Custom Segment Type that Displays the Dynamic Default Value

This topic describes Step 2 of the example for creating dynamic default values in custom segments. For a complete list of steps for this example, see [Dynamic Default Values in Custom Segments Example](#).

Create the custom segment whose value dynamically displays in the field based on the value entered in the custom segment field created in the preceding procedure. In this example, the custom segment is for the name of the state, and it'll automatically appear based on the city name entered.

To create the segment:

1. Go to Customization > Lists, Records, & Fields > Custom Segments > New.
2. In the **Label** field, enter the name of the segment, for example, **State**.
3. Complete the fields, as required.
4. Select the **Application & Sourcing** subtab. Then select the **Transactions** subtab.
5. In the Application field group, check the box beside the transactions you want to apply this segment to. For this example, check the **Sales Transactions** box.
6. In the **Source List** field, select the label of the first custom segment created. For this example, select **City**.

7. A message appears informing you that setting the source list (custom segment) requires the system to apply the segment to the record type. To proceed, click **OK**.
8. Click **Save**.

Setting Dynamic Default Values

This topic describes Step 3 of the example for creating dynamic default values in custom segments. For a complete list of steps for this example, see [Dynamic Default Values in Custom Segments Example](#).

After the segments are created, you must set the default values for custom segment values. For example, if you want a value for state to dynamically display when a specific city is entered in the City field, you set this up on the City entry form.

To set the dynamic default values for a segment:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find the custom record that's associated with the City segment that you created and click **List**.
3. To create a new record, click **New**. To edit an existing record, click **Edit**.
4. If this is a new record, in the **Name** field, enter the name of the city.
5. In the **State** field, enter the state. When the city name specified is entered on a sales order, the state name set up here appears automatically in the **State** field.
6. Click **Save**.

Using the Segments on a Transaction Form

This topic describes Step 4 of the example for creating dynamic default values in custom segments. For a complete list of steps for this example, see [Dynamic Default Values in Custom Segments Example](#).

You can now use the segments you created to fill in values dynamically on sales forms. In this example, when you create a new sales order, the newly-created segments appear on the Custom subtab of the sales order. When you enter a city name, the state automatically fills in with the state that you specified in the dynamic defaulting setup in the preceding procedure.

Validation and Static Default Values for Custom Segments

If needed, you can create default values for custom segments. For any segment, you can use one or both of the following options:

- You can choose any of the segment's available values and make it the static default. That value is automatically selected on all new records that use the segment, unless other logic creates an alternate default. For details, see [Configuring Static Defaults for Custom Segments](#).
- You can configure logic that dynamically generates default values. You can specify varying logic for various groups of record types. With this approach, the default for a record is derived from the segment value that was saved on a related record. If a dynamic default value is loaded on a record, it overrides a static default. For more details, see [Dynamic Default Value Sourcing for Custom Segments](#).

Making a Custom Segment Mandatory

You can make a segment required on records where it's used. To make a segment required, check the Mandatory box on the segment definition. This setting applies to all record types that use the segment.

However, be aware that even with this configuration, the segment isn't necessarily required in all situations. For example:

- A custom form for the record type can be designed to prevent the custom segment from being visible. When a user creates or updates a record using this type of form, the segment isn't required.
- Some users may have permission to create and edit a specific record type, but they may not have permission to set a value for the segment. When these users work with the record, the segment isn't required.

You can configure a segment to be required when you're creating the segment. You can also edit the segment later to change this setting.

To make a segment mandatory:

1. Edit the custom segment.
2. Click the **Validation & Defaulting** subtab.
3. Check the **Mandatory** box.
4. Click **Save**.

Configuring Static Defaults for Custom Segments

When you create a static default, you select a single value from the segment's list of available values. When the segment appears on a new record as a field, it's populated with that value, unless other configuration overrides it.

Note the following:

- If you've configured dynamic defaulting for a segment, any dynamic default that's generated overrides the static default. For details about dynamic defaults, see [Dynamic Default Value Sourcing for Custom Segments](#).
- If the segment uses filtering, note that the value you choose as the static default can always be saved on a new record, even if your filtering configuration would otherwise make that value impermissible. If you want to avoid this behavior, choose a static default that's always permitted by your filtering configuration. For more details, see [Filtering for a Custom Segment](#).

You can configure static defaults when you're creating a segment. You can also edit a segment later to add this configuration.

To configure a static default value for a custom segment:

1. Edit the custom segment.
2. Click the **Validation & Defaulting** subtab.
3. Set the **Default Selection** list to the appropriate value.
4. Click **Save**.

User Permissions for a Custom Segment

Every segment that has been applied to a record becomes a field on that record. Therefore, you can use the Permissions subtab to manage permissions for each segment in its capacity as a field on another record. At a high level, you can give a role permission to:

- **View and use a segment when it appears on a record** – For each segment, you can explicitly permit or deny a role from being able to set a value for the segment. You can also make the segment hidden or read-only for a particular role. You manage these types of privileges by using the segment's Record Access permission. For more details, see [Granting Roles Permission to Set Segment Values on Records](#).
- **View and refer to the segment when using searches and reports** – For each segment, you can explicitly permit or deny a role from being able to use the segment as a search field or column. You can also permit or deny a role from being able to use segments when customizing reports. You manage these types of privileges by using the segment's Search/Reporting Access permission. For more details, see [Granting Roles Permission to Use Segments in Searches and Reports](#).

Granting Roles Permission to Set Segment Values on Records

For every segment, you can control which roles can view and interact with the segment as a field. You control this access by defining the Record Access level for each role. You can also set a default access level, which applies to all roles that don't have an access level explicitly defined.

For details, see the following sections:

- [Scope of the Record Access Permission](#)
- [Assigning the Record Access Permission](#)

Scope of the Record Access Permission

The following table describes the access associated with the various levels of the Record Access permission.

Level	Users can:	Users can't:
None	—	View or set values for the segment on the records where the segment has been applied. For these users, the segment — both its label and value — are hidden.
View	View segments on the records where the segment has been applied (if the user has permission to view or edit the record type). Users can view both the segment label and the selected value, if a selection has been saved. For users with this access level, the segment field is read-only, even if the user has permission to edit the record.	Set values for the segment.
Edit	View and set values for the segment on records where the segment has been applied (if the user has permission to edit the record type).	—

Assigning the Record Access Permission

Use the following steps to assign the Record Access permission to a role.

To assign the Record Access permission to a role:

1. Edit the custom segment.
2. Click the **Permissions** subtab.

3. For a role to have access, the role must be referenced in the Permissions sublist. Review the sublist to see if the role is already listed, then do one of the following:
 - If the role isn't listed, add a line to the sublist: In the **Role** column, select the appropriate role. In the **Record Access Level** column, select the required access level. Review the values for this role in the columns labeled **Value Management Access Level** and **Search/Reporting Access Level**. Make any changes as needed. Be aware that the Value Management Access permission gives the user permission to create values, so review this column with care. For details, see [Granting a Role Permission to Manage Custom Segment Values](#). Then click **Add**.
 - If the role is already listed but doesn't have the ability to manage values, then edit the role's access. Find the role in the sublist. Edit the corresponding value in the **Record Access Level** column. Then click **OK**.
4. From the **Default Record Access Level** list, set the default record access level for a segment. This default access level applies to roles not listed in the Permissions sublist with an explicit access level.
5. Click **Save**.

Granting Roles Permission to Use Segments in Searches and Reports

For every segment, you can control which roles can view and interact with the segment when working with searches and reports. You control this access by defining the Search/Reporting Access level for each role. You can also set a default access level, which applies to all roles that don't have an access level explicitly defined.

For details, see the following sections:

- [Scope of the Search/Reporting Access Permission](#)
- [Assigning the Search/Reporting Access Permission](#)

Scope of the Search/Reporting Access Permission

The following table describes the access associated with the various levels of the Search/Reporting Access permission.

Level	Users can:	Users can't:
None	—	■ Use the segment as a search filter. ■ Use the segment as a column in search results. ■ View columns that reference custom segments in saved searches. The user can view the saved search, but columns referencing custom segments are omitted from the view. ■ View reports that use the segment as a filter or include it as a column. ■ Customize reports to use custom segments as filters or columns.
View	■ View saved searches that include custom segments in their results. ■ View reports that use the segment as a filter or include it as a column.	■ Use the segment as a search filter ■ Use the segment as a column in search results. ■ Customize reports to use custom segments as filters or columns.
Edit	■ View saved searches that include custom segments in their results.	—

Level	Users can:	Users can't:
	- View reports that use the segment as a filter or include it as a column. - Use the segment as a search filter. - Use the segment as a column in search results. - Customize reports to use custom segments as filters or columns.	

Assigning the Search/Reporting Access Permission

Use the following steps to assign the Search/Reporting Access permission to a role.

To assign the Search/Reporting Access permission to a role:

1. Edit the custom segment.
2. Click the **Permissions** subtab.
3. For a role to have access, the role must be referenced in the Permissions sublist. Review the sublist to see if the role is already listed, then do one of the following:
 - If the role isn't listed, add a line to the sublist: In the **Role** column, select the appropriate role. In the **Search/Reporting Access Level** column, select the required access level. Review the values for this role in the columns labeled **Value Management Access Level** and **Record Access Level**. Make any changes as needed. Be aware that the Value Management Access permission gives the user permission to create values, so review this column with care. For details, see [Granting a Role Permission to Manage Custom Segment Values](#). Then click **Add**.
 - If the role is already listed but doesn't have the ability to manage values, then edit the role's access. Find the role in the sublist. Edit the corresponding value in the **Search/Reporting Access Level** column. Then click **OK**.
4. From the **Default Search/Reporting Access Level** list, set the default search/reporting access level. This access level applies to any role that isn't listed in the Permissions sublist with a specific access level.
5. Click **Save**.

Dependent Segments

When editing an existing segment, you may want to know what filtering relationships it has with other segments. From the custom segment definition, use the Dependent Segments subtab to see a list of the segments that use the current segment for filtering their values.

Setting Display Order of All Custom Segments

You can specify the display order of custom segments in the body and lines on transactions, on other records, and on the GL Impact page, if the custom segment has GL impact. This display order reflects the priority and dependencies of custom segments.

The Display Order subtab lists all active custom segments in display order.

Values Application & Sourcing Validation & Defaulting Permissions Dependent Segments **Display Order** Translation

Move To Top Move To Bottom

Label

==	Sales Region
==	Geographic Region
==	Business Unit
==	Sales Channel

By default, the current segment is selected. When you create a new custom segment, the name is listed as **– Segment currently being created –** until you enter a name in the **Label** field. To change the display order of custom segments while in Edit mode, drag the list items to the appropriate locations, or click the **Move To Top** and **Move To Bottom** buttons.

On the Custom Segments list page, numbers in the **Display Order** column show the segment display order.

Custom Segments List Search

View: Custom Segment Customize View New Custom Segment

Filters

☐ Show Inactives Total: 16

Edit View	Internal ID	Display Order ↑	Label	Id	GL Impact
Edit View	21	1	Sales Region	cseg__xx_sales_regi	No
Edit View	29	2	Geographic Region	cseg16	No
Edit View	1	3	Business Unit	cseg_business_area	Yes
Edit View	22	4	Sales Channel	cseg_ss_sales_chann	No

The default display order is based on the order the segments were created. New segments are added to the end of the display order unless you change it. If you check **Show Inactives** on the list page, inactive custom segments appear at the bottom of the list because they have no display order.

Editing Custom Segments

In some cases, you may want to edit an existing custom segment. For example, you may want to change the segment's label, the record types where the segment is applied, or the segment's default value. Most fields on a custom segment can be changed after creation, but there are some exceptions:

- The **ID** field can't be changed.
- The **GL Impact** option can't be changed.
- Your ability to change the **Type** field depends on your permissions. For details, see [Required Permissions for Editing Custom Segments](#).

For more information about editing custom segments, see [Inactivating a Custom Segment](#) and [Deleting a Custom Segment Definition](#).

When you create a custom segment, an associated custom record type is also created. The custom record type has the same name as the custom segment. You can edit the custom record at any time to add custom segment values. For more information about creating custom record types, see [Creating Custom Record Types](#).

Custom segment definitions can be updated at any time, even if the segment is used in a transaction that's in a closed period.

Note also that changing the **Type** field from Multiple Select to List/Record can cause data loss. For more details, see [Custom Segment Types](#).

To edit a custom segment:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. In the list, find the segment and click **Edit**.
3. Make any necessary changes. If you need to add or update values, and the Values sublist is dimmed, click **Manage Values**. This opens a separate page for working with values. For details, see [Creating Values by Clicking Manage Values](#).

If you need help understanding other fields on the segment definition, see the following topics:

- [Filtering for a Custom Segment](#)
- [Applying a Custom Segment to Record Types](#)
- [Dynamic Default Value Sourcing for Custom Segments](#)
- [Validation and Static Default Values for Custom Segments](#)
- [User Permissions for a Custom Segment](#)
- [Dependent Segments](#)
- [Setting Display Order of All Custom Segments](#)

4. After making all necessary changes on the segment definition, click **Save**.

Required Permissions for Editing Custom Segments

To be able to open a custom segment for editing and save changes, you must have the necessary privileges. Not all user groups can make changes. The following table gives examples of groups with permission configurations that let them edit segments.

Note: After a custom segment is created, the **GL Impact** option can't be changed.

Group	Users can:	Users can't:
Users assigned to the Administrator role	Change any value on the segment definition, except for ID, which can never be changed. Users in this group are the only ones who can change the following value: ■ The Type of an existing segment, if the segment's GL Impact box has been checked. (If the GL Impact box hasn't been checked, other users can also change the type.)	Change the ID field.
Users with both of the following: ■ The Create, Edit, or Full level of Value Management Access permission ■ The Edit or Full level of the Custom Segments permission	■ Change most values on the segment definition. ■ Work with values by directly editing the Values sublist. Users can also click the Manage Values button to complete these tasks on another page, if they prefer. (Whether these users can add, edit, or delete values depends on the exact value of the user's Value Management Access permission. For more details, see Required Permissions for Creating Custom Segment Values.)	Change any of the following fields: ■ ID. ■ Type, if the segment's GL Impact box has been checked.

Group	Users can:	Users can't:
Users with either the Edit or Full level of the Custom Segments permission	Change most values on the segment definition.	■ Change any of the following fields: □ ID. □ Type, if the segment's GL Impact box has been checked. ■ Add, create, or delete values. (However, these users can give themselves that permission by making changes on the Permissions subtab of the segment definition.)
Users with both of the following: ■ The Create, Edit, or Full level of Value Management Access permission ■ The View level of the Custom Segments permission	These users can't directly change anything on the segment definition, but they can work with the segment's values. They can open the segment definition in View mode and click Manage Values to display a page that lets them work with values. (Whether these users can add, edit, or delete values depends on the exact value of the user's Value Management Access permission. For more details, see Required Permissions for Creating Custom Segment Values .)	Edit the segment definition.

Inactivating a Custom Segment

You can inactivate a custom segment by checking the **Inactive** box on the custom segment definition page. When you make a custom segment inactive, the segment no longer appears on any forms, reports, searches, or GL Impact pages, and isn't available for SuiteBundler, SuiteFlow, SOAP web services, SuiteAnalytics Connect, Mass Update, or the Custom GL Lines Plug-in. However, you can reactivate an inactive segment when needed.

If you inactivate a parent segment but keep its child segment active, the child segment is no longer filtered by the parent.

You can't inactivate a custom segment that's used as a search filter or in a workflow. If you try, you'll receive an error message indicating why the custom segment can't be inactivated.

You can't inactivate the custom field if it's used for criteria in duplicate detection. If you try, you'll get an error message. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

Inactive segments and their values aren't visible on historical transactions, nor are they available when entering new transactions.

To view inactive segments, check **Show Inactives** on the Custom Segments list page. Inactive segments appear at the bottom of the list because they have no display order specified.

Deleting a Custom Segment Definition

Depending on the Allow GL Custom Segment Deletion setting in [General Accounting Preferences](#), you may be able to delete custom segments. If you can't delete custom segments, you can inactivate them instead.

Warning: If you delete a custom segment definition, both the custom segment definition and all custom segment values and instances on records are removed anywhere they're used. Consequently, custom segment values are removed from transactions, even in closed periods. You can't undo deleting a custom segment.

To delete a custom segment, you must have the necessary permissions. Authorized users include the following:

- **Administrative users** – Users assigned to the Administrator role.
- **Other users** – Users assigned to a role that has the Full level of the Custom Segments permission.

You can't delete a custom segment with dependent segments. For example, if another segment references this segment in the Filtered by field, the first segment can't be deleted.


You can't delete the custom segment if it's used for criteria in duplicate detection. If you try, you'll receive an error message. For more information about duplicate detection, see the help topic [Setting Up Duplicate Detection](#).

To delete a custom segment definition:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. Find the segment you want to delete and click **Edit**.
3. In the **Action** menu, click **Delete**.
The system displays a warning asking if you're sure you want to delete the custom segment.
4. Click **OK**.

Custom Segment Values

When a custom segment is displayed on a record, the segment's values are displayed as choices in a list. Depending on the configuration of the segment's Type field, the user can save one or more selections.

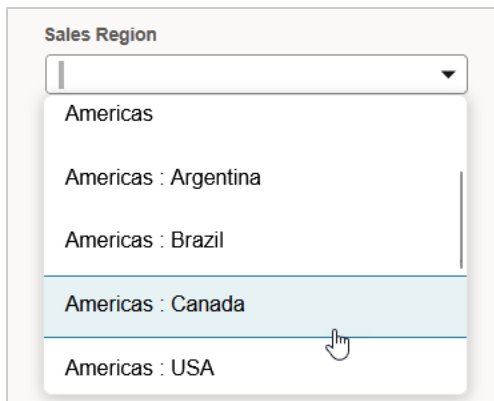

For details about designing and working with a segment's list of values, see the following:

- [Value Creation for Custom Segments](#)
- [Creating Hierarchies Among the Values of a Custom Segment](#)
- [Edit the Values of a Custom Segment](#)
- [Changing the Order of Values for a Custom Segment](#)
- [Making Values of a Custom Segment Inactive](#)

- [Deleting the Values of a Custom Segment](#)

Value Creation for Custom Segments

You can create values when creating a custom segment. Authorized users can also create values for existing segments.

For more details, see the following topics:

- [Required Permissions for Creating Custom Segment Values](#)
- [Creating Values Within the Segment Definition](#)
- [Creating Values by Clicking Manage Values](#)
- [Creating Values Using the New Button](#)
- [Creating Values from the Setup Menu](#)

Creating Values Within the Segment Definition

You may have permission to edit custom segments. In these cases, you can create values by editing the segment's Values sublist. This approach lets you view all values as you change the list.

To create segment values by editing the segment definition:

1. Edit the custom segment. Go to Customization > Lists, Records, & Fields > Custom Segments, and click **Edit**.
2. On the Values subtab, add a line to the sublist. In the **Value** column, enter a name. This text is displayed in the segment's list, when the segment appears on a record.
3. If your account uses the Multi-Language feature and you want to create translations for the value's name, click in the **Translation** column. The system displays a popup window. Enter the necessary translations in the provided fields. When you're finished, click **Done**.

A screenshot of a multi-language translation popup window. The window has a light gray border and contains five text input fields, each preceded by a language label: Spanish, Swedish, Thai, Turkish, and Vietnamese. The fields are stacked vertically. At the bottom left of the window is a dark blue button with the word "Done" in white text.

4. If another value in this sublist should be the parent of the value that you're adding, click in the **Parent** column. The system displays a list. Select the name of the parent. For more information about parent-child relationships, see [Creating Hierarchies Among the Values of a Custom Segment](#).

NetSuite validates parent-child combinations to ensure that the values are unique. If the combination already exists, you'll get an error message.

5. If you want to hide the new value from users, make the value inactive. Note that making the value inactive prevents the value from appearing as a stand-alone choice. However, if the value is a parent to another value, the value still appears as a parent. To make a value inactive, click in the **Inactive** column to display a box, and check the box.
6. If this segment uses filtering, you enter criteria for determining when this value is available. Click **Set Filters**. A popup window appears, showing the classification fields you can use to set

conditions for this value's availability. Select the appropriate values, and then click **Set**. Click **OK**. For more information about filtering, see [Filtering for a Custom Segment](#).


7. If you have more values to add, repeat Step 3.
8. Choose **Sublist** or **Alphabetical** to specify the display order of the values.
9. Click **Save** on the segment definition.

Creating Values by Clicking Manage Values

In some cases, you may not have permission to edit segments, but you do have permission to add values for a segment. In these cases, to add a value, you must open a page designed specifically for creating values. One way to get to this page is by viewing the segment definition and clicking a button labeled Manage Values.

To create segment values by clicking Manage Values:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. In the list, select the name of the segment you want to create values for. The segment definition opens in view mode.
3. Click **Manage Values**. A list of the existing segment values appears.
4. Find the button that lets you create a new value. The button's name includes the segment label. For example, if the segment's label is Profit Center, the button is labeled New Profit Center. Click the button to open a form for creating a new value.
5. Fill out the form as follows:
 - In the **Name** field, enter a name. This text is displayed in the segment's list, when the segment appears on a record.
 - If another value should be the parent of the value that you're adding, select that value in the **Filter** list. NetSuite validates parent-child combinations to ensure that the values are unique. If the same combination already exists, you'll get an error message. For more information about parent-child relationships, see [Creating Hierarchies Among the Values of a Custom Segment](#).
 - If this segment uses filtering, the page displays one or more lists with headings that begin with the words **Filter by**. In each box, select the appropriate value. To select more than one value, use the Ctrl key. For more information about filtering, see [Filtering for a Custom Segment](#).

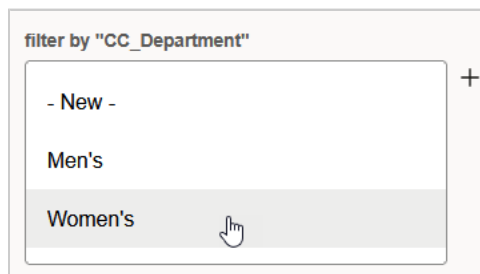

- If you want to hide the new value from users, make the value inactive. Note that making the value inactive prevents the value from appearing as a stand-alone choice. However, if the value is a parent to another value, the value still appears as a parent. To make a value inactive, check the **Inactive** box.

If you want to hide the new value from users, check the **Inactive** box.

If your account uses the Multi-Language feature and you want to create translations for the value's name, enter the translations in the fields provided.

6. Click **Save**.

Creating Values Using the New Button

In some cases, you may have permission to create values for a segment, and you may also have permission to work with the segment in another context. For example:

- You may have permission to select a value for a segment when it appears on a record that you have permission to edit.
- You may have permission to create values for two individual segments that have some relationship to each other. For example, one segment may be used to filter values in the other segment.

In these cases, when you notice the segment on another record, you can use the New button to create values. This approach lets you create a new segment value without navigating away from the record you're working on. The new value is immediately available for selection in the record.

To create values using the New button:

1. During the time that you're working on the record that shows the segment, move your cursor to the right of the segment label.

The system displays a New button.




2. Click **New**.

The system displays a popup form that lets you create a new value.

3. Fill out the form as follows:

- In the **Name** field, enter a name. This text is displayed in the segment's list, when the segment appears on a record.
- If another value should be the parent of the value that you're adding, select that value in the **Filter** list. NetSuite validates parent-child combinations to ensure that the values are unique. If the same combination already exists, you'll get an error message. For more information about parent-child relationships, see [Creating Hierarchies Among the Values of a Custom Segment](#).
- If this segment uses filtering, the page displays one or more lists with headings that begin with the words **Filter by**. In each box, select the appropriate value. To select more than one value, use the Ctrl key.

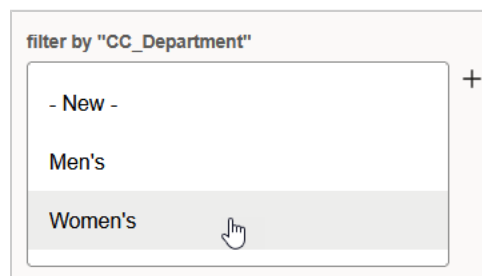

For more information about filtering, see [Filtering for a Custom Segment](#).

- If you want to hide the new value from users, make the value inactive. Note that making the value inactive prevents the value from appearing as a stand-alone choice. However, if the value


is a parent to another value, the value still appears as a parent. To make a value inactive, check the **Inactive** box.

- If your account uses the Multi-Language feature and you want to create translations for the value's name, enter the translations in the fields provided.

4. Click **Save**.

Creating Values from the Setup Menu

Custom segments appear on the Classification menu in Setup > Company > Classifications at the bottom of the classification group. In the following example, the user created a CC Profit Center custom segment.

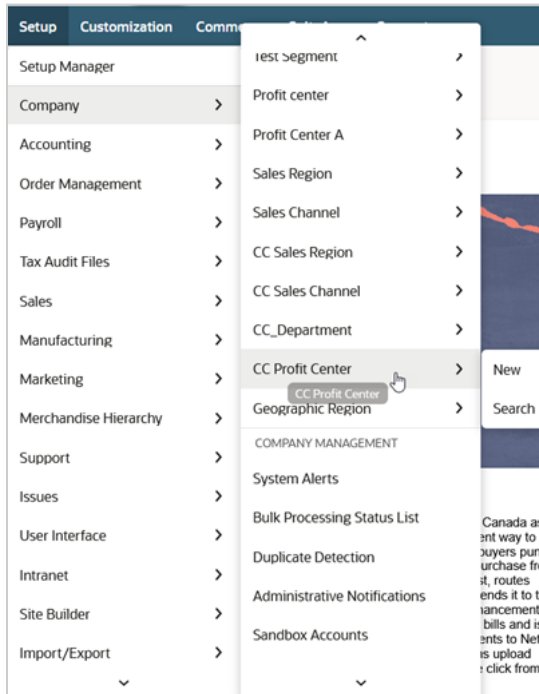


To add a value for the custom segment

1. Go to Setup > Company > Classifications > Custom Segment Name > New
2. In the **Name** field, enter the value.
3. In the **Parent** list, select the parent for this value, if required.
4. Click **Save**.


If the display order for the custom segment values is set to **Sublist**, the new value appears at the end of the list of values. If the display order for the custom segment values is set to **Alphabetical**, the new value is incorporated into the alphabetical list of values.

Creating Hierarchies Among the Values of a Custom Segment

Within a custom segment's list of values, you can create a hierarchy, which makes a value a parent to one or more other values. When the segment is available on a record, the parent-child relationships are denoted with a colon.

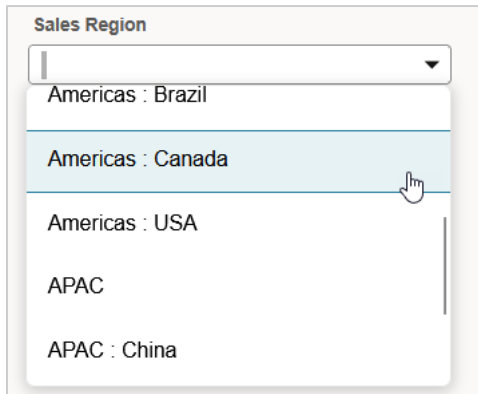

A segment value can also have a grandparent and more senior levels of hierarchy.

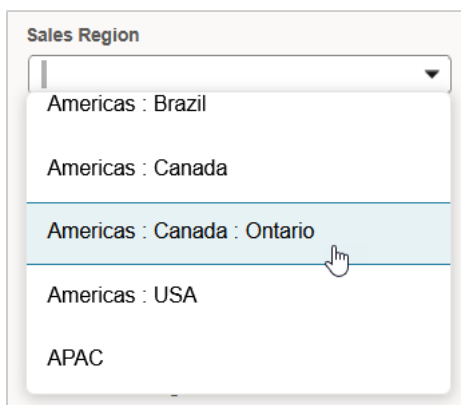

If you have a value that should exist only to be the parent of another value, you may want to make the value inactive. Making a value inactive prevents the value from appearing as a stand-alone choice in the segment's list but permits the value to remain visible as a parent. To make a value inactive, check the Inactive box for that value.

ID	Value *	Translation	Parent	Inactive	Filtering
1	Americas				
2	Argentina		Americas		
3	Brazil		Americas		
4	Canada		Americas	☒	

To create a parent-child relationship, edit the value that should be the child, as described in the following procedure.

To make a value the child of another value:

1. Open a page where you can edit the value. Depending on your privileges, you may be able to make your changes by editing the custom segment's Values sublist. Otherwise, you can view the segment definition, click the **Manage Values** button, and open the appropriate value for editing. For details, see [Edit the Values of a Custom Segment](#).
2. Do one of the following:
 - If editing the Values sublist, find the value in the sublist. Click in the **Parent** column to enable a list. Set the list to the required parent value. Click **Save**.
 - If you've opened a single value for editing, the **Parent** list should be visible on the page. Set the list appropriately. Click **Save**.

NetSuite validates parent-child combinations to ensure that the values are unique. If you've entered a duplicate of an existing parent-child combination, an error message appears.

For information about limitations on reordering hierarchical segment values, see [Limitation on Reordering Hierarchical Segment Values](#)

Limitation on Reordering Hierarchical Segment Values

When working with hierarchical custom segment values, NetSuite supports reordering values within the same parent group and moving entire parent groups relative to other groups. It's not possible to move an individual child value from one parent group into the middle of another parent group's children. The hierarchy is enforced for data integrity reasons.

For example, if USA and Canada are children of North America, and Germany is a child of Europe, you can change the order of USA and Canada or reorder Europe and North America. You can't, however, move Germany to appear between USA and Canada.

If your business scenario requires frequent repositioning of values regardless of parent-child groupings, consider using a flat segment structure with no parent-child hierarchy.

Edit the Values of a Custom Segment

For details about making changes to a custom segment's values, see the following topics:

- [Required Permissions for Editing Custom Segment Values](#)
- [Editing the Values of a Custom Segment by Updating the Segment Definition](#)
- [Editing Values of a Custom Segment by Clicking Manage Values](#)

Required Permissions for Editing Custom Segment Values

To be able to edit a custom segment's values, a user must have the necessary privileges. There are several permission configurations that can result in users having this access.

The following table describes examples of users with various permission configurations and procedures for how each group can change values.

Description	Permitted Methods for Editing Values
Users assigned to the Administrator role	Editing the Values of a Custom Segment by Updating the Segment Definition Editing Values of a Custom Segment by Clicking Manage Values
Users with both of the following: ■ The Edit or Full level of the Value Management Access permission ■ The Edit or Full level of the Custom Segments permission	Editing the Values of a Custom Segment by Updating the Segment Definition Editing Values of a Custom Segment by Clicking Manage Values
Users with both of the following: ■ The Edit or Full level of the Value Management Access permission	Editing Values of a Custom Segment by Clicking Manage Values

Description	Permitted Methods for Editing Values
The View level of the Custom Segments permission	

Note: Be aware that even if users have only the Edit or Full value of the Custom Segments permission, they can assign themselves the Value Management Access permission for any custom segment.

Editing the Values of a Custom Segment by Updating the Segment Definition

If you have the appropriate privileges, you can change a custom segment's values by editing the segment's Values sublist. This approach lets you view all list values as you change the list.

For details about the permissions required to complete this procedure, see [Required Permissions for Editing Custom Segment Values](#). For an alternative method of editing values, see [Editing Values of a Custom Segment by Clicking Manage Values](#).

To edit a custom segment's values by updating the segment definition:

1. Edit the custom segment.
2. Find the value you want to change in the Values subtab. Make any of the following changes as needed:
 - In the **Value** column, you can change the value's name. The value's name is displayed in the segment's list when the segment appears on a record.
 - If your account uses the Multi-Language feature, and you want to change translations for the value's name, click in the **Translation** column. The system displays a popup window. Make any necessary translation changes. When you're finished, click **Done**.

A screenshot of a translation popup window. It contains five text input fields, each preceded by a language label: Spanish, Swedish, Thai, Turkish, and Vietnamese. At the bottom left of the popup is a dark blue button labeled "Done".

- If you want to create a parent or change the value's parent, click in the **Parent** column. The system displays a list. Make any changes to the list as needed. For details about parent-child relationships, see [Creating Hierarchies Among the Values of a Custom Segment](#).
- If you want to change whether this value is visible to users, click in the **Inactive** column to display a check box. Check or clear the box as needed. Note that making the value inactive prevents the value from appearing as a stand-alone choice. However, if the value is a parent to another value, the value still appears as a parent.
- If this segment uses filtering, you may want to create, change, or clear criteria for determining when this value is available. In this case, click the name of the value to display a series of buttons. Click **Set Filters** to display a popup window. The popup window shows the other classification fields you can use to set conditions for this value's availability. Make the appropriate changes. Then click **Set** to close the window. Click **OK** to close the series of buttons.

and save the filtering choices. For more information about filtering, see [Filtering for a Custom Segment](#).

3. If you have more values to change, repeat Step 2.
4. On the segment definition, click **Save**.


Editing Values of a Custom Segment by Clicking Manage Values

One way to edit a custom segment's values is to view the segment definition and click the button labeled Manage Values. You should use this method if you don't have permission to edit the segment definition.

Note: Custom segment values on transactions that impact GL can't be edited in closed periods.

To edit a custom segment's values by clicking Manage Values:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. In the list, select the name of the segment for which you want to edit values.
The segment definition opens in view mode.
3. Click **Manage Values**. A list of the existing segment values appears.
4. Find the value you want to change and click the corresponding **Edit** button.
5. Make the following changes as needed:
 - In the **Name** column, you can change the value's name. The value's name is displayed in the segment's list when the segment appears on a record.
 - If you want to create a parent or change the value's parent, adjust the **Parent** list. For more information about parent-child relationships, see [Creating Hierarchies Among the Values of a Custom Segment](#).
 - If this segment uses filtering, the page displays one or more list boxes. These lists have headings that begin with the words **Filter by**. Change the selections in each list as needed. You can use the Ctrl key to select more than one value or to clear a value. For more information about filtering, see [Filtering for a Custom Segment](#).

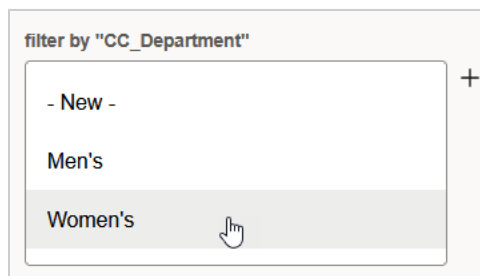

- If you want to change whether this value is visible to users, check or clear the **Inactive** box. Note that making the value inactive prevents the value from appearing as a stand-alone choice. However, if the value is a parent to another value, the value still appears as a parent.
6. Click **Save**.

Changing the Order of Values for a Custom Segment

When you add values to a custom segment, those values are displayed in a list on a record.

You can configure the sequence of values in two ways. You can sort them alphabetically or use the list sequence from the segment definition. The default is to use the sequence from the segment definition.

To change the way values are ordered, you must have permission to edit the segment definition.

To reorder segment values:

1. Edit the custom segment.
2. On the Values subtab, find the **Display Order** label.
3. Do one of the following:
 - To make the values appear in the order shown on the segment's Values sublist, select **Sublist**.
 - To make the values appear in alphabetical order, select **Alphabetical**.

ID	Value *
1	Clothing
2	Outerwear
3	Jewelry
4	Shoes

4. Click **Save**.

Making Values of a Custom Segment Inactive

In some cases, you may need to hide one or more of a custom segment's values. To hide a value, make it inactive. You can reactivate it later, if needed.

Inactivating a segment's values has these effects:

- The value no longer appears as a choice in the segments list on new forms or on existing forms where it wasn't already selected. However, if the value is a parent to another value, it still appears as a parent.
- If an inactive value was previously selected on an existing form, the value continues to appear on that form. A search on that value will also turn up in search results.

- When filtering, if one segment is dependent on another segment, values filtered by an inactive value won't be available. This is true even if the inactive value on which other values depend is already selected.

You can make the values of a segment inactive in two ways:

- [Making a Value Inactive by Editing the Segment Definition](#)
- [Making a Value Inactive by Clicking Manage Values](#)

If needed, you can also delete a segment's values. For details, see [Deleting the Values of a Custom Segment](#).

Making a Value Inactive by Editing the Segment Definition

This topic describes how to make a custom segment value inactive directly from the segment definition if you have the necessary permissions. For a general overview and other options to inactivate segment values, see [Making Values of a Custom Segment Inactive](#).

In some cases, you may have a set of permissions that includes the ability to edit the segment definition. In these cases, you can make a value inactive by directly editing the segment's Values sublist. This approach lets you view all values as you change the list.

To make a value inactive by editing the segment definition:

1. Edit the custom segment.
2. Find the value you want to hide. Click in the **Inactive** column to display a check box.
3. Check the **Inactive** box.
4. Click **Save**.

Making a Value Inactive by Clicking Manage Values

This topic describes how to make a custom segment value inactive using the Manage Values page, which is useful if you do not have permission to edit the segment definition. For a general overview and other options to inactivate segment values, see [Making Values of a Custom Segment Inactive](#).

In some cases, you may not have permission to edit segments, but you do have permission to edit values for a segment. In these cases, to make a value inactive, you must open a page designed specifically for managing the value. You get to this page by viewing the segment definition and clicking the button labeled Manage Values.

To make a value inactive by clicking Manage Values:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. In the list, select the name of the segment for which you want to edit values.
The segment definition opens in view mode.
3. Click **Manage Values**. A list of the existing segment values appears.
4. Find the value you want to change and click the corresponding **Edit** button.
5. Check the **Inactive** box.
6. Click **Save**.

Deleting the Values of a Custom Segment

In some cases, you may need to delete one or more of a custom segment's values. You can delete the values of a segment in two ways:

- [Deleting Values Within the Custom Segment Definition](#)
- [Deleting Values by Clicking Manage Values](#)

You can't delete a value if that value has been saved on an instance of a record. If you try to delete this type of value, the system displays the following error: The segment value cannot be deleted because a child record exists.

Instead of deleting a value, consider it inactive.

If a period is closed, you can't change custom segment values that impact GL on any transactions in the period.

Deleting Values Within the Custom Segment Definition

This topic describes how to delete custom segment values by editing the Values sublist within the segment definition, a method available if you have permission to edit the segment. For more information and other deletion options, see [Deleting the Values of a Custom Segment](#).

In some cases, you may have a set of permissions that includes the ability to edit the segment definition. In these cases, you can delete values by editing the segment's Values sublist. This approach lets you view all values as you change the list.

To delete a custom's segment value from within the segment definition:

1. Edit the custom segment.
2. Find the value you want to delete. Click anywhere in that row to enable a series of buttons.
3. Click **Remove**.
4. Click **Save**.

Deleting Values by Clicking Manage Values

This topic describes how to delete custom segment values using the Manage Values page, which is helpful if you don't have access to edit the segment definition directly. For more information and other deletion options, see [Deleting the Values of a Custom Segment](#).

In some cases, you may not have permission to edit segments, but you do have permission to delete values for a segment. In these cases, to delete a value, you must open a page designed specifically for managing the value. You get to this page by viewing the segment definition and clicking the button labeled Manage Values.

To delete values by clicking Manage Values:

1. Go to Customization > Lists, Records, & Fields > Custom Segments.
2. In the list, select the segment you want to edit values for.
The system opens the segment definition in view mode.
3. Click **Manage Values**. A list of the existing segment values appears.
4. Find the value you want to change and click the corresponding **Edit** button.
5. Point to the **Actions** label to display a popup menu.
6. Click **Delete**.
The system displays a message asking if you're sure you want to delete the record.
7. Click **OK**.

Using the Script ID to Access Custom Segment Body, Line, and Filter By Fields

The field ID of custom segments is prefixed with **cseg**. When creating your custom segments, establish a clear naming convention for your custom segment definition IDs. Meaningful script names are helpful when you're creating solutions for scripts, bundles, formulas, workflows, searches, and more.

Custom segment definitions use a unified script ID, which lets you use one ID in your scripts to refer to all of the record types in a custom segment. With the unified ID, you're not required to know the applied record type when referring to a custom segment field on a specific record.


Custom segment IDs in searches and filters show the field type so that you can distinguish among body, line and filter fields.

To filter custom segments, use the pattern **_filterby_** to include custom segment fields in the filtering criteria. For example, to filter cseg_section by subsidiary:

```
1 | CONCAT({cseg_section},{cseg_section.cseg_section_filterby_subsidary})
```

Custom Segments in Record Searches

After you've applied a custom segment to a record type, authorized users can reference that segment when searching for records. When you use advanced search, you can use custom segments as search filters and search columns. On both the Criteria and Results subtab, each segment appears among the other available fields from the record. Each segment's label is followed by the word Custom in parentheses.

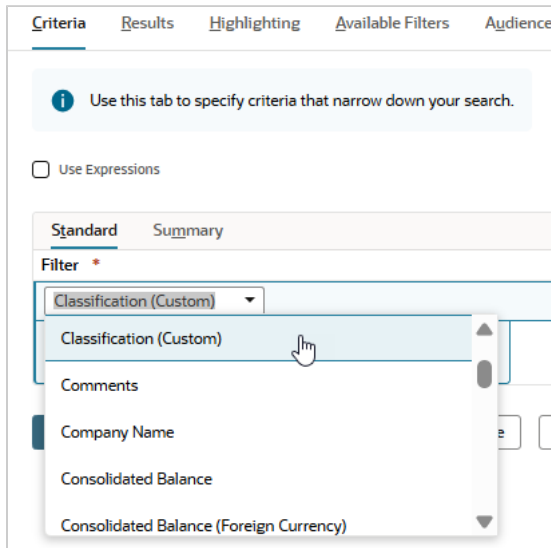

Note that if you're searching a transaction, the name of the custom segment appears twice in the list of fields. One instance represents the custom segment as a transaction column. The other represents the segment as a body field. The segment appears twice even if you did not apply the segment to both a transaction sublist and the transaction body.

To use a custom segment as a search filter or column, you must have the Edit level of the Search/Reporting Access permission for that segment.

To view a saved search that includes the segment in its results, you must have at least the View level of the Search/Reporting Access permission. Otherwise, the column referencing segment data is hidden.

For more details about the Search/Reporting Access permission, see [Granting Roles Permission to Use Segments in Searches and Reports](#).

For full details about running an advanced search, see the help topic [Defining an Advanced Search](#).

Note: If you want to search for a custom segment definition, you can use the Custom Segment search type. Go to Reports > New Search and click Custom Segment.

Customizing a Report by Using Custom Segments

After you've applied a custom segment to a record type, authorized users can reference that segment when customizing reports. You can use custom segments as columns or filters.

When you click **Edit Columns** or **Filters** in the Report Builder, you can find segments in the Add Fields list. Each segment appears under the label representing the record type where it was applied. Segments are listed in alphabetical order with other available fields.

Search Fields

Q

profit center

Profit Center A (Custom Column)

Profit center (Custom Column)

Profit center (Custom Body)

CC Profit Center

Profit Center A

Profit center

Report Preview

CC Profit Center

Date

Document Number

Profit Center A

CC Profit Center 1

Transaction Type Long Name 2

21.2.2025

Document Number 2

Profit Center A 2

Transaction Type Long Name 3

21.2.2025

Document Number 3

Profit Center A 3

Transaction Type Long Name 4

21.2.2025

Document Number 4

Profit Center A 4

Transaction Type Long Name 5

21.2.2025

Document Number 5

Profit Center A 5

For transactions, the name of the custom segment appears twice in the list of fields. One instance represents the custom segment as a transaction column. The other represents the segment as a body field. The segment appears twice even if you did not apply the segment to both a transaction sublist and the transaction body.

For reports other than financial statements, you can add a custom segment as a report dimension to the current report. Select the custom segment in the **Column** list in the report footer. The selection applies only to the current report, so you need to repeat the selection each time you run the report.

In the Financial Report Builder, you can add a custom segment as a dimension for a financial statement. Select the custom segment in the View Columns By list on the Edit Columns page. This selection persists whenever the custom financial statement is run.

Note: Custom segments aren't included as dimensions in the Budget and Financial fields of the Financial Report Builder for budget-related reports. The budget-related reports are Budget Income Statement, Budget Income Statement Detail, and Budget vs. Actual.

To customize a report to include a custom segment, you must have the necessary Search/Reporting Access permission level for that segment. Similarly, to view a report that filters by or references custom segments, you must have the appropriate level. For more details about this permission, see [Granting Roles Permission to Use Segments in Searches and Reports](#).

For full details about customizing reports, see the help topic [Report Customization](#).

Using Custom Segments in Workflows

If needed, you can reference custom segments when working with workflows. You can do either of the following:

- Refer to custom segments when they appear as fields on other record types. For example, you can configure a segment field to default to a particular value. For more details, see [Custom Segments as Fields](#).
- Use workflows to manage the records that represent custom segment values. For more details, see [Records that Represent Custom Segment Values](#).

Custom Segments as Fields

When a custom segment has been applied to a record type, your workflow can reference the segment as it would any of that record type's fields. For examples, see the following sections:

- [Setting Field Values](#)
- [Setting Workflow Conditions](#)

Setting Field Values

If needed, you can use the Set Field Value action to populate a custom segment field with a value. This approach is an alternative to using the custom segment's Source List field (which is described in [Dynamic Default Value Sourcing for Custom Segments](#)). Compared with the Source List field, the Set Field Value action allows for greater granularity when configuring the behavior of defaults.


For example, with a workflow, you can set a distinct sourcing method for each specific record type. By contrast, in some cases, the custom segment's Source List field lets you choose only one defaulting method, and that method is shared by multiple record types. For example, you can select only one Source List value for all transaction types. However, with a workflow, you could use the Set Field Value action to create a unique defaulting method for each specific transaction type.

For example, suppose you were editing a workflow that affects the Cash Sale transaction type. For this example, assume also that you have a custom segment called Sales Region that has been applied to both the Cash Sale transaction type and the Customer record type. You may want the Sales Region value used on each cash sale to match the value of the segment as it appears on the corresponding customer record.


To configure this behavior, use the fields under the Parameters heading in the Workflow Action window. You identify the segment for which you want to create the default by using the Field list on the left side of the page, then use the fields under the Value heading to configure the sourcing behavior. Specifically, you select the From Field radio button. Then you use the Record list to identify the record that will provide the default value. Use the Field list to identify the source field.

The screenshot shows the 'Parameters' section of a workflow action window. It contains a dropdown menu labeled 'FIELD' with the value 'Sales Region' selected. To the right, under the 'Value' heading, there are two radio buttons: 'STATIC VALUE' and 'FROM FIELD'. The 'FROM FIELD' radio button is selected. Below these radio buttons, there are three input fields: 'TEXT', 'CHECKED', and 'SELECTION'. The 'FROM FIELD' section has a 'RECORD' dropdown set to 'Customer' and a 'FIELD' dropdown set to 'Sales Region'.

The Set Field Value action also provides multiple options for determining when the segment field will be populated with a default value. By contrast, when you use the custom segment's Source List field, the segment is populated with the default value only when the value of the source field is set or changes. Typically, this event takes place when the user opens a new record, if NetSuite populates the source field automatically, or when the user is editing the record. With a workflow, you could configure the value to be populated at various times, including after the user clicks Save and is no longer looking at the record. You configure this behavior in the Workflow Action window. Specifically, you use the Trigger On list.




Similarly, with a workflow, you could choose to have the segment value be set only when the record is updated, rather than when it's created. Conversely, you could choose to have the segment value be set only when the record is created, rather than when it's updated. You do this by editing the workflow and making choices under the Event Definition heading.



For full details about the Set Field Value action, see the help topic [Set Field Value Action](#).

Setting Workflow Conditions

Another time you may want to refer to a segment as a field is when setting workflow conditions. For example, you could create a condition that a workflow runs if the segment is set to a certain value only. In this case, open the Workflow Condition window as you would when setting any condition. In the Field list, select the name of the segment. In the Value column, add the specific text that you want to reference. For example, in the following screenshot, a condition dictates that a workflow will run only when the Sales Region segment is set to the value Lima.

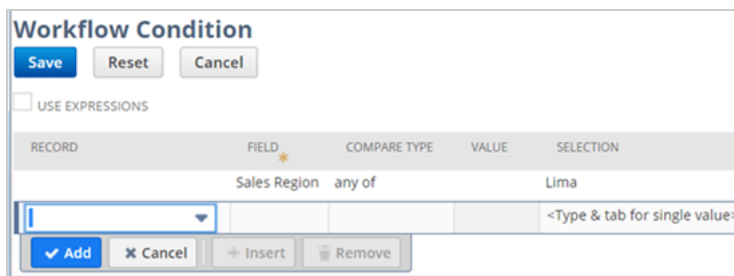

For more information about workflow conditions, see the help topic [Workflow Conditions](#).

Records that Represent Custom Segment Values

When you create a value for a custom segment, NetSuite creates a record to represent that value. For example, consider a custom segment called Sales Region that has values such as Americas and EMEA. In

this case, the values Americas and EMEA are records of type Sales Region. If appropriate, you could create a workflow that handles these records.

This type of workflow is used only if you open a form to create or work with the segment value. The workflow isn't used when you add or update values by changing the Values sublist of the custom segment definition.

You can use a workflow that manipulates segment values in the following type of situation: Suppose users need to create new values for the Sales Region custom segment. You may want these values be inactive by default. In this case, you could create a workflow that automatically checks the Inactive box when the user opens a form for creating a new value. To configure this behavior, create a Set Field Value action. In the Workflow Action window, select Inactive in the Field list. Under Value, select a static value of checked.

The screenshot shows the 'Parameters' window for a workflow action. The 'FIELD' dropdown is set to 'Inactive'. Under the 'Value' section, 'STATIC VALUE' is selected, and the 'CHECKED' checkbox is checked.

You could also take other actions. For example, you could configure a workflow to automatically create a new value for an existing custom segment. To configure this behavior, use the Create Record action. In the Workflow Action window, you make changes under the Parameters heading. Specifically, in the Record Type list, select the custom segment for which you want to create a value. Minimally, you also have to add logic for populating the Name field of the new value.

The screenshot shows the 'Parameters' window for a workflow action. The 'RECORD TYPE' dropdown is set to 'Sales Channel'. The 'STORE RESULT IN' dropdown is empty. Below, a table lists fields: Name, TEXT, CHECKED, DATE, SELECTION, JOIN, and VALUE FIELD (Point of Sale).

For more details about the Create Record action, see the help topic [Create Record Action](#).



Important: Any workflow you create to manage a custom segment's values affects the behavior of values only in certain cases. The workflow is used only if you open a value in a separate form, as described in [Creating Values by Clicking Manage Values](#), [Editing Values of a Custom Segment by Clicking Manage Values](#), and [Creating Values Using the New Button](#). This type of workflow doesn't affect changes that you make when editing the Values sublist of the custom segment definition.

SuiteScript and Custom Segments

Scripting is supported for custom segment values and for custom segments as fields. The following are supported:

- On record types that are exposed to SuiteScript, you can use SuiteScript to set values for custom segments that exist as fields.
- You can use SuiteScript to create values for existing custom segments.

Scripting isn't supported for custom segment definitions, and the segment definition type isn't shown in the Applies To list on script deployments. However, each custom segment you create is associated with a

custom record type that has the same name. These segment-managed record types are similar to other custom record types and are fully scriptable. The name of a custom segment in the scripting area refers to the custom record type or one of the custom segment fields. It doesn't refer to the custom segment definition itself.

SOAP Web Services and Custom Segments

For detailed information about working with custom segments in SOAP web services, see the help topic [Custom Segment](#) in the SOAP Web Services Records Guide.

CSV Import and Custom Segments

You can import values for an existing custom segment using CSV Import. For example, with the segment called Sales Channel, you could use the Import Assistant to import new values such as Catalog and Partner Outlet.

For more information about this import, see the following:

- [Prerequisites for Importing Values](#)
- [Segments Appear Under Classification Import Type](#)

Prerequisites for Importing Values

Before you can import values for custom segments, you must do both of the following:

- Enable the Custom Segments feature at Setup > Company > Enable Features, on the SuiteCloud subtab.
- Create at least one custom segment in your account. You can create custom segments at Customization > Lists, Records, & Fields > Custom Segments > New.

By default, only administrators have permission to import custom segment values. However, you can grant permission to other roles. The following permissions are required:

- **The global Custom Segments permission** – You can add this permission on the Permissions > Setup subtab of the role record. You need at least the View level.
- **The Value Access Level permission for the custom segment** – You can add this permission on the Custom Record subtab of the role record. To be able to add values, the role needs at least the Create level. To be able to update values, or to be able to set the parent for a value, the user needs at least the Edit level.

Segments Appear Under Classification Import Type

To import values, set the Import Type to Classification. In the Record Type list, the system displays both the names of your custom segments and any other classifications enabled in your account. For example, custom segments named CC_Department and Geographic Region would be listed with Class, Department, and Location, if those features were enabled.

Scan & Upload CSV File

Import Type
Classification

Choose the category of data to import.

Record Type

- Activity Code
- CC Sales Region
- CC_Department
- Class
- Department
- Geographic Region

For each import, you can define values for the following fields:

- The name of the value.
- A parent for the value. For example, if your segment has a value called Retail Store, that value can be the parent of values such as Express Kiosk and Superstore.
- Inactive, which determines whether the segment value is available to be selected.
- Translations of the value's name, if your account uses the Multi-Language feature.

For more information, see the help topic [Custom Segment Value Import](#).