

ORACLE  
NetSuite

# SuiteCloud CLI for Node.js

---

2025.2

December 17, 2025



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

### **Documentation Accessibility**

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

### **Access to Oracle Support**

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

### **Sample Code**

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at [www.netsuite.com/tos](http://www.netsuite.com/tos).

Oracle may modify or remove sample code at any time without notice.

### **No Excessive Use of the Service**

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

### **Beta Features**

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

# Table of Contents

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| SuiteCloud CLI for Node.js Guide .....                                   | 1  |
| SuiteCloud CLI for Node.js Installation Prerequisites .....              | 1  |
| Supported Versions of SuiteCloud CLI for Node.js .....                   | 2  |
| Supported Command-Line Interpreters for SuiteCloud CLI for Node.js ..... | 2  |
| Installing SuiteCloud CLI for Node.js .....                              | 3  |
| Setting Up SuiteCloud CLI for Node.js .....                              | 5  |
| About the Project Structure in SuiteCloud CLI for Node.js .....          | 5  |
| SuiteCloud Project Types in SuiteCloud CLI for Node.js .....             | 6  |
| SuiteCloud Project Files in SuiteCloud CLI for Node.js .....             | 7  |
| Debugging in Visual Studio Code using SuiteCloud CLI for Node.js .....   | 9  |
| SuiteCloud Unit Testing with Jest .....                                  | 9  |
| SuiteCloud CLI for Node.js Reference .....                               | 10 |
| account:manageauth .....                                                 | 11 |
| account:setup .....                                                      | 12 |
| account:setup:ci .....                                                   | 13 |
| file:create .....                                                        | 15 |
| file:import .....                                                        | 16 |
| file:list .....                                                          | 17 |
| file:upload .....                                                        | 19 |
| object:import .....                                                      | 20 |
| object:list .....                                                        | 21 |
| object:update .....                                                      | 23 |
| project:adddependencies .....                                            | 24 |
| project:create .....                                                     | 24 |
| project:deploy .....                                                     | 26 |
| project:package .....                                                    | 28 |
| project:validate .....                                                   | 29 |

# SuiteCloud CLI for Node.js Guide



**Important:** Starting February 2025, SuiteCloud CLI for Node.js version 1.9.0, which supports Token-Based Authentication (TBA) and OAuth 1.0, will no longer be available for new installations. If you're still using an older version of the tool, upgrade to the latest version as soon as possible. The latest version of SuiteCloud CLI for Node.js is version 3.0.2, and this version uses the OAuth 2.0 protocol for authorization.

SuiteCloud Command Line Interface for Node.js (SuiteCloud CLI for Node.js) is a tool you can use with your own integrated development environment (IDE) to develop SuiteCloud projects. SuiteCloud CLI is part of the SuiteCloud Development Framework Software Development Kit (SuiteCloud SDK).

Here are the main features of SuiteCloud CLI for Node.js:

- Create a SuiteCloud project.
- Link your account to your SuiteCloud projects.
- Import SDF custom objects from an account.
- Import SuiteScript files from your account's File Cabinet.
- Deploy a SuiteCloud project to your account.
- Add unit testing with the Jest testing framework.



**Note:** This topic covers using Node.js to develop SuiteCloud projects. For instructions on developing extensions for Commerce websites, see the help topic [Install Node.js](#).

The following topics provide instructions to install SuiteCloud CLI for Node.js:

- [SuiteCloud CLI for Node.js Installation Prerequisites](#)
- [Supported Versions of SuiteCloud CLI for Node.js](#)
- [Supported Command-Line Interpreters for SuiteCloud CLI for Node.js](#)
- [Installing SuiteCloud CLI for Node.js](#)
- [Setting Up SuiteCloud CLI for Node.js](#)
- [About the Project Structure in SuiteCloud CLI for Node.js](#)
- [Debugging in Visual Studio Code using SuiteCloud CLI for Node.js](#)
- [SuiteCloud Unit Testing with Jest](#)

## SuiteCloud CLI for Node.js Installation Prerequisites

Verify the following prerequisites before you install SuiteCloud CLI for Node.js:

- **Java SE Development Kit:** SuiteCloud CLI for Node.js requires [Oracle JDK version 17](#) or [Oracle JDK version 21](#).
- **Node.js:** SuiteCloud CLI for Node.js requires [Node.js version 22 LTS](#).
- **Operating system:** SuiteCloud CLI for Node.js officially supports the following operating systems:
  - Windows 32-bit
  - Windows 64-bit

- macOS
- Linux 64-bit

Specifically, it was tested with the following operating system and browser combinations:

- Windows 11 – Firefox and Chrome
- Linux Fedora – Firefox, Chrome
- macOS Sequoia – Firefox, Safari, and Chrome
- **SuiteCloud Development Framework (SDF) enabled:** Ensure SDF is enabled in your NetSuite account. Go to Setup > Company > Enable Features, click the SuiteCloud subtab, and check the SuiteCloud Development Framework box.
- **NetSuite account features:** An account administrator must enable the features in your account that SDF depends on.  
For more information, see the help topic [Enabling SuiteCloud Development Framework in the Target NetSuite Account \(Administrator Only\)](#).
- **NetSuite permissions:** An account administrator must create and assign the SDF Developer role to your account.  
For more information, see the help topic [Assigning the Developer Role \(Administrator Only\)](#).
- **OAuth 2.0 enabled:** Ensure OAuth 2.0 is enabled in your NetSuite account. To enable it, go to Setup > Company > Enable Features, click the **SuiteCloud** subtab, and check the **OAuth 2.0** box on the **Manage Authentication** section. For more information, see the help topic [Enable the OAuth 2.0 Feature](#).

## Supported Versions of SuiteCloud CLI for Node.js

 **Important:** Starting February 2025, SuiteCloud CLI for Node.js version 1.9.0, which supports Token-Based Authentication (TBA) and OAuth 1.0, will no longer be available for new installations. If you're still using an older version of the tool, you should upgrade to the latest version as soon as possible. The latest version of SuiteCloud CLI for Node.js is version 3.0.0, and this version uses the OAuth 2.0 protocol for authorization. For more information, see [Removal of OAuth 1.0 Token-Based Authentication Support in SuiteCloud SDK](#) (SuiteAnswer ID 1019514).

To ensure that you get the latest features and bug fixes, use the latest version of the SuiteCloud CLI for Node.js available in NPM.

The following table shows the CLI versions currently available in NPM.

| CLI Versions Available in NPM |
|-------------------------------|
| 3.1.1                         |
| 3.0.2                         |

## Supported Command-Line Interpreters for SuiteCloud CLI for Node.js

SuiteCloud CLI for Node.js works with these command-line interpreters and has been tested with them:

- **Windows:**
  - Command Prompt
  - Windows PowerShell
  - ConEmu
- **Linux:** GNOME Terminal
- **MacOS:**
  - Terminal
  - iTerm2

## Installing SuiteCloud CLI for Node.js



**Important:** By installing SuiteCloud CLI for Node.js, you're accepting the installation of the SuiteCloud SDK dependency under the **Oracle Free Use Terms and Conditions** license below.

### ■ Definitions

"Oracle" refers to Oracle America, Inc. "You" and "Your" refers to (a) a company or organization (each an "Entity") accessing the Programs, if use of the Programs will be on behalf of such Entity; or (b) an individual accessing the Programs, if use of the Programs will not be on behalf of an Entity. "Program(s)" refers to Oracle software provided by Oracle pursuant to the following terms and any updates, error corrections, and/or Program Documentation provided by Oracle. "Program Documentation" refers to Program user manuals and Program installation manuals, if any. If available, Program Documentation may be delivered with the Programs and/or may be accessed from [www.oracle.com/documentation](http://www.oracle.com/documentation). "Separate Terms" refers to separate license terms that are specified in the Program Documentation, readmes or notice files and that apply to Separately Licensed Technology. "Separately Licensed Technology" refers to Oracle or third party technology that is licensed under Separate Terms and not under the terms of this license.

### ■ Separately Licensed Technology

Oracle may provide certain notices to You in Program Documentation, readmes or notice files in connection with Oracle or third party technology provided as or with the Programs. If specified in the Program Documentation, readmes or notice files, such technology will be licensed to You under Separate Terms. Your rights to use Separately Licensed Technology under Separate Terms are not restricted in any way by the terms herein. For clarity, notwithstanding the existence of a notice, third party technology that is not Separately Licensed Technology shall be deemed part of the Programs licensed to You under the terms of this license.

### ■ Source Code for Open Source Software

For software that You receive from Oracle in binary form that is licensed under an open source license that gives You the right to receive the source code for that binary, You can obtain a copy of the applicable source code from <https://oss.oracle.com/sources/> or <http://www.oracle.com/goto/opensourcecode>. If the source code for such software was not provided to You with the binary, You can also receive a copy of the source code on physical media by submitting a written request pursuant to the instructions in the "Written Offer for Source Code" section of the latter website.

The following license terms apply to those Programs that are not provided to You under Separate Terms.

### ■ License Rights and Restrictions

Oracle grants to You, as a recipient of this Program, a nonexclusive, nontransferable, limited license to, subject to the conditions stated herein, (a) internally use the unmodified Programs for the purposes



of developing, testing, prototyping and demonstrating your applications, and running the Programs for your own internal business operations; and (b) redistribute unmodified Programs and Programs Documentation, under the terms of this License, provided that You do not charge Your end users any additional fees for the use of the Programs. You may make copies of the Programs to the extent reasonably necessary for exercising the license rights granted herein and for backup purposes. You are granted the right to use the Programs to provide third party training in the use of the Programs and associated Separately Licensed Technology only if there is express authorization of such use by Oracle on the Program's download page or in the Program Documentation.

Your license is contingent on Your compliance with the following conditions:

- You include a copy of this license with any distribution by You of the Programs;
- You do not remove markings or notices of either Oracle's or a licensor's proprietary rights from the Programs or Program Documentation;
- You comply with all U.S. and applicable export control and economic sanctions laws and regulations that govern Your use of the Programs (including technical data);
- You do not cause or permit reverse engineering, disassembly or decompilation of the Programs (except as allowed by law) by You nor allow an associated party to do so.

For clarity, any source code that may be included in the distribution with the Programs is provided solely for reference purposes and may not be modified, unless such source code is under Separate Terms permitting modification.

#### ■ **Ownership**

Oracle or its licensors retain all ownership and intellectual property rights to the Programs.

#### ■ **Information Collection**

The Programs' installation and/or auto-update processes, if any, may transmit a limited amount of data to Oracle or its service provider about those processes to help Oracle understand and optimize them. Oracle does not associate the data with personally identifiable information. Refer to Oracle's Privacy Policy at [www.oracle.com/privacy](http://www.oracle.com/privacy).

#### ■ **Disclaimer of Warranties; Limitation of Liability**

THE PROGRAMS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND. ORACLE FURTHER DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW WILL ORACLE BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

SuiteCloud CLI for Node.js is available in npm: [SuiteCloud CLI for Node.js](#).

To install SuiteCloud CLI for Node.js, launch Command Prompt and run:

```
1 | npm install -g @oracle/suitecloud-cli
```

If you're installing SuiteCloud CLI for Node.js with a script, like in a CI environment, you can skip the license prompt by adding the `--acceptSuiteCloudSDKLicense` flag to your install script like this:

```
1 | npm install -g --acceptSuiteCloudSDKLicense @oracle/suitecloud-cli
```

You can always check the current version by running: `suitecloud --version`.

**Note:** To set up a proxy server, create the SUITECLOUD\_PROXY environment variable. The variable value must include an http or https protocol, a hostname, and a port number, like `http://proxyurl:proxyport`. After you create the variable, restart your console.

**Important:** If you are using npm 5.2 or higher, check out the official npm documentation: <https://docs.npmjs.com/downloading-and-installing-packages-globally>.

## Setting Up SuiteCloud CLI for Node.js

Before you start working with SuiteCloud CLI for Node.js, you need to run `suitecloud account:setup` in your project folder.

If you don't have a project yet, run `suitecloud project:create -i`, then run `suitecloud account:setup`.


**Important:** Make sure your role is set up for SDF development. For more information, see the help topic [Assigning the Developer Role \(Administrator Only\)](#).

To see how to install and set up SuiteCloud CLI for Node.js, watch the following video:

 [Setting Up CLI for Node.js](#)

### To set up SuiteCloud CLI for Node.js

1. Launch your preferred command-line interpreter.
2. Go to the folder of an existing project on your machine.
3. In your project folder, run `suitecloud account:setup` and answer the questions in SuiteCloud CLI.

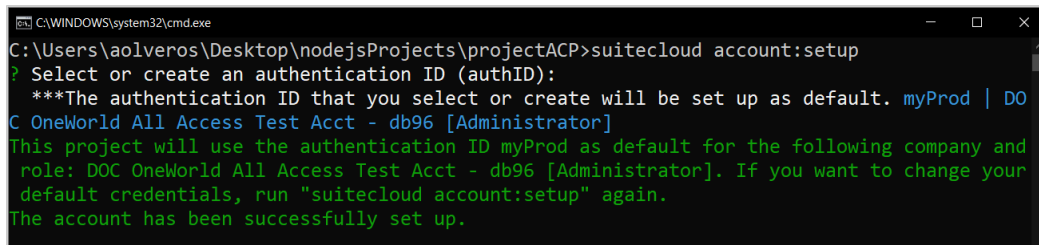

```

C:\WINDOWS\system32\cmd.exe
C:\Users\aoilveros\Desktop\nodejsProjects\projectACP>suitecloud account:setup
? Select or create an authentication ID (authID):
***The authentication ID that you select or create will be set up as default. myProd | DO
C OneWorld All Access Test Acct - db96 [Administrator]
This project will use the authentication ID myProd as default for the following company and
role: DOC OneWorld All Access Test Acct - db96 [Administrator]. If you want to change your
default credentials, run "suitecloud account:setup" again.
The account has been successfully set up.
  
```

 **Tip:** To exit the process at any time, press Ctrl + C.

## About the Project Structure in SuiteCloud CLI for Node.js

When you create a SuiteCloud project with SuiteCloud CLI for Node.js, its structure is different from projects created with SuiteCloud IDE plug-ins or SuiteCloud CLI for Java. In SuiteCloud CLI for Node.js, your project folder has the `suitecloud.config.js` file and a `src` folder, which stores all your SuiteScript files, SDF custom objects, and project-related config files. You can use SuiteCloud projects created with SuiteCloud CLI for Node.js in SuiteCloud IDE plug-in for WebStorm and in SuiteCloud Extension for Visual Studio Code.

For more information about SuiteCloud project types and files, see [SuiteCloud Project Types in SuiteCloud CLI for Node.js](#) and [SuiteCloud Project Files in SuiteCloud CLI for Node.js](#).

**Note:** SuiteCloud projects created with SuiteCloud Extension for Visual Studio Code follow the same structure.

## SuiteCloud Project Types in SuiteCloud CLI for Node.js

Here are some examples showing the structure of different SuiteCloud project types:

### Account customization projects

```
1 myACP
2   > src
3     > AccountConfiguration
4     > FileCabinet
5       > SuiteScripts
6       > Templates
7       > Web Site Hosting Files
8       > Objects
9       > Translations
10    deploy.xml
11    manifest.xml
12    project.json
13    suitecloud.config.js
```

To see how to create an account customization project in SuiteCloud CLI for Node.js, watch the following video:

 [Creating an Account Customization Project in SuiteCloud CLI for Node.js](#)

For more information, see the help topic [Account Customization Projects](#).

### SuiteApp projects

```
1 com.mycompany.mysuiteapp
2   > src
3     > FileCabinet
4       > SuiteApps\com.mycompany.mysuiteapp
5       > Web Site Hosting Files
6     > InstallationPreferences
7     deploy.xml
8     manifest.xml
9     project.json
10  > Objects
11  > Translations
12  suitecloud.config.js
```

To see how to create a SuiteApp project in SuiteCloud CLI for Node.js, watch the following video:

 [Creating a SuiteApp Project in SuiteCloud CLI for Node.js](#)

For more information, see the help topic [SuiteApp Projects](#).

**Note:** If you added unit testing with Jest when creating your account customization project or SuiteApp, your project will also contain the `__tests__` and `node_modules` folders.

For more information about the structure of SuiteCloud projects, see the help topic [SuiteCloud Project Structure and File Components](#).

To see an example of how to use SuiteCloud CLI for Node.js, watch the following video:

 [Working with SuiteCloud CLI for Node.js](#)

## SuiteCloud Project Files in SuiteCloud CLI for Node.js

Your project configuration is stored in the **suitecloud.config.js** file in your project folder.

### Suitecloud.config.js File

This file is created when you run `suitecloud project:create -i` and defines the default folder for your project. By default, the structure of the file looks like this:

```
1 module.exports = {
2   defaultProjectFolder: "src",
3   commands: {}
4 };
```

You can use this file to add customizations to SuiteCloud CLI for Node.js commands. You can add code to inject logic such as defining different folders for specific commands, setting command flags, or adding unit tests.



**Note:** Use the same command names used by SuiteCloud CLI for Node.js. To make sure you use the right names, see [SuiteCloud CLI for Node.js Commands Reference](#).

### Suitecloud.config.js File Entry Points

To trigger command customizations, you can use these entry points on different commands:

- `beforeExecuting`: The code runs before the command runs.
- `onCompleted`: The code runs after the command finishes successfully (without errors).
- `onError`: The code runs if an error is thrown.

### Suitecloud.config.js Customizations

The **suitecloud.config.js** file lets you do the following customizations:

- Set command options so you don't have to pass their value every time you run the command. To call a command option, enter `options.argument.[optionName]`, then, set the value you want as default.

For example, if you want to apply content protection every time you deploy a SuiteApp, add this code:

```
1 commands: {
2   "project:deploy": {
3     beforeExecuting: options => {
4       options.arguments.applycontentprotection = true;
5       return options;
6     },
7   },
8 };
```



**Note:** Use the same option names as SuiteCloud CLI for Node.js. To make sure you use the right names, see [SuiteCloud CLI for Node.js Commands Reference](#) and check the **Option** table in the commands section you want to customize. You can also see the possible values of the options.

- Add messages to any of the three entry points. These messages show up along with SuiteCloud CLI for Node.js logs. To display a custom message, create a function on an entry point and log it to the console.

For example, if you want to show a message in your console every time you import files, add this code:

```
1 | commands: {
2 |   "file:import": {
3 |     beforeExecuting: myMessage => {
4 |       console.log("We're importing SuiteScript files...");
5 |     },
6 |   },
7 | };
```

- Set a project folder different from the default one.

For example, if you want to run all your commands from the src folder, but deploy from the dist folder, add this code:

```
1 | module.exports = {
2 |   defaultProjectFolder: 'src',
3 |   commands: {
4 |     "project:deploy": {
5 |       projectFolder: 'dist',
6 |     },
7 |   },
8 | };
```

 **Note:** The folder you set needs to be inside of the project folder.

- You can add your own code to run unit tests, for example. You can add it to any of the three entry points.

## Suitecloud.config.js File Example

Here's an example of a customized **suitecloud.config.js** file.

```
1 | module.exports = {
2 |   defaultProjectFolder: 'src',
3 |   commands: {
4 |     "project:deploy": {
5 |       projectFolder: 'dist',
6 |       beforeExecuting: async options => {
7 |         options.arguments.validate = true;
8 |         // You can run some build processes or unit tests here.
9 |         // You should return the options object or a Promise that returns the options object on resolve.
10 |         return options;
11 |       },
12 |       onCompleted: output => {
13 |         console.log("Eureka! The deployment was a success.");
14 |       },
15 |       onError: error => {
16 |         console.log("Houston, we've had a problem here. The deployment failed.");
17 |       },
18 |     },
19 |     "project:validate": {
20 |       projectFolder: 'dist',
21 |     },
22 |     "project:adddependencies": {
23 |       projectFolder: 'dist',
24 |     },
25 |   },
26 | };
```

In this example, these customizations have been set:

- `project:deploy` command
  - The command is run from the dist folder instead of the default src folder.

- Before the command runs, the project gets validated locally.
- When the command finishes without errors, you'll see this message in the console: Eureka! The deployment was a success.
- If there's an error, you'll see this message in the console: Houston, we've had a problem here. The deployment failed.
- `project:validate` command: This command runs from the `dist` folder, instead of the default `src` folder.
- `project:adddependencies` command: This command runs from the `dist` folder, instead of the default `src` folder.

## Debugging in Visual Studio Code using SuiteCloud CLI for Node.js

If you're using SuiteCloud CLI for Node.js integrated in Visual Studio Code, you can debug your test files right in the IDE.

For more information about unit testing in SuiteCloud projects, see [SuiteCloud Unit Testing in GitHub](#).

### To debug in Visual Studio Code using SuiteCloud CLI for Node.js

1. Create a JSON file in the `.vscode` folder with the following code:

```

1 | {
2 |   "version": "0.2.0",
3 |   "configurations": [
4 |     {
5 |       "type": "node",
6 |       "request": "launch",
7 |       "name": "Debug Jest Tests",
8 |       "skipFiles": ["<node_internals>/**"],
9 |       "args": ["--runInBand", "--config=${workspaceFolder}\\jest.config.js"],
10 |      "console": "integratedTerminal",
11 |      "program": "${workspaceFolder}\\node_modules\\jest\\bin\\jest"
12 |    }
13 |  ]
14 | }
```

 **Note:** This example works in Windows. If you use Unix, you only need to adjust the paths syntax.

2. Save it as **launch.json**.
3. Launch Visual Studio Code, and open the test file corresponding to the file you want to debug.
4. Add a breakpoint in a line of your test file, and press the  button.

## SuiteCloud Unit Testing with Jest

You can use SuiteCloud Unit Testing with Jest with SuiteCloud CLI for Node.js and your IDE. For more information, see [SuiteCloud Unit Testing in GitHub](#).

# SuiteCloud CLI for Node.js Reference

You can use SuiteCloud CLI for Node.js to manage SuiteCloud project components and validate and deploy projects to your account.

## SuiteCloud CLI for Node.js Syntax

```
1 | suitecloud <command> <option> <argument>
```



**Important:** If an argument is enclosed in angle brackets (<argument>)), it's required. If it's enclosed in brackets ([argument]), it's optional.

## SuiteCloud CLI for Node.js Commands Reference

| Command                                 | Description                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <a href="#">account:manageauth</a>      | Manages authentication IDs for all your projects.                                                                                                                                                                                                                                                                                                   |
| <a href="#">account:setup</a>           | <p>Sets up an account to use with SuiteCloud CLI for Node.js.</p> <p>This command only works in interactive mode.</p> <p>Sets up an account to use with SuiteCloud SDK and configures the default auth ID for the SuiteCloud project.</p> <p>It requires browser-based login to NetSuite.</p>                                                       |
| <a href="#">account:setup:ci</a>        | <p>Sets up an account to use with SuiteCloud SDK and configures the default auth ID for the SuiteCloud project.</p> <p>This command also allows you to select an existing auth ID as the default for your SuiteCloud project.</p> <p>It does not require browser-based login to NetSuite, and is helpful for automated environments such as CI.</p> |
| <a href="#">file:create</a>             | Creates a SuiteScript file in the selected folder.                                                                                                                                                                                                                                                                                                  |
| <a href="#">file:import</a>             | Imports files from an account to your Account Customization Project.                                                                                                                                                                                                                                                                                |
| <a href="#">file:list</a>               | Lists the files in your account's File Cabinet.                                                                                                                                                                                                                                                                                                     |
| <a href="#">file:upload</a>             | Uploads files from your project to your account.                                                                                                                                                                                                                                                                                                    |
| <a href="#">object:import</a>           | Imports SDF custom objects from an account to your SuiteCloud project.                                                                                                                                                                                                                                                                              |
| <a href="#">object:list</a>             | Lists the SDF custom objects deployed in your account.                                                                                                                                                                                                                                                                                              |
| <a href="#">object:update</a>           | Overwrites the SDF custom objects in your project with the matching ones from your account. In the case of custom records, you can include custom instances.                                                                                                                                                                                        |
| <a href="#">project:adddependencies</a> | Adds any missing dependencies to the manifest file.                                                                                                                                                                                                                                                                                                 |
| <a href="#">project:create</a>          | Creates a SuiteCloud project, either a SuiteApp or an Account Customization Project (ACP).                                                                                                                                                                                                                                                          |
| <a href="#">project:deploy</a>          | Deploys the folder containing your project.                                                                                                                                                                                                                                                                                                         |

| Command                       | Description                                                                                                    |
|-------------------------------|----------------------------------------------------------------------------------------------------------------|
| <code>project:package</code>  | Generates a ZIP file from your project, following the structure specified in the <code>deploy.xml</code> file. |
| <code>project:validate</code> | Validates your SuiteCloud project folder.                                                                      |

## account:manageauth

Manages authentication IDs for all your projects.

### Syntax

```
1 suitecloud account:manageauth [--info myNetSuiteDevRole] [--rename myNetSuiteDevRole --renameto myOtherNetSuiteDevRole] [--remove myNetSuiteDevRole]
```

### Options

| Option                                        | Required / Optional | Description                                                                                                                                                                                                                 |
|-----------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--info</code>                           | Optional            | Prints the following information for the specified authentication ID: account ID, role ID, and domain.<br><br>For example, <code>suitecloud account:manageauth --info myDevAccountAuthId</code> .                           |
| <code>-i</code> or <code>--interactive</code> | Optional            | Runs the command in interactive mode.                                                                                                                                                                                       |
| <code>--list</code>                           | Optional            | Prints a list of all your configured authentication IDs.<br><br>For example, <code>suitecloud account:manageauth --list</code> .                                                                                            |
| <code>--remove</code>                         | Optional            | Removes an authentication ID. The tokens aren't revoked in the account.<br><br>For example, <code>suitecloud account:manageauth --remove myDevAccountAuthId</code> .                                                        |
| <code>--rename</code>                         | Optional            | Renames an authentication ID. You have to use it with the <code>--renameto</code> option.<br><br>For example, <code>suitecloud account:manageauth --rename myDevAccountAuthId --renameto devAccount</code> .                |
| <code>--renameto</code>                       | Optional            | Specifies the new ID for an authentication ID. You have to use it with the <code>--rename</code> option.<br><br>For example, <code>suitecloud account:manageauth --rename myDevAccountAuthId --renameto devAccount</code> . |
| <code>-h</code> or <code>--help</code>        | Optional            | Prints the help for this command.                                                                                                                                                                                           |

### Interactive Example

Here's a command that lets you view and edit your authentication IDs in interactive mode:



```
1 | suitecloud account:manageauth -i
```

Before you run the command, you are prompted with these questions:

```
1 | Select an authentication ID to see its details:
2 | (*) myAdminDRole | Admin - companyName
3 | ( ) myDevRole | Developer - companyName
4 | myNetSuiteDevRole authentication ID information: Authentication ID: myAdminDRole Account Name: My Company Account ID: accountID
   | Role: Admin Domain: netsuite.com Account Type: Production
5 | Select one of the following actions: > Rename the authentication ID. Remove the authentication ID. Exit the process.
6 | Enter a new name for the authentication ID: adminRoleAuthId
```

## Non-interactive Example

Here's a command that removes an authentication ID in non-interactive mode:

```
1 | suitecloud account:manageauth --remove myNetSuiteDevRole
```

## Output Example

When you finish answering the questions prompted by the interactive command, the command produces output that is similar to the following:

```
1 | The authentication ID adminRoleAuthId was successfully updated.
```

## account:setup

Sets up an account to use with SuiteCloud SDK and configures the default auth ID for your SuiteCloud project.

This command needs a browser-based login to NetSuite.

 **Note:** This command only works in interactive mode.

The `suitecloud account:setup` command uses **browser-based authentication**, so your account is authenticated through a browser that opens automatically. The browser may open in the background.

 **Important:** Browser-based authentication doesn't work with Windows Subsystem for Linux.

## Syntax

```
1 | suitecloud account:setup
```

## Options

| Option              | Required / Optional | Description                                                      |
|---------------------|---------------------|------------------------------------------------------------------|
| -i or --interactive | Optional            | Runs the <code>account:setup</code> command in interactive mode. |

| Option       | Required / Optional | Description                    |
|--------------|---------------------|--------------------------------|
| -h or --help | Optional            | Displays help for the command. |

## Example

Here's a command that sets up the account for your current SuiteCloud project using interactive mode:

```
1 | suitecloud account:setup
```

Before you run the command, you'll be prompted with these questions:

```
1 | Select or create an authentication ID (a custom alias you give to a specific account-role combination):
2 | ***The authentication ID that you select or create will be set up as default. > Create a new authentication ID.
3 | Enter an authentication ID: myDevRole
```

## Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | The account has been authenticated for the following company and role: DB 9006 OneWorld for My Account Name [Developer]. This
   | project will use the authentication ID "myDevRole" as default. If you want to change your default credentials, run "suitecloud
   | account:setup" again.
2 | The account has been successfully set up.
```

## account:setup:ci

Sets up an account to use with SuiteCloud SDK and configures the default auth ID for your SuiteCloud project.

```
1 | suitecloud account:setup:ci [--account myAccountId] [--authid myAuthId] [--certificateid myCertificateId] [--domain myNetsuiteDo
   | mainURL] [--privatekeypath myPrivateKeyPath]
```

With this command, you can also select an existing auth ID as the default for your SuiteCloud project.

```
1 | suitecloud account:setup:ci [--select myAuthId]
```

This command doesn't require browser-based login to NetSuite and is helpful for automated environments such as CI.

**Note:** To change the default auth ID for the project, run: `suitecloud account:setup:ci --select myAuthId`.

## Syntax

```
1 | suitecloud account:setup:ci <--account myAccountId> <--authid myAuthId> <--certificateid myCertificateId> [--domain myNetsuiteDo
   | mainURL] <--privatekeypath myPrivateKeyPath>
```

```
1 | suitecloud account:setup:ci [--select myAuthId]
```

For more information, see the help topic [OAuth 2.0 Authentication for SuiteCloud SDK](#).

## Options

| Option           | Required / Optional | Description                                                                                                                                                                                                                                                   |
|------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| --account        | Required            | References the NetSuite account ID.                                                                                                                                                                                                                           |
| --authid         | Required            | References the custom alias you give to a specific account-role combination (also called authentication ID or auth ID in the docs).                                                                                                                           |
| --certificateid  | Required            | References the certificate ID obtained from NetSuite after uploading the public key file.                                                                                                                                                                     |
| --domain         | Optional            | References the NetSuite domain of the account you want to use. Only specify this if you want to use a custom NetSuite domain.                                                                                                                                 |
| --privatekeypath | Required            | References the local path to the private key file that matches the certificate in NetSuite. For example: d:/path/private-key.pem.                                                                                                                             |
| --select         | Optional            | Selects an existing auth ID as the default for your SuiteCloud project.<br>For example, suitecloud account:setup:ci --select myAuthId.<br><br>This option is mutually exclusive to all other options. If you select it, all other options become unavailable. |
| -h or --help     | Optional            | Displays the help for this command.                                                                                                                                                                                                                           |



**Important:** To get the **certificate ID**, you need to generate an **RSA certificate**. The RSA certificate has two parts: the **public key** and the **private key**.

Upload the public key in the OAuth 2.0 Client Credentials Setup by choosing **SuiteCloud Development Integration** in the **Application** field and selecting the entity and role to map. This will generate a new row with the certificate ID value.

The private key path value is the location where the private key is saved.

For more information about how to generate the **RSA certificate**, see the help topic [Certificate Conditions](#).

For more information about how to upload the public key, follow the steps in [OAuth 2.0 Client Credentials Setup](#).

## Example

Here's a command that sets up the account for use with your current SuiteCloud project:

```
1 | suitecloud account:setup:ci --authid myAuthId --certificateid iozrrinfw18oa4quy23gm1zcgkfo25ix60ha0w6cxf --privatekeypath d:/path/private-key.pem --account 1234567
```

Here's a command that selects an existing auth ID as the default for your SuiteCloud project.

```
1 | suitecloud account:setup:ci select myAuthId
```

## Output Example

When you run the command to set up an account, it produces an output that is similar to the following:

```
1 | The authentication was successful with the following account and role: My account name [Developer]. This project will use the authentication ID "myAuthId" as default.
```

When you run the command to select an existing auth ID, it produces an output that is similar to the following:

```
1 | The authentication ID was successfully changed. This project will use the auth ID "myAuthId" as default.
```

## file:create

Creates a SuiteScript file of the script type you specify in a SuiteCloud project, whether it's an Account Customization Project or a SuiteApp.

## Syntax

```
1 | suitecloud file:create [-- type]
2 | [--path]
```

## Options

| Option              | Required / Optional | Description                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -- type             | Optional            | Specifies the script type for the SuiteScript file that you want to create. For example, to make a map/reduce script, use: -- type 'mapReduce'.<br><br>For a list of available SuiteScript script types, see the help topic <a href="#">SuiteScript 2.x Script Types</a> .                                                                                                                              |
| --path              | Optional            | Specifies the path and file name for the SuiteScript file you're creating. For example, to create a script in the File Cabinet of a SuiteApp project: --path 'FileCabinet/SuiteApps/com.example.currency/currency.js'.<br><br>For information about where SuiteScript files can be stored in SuiteCloud projects, see the help topic <a href="#">SuiteCloud Project Structure and File Components</a> . |
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                                                                                                                                                                                                                                                                                                   |
| -h or --help        | Optional            | Prints the help for this command.                                                                                                                                                                                                                                                                                                                                                                       |

## Interactive Example

Here's a command that creates a SuiteScript file using interactive mode:

```

1 | ? What type of SuiteScript do you want to create? (Use arrow keys)
2 | > Bundle Installation Script Client Script Custom Module Custom Plug-in Custom Record Action Script Map/Reduce Script Mass Update
   | Script Portlet RESTlet Scheduled Script SDF Installation Script Suitelet User Event Script Workflow Action Script ? Do you want to
   | add SuiteScript modules to the file? (Use arrow keys)
3 | > Yes No ? Select the SuiteScript modules you want to add to the SuiteScript file (Press <space> to select, <a> to toggle all, <i>
   | to invert selection)
4 | > ( ) N/action ( ) N/auth ( ) N/cache ( ) N/certificateControl ( ) N/commerce ( ) N/compress ( ) N/config ( ) N/crypto ( ) N/crypto/
   | certificate ( ) N/currency ( ) N/currentRecord ( ) N/dataset ( ) N/email ( ) N/encode ( ) N/error
5 | (Move up and down to reveal more choices) ? Select the folder where you want to create the SuiteScript file (Use arrow keys)
6 | FileCabinet\SuiteApps\com.example.currency\ ? Enter a name for the SuiteScript file
7 | commerce.js

```

## Non-Interactive Example

Here's a command that creates a SuiteScript file of type Map/Reduce in the File Cabinet folder of the SDF SuiteApp project using non-interactive mode:

```

1 | suitecloud file:create --type 'mapReduce' --path 'FileCabinet/SuiteApps/com.example.currency/currency.js'

```

## Output Example

When you run the command, it produces an output that is similar to the following:

```

1 | The SuiteScript file was created successfully in C:\projects\com.example.currency\currency.js

```

## file:import

Imports a file from an account to your Account Customization Project.



**Note:** You can't import files from a SuiteApp.



**Tip:** If you run the command in non-interactive mode, the file gets overwritten if it already exists in your project.

## Syntax

```

1 | suitecloud file:import <--paths FileCabinetPath1> [--excludeproperties]

```

## Options

| Option              | Required / Optional | Description                                                                                                                                      |
|---------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| --excludeproperties | Optional            | Excludes the file and folder properties from your account. If you specify this option, the .attributes folder isn't created or updated. For more |

| Option              | Required / Optional | Description                                                                                                                                                                                                                                                                                       |
|---------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |                     | information about the .attributes folder, see the help topic <a href="#">Modifying SuiteCloud Project File and Folder Attributes in an XML Definition</a> .                                                                                                                                       |
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                                                                                                                                                                                             |
| --paths             | Required            | Specifies the FileCabinet path of the file you want to import. For example, "/SuiteScripts". You can only import one file at a time in non-interactive mode.<br><br> <b>Important:</b> Wildcards aren't allowed. |
| -h or --help        | Optional            | Prints the help for this command.                                                                                                                                                                                                                                                                 |

## Interactive Example

Here's a command that imports all the files from an account into the current project using interactive mode:

```
1 | suitecloud file:import -i
```

Before you run the command, you'll be prompted with these questions:

```
1 | Select the path where you want to import the files. > \SuiteScripts \SuiteScript\MyProject \SuiteScript\MyProject\Subfolder
   [Restricted]
2 | Select the files you want to import to your project. (*) All ( ) \SuiteScripts\SuiteCallPortlet.js ( ) \SuiteScripts\SuiteCal
   lSuitelet.js ( ) \SuiteScripts\Suitelet.js ( ) \SuiteScripts\Suitelet1.js
3 | Do you want to exclude all file properties within the .attributes folder? > Yes No
4 | All the objects in the project will be overwritten with the objects from the account. Do you want to continue? > Yes No
```

## Non-interactive Example

Here's a command that imports a file from an account into the current project using non-interactive mode:

```
1 | suitecloud file:import --paths "/SuiteScripts/test.js"
```

## Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | The following files were imported:
2 | /SuiteScripts/2x_UE_CustomerDeposit_UpdateDepositAmountOnOrder.js
```

## file:list

Lists the files in your account's File Cabinet.

**Note:** You can't list the files from a SuiteApp.

## Syntax

```
1 | suitecloud file:list <--folder FileCabinetPath1>
```

## Options

| Option              | Required / Optional | Description                                                                                                                                 |
|---------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| --folder            | Required            | Specifies the File Cabinet path that contains the files to list. For example, "/SuiteScripts".<br>All files in subfolders are included too. |
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                                       |
| -h or --help        | Optional            | Prints the help for this command.                                                                                                           |

## Interactive Example

Here's a command that lists the files in a specific folder using interactive mode:

```
1 | suitecloud file:list -i
```

Before you run the command, you'll be prompted with these questions:

```
1 | Select the File Cabinet folder for which you want to get a file list. All files within subfolders will be included in the listing.
2 | (*) \SuiteScripts
3 | ( ) \SuiteScripts\RunTimeFiles
```

## Non-interactive Example

Here's a command that lists the files in the SuiteScripts folder of your account's File Cabinet:

```
1 | suitecloud file:list --folder "/SuiteScripts"
```

## Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | The following files were found in your account:
2 | /SuiteScripts/file1.js
3 | /SuiteScripts/file2.js
4 | /SuiteScripts/file3.js
5 | /SuiteScripts/file4.js
6 | /SuiteScripts/RunTimeFiles/document.pdf
7 | /SuiteScripts/RunTimeFiles/data.csv
8 | /SuiteScripts/RunTimeFiles/log.txt
9 | /SuiteScripts/RunTimeFiles/sample.txt
10 | /SuiteScripts/RunTimeFiles/test.xml
```

## file:upload

Uploads files from your project to your account.

### Syntax

```
1 | suitecloud file:upload [--paths "/SuiteScripts/File.js"]
```

### Options

| Option              | Required / Optional | Description                                                                                                                                                                                                                                                   |
|---------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                                                                                                                                                         |
| --paths             | Optional            | Specifies the File Cabinet paths of the files you want to upload.<br><br>To upload multiple files, add a space between each path and wrap the whole argument in double quotes. For example: <code>"/SuiteScripts/File.js" "/SuiteScripts/NewFile.js"</code> . |
| -h or --help        | Optional            | Prints the help for this command.                                                                                                                                                                                                                             |

### Interactive Example

Here's a command that uploads files from your current project to your account using the interactive mode:

```
1 | suitecloud file:upload -i
```

Before you run the command, you'll be prompted with these questions for a SuiteApp:

```
1 | Select the folder from where you want to upload files to the File Cabinet: > \SuiteScripts \Templates (Restricted Folder) \Templates
  | \E-mail Templates (No Files) \Templates\Marketing Templates (No Files) \Web Site Hosting Files (No Files)
2 | Select the files you want to upload to the File Cabinet: (*) /SuiteScripts/myFile.js ( ) /SuiteScripts/myOtherFile.js (*) /
  | SuiteScripts/SuiteScriptFile.js
3 | The selected files will be overwritten in the File Cabinet. Do you want to continue? > Yes No
```

### Non-interactive Example

Here's a command that uploads two files, `myFile.js` and `SuiteScriptFile.js`, into a project using the non-interactive mode:

```
1 | suitecloud file:upload --paths "/SuiteScripts/myFile.js" "/SuiteScripts/SuiteScriptFile.js"
```

### Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | The following files were uploaded:
2 | /SuiteScripts/myFile.js
```



```
3 | /SuiteScripts/SuiteScriptFile.js
```

## object:import

Imports SDF custom objects from your account to your SuiteCloud project. In Account Customization Projects (ACP), if SuiteScript files are referenced in the SDF custom objects you import, those files get imported by default too.

## Syntax

```
1 | suitecloud object:import <--destinationfolder DestinationPath> <--scriptid ScriptID1 ScriptID2> <--type CustomObjectType> [--appid
   | QualifiedAppID]
```

## Options

| Option              | Required / Optional | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| --appid             | Optional            | <p>Specifies your application ID. If you specify it, only SDF custom objects with that application ID are imported. Otherwise, only SDF custom objects with no application ID are imported.</p> <p>The application ID is a fully qualified name like &lt;publisherid&gt;.&lt;projectid&gt;. For example, com.netsuite.mysuiteapp or org.mycompany.helloworld are valid app IDs.</p> <p>For information about the SuiteApp application ID, see the help topic <a href="#">SuiteApp Application ID</a>.</p> |
| --destinationfolder | Required            | <p>Indicates where SDF custom objects are saved.</p> <p>Specify the project folder where SDF custom objects are stored. It must be within the Objects folder of your project. For example, "/objects/MyObjects".</p>                                                                                                                                                                                                                                                                                      |
| --excludefiles      | Optional            | <p>Indicates that the SuiteScript files referenced in the SDF custom objects are not imported. You can only use this in Account Customization Projects (ACP).</p> <p>If you don't use this option, SuiteScript files referenced in the imported SDF custom objects get imported too.</p>                                                                                                                                                                                                                  |
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| --scriptid          | Required            | <p>Indicates the SDF custom objects that are imported to your project.</p> <p>Specify the script ID. You can only import one file at a time in non-interactive mode.</p>                                                                                                                                                                                                                                                                                                                                  |
| --type              | Required            | <p>Imports the SDF custom objects for the custom script types you specify.</p> <p>Specify the type of SDF custom objects to import. Enter All to import all SDF custom objects.</p> <p>To see which SDF custom objects are supported, see the help topic <a href="#">SuiteCloud Development Framework XML Reference</a>.</p>                                                                                                                                                                              |
| -h or --help        | Optional            | Prints the help for this command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## Interactive Example

Here's a command that imports SDF custom objects from your account to the current project using interactive mode:

```
1 | suitecloud object:import -i
```

Before you run the command, the following questions are prompted for a SuiteApp:

```
1 | Do you want to import objects from a specific SuiteApp? > Yes No
2 | Enter the application ID. > org.mycompany.helloworldapp
3 | Do you want to import all objects types? Yes > No
4 | Select the object types you want to import. (*) Advanced PDF Template ( ) Center (*) Center Category
5 | Do you want to enter a script ID to filter your search? Yes > No
6 | Select the objects you want to import. ( ) advancedpdftemplate:custtmpl_myfile (*) advancedpdftemplate:custtmpl_2 ( ) centercategory:custcentercategory_myfile (*) centercategory:custcentercategory_2
7 | Select the folder where you want to import the objects. > \Objects \Object\MyOtherObjects
8 | All the objects in the project will be overwritten with the objects from the account. Do you want to continue? > Yes No
```

## Non-interactive Example

Here's a command that imports two SDF custom objects, custtmpl\_2 and custcentercategory\_2, into a project using non-interactive mode.

```
1 | suitecloud object:import --destinationfolder "/Objects" --scriptid custtmpl_2 custcentercategory_2 --type ALL --appid org.mycompany.helloworldapp
```

## Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | The imported objects will overwrite the project objects.
2 | The following objects have been imported:
3 |   - advancedpdftemplate:custtmpl_2
4 |   - centercategory:custcentercategory_2
```

## object:list

Lists the SDF custom objects deployed in your account.

## Syntax

```
1 | suitecloud object:list [--appid QualifiedAppID] [--scriptid ScriptID] [--type CustomObjectType1 CustomObjectType2]
```

## Options

| Option  | Required / Optional | Description                                   |
|---------|---------------------|-----------------------------------------------|
| --appid | Optional            | Specifies the application ID of the SuiteApp. |

| Option              | Required / Optional | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |                     | <p>The application ID is a fully qualified name like &lt;publisherid&gt;.&lt;projectid&gt;. For example, com.netsuite.mysuiteapp or org.mycompany.helloworld are valid app IDs.</p> <p>If you specify it, only SDF custom objects with that application ID are listed. Otherwise, only SDF custom objects with no application ID are listed.</p> <p>For information about the SuiteApp application ID, see the help topic <a href="#">SuiteApp Application ID</a>.</p> |
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| --scriptid          | Optional            | <p>Specifies the script ID of the SDF custom objects you want to list. To specify multiple IDs, separate them with spaces. Enter All to import all SDF custom objects of the specified type.</p> <p>If you use this with the --type option, the list is also filtered by the --type criteria.</p>                                                                                                                                                                      |
| --type              | Optional            | <p>Lists the SDF custom objects that are associated with the specified custom NetSuite types. To specify multiple types, separate them by spaces.</p> <p>If you specify this option and the --scriptid option, the criteria set by the --scriptid option is also applied.</p> <p>If you don't use --scriptid or --type, all SDF custom objects are listed.</p>                                                                                                         |
| -h or --help        | Optional            | Prints the help for this command.                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## Interactive Example

Here's a command that lists the SDF custom objects in a specific folder using interactive mode:

```
1 | suitecloud object:list -i
```

Before you run the command, you'll be prompted with these questions:

```

1 | Do you want to list objects from a specific SuiteApp? > Yes No
2 | Enter the application ID. > org.mycompany.helloworldapp
3 | Do you want to list all object types? Yes > No
4 | Select the object types you want to list. (*) Advanced PDF Template ( ) Center (*) Center Category
5 | Do you want to enter a script ID to filter your list? > Yes No
6 | Enter the full or partial script ID. > 9

```

## Non-interactive Example

Here's a command that lists the SDF custom objects in your current account:

```
1 | suitecloud object:list --appid org.mycompany.helloworldapp --type advancedpdftemplate centercategory
```

## Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | The following objects were found in your account:
```

```

2 | advancedpdftemplate:custtmpl_myfile
3 | advancedpdftemplate:custtmpl_2
4 | centercategory:custcentercategory_myfile
5 | centercategory:custcentercategory_2

```

## object:update

Overwrites the SDF custom objects in your project with the matching ones from your account. For custom records, you can include custom instances too.

### Syntax

```
1 | suitecloud object:update <-scriptid scriptID>
```

### Options

| Option              | Required / Optional | Description                                                                                                                  |
|---------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------|
| --includeinstances  | Optional            | Includes instances. This is only valid for custom records.                                                                   |
| -i or --interactive | Optional            | Runs the command in interactive mode.                                                                                        |
| --scriptid          | Required            | Specifies the script ID of the SDF custom objects you want to overwrite. To specify multiple IDs, separate them with spaces. |
| -h or --help        | Optional            | Prints the help for this command.                                                                                            |

### Interactive Example

Here's a command that checks for updates to an SDF custom object in an account and overwrites it in the SuiteCloud project if it exists:

```
1 | suitecloud object:update -i
```

Before you run the command, you'll be prompted with these questions:

```

1 | Do you want to enter a script ID to filter your search? > Yes No
2 | Enter the full or partial script ID: cust
3 | Select the objects you want to update from your account: ( ) advancedpdftemplate:custtmpl_myfile (*) advancedpdftemplate:custtmpl_2
   | ( ) centercategory:custcentercategory_myfile (*) centercategory:custcentercategory_2 (*) customrecord3
4 | Do you want to include Custom Instances from the account? (*) Yes ( ) No
5 | All the selected objects in the project will be overwritten with the objects from the account. Do you want to continue? > Yes No

```

```

1 | Do you want to enter a script ID to filter your search? > Yes No
2 | Enter the full or partial script ID: cust
3 | Select the objects you want to update from your account: ( ) advancedpdftemplate:custtmpl_myfile (*) advancedpdftemplate:custtmpl_2
   | ( ) centercategory:custcentercategory_myfile (*) centercategory:custcentercategory_2
4 | All the selected objects in the project will be overwritten with the objects from the account. Do you want to continue? > Yes No

```

### Output Example

When you run the command, it produces an output that is similar to the following:

```

1 | The following custom records were updated with instances from the account to your project:
2 |   - customrecord3
3 | The following objects were updated from the account to your project:
4 |   - advancedpdftemplate:custtmpl_2
5 |   - centercategory:custcentercategory_2

```

```

1 | The following objects were updated from the account to your project:
2 | customrecord_test1 updated.

```

## project:adddependencies

Adds any missing dependencies to the manifest file. When you run this command, all the dependencies that were missing in the `manifest.xml` file get added.

 **Note:** This command doesn't support interactive mode.

## Syntax

```

1 | suitecloud project:adddependencies [-h]

```

## Options

| Option       | Required / Optional | Description                       |
|--------------|---------------------|-----------------------------------|
| -h or --help | Optional            | Prints the help for this command. |

## Non-interactive Example

Here's a command that updates the `manifest.xml` file of the current project:

```

1 | suitecloud project:adddependencies

```

## Output Example

When you run the command, it produces an output that is similar to the following:

```

1 | The following dependencies were added to the manifest:
2 | Feature - CRM:optional
3 | Feature - CUSTOMRECORDS:required
4 | Feature - EXTREMELIST:optional
5 | Feature - MAILMERGE:optional
6 | Feature - MATRIXITEMS:optional
7 | Feature - SERVERSIDESCRIPITING:required
8 | Feature - WEBSERVICES:optional

```

## project:create

Creates a SuiteCloud project, either a SuiteApp or an Account Customization Project (ACP).

When you create a project, you can choose to include unit testing with Jest. To learn more about the Jest testing framework, check out [their official website](#).

To learn more about the project types, see:

- [Account Customization Projects](#)
- [SuiteApp Projects](#)



**Tip:** After running this command, run `suitecloud account:setup` from your project folder to link your project with your account.

## Syntax

```
1 | suitecloud project:create [--overwrite] <--type ProjectType (ACCOUNTCUSTOMIZATION|SUITEAPP)> <--projectname ProjectName> [--projectid ProjectID] [--publisherid PublisherID] [--projectversion ProjectVersion]
```

## Options

| Option              | Required / Optional    | Description                                                                                                                                                           |
|---------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -i or --interactive | Optional               | Runs the command in interactive mode.                                                                                                                                 |
| --overwrite         | Optional               | Indicates that an existing project with an identical project name can be overwritten.                                                                                 |
| --projectid         | Required for SuiteApps | A unique ID for your project.<br>This value must be a word with lowercase alphanumeric characters. It must be less than 40 characters.                                |
| --projectname       | Required               | A name for your project.                                                                                                                                              |
| --projectversion    | Required for SuiteApps | The version for your project, using semantic versioning. For example, if your SuiteApp is version 1.02, minor revision #01242017, you'd use:<br><br>1   1.02.01242016 |
| --publisherid       | Required for SuiteApps | The publisher ID of your SuiteApp project.                                                                                                                            |
| --type              | Required               | The SuiteCloud project type, either ACCOUNTCUSTOMIZATION or SUITEAPP.                                                                                                 |
| -h or --help        | Optional               | Prints the help for this command.                                                                                                                                     |

## Interactive Example

Here's a command that creates a SuiteCloud project in the folder where you run the command:

```
1 | suitecloud project:create -i
```

Before you run the command, you'll be prompted with these questions for Account Customization Projects:

```

1 | Select the project type you want to create > Account Customization Project SuiteApp
2 | Enter the project name: MyACP
3 | Do you want to include unit testing with the Jest testing framework? ***This will install NPM module dependencies. > Yes No

```

Before you run the command, you'll be prompted with these questions for SuiteApps:

```

1 | Select the project type you want to create Account Customization Project > SuiteApp
2 | Enter the project name: MySuiteApp
3 | Enter the publisher ID: org.mycompany
4 | Enter the project ID: myproject
5 | Enter the project version: 1.2.3
6 | Do you want to include unit testing with the Jest testing framework? ***This will install NPM module dependencies. > Yes No

```

## Non-interactive Example

Here's a command that creates a SuiteApp project:

```

1 | suitecloud project:create --type SUITEAPP --projectid mysuiteapp123 --projectname MySuiteApp --publisherid com.netsuite --projectversion 1.0.0

```

Here's a command that creates an Account Customization Project:

```

1 | suitecloud project:create --type ACCOUNTCUSTOMIZATION --projectname MyACP

```

## Output Example

When you run the command, it produces an output that is similar to the following:

```

1 | The account customization project was created successfully in C:\sdfProjects\MyACP.
2 | Go to C:\sdfProjects\MyACP and run "suitecloud setupaccount" to link your project with your account.
3 | A sample unit test has been added in the "__tests__" folder of your project.

```

## project:deploy

Deploys the folder containing your SuiteCloud project. The folder gets zipped before deployment, only including the files and folders referenced in the `deploy.xml` file.

If you run `suitecloud project:deploy` with no options, the project isn't validated locally and is deployed without applying installation preferences. Account-specific values are labeled as error messages and stop the deployment.



**Important:** For installation script, installation preference, and translation collection objects, files referenced in their XML structure are also deployed, even if those files aren't part of the `deploy.xml` file.

## Syntax

```

1 | suitecloud project:deploy [--applyinstallprefs] [--validate] [--accountspecificvalues (WARNING|ERROR)]

```

## Options

| Option                  | Required / Optional    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| --applyinstallprefs     | Optional for SuiteApps | Applies the settings from the hiding.xml, locking.xml, and overwriting.xml files. Enter T to apply them, or F to ignore them.<br><br>For more information, see the help topic <a href="#">Installation Preferences in the SuiteApp of SuiteCloud Project</a>                                                                                                                                                                                                                                                                                                                                                                                                |
| --accountspecificvalues | Optional for ACPs      | Flags account-specific values as either a warning or an error. Enter ERROR or WARNING.<br><br>If you set the argument value is to WARNING and there are account-specific values in the project, you'll get a warning but deployment will continue.<br><br>If you set the argument value to ERROR and there are account-specific values in the project, you'll get an error and deployment will stop.<br><br>For more information, see the help topic <a href="#">Account-Specific Values Validation in SuiteCloud Projects</a> .<br><br><b>Important:</b> If you don't specify the --accountspecificvalues option, it acts the same as if you passed ERROR. |
| --dryrun or --dryrun    | Optional               | Runs a preview of your deployment process. Your project isn't deployed.<br><br><b>Important:</b> You can only use this option in non-interactive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| -i or --interactive     | Optional               | Runs the command in interactive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| -l or --log             | Optional               | Sets the deployment log file location, either as a directory or a file name.<br><br>If you specify a directory, a default log file is created in that location.<br><br><b>Important:</b> If a log file already exists in that location, deployment log details are added to that existing file.                                                                                                                                                                                                                                                                                                                                                             |
| -v or --validate        | Optional               | Starts client-side project validation.<br><br>Deployment stops if any errors occur during this process.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| --help                  | Optional               | Prints the help for this command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Interactive Example

Here's a command that deploys a SuiteCloud project to an account using interactive mode and creates a deployment log:

```
1 | suitecloud project:deploy
```

Before you run the command, the following questions are prompted:



```

1 | Do you want to apply installation preferences? > Yes No
2 | What do you want to do if the project contains account-specific values? Display a warning > Cancel the process

```

## Non-interactive Example

Here's a command that deploys an Account Customization Project to an account using the non-interactive mode. It also creates a deployment log:

```

1 | suitecloud project:deploy --applyinstallprefs -v

```

## Output Example

When you run the command, it produces an output that is similar to the following:

```

1 | Info -- Account [(PRODUCTION) Wolfe Electronics]
2 | Info -- Account Customization Project [Project]
3 | Info -- Framework Version [1.0]
4 | Validate manifest -- Success
5 | Validate deploy file -- Success
6 | Validate configuration -- Success
7 | Validate script file -- Success
8 | Validate objects -- Success
9 | Validate resource files -- Success
10 | Validate account settings -- Success
11 | Begin deployment
12 | 2019-08-10 11:08:23 (PST) Installation COMPLETE (0 minutes 3 second)

```

## project:package

Generates a ZIP file from your project, following the structure in the `deploy.xml` file. You can use this command for both Account Customization Projects and SuiteApps.

The current project gets packaged and stored in a build folder in the project root, with a default name like **projectACP-2020-08-14\_10-21-33.zip**.



**Important:** This command doesn't have any options available.

## Syntax

```

1 | suitecloud project:package

```

## Example

Here's a command that creates a ZIP file with a SuiteCloud project and stores it in a build folder located in the project root:

```

1 | suitecloud project:package

```

When you run the command, it produces an output that is similar to the following:

<sup>1</sup> | The projectACP-2020-08-17\_14-50-23.zip file has been successfully created.

## project:validate

Validates the folder with your SuiteCloud project.

If you run `suitecloud project:validate` with no options, the project is validated locally without applying installation preferences and account-specific values are ignored.

## Syntax

<sup>1</sup> | `suitecloud project:validate [--applyinstallprefs] [--server] [--accountspecificvalues (WARNING|ERROR)]`

## Options

| Option                  | Required / Optional | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| --accountspecificvalues | Optional            | <p>Flags account-specific values as either a warning or an error. Enter WARNING or ERROR.</p> <p>If you set the argument value is to WARNING and there are account-specific values in the project, you'll get a warning but deployment will continue.</p> <p>If you set the argument value to ERROR and there are account-specific values in the project, you'll get an error and deployment will stop.</p> <p>For more information, see the help topic <a href="#">Account-Specific Values Validation in SuiteCloud Projects</a>.</p> |
| --applyinstallprefs     | Optional            | <p>Applies settings from the <code>hiding.xml</code>, <code>locking.xml</code>, and <code>overwriting.xml</code> files. If you use this option, the settings are applied; if not, they are ignored.</p> <p>For more information, see the help topic <a href="#">Installation Preferences in the SuiteApp of SuiteCloud Project</a>.</p>                                                                                                                                                                                                |
| -i or --interactive     | Optional            | Runs the command in interactive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| -l or --log             | Optional            | <p>Sets the deployment log file location, either as a directory or a file name.</p> <p>If you specify a directory, a default log file is created in that location.</p> <div>  <b>Important:</b> If a log file already exists in that location, deployment log details are added to the end of the file. </div>                                                                                                                                      |
| --server                | Optional            | <p>Indicates that validation should be performed on the server. You have to be authenticated to do this.</p> <p>If you don't use this option, client-side validation is performed.</p>                                                                                                                                                                                                                                                                                                                                                 |
| -h or --help            | Optional            | Prints the help for this command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## Interactive Example

Here's a command that validates your current project using the interactive mode:

```
1 | suitecloud project:validate -i
```

Before you run the command, the following questions are prompted:

```
1 | How do you want to validate your project? > Against account Locally
2 | Do you want to apply installation preferences? > Yes No
3 | What do you want to do if the project contains account-specific values? > Ignore the account-specific values Display a warning
   | Cancel the process
```

## Non-interactive Example

Here's a command that validates your current project using the non-interactive mode:

```
1 | suitecloud project:validate --applyinstallprefs
```

## Output Example

When you run the command, it produces an output that is similar to the following:

```
1 | Validating using account (0000001).
2 | Validate manifest -- Success
3 | Validate deploy file -- Success
4 | Validate configuration -- Success
5 | Validate script file -- Success
6 | Validate objects -- Success
7 | Validate resource files -- Success
8 | Validate account settings -- Success
9 | Validate Custom Objects against the Account - Success
10 | Validate file cabinet items against the account - Success The validation process has finished successfully.
```