



ORACLE
NetSuite

SuiteCloud IDE Plug-in for WebStorm Guide

2025.2

December 17, 2025



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

SuiteCloud IDE Plug-in for WebStorm Overview	1
User Interface of SuiteCloud IDE Plug-in for WebStorm	1
Installing and Setting Up SuiteCloud IDE Plug-in for WebStorm	4
Installation of SuiteCloud IDE Plug-in for WebStorm	4
Installing SuiteCloud IDE Plug-in for WebStorm	6
Set Up for SuiteCloud IDE Plug-in for WebStorm	9
Setting Up SuiteCloud IDE Plug-in for WebStorm	9
SuiteCloud IDE Plug-in for WebStorm Usage	14
Working with SuiteCloud Projects in SuiteCloud IDE Plug-in for WebStorm	14
Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm	14
Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm	15
Customizing SuiteCloud IDE Plug-in for WebStorm	15
Importing Account Components to your SuiteCloud Project with SuiteCloud IDE Plug-in for WebStorm	16
Using Multiple Accounts with Run/Debug Configurations in SuiteCloud IDE Plug-in for WebStorm	18
Working with SDF Custom Objects in SuiteCloud IDE Plug-in for WebStorm	21
Creating an XML Definition for an SDF Custom Object in SuiteCloud IDE Plug-in for WebStorm	21
Overwriting SDF Custom Objects with their Matching Objects Imported from the Account in SuiteCloud IDE Plug-in for WebStorm	23
Comparing an SDF Custom Object with an Object from the Account in SuiteCloud IDE Plug-in for WebStorm	23
Working with SuiteScript Files in SuiteCloud IDE Plug-in for WebStorm	23
Creating a SuiteScript File in SuiteCloud IDE Plug-in for WebStorm	24
Comparing a SuiteCloud Project File with its Equivalent Account Version in SuiteCloud IDE Plug-in for WebStorm	25
Uploading Files or Folders to Your Account with SuiteCloud IDE Plug-in for WebStorm	26
Adding Dependencies to the Manifest in SuiteCloud IDE Plug-in for WebStorm	27
Defining Dependencies on SDF Custom Objects in a SuiteApp and Bundle Objects with SuiteCloud IDE Plug-in for WebStorm	27
Defining Account Component Dependencies from an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm	29
Defining Feature Dependencies in SuiteCloud IDE Plug-in for WebStorm	30
Changing Project Settings in SuiteCloud IDE Plug-in for WebStorm	30
Setting Installation Preferences in SuiteCloud IDE Plug-in for WebStorm	31
Managing SuiteCloud Projects as Compressed Files in SuiteCloud IDE Plug-in for WebStorm	32
Using SuiteScript Code Completion in SuiteCloud IDE Plug-in for WebStorm	33
Validating a SuiteCloud Project with SuiteCloud IDE Plug-in for WebStorm	36
Deploying a SuiteCloud Project to Your NetSuite Account with SuiteCloud IDE Plug-in for WebStorm	36
Shortcut Keys in SuiteCloud IDE Plug-in for WebStorm	38

SuiteCloud IDE Plug-in for WebStorm Overview

 **Important:** Starting February 2025, SuiteCloud IDE Plug-in for WebStorm version 2024.1, which supports Token-Based Authentication (TBA) and OAuth 1.0, will no longer be available for new installations. If you're still using an older version of the tool, upgrade to the latest version as soon as possible. The latest version of SuiteCloud IDE Plug-in for WebStorm is version 2025.1, and this version uses the OAuth 2.0 protocol for authorization. For more information, see [Removal of OAuth 1.0 Token-Based Authentication Support in SuiteCloud SDK](#) (SuiteAnswer ID 1019514).

SuiteCloud IDE plug-in for WebStorm is an integrated development environment (IDE) packaged for NetSuite platform development. It provides a user interface for SuiteCloud Development Framework (SDF). SDF is a development framework and deployment mechanism.

You can download SuiteCloud IDE plug-in for WebStorm as a plug-in installation, develop SuiteCloud projects, and deploy them to your account.

With a SuiteCloud project in the WebStorm plug-in, you can do the following:

- Manage multiple NetSuite domains and accounts.
- Import SDF custom objects from your account.
- Upload files and folders to your NetSuite FileCabinet.
- Compare files or SDF custom objects with the NetSuite version.
- Use SuiteScript 2.0 API code completion.
- Access NetSuite menus at the file, folder, and project level to use context menu actions. For example, you can add dependencies to the manifest, validate against account, deploy to account, and change project settings.
- View SDF logs in the IDE plug-in tool window.

 **Note:** A SuiteCloud project can be either an Account Customization Project or a SuiteApp project.


To learn more and get started with SuiteCloud IDE Plug-in for WebStorm, see the following topics:

- [Installing and Setting Up SuiteCloud IDE Plug-in for WebStorm](#)
- [SuiteCloud IDE Plug-in for WebStorm Usage](#)

User Interface of SuiteCloud IDE Plug-in for WebStorm

SuiteCloud IDE plug-in for WebStorm is a custom plug-in you add to WebStorm. After you install it, the menus and toolbars you need for managing and working with SuiteCloud projects and resources are accessible within the IDE plug-in.

When you open a SuiteCloud project, the user interface (UI) has an editor area, tabs, and tool windows that you use as you work with your SuiteCloud projects.

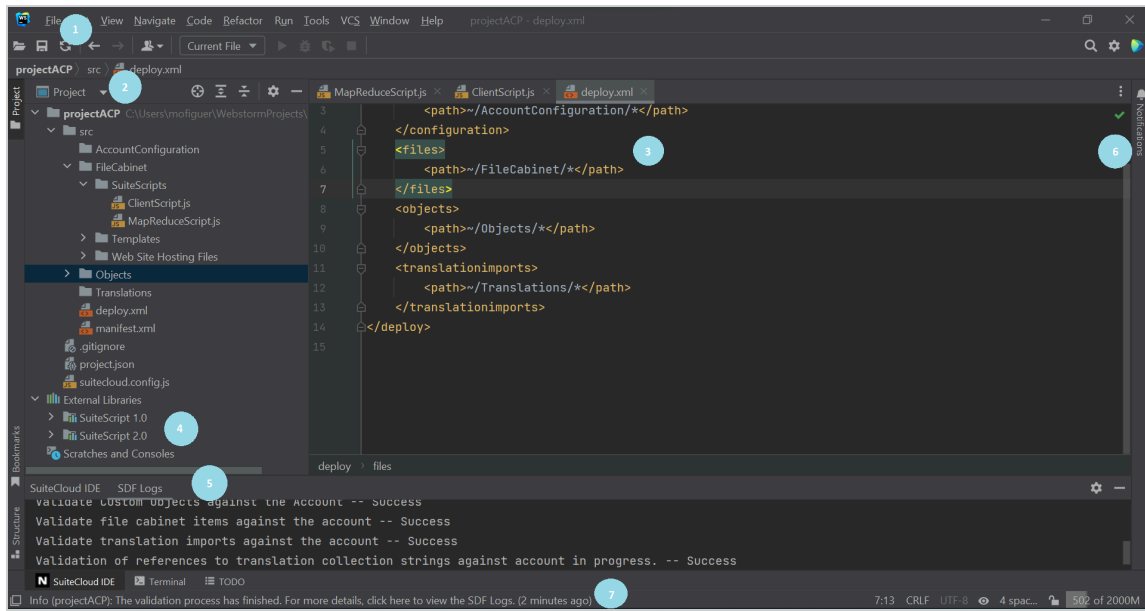

The following table lists the elements of the SuiteCloud IDE Plug-in for WebStorm interface:

Element	Description
1 File Menu	From the File menu, you can do things like: - Access the NetSuite menu. - Create new SuiteCloud projects. - Open, rename, or save projects. - Check for plug-in updates by opening Settings. For more information, see the WebStorm product help.
2 SuiteCloud IDE Tool Window	The IDE plug-in tool window displays the hierarchical view of your SuiteCloud projects (their folders and files) and resources. Hover over the project folder to see where your project is located. Click Project at the top-left of the screen to minimize or maximize the window. For more information, see the Project tool window topic in the WebStorm product help.
3 Editor Area	The Editor area shows the source file editors you can use for your code. For more information, see the WebStorm product help.
4 SuiteScript Libraries	SuiteScript 1.0 and SuiteScript 2.0 API libraries are automatically included in a SuiteCloud project to support code completion for both SuiteScript versions. If you don't need code completion for a certain SuiteScript version, you can delete the file from the project. For more information, see Using SuiteScript Code Completion in SuiteCloud IDE Plug-in for WebStorm.
5 SDF Logs	The SDF logs display the output, including any errors and warnings found during SuiteCloud project validation or deployment. Click the SuiteCloud IDE tab at the bottom-left of the screen to show or hide the window.
6 Notifications	The Notifications area shows suggestions, events, and errors. For example, if you upload a file from a project, when SDF finishes, the log displays the following: The uploading process has finished.

Element	Description
7 Progress View	The Progress view displays the progress of all your upload or download actions.

Installing and Setting Up SuiteCloud IDE Plug-in for WebStorm

SuiteCloud IDE plug-in for WebStorm is installed from within the WebStorm client. After you download and install WebStorm, you can add the IDE plug-in update site to your list of software updates.

To see how to install WebStorm and SuiteCloud IDE plug-in for WebStorm, check out the help video



[SuiteCloud Development Framework: Installing SuiteCloud IDE Plug-in for WebStorm.](#)

Installation of SuiteCloud IDE Plug-in for WebStorm



Important: Before you download SuiteCloud IDE Plug-in for WebStorm, read the **Oracle Free Use Terms and Conditions** license below.

■ Definitions

"Oracle" refers to Oracle America, Inc. "You" and "Your" refers to (a) a company or organization (each an "Entity") accessing the Programs, if use of the Programs will be on behalf of such Entity; or (b) an individual accessing the Programs, if use of the Programs will not be on behalf of an Entity. "Program(s)" refers to Oracle software provided by Oracle pursuant to the following terms and any updates, error corrections, and/or Program Documentation provided by Oracle. "Program Documentation" refers to Program user manuals and Program installation manuals, if any. If available, Program Documentation may be delivered with the Programs and/or may be accessed from www.oracle.com/documentation. "Separate Terms" refers to separate license terms that are specified in the Program Documentation, readmes or notice files and that apply to Separately Licensed Technology. "Separately Licensed Technology" refers to Oracle or third party technology that is licensed under Separate Terms and not under the terms of this license.

■ Separately Licensed Technology

Oracle may provide certain notices to You in Program Documentation, readmes or notice files in connection with Oracle or third party technology provided as or with the Programs. If specified in the Program Documentation, readmes or notice files, such technology will be licensed to You under Separate Terms. Your rights to use Separately Licensed Technology under Separate Terms are not restricted in any way by the terms herein. For clarity, notwithstanding the existence of a notice, third party technology that is not Separately Licensed Technology shall be deemed part of the Programs licensed to You under the terms of this license.

■ Source Code for Open Source Software

For software that You receive from Oracle in binary form that is licensed under an open source license that gives You the right to receive the source code for that binary, You can obtain a copy of the applicable source code from <https://oss.oracle.com/sources/> or <http://www.oracle.com/goto/opensourcecode>. If the source code for such software was not provided to You with the binary, You can also receive a copy of the source code on physical media by submitting a written request pursuant to the instructions in the "Written Offer for Source Code" section of the latter website.

The following license terms apply to those Programs that are not provided to You under Separate Terms.

■ License Rights and Restrictions

Oracle grants to You, as a recipient of this Program, a nonexclusive, nontransferable, limited license to, subject to the conditions stated herein, (a) internally use the unmodified Programs for the purposes of developing, testing, prototyping and demonstrating your applications, and running the Programs

for your own internal business operations; and (b) redistribute unmodified Programs and Programs Documentation, under the terms of this License, provided that You do not charge Your end users any additional fees for the use of the Programs. You may make copies of the Programs to the extent reasonably necessary for exercising the license rights granted herein and for backup purposes. You are granted the right to use the Programs to provide third party training in the use of the Programs and associated Separately Licensed Technology only if there is express authorization of such use by Oracle on the Program's download page or in the Program Documentation.

Your license is contingent on Your compliance with the following conditions:

- You include a copy of this license with any distribution by You of the Programs;
- You do not remove markings or notices of either Oracle's or a licensor's proprietary rights from the Programs or Program Documentation;
- You comply with all U.S. and applicable export control and economic sanctions laws and regulations that govern Your use of the Programs (including technical data);
- You do not cause or permit reverse engineering, disassembly or decompilation of the Programs (except as allowed by law) by You nor allow an associated party to do so.

For clarity, any source code that may be included in the distribution with the Programs is provided solely for reference purposes and may not be modified, unless such source code is under Separate Terms permitting modification.

■ **Ownership**

Oracle or its licensors retain all ownership and intellectual property rights to the Programs.

■ **Information Collection**

The Programs' installation and/or auto-update processes, if any, may transmit a limited amount of data to Oracle or its service provider about those processes to help Oracle understand and optimize them. Oracle does not associate the data with personally identifiable information. Refer to Oracle's Privacy Policy at www.oracle.com/privacy.

■ **Disclaimer of Warranties; Limitation of Liability**

THE PROGRAMS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND. ORACLE FURTHER DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW WILL ORACLE BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Here's how to install SuiteCloud IDE Plug-in for WebStorm:

1. **Verify the prerequisites.** For more information, see [Installation Requirements for SuiteCloud IDE Plug-in for WebStorm](#) and [Supported Operating Systems for SuiteCloud IDE Plug-in for WebStorm](#).
2. **(Optional) Set up your account.**
 - Check out [Setting Up Your SuiteScript Environment](#) if you're using [SuiteScript](#).
 - Check out [Enabling SuiteCloud Development Framework in the Target NetSuite Account \(Administrator Only\)](#) if you're using [SuiteCloud Development Framework](#).
3. **Download WebStorm.** For more information, see [Downloading WebStorm](#).
4. **Add the SuiteCloud IDE Update Site.** For more information, see [Adding SuiteCloud IDE Plug-in to WebStorm](#).

 **Warning:** The version of SuiteCloud IDE Plug-in for WebStorm must match your account's version to avoid compatibility errors.

 **Note:** To configure a proxy server, create the SUITECLOUD_PROXY environment variable. The variable value must include an http or https protocol, a hostname, and a port number, for example: http://proxyurl:proxyport. After you create the variable, restart WebStorm.

For information about the SuiteCloud IDE Plug-in for WebStorm features, see [SuiteCloud IDE Plug-in for WebStorm Overview](#).

Installing SuiteCloud IDE Plug-in for WebStorm

The following topics walk you through installing WebStorm and the IDE plug-in:

- [Installation Requirements for SuiteCloud IDE Plug-in for WebStorm](#)
- [Supported Operating Systems for SuiteCloud IDE Plug-in for WebStorm](#)
- [Downloading WebStorm](#)
- [Adding SuiteCloud IDE Plug-in to WebStorm](#)

Installation Requirements for SuiteCloud IDE Plug-in for WebStorm

Make sure you've got the following prerequisites before you install and use WebStorm with the IDE plug-in:

- **Operating system and browser** – Make sure the operating system version that you want to use with the WebStorm plug-in is supported.
For more information, see [Supported Operating Systems for SuiteCloud IDE Plug-in for WebStorm](#).
- **Java SE Development Kit** – The IDE plug-in requires [Oracle JDK version 17](#) or [Oracle JDK version 21](#).
- **64-bit requirements** – To run the 64-bit version of the WebStorm plug-in, make sure your operating system and Java versions are both 64-bit versions.
- **Two-factor authentication setup** – If you want to use an administrator role and any other role that requires 2FA for SDF development, install the SuiteCloud Development Integration bundle to your account.
For more information about using a role that needs 2FA for SDF development, see [SuiteCloud IDE Plug-in for WebStorm Account Setup](#).
- **SuiteCloud Development Framework (SDF) enabled** – Make sure SDF is enabled in your NetSuite account by checking the SDF box in Setup > Company > Enable Features, click the **SuiteCloud** subtab, and check the **SuiteCloud Development Framework** box on the **SuiteCloud Development Framework** section.
- **NetSuite account features** – An account administrator must enable the features in your account that SDF depends on.
For more information, see the help topic [Enabling SuiteCloud Development Framework in the Target NetSuite Account \(Administrator Only\)](#).
- **Account** – Your WebStorm plug-in version should match your NetSuite account version. You might run into compatibility issues if you use an older version of the WebStorm plug-in with the latest version of NetSuite.
- **OAuth 2.0 enabled** – Make sure OAuth 2.0 is enabled in your NetSuite account. To enable the OAuth 2.0 feature, go to Setup > Company > Enable Features, click the **SuiteCloud** subtab, and check the

OAuth 2.0 box on the **Manage Authentication** section. For more information, see the help topic [Enable the OAuth 2.0 Feature](#).

- **WebStorm** – The IDE plug-in needs WebStorm version 2025.2.x.

Supported Operating Systems for SuiteCloud IDE Plug-in for WebStorm

The IDE plug-in officially supports these operating systems:

- Windows
- Linux
- macOS

Specifically, the IDE plug-in was tested with these operating system and browser combinations:

- Windows 11 – Firefox and Chrome
- Linux Fedora – Firefox, Chrome
- macOS Sequoia – Firefox, Safari, and Chrome

Downloading WebStorm

For supported versions of WebStorm for the IDE plug-in, see [Installation Requirements for SuiteCloud IDE Plug-in for WebStorm](#).

1. Download WebStorm for your operating system from <https://www.jetbrains.com/webstorm/>.
2. Run the file you downloaded and follow the prompts to finish installing.

Next, add the **SuiteCloud IDE Update site**. For more information, see [Adding SuiteCloud IDE Plug-in to WebStorm](#).

Adding SuiteCloud IDE Plug-in to WebStorm

The WebStorm plug-in is installed to WebStorm as a custom plug-in. You need to download the IDE plug-in package from the SuiteCloud IDE update site. Here's what to do:

1. [Add the SuiteCloud IDE Plug-in for WebStorm Update Site](#).
2. [Update SuiteCloud IDE Plug-in for WebStorm](#).
3. [Verify the Installation of SuiteCloud IDE Plug-in for WebStorm](#).

Add the SuiteCloud IDE Plug-in for WebStorm Update Site

When you add the SuiteCloud IDE update site to WebStorm, you can download the latest version of the IDE plug-in that is compatible with your NetSuite account as a custom plug-in. When installed, you'll have access to the IDE plug-in and SDF options in WebStorm.

To add the update site in SuiteCloud IDE Plug-in for WebStorm:

1. Launch WebStorm.
2. Depending on your operation system, do one of the following:
 - If you're on Windows, press Ctrl+Alt+S. You can also select **File > Settings...**
 - If you're on macOS, press Cmd+,. You can also select **WebStorm > Preferences**.
3. Select **Plugins**, and click .
4. Select **Manage Plugin Repositories...**
5. In the **Custom Plugin Repositories** window, click **+** and enter one of the following links based on your preference:

The latest version of SuiteCloud IDE Plug-in for WebStorm is 2025.2 and is compatible with NetSuite 2025.2. To get it, use the following link:

- <https://system.netsuite.com/download/suitecloud-sdk/ideplugin/webstorm/25.2/updatePlugins.xml>

If you want to get the latest updates automatically, use:

- <https://system.netsuite.com/download/suitecloud-sdk/ideplugin/webstorm/latest/updatePlugins.xml>

If you want to use the previous version of the plug-in, use this link:

- Version 2025.1:
<https://system.netsuite.com/download/suitecloud-sdk/ideplugin/webstorm/25.1/updatePlugins.xml>



Important: Starting February 2025, SuiteCloud IDE Plug-in for WebStorm version 2024.1, which supports Token-Based Authentication (TBA) and OAuth 1.0, will no longer be available for new installations. If you're still using older versions of the tool, you should upgrade to the latest version as soon as possible. The latest version of SuiteCloud IDE Plug-in for WebStorm is version 2025.1, and this version uses the OAuth 2.0 protocol for authorization.

6. Click **OK**.
7. Click the **SuiteCloud IDE Plug-in** plug-in, and click **Install**.
8. Restart WebStorm.

Update SuiteCloud IDE Plug-in for WebStorm

If you already have the SuiteCloud IDE Plug-in installed, you can update it to the latest version right from WebStorm.

To update SuiteCloud IDE Plug-in for WebStorm:

1. Launch WebStorm.
2. Depending on your operation system, do one of the following:
 - If you're on Windows OS, press Ctrl+Alt+S. You can also select **File > Settings...**
 - If you're on macOS, press Cmd+,. You can also select **WebStorm > Preferences**.
3. Select **Plugins**.
4. Use the search bar to find the plug-in, or use the **Show** filter after clicking the three dots.
5. In the list, click **SuiteCloud IDE Plug-in**.
If there's an update available, you'll see the **Update** button.
6. Click **Update**, then restart WebStorm.


Verify the Installation of SuiteCloud IDE Plug-in for WebStorm

When you install SuiteCloud IDE plug-in for WeStorm, information about the SuiteCloud IDE version is added. You can check this information any time.

To verify the installation of SuiteCloud IDE plug-in for WebStorm:

1. Launch WebStorm.
2. Depending on your operation system, do one of the following:

- If you're on Windows OS, press Ctrl+Alt+S. You can also select **File > Settings...**
 - If you're on macOS, press Cmd+,. You can also select **WebStorm > Preferences.**
3. Select **Plugins.**
 4. In the list, click **SuiteCloud IDE for WebStorm.**
- You'll see the WebStorm plug-in version information.

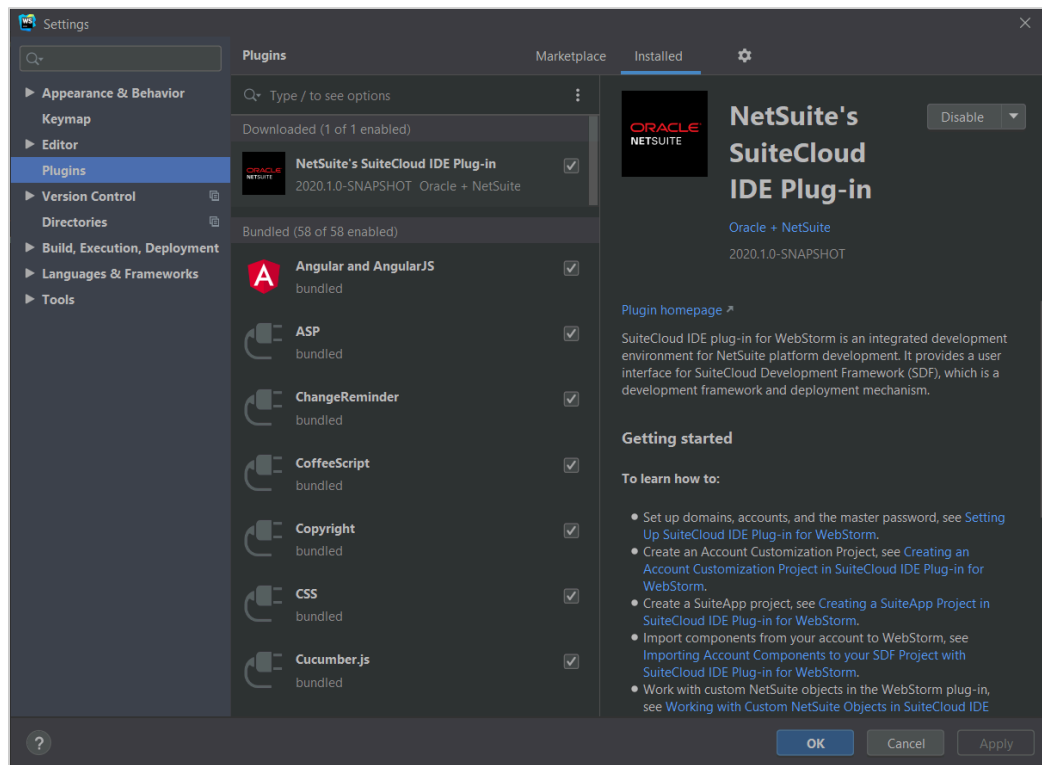

Set Up for SuiteCloud IDE Plug-in for WebStorm

After you install the WebStorm plug-in, follow these steps to finish your setup:

1. **Create or open a SuiteCloud project.** For more information, see [Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#) or [Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm](#).
2. **Connect to your accounts and roles.** For more information, see [Adding an Account in SuiteCloud IDE Plug-in for WebStorm](#).
3. **Note:** To set up a different SuiteScript development environment instead of the WebStorm plug-in, see the help topic [Working with IDEs Other Than SuiteCloud IDEs](#).

Setting Up SuiteCloud IDE Plug-in for WebStorm

To set up SuiteCloud IDE plug-in for WebStorm so you can create SuiteCloud projects, check out these topics:

- [SuiteCloud IDE Plug-in for WebStorm Account Setup](#)
- [Customizing SuiteCloud Project Configuration in SuiteCloud IDE plug-in for WebStorm](#)

Customizing SuiteCloud Project Configuration in SuiteCloud IDE plug-in for WebStorm

SuiteCloud IDE plug-in for WebStorm lets you customize the configuration for SuiteCloud projects. The settings you pick apply to all SuiteCloud projects you work on with in the IDE.


Note: You can have more than one SuiteCloud project open in a WebStorm window.

The following options are available:

- **Global Settings: Automatic Add Dependencies.** If your project is missing any dependencies, they're automatically added when you deploy the project.
- **Skip Warnings**
 - **Deploy to Production:** When deploying a project, skip the confirmation message for deploying to a production account.
 - **Overwrite Custom Objects in Project:** When you import SDF custom objects, skip the confirmation message to overwrite the selected SDF custom objects in your project with the matching ones from your account.
 - **Overwrite Files in Project:** When importing files, skip the confirmation message to overwrite the selected files in your project with the SuiteScript files from your account.

To customize your SuiteCloud project configuration:

1. Depending on your operation system, do one of the following in WebStorm:
 - If you're on Windows OS, select **File > Settings > Tools > NetSuite > Account Management**.
 - If you're on macOS, select **WebStorm > Preferences > Tools > NetSuite**.
2. Select the options you want to enable, then click **OK**.

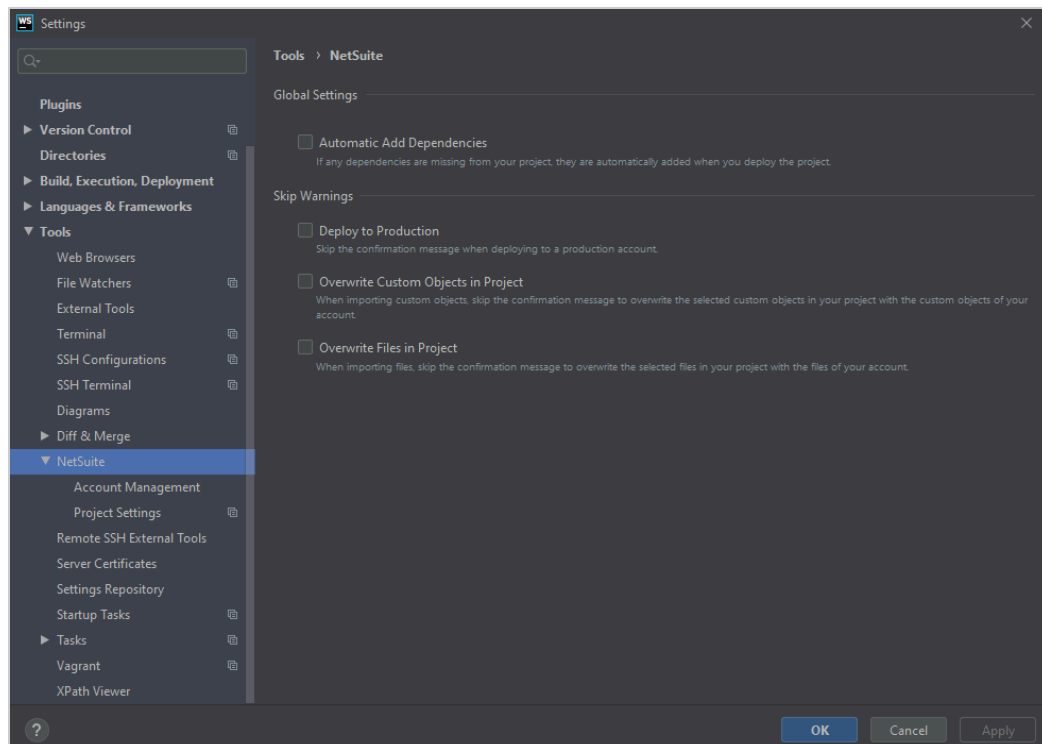

SuiteCloud IDE Plug-in for WebStorm Account Setup

You need to set up the NetSuite accounts you want to customize.

If you have set up domains in addition to the default NetSuite domains, you need to configure account-specific details for these additional domains you added.

To set up an account, see the following procedures:

- [Adding an Account in SuiteCloud IDE Plug-in for WebStorm](#)
- [Removing an Account in SuiteCloud IDE Plug-in for WebStorm](#)
- [Modifying an Account in SuiteCloud IDE Plug-in for WebStorm](#)

Adding an Account in SuiteCloud IDE Plug-in for WebStorm

Follow these steps to add an account. The WebStorm plug-in sends your account information to NetSuite during authentication.

For more information, see the help topic [OAuth 2.0 Authentication for SuiteCloud SDK](#).

To add an account:

1. Depending on your operation system, do one of the following in WebStorm:
 - If you're on Windows OS, select **File > Settings > Tools > NetSuite > Account Management**.
 - If you're on macOS, select **WebStorm > Preferences > Tools > NetSuite**.
2. Click **+**, then pick one of these options from the dropdown:
 - **Through browser-based authentication** – This opens a new window or tab in your default browser so you can authenticate your account-role combination.
 - **Through machine-to-machine authentication** – This opens a window so you can authenticate your account-role combination. Here's what you'll need:
 - **Account ID** – References the NetSuite account ID.
 - **Certificate ID** – References the certificate ID you get from NetSuite after uploading the public key file.
 - **Private key file** – References the local path to the private key file that matches the certificate in NetSuite. For example: `d:/path/private-key.pem`.



Important: To get the **certificate ID**, you need to generate an **RSA certificate**. The RSA certificate has two parts: the **public key** and the **private key**.

Upload the public key in the OAuth 2.0 Client Credentials Setup by choosing **SuiteCloud Development Integration** in the **Application** field and selecting the entity and role to map. This will generate a new row with the certificate ID value.

The private key path value is the location where the private key is saved.

For more information about how to generate the **RSA certificate**, see the help topic [Certificate Conditions](#).

For more information about how to upload the public key, follow the steps in [OAuth 2.0 Client Credentials Setup](#).

After you enter the machine-to-machine authentication details, click **Continue**.

3. After authenticating your role, it gets added to the accounts table.

Removing an Account in SuiteCloud IDE Plug-in for WebStorm

You can remove inactive or unused accounts you don't need anymore.

To remove an account:

1. Depending on your operation system, do one of the following in WebStorm:
 - If you're on Windows OS, select **File > Settings > Tools > NetSuite > Account Management**.
 - If you're on macOS, select **WebStorm > Preferences > Tools > NetSuite**.
2. In the accounts table, pick the account-role combination you want to remove and click **—**.
3. The account-role combination is removed from the accounts table.


Modifying an Account in SuiteCloud IDE Plug-in for WebStorm

You can modify the authentication ID from an account.

To modify an account:

1. Depending on your operation system, do one of the following in WebStorm:

- If you're on Windows OS, select **File > Settings > Tools > NetSuite > Account Management**.
 - If you're on macOS, select **WebStorm > Preferences > Tools > NetSuite**.
2. In the accounts table, pick the account-role combination you want to modify, and click .
 3. In the window that opens, modify the authentication ID you want to update and click **Save**.

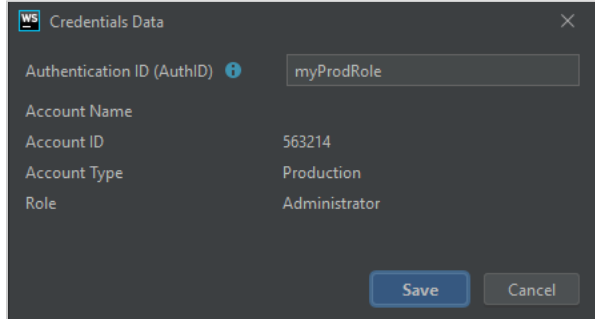

The image shows a 'Credentials Data' dialog box with a dark background. It has a title bar with a 'WS' icon and a close button. The dialog contains the following fields and values:

Field	Value
Authentication ID (AuthID) 	myProdRole
Account Name	
Account ID	563214
Account Type	Production
Role	Administrator

At the bottom right, there are two buttons: 'Save' (highlighted in blue) and 'Cancel'.

SuiteCloud IDE Plug-in for WebStorm Usage

Before you start working with the IDE plug-in, make sure you're familiar with the following:

- [SuiteCloud Development Framework](#)
- [SuiteCloud IDE Plug-in for WebStorm Overview](#)
- [Installing and Setting Up SuiteCloud IDE Plug-in for WebStorm](#)

Working with the IDE plug-in is split into these main areas:

- [Working with SuiteCloud Projects in SuiteCloud IDE Plug-in for WebStorm](#)
- [Working with SDF Custom Objects in SuiteCloud IDE Plug-in for WebStorm](#)
- [Working with SuiteScript Files in SuiteCloud IDE Plug-in for WebStorm](#)

Working with SuiteCloud Projects in SuiteCloud IDE Plug-in for WebStorm

- [Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#)
- [Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm](#)
- [Customizing SuiteCloud IDE Plug-in for WebStorm](#)

Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm

To customize your account, you can use SuiteCloud IDE Plug-in for WebStorm to create account customization projects.

After you create a project, you can set it up to connect the accounts you want to customize.

 **Note:** By default, all account customization projects created in SuiteCloud IDE plug-in for WebStorm work with SuiteScript 2.x.

For more information about account customization projects, see:

- [Account Customization Projects](#)
- [Differences Between SuiteCloud Projects](#)

To create an account customization project:

1. In WebStorm, select **File > New > Project....**
2. From the New Project dialog, select the project type: **Account Customization**.
3. Choose where you want to save your project or accept the default location.
4. Set the rest of the project properties. For more information, see the help topic [Properties of an Account Customization Project](#).
5. Click **Create**.

When the project is created, you can choose to open it in **This Window** or a **New Window**. If there's already a SuiteCloud project open, picking **This Window** closes it and opens your new one.

6. Add the domains and accounts you want to customize. For more information, see [Adding an Account in SuiteCloud IDE Plug-in for WebStorm](#).

To open an existing project, go to **File > Open**.

Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm

You can use SuiteCloud IDE Plug-in for WebStorm to create SuiteApp projects, which are meant for SuiteCloud Developer Network (SDN) members building SDF SuiteApps.

 **Note:** By default, all SuiteApp projects created in SuiteCloud IDE plug-in for WebStorm work with SuiteScript 2.x.

For more information about SuiteApp projects, see:

- [SuiteApp Projects](#)
- [Differences Between SuiteCloud Projects](#)

To create a SuiteApp project:

1. In WebStorm, select **File > New > Project....**
2. From the New Project dialog, select the project type: **SuiteApp**.
3. Choose where you want to save your project or accept the default location.
4. Set the rest of the project properties. For more information, see the help topic [Properties of a SuiteApp Project](#).
5. Click **Create**.
When the project is created, you can choose to open it in **This Window** or a **New Window**. If there's already a SuiteCloud project open, picking **This Window** closes it and opens your new one.
6. Add the domains and accounts you want to customize. For more information, see [Adding an Account in SuiteCloud IDE Plug-in for WebStorm](#).

To open an existing project, go to **File > Open**.

Customizing SuiteCloud IDE Plug-in for WebStorm

You can customize SuiteCloud IDE plug-in for WebStorm to fit your preferences:

- [Changing Where Projects Open in SuiteCloud IDE Plug-in for WebStorm](#)
- [Turning Off Code Completion in SuiteCloud IDE Plug-in for WebStorm](#)

For more information, visit [WebStorm Help](#).

Changing Where Projects Open in SuiteCloud IDE Plug-in for WebStorm

By default, the WebStorm plug-in asks if you want to open the project in the same window or a new one, but you can change this setting.

To always open projects in a new window:

1. In WebStorm, select **File > Settings...**
2. Select **Appearance & Behavior > System Settings**.
3. Under **Project**, select **Open project in new window** to always open projects in a separate window.

Turning Off Code Completion in SuiteCloud IDE Plug-in for WebStorm

Note: If you disable code completion, you can still get suggestions when pressing **Ctrl +Spacebar**. For information about SuiteScript code completion, see [Using SuiteScript Code Completion in SuiteCloud IDE Plug-in for WebStorm](#).

To turn off code completion:

1. In WebStorm, select **File > Settings...**
2. Select **Editor > General > Code Completion**.
3. Clear all the boxes, click **Apply**, and then **OK**.

Importing Account Components to your SuiteCloud Project with SuiteCloud IDE Plug-in for WebStorm

You can import SDF custom objects to account customization projects or SuiteApp projects. You can also use SDF to import SDF custom objects, files, and scripts from your account into an account customization project.

For more information, see the following topics:

- [Importing SDF custom objects into a SuiteCloud Project with SuiteCloud IDE Plug-in for WebStorm](#)
- [Importing Files and Scripts into an Account Customization Project with SuiteCloud IDE Plug-in for WebStorm](#)
- [Account Component Imports to SuiteCloud Projects](#)

Importing SDF custom objects into a SuiteCloud Project with SuiteCloud IDE Plug-in for WebStorm

1. From a SuiteCloud project in the WebStorm plug-in, right-click the **Objects** folder.
2. Select **NetSuite > Import Objects from Account**.
3. Select the account and role associated with your account, and click **Next**.
4. Select or enter the search criteria to find the SDF custom objects you want to import, then click **Search**.

SDF shows a list of SDF custom objects that match your search.

5. Select the SDF custom objects you want to import.

If you don't want to import the SuiteScript files referenced in the SDF custom objects, clear the **Include the SuiteScript files referenced in the custom objects** box under **Import Options**.

Note: This option is only available for account customization projects (ACP).

Import Custom Objects from Account

Select or enter search criteria to find the custom objects you want to import.

Search Criteria

Object Types: Select

Script Id Contains:

Search Reset

Search Results

Total Custom Objects Found: 2200

Object Type	Script Id	☒
☐ addressForm	custform_75_1013519_482	☐
☐ addressForm	custform_78_1013519_482	☐
☐ addressForm	custform_96_1013519_482	☐
☐ addressForm	custform_97_1013519_482	☐
☐ advancedpdftemplate	custtmpl_1013519_100	☐
☐ advancedpdftemplate	custtmpl_1013519_101	☐
☐ advancedpdftemplate	custtmpl_1013519_102	☐
☐ advancedpdftemplate	custtmpl_1013519_103	☐
☐ advancedpdftemplate	custtmpl_1013519_104	☐

Import Options

☒ Include the SuiteScript files referenced in the custom objects.

< Back Next > Finish Cancel

6. Click **Finish**.

SDF imports the SDF custom objects from your account and puts them in the Objects folder of the SuiteCloud project. If any referenced SuiteScript files are imported, they're placed in the SuiteScripts folder.

Importing Files and Scripts into an Account Customization Project with SuiteCloud IDE Plug-in for WebStorm

If your account has the Web Site Hosting Files folder, you need to meet these prerequisites to see it in the IDE plug-in:

- The **Host HTML Files** feature enabled.
 - The **Website (External) publisher** permission.
1. In an account customization project, right-click the **FileCabinet** folder.
 2. Select **NetSuite > Import Files from Account**.

3. Select the account and role associated with your account, and then click **Get Files**.
4. Select the files or folders that you want to import, then click **OK**.

Note: You might be prompted to overwrite any files that already exist in the project.

SDF imports the files from your account and puts them in subfolders of the FileCabinet folder in your account customization project. For a list of subdirectories, see the [File Cabinet Files](#) section in [SuiteCloud Project Structure and File Components](#).


Using Multiple Accounts with Run/Debug Configurations in SuiteCloud IDE Plug-in for WebStorm

You can create run/debug configurations to work with multiple accounts in SuiteCloud projects. A run/debug configuration lets you link SDF actions to a project and a specific authentication ID. This way, you'll be more efficient when working with several accounts and SuiteCloud projects.

To use multiple accounts with run/debug configurations:

1. In WebStorm, go to **Run > Edit Configurations...**, then click **+** and select **SuiteCloud**.

The following window is displayed:

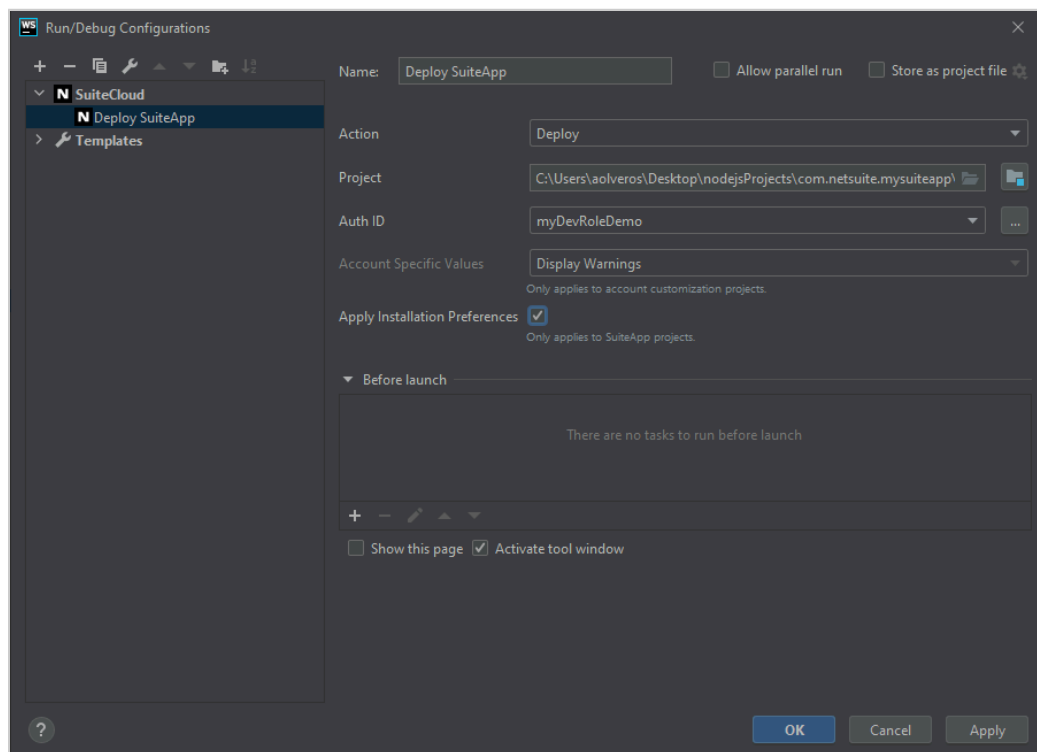

2. From the **Action** dropdown, select the SDF action you want this configuration to use.
3. In the **Project** field, pick the project for this configuration. You can:
 - to pick a SuiteCloud project that is already open.
 - to pick a SuiteCloud project from anywhere on your machine.
4. From the **Auth ID** dropdown, select an authentication ID for this configuration.

 **Tip:** Click  to open the **Account Management** window and add an account to your machine.

5. Depending on your SuiteCloud project type, set one of the following options.
 - For account customization projects — From the **Account Specific Values** dropdown, choose whether to stop the process if the project has account-specific values.
 - For SuiteApp projects — Check the **Apply Installation Preferences** box to use the settings from the InstallationPreferences folder.
6. In the **Before launch** section, decide if you want to run any tools or scripts prior to launching the run/debug configuration.


Creating Compound Run/Debug SuiteCloud Configurations in SuiteCloud IDE Plug-in for WebStorm

A compound run configuration lets you launch several run/debug configurations at a time. This can save you time if you need to deploy several SuiteCloud projects at the same time or run different actions to a specific SuiteCloud project.

 **Note:** To include different SuiteCloud projects in the same compound configuration, they need to be in the same active window.

To create compound run/debug SuiteCloud configurations:


1. In WebStorm, go to **Run > Edit Configurations...**, then click **+** and select **Compound**.
The following window is displayed:

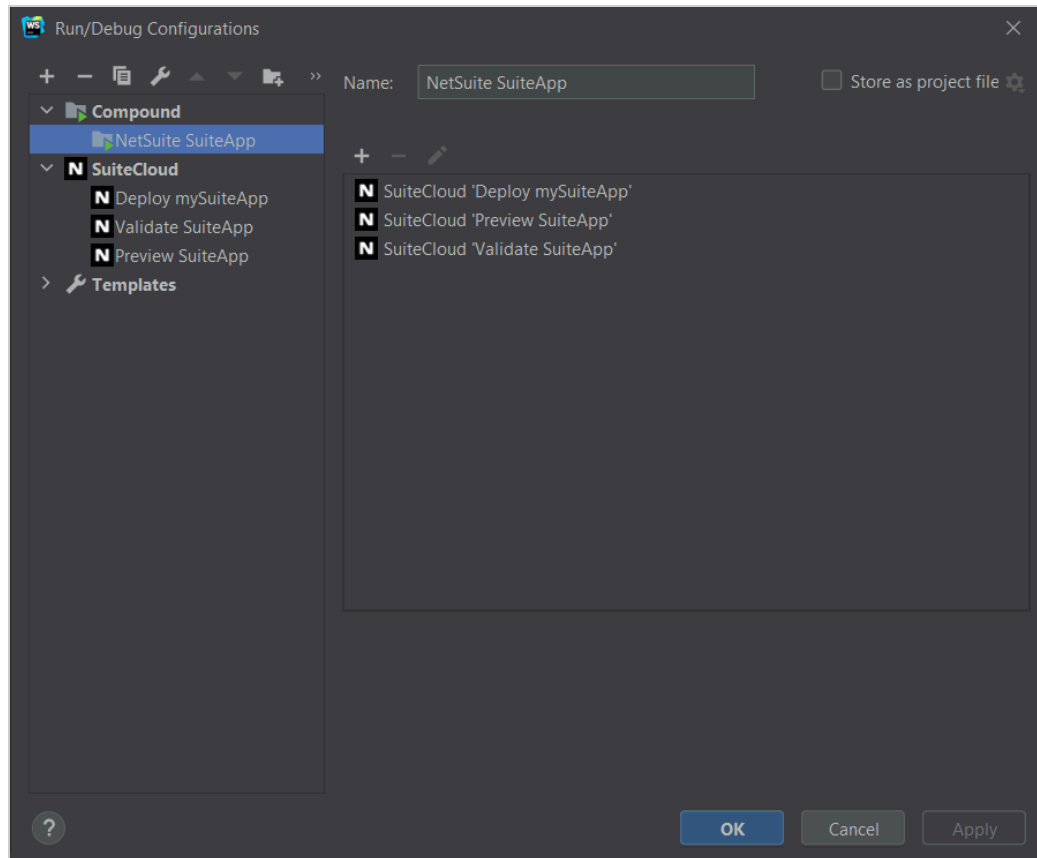

2. In the **Name** field, enter a name for the compound configuration.
3. Click **+** and select a run/debug configuration to add to the compound.

Note: You need to have set up the run/debug configurations beforehand.

4. Click **Apply**, then **OK**.
5. When you've set a compound configuration, click the  icon in WebStorm to run it.

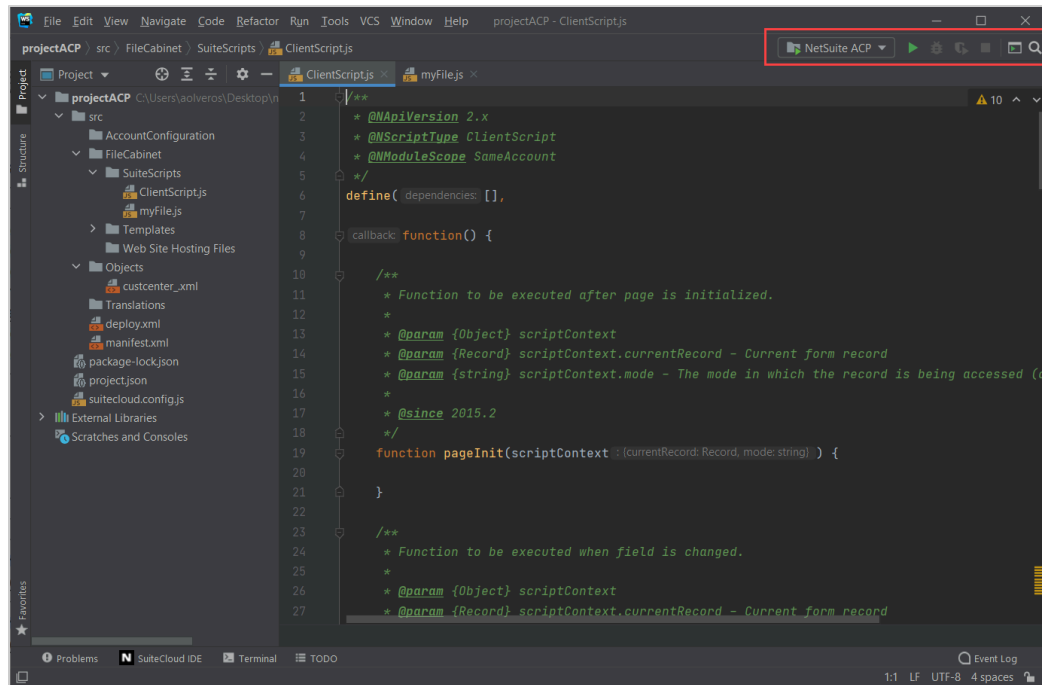

Working with SDF Custom Objects in SuiteCloud IDE Plug-in for WebStorm

SDF custom objects are created when XML representations in a SuiteCloud project get deployed to your NetSuite account.

You can customize SDF custom objects by downloading XML definitions of those objects from your account, importing them, or creating new representations. The XML files get converted into SDF custom objects when you deploy them to your NetSuite account.

For more information, check out these topics to learn more about working with SDF custom objects using SDF:

- [Downloading the XML Definition of an Object from a NetSuite Account](#)
- [Creating an XML Definition for an SDF Custom Object in SuiteCloud IDE Plug-in for WebStorm](#)
- [Comparing an SDF Custom Object with an Object from the Account in SuiteCloud IDE Plug-in for WebStorm](#)
- [Comparing a SuiteCloud Project File with its Equivalent Account Version in SuiteCloud IDE Plug-in for WebStorm](#)

Creating an XML Definition for an SDF Custom Object in SuiteCloud IDE Plug-in for WebStorm

You create SDF custom objects by creating XML definitions of those objects. The XML files get converted into SDF custom objects when you deploy them to your NetSuite account.


SDF custom objects have to be stored in the Objects folder. By default, your deploy file is set up to deploy all SDF custom objects in that folder. For more information, see the help topic [SuiteCloud Project Deployment Preparation](#).

To see how an XML definition in a SuiteCloud project is structured and which XML tags you can use in nested elements, check out these topics:

- [SDF Custom Object File Structure](#)
- [Syntax Guidelines and Reference Formats for SDF Custom Objects](#)
- [Customizations Supported by SuiteCloud Development Framework](#)
- [SuiteCloud Development Framework XML Reference](#)


To create an SDF custom object:

1. In WebStorm, open your SuiteCloud project.
2. Right-click the **Objects** folder and choose **New > Custom Object**.
3. In the New Custom Object dialog, do the following:
 - From the **Object Type** dropdown, pick the type of SDF custom object you want to create.
 - In the **Script ID** field, enter an ID for the SDF custom object.

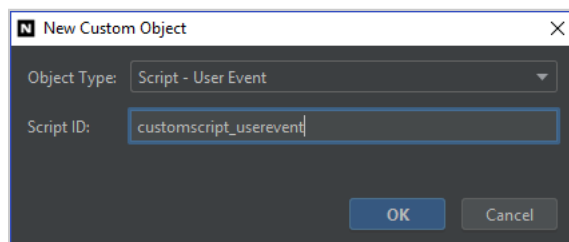

4. Click **OK**.

The SDF custom object is created based on the template for that object.

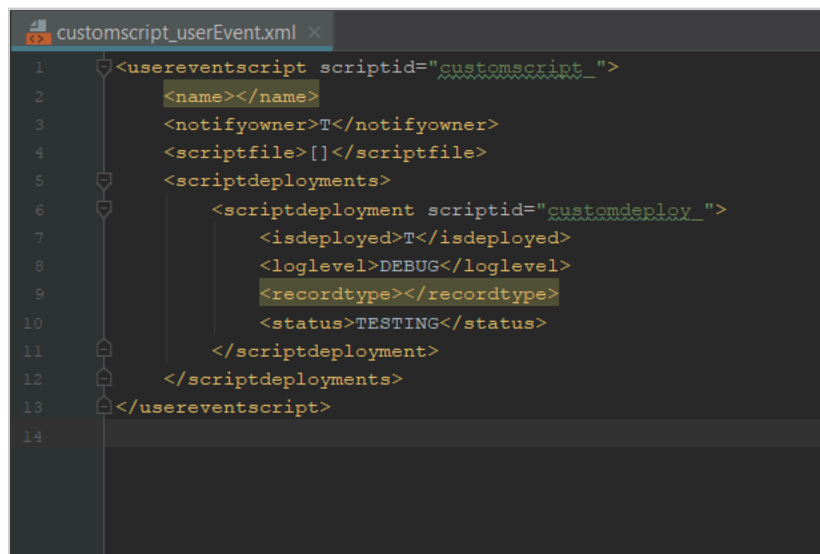

Overwriting SDF Custom Objects with their Matching Objects Imported from the Account in SuiteCloud IDE Plug-in for WebStorm

You can overwrite your project's SDF custom objects with matching objects imported from your File Cabinet. Overwriting only works for SDF custom objects that have the same script ID and object type as the ones in your NetSuite account. For custom records, you can also overwrite the object along with its instances.

To overwrite SDF custom objects with objects from the account:

1. Open WebStorm and create or select your SuiteCloud project.
2. Choose how you want to overwrite your SDF custom objects.
 - To overwrite specific SDF custom objects, expand the **Objects** folder, right-click each object and click **NetSuite > Update with Account Object**.



Tip: For custom records, when asked **Do you want to include all custom record instances?**, click **Yes** to overwrite the SDF custom object and all its instances.

- To overwrite all SDF custom objects, right-click the **Objects** folder and click **NetSuite > Update All Objects with Account Objects**.
3. If prompted, select the account and role you want to use, then click **OK**.
 4. Click **OK** to confirm you want to update.

SDF connects to your NetSuite account and imports objects that share the same script ID as the SDF custom objects selected in your SuiteCloud project. The selected SDF custom objects from your project are then overwritten by their matching objects imported from your File Cabinet.

Comparing an SDF Custom Object with an Object from the Account in SuiteCloud IDE Plug-in for WebStorm

You can compare the XML definition of an SDF custom object with the XML version of an account object. You can only compare objects if they have the same script ID and are the same object type.

To compare an SDF custom object with an object from the account:

1. In WebStorm, open your SuiteCloud project and expand the **Objects** folder.
2. Right-click the object file and choose **NetSuite > Compare with Account Object**.
The side-by-side comparison window appears if an object with the same script ID exists in your NetSuite account, and the differences between the two objects are highlighted.

Working with SuiteScript Files in SuiteCloud IDE Plug-in for WebStorm

For more information, see the following topics for information about working with SuiteScript files:

- [Creating a SuiteScript File in SuiteCloud IDE Plug-in for WebStorm](#)
- [Uploading Files or Folders to Your Account with SuiteCloud IDE Plug-in for WebStorm](#)

Creating a SuiteScript File in SuiteCloud IDE Plug-in for WebStorm


You can create SuiteScript files in the IDE plug-in for WebStorm, and the right file type template is added automatically. If you add SuiteScript modules when creating the file, you can use code completion for those modules.

To create a SuiteScript file:


1. In WebStorm, open your SuiteCloud project.
2. Right-click the **SuiteScripts** folder and choose **New > SuiteScript File**.
If you're in a SuiteApp project, right-click the **SuiteApps/<Application ID>** folder.

Note: For more information about the Application ID, see the help topic [SuiteApp Application ID](#).

3. In the New SuiteScript File dialog, do the following:
 - From the **Type** dropdown, pick the type of SuiteScript file you want to create.
 - In the **Name** field, enter a name for your SuiteScript file.
 - In the **Dependencies** area, check the SuiteScript modules you want to include in your SuiteScript file.

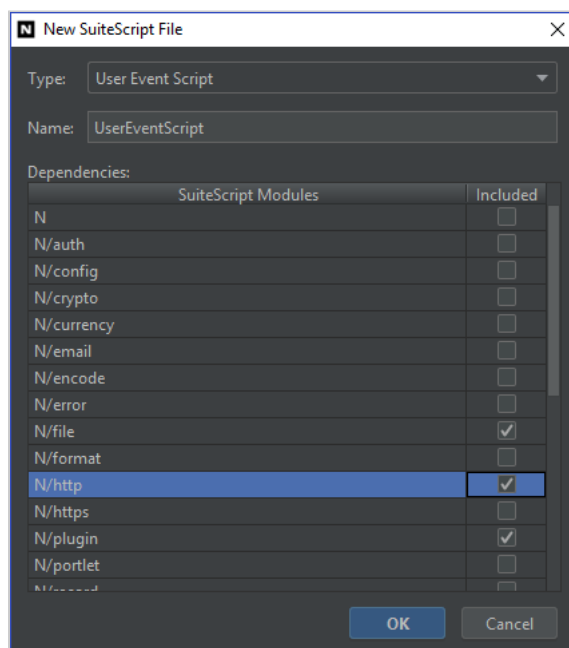

4. Click **OK**.
The SuiteScript file is created using the template for that file type.

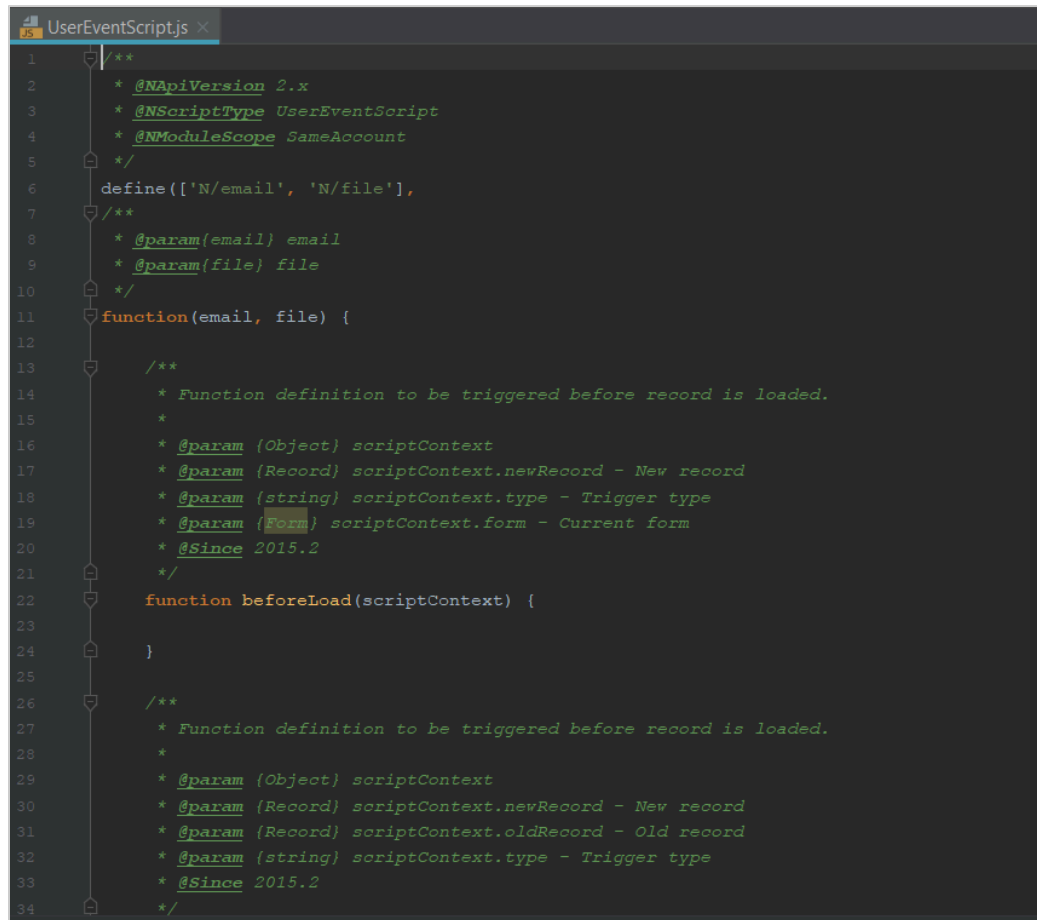

```

1  /**
2   * @NApiVersion 2.x
3   * @NScriptType UserEventScript
4   * @NModuleScope SameAccount
5   */
6  define(['N/email', 'N/file'],
7  /**
8   * @param(email) email
9   * @param(file) file
10  */
11  function(email, file) {
12
13      /**
14       * Function definition to be triggered before record is loaded.
15       *
16       * @param (Object) scriptContext
17       * @param (Record) scriptContext.newRecord - New record
18       * @param (string) scriptContext.type - Trigger type
19       * @param (Form) scriptContext.form - Current form
20       * @Since 2015.2
21       */
22      function beforeLoad(scriptContext) {
23
24      }
25
26      /**
27       * Function definition to be triggered before record is loaded.
28       *
29       * @param (Object) scriptContext
30       * @param (Record) scriptContext.newRecord - New record
31       * @param (Record) scriptContext.oldRecord - Old record
32       * @param (string) scriptContext.type - Trigger type
33       * @Since 2015.2
34       */

```

Comparing a SuiteCloud Project File with its Equivalent Account Version in SuiteCloud IDE Plug-in for WebStorm

You can compare a file in your project's FileCabinet folder with the matching version in your account. You can only compare files if they have the same script ID and file type.


To compare a SuiteCloud Project File with its equivalent account version:

1. In your SuiteCloud project in the WebStorm plug-in, expand the **FileCabinet** folder or one of its subfolders.
2. Right-click a file and choose **NetSuite > Compare with Account File**.

The side-by-side comparison window appears if a file with the same script ID exists in your NetSuite account, and the differences between the two files are highlighted.

Example

Here's what the side-by-side comparison window looks like for a custom client script file that exists in both the SuiteCloud project and the NetSuite account:

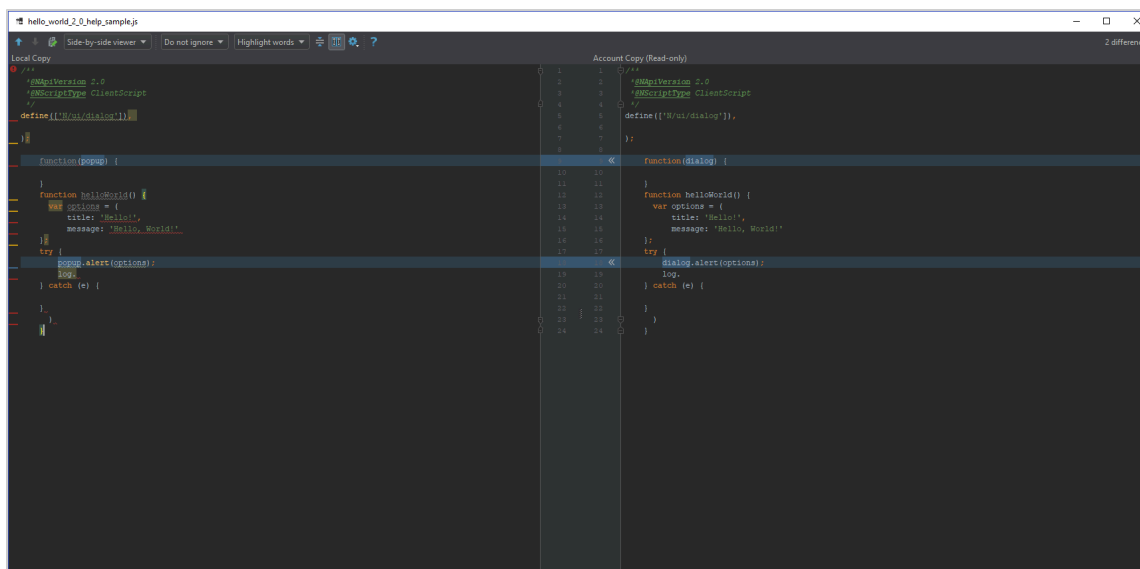

Uploading Files or Folders to Your Account with SuiteCloud IDE Plug-in for WebStorm

You can upload files or folders to your account's File Cabinet without having to deploy the whole project. The files or folders need to be in a FileCabinet folder supported by SDF. Depending on your SuiteCloud project type, these folders are supported:

- SuiteScripts
- SuiteApps/<Application ID>

Note: For more information about the Application ID, see the help topic [SuiteApp Application ID](#).

- Templates
- Web Site Hosting Files

To upload a file or folder from your SuiteCloud project to your account with SuiteCloud IDE plug-in for WebStorm, go to your **FileCabinet** folder.

Next, do one of the following:

- Right-click a file and select **NetSuite > Upload File to Account**.
For multiple files, select **NetSuite > Upload Files to Account**.
- Right-click a folder and select **NetSuite > Upload Folder to Account**.
For multiple folders, select **NetSuite > Upload Folders to Account**.

If a file or folder with the same FileCabinet location and name already exists in your account, it gets overwritten by the SDF file upload.

If the folder containing the file didn't exist in the account, SDF creates it during the upload process.

Adding Dependencies to the Manifest in SuiteCloud IDE Plug-in for WebStorm

You can define dependencies on existing objects, files, and scripts from your NetSuite accounts in an account customization project (ACP). You can also define dependencies on objects in a SuiteApp that are outside your SuiteCloud project, as long they're supported by SDF. For more information, see the following topics:

- [Manually Defining SDF Custom Object Dependencies in a SuiteApp Using the SuiteCloud Project Manifest](#)
- [Defining Dependencies on SDF Custom Objects in a SuiteApp and Bundle Objects with SuiteCloud IDE Plug-in for WebStorm](#)
- [Defining Account Component Dependencies from an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#)
- [Defining Feature Dependencies in SuiteCloud IDE Plug-in for WebStorm](#)

Defining Dependencies on SDF Custom Objects in a SuiteApp and Bundle Objects with SuiteCloud IDE Plug-in for WebStorm

Referencing a SuiteBundle from Your SuiteApp Project



Note: SuiteBundler is still supported, but it won't be updated with any new features.

To take advantage of new features for packaging and distributing customizations, you can use the Copy to Account and SuiteCloud Development (SDF) features instead of SuiteBundler.

Copy to Account is an administrator tool that you can use to copy SDF custom objects between your accounts. The tool can copy one SDF custom object at a time, including dependencies and data. For more information, see the help topic [Copy to Account](#).

SuiteCloud Development Framework is a development framework that you can use to create SuiteApps from an integrated development environment (IDE) on your local computer. For more information, see the help topic [SuiteCloud Development Framework](#).

You can define dependencies on SDF custom objects in a SuiteApp that are outside your SuiteCloud project if they're supported by SDF. For more information about object dependencies, see:

- [SDF Custom Object Dependencies in SuiteApps](#)
- [Specifying a Reference to an SDF Custom Object in Another SuiteApp](#)
- [Specifying a Bundle Object Reference](#)

If your project doesn't have any references to the object dependency, you must define the dependency manually. For more information, see the help topic [Manually Defining SDF Custom Object Dependencies in a SuiteApp Using the SuiteCloud Project Manifest](#).

For examples of a project manifest with dependencies for an SDF custom object in a SuiteApp, see [Example 1](#) and [Example 2](#).

To add dependencies for an SDF custom object in a SuiteApp to the project manifest:

1. In the **Project** window in WebStorm, right-click the SuiteCloud project.
2. Select **NetSuite > Add Dependency References to Manifest**.
SDF checks the SDF custom objects in a SuiteApp that are referenced in the SuiteCloud project and adds any new dependencies to the manifest.xml file.

Example 1

Here's an example of a SuiteApp project manifest that references an SDF custom object called customrecord_sample that is not part of the project. During a server-side validation against a NetSuite account, SDF logs any referenced SDF custom object that's missing from the account.

```

1 <manifest projecttype="SUITEAPP">
2   <publisherid>com.example</publisherid>
3   <projectid>mysuiteapp</projectid>
4   <projectname>SDFSAMPLE</projectname>
5   <projectversion>1.0.0</projectversion>
6   <frameworkversion>2.0</frameworkversion>
7   <dependencies>
8     <applications>
9       <application id="com.example.mysuiteapp">
10        <objects>
11          <object>customrecord_sample</object>
12        </objects>
13      </application>
14    </applications>
15  </dependencies>
16 </manifest>

```

Example 2

Here's another example of a SuiteApp project manifest that uses references to depend on these SDF custom objects:

- customrecord_sample object from com.samples.mysuiteapp
- customrecord_sample2 object from bundle 351
- customrecord_sample3 object, which might be found in a few bundles due to a bundle copying or deprecation

```

1 <manifest projecttype="SUITEAPP">
2   <publisherid>com.example</publisherid>
3   <projectid>mysuiteapp</projectid>
4   <projectname>SDFSAMPLE</projectname>
5   <projectversion>1.0.0</projectversion>
6   <frameworkversion>2.0</frameworkversion>
7   <dependencies>
8     <applications>
9       <application id="com.example.mysuiteapp">
10        <objects>
11          <object>customrecord_sample</object>
12        </objects>
13      </application>
14    <bundles>
15      <bundle id="351">
16        <object>customrecord_sample2</object>
17      </bundle>
18      <bundle id="451|452|453">
19        <object>customrecord_sample3</object>
20      </bundle>
21    </bundles>

```

```

22     </applications>
23   </dependencies>
24 </manifest>

```

Defining Account Component Dependencies from an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm

You can define dependencies on existing objects, files, and scripts from your NetSuite accounts in an account customization project. For more information, see:

- [Account Component Dependencies in SuiteCloud Projects](#)
- [Specifying an SDF Custom Object Reference](#)

If your project doesn't have any references to the dependency, you must define it manually. For more information, see the help topic [Manually Defining Account Component Dependencies in the Account Customization Project Manifest](#).

For an example of a project manifest with dependencies for an SDF custom object in a SuiteApp, see [Example](#).

To automatically define account component dependencies:

1. In the **Project** window in WebStorm, right-click the SuiteCloud project.
2. Select **NetSuite > Add Dependency References to Manifest**.

SDF checks the objects, files, and scripts that are referenced in your account but outside of the SuiteCloud project, and adds any new dependencies to the `manifest.xml` file.



Note: This option doesn't remove dependencies that are not referenced by any objects.

Example

Here's an example of an account customization project manifest that references objects and files that aren't part of the project, like `customrecord_sample`, `customworkflow_sample`, `customlist`, and `ext_UserScript.js`. During a server-side validation against a NetSuite account, SDF logs any referenced object or file that is missing from the account.

```

1 <manifest projecttype="ACCOUNTCUSTOMIZATION">
2   <projectname>SDFTutorial</projectname>
3   <frameworkversion>1.0</frameworkversion>
4   <dependencies>
5     <features>
6       <feature required="true">CUSTOMRECORDS</feature>
7       <feature required="true">SERVERSIDESCRIPING</feature>
8     </features>
9     <objects>
10      <object>customrecord_sample</object>
11      <object>customworkflow_sample</object>
12      <object>customworkflow_sample.workflowstate_a</object>
13      <object>customlist_sample.red</object>
14      <object>customlist_sample.green</object>
15      <object>customlist_sample.blue</object>
16    </objects>
17    <files>
18      <file>/SuiteScript/reference/ext_UserScript.js</file>
19    </files>
20  </dependencies>
21 </manifest>

```

Defining Feature Dependencies in SuiteCloud IDE Plug-in for WebStorm

When you use SDF with NetSuite features like SuiteScript or custom records, you must define the dependencies in the SuiteCloud project.

For more information, see the help topic [Feature Dependencies for SDF Custom Objects in SuiteCloud Projects](#).

For an example of a project manifest with dependencies for an SDF custom object in a SuiteApp, see [Example](#).

To automatically reference dependencies in the SuiteCloud project manifest:

1. In the **Project** window in WebStorm, right-click the SuiteCloud project.
2. Select **NetSuite > Add Dependency References to Manifest**.

SDF checks the NetSuite feature requirements in your project and adds any new dependency references to the `manifest.xml` file.

 **Note:** This option doesn't remove dependencies that are not referenced by any objects.

3. Review the new dependency references in the manifest. If you want, change the **required** attribute.

Example

Here's an example of a project manifest that references dependencies on the server-side SuiteScript and custom record features. The references let you use those features in the project.

```

1 <manifest projecttype="ACCOUNTCUSTOMIZATION">
2   <projectname>SDFTutorial</projectname>
3   <frameworkversion>1.0</frameworkversion>
4   <dependencies>
5     <features>
6       <feature required="true">CUSTOMRECORDS</feature>
7       <feature required="true">SERVERSIDESCRIPING</feature>
8     </features>
9   </dependencies>
10 </manifest>

```

Changing Project Settings in SuiteCloud IDE Plug-in for WebStorm

You can set default configurations for a project. By doing so, this setup is applied every time you validate, deploy, or perform other actions on your project.

To change project settings:

1. In WebStorm, select **File > Settings > Tools > NetSuite > Project Settings**.
2. From the list, pick the project you want to configure.
3. From the **Default account** dropdown, select an account-role combination you want to set as default.

4. Depending on your SuiteCloud project type, do one of the following:


- For SuiteApps, check the **Apply Installation Preferences** box, if you want installation preferences applied in your SuiteApp.

Note: For more information about installation preferences for SuiteApp projects, see the help topic [Applying Installation Preferences During SuiteCloud Project Validation and Deployment](#).

- For account customization projects, pick an option from the **Action on account-specific values** dropdown.

By default, if an account customization project has account-specific values, deployment stops. But you can set up WebStorm to show warnings and keep going with deployment.

Note: For more information about account-specific values, see the help topic [Account-Specific Values Validation in SuiteCloud Projects](#).

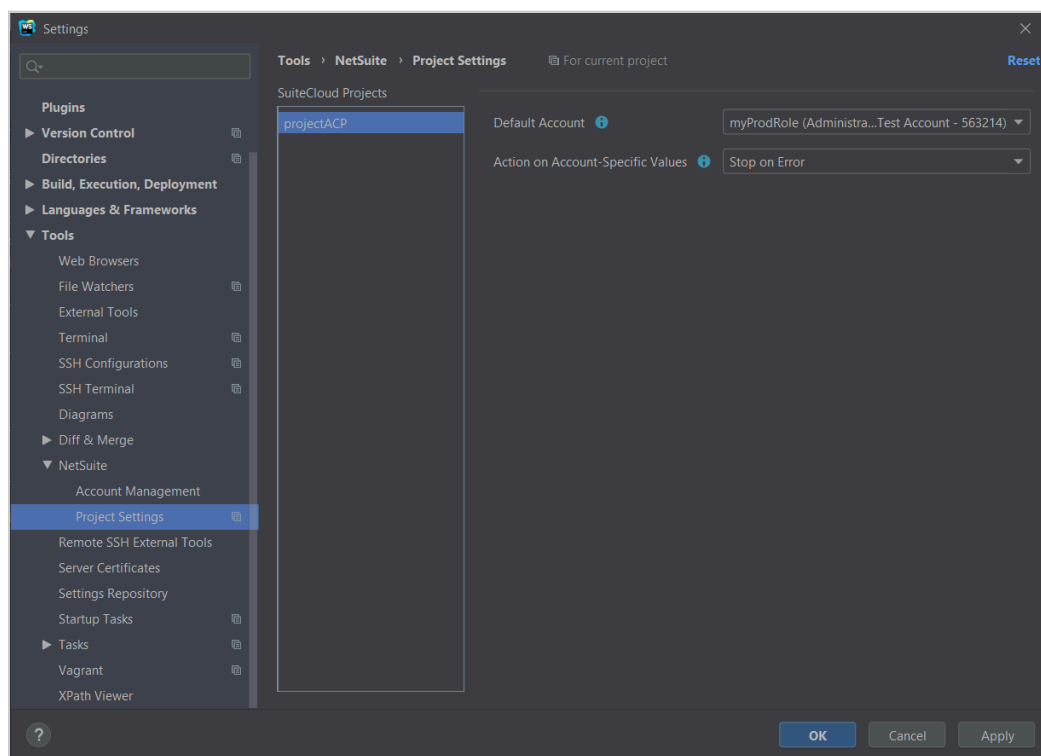

5. Click **OK**.

Setting Installation Preferences in SuiteCloud IDE Plug-in for WebStorm

To define installation preferences, you can create new preference files in the `InstallationPreferences` folder of your SuiteApp project. There are three types of preferences files: locking, hiding, and overwriting.

For more information, see the following topics:

- [Installation Preferences in the SuiteApp of SuiteCloud Project](#)

- [Creating an Installation Preference File with SuiteCloud IDE Plug-in for WebStorm](#)
- [Locking SDF Custom Objects in the SuiteApp Type of SuiteCloud Project](#)
- [Hiding Files in the SuiteApp Type of SuiteCloud Project](#)
- [Locking Files in the SuiteApp Type of SuiteCloud Project](#)
- [Overwrite Settings for SuiteApp Projects](#)
- [Default Installation Preferences](#)
- [Applying Installation Preferences During SuiteCloud Project Validation and Deployment](#)

Creating an Installation Preference File with SuiteCloud IDE Plug-in for WebStorm

To create an installation preference file:

1. Open a SuiteApp project in WebStorm.
2. Right-click the **InstallationPreferences** folder and choose either **New > Overwriting File**, **New > Locking File**, or **New > Hiding File**.

The file is created inside of the InstallationPreferences folder.

For more information, see the following topics:

- [Installation Preference File Structure in SuiteCloud Projects](#)
- [Locking SDF Custom Objects in the SuiteApp Type of SuiteCloud Project](#)
- [Hiding Files in the SuiteApp Type of SuiteCloud Project](#)
- [Locking Files in the SuiteApp Type of SuiteCloud Project](#)
- [Overwrite Settings for SuiteApp Projects](#)

Managing SuiteCloud Projects as Compressed Files in SuiteCloud IDE Plug-in for WebStorm

SDF lets you to save SuiteCloud projects as zip files. You can use these zip files to back up your projects or create new SuiteCloud projects. WebStorm configuration files are excluded from SuiteCloud project zip files.

 **Note:** You should use your own revision control system to provide your development team with versioning, change management, and team collaboration.

To save a SuiteCloud project as a zip file:

1. Open WebStorm, and create or select your SuiteCloud project.
For more information, see [Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#) or [Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm](#).
2. Right-click the project root and select **NetSuite > Generate Project ZIP**. The project gets packed without validation. If you're zipping for publishing (see the help topic [Creating a SuiteApp Version](#) for more details), make sure the project is validated.

 **Note:** The project zip is saved inside of the Build folder in your project folder.

To extract the contents of a SuiteCloud project zip file:

1. Create a SuiteCloud project.
For more information, see [Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#) or [Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm](#).
2. Open the project ZIP file you created using the IDE plug-in for WebStorm.
3. Extract the contents of the ZIP file into the `src` folder of the project you created.


Using SuiteScript Code Completion in SuiteCloud IDE Plug-in for WebStorm

Code completion works by checking the source code around the cursor in the editor. Depending on where the caret is, a popup shows SuiteScript (and JavaScript) text options you can insert at the cursor.

When you create a new SuiteCloud project, both 1.0 and 2.x versions of SuiteScript APIs are added as external libraries to your project. The IDE plug-in reads the SuiteScript 1.0 and 2.x **External Libraries** to help check SuiteScript syntax and assist with entering functions, methods, SDF custom objects, and references.

For SuiteScript 1.0, code completion works natively. For SuiteScript 2.x, when you create a SuiteScript file and add SuiteScript modules, code completion is available for those modules through JSDoc annotation tags. If you don't add any SuiteScript modules when you create the file, code completion isn't available automatically. And if you add more SuiteScript modules after the file's been created, code completion won't work for those either.


Note: Code completion of parameters, like record types, isn't supported.

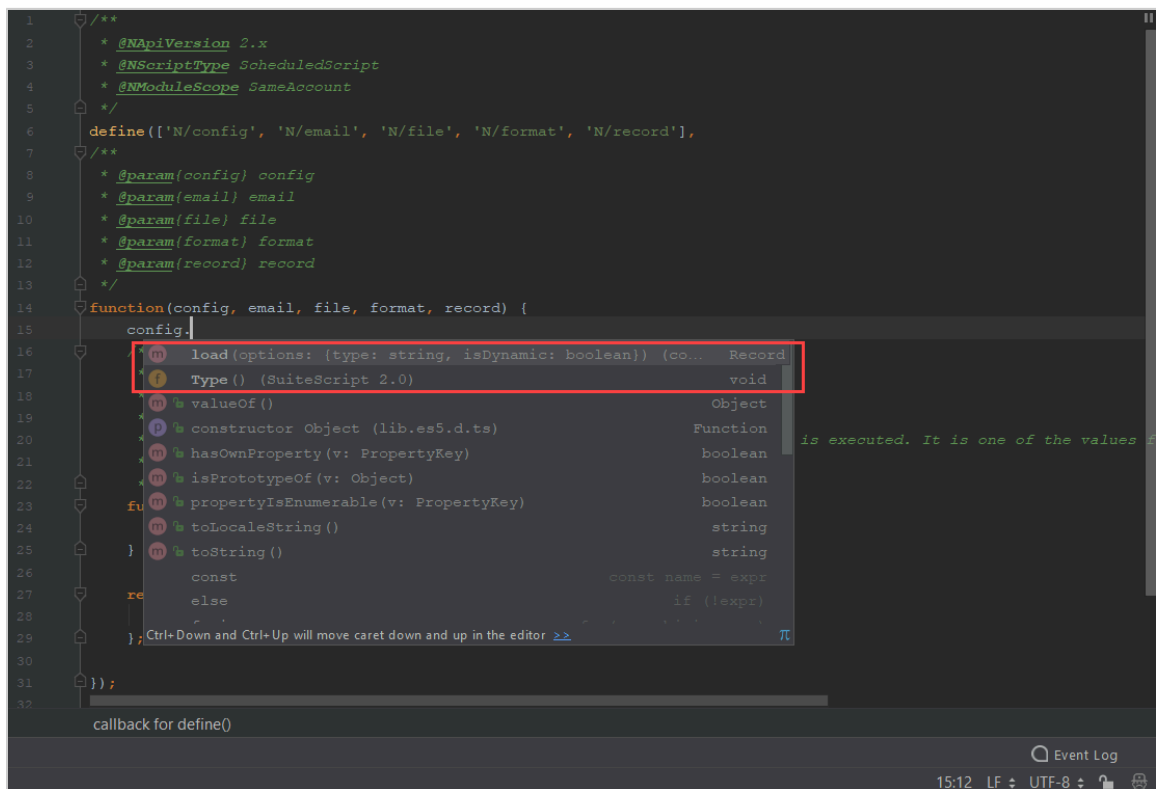

If you want code completion for modules you add after creating a SuiteScript file, you need to add JSDoc annotation tags manually and include the module names in the file.

To enable code completion for SuiteScript 2.x:

1. In the **define** function of your SuiteScript file, add a dependency such as ['N/config'].

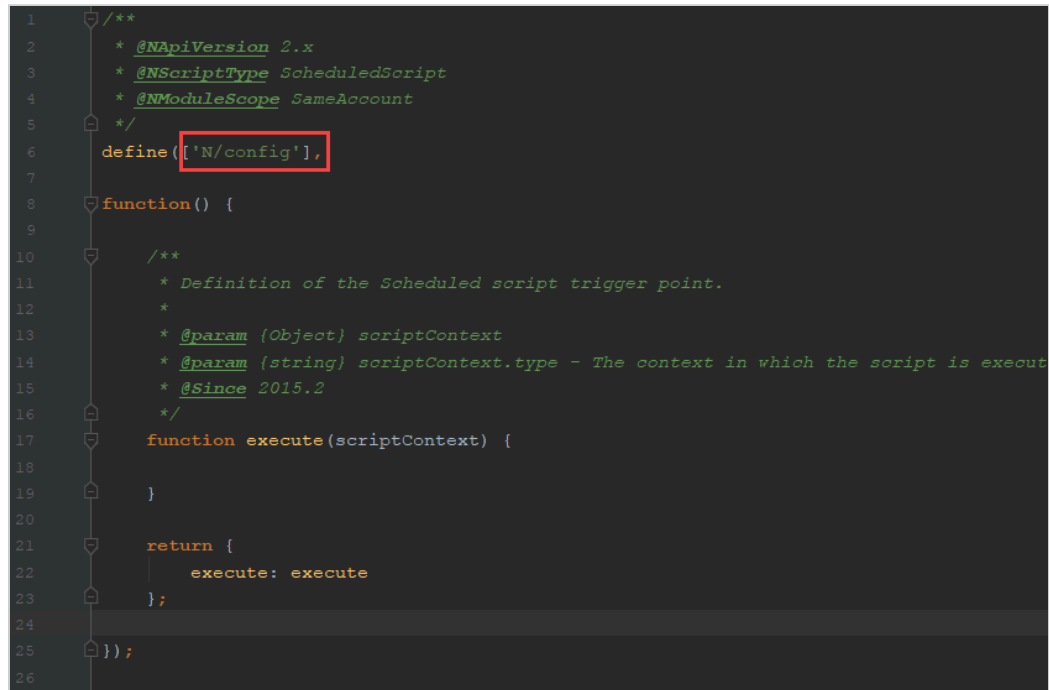

```

1  /**
2   * @NApiVersion 2.x
3   * @NScriptType ScheduledScript
4   * @NModuleScope SameAccount
5   */
6  define(['N/config'],
7
8  function() {
9
10     /**
11      * Definition of the Scheduled script trigger point.
12      *
13      * @param (Object) scriptContext
14      * @param (string) scriptContext.type - The context in which the script is executed
15      * @Since 2015.2
16      */
17     function execute(scriptContext) {
18
19     }
20
21     return {
22         execute: execute
23     };
24
25 });
26

```

Note: To ensure you use the right name of the modules, see the help topic [SuiteScript 2.x Modules](#).

2. In the **define** function, add the module name as a JSDoc annotation tag. Use the same module name as before, but without the N/ prefix.

```

1  /**
2   * @NApiVersion 2.x
3   * @NScriptType ScheduledScript
4   * @NModuleScope SameAccount
5   */
6   define(['N/config'],
7   /**
8    * @param(config) config
9    */
10  function() {
11
12      /**
13       * Definition of the Scheduled script trigger point.
14       *
15       * @param (Object) scriptContext
16       * @param (string) scriptContext.type - The context in which the script is executed
17       * @Since 2015.2
18       */
19      function execute(scriptContext) {
20
21      }
22
23      return {
24          execute: execute
25      };
26

```

3. In the **function** argument, add the module name without the N/ prefix.

```

1  /**
2   * @NApiVersion 2.x
3   * @NScriptType ScheduledScript
4   * @NModuleScope SameAccount
5   */
6   define(['N/config'],
7   /**
8    * @param(config) config
9    */
10  function(config) {
11
12      /**
13       * Definition of the Scheduled script trigger point.
14       *
15       * @param (Object) scriptContext
16       * @param (string) scriptContext.type - The context in which the script is executed
17       * @Since 2015.2
18       */
19      function execute(scriptContext) {
20
21      }
22
23      return {
24          execute: execute
25      };
26

```

For more information, see the following topics:

- [SuiteScript 2.x JSDoc Validation](#)
- [define Object](#)
- If you do not want to use code completion, see [Turning Off Code Completion in SuiteCloud IDE Plug-in for WebStorm](#).

Validating a SuiteCloud Project with SuiteCloud IDE Plug-in for WebStorm

SDF can run server-side validation to catch errors that might occur during project deployment.

For more information, see the help topic [SuiteCloud Project Validation](#).

To validate a SuiteCloud project against your account:

1. In WebStorm, create or select your SuiteCloud project.
For more information, see [Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#) or [Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm](#).
2. Right-click your SuiteCloud project in the **Project** window.
3. Select **NetSuite > Validate Project Against Account**.
4. Select the account and role you want to use.
5. If you're working on an account customization project, change the **Action on Account-Specific Values** setting. For more information about this setting, see the help topic [Account-Specific Values Validation in SuiteCloud Projects](#).
6. If you're working on a SuiteApp projects, check the **Apply Installation Preferences** box if you want to apply the installation preferences.
7. Click **Validate**.
SDF validates your project against the account you picked. The validation progress log shows up in the **SuiteCloud IDE** console.

Errors in the validation log show up in red. If you run into errors during server-side validation, check the error messages to figure out what went wrong and troubleshoot the issues.

Example

Here's an example of a validation log that shows a successful validation:

```

1 | Info -- Account [ACCOUNTNAME]
2 | Info -- Account Customization Project [PROJECTNAME]
3 | Info -- Framework Version [1.0]
4 | Validate manifest -- Success
5 | Validate deploy file -- Success
6 | Validate configuration -- Success
7 | Validate script file -- Success
8 | Validate objects -- Success
9 | Validate files -- Success
10 | Validate folders -- Success
11 | Validate account settings -- Success
12 | Validate Custom Objects against the Account -- Success
13 | Validation COMPLETE
14 | Validate preferences - Success
15 | Validate flags -Success

```

Deploying a SuiteCloud Project to Your NetSuite Account with SuiteCloud IDE Plug-in for WebStorm

When you create a SuiteCloud project, a deploy file is automatically generated.

By default, the file is set up to deploy all supported files in the FileCabinet folder and all SDF custom objects in the Objects folder.

For more information, see the help topic [SuiteCloud Project Deployment Preparation](#).

To deploy a SuiteCloud project to your NetSuite account:

1. In WebStorm, create or select your SuiteCloud project.

For more information, see [Creating an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#) or [Creating a SuiteApp Project in SuiteCloud IDE Plug-in for WebStorm](#).



Important: Account customization projects can't be uninstalled from your account after deployment. You'll need to manually delete any components you don't want.

2. Ensure that your project references all the required dependencies.

For more information, see [Defining Feature Dependencies in SuiteCloud IDE Plug-in for WebStorm](#), [Defining Dependencies on SDF Custom Objects in a SuiteApp and Bundle Objects with SuiteCloud IDE Plug-in for WebStorm](#), and [Defining Account Component Dependencies from an Account Customization Project in SuiteCloud IDE Plug-in for WebStorm](#).

3. Ensure that your deploy file references all of the NetSuite components you want to deploy.

For more information, see the help topic [SuiteCloud Project Deployment Preparation](#).

4. Right-click your SuiteCloud project in the **Project** window.

5. Select one of the following:

- **NetSuite > Deploy**
- **NetSuite > Deploy to Account**

6. If you chose to deploy to an account, pick the right account and role, then click **Deploy**.

7. If you're deploying an account customization project, you can change the selection for **Action on Account-Specific Values**. For more information, see the help topic [Account-Specific Values Validation in SuiteCloud Projects](#).

8. If you're deploying a SuiteApp project, you can enable or disable the installation preferences by checking or clearing the **Apply Installation Preferences** box.

For more information, see the help topic [Installation Preferences in the SuiteApp of SuiteCloud Project](#).

9. If you're deploying to a NetSuite production account, you might see a notification window. Confirm you want to deploy to the production account to continue.

SDF validates and deploys the SuiteCloud project to your NetSuite account. The installation log shows up in the **SuiteCloud IDE** tool window.

Example

Here's an example that shows the installation log of a successful deployment to a NetSuite production account for a company named Wolfe Electronics:

```
1 | 2018-08-09 06:05:10 (PST) Installation started
2 | Info -- Account [(PRODUCTION) Wolfe Electronics (ACCOUNTNAME)]
3 | Info -- Account Customization Project [SDFtutorial]
4 | Info -- Framework Version [1.0]
5 | Validate manifest -- Success
6 | Validate deploy file -- Success
7 | Validate configuration -- Success
```

```

8 | Validate script file -- Success
9 | Validate objects -- Success
10 | Validate files -- Success
11 | Validate folders -- Success
12 | Validate account settings -- Success
13 | Validate Custom Objects against the Account -- Success
14 | Begin deployment
15 | Upload file -- ~/FileCabinet/SuiteScripts/UserEventScript.js
16 | Create object -- customrecord_tutorial (customrecordtype)
17 | Create object -- customscript_userevent (usereventscript)
18 | Create object -- customrecord_tutorial.custrecord_tut_memo (customrecordcustomfield)
19 | Create object -- customscript_userevent.customdeploy_ue_tut (scriptdeployment)
20 | 2018-08-09 06:05:37 (PST) Installation COMPLETE (0 minutes 27 seconds)

```

Shortcut Keys in SuiteCloud IDE Plug-in for WebStorm

You can use keymaps to trigger these SDF functions:

Function	Key Combination		
	Windows	Mac OS	Linux
Add Dependency References to Manifest	Ctrl+Alt+Shift+A	Cmd+Alt+Shift+A	Ctrl+Alt+Shift+A
Compare with Account File	Alt+Shift+E	Alt+Shift+E	Alt+Shift+E
Deploy	Ctrl+Alt+D	Cmd+Ctrl+Alt+D	Alt+D
Deploy to Account...	Ctrl+Alt+Shift+D	Cmd+Alt+Shift+D	Shift+D
Import Files from Account...	Ctrl+Alt+F	Cmd+Alt+F	Ctrl+Alt+F
Import Objects from Account...	Ctrl+Shift+O	Cmd+Ctrl+Alt+O	Ctrl+Alt+O
NetSuite Settings	Ctrl+Alt+N	Cmd+Option+N	Ctrl+Alt+N
Upload File(s) to Account	Alt+Shift+U	Alt+Shift+U	Alt+Shift+U
Update with Account Object(s)	Ctrl+U	Cmd+U	Ctrl+U
Validate	Ctrl+Alt+V	Cmd+Alt+V	Ctrl+Alt+V
Validate to Account...	Ctrl+Alt+Shift+V	Cmd+Alt+Shift+V	Ctrl+Alt+Shift+V

 **Note:** For more information about general keyboard shortcuts, see the help topic [Keyboard Shortcuts](#).