

ORACLE  
NetSuite

# SuiteCommerce InStore Administrator's Guide



SCIS

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

### **Documentation Accessibility**

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

### **Access to Oracle Support**

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

### **Sample Code**

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at [www.netsuite.com/tos](http://www.netsuite.com/tos).

Oracle may modify or remove sample code at any time without notice.

### **No Excessive Use of the Service**

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

### **Beta Features**

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

# Table of Contents


|                                                                       |    |
|-----------------------------------------------------------------------|----|
| SuiteCommerce InStore Administrator's Overview .....                  | 1  |
| SuiteCommerce InStore Installation .....                              | 3  |
| Beginning the Installation .....                                      | 4  |
| Installing SuiteApps for SCIS .....                                   | 5  |
| Setting Up the SCIS Website .....                                     | 5  |
| Required Features and Settings for SCIS .....                         | 7  |
| Managed Bundle Updates of SCIS .....                                  | 11 |
| SCIS for iOS (iPadOS) and SCIS for Windows Mobile Applications .....  | 12 |
| Installing the SCIS Mobile App .....                                  | 14 |
| Configuring the SCIS Mobile App .....                                 | 16 |
| Setting Up Mobile Certificates and a Domain Safelist for SCIS .....   | 18 |
| Creating a Shortcut for the SCIS Mobile Device List .....             | 21 |
| Setting Up SCIS Touch ID for iOS .....                                | 22 |
| Mobile App Testing for Operating System & Other Updates .....         | 22 |
| Working with SCIS on Sandbox .....                                    | 24 |
| Configuring Search Fields and Field Sets .....                        | 25 |
| Troubleshooting Your SCIS Installation .....                          | 25 |
| SCIS Compatible Peripheral Hardware .....                             | 31 |
| Compatible Peripherals .....                                          | 31 |
| Setting Up Receipt Printers for SCIS .....                            | 33 |
| Setting up Barcode Scanners for SCIS .....                            | 34 |
| Customer-facing Accessories .....                                     | 36 |
| Security For Your Peripheral Devices .....                            | 36 |
| Performance Management and Tips for SCIS .....                        | 38 |
| Application Performance Management (APM) for SCIS .....               | 38 |
| Performance Tips using NetSuite Settings .....                        | 38 |
| Performance Tips for using SCIS POS Devices .....                     | 47 |
| Performance Tips for Network Resources .....                          | 52 |
| Performance Tips for Scripts and Workflows .....                      | 54 |
| Performance Tips for using Third-Party SuiteApps .....                | 58 |
| SCIS Configuration .....                                              | 60 |
| Enable Required Features (SCIS 2.0 Only) .....                        | 61 |
| Subsidiaries and Locations for SCIS .....                             | 61 |
| Subsidiaries and SuiteCommerce InStore .....                          | 62 |
| Configuring Locations for SCIS .....                                  | 62 |
| SCIS Settings .....                                                   | 64 |
| SCIS Filter Settings .....                                            | 65 |
| General SCIS Settings .....                                           | 65 |
| SCIS Settings for Printing .....                                      | 67 |
| SCIS Custom Attributes for PDP, Cart, Item, and Customer Search ..... | 68 |
| SCIS Customer Settings .....                                          | 68 |
| SCIS Settings for Orders .....                                        | 68 |
| QuickAdd Bar and Forms Settings for SCIS .....                        | 69 |
| SCIS Settings for Receipts .....                                      | 71 |
| Selecting Sales Reports for SCIS .....                                | 72 |
| SCIS Cash Drawer Management Settings .....                            | 73 |
| Localizing SCIS .....                                                 | 73 |
| Setting Up SCIS for Multiple Countries .....                          | 74 |
| Setting up Currency Rounding for SCIS .....                           | 76 |
| Managing Multiple Languages for SCIS .....                            | 77 |
| Advanced Receipt Templates for SCIS .....                             | 78 |
| Customizing a Receipt Template for SCIS .....                         | 78 |
| Creating SCIS Receipt Template Records .....                          | 79 |

|                                                                   |     |
|-------------------------------------------------------------------|-----|
| Adding Fields to Custom SCIS Receipt Templates .....              | 80  |
| Custom Receipt Template Setup for SCIS .....                      | 88  |
| Configuring SCIS Payment Methods .....                            | 89  |
| Credit Card Patterns for SCIS .....                               | 91  |
| Credit Card Icons .....                                           | 91  |
| Setting Up Payment Services for SCIS .....                        | 92  |
| Understanding Payment-device Processing .....                     | 92  |
| Configuring SCIS Gateway Records .....                            | 95  |
| Configuring EMV Payment Services for SCIS .....                   | 95  |
| Modifying Cash Payment Denominations .....                        | 98  |
| SCIS Fallback .....                                               | 100 |
| SCIS Fallback Overview .....                                      | 100 |
| Setting Up SCIS Fallback .....                                    | 103 |
| SCIS Fallback Settings .....                                      | 103 |
| SCIS Fallback Payment Methods .....                               | 106 |
| Fallback and Storage Limits for Mobile Apps .....                 | 106 |
| Working with Sales Associates in SCIS Fallback .....              | 109 |
| Working with Customers in SCIS Fallback .....                     | 109 |
| Fallback Data Delivery .....                                      | 110 |
| Transaction Creation Process .....                                | 110 |
| SCIS Fallback Transaction Reconciliation .....                    | 112 |
| Avoiding Storage Issues by Using a Fallback Catalog Limit .....   | 114 |
| Avoiding Storage Issues by Using the Fallback Open Item .....     | 117 |
| Configuring Records for SCIS .....                                | 124 |
| Customer Records and SCIS .....                                   | 124 |
| Configuring the Customer Entry Form .....                         | 125 |
| Defining SCIS Customer Notes .....                                | 127 |
| Configuring Item Records for SCIS .....                           | 127 |
| Setting Up Products for Sale on SCIS .....                        | 128 |
| Configuring Serialized Items and Lot Numbered Items in SCIS ..... | 129 |
| Configuring Item Images for SCIS .....                            | 130 |
| Fields Displayed on the Product Detail Page .....                 | 132 |
| Creating an Open Item in SCIS to Prompt for Price .....           | 133 |
| Configuring QuickAdd Keys .....                                   | 134 |
| Configuring Employee Records for SCIS .....                       | 136 |
| Working with Employees in Multiple SCIS Locations .....           | 137 |
| SCIS User Settings .....                                          | 138 |
| SCIS Customization .....                                          | 140 |
| Customizing the Configuration File .....                          | 140 |
| Editing the CustomConfiguration.js File .....                     | 140 |
| Optional Settings in CustomConfiguration.js .....                 | 141 |
| Creating SCIS Custom Attributes .....                             | 143 |
| SCIS Event Validators .....                                       | 146 |
| SCIS Extensions .....                                             | 156 |
| Option Windows and Information Windows .....                      | 156 |
| Build and Deploy an Extension for SCIS .....                      | 158 |
| Activate Extensions for SCIS .....                                | 158 |
| SCIS Roles and Permissions .....                                  | 160 |
| SuiteCommerce InStore Roles .....                                 | 160 |
| SCIS Clerk .....                                                  | 161 |
| SCIS Support .....                                                | 163 |
| SCIS Store Manager .....                                          | 163 |
| SCIS Fallback Auditor .....                                       | 165 |
| Creating Custom Roles for SCIS .....                              | 166 |
| SuiteCommerce InStore Permissions .....                           | 167 |

|                                                            |     |
|------------------------------------------------------------|-----|
| SCIS Cash and Transactions .....                           | 169 |
| Sales Transactions .....                                   | 169 |
| Payment Configurations .....                               | 173 |
| SCIS Purchase on Account .....                             | 173 |
| SCIS Cash Drawer Management .....                          | 174 |
| SCIS Cash Drawer Management Setup .....                    | 175 |
| Advanced Cash Drawer Management Setup for SCIS .....       | 175 |
| Cash Drawer Management for Fallback .....                  | 177 |
| SCIS Cash Drawer Management Workflows and Tracking .....   | 180 |
| SCIS Ship from Store, Pickup In-Store Overview .....       | 184 |
| Setting Up Ship from Store, Pickup In-Store for SCIS ..... | 185 |
| Ship from Store, Pickup In-Store Workflow .....            | 185 |
| Invoice in Advance of Fulfillment with Optimize EMV .....  | 187 |
| Setting Up Quotes in SCIS .....                            | 188 |
| Discounts, Markups, and Promotions for SCIS .....          | 190 |
| Configuring Discounts .....                                | 190 |
| Price Override for SCIS .....                              | 191 |
| Promotions and Coupon Codes for SCIS .....                 | 192 |
| Returns and Refunds .....                                  | 193 |
| Gift Certificates in SuiteCommerce InStore .....           | 198 |
| Configuring Gift Certificates for SCIS .....               | 199 |
| Setting Gift Certificate Attributes For SCIS .....         | 200 |
| SCIS Gift Certificates FAQ .....                           | 201 |
| SCIS No Sale .....                                         | 202 |
| Voiding a Line and Deleting a Transaction .....            | 203 |
| Defining SCIS Transaction Notes .....                      | 204 |
| Calculating Taxes on Transactions .....                    | 205 |
| Saved Searches, Reports, and Audit Logs .....              | 206 |
| Modifying Included Saved Searches .....                    | 207 |
| Custom SCIS Sales Reports .....                            | 207 |
| Publishing Saved Searches to SCIS Users .....              | 208 |
| SCIS Audit Log .....                                       | 209 |
| SCIS Custom Fields, Lists, Records, and Searches .....     | 211 |
| Mobile Device Settings .....                               | 211 |
| Cash Drawer Management .....                               | 212 |
| Customer Profile .....                                     | 213 |
| Discounts and Returns .....                                | 215 |
| Employee .....                                             | 215 |
| Item .....                                                 | 216 |
| Location .....                                             | 217 |
| Opening and Closing Drawer .....                           | 218 |
| Payments .....                                             | 219 |
| Printer Settings .....                                     | 220 |
| QuickAdd Keys .....                                        | 221 |
| Sales Reports .....                                        | 221 |
| SCIS Receipts .....                                        | 222 |
| Transactions .....                                         | 222 |
| Fallback Custom Records .....                              | 225 |

# SuiteCommerce InStore Administrator's Overview

SuiteCommerce InStore (SCIS) is a web-based point-of-sale application. Because it was built on the same platform as the Commerce web store applications, SCIS uses the app's responsive web layout to provide an intuitive user interface for touch tablets.

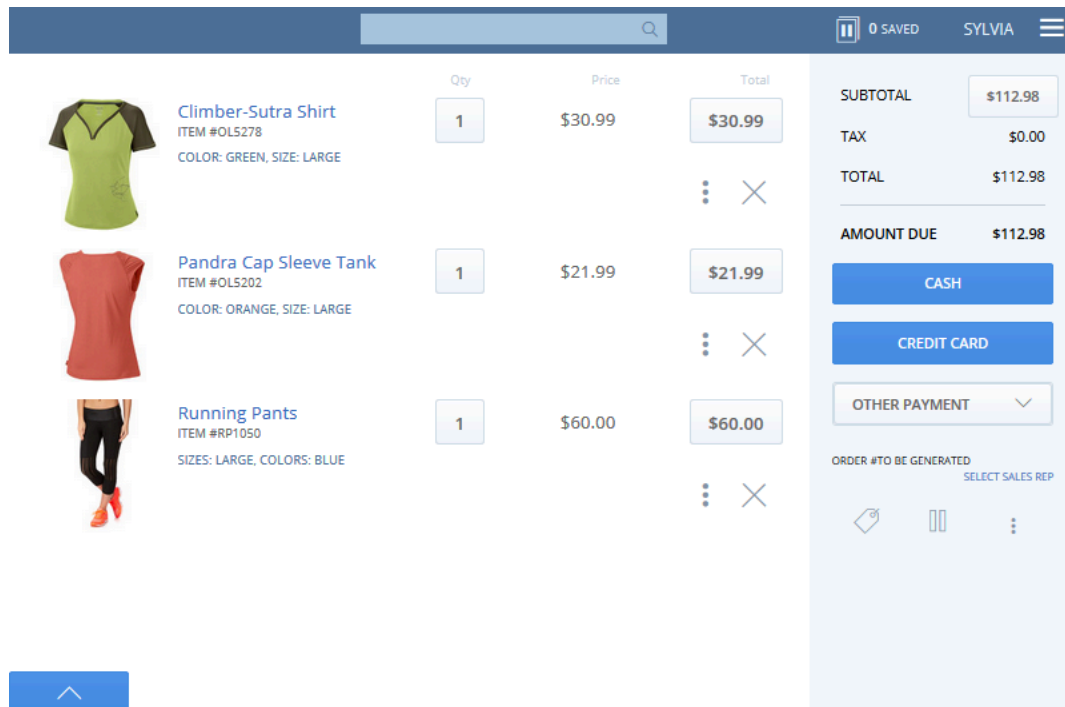

SCIS is delivered as a managed SuiteApp, so after you install it, updates are pushed directly to your NetSuite account. The following topics provide information for administrators on how to install SuiteCommerce InStore (SCIS):

- [SuiteCommerce InStore Installation](#)
- [Installing the SCIS Mobile App](#)

For general information intended for sales associates and employees using SCIS for day-to-day operations, read the [SCIS User Guide Overview](#).

## Locations and Subsidiaries

Location and subsidiary records are key when setting up SCIS. For example, employees can access SCIS based on the location associated with their record. If you're using OneWorld, you need to specify the subsidiary on every employee and item record. For more information, see [Subsidiaries and Locations for SCIS](#).

## Standard Records and Custom Records

SCIS stores data in NetSuite records. Some are standard NetSuite records and others are custom records installed by the SuiteCommerce InStore SuiteApp. Standard records include items, customers,



and employees. Some SCIS custom fields are added to standard NetSuite records when you install the SuiteApp. For more information, read [Configuring Records for SCIS](#).

When you're creating employee records, it's important to consider the role that each employee will have in your organization. For example, employees require more than basic transaction permissions to process an item return. For more information, see [SCIS Roles and Permissions](#).

Configuration is optional for many custom fields and records. To see a list of custom fields associated with SCIS, see [SCIS Custom Fields, Lists, Records, and Searches](#).

## Sales and Other Transactions

After you submit a transaction through SCIS, an administrator can view or modify it in NetSuite. For more information, see [SCIS Cash and Transactions](#). Sales associates use SCIS to view customer profiles, check transaction histories, and handle returns and exchanges.

# SuiteCommerce InStore Installation

SuiteCommerce InStore (SCIS) is delivered as a managed SuiteApp (bundle) that you install in your NetSuite account. With a managed SuiteApp, you automatically receive updates for fixes and enhancements without any need to update manually or migrate for future releases.

- [Beginning the Installation](#)
  - [Installing SuiteApps for SCIS](#)
  - [Setting Up the SCIS Website](#)
  - [Configuring Image Preferences](#)
  - [Using a Registered Domain with SCIS](#)
  - [Required Features and Settings for SCIS](#)
  - [Accounting and Tax Preferences for SCIS](#)
  - [Set Shipping Charge Automation](#)
  - [Configure Tax Settings](#)
  - [Permit Refunds or Exchanges for Transactions in Closed Accounting Periods](#)
- [Managed Bundle Updates of SCIS](#)
- [SCIS for iOS \(iPadOS\) and SCIS for Windows Mobile Applications](#)
- [Working with SCIS on Sandbox](#)
- [Configuring Search Fields and Field Sets](#)
- [Troubleshooting Your SCIS Installation](#)

## Prerequisites

Before you can install SCIS, contact your NetSuite sales rep or account manager. Ensure that you have access to NetSuite Commerce features such as SuiteCommerce InStore and the SuiteCommerce InStore SuiteApp.

## Partner Implementations with Customizations

Some SCIS implementations might include installing a SuiteApp or other bundles to customize a setup. If a third-party NetSuite partner handles the implementation, the partner should check if a specific SuiteApp or bundle version is supported in SCIS before applying any customizations.

Partners can confirm if a version is supported by contacting their NetSuite Product representative or Customer Support.

 **Tip:** Partners should always confirm if a SuiteApp or bundle version is supported for use with SCIS before installing it.

For general information, see the help topics [SuiteApp Versions](#) and [Viewing the SuiteApp Version History](#).

## First Installation of SuiteCommerce InStore

For detailed instructions on installing the SuiteApp, see [Beginning the Installation](#).

**Note:** After installation, you must configure SCIS for your business needs. Configuration steps include defining SCIS Settings, configuring receipt templates, employee records, item records, cash drawer management settings, and SCIS custom records. For more information about configuration, see [SCIS Configuration](#).

## Managed Bundle Updates and Phased SCIS Release

After you've installed the SuiteCommerce InStore SuiteApp in your account, it's updated periodically. Major releases of new features and enhancements occur twice a year. Minor releases can occur every two weeks. Minor releases are typically used to correct issues and to deliver version updates to a set of accounts. Major and minor releases are delivered directly to your account in managed bundle updates.

For more information, see [Managed Bundle Updates of SCIS](#).

## SCIS App for iOS (iPadOS) and SCIS App for Windows

Depending on the operating system (OS) of the mobile devices you'll use for SCIS, you'll install one of the SCIS app versions on those devices. For more information about how to install and configure the mobile apps for your account, see [SCIS for iOS \(iPadOS\) and SCIS for Windows Mobile Applications](#).

## SCIS on Sandbox

You should install and configure SCIS on a sandbox account before using it in production. Testing on sandbox lets you make sure your business processes run smoothly before you start taking orders with SCIS in your store.

For more information, see [Working with SCIS on Sandbox](#).

## Reference Information

Use the following topics for reference information:

- [Required Features and Settings for SCIS](#) – Useful as a reference on first installation. You must enable required features and settings for successful installation.
- [Configuring Search Fields and Field Sets](#) – Use this information if you've made significant configuration changes.

## Beginning the Installation

This section includes information about first-time installation of SuiteCommerce InStore (SCIS). When you install the SuiteApp, the following basic components are automatically set up and configured:

- Website for SCIS, including search fields and field sets
- SCIS Quick Cash Denominations
- Image resize preferences on the Images subtab of the Web Site Setup page

If you don't enable certain features required by the SuiteApp, the installation fails. To identify required features and settings, see [Required Features and Settings for SCIS](#).

The installation consists of two tasks:

1. [Installing SuiteApps for SCIS](#)
2. [Setting Up the SCIS Website](#)

## Installing SuiteApps for SCIS

This section includes information about first-time installation of SuiteCommerce InStore (SCIS).

You use SuiteApps to install the components required to run SCIS, including custom records and fields, JavaScript files, and other assets. The SuiteApp installation process checks for required features.

You should install **SuiteCommerce InStore** and the **Reference Product List/Review** bundles:

- Reference Product List Records (Bundle ID 53051)
- Reference Product Review Records (Bundle ID 53053)
- SuiteCommerce InStore (perform Search to find latest bundle)



**Tip:** If the **SuiteCommerce InStore** bundle fails to install, make sure you've enabled all the required features and preferences, then try again. See [Required Features and Settings for SCIS](#).

### To install SCIS bundles using SuiteApps:

1. Go to Customization > SiteBundler > Search & Install Bundles.
2. Stay on the **Basic** tab.
3. For **Keywords**, enter the Bundle ID or a portion of the bundle name.
4. Click **Search**.
5. Use the **Version** number to find the latest bundle for the SuiteApp you want.
6. Click the bundle **Name**.
7. Review the **Bundle Details** and then click **Install**.  
If prompted, click **OK** to give permission for NetSuite to install bundle updates.
8. After a short wait, the **Preview Bundle Install** page displays. Click **Install Bundle**.  
If prompted, click **OK** to install the bundle and its objects.
9. When the **Status** on the **Installed Bundles** page changes from **Pending** to a green check mark, the installation is complete.
10. Repeat these steps for other bundles as needed.

After you've installed the SuiteApp, finish configuring your SuiteCommerce InStore website. For more information, see the help topic [Setting Up the SCIS Website](#).



**Note:** Bundles with **Yes** in the **Managed** column are updated automatically.

## Setting Up the SCIS Website

The first time you install SuiteCommerce InStore (SCIS), a new website is automatically created. The new site, called **SuiteCommerce InStore Website**, appears on the list of websites at Commerce > Websites > Website List.

You'll use this website for SCIS transactions. The items you want to sell using SCIS must be configured to display on this website.

Entering a domain name is required when setting up your SCIS website. However, you can enter a domain name that isn't registered. When you go to your SCIS website, the domain you use redirects to the system-generated URL for your website.

**Note:** Some selections described here might have already been set up. You can check and then move to the next step.

### To set up the SCIS website:

1. After installation is complete, go to Commerce > Websites > Website List.
2. Click **Edit** next to **SuiteCommerce InStore Website**.

If your setup uses a different website name, use that name instead.

**Note:** For SCIS, the website **Type** is set to **SuiteCommerce InStore**. You can't change it.

3. If you use NetSuite **OneWorld**, scroll down and select the online **Subsidiary** you're setting up. For more information about subsidiary settings, see the help topic [Subsidiaries and SuiteCommerce InStore](#).
4. Click the **Shopping** subtab and select **Include Out of Stock Items in Web Store**.
5. Click the **Domains** subtab.
  - a. Click **Add New Domain**.
  - b. Select **Web Store Only**.

The screenshot shows the 'Commerce' section of a setup page. It contains three main options, each with a 'Select' button:

- Single Domain for Web Store and Checkout**: Set up both web store and checkout on a single domain.
- Web Store Only**: Set up a standalone web store domain. This option is highlighted with a red box.
- Custom Checkout Only**: Set up a checkout domain unique to your web site.

Below these options is an 'Other' section with a text input field.

- c. Enter the **Domain Name**. The domain doesn't have to be active.
- d. Select the **Website** name **SuiteCommerce InStore Website**.  
If your setup uses a different website name, use that name instead.
- e. For **Hosting Root**, select **Live Hosting Files**.
- f. Under **Certificate**, check **Use SSL Certificate to Secure Domain**. For more information, and for information about automatic and manual certificates, see the help topic [Secure Your Domain](#).

**Note:** If you don't check the **Use SSL Certificate to Secure Domain** box, website setup will result in an error.

- g. For **Touch Points**, select **View Homepage**.
- h. Click **Save** for your domain setup.

6. Click **Save** for your website setup.

### To set up the SCIS website domain:

1. Go to Commerce > Hosting > Domains > New.
2. Enter the **Domain Name** field. You can use a registered domain name for your SCIS website, or enter one that isn't registered, as a placeholder.



**Note:** Don't include http:// or https:// with the domain. For example, enter www.mywebsite.com in the domain field, not https://www.mywebsite.com.

3. Set the **HTML Hosting Root** to **Live Hosting Files**.
4. Click **Save**.

SuiteCommerce InStore is a managed SuiteApp, which means that updates and enhancements to the SuiteApp are pushed automatically to your account. No changes are made to the website if you update or remove the SuiteApp. If you remove the SuiteApp and then install it again, there will be two websites.



**Important:** After you've completed setting up the SuiteCommerce InStore Website, you must install the SCIS for iOS or SCIS for Windows mobile app on the device you'll use for entering orders. For more information, see [SCIS for iOS \(iPadOS\) and SCIS for Windows Mobile Applications](#).

## Configuring Image Preferences

Images are assets used in SCIS to illustrate your catalog and reflect your branding. Brand images can include your logo, receipt logo, wallpaper, pictures representing your sales associates, and so on. You can use image compression and image resizing to boost the performance of images in your setup.

See [Images](#) in the [Performance Tips using NetSuite Settings](#) topic.

## Using a Registered Domain with SCIS

When you use a registered domain name with SCIS, you must configure DNS with your domain provider to set up a CNAME redirect.

When you click Save after entering the domain in NetSuite, a CNAME (Alias) is configured for the new domain. You must use the CNAME (Alias) to configure DNS with your domain provider to point your domain name at NetSuite hosting servers. It can take up to two hours for the CNAME (Alias) to be completely configured. For more information, see the help topic [Point Your Domain Name at Your Domain \(DNS Settings\)](#).

## Required Features and Settings for SCIS

This section includes information for administrators setting up SuiteCommerce InStore (SCIS). See the following for more information:

- [Required Features for SuiteCommerce InStore](#)
- [Accounting and Tax Preferences for SCIS](#)

## Required Features for SuiteCommerce InStore

The following features are required to use SuiteCommerce InStore (SCIS). To enable features in NetSuite:

1. Go to Setup > Company > Enable Features.
2. Check the boxes next to all the features listed in the following table.
3. Click **Save**.

| Subtab on Enable Features Page | Feature Name                                                                                                                                                                                                                                                                                           |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Company                        | Locations<br>Multi-Language<br><div>  <b>Note:</b> The Multi-Language feature is optional for NetSuite US, but <b>required</b> for other editions of NetSuite, such as NetSuite Canada and NetSuite Australia. </div> |
| Accounting                     | Accounting Periods                                                                                                                                                                                                                                                                                     |
| Tax                            | Advanced Taxes                                                                                                                                                                                                                                                                                         |
| Transactions                   | Multiple Shipping Routes<br>Promotion Codes                                                                                                                                                                                                                                                            |
| Items & Inventory              | Gift Certificates<br>Bar Coding and Item Labels<br>Inventory<br>Multi-Location Inventory                                                                                                                                                                                                               |
| CRM                            | Upsell Manager                                                                                                                                                                                                                                                                                         |
| Web Presence                   | Web Site<br>Advanced Site Customization<br>Descriptive URLs<br>SuiteCommerce InStore<br>Host HTML Files<br>Online Ordering                                                                                                                                                                             |
| SuiteCloud                     | Custom Records<br>Advanced PDF/HTML Templates<br>Client SuiteScript<br>Server SuiteScript<br>SuiteScript Server Pages<br>SuiteScript 2 Server Pages (SCIS 2020.1 or later)<br>Custom Transactions                                                                                                      |

## Accounting and Tax Preferences for SCIS

SuiteCommerce InStore (SCIS) requires specific accounting preferences and tax settings in your NetSuite account.

- [Set Accounting Preferences](#)

- [Set Shipping Charge Automation](#)
- [Configure Tax Settings](#)
- [Permit Refunds or Exchanges for Transactions in Closed Accounting Periods](#)

## Set Accounting Preferences

Follow these steps to set your SCIS accounting preferences.

### To set accounting preferences for SCIS:

1. Go to Setup > Accounting > Accounting Preferences.
2. Set the following accounting preferences:
  - On the **General** subtab, clear the box next to **Void Transaction Using Reversing Journals**.
  - On the **Items/Transactions** subtab, select a **Default Income Account** from the list.
3. Click **Save**.

## Set Shipping Charge Automation

Follow these steps to have SCIS automatically charge for shipping.

### To automatically charge for shipping:

1. Go to Setup > Accounting > Shipping.
2. Check the **Charge for Shipping** box.
3. Click **Save**.

For more information, see the help topic [Setting Up Shipping](#).

## Configure Tax Settings

Follow these steps to configure your SCIS tax settings.

### To configure tax settings:

1. Go to Setup > Accounting > Nexuses. You must have at least one tax nexus set up.
2. Go to Setup > Accounting > Set Up Taxes.
  - a. Check the box next to **Enable Tax Lookup on Sales Transactions**.
  - b. Check the box next to **Customers Default to Taxable**.
  - c. Check the box next to **Charge Out of District Sales Taxes**.
  - d. Check the box next to **Per-Line Taxes on Transactions**.



**Note:** In some cases, the Per-Line Taxes on Transactions preference conflicts with the Multiple Shipping Routes feature. If the preference isn't available, go to Setup > Company > Enable Features. On the Transactions subtab, clear the box next to Multiple Shipping Routes and click Save. Then, check the Per-Line Taxes on Transactions box and enable Multiple Shipping Routes again.

- e. Under **Charge Sales Tax on Store Orders**, select **Always**.



- f. Select a **Default Tax Code**.



**Note:** If there's no tax code or tax item on the customer record, the tax is calculated based on the SCIS location address.

- g. Under **Tax Code Lists Include**, select **Tax Groups and Tax Codes**.
  - h. Set up a tax code for each location where you'll be using SCIS.
  - i. Click **Save**.
3. Go to Setup > Accounting > Tax Schedule. Check that the nexus corresponding to each location is taxable.

After you've configured accounting preferences and tax settings, you can install the SuiteCommerce InStore SuiteApp.

For more information about tax settings, see [Calculating Taxes on Transactions](#).

To view a list of SCIS installation tasks, see the help topic [SuiteCommerce InStore Installation](#).

## Permit Refunds or Exchanges for Transactions in Closed Accounting Periods

By default, after an accounting period is closed, sales associates can't process a refund or exchange for transactions that occurred during that period. To disable this restriction for a period, you can use the **Allow Non-G/L Changes** option. This option allows adding non-posting transactions to a closed period.

Follow these steps in NetSuite. The first two can be one-time tasks.

1. Ensure you have **Allow Quick Close** enabled in your Accounting Preferences.
2. For the SCIS Clerk role, check the option for **Allow Non-G/L Changes**.
3. For the closed period, check the option for **Allow Non-G/L Changes**.



**Note:** Sales associates and other users who don't have the Allow Non-G/L Changes option enabled in their role can't enter non-posting transactions to a closed period, even if the Allow Non-G/L Changes box for a period is checked.

### 1. To ensure you have Allow Quick Close enabled:

1. Go to Setup > Accounting > Accounting Preferences.
2. On the **General** tab, scroll to the end of the **General Ledger** section.
3. Ensure **Allow Quick Close of Accounting Periods** is checked. If not, check it.
4. Click **Save**.

### 2. To adjust the SCIS Clerk role to Allow Non-G/L Changes:

1. Go to Setup > Users/Roles > Manage Roles.
2. Click **Edit** for the **SCIS Clerk** role.
3. On the **Permissions** tab, click **Setup**.
4. In the **Add** field, select **Allow Non-G/L Changes**.
5. Click **Add**.
6. Click **Save**.

### 3. To enable Allow Non-G/L Changes for a Closed Accounting Period:

1. Go to Setup > Accounting > Manage Accounting Periods.
2. Expand the appropriate **Period Name** to display the period to enable.
3. Check that the **Period Close** column is checked for the period.  
Open periods don't require the option to allow non G/L changes.
4. Click the **Period Name** to display the details.
5. Check the **Allow Non-G/L Changes** box.
6. Click **Save**.



**Tip:** To always allow refunds and exchanges for closed periods, include checking the **Allow Non-G/L Changes** box as a standard task when closing a period.

## Managed Bundle Updates of SCIS

After you've installed the SuiteCommerce InStore SuiteApp for the first time in your account, it's updated periodically. Updates to SuiteCommerce InStore (SCIS) occur automatically in your account. These updates are delivered by a phased release process, similar to the release process for NetSuite upgrades. You'll receive an email notification before any major update.

If the managed bundle update fails, you can run a script to identify required features and settings that may not be enabled. For more information, see [Identifying Required Features and Settings for SCIS](#).

## Resetting Touch Points for a New Version



**Important:** You must reset the touch point after each update to a new version.

### To reset the touch point after a managed bundle update:

1. Go to Commerce > Websites.
2. Edit your SCIS website.
3. On the **Touch Points** subtab, set the **View Homepage** touch point to **SuiteCommerce InStore**.
4. Click **Save**.

## Minor Releases

Minor releases occur periodically and usually include bug fixes and patches. If the release impacts any configurations that you may have in your account, you'll receive an email notification before the minor release.

## Phased Release Process for SCIS

A new version of SCIS is released twice a year. The new version of SCIS is delivered to groups of customers in phases over a period of two months. You'll receive an email notification before SCIS is updated to the new version in your account. The email message includes the date and time when your

account will be updated, and may include required actions for administrators to perform in preparation for the new version of SCIS.

The new version of SCIS is available on sandbox before the date when your account is updated in production. On sandbox, you can test new features using your own data and business processes. For more information, see [Working with SCIS on Sandbox](#).

The following is recommended when a new version of SCIS is available in your sandbox account:

- Continue to use the production account to run daily business processes.
- Use the Sandbox account to learn about new features and to test the upcoming release.


After the new version has been available in sandbox for approximately two weeks, updates to customer accounts begin in phases. Contact your NetSuite representative for more information about your account.

## Identifying Required Features and Settings for SCIS

You can run a script that identifies features and settings that may have caused the installation to fail. Use the NetSuite debugger to run the script.

### To generate a list of required features and settings:

1. Copy the script displayed in the **SCIS\_CheckRequiredFeatures.js** file in the NetSuite file cabinet at Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore > scripts. You can use the Search box in the File Cabinet to find the file.

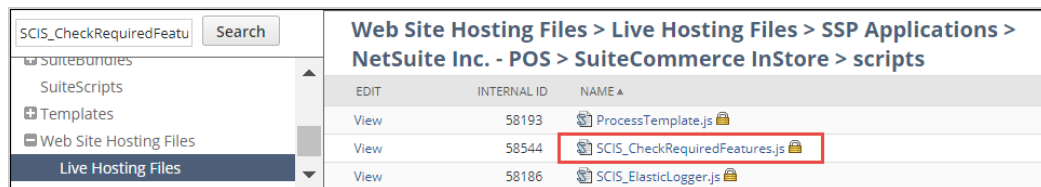

2. Go to Customization > Scripting > Script Debugger.
3. Enter the SuiteScript Debugger domain (by clicking the link as indicated) and re-enter your login credentials if prompted.
4. Set the **API Version** to 1.0.
5. Paste the script code into the debugger.
6. Click **Debug Script** and then click **Continue**.

If there are features required for SCIS that aren't enabled in your account, they'll be listed at the bottom of the page.

## SCIS for iOS (iPadOS) and SCIS for Windows Mobile Applications

In addition to delivering the same experience as the web application, SCIS mobile applications include robust security and remote configuration options for administrators. SCIS for iOS and SCIS for Windows use custom records in NetSuite to update the configuration settings on your mobile device. Remote configuration enables administrators to make subsequent configuration changes after the first-run setup has been completed on the device.



**Important:** SuiteCommerce InStore is only supported on mobile devices running SCIS for iOS or SCIS for Windows. Installation of either SCIS for iOS or SCIS for Windows is **required**.



**Tip:** The acronyms iOS and iPadOS are used interchangeably in this guide. An iOS update for your Apple iPad is downloaded in the iPadOS format. For the topics used in this guide, either operating system (OS) term will apply.

## Best Practice for Applying Settings

The best practice for applying settings to an iPad or Windows tablet is to update one device, run acceptance tests on that device, and then apply the settings to other devices. See [Mobile App Testing for Operating System & Other Updates](#).

## Application Requirements – SCIS for iOS (iPadOS) Mobile App

SCIS for iOS version 5.1.0 has been verified as compatible with iPadOS 13.x, 14.x, 15.2 or greater, and 16.1. These iPadOS releases are supported by Oracle NetSuite for use with the SCIS application.



**Note:** iPadOS 15.0 and 15.1 aren't supported due to issues with printing compatibility.



**Important:** Free space issues for iPadOS 13.x and later can affect the storage required for Fallback catalog downloads. Under certain circumstances, these issues can cause the SCIS for iOS mobile app to fail. See [Fallback and Storage Limits for Mobile Apps](#).



**Warning: Recording a video that includes a login.** It's been found that for iPadOS versions prior to iPadOS 14.3, using the included iOS Screen Recorder utility to record the act of logging into an application can expose the keystrokes and characters used to enter a password. To avoid having a password exposed when recording a video, you should upgrade your devices to iPadOS 14.3 or later.

## Wait Before Updating to New iPadOS Versions

Always wait for notification from NetSuite before you update to a major version that's not listed here as "compatible." Versions with a number and single decimal place are considered "major." Waiting lets NetSuite ensure SCIS will work with the new version.



**Note:** Because minor iPadOS versions usually contain bug fixes, SCIS doesn't test minor versions for compatibility. For example, if X.X is tested as compatible, X.Xx is normally not tested.

## Application Requirements – SCIS for Windows Mobile App

Tablets that use the SCIS for Windows mobile app must have the following system applications installed:

- Windows 10 operating system (version 1607 or newer)
- .NET Framework version 4.7.1

## Supported Windows Operating System

The following table identifies whether specific versions of the Windows 10 operating system (OS) are compatible with the current SCIS for Windows mobile app release.

| SCIS Mobile App Version | Minimum .NET Framework Required | Windows OS Support for SCIS for Windows |                                                  |                                                     |                                                  |                                                       |
|-------------------------|---------------------------------|-----------------------------------------|--------------------------------------------------|-----------------------------------------------------|--------------------------------------------------|-------------------------------------------------------|
|                         |                                 | Windows 10 64-bit (Version 1507)        | Windows 10 64-bit November Update (Version 1511) | Windows 10 64-bit Anniversary Update (Version 1607) | Windows 10 64-bit Creators Update (Version 1703) | Windows 10 64-bit Fall Creators Update (Version 1709) |
| 5.1.6                   | .NET 4.7.1                      | No                                      | No                                               | Yes                                                 | Yes                                              | Yes                                                   |

## Wait Before Updating to New Windows Versions

Always wait for notification from NetSuite before you update to a version that's not listed here as "compatible." Waiting lets NetSuite ensure SCIS will work with the new version.

Detailed instructions associated with installation and configuration of SCIS mobile apps are included in the following topics:

- [Installing the SCIS Mobile App](#)
- [Setting Up Mobile Certificates and a Domain Safelist for SCIS.](#)
- [Creating a Shortcut for the SCIS Mobile Device List](#)
- [Setting Up SCIS Touch ID for iOS](#)
- [Mobile App Testing for Operating System & Other Updates](#)

## Installing the SCIS Mobile App

Follow these steps to download and install the SuiteCommerce InStore (SCIS) iOS mobile application or Windows mobile application on your point-of-sale tablet device.



**Important:** You should install and test new installations and upgrades on one device before applying a release to all devices in your store. Be sure to test all peripherals, such as bar code scanners and receipt printers.

See [Mobile App Testing for Operating System & Other Updates](#).

- [Downloading and Installing the iOS Mobile App](#)
- [Downloading and Installing the Windows Mobile App](#)

## Downloading and Installing the iOS Mobile App

These steps describe how to add the SCIS for iOS mobile application to an iOS mobile device.

### To download and install the iOS mobile application:

1. Open the **App Store** on your iPad.
2. Search for **NetSuite SuiteCommerce InStore**.
3. Tap **Get** to download and install the app.



**Note:** If you're upgrading the iOS mobile app, go to the **App Store** and open the **Updates** tab. Tap **Update** for the **NetSuite SuiteCommerce InStore** app.

4. Ensure that automatic updates are disabled:
  - a. Go to Settings > iTunes & App Store > Automatic Downloads.
  - b. Toggle off **App Updates**.

Steps might vary depending on your iOS version.

**Tip:** Automatic updates default to being enabled. You should ensure this setting is turned off.

5. Configure the SCIS for iOS mobile app:  
You must configure the mobile app before you use it the first time. See [Configuring the SCIS Mobile App](#).

## Downloading and Installing the Windows Mobile App

These steps describe how to add the SCIS for Windows mobile application to a Windows mobile device.

**Important:** The SCIS for Windows app must be installed individually for every Windows user that will use SCIS on a specific mobile device.

### To download and install the Windows mobile application:


1. If you're upgrading a device, uninstall the current SCIS for Windows mobile app from the tablet:
  - a. Go to the **Windows** menu.
  - b. Search for the **NetSuite SCIS for Windows** mobile app.
  - c. Hold your finger on the app or, if used, right-click your mouse.
  - d. Choose **Uninstall** from the menu.
  - e. If prompted, confirm that you want to uninstall the app.
2. Install the latest SCIS for Windows mobile app:
  - a. Go to <https://www.microsoft.com/store/apps/9N3N999ZJDPN> or search for **NetSuite** in the Microsoft Store.



- b. Click **Get** for the SCIS app. If prompted, choose **Open Microsoft Store**.

The installation will begin. Follow the next steps in the Microsoft Store.

3. Disable automatic app updates:
  - a. Click the ... (**See more**) menu in the top right of the Microsoft Store app.



- b. Select **Settings**.
  - c. Set **App updates** to **Off**. This setting applies to all apps downloaded from the Microsoft Store.
  - d. Close the **Microsoft Store**.
4. **Add a launch shortcut** (recommended):
 

The SCIS launch icon defaults to being available only through the Windows menu. You can help by using **Pin to taskbar** or **Create desktop shortcut**.
5. Configure the SCIS for Windows mobile app:
 

You must configure the mobile app before you use it the first time. See [Configuring the SCIS Mobile App](#).



**Important:** You should install and test a new update on one device before applying the release to all devices in your store. Be sure to test all peripherals, such as bar code scanners and receipt printers.

## Configuring the SCIS Mobile App



**Important:** Installation of the SCIS for iOS or SCIS for Windows mobile app is **required**.

This section provides instructions for configuring the SCIS for iOS or SCIS for Windows mobile app after installation. After you've installed the mobile app, you can set up Guided Access or Full Screen Mode. This is optional for iOS devices, but recommended for Windows devices. For more information, see [Setting Up Guided Access](#).

### To configure SCIS mobile apps on iPads and Windows tablets:

1. Launch SCIS on your tablet.
 

If you use an iPad, tap **Configure Account**, after the Welcome screen.
2. Log in to SCIS. Enter your login credentials.
3. If you have access to more than one NetSuite account with SCIS installed, you can access any of those accounts. Choose an account.
4. Choose a role that is capable of configuring devices, such as the Administrator role.
5. On the next screen, the **Device ID** is automatically configured. Enter the internal website ID for your **SCIS Website**.
 

To find this ID:

  - a. Log into NetSuite.
  - b. Go to Commerce > Websites > Website Lists.
  - c. Click **Edit** for the website you'll use with the point-of-sale mobile device.

- d. View the URL (web address) in your browser's address bar. The internal website ID is the digit or digits at the end, after **n=** or **id=**.
  - e. Click **Cancel** to exit the Website Setup page.
6. Choose the following configuration settings based on the operating system on your tablet:
- **iOS devices:**
    - Guided Access – Optional.
    - Printing Technology – Choose Airprint.
  - **Windows devices:**
    - Assigned Access – An administrator can configure assigned access to limit an existing user account to use only SCIS. Refer to Microsoft Docs for configuration steps. This is best practice.



**Note:** Ensure that peripherals used by the Windows device are installed **after** the SCIS for Windows application is configured on the device, but **before** the device is placed in Assigned Access mode. You may not be able to access certain websites for driver installation when the device is in Assigned Access mode.

- **Printing Technology** – Select **Star** or **Epson**, depending on the printer you'll use with this device. Note that AirPrint isn't supported on Windows devices using SCIS.



**Important:** You must download the appropriate drivers for your printer on the mobile device to use Star native printing. To learn which printers are supported, see [Compatible Peripherals](#).

- 7. Click **Done**.

When you click **Done**, an SCIS Mobile Device record is created in NetSuite, configured for Production.

Device configuration is now complete and you're redirected to the SCIS login screen. Log in using your existing credentials to access SCIS. Next, set up your printing preferences. For more information, see [Setting Up Receipt Printers for SCIS](#).

## Setting Up Guided Access

You can enable **Guided Access** on an iOS tablet or a Windows tablet. Guided Access is a type of “kiosk” view, which keeps the device in a single application and prevents unauthorized use of additional applications on the device. Guided access is optional for using SCIS for iOS, but you should enable guided access when using SCIS on Windows.

The steps here cover Guided Access for iOS tablets. Review your Windows tablet documentation for the Windows steps.

Before placing the device in Guided Access mode and handing it over to a sales associate, install any required peripherals. Check the manufacturer's handbook for specific setup requirements for peripherals. For more information, see [Compatible Peripherals](#).


### To set up Guided Access on an iOS device:

1. Tap **Settings** > **General** > **Accessibility**.
2. Scroll to **Learning** > **Guided Access**.
3. Switch **Guided Access** to on.
4. Tap **Passcode Settings** and enter a four-digit pin code.



**Note:** Don't use obvious pin codes such as "0000", "1234", or any known dates or the main device Pin code.

5. Press the home button.
6. Launch the SCIS for iOS app.
7. Triple-click the home button.
8. Tap **Options** on the Guided Access set up screen.

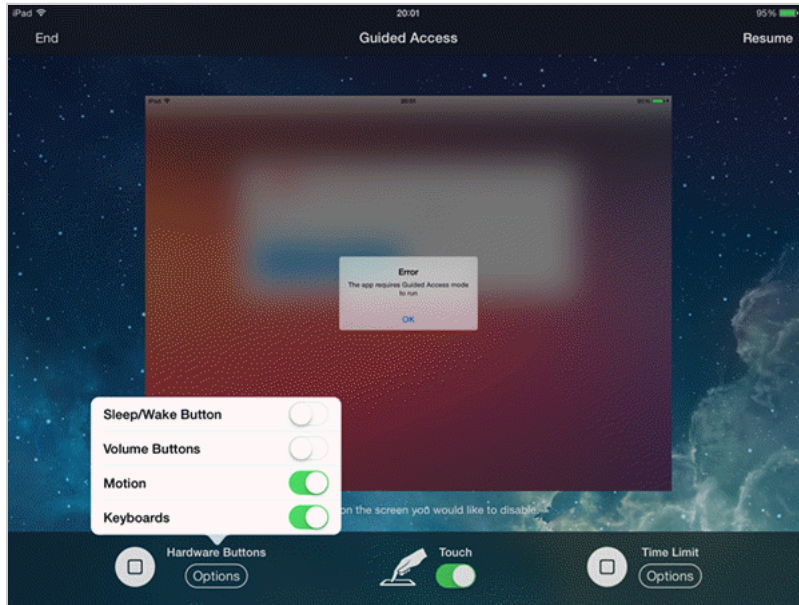

9. Set the required options. Don't enable **Time Limit**.
10. Tap **Done** to save the Guided Access preferences.
11. Tap **Start** to begin Guided Access and lock the device to the SCIS for iOS app.
12. Triple-click the home button to end or reset options for the guided access session, you'll be prompted to enter your Guided Access pin.

After you've finished these steps, the device is ready for the sales associate to use. Upon launching the app, the user is prompted to enter their usual SCIS login and passcode.

## Setting Up Mobile Certificates and a Domain Safelist for SCIS

The SCIS Mobile Certificates and SCIS Domain Safelist custom records are installed by the SuiteCommerce InStore SuiteApp. Administrators can add or remove values from the default settings on these records

as needed. For example, as certificates expire, administrators will need to periodically manage updates to the domain and certificates records. Also, you might need to add a domain to the safelist so that sales associates can visit an approved website.

See the following topics for more information and detailed instructions:

- [SCIS Mobile Certificates](#)
- [SCIS Domain Safelist Record](#)

## SCIS Mobile Certificates

SuiteCommerce InStore (SCIS) installs a set of records called **SCIS Mobile Certificates**. These custom records store authorizing certificates for domains associated with your implementation of SCIS. A standard set of certificates is created when SCIS is installed in your account.

An important administrative task when using SCIS is maintaining the list of SCIS Mobile Certificates. Administrators will need to modify existing SCIS Mobile Certificates periodically to update certificate fingerprints that go out of date.

See the following topics to learn how to add a new SCIS Mobile Certificate record, how to obtain a current certificate fingerprint, and how to update SCIS Mobile Certificate records for account-specific domain capabilities:

- [Updating SCIS Mobile Certificates](#)
- [Adding a Mobile Certificate Entry](#)
- [Obtaining Domain Fingerprints for SCIS Mobile Certificates](#)


## Updating SCIS Mobile Certificates

An important administrative task when using SuiteCommerce InStore (SCIS) is maintaining the list of SCIS Mobile Certificates. When a certificate expires, an administrator must modify the corresponding SCIS Mobile Certificate record with an updated certificate fingerprint.

When a mobile certificate expires, SCIS for iOS displays a warning message during the login process. Sales associates can ignore the expired certificate warning and continue working.

### To update the certificate fingerprint:

1. Log in to NetSuite.
2. Go to Customization > List, Records & Fields > Record Types.
3. Click **Edit** next to the host domain named in the warning message. For example, in the following screenshot, the Fingerprint for host domain **system.na1.netsuite.com** must be updated.

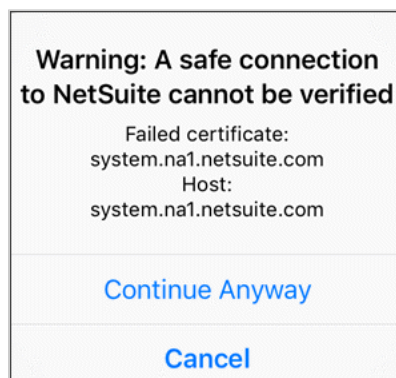

4. Under the **Certificate Fingerprint** field, enter the new Fingerprint.
5. Click **Save** when you're finished entering a new Fingerprint.

**Note:** After updating an SCIS Mobile Certificate record in NetSuite, log in to SCIS on the mobile device to refresh configuration settings.

## Adding a Mobile Certificate Entry

You may need to create a new entry in the list of SCIS Mobile Certificates records for SuiteCommerce InStore (SCIS). Creating a new entry may be required to store authorizing certificates for a new domain associated with SCIS. Follow these instructions.

### To create a new SCIS Mobile Certificate entry:

1. Go to Customization > Lists, Records & Fields > Record Types
2. Scroll to **SCIS Mobile Certificates** and click **New Record**.
3. Enter the domain in the **Name** field.
4. Copy and paste the fingerprint hash in the **Certificate Fingerprint** field.
5. Click **Save**.

## Obtaining Domain Fingerprints for SCIS Mobile Certificates

To obtain a domain Fingerprint when updating or creating an SCIS Mobile Certificate, you can use OpenSSL or find the Fingerprint in the Firefox browser information.

- [Using OpenSSL to Obtain a Domain's SHA-256 Fingerprint](#)
- [Using Firefox to Obtain a Domain's SHA-256 Fingerprint](#)

### Using OpenSSL to Obtain a Domain's SHA-256 Fingerprint

You'll need this fingerprint to paste into the Certificate Fingerprint field on the individual SCIS Mobile Certificate record. If you have OpenSSL installed, you can run the following command to return the domain fingerprint:

```
1 | openssl x509 -noout -fingerprint -sha256 -inform pem -in [certificate-file.crt]
```

### Using Firefox to Obtain a Domain's SHA-256 Fingerprint

Firefox (version 31 and higher) offers one of the most direct ways to obtain a domain's SHA-256 Fingerprint. You must paste this fingerprint into the Certificate Fingerprint field on the individual Mobile Certificate Record.

### To obtain a domain's SHA-256 fingerprint using Firefox:

1. Open Firefox and go to the required URL, for example system.netsuite.com.
2. Double-click the padlock icon in the address bar.
3. Click **More Information**.
4. Click **View Certificate**.
5. Under **Fingerprints**, copy the SHA-256 Fingerprint hash.

## SCIS Domain Safelist Record

The SCIS Domain Safelist record is a custom record installed by SuiteCommerce InStore (SCIS) to enable setting up a safelist. It contains a list of domains that can be accessed using the device running SCIS. These safelisted domains are global to your account, regardless of location or subsidiary. The following domains are required for SCIS to function properly.

 **Note:** After applying any configuration changes, including changes to the Domain Safelist, Certificates and Printer Settings, the user must log out and log in again to refresh the updated settings to the device. For changes to printer settings, the user must also select the printer again from the main menu in the SCIS for iOS app.

### To create a new entry to the SCIS Domain Safelist record:

1. Go to Commerce > InStore > Domain Safelist.
2. Click **New SCIS Domain Safelist**.
3. Enter the domain in the **Name** field.
4. Click **Save**.

Most of the following domains are added to the SCIS Domain Safelist record automatically. If there are domains in this list that don't appear in your account, you must add them.

#### Required Safelist Domains:

- forms.netsuite.com
- maps.google.com
- media.netsuite.com
- shopping.netsuite.com
- system.eu1.netsuite.com
- system.eu2.netsuite.com
- system.na1.netsuite.com
- system.na2.netsuite.com
- system.na3.netsuite.com
- system.netsuite.com
- www.google.com
- system.sandbox.netsuite.com

## Creating a Shortcut for the SCIS Mobile Device List

If you have multiple devices using SuiteCommerce InStore (SCIS), consider creating a shortcut for quick access to the SCIS Mobile Device list in your NetSuite account.

### To create a shortcut to the SCIS Mobile Device list:

1. Go to Commerce > InStore > Mobile Devices.
2. Click the **Add To Shortcuts** link in the Shortcut menu.

The Shortcut portlet on your dashboard shows a link to the list of mobile devices associated with your account.

## Setting Up SCIS Touch ID for iOS

To set up Touch ID for SuiteCommerce InStore (SCIS), you must ensure that Touch ID is already configured on the mobile device you're using for point-of-sale. The first time a sales associate logs in to SCIS, they must enter their email address and password. The login credentials are stored in the device, and then Touch ID can be used in the future for logging in.

### To set up SCIS for Touch ID login:

1. To set up Touch ID for SCIS, ensure that Touch ID is configured on the device.
2. Check the **Touch ID Login** box on the SCIS Login window.
3. The **Touch ID for SCIS** window appears. All fingerprints registered with Touch ID on this device will have full access to SCIS. If Touch ID isn't configured on the device, a popup alert appears indicating that setup is required.
4. If you have multiple roles with access to SCIS, you must choose a role.

After choosing a role, you can start using SCIS. Touch ID is configured and available on next login.

### To log in with touch ID:

1. Start the **SCIS** mobile application.
2. Tap your fingerprint on the **Touch ID for SCIS** prompt.
3. If you have multiple roles, you can choose the role you want to use to log in. If you only have one role, you're automatically logged in to SCIS.

### To turn off touch ID:

1. Start the **SCIS** mobile application.
2. Tap your fingerprint on the **Touch ID for SCIS** prompt.
3. Log in to SCIS.
4. In the **User Menu**, select **Remove Touch ID**.
5. Log out of SCIS.

After log out, Touch ID login to SCIS is no longer configured for that user.

### To update Touch ID when password changes:

1. Start the **SCIS** mobile application.
2. When the Touch ID for SCIS prompt appears, touch Cancel. If you use your fingerprint to access SCIS, you'll need to enter your login email address and correct password to view the SCIS cart.
3. In the SCIS login window, enter your login email address and new password.
4. The Password Update prompt appears. Touch your fingerprint to confirm password update. You're now logged in to SCIS.

If the fingerprint is valid, the old password is overwritten, and you can log in to SCIS. If the fingerprint isn't valid or is canceled, the password isn't updated, and you can't log in.

## Mobile App Testing for Operating System & Other Updates

This section describes testing SCIS after applying an update to a tablet's operating system. You should also run these tests after upgrading the SCIS mobile app.

Update one device, then run acceptance tests for your SCIS implementation. Ensure that you test any peripherals you use with SCIS, such as printers and barcode scanners.

If you encounter errors when running any of the acceptance tests, contact Customer Support.



**Important:** You must wait for a notification from NetSuite before you update the iOS version on your iPad or the SCIS for iOS mobile application. NetSuite sends a notification after new iOS updates from Apple have been tested on SCIS, and when an updated version of the mobile app is available.

### Acceptance testing for mobile app updates:

1. Test the device configuration.
    - a. Download the SCIS for iOS app or SCIS for Windows app on a device that hasn't yet been configured.
    - b. Follow the instructions on the configuration screen.
    - c. Check that you can successfully configure the device.
- 
- Note:** If the SCIS mobile app has been downloaded and installed on all devices, uninstall the mobile app on one device. Check that you can successfully configure the device.
2. Test the printer configuration. Run the following tests using the printer you configured for SCIS.
    - a. When you log in to the SCIS mobile app, select a printer from the menu. The following printer types are supported: Star, Epson, Airprint. If you use OPrint or Printopia, also test with these.
    - b. Enter a test transaction. Add an item to the cart, and then process a payment.
    - c. Print the receipt.
    - d. Check the receipt is printed as expected.
  3. Test a barcode scanner:
    - a. Connect a barcode scanner to the device running SCIS.
    - b. Log in to SCIS.
    - c. Scan a barcode.
    - d. Check that the corresponding item is added automatically.
    - e. Process a test payment.
    - f. Print the receipt.
    - g. Check the receipt is printed as expected.
  4. Test cash drawer operations:
    - a. Connect a cash drawer to a printer.
    - b. Log in to SCIS.
    - c. Perform a cash sale, or perform another drawer operation, such as an Initial Loan or End of Day transaction.
    - d. Check that the cash drawer opens automatically.
  5. Test fingerprint or Touch ID (iOS mobile app):
    - a. On the iPad, go to System Settings. Add a fingerprint in Touch ID & Passcode.
    - b. Open SCIS and check the Touch ID box on the login screen.
    - c. Log in to SCIS.

- d. Log out of SCIS.
- e. Log in to SCIS a second time.
- f. Check that the Touch ID option populates the email and password automatically.

 **Note:** For more information about configuring Touch ID for SCIS, see [Setting Up SCIS Touch ID for iOS](#).

## Working with SCIS on Sandbox

You can use SuiteCommerce InStore (SCIS) on your sandbox account to test changes to your SCIS implementation. Before you start, you must already have access to a sandbox account.

To configure a mobile device to access your sandbox account, you must complete some configuration steps in NetSuite and on the mobile device. You must define the file permissions for **config-setup-step2.ssp** within the SuiteCommerce InStore SSP Application. Then change the device ID status to Trusted.

 **Note:** For information about acquiring one or more sandbox accounts, contact your NetSuite account representative.

The following instructions assume you're using **SCIS 2017.2.7** or later.

### To set the permissions for the config-setup-step2.ssp file:

1. Log in to your sandbox account on a computer, with the **Administrator** role.
2. Go to Commerce > Hosting > SSP Applications.
3. Find **SuiteCommerce InStore** and click the Application Folder.
4. Click **Edit** next to **config-setup-step2.ssp**. Under the **Permission** subtab set the following:
  - Check the **Enabled** box.
  - Set **Execute as Role** to **SCIS Support**.
  - Check the **Run Script Without Login** box.
  - For **Roles**, select **Administrator** and **SCIS Clerk**.
  - Check the box next to **All Employees**.
5. Click **Save**.

### To set the mobile device as trusted on your sandbox account:

1. On the **mobile device**, use the **Administrator** role to configure the device for your sandbox account.
  - a. After you're redirected to the SCIS Login page, try to log in.
  - b. An error message is displayed, "Invalid role or account device restrictions." The error indicates that the device ID is recognized, but the Status of the device is not Trusted.
2. On a computer, log in to your sandbox account as an administrator to change the Status for the device.
  - a. Go to Setup > Integration > Device ID. Find the device ID that is not trusted.
  - b. Change the **Status** to **Trusted**.
3. On the mobile device, log in to SCIS again, using your **SCIS Clerk** role. (This step will set the configuration in the mobile app.)

- You're directed to log in again, and after that you'll be on SCIS Sandbox.

**Note:** Each time you refresh your sandbox account, you must repeat this procedure to access SCIS for Sandbox on mobile devices. No change is required in your production NetSuite account.

## Configuring Search Fields and Field Sets


SuiteCommerce InStore (SCIS) uses search fields and field sets to retrieve and display item information. The `NS_RP_ResetSearchFields.js` script is run automatically during the first installation of SCIS. However, if you create a second SCIS website, or if you make significant changes to your SCIS configuration, you may need to use the following steps to configure or reset search fields and field sets.

### To configure search fields and field sets for SuiteCommerce InStore:

- Copy the script displayed in the **NS\_RP\_ResetSearchFields.js** file in the NetSuite file cabinet at Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore > scripts.

| EDIT | INTERNAL ID | NAME                                    |
|------|-------------|-----------------------------------------|
| View | 28214       | NS_RP_PosDynamicServerValidation.js     |
| View | 28270       | NS_RP_POSPermission_ServerValidation.js |
| View | 28267       | NS_RP_Printer_ServerValidation.js       |
| View | 28213       | <b>NS_RP_ResetSearchFields.js</b>       |
| View | 28212       | NS_SF_SS_Post_Install.js                |

- Edit the **siteID** and the **debug** setting in the setup script.
  - Set the value for **debug** to **true**.
  - Use the ID for your SCIS website. You can see the site ID in the address bar of your browser when the Web Site Setup page is in Edit mode.



**Important:** Change `debug: false` to `debug: true` so the script will run in the debugger. You must change the value for **siteID** in the setup script to the internal ID for **your** SCIS website.

- Go to Customization > Scripting > Script Debugger.
- Enter the SuiteScript Debugger domain (by clicking the link as indicated) and then re-enter your login credentials if prompted.
- Set the **API Version** to 1.0.
- Paste the script code into the debugger. Ensure the **siteID** is the one for your SCIS website.
- Click **Debug Script** and then click **Continue**.

To view a list of SCIS installation tasks, see the help topic [SuiteCommerce InStore Installation](#).

## Troubleshooting Your SCIS Installation

This section includes information about resolving common errors in SuiteCommerce InStore (SCIS) setup and configuration.



**Note:** If you choose to uninstall the SuiteCommerce InStore SuiteApp, some records that were added to your NetSuite account on the first installation will remain in the system. If you choose to uninstall or remove the SuiteApp, and then install it again, you must select the option to replace the records during the latest installation process.

| Error Message                                                                                                                                                                | Problem/Cause                                                                                                                       | Solution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Script Execution Usage Limit Exceeded                                                                                                                                        | Searches for transaction record document numbers can exceed script execution usage limits.                                          | Go to Setup > Company > Auto-Generated Numbers. Click <b>Document Numbers</b> . You can enter a prefix for Cash Sale, Estimate, Sales Order and Invoice. In SCIS a search can occur for any of these transactions.<br><br>For example, enter the prefix, "CASHSALE" for cash sale transactions.                                                                                                                                                                                                                                                                                                  |
| Internal error: Must identify a region associated with this site                                                                                                             | The subsidiary associated with the logged-in employee isn't marked as online.                                                       | Go to Commerce > Websites. Click the <b>Setup</b> subtab. At the bottom of the page, mark the appropriate subsidiary online.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| There is an internal error                                                                                                                                                   | Items aren't displayed in SCIS. GET request returns a 500 Internal Server Error.                                                    | Rebuild the Search Index. Go to Commerce > Websites. Click the <b>Actions</b> menu, and then select <b>Rebuild Search Index</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                              | Sales associate isn't able to log in. After a managed SuiteApp update, the SCIS Clerk role may be removed from the employee record. | Go to Lists > Employees. Click Edit next to the employee record. Click the Access tab. Reset the role on the employee record.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| An nlobjSearchColumns contains an invalid column join ID, or is not in proper syntax: custrecord_ns__pl_plip_value                                                           | The Product List SuiteApp isn't updated on the account.                                                                             | Go to Customization > SuiteBundler > Search & Install Bundles > List. Click the Action icon to update your version of the Product List SuiteApp.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| The record type [CUSTOMRECORD_NS_POS_GATEWAY] is invalid.<br><br>The Credit Card Payment couldn't be processed. Please check your credit card details provided and try again | The custom record referenced in the error has been deprecated.                                                                      | Go to Customization > SuiteBundler > Search & Install Bundles > List. Click the Action icon to update your version of SCIS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Invalid shippingtaxcode reference key -7 for shipaddress                                                                                                                     | Each time an item is added to the cart, the error is shown. This is because the <b>-Not Taxable-</b> tax code is inactive.          | To resolve the error, review the following settings:<br><ul style="list-style-type: none"><li>Ensure the shipping items are assigned to the SCIS site.<br/>Go to Customization &gt; Lists, records, &amp; Forms &gt; Record Types. Find <b>SCIS Settings</b>, and then click List in that row. Edit the SCIS Location record for that location. Select <b>SCIS Shipping Methods</b>.</li><li>Set the <b>-Not Taxable-</b> tax code as active.<br/>Go to Setup &gt; Accounting &gt; Tax Codes. Mark the <b>Show Inactives</b> box. Clear the inactive box next to <b>-Not Taxable-</b>.</li></ul> |

| Error Message                                      | Problem/Cause                                                                                                 | Solution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                    |                                                                                                               | <ul style="list-style-type: none"> <li>Ensure that accounting periods have been set for the current fiscal year.</li> </ul> <p>Go to Setup &gt; Accounting &gt; Manage Accounting Periods. Set accounting periods for the current fiscal year.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Invalid account reference key 123 for subsidiary 1 | The SCIS Store Safe Account used in the sales associate's location doesn't have the subsidiary set correctly. | <p>To resolve the error:</p> <ol style="list-style-type: none"> <li>1. Check the location on the employee record for the sales associate.</li> <li>2. Check that the location on the employee record matches the location for the subsidiary named in the error (check the ID for the subsidiary, for example, id=1).</li> <li>3. Check that the subsidiary on the account you use for the <b>SCIS Store Safe Account</b> is also the same.</li> </ol> <div>  <b>Note:</b> SCIS Store Safe Account is set on the Location record.                 </div> <ol style="list-style-type: none"> <li>a. Go to Setup &gt; Company &gt; Locations. Make a note of the SCIS Store Safe account assigned to the location.</li> <li>b. Go to Setup &gt; Accounts &gt; Chart Of Accounts.</li> <li>c. Find the account you selected as the SCIS Store Safe Account. For example, this could be the Petty Cash account.</li> <li>d. Edit the account record and select the subsidiary.</li> </ol> |
| Cannot read attributes of undefined                | The <b>roundItemId</b> is missing from CustomConfiguration.js                                                 | <p>If you installed SCIS prior to the 2016.1.0 release, you must also update the CustomConfiguration.js file to support currency rounding capabilities introduced in SCIS 2016.1.0. Search for <b>ns_pos_rounditem</b> in NetSuite, and then add</p> <pre>1   roundItemId: 0,</pre> <p>to the CustomConfiguration.js file, under the voidItem definition.</p> <p>Replace 0 with the ID for the item in your account. For more information, see <a href="#">Setting up Currency Rounding for SCIS</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

| Error Message                                                                                                                                                                                                                                                                | Problem/Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Solution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Error: Please enter value(s) for:<br>Account                                                                                                                                                                                                                                 | <p>This error can be displayed during an initial loan or end of day transaction entered in SCIS. The problem could be any of the following:</p> <ul style="list-style-type: none"> <li>■ Cash Drawer account isn't set correctly in SCIS User Settings.</li> <li>■ <b>SCIS Store Safe Account</b> and <b>SCIS Cash Drawer Difference Account</b> aren't set on the location record.</li> <li>■ The subsidiary setting on the SCIS Store Safe Account doesn't match the location.</li> </ul> | <p>Review the following settings:</p> <ul style="list-style-type: none"> <li>■ Go to Customization &gt; Record Types &gt; SCIS User Settings. Set the correct cash drawer account for the employee.</li> <li>■ Check the location record for the store. Verify that there's a value for <b>SCIS Store Safe Account</b> and <b>SCIS Cash Drawer Difference</b>.</li> <li>■ Check the Chart of Accounts to verify that the subsidiary on the account selected as the SCIS Store Safe Account and the SCIS Cash Drawer Difference have the same subsidiary as the location.</li> </ul> |
| Please enter a value for amount                                                                                                                                                                                                                                              | <p>This error occurs because the price of the item wasn't entered for the currency used in the order.</p>                                                                                                                                                                                                                                                                                                                                                                                   | <p>To resolve this error, go to Lists &gt; Accounting &gt; Items. Click Edit next to the item, and then enter prices for each currency on the <b>Sales/Pricing</b> subtab.</p>                                                                                                                                                                                                                                                                                                                                                                                                      |
| Invalid taxcode reference key 115 for subsidiary 6                                                                                                                                                                                                                           | <p>This error occurs because the tax code for sales on the tax schedule was set incorrectly for the country where SCIS is being used.</p>                                                                                                                                                                                                                                                                                                                                                   | <p>To resolve the error:</p> <ol style="list-style-type: none"> <li>1. Setup &gt; Accounting &gt; Tax Codes.</li> <li>2. Click <b>Edit</b> next to the tax code associated with the region where the order is being entered in SCIS.</li> <li>3. In the <b>Available On</b> list, ensure that <b>Sales Transactions</b> or <b>Both</b> is selected.</li> <li>4. Click <b>Save</b>.</li> </ol>                                                                                                                                                                                       |
| <p>Insert transaction failure: No valid, open, tax period for date – 4/22/2016. Please visit setup &gt; manage tax periods to set up a new tax period.</p> <p>Your payment couldn't be processed. Please review the amount entered and the order details, and try again.</p> | <p>If this error occurs, it'll be displayed instead of the receipt popup window after a payment is made on an order. The problem is that the tax reporting period doesn't exist.</p>                                                                                                                                                                                                                                                                                                        | <p>To resolve the error, go to Setup &gt; Accounting &gt; Manage Tax Reporting periods. Set up tax reporting periods as needed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| An nlobjSearch Filter contains an invalid operator or is not in proper syntax: upccode                                                                                                                                                                                       | <p>After the sales associate adds a line level discount, this error can appear in the Enter Access Code popup window.</p>                                                                                                                                                                                                                                                                                                                                                                   | <p>Check that the discount item has the location and subsidiary set properly. Both location and subsidiary must match the settings on the sales associate's employee record and the SCIS settings record.</p>                                                                                                                                                                                                                                                                                                                                                                       |
| <p>An unexpected error occurred. Please go back and try again.</p> <p>invalid property id (CustomConfiguration.js#414)</p>                                                                                                                                                   | <p>This error can appear while performing any action in SCIS. It happens because of an error in the CustomConfiguration.js file.</p>                                                                                                                                                                                                                                                                                                                                                        | <p>To resolve the error, check any changes made to the CustomConfiguration.js file following installation of the SCIS SuiteApp. Double-check any customizations.</p>                                                                                                                                                                                                                                                                                                                                                                                                                |

| Error Message                                                                                                                                                                     | Problem/Cause                                                                                                                                                                                                                                                                                                                                                                                          | Solution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enter only numeric characters                                                                                                                                                     | <p>This error appears in the Cash Payment popup window after adding an item to the order and clicking on a Cash Denomination. It typically happens in accounts that use multiple currencies.</p> <p>The problem may be related to the configuration of the currency record in NetSuite.</p>                                                                                                            | <p>To resolve the error:</p> <ol style="list-style-type: none"> <li>1. Go to Lists &gt; Accounting &gt; Currencies.</li> <li>2. Click Edit next to the currency that displayed the error.</li> <li>3. Check the <b>Override Format</b> check box.</li> </ol>                                                                                                                                                                                                                                             |
| Invalid Number undefined                                                                                                                                                          | <p>This error occurs when attempting to initiate a customer return from the customer profile page.</p> <p>The problem is that the saved search, <b>SCIS Transactions Details</b> was modified, removing the ID and some required fields.</p>                                                                                                                                                           | <p>Don't modify the <b>SCIS Transactions Details</b> saved search.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Invalid taxcode reference key undefined for subsidiary 13                                                                                                                         | <p>This error typically occurs in accounts that use multiple currencies with SCIS.</p> <p>The CustomConfiguration.js file must contain an ID for the non taxable tax group record associated with each currency in which you transact. Note that you must create a zero percent (0.0%) tax group for each region. For more information, see <a href="#">Setting up Currency Rounding for SCIS</a>.</p> | <p>To resolve the problem:</p> <ol style="list-style-type: none"> <li>1. Go to Commerce &gt; Hosting &gt; Website Hosting Files&gt; Live Hosting Files &gt; SSP Applications &gt; NetSuite Inc. - POS &gt; SuiteCommerce InStore.</li> <li>2. Click <b>Edit</b> next to CustomConfiguration.js.</li> <li>3. Add IDs for the tax groups you want to use for calculating tax on transactions where rounding was applied. (Replace 0 with the ID for the applicable tax groups in your account.)</li> </ol> |
| <p>Couldn't add items.</p> <p>The following items couldn't be added.</p> <p>Item #: unknown error.</p>                                                                            | <p>This error occurs because the nonTaxableTaxCode is set incorrectly in the CustomConfiguration.js file. There must be a zero percent (0.0%) tax group for the country associated with the order.</p>                                                                                                                                                                                                 | <pre> 1   ,   nonTaxableTaxCodes: { 2       US: 0 3       ,   CA: 0 4       ,   AU: 0 5       ,   NZ: 0 6       ,   GB: 0 7       ,   SP: 0 8       ,   DE: 0 9       ,   FR: 0                     </pre>                                                                                                                                                                                                                                                                                               |
| <p>Invalid taxcode reference key undefined for subsidiary 6.</p> <p>Your payment couldn't be processed. Please review the amount entered and the order details and try again.</p> | <p>This error may appear instead of the receipt popup window, after a payment is entered. There must be a zero percent (0.0%) tax group for the country associated with the order.</p>                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <p>Configuration Error: Subsidiary on Employee and SCIS must match</p> <p>Must identify a region associated with this site</p>                                                    | <p>The Subsidiary selected on the Employee must match the Subsidiary on the website record.</p>                                                                                                                                                                                                                                                                                                        | <p>To resolve this error:</p> <ol style="list-style-type: none"> <li>1. Go to Lists &gt; Employees.</li> <li>2. Click Edit next to the employee in question.</li> <li>3. Note which Subsidiary is selected on the Employee record.</li> <li>4. Go to Commerce &gt; Websites</li> <li>5. Click <b>Edit</b> next to the SCIS website.</li> </ol>                                                                                                                                                           |

| Error Message | Problem/Cause | Solution                                                                                                                                                                                                                                                                  |
|---------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|               |               | <ol style="list-style-type: none"><li>6. Click the Setup subtab, and then scroll to the bottom of the page. Ensure that the same subsidiary is selected on the website and on the Employee record. If there are multiple subsidiaries, at least one must match.</li></ol> |

# SCIS Compatible Peripheral Hardware

This topic describes the peripheral hardware and set up procedures for devices common to SuiteCommerce InStore (SCIS) point-of-sale (POS) setups.

- [Compatible Peripherals](#)
- [Setting Up Receipt Printers for SCIS](#)
- [Setting up Barcode Scanners for SCIS](#)
- [Customer-facing Accessories](#)
- [Security For Your Peripheral Devices](#)

## Compatible Peripherals

These peripherals have been found to be compatible with SuiteCommerce InStore (SCIS). You should follow the installation procedures provided by your vendor.

- [Tablet Models](#)
- [Receipt Printers](#)
- [Barcode Scanners](#)
- [Cash Drawers](#)

## Tablet Models

These Windows<sup>®</sup> and Apple<sup>®</sup> tablet models are compatible with SCIS:

| Compatible Models             | Operating System  |
|-------------------------------|-------------------|
| Surface Pro 5.x and later     | Microsoft Windows |
| iPad Generation 5.x and later | Apple iOS         |

SCIS for iOS or SCIS for Windows application is required for use with these tablets. For more information, read [SCIS for iOS \(iPadOS\) and SCIS for Windows Mobile Applications](#).



**Important:** Ensure that unauthorized individuals do not have access to a tablet running SCIS. Note that the definitions for client-side security measures are stored in a local configuration file on the device.

## Receipt Printers

The following printers are compatible with SCIS:

| Brand    | Model    |
|----------|----------|
| AirPrint |          |
| Star LAN | TSP650II |
|          | TSP700II |

| Brand           | Model                |
|-----------------|----------------------|
|                 | TSP143III LAN        |
|                 | TSP100III            |
| Star WLAN       | TSP143IIIW           |
| Star Bluetooth  | TSP700II             |
| Epson Bluetooth | TM-T88V              |
| Epson LAN       | TM-T88V-i            |
| HP              | HP LJ Pro MFP M127fn |



**Important:** For Star and Epson network printers that have a static IP or a domain name assigned, Advanced Cash Management is compatible only with two or more printers of the same brand and model per location.

## Barcode Scanners

The following scanners are compatible with SCIS:

| Brand         | Model                                  |
|---------------|----------------------------------------|
| Socket Mobile | CHS 7Ci (Discontinued by manufacturer) |
|               | CHS 8Ci (Discontinued by manufacturer) |
|               | CHS 7Qi                                |
|               | S700: CX3397-1855                      |
|               | S740: CX3447-1910                      |
|               | S800: CX2881-1476                      |

To complete installation, follow instructions provided by the vendor of each device. For additional setup steps, read [Setting up Barcode Scanners for SCIS](#).

## Cash Drawers

The following cash drawer models are compatible with SCIS:

| Brand        | Series           | Model                                                                                                                              |
|--------------|------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Birch/Firich |                  | POS-203 6P24V, RJ12                                                                                                                |
| APG          | Vasario Series   | Drawer: P/N: VBS320-BL1616<br>Cable: APG CD-101A Printer Cable                                                                     |
| MMF          | Advantage Series | Drawer: P/N: ADV113B11331004<br>Cable included: 226199EPST1000 KwickKable RJ12 Data Transfer Cable for Star and Epson POS Printer. |

| Brand | Series     | Model                                                          |
|-------|------------|----------------------------------------------------------------|
|       | Value line | Drawer: PN: MMF-VL1616E-04<br>Cable included: 226-199EPSN10-00 |

The cash drawer is identified based on your printer technology setting on the SCIS Mobile Device record.

Your setting on each SCIS Payment Method record defines whether or not the cash drawer opens automatically. The cash drawer opens based on the SCIS Payment Method used to pay for the order. Sales associates can also open the cash drawer by selecting the **No Sale** option in the User Menu.

## Setting Up Receipt Printers for SCIS

The SCIS for iOS application or SCIS for Windows application must be installed before completing receipt printer setup. To view a list of compatible printers, read [Receipt Printers](#). For more information on installing the SCIS for iOS or SCIS for Windows application, read [SCIS for iOS \(iPadOS\) and SCIS for Windows Mobile Applications](#).

SCIS renders printed receipts using the Advanced HTML/PDF Template feature in NetSuite. SCIS interacts directly with the printer. If you use AirPrint, your iOS device automatically recognizes accessible printers. If you use StarPrint, the SCIS for iOS application and SCIS for Windows application allows discovery of accessible printers.

To complete printer setup for SCIS, you must configure printer settings on the **SCIS Settings** custom record. Here you can choose to use automatic printing, so that receipt printing is automatically initiated when an order is submitted. You can also set the paper size for specific printers or use default paper size settings.

### To set up printing for SCIS:

1. Ensure that **Printing Technology** is properly set on the **SCIS Mobile Device** record, at Customization > Lists, Records & Fields > Record Types > SCIS Mobile Device.
2. Go to Customization > Lists, Records & Fields > Record Types > SCIS Settings.
3. Click **Edit** next to the **SCIS Settings** record you want to modify. Location-specific printing settings are applied to SCIS, based on locations, websites, and subsidiaries defined on the **Filters** subtab.

**Note:** SCIS sets default paper sizes that you can change as needed

4. Click the **Printing** subtab. Here, you can enable the automatic printing capability, as well as define printer name and paper size for each printer.
5. Set the following fields as needed:
  - **Airprint Default Paper Size** – (Required) Select the paper size. Accept the default setting if you do not use Airprint.
  - **Star Default Paper Size** – (Required) Select the paper size. Accept the default setting if you do not use a Star printer.
  - **Epson Default Paper Size** – (Required) Select the paper size. Accept the default setting if you do not use an Epson printer.
  - **Auto-Print Sales Receipts** – Check this box to print sales receipts automatically, when the sales associates submits an order.
  - **Auto-Print Return Receipts** – Check this box to print return receipts automatically.
6. Click a sublist to set preferences for your printer.



- **SCIS Printing Settings (AirPrint)**



**Important:** AirPrint is not compatible with Windows devices.

- **SCIS Printing Settings (Star)**

- **SCIS Printing Settings (Epson)**

7. Click **New Printing Settings** to enter the printer name and select the paper size.

- **Name** – The Name of the printer should be exactly the same name that the printer already has set in the network.

Note this example of a description based on compatible printers: **Star TSP650**

- **Paper Size** – Select the paper size. SCIS is only compatible with the following configurations:

- For AirPrint: **A4** or **Letter**.
- For Star and Epson printers: **2 inches** or **3 inches**



**Important:** Do not enter new paper sizes.

8. Click **Save** on the SCIS Settings record.

## Setting up Barcode Scanners for SCIS

You can use a barcode scanner with SuiteCommerce InStore (SCIS) whether you use an iOS or Windows tablet. This section includes detailed steps for setting up a scanner with SCIS for iOS, and pairing a scanner on a Windows device.

- [SCIS Compatible Peripheral Hardware](#)
- [Setting up a Barcode Scanner on an iOS Device](#)
- [Pairing a Barcode Scanner for Use with SCIS for Windows](#)



**Important:** Serial Port Profile (SPP) mode is required for using barcode scanners with SCIS.

## Setting up a Barcode Scanner on an iOS Device

The SCIS for iOS application or SCIS for Windows application must be installed before completing barcode scanner setup. To view a list of compatible barcode scanners, read [Barcode Scanners](#).

The following procedure describes the basic requirements for pairing your Bluetooth<sup>®</sup> scanner for use with SCIS for iOS. Consult your manufacturer's handbook for specific setup requirements of your scanner. SCIS for iOS includes native compatibility for barcode scanner pairing.

To set up a barcode scanner for use with SCIS for Windows, read [Pairing a Barcode Scanner for Use with SCIS for Windows](#).

### To setup a Bluetooth scanner for use with SCIS for iOS:

1. Check to see if the scanner has already been paired to the device in the iOS settings menu.
2. Click Settings > Bluetooth.
3. Unpair the connection by tapping **forget this connection** on the iPad.

4. Restore the scanner to its factory default setting by scanning the following barcode. After scanning, the barcode scanner will turn off. Refer to manufacturer's instructions if you need more information.



5. Power the scanner on.
6. Place the scanner in iOS mode (or SPP mode) by scanning the following barcode. Refer to manufacturer's instructions if you need more information.



**Important:** SuiteCommerce InStore for iOS is compatible with the scanner in **iOS or SPP Mode** only. HID mode is not compatible.

7. In the iOS settings menu, establish a new pairing with the scanner.
8. After the scanner has been paired, log in to the SCIS app.
9. After logging in to the home dashboard of the app, you will receive an audible alert from the scanner to confirm connection.

## Pairing a Barcode Scanner for Use with SCIS for Windows



**Important:** SCIS for Windows requires barcode scanners to be configured in **Application Mode**. This is essential for compatibility. The configuration process depends on the scanner model and is documented by the device manufacturer. Most supported scanners can be configured using the **Socket Mobile Companion App**.

The SCIS for Windows application must be installed and closed before setting up your barcode scanner.

The following procedure assumes you are using a barcode scanner that's compatible with SCIS. View the [Compatible Peripherals](#) for more information.

Refer to your scanner's manual to complete the setup and enable **Application Mode**. The exact steps may vary by model.

After the scanner is paired and configured:

1. Launch SCIS for Windows.
2. Log in.

3. Scan a barcode to begin adding items to the cart.

## Customer-facing Accessories

Some retailers mount their SuiteCommerce InStore (SCIS) tablets on swivel stands or similar accessories that can rotate the display to face the customer.

This accessory type is helpful for customers who want to review the prices and discounts shown in the cart, before beginning the payment steps. The sales associate can turn the display at the customer's request.

 **Warning:** You should not “mirror” the display used by the sales associate. Replicating your sales associate's display for the customer could expose information that should be kept secure and confidential.

For example, some tablets will briefly display each character of a password as it is entered.

## Security For Your Peripheral Devices

In addition to maintaining security for your applications through updates and monitoring, you should ensure the security of your peripheral devices. The following are guidelines to help with this task.

### PCI-Compliant Wireless and Bluetooth Settings

The wireless communication channel — either Wi-Fi or Bluetooth — should be secured using strong cryptography.

#### Strong Cryptography

Use cryptography that's based on industry-tested algorithms, strong key lengths (at least 112 bits), and good key management practices. Cryptography helps protect data and includes both encryption (which you can reverse) and hashing (which you can't, since it's one way). Some examples of industry-tested and accepted standards and algorithms for minimum encryption strength include AES (128 bits and higher), TDES (minimum triple-length keys), RSA (2048 bits and higher), ECC (160 bits and higher), and ElGamal (2048 bits and higher). See NIST Special Publication 800-57 Part 1 (<http://csrc.nist.gov/publications/>) for more guidance on cryptographic key strengths and algorithms.

SCIS is compatible with various wireless technologies, and the wireless networking device(s) chosen can vary. Always follow your wireless vendor's security guidance, and make sure you confirm the following steps wherever possible, as required by PCI DSS 3.2.1 (requirements 1.2.3, 2.1.1, 4.1.1, and 11.1):

- 1.2.3: You must install perimeter firewalls between any wireless networks and systems that store cardholder data. These firewalls should block or control any traffic from the wireless network into the cardholder data environment, unless it's needed for business..
- 2.1.1: You can't do the tasks below in SCIS, but you can do them on devices that work with SCIS. Follow your vendor or manufacturer's advice to change wireless defaults as described in these five points:
  1. Change encryption keys from the default when you install the device, and anytime someone with access to the keys leaves the company or changes roles.
  2. Change the default passwords and passphrases on access points.
  3. Default passwords and passphrases on access points must be changed.

4. Firmware on wireless devices must be updated to support strong encryption for authentication and transmission over wireless networks.
5. Other security-related wireless vendor defaults, if applicable, must be
  - 4.1.1: Use industry best practices, like IEEE 802.11i, to set up strong encryption for authentication and sending cardholder data..
  - 11.1: Involves detecting and identifying wireless access points, specifically 802.11 devices. You need to check for and identify wireless access points at least every quarter. This applies to all locations, even if you don't use wireless tech there, since the goal is to find both authorized and unauthorized wireless access points.



**Note:** The use of WEP as a security control was prohibited as of June 30, 2010.

## Include Use of Secure Protocols

SCIS doesn't require any services and protocols that are not secured. The only required protocols are HTTPS and TLS 1.2.

## Physical Security

Include the following guidelines when ensuring the physical security of your peripheral devices.

- **Protect the mobile device from unauthorized attachments:** If an entry device, such as a card reader, is attached to the mobile device—whether the connection is physical or wireless—the device needs to identify itself uniquely to the mobile payment-acceptance application. This identification ensures that the correct entry device is paired to the correct mobile device.
- **Maintain a device inventory:** Track all devices used for payment transaction processing with their serial #, hardware #, and model #. You should have a process to detect and report if a mobile device is lost or stolen.
- **Prevent unauthorized logical device access:** Protect mobile devices from unauthorized logical-device access by using a lock screen with a password or PIN. Store devices in locked cabinets at the end of a business day or shift.

## Maintain an Information Security Program


Besides the security tips above, you need a thorough approach to keep your payment application environment secure and protect your organization and cardholder data.

# Performance Management and Tips for SCIS

This chapter provides information you can use to monitor, manage, and improve performance in your SuiteCommerce InStore (SCIS) environment.

- [Application Performance Management \(APM\) for SCIS](#)
- [Performance Tips using NetSuite Settings](#)
- [Performance Tips for using SCIS POS Devices](#)
- [Performance Tips for Network Resources](#)
- [Performance Tips for Scripts and Workflows](#)
- [Performance Tips for using Third-Party SuiteApps](#)

The topics include settings/areas to be monitored and adjusted by the administrator and guidelines the administrator can pass to store managers and sales associates.

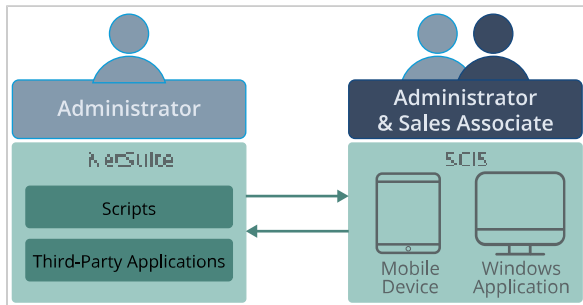

## Application Performance Management (APM) for SCIS

SuiteCommerce InStore Application Performance Management (SCIS APM) is a SuiteApp that you can install in your NetSuite account. It shows detailed information about SuiteCommerce InStore (SCIS) performance. You can filter the information to see performance data based on particular devices running SCIS, retail locations, or subsidiaries.

Administrators can use SCIS APM to identify customizations, such as user event scripts and workflows that affect SCIS performance. With that information, administrators can modify settings in SCIS for better performance or work with their in-house development team to optimize long-running scripts.

For more information, see the help topic [Application Performance Management \(APM\) for Commerce](#)

## Performance Tips using NetSuite Settings

These topics cover SuiteCommerce InStore (SCIS) performance adjustments to be made in NetSuite by users having an administrator role.

### Searches

- [Clear the option to Search for Transaction by Serial Number](#)

- Require searching for Transactions Using Exact Match
- Ensure Custom Searches are Efficient
- Remove any Filters not needed in Customer Searches

#### Forms

- Keep Transaction and Entry Forms Minimal

#### Images

- Compress your Images
- Use Image Resizing aliases in the Web Site Setup record

#### Promotion and Payment Processing

- Auto-apply Promotions and SCIS
- Item Saved Search for Promotion Eligibility
- Customer Group Saved Search for Promotion Audience Eligibility
- Optimize EMV
- Disable Bill Costs to Customers Feature
- Cancel or Close Out-of-Date Open/Tendering Transactions

#### Receipts

- Auto-Print Receipts

## Searches

The following settings can boost performance when sales associates and other users perform a search in SCIS. The tips are helpful for all search types, including searches for items, customers and transactions.

### Clear the option to Search for Transaction by Serial Number

This search option is disabled (cleared) by default. When enabled, the option expands the criteria for searching past transactions to include a transaction item's lot number or serial number. However, it can slow your search performance.

This additional criteria is only needed if you usually locate transactions by serial item. If searching by serial item is not common in your stores, you should avoid enabling it. In addition to requiring extra resources for transaction searches, the option increases overhead when looking up items and customers.

#### To clear the Search for Transaction by Serial Number option:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Locate the **SCIS Settings** record and click **List**.
4. Click **Edit** and open the **Order** subtab.
5. If checked, clear the **Search for Transaction by Serial Number** box.
6. Click **Save**.

For more information, see [SCIS Settings for Orders](#).

## Require searching for Transactions Using Exact Match

Searching for a transaction using the default “global” search is the least efficient way to locate a transaction. A global search only needs the first few characters of the Transaction ID, such as the prefix, but the search can return too many results to make it useful during a customer transaction. An “exact match” search requires entering the complete Transaction ID, but it displays only the desired transaction. Although it takes additional effort to enter an entire ID, the user time saved by doing so can be significant.

In addition, the system time used for a global search is much greater than the system time used for an exact match search. The increased overhead incurred by global searches can affect performance for item and customer searches.

### Guideline

Use your transaction volume as a guideline on whether to allow searching using a few characters or require entering the complete Transaction ID. The more transactions a NetSuite account has, the greater the overhead needed to search using only a few characters.

### Alternatives to Transaction Searches

Regardless if a search uses global or exact match requirements, a typical search needs user time to enter the Transaction ID (partial or full), system time to locate the transaction, and user time to find the transaction within the results. The following methods can provide results faster than using searches:

- If the transaction has a receipt, locate the transaction by scanning the receipt barcode.
- If a transaction occurred recently, use the Transaction History.

### To require that Transaction Searches use Exact Match:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Locate the **SCIS Settings** record and click **List**.
4. Click **Edit** and open the **Order** subtab.
5. Check the **Search Transaction Using Exact Match** box.
6. Click **Save**.

For more information, see [SCIS Settings for Orders](#).

## Ensure Custom Searches are Efficient

Custom searches often use many resources and can slow your SCIS performance. For example, a custom search could provide too many results or display results that include details that you do not need. Ensure your custom searches only query the NetSuite backend for information that is essential to your needs. The more specific and unique a search is, the faster it can return results.

For more information, see [Modifying Included Saved Searches](#). Also see [Customizing the Configuration File](#).

## Remove any Filters not needed in Customer Searches

You can lower the time required to search for customers by removing any search filters that are not needed for your business processes. For example, if you do not need to search for customers by their

email or phone number, you can remove those filters. Keeping search filters at a minimum uses less system resources than searching using the full set of default filters.

You adjust filters by editing your account's **customConfiguration.js** file. The following shows the default search filters included in SCIS:

```

1 // searchFilters: [
2 //   'fullname'
3 // , 'firstname'
4 // , 'lastname'
5 // , 'phone'
6 // , 'email'
7 // , 'companyname'
8 // ],

```

### To adjust Customer Search Filters:

1. Log into NetSuite as an administrator.
2. Go to Documents > Files > File cabinet.
3. Locate the **CustomConfiguration.js** file. In the index on the left, drill down to:  
Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore
4. Click **Edit** for the file and remove the search filter lines that are not needed.
5. **Save** your changes.



**Important:** Be certain to test performance before and after any changes to the CustomConfiguration.js file. These tests are especially important for custom **Saved Searches** that replace the default SCIS search architecture.

For more information, see Filters for Customer Search under [Optional Settings in CustomConfiguration.js](#).

## Forms

You can maintain performance by ensuring forms use as few resources as possible.

### Keep Transaction and Entry Forms Minimal

SCIS installs a set of minimal forms for transactions and entries. If you need to create a custom form, start from a minimal form and **only add essential fields**. The more fields included on a form, the more likely it is that users will experience slower performance. Non-essential fields on a form create extra lag time because the application is waiting to write both essential and non-essential data to the database.

#### To ensure you use SCIS Minimal Forms:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Locate the **SCIS Settings** record and click **List**.
4. Click **Edit**.
5. Open the **Other configurations** subtab.
6. Review that **Transaction Forms** and **Entry Forms** use the SCIS **Minimal** forms.
7. Replace **Standard** forms with **Minimal** forms when available.



8. If you need to modify a form for your business, duplicate the **Minimal** forms and use only the fields essential to your purpose.
9. Click **Save** if you make changes.

## Images

Images are assets used in SCIS to illustrate your catalog and reflect your branding. Brand images can include your logo, receipt logo, wallpaper, pictures representing your sales associates, and so on. You can use image compression and image resizing to boost the performance of images in your setup.

### Compress your Images

Use an image compressor when an image's quality and detail are not critical. Compressed images tend to load faster due to their small file sizes. Good candidates for compression are item, brand, logo and wallpaper images, especially images that display on multiple pages.

If you have not compressed your images, you should do so. Using image compression should improve performance not only for SCIS, but for other channels where the images are used.

To compress item images for your catalog, you should use our NetSuite in-house image compressor. For other images, you must use a 3rd-party application. You can find free image compressors online through an internet search.

 **Note:** NetSuite's compressor only affects images that are **500 kb** or greater. You should use a 3rd-party application to compress images less than 500 kb.

#### To set up image compression for SCIS:

1. Log into NetSuite as an administrator.
2. Go to Commerce > Hosting > Website Hosting Files > images.
3. Click **Edit** next to the image folder to which you want to apply image compression.
4. Click the **Hosted Images Compression** subtab.
5. Select **Compress All Website Images**. This turns on image compression for all images in the folder that meet the criteria defined in [Site Management Tools Image Compression](#).
6. Select the image quality setting to use from the **Compressed Image Quality** dropdown. The options are:
  - **Low (maximum compression)** - minor reduction in quality
  - **Standard** - minor reduction in quality when images are zoomed
  - **Optimum (recommended)** - occasional minor reduction in quality when images are zoomed
  - **Very High (minimum compression)** - no noticeable reduction in quality at any time

 **Note:** Since the SCIS website is often only used internally, a **Compressed Image Quality** of **Low (maximum compression)** should be acceptable for most businesses.

7. Select **Strip Metadata** to remove all metadata, such as camera details, caption, or copyright information, from the images. Doing this reduces the file size further.
8. Select **Chroma Subsampling** to modify the image file in a way that reduces the color information in favor of luminance data. The human eye can detect differences in luminosity better than it can detect differences in color, so using chroma subsampling results in image files that look the same but are smaller in size. This is suitable only for digital images.

9. Click **Save**.

When any image in this folder or any subfolders is accessed, the image compression parameters are applied. Image compression will be applied to any images added to the folder in the future as well.

For more information, see the help topic [Site Management Tools Image Compression](#).

For more information, see the help topic [Site Management Tools Image Compression](#).

## Use Image Resizing aliases in the Web Site Setup record

Use image resizing from the website record used by SCIS to serve images in proportions appropriate for how you use the site.

For more information and a list of Size IDs, see [Configuring Item Images for SCIS](#).

### To verify your Image Resizing setup:

1. Log into NetSuite as an administrator.
2. Go to Commerce > Websites.
3. Click **Edit** next to your SCIS website name.
4. Open the **Images** subtab.
5. Verify that **Image Size ID**, **Minimum Width**, and **Maximum Width** match the recommendations.  
To view the guidelines, see [Configuring Item Images for SCIS](#).

## Promotion and Payment Processing

These settings can increase performance when including promotional discounts in transactions and while processing payments via the PIN pad or other payment device. Also included are steps you can take to resolve out-of-date transactions.

## Item Saved Search for Promotion Eligibility

When you use an item saved search to define item eligibility in SuitePromotions, the **Saved Search Preferences** subtab appears on the Promotion record. You can use these preferences to configure the way that the promotion handles saved searches.

For SCIS, using cached saved searches is the fastest method. Saved searches are cached periodically to update the items included. This caching ensures the data is retrieved quickly every time a promotion that uses saved searches is evaluated on a transaction.

You can select one of the following options for each promotion using an item saved search:

- **Use cached saved search** – Provides better performance as results are returned faster whenever the promotion is applied to a transaction. This is the default behavior.
- **Run saved search each time the promotion is applied** – Uses the most current version of the saved search possible, but results are slower to return.

### To Manage Saved Search Performance on Promotions:

1. Log into NetSuite as an administrator.
2. Go to Commerce > Marketing > Promotions > New.
3. In the **Item** section, choose a search using the **From Saved Search** field.

4. Open the **Saved Search Preferences** subtab that appears.
5. Choose the desired saved search option.
6. Complete the remaining promotion options and click **Save**.

For more information about setting this preference, see the help topic [Saved Search Performance](#).

## Customer Group Saved Search for Promotion Audience Eligibility

When you use a dynamic customer group to define audience eligibility in SuitePromotions, the **Customer Group Preferences** subtab appears on the Promotion record. You can use these preferences to configure how the customer group is handled when evaluating the promotion's eligibility.

For SCIS, using cached customer groups provides the best performance. Caching ensures the data is retrieved quickly when a customer group is evaluated on a transaction.

You can select one of the following options for each promotion targeting dynamic customer groups:

- **Use cached customer group** – Provides better performance as results are returned faster whenever the promotion is applied to a transaction. This is the default behavior.
- **Run customer group each time the promotion is applied** – Uses the most current version of the customer group results possible, but results are slower to return.

### To Manage Customer Group Performance on Promotions:

1. Log into NetSuite as an administrator.
2. Go to Commerce > Marketing > Promotions > New.
3. Open the **Audience** subtab.
4. Select the **Specific Customers** option.
5. Select the dynamic **Customer Group** to use.
6. Open the **Customer Group Preferences** subtab that appears.
7. Choose the desired customer group option.
8. Complete the remaining promotion options and click **Save**.

For more information about setting this preference, see the help topic [Saved Search Performance](#).

## Auto-apply Promotions and SCIS

This NetSuite option automatically applies promotional discounts to items and transactions that meet your promotion criteria. If auto-apply is not enabled, the sales associate must manually add applicable promotions to a transaction. Manual tasks add user time.

However, the system time used to validate whether a promotion is applicable increases when auto-apply is enabled. Auto-apply can negatively affect the performance of every operation that triggers the system to search for promotions.

### Guidelines for choosing to Auto-apply Promotions

- Use **Auto-apply Promotions** if your account has a few promotions that are applicable to most of your transactions. This scenario reduces user time more than it increases system time.  
If you rarely offer promotions, then auto-apply will not have a significant impact on performance.

- Do not use **Auto-apply Promotions** if your account has many promotions, especially if some promotions are rarely used because they are not applicable to most transactions.

✓ **Tip:** If you decide to use auto-apply, you should perform frequent reviews of your active promotions list. Inactivating promotions that are expired or no longer apply to your current item catalog can improve system performance.

ℹ **Note:** The auto-apply option requires enabling the SuitePromotions feature.

### To enable Auto-apply Promotions:

1. Log into NetSuite as an administrator.
2. Go to Setup > Company > Enable Features.
3. Open the **Transactions** subtab.
4. Scroll down to the **Sales** section.
5. Check the **SuitePromotions** box.
6. Check the **Auto-apply Promotions** box.
7. Click **Save**.

For more information, see [Promotions and Coupon Codes for SCIS](#).

## Optimize EMV

This payment setting can improve performance when shoppers use a credit or debit card to tender payment via the payment device, such as a PIN pad. The setting affects the type of records submitted to NetSuite. It also determines the point at which a shopper can begin interacting with the payment device.

- With **Optimize EMV** – SCIS submits a Customer Payment and Invoice during the payment device priming process. A shopper can begin using the payment device after the Customer Payment portion saves. The Invoice saves next without affecting the shopper's payment device activity.
- Without **Optimize EMV** – Before the PIN can begin priming, SCIS must submit a Cash Sale to NetSuite. The shopper cannot use the payment device until the Cash Sale is saved. This process is the default EMV method.

The Optimize EMV method can be faster than the default EMV method because Customer Payments do not calculate taxes or typically run user event scripts.

ℹ **Note:** EMV refers to the secure protocol used by payment gateway providers to safeguard credit and debit card information. On occasion, SCIS will use the term EMV to refer to the flow of events that route through a PIN pad or other payment device.

⚠ **Warning:** **Optimize EMV box changes the payment process.** If you want to use this setting, enable it in your sandbox account first and perform tests using typical sales and return transactions.

### Choosing whether to use Optimize EMV

The level of customization applied to your account's Cash Sale and Customer Payment records can affect how the default and Optimize EMV methods perform in your stores. In most cases, the Optimize EMV method is faster than the default.

To determine the best method for your business, you can run test transactions to compare performance when Optimize EMV is checked or cleared. Perform these tests after hours or in your sandbox.

- Testing should include **your entire EMV payment flow**.  
Optimize EMV might prime the payment device faster than the default EMV, but it could be slower to accept the response and print the receipt.
- Test using **typical transactions** that are common to your store.  
Some factors, such as the number of lines in a transaction, can impact whether Optimize EMV or the default EMV setup performs faster.



**Important:** Test performance using typical transactions both with Optimize EMV enabled and with it disabled. Results can vary based on transaction complexity and the types of scripts running on the account.

### To enable Optimize EMV:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Locate the **SCIS Settings** record and click **List**.
4. Click **Edit** and open the **Order** subtab.
5. Check the **Optimize EMV** box.
6. Click **Save**.

For information, see [Sales Transactions](#) and review the short topics on Invoices and Optimize EMV Enabled Sales Transactions.

## Disable Bill Costs to Customers Feature

The Bill Costs to Customers feature creates additional sublists on cash sale transactions, and can slow your SCIS performance. Disabling the feature can improve performance.

### To disable Bill Costs to Customers:

1. Log into NetSuite as an administrator.
2. Go to Setup > Company > Enable Features.
3. Open the **Transactions** subtab.
4. Under the **Billing** section, clear the **Bill Costs to Customers** box.
5. Click **Save**.

For more information, see the help topic [Enabling Features](#).

## Cancel or Close Out-of-Date Open/Tendering Transactions

This performance tip is a maintenance task, not a setting to enable or disable. The tip is to cancel or close older transactions that have a **POS Status** of Open or Tendering. Whether to cancel or close an out-of-date transaction depends on your internal business processes.

### To Find and Cancel or Close Transactions:

1. Log into NetSuite as an administrator.
2. Go to Transactions > Management > Search transactions.
3. For **POS Status**, select **any of** and then **Open** and **Tendering**.
4. Click **Submit**.
5. Review the list for transaction eligible to close or cancel.  
For example, sort the list by **Type** and look for **Invoice**.
6. Click **Edit** by the transaction to review.
7. Open the **Custom** subtab.
8. Change the Transaction record's **POS Status** to **Closed** or **Cancelled**.
9. Click **Save**.
10. Review the next transaction as desired.

You might want to filter the search criteria to ensure only the desired transactions display. For example, to avoid closing transactions that should remain open for now, you can include a **Date** filter, such as for transactions created more than three days ago.

For more information, see [Sales Transactions](#) and [Saved Searches](#).

## Receipts

The following settings improve performance by reducing the number of tasks sales associates perform at the end of a sale or return.

### Auto-Print Receipts

If your store defaults to printing a receipt for every transaction, you can enable **Auto-Print** to automatically print the receipt when a transaction is complete. This option saves user time and prevents sales associates from forgetting to provide customers with their receipt.

#### To enable Auto-Print Receipts:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Locate the **SCIS Settings** record and click **List**.
4. Click **Edit** and open the **Printing** subtab.
5. Check the **Auto-Print Sales Receipts** box.
6. Check the **Auto-Print Return Receipts** box.
7. Click **Save**.

For more information, see [Setting Up Receipt Printers for SCIS](#).

## Performance Tips for using SCIS POS Devices

These SuiteCommerce InStore (SCIS) tips can help your sales associates reduce the time spent performing tasks on your point-of-sale (POS) devices. Some tips require configuration by the administrator.

Administrators and store managers should ensure that sales associates are aware of these tips. We also include tips in the SCIS User Guide.

### Logging Into SCIS

- Use Autocomplete for fast Logins
- Enable Touch ID for faster logins on iOS devices
- Assign Default Sales Representatives

### Search using the Transaction History

### Taking Orders

- Use QuickAdd Bar Shortcuts
- Scan Items in bulk – Continue Scanning
- Act on Receipt options while Receipts are loading

## Logging Into SCIS

These tasks and settings can reduce the time your sales associates need for setting up before they begin entering transactions.

### Use Autocomplete for fast Logins

This feature provides faster login for SCIS users. A sales associate can type the first few letters of their email address, and the login screen shows a list of email addresses that match. The feature works by location, so only email addresses registered to the sales associate's location appear in the list.

Sales associates' email addresses are stored on the device the first time they log in after the setting is enabled in NetSuite. After that, the sales associate can take advantage of autocomplete starting with the next time they log in.



### To enable Autocomplete Login:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Locate the **SCIS Settings** record and click **List**.
4. Click **Edit** and open the **General** subtab.
5. Check the **Use Autocomplete Login** box.
6. Click **Save**.

**Note:** Administrators cannot adjust the number of characters users must enter before autocomplete activates.

## Enable Touch ID for faster logins on iOS devices


If your mobile device includes a fingerprint reader, your sales associates can log in with a touch. Touch ID for SuiteCommerce InStore (SCIS) must be configured on the mobile device first to enable it. The steps a sales associate can use to log in after Touch ID is configured are as follows.

### To Login using Touch ID after setup:

1. Log into SCIS on the desired device.
2. Touch the fingerprint on the **Touch ID for SCIS** prompt.
3. If an associate has multiple roles, select the role under which to log in.

**Important:** You must configure Touch ID before the first use.

The first time a sales associate logs in to SCIS on a device, they must enter their email address and password. SCIS saves their login credentials to the device. The associate can then use Touch ID the next time they log in.

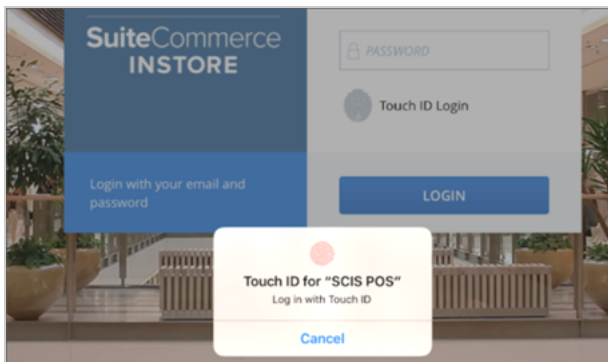

For information about setting up and using SCIS touch ID, including turning the feature on or off and making updates for password changes, see [Setting Up SCIS Touch ID for iOS](#).

## Assign Default Sales Representatives

If your business requires selecting a sales representative to begin a shift, and it is common to have one sales representative per shift, you can set a **Default Sales Rep** for the current session or all sessions.


If during a session the default needs to be changed, you can change it for a particular transaction. When that transaction is complete, the next transaction will revert to using the Default Sales Rep.

### To set a Default Sales Representative:

1. Log into SCIS on one of your store's devices.
2. Touch the menu icon. 
3. Touch **Set Default Sales Rep**.



4. Touch to default for **This Session** or **All Session**.
5. Touch the sales representative.

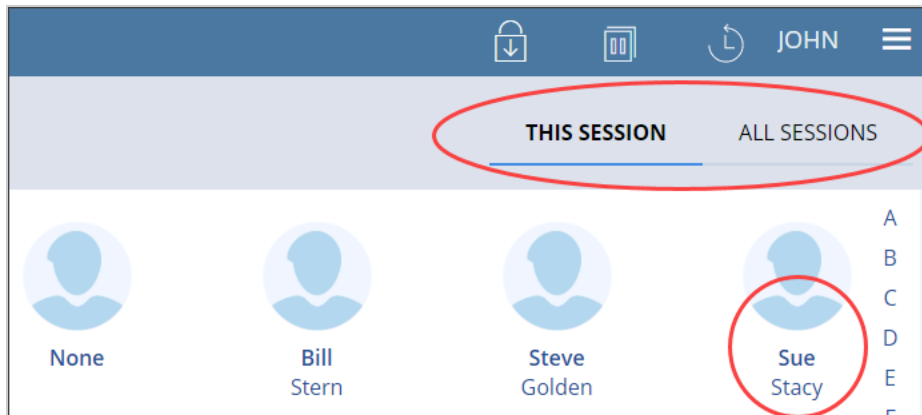

The cart displays to begin a transaction.

For more information, see [SCIS User Settings](#).


## Search using the Transaction History

When looking up a past transaction, scrolling through the Transaction History can be faster than doing a search. Searches require entering criteria and then waiting for the device to query the NetSuite database. Scrolling allows you to visually move through the history.

Transaction history should be used for recent transactions or when the date is known and you will apply date filters.

### To search using the Transaction History:

1. Log in to SCIS.
2. Touch the clock icon  at the top of the screen.
3. Scroll through the transaction history.
4. Touch the desired transaction to display the details.

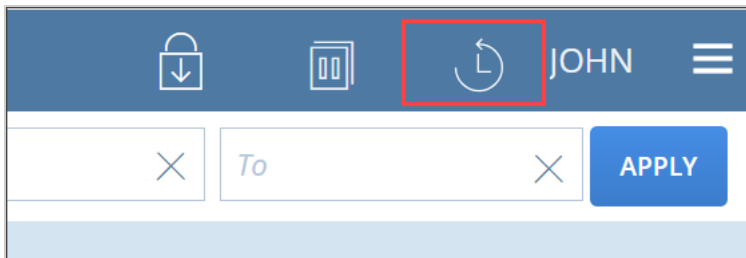

**Tip:** To find a transaction for a specific customer, enter search criteria to find the customer and then use their timeline graph.

For information related to using the history, see the help topic [Printing Receipts from the Transaction History](#).

## Taking Orders

Use the suggestions in this section to ensure sales associates can complete transactions quickly and efficiently.


### Use QuickAdd Bar Shortcuts

One way to use the QuickAdd Bar is as a shortcut to reduce the user time needed to locate items, scan items or navigate to an item's details page.

Use the QuickAdd Bar:

- For frequently sold items.
- For hard-to-scan items due to packaging or lack of a barcode.
- To provide a variable-price miscellaneous item to sell in lieu of items you are not able to find by scanning or searching.
- As a shortcut to the product details page for items that you frequently search for or navigate to.

You can set up a QuickAdd Group to create a separate tab on the bar, and then add items as QuickAdd Keys.

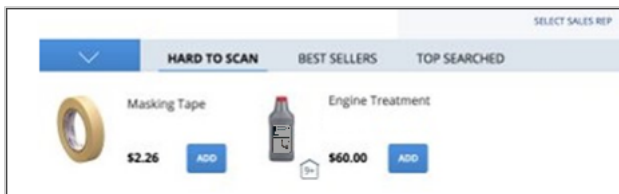


For information about setting up QuickAdd Groups and QuickAdd Keys for your QuickAdd Bar, see [Configuring QuickAdd Keys](#).

### Scan Items in bulk – Continue Scanning


SCIS allows scanning multiple items, one after the other. You do not need to wait for the previous item to display in the cart before scanning the next item. You should:

- Scan in bulk, one item after the other.
- Not wait for an item to display. Continue scanning or adding items.

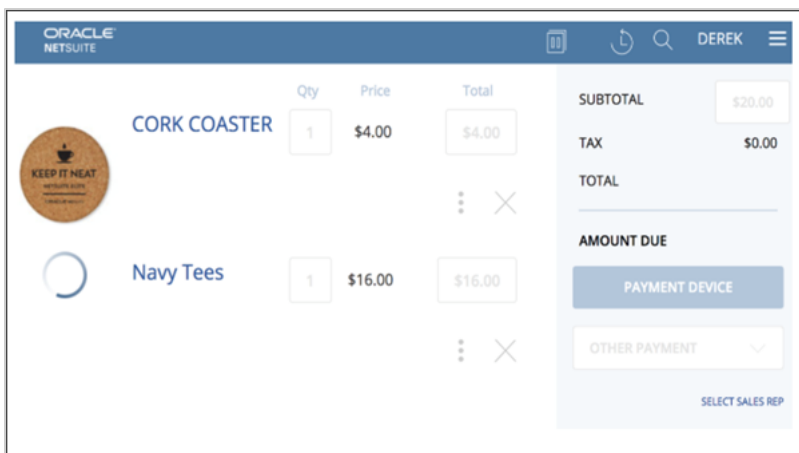

## Act on Receipt options while Receipts are loading

It can take a few seconds to load a receipt image when a transaction is complete. However, the sales associate can tap or click the **Email Receipt** or **Print Receipt** options as soon as they appear.

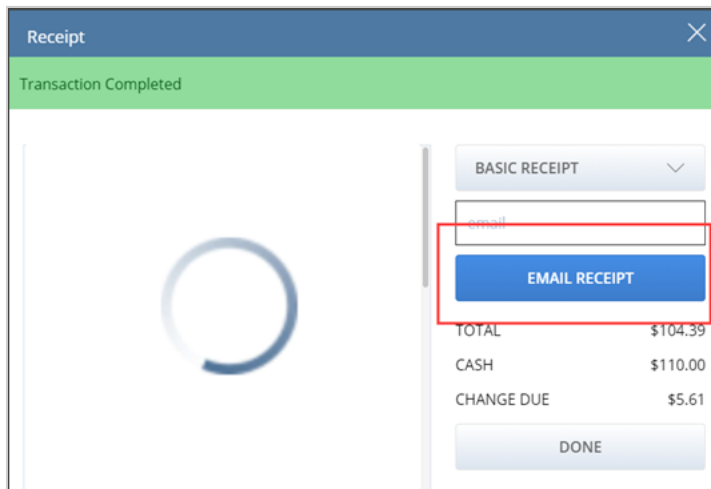

## Performance Tips for Network Resources

SuiteCommerce InStore (SCIS) administrators can make modifications to improve network performance in your SCIS environment. This topic lists a few tips that you should find helpful.

- [Use the Warming Up Service to keep the Server active](#)
- [If you do not use Client Scripts, clear the Execute Client Scripts option](#)
- [Asynchronous Method for Adjusting the POS Status](#)

### Use the Warming Up Service to keep the Server active

The warming up service keeps the NetSuite server “warm” while it is idle. The default is for the service to run every 10 minutes. If your store does not typically experience much idle time between making transactions, you should extend the warming up service interval to 30 or 40 minutes.

Extending the interval is especially important if you have several SCIS devices running at the same time. Having the service trigger every 10 minutes for multiple devices can have a negative impact on your server resources.

You configure the service interval by modifying the **CustomConfiguration.js** file.

```
1 warmUp: {
2     // warmUp : true,
3     //warmUpTime : 10 //in minutes },
```

### To adjust the Warming Up Service interval:

1. Log into NetSuite as an administrator.
2. Go to Documents > Files > File cabinet.

3. Locate the **CustomConfiguration.js** file. In the index on the left, drill down to:  
Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore
4. Click **Edit** for the file.
5. Locate the **warmUp:** code section.
6. Adjust the **warmUpTime** minutes.
7. **Save** your changes.

 **Note:** Changing the interval to be less time, such as 1 minute, causes additional processing in the system that diminishes the purpose of the warm up service.

For more information, see [Customizing the Configuration File](#).

## If you do not use Client Scripts, clear the Execute Client Scripts option

The Execute Client Scripts setting on the SCIS Setting > Orders subtab enables the application to execute certain integration code as user event scripts. It is typically associated with using Avalara AvaTax.

Although the setting can improve performance under certain circumstances, it can also affect transaction-processing time. If you do not use Avalara, you should leave the Execute Client Scripts setting disabled.

 **Important:** Before clearing the check box, you might verify with Customer Support that your setup does not need the **Execute Client Scripts** option enabled.

### To clear the Execute Client Scripts option:

1. Log into NetSuite as an administrator.
2. Go to Customization > Lists, Records, & Fields > Record Types.
3. Scroll to **SCIS Settings**, and then click **List** in that row.
4. Click **Edit** for the **SCIS Settings** record.
5. Open the **Order** subtab.
6. If the box is checked, clear the **Execute Client Scripts** box.
7. Click **Save**.

For more information, see [SCIS Settings for Orders](#).

## Asynchronous Method for Adjusting the POS Status

When a payment or refund is made through a payment device, the transaction creates an Invoice record and changes the **POS Status** to **Closed**.

To ensure performance at the register, SCIS uses an asynchronous method to change the POS Status after the receipt becomes available. This method means that saved searches that include the POS Status might show a temporary status of **Tendering** for some transactions.

For purposes of ensuring the POS Status is correct, an asynchronous job runs every hour to adjust transactions that were not changed to **Closed** automatically. Support can set the job to run more

frequently for your account, but be aware that additional job runs can have a negative impact on performance.

Note that the POS Status for transactions paid by cash and other tenders that do not use a payment device are not affected by the asynchronous method.

## Performance Tips for Scripts and Workflows

Use the tips in this section to help ensure scripts and workflows included in your NetSuite environment do not slow your SuiteCommerce InStore (SCIS) performance.

- [Find Scripts that affect records used by SCIS](#)
- [Disable or Exclude unneeded User Event Scripts](#)
- [Convert or Refine the Scripts You Need](#)
- [Performance Tips for Avalara® AvaTax Scripts](#)
  - [Disable Avalara Tax Calculation at the Line Level](#)
  - [Disable Avalara Extensive Logging](#)
  - [Disable unneeded Avalara Scripts](#)


A computer script is a series of commands that automate certain processes. Scripts can run behind the scenes in NetSuite to affect how the database handles record processing. If a script is active in NetSuite, it runs each time a user, system or another script creates, modifies, deletes or loads a record in the database.

By default, scripts categorized as “user event scripts” run on every record processed. Scripts are not affected by the role of the user submitting the transaction.

The SCIS application submits and loads records to the NetSuite database when performing common point-of-sale (POS) tasks. For example, when a sales associate completes a sales transaction, SCIS submits a Cash Sale or Invoice record. The processing might include a script that is in place for core NetSuite functions.

| <br>Common SCIS POS tasks                                                                                                                                                                                                                        | <br>NetSuite records used by SCIS                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>■ Completing a sale</li> <li>■ Completing a return</li> <li>■ Creating or updating quotes</li> <li>■ Creating a new customer</li> <li>■ Suspending and resuming transactions</li> <li>■ Scanning or viewing drill-down details of a transaction</li> <li>■ Preparing fulfillments</li> </ul> | <ul style="list-style-type: none"> <li>■ Cash Sale</li> <li>■ Invoice</li> <li>■ Estimate</li> <li>■ Customer</li> <li>■ Customer Payment</li> <li>■ Credit Memo</li> <li>■ Sales Order</li> <li>■ Fulfillment request</li> </ul> |

The time spent to complete record processing is referred to as “system time.” This time includes the duration required to run the associated scripts. Reducing system time is key for maximizing performance.

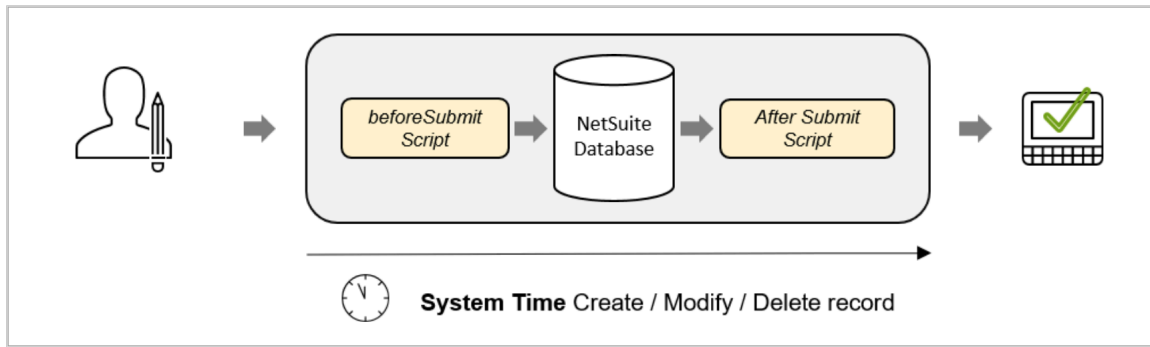

**Note:** SCIS does not have a direct method for blocking the execution of unneeded scripts and workflows. However, NetSuite includes methods to accomplish this task. These methods are described in the following topics.

## Find Scripts that affect records used by SCIS

The first step in maximizing script performance is to locate the scripts that run on records used by SCIS. Then you can identify which scripts to continue running and which scripts to avoid running.

### To find Scripts that affect SCIS:

1. Log into NetSuite as an administrator.
  2. Go to Customization > Scripting > Script Deployments.
  3. Expand the **Filters**.
  4. Select the desired **Record Type**, such as **Invoice** or **Cash Sale**.
- The list refreshes with the filtered results.

## Disable or Exclude unneeded User Event Scripts

NetSuite provides various methods for preventing execution of a user event script. For SCIS, you should use either of the following two:

- [Disabling a Script Deployment via its Context](#) (recommended)
- [Disabling a Script by Clearing its Role Assignment](#)

### Disabling a Script Deployment via its Context

The type of processing that executes a script is referred to as the execution context. If a script is not required to complete a processing task within a certain context, then you can often improve performance by disabling that script from running in that context.

For SCIS, the contexts in which a script can be safely disabled are:

- **Payment Postback** — Used with SCIS-supported payment devices
- **Web Application** — Used for submitting SCIS records

Use the procedure in this task to view and disable scripts that are not required in the selected SCIS processing context.

 **Note:** Disabling or re-enabling these scripts do not affect your SuiteCommerce or SuiteCommerce Advanced web store setups.

### To view and disable scripts by context:

1. Log into NetSuite as an Administrator.
2. Go to the desired script deployment context list to review:
  - **Payment Postback Scripts** — Go to Commerce > InStore > (Performance) Scripts on Webcontext
  - **Web Application Scripts** — Go to Commerce > InStore > (Performance) Scripts on Webapps

All scripts in the selected context that are included in your account display in a list. The list includes:

  - **Record** — The record or record-type that causes the script to execute. Execution occurs when an instance of that record is created or updated in a Payment Postback or Web Application context.
  - **Number of Execution Context** — The number of contexts under which the script is executed. For example, Script X might run under a Bank Connectivity context, Payment Postback context, and Promotions context, for a total of 4 contexts.
3. Click **Edit** for the script to disable.  
The **Script Deployment** page opens.
4. Open the **Context Filtering** subtab.
5. In the **Execution Context** list, clear the highlighting on one or both of these contexts:
  - **Payment Postback**
  - **Web Application**



**Important:** Do not clear highlights for other contexts. Some contexts might already be cleared.



**Tip:** Hold the Ctrl key and click a highlight to clear it.

6. Click **Save**.
7. Repeat these steps as needed to disable other scripts in **Payment Postback** and **Web Application** contexts.

## Disabling a Script by Clearing its Role Assignment

Disabling a script by clearing its role assignment applies to user event scripts only.

### To clear a User Event Script's Role assignment:

1. Log into NetSuite as an administrator.
2. Go to Customization > Scripting > Script Deployments.
3. Use information from the task [Find Scripts that affect records used by SCIS](#) to locate the script Roles to adjust.
4. Click **Edit** by the desired script.
5. Go to the **Audience** section.
6. If checked, clear the **Roles > Select All** box.

7. To remove individual assignments, click those **Roles** to clear the highlights.
8. Click **Save**.

## Convert or Refine the Scripts You Need

For scripts that are required to meet your business needs, consider converting or refining those scripts.

- **Convert Workflows and Custom Scripts to Scheduled Scripts.** Scheduled scripts run on the server without blocking record handling in NetSuite. They should not affect performance at the point-of-sale. Whenever possible, try to convert workflows and custom scripts to scheduled scripts.
- **Refine Scripts to minimize actions.** If you cannot convert a workflow or custom script to a scheduled script, consider streamlining the tasks it executes. The goal is having the workflow or script perform the least possible amounts of record loading, submission and searching. For searches, ensure the criteria is accurate and returns only the minimum data required to accomplish the task. See [Ensure Custom Searches are Efficient](#).

## Performance Tips for Avalara® AvaTax Scripts

SCIS can use the Avalara AvaTax application to calculate sales taxes. AvaTax has a performance impact on SCIS when common point-of-sale (POS) actions cause AvaTax to recalculate taxes. Actions that can initiate tax recalculations during a transaction include:

- Adding or changing a customer
- Adding lines to a transaction
- Applying payment
- Changing item quantities
- Voiding items
- Returning items
- Ordering items
- Adding promotions
- Applying discounts

This topic lists a few setups you can do to boost SCIS performance when using Avalara AvaTax.

- [Disable Avalara Tax Calculation at the Line Level](#)
- [Disable Avalara Extensive Logging](#)
- [Disable unneeded Avalara Scripts](#)

### Disable Avalara Tax Calculation at the Line Level

This performance feature controls when Avalara AvaTax calculates taxes for SCIS. Rather than running calculations each time a sales associate adds an item to the cart, the feature puts tax calculations on hold until all cart entries are complete.

Delaying tax calculations until the transaction is ready for payment allows SCIS to focus resources on item entry and other cart options. It can reduce the time spent waiting for tax calculations to complete.

**To disable Avalara line-level tax calculations:**



1. Log into NetSuite.
2. Go to Avalara > Set up > Configure Avalara.
3. Click the **Tax Calculation** subtab.
4. Check the option to **Disable Tax Calculation at Line Level**.
5. Click **Save**.

The setup to disable Avalara AvaTax calculations at the line level is complete.

## Disable Avalara Extensive Logging

One option for improving Avalara performance when using SCIS is to disable the Extensive Logging option. You do this task from your Avalara configuration menus.

### To disable Avalara Extensive Logging:

1. Log into NetSuite as an administrator.
2. Go to Avalara > Setup > Configure Avalara.
3. Open the **General** subtab.
4. Find **Miscellaneous Settings**.
5. Clear the **Extensive Logging** box.
6. Click **Save**.

## Disable unneeded Avalara Scripts

Some Avalara user event scripts run on records used by SCIS, but are not needed for SCIS to function. You can disable the following scripts by clearing each script's assigned **Role** or by excluding a script via its execution context.

- AVA\_CustomerBeforeLoad
- AVA\_CustomerBeforeLoad\_Address
- AVA\_CustomerBeforeLoad\_Certs

See [Disable or Exclude unneeded User Event Scripts](#) for the steps.

## Performance Tips for using Third-Party SuiteApps

If you are using bundles that integrate to NetSuite, make sure that they are up to date so that you can take advantage of their latest performance improvements.

NetSuite can use third-party applications delivered through SuiteApps to apply payments or calculate taxes for SuiteCommerce InStore (SCIS) transactions. Each third-party provider might include performance enhancements in new versions. However, the version provided to SuiteApps are in the form of unmanaged bundles. You must manually update these bundles to install new versions.

### To check for third-party bundle updates:

1. Go to Customization > SuiteBundler > Search & Install Bundles > List.  
The **Version** column shows an exclamation icon  if a new version is available.

2. Click the icon for details.
3. Click the green arrow on the left and select **Update** to get the latest version.

# SCIS Configuration

After you install the SuiteCommerce InStore SuiteApp, you must configure the application for your business needs. Complete the following tasks to configure SCIS:

| Tasks                                               | How To                                                                                                                                                       | Before you begin                                                                                                                                                        | Goal                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 – Enable required features (SuiteScript 2.X only) | <a href="#">Enable Required Features (SCIS 2.0 Only)</a>                                                                                                     | Enable features required for SuiteScript 2.X record processing: <ul style="list-style-type: none"> <li>Return Authorization</li> <li>Store Pickup</li> </ul>            | Use the latest SCIS technology.                                                                                                                                                                                                                                                                                                                                                                                                           |
| 2 – Configure Locations and Subsidiaries            | <a href="#">Subsidiaries and Locations for SCIS</a>                                                                                                          | If you use OneWorld, ensure that Subsidiaries are set up in NetSuite.                                                                                                   | Set up at least one location record for use with SCIS.                                                                                                                                                                                                                                                                                                                                                                                    |
| 3 – Configure Settings                              | <a href="#">SCIS Settings</a>                                                                                                                                | Upload logo image and application background.                                                                                                                           | Complete required tasks including the following: <ul style="list-style-type: none"> <li>Define discounts and saved searches available for SCIS.</li> <li>Define printer settings</li> <li>Define the void item and rounding item.</li> <li>Define transaction forms and entry forms for SCIS.</li> <li>Apply branding to your SCIS implementation by selecting your logo image, and background image for the main SCIS screen.</li> </ul> |
| 4 – Localize SCIS                                   | <a href="#">Localizing SCIS</a>                                                                                                                              | Ensure that you have configured country-specific features in NetSuite. For ore information, read the help topic <a href="#">Overview of Country-Specific Features</a> . | Complete required settings for your locale. Including setting up multiple currencies and currency rounding.                                                                                                                                                                                                                                                                                                                               |
| 5 – Set up Receipt Templates                        | <a href="#">Advanced Receipt Templates for SCIS</a>                                                                                                          | Make sure the latest SuiteCommerce InStore SuiteApp is installed. Also, make sure that the Advanced HTML/PDF Templates feature is enabled.                              | Set up receipts for printing and email.                                                                                                                                                                                                                                                                                                                                                                                                   |
| 6 – Configure Payments                              | <ul style="list-style-type: none"> <li><a href="#">Configuring SCIS Gateway Records</a></li> <li><a href="#">Configuring SCIS Payment Methods</a></li> </ul> | Create Payment Methods and payment profiles in NetSuite.                                                                                                                | Create payment profiles for SCIS, so you can start accepting payments. Configure payment methods you plan to support in SCIS, and cash denominations.                                                                                                                                                                                                                                                                                     |
| 8– Set up Employees                                 | <a href="#">Configuring Employee Records for SCIS</a>                                                                                                        | Enter or import employee records as needed.                                                                                                                             | Make sure Employee records are set up with the required permissions and roles.                                                                                                                                                                                                                                                                                                                                                            |
| 9 – Add Customers                                   | <a href="#">Customer Records and SCIS</a>                                                                                                                    | Enter or import customer records as needed.                                                                                                                             | Configure customer groups and set up the form used for entering new customers in SCIS.                                                                                                                                                                                                                                                                                                                                                    |
| 10 – Set up Items                                   | <a href="#">Configuring Item Records for SCIS</a>                                                                                                            | Enter or import item records as needed.                                                                                                                                 | Prepare for selling products with SCIS.                                                                                                                                                                                                                                                                                                                                                                                                   |

| Tasks                     | How To                                           | Before you begin                                                                                                                                 | Goal                                                        |
|---------------------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| 11 – Add Item Images      | <a href="#">Configuring Item Images for SCIS</a> | In the process of creating a website, you can choose an item identifier. You can also decide on the format you want to use for image file names. | Upload product image files to the file cabinet.             |
| 12 – Set up QuickAdd Keys | <a href="#">Configuring QuickAdd Keys</a>        | You can configure QuickAdd Keys to display quick-to-find items for any SCIS location.                                                            | Ensure your sales associates can easily find popular items. |

## Enable Required Features (SCIS 2.0 Only)

These features are required for SuiteCommerce InStore (SCIS) setups that will run SuiteScript 2.X:

- Return Authorizations
- Store Pickup

Store pickup must also be set up in locations that allow shoppers to order items online and pick up the order in a physical store.

### To enable required features:

1. Go to Setup > Company > Enable Features.
2. Open the **Transactions** subtab.
3. Under **Basic Features**, check the **Return Authorizations** box.
4. Scroll to the **Shipping & Receiving** section.
5. Check the **Store Pickup** box.
6. Click **Save**.

## Subsidiaries and Locations for SCIS

This section includes general information about configuring SuiteCommerce InStore (SCIS) for OneWorld accounts and setting up locations. The following links include more detailed information.

If you use OneWorld, select a subsidiary on each employee, item, and website record. For more information, read [Subsidiaries and SuiteCommerce InStore](#).

A location must be specified on each employee record granted access to SCIS. For more information, read the following topics:

- [Configuring Locations for SCIS](#)
- [SCIS Location Distance](#)
- [SCIS Location Searches](#)

The Filters subtab, found on many SCIS custom records, enables an administrator to define location and subsidiary settings.

An important step in configuring your implementation of SCIS is to ensure that the proper locations and subsidiaries are selected on SCIS custom records. Location and subsidiary settings on SCIS custom records ensure capabilities such as QuickAdd Keys, discounts, shipping methods, printing settings, and

transaction forms are available for sales associates when they are entering orders. If you don't want to set up specific location and subsidiary settings, check the **Apply to All** boxes.

## Subsidiaries and SuiteCommerce InStore

If you use OneWorld, the SuiteCommerce InStore (SCIS) item records and employee records must be assigned to the same subsidiary. When you are configuring records in NetSuite, it is important to set the Subsidiary field on each record. You must also set up nexuses for each subsidiary you use with SCIS.

For example, you have subsidiaries in New York and California and you plan to use SCIS with the subsidiary only in California. You must select the California subsidiary on item records and employee records.



**Important:** To calculate tax correctly, a nexus must be set up for each subsidiary location.

Go to Setup > Company > Subsidiaries. Click the Nexuses subtab. Verify that you have set up a nexus for each location. See the help topic [Subsidiary Setup](#) for more information.

## Configuring Locations for SCIS

You must set a location on every employee record and item record you plan to use with SuiteCommerce InStore (SCIS). The SCIS user interface shows whether a product is in stock at an employee's location.

For example, you may be using SCIS in two locations: Los Angeles and San Francisco. The sales associate assigned to the San Francisco location can see that an item is out of stock at her location, but available at the Los Angeles location. This visibility enables the sales associate to make arrangements to have the product shipped.

SuiteCommerce InStore uses location data for the following:

- To define store locations
- To determine which items are available at a specific location
- To assign a sales associate to a store location
- To determine the distance between store locations



**Note:** SCIS uses the standard NetSuite location record. You must configure at least one location in NetSuite.

### To define locations for SCIS:

1. Go to Setup > Company > Classifications > Locations > New.
2. The following settings are **required** for SuiteCommerce InStore:
  - **Name** – Defines the name of the location. The name appears in NetSuite lists.
  - **Subsidiary** – Required if you use OneWorld.
  - **SCIS Store Safe Account** – Defines the account used for opening drawer and closing drawer transactions. Select an account from your Chart of Accounts. For example, you can choose Petty Cash.
  - **SCIS Cash Drawer Difference** – Defines the account used if there is a difference between the amount in the cash drawer and the expected amount of cash based on the sum of all transactions entered by the sales associate in the Closing Drawer or End of Day transaction.



**Important:** If there is no value for SCIS Store Safe Account or SCIS Cash Drawer Difference, then an error occurs when the sales associate tries to complete an opening drawer or closing drawer transaction. For more information, read [SCIS Cash Drawer Management](#).

- Check the following boxes:
  - **Make Inventory Available** – (Required) Makes all on-hand inventory at the location available for orders.
  - **Make Inventory Available In Web Store** – (Required) Makes all on-hand inventory at the location available for web store orders.



**Note:** Check the **Make Inventory Available In Web Store** box to ensure that inventory information is available to SCIS. If the box is not checked, then the available inventory count displayed on the Product Detail Page (PDP) in SCIS shows 0.

3. If you want to use **Store Pickup** at a location:
  - a. Open the **Store Fulfillment** subtab.
  - b. Check the **Allow Store Pickup** box.
4. Click **Save**.
5. Go to Lists > Employees.  
Set the location for each employee record. For more information, see [Configuring Employee Records for SCIS](#).
6. Go to Lists > Accounting > Items.  
(Optional) Set the location on item records you create. For more information about creating items, see [Configuring Item Records for SCIS](#).



**Note:** To determine if a product is available for purchase, there must be stock available in a location.

In addition to configuring a standard location record for each location where you plan to use SCIS, you must also configure custom records to define additional location settings. Additional settings include discounts and shipping methods available at certain locations, information for nearby store locations, and employees who work at more than one location.

## SCIS Location Distance

SCIS Location Distance is a custom record associated with SuiteCommerce InStore (SCIS). This custom record defines the distance between store locations. Information from this custom record shows on the **Nearby Stores** tab on the product display page in SCIS.

### To configure Location Distance:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find **Location Distance** in the list of custom records, and then click **List** in that row.
3. Select store locations in the **From** and **To** fields on the custom record.
4. Enter the **Distance**.
5. Click **Save**.

## SCIS Location Searches

In SuiteCommerce InStore (SCIS), the SCIS Location and SCIS Inventory Location searches affect location data displayed on the Product Detail Page in the Nearby Stores tab and the All Locations tab. You can modify the location data by creating new location searches with criteria that you select. After you have created your own modified saved search, use the new saved search ID in the CustomConfiguration.js file to change the default location searches used in SCIS.

### To create a location search for the Product Detail Page:

1. Select your own criteria for the location search. Follow the instructions in [Modifying Included Saved Searches](#).
2. Go to Reports > All Saved Searches. Remember the ID for your modified SCIS location search.
3. Go to Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore.
4. Click **Edit** next to **CustomConfiguration.js**.
5. Replace the default value for locationSearch with the ID for your own custom saved search.

```
1 | location: {
2 |   // Id of the search for displaying locations in Nearby stores and in Pick up locations
3 |   locationSearch: 'customsearch_ns_pos_locations_2',
```

You can also replace the value for inventoryLocationSearch with a modified version of the SCIS Inventory Location search.

For more information, see [Customize Location Display](#).

## SCIS Settings

Define SCIS settings after you have installed the SuiteCommerce InStore SuiteApp. The SCIS Settings custom record is installed by the SuiteApp and you can modify it at any time after you have completed initial setup. This custom record enables you to define various settings, such as logo image and printing preferences. Also, use the SCIS settings record to define discounts available at a certain location, create custom attributes, select sales reports for SCIS sales associates, and more.



**Important:** Creating the first SCIS Settings record and defining settings are required steps in configuring your implementation of SCIS.

The settings on the SCIS record apply to the location, subsidiary, and website you select on the **Filters** subtab. For example, you must use the SCIS Settings record to make certain discounts, shipping methods, and logos available at specific retail locations running SuiteCommerce InStore.

### To configure an SCIS Settings record:

1. Go to Commerce > InStore > Settings.
2. Click **New SCIS Settings** to create a new record, or click **Edit** next to an existing record to make changes.  
All changes to the SCIS Settings record are tracked in the list of System Notes.
3. In the **Name** field, enter a name for the settings on this record. This name appears in the list of SCIS Settings.
4. Check the **Start Raised** box to start SCIS with the QuickAdd Bar expanded.

5. Check the **Login Required** box to require login to SCIS.
6. Click the subtabs to configure the following settings:
  - [SCIS Filter Settings](#)
  - [General SCIS Settings](#)
  - [SCIS Settings for Printing](#)
  - [SCIS Custom Attributes for PDP, Cart, Item, and Customer Search](#)
  - [SCIS Customer Settings](#)
  - [SCIS Settings for Orders](#)
  - Other Configurations: [QuickAdd Bar and Forms Settings for SCIS](#)
  - [SCIS Settings for Receipts](#)
  - [Selecting Sales Reports for SCIS](#)
  - [SCIS Cash Drawer Management Settings](#)

## SCIS Filter Settings

Click the **Filters** subtab, and then select the location, website, and subsidiary where you want these settings to apply. You can select more than one value in each box. If you use multiple SCIS websites, note that one SCIS settings record is applied depending on the combination of location, subsidiary, and website defined on the filters subtab. Also note that those settings affect the settings available to employees when they log in.



**Important:** Consider that the combination of location and subsidiary defined on the employee record must match those settings on the appropriate SCIS Settings record. By default, the filters are set to apply to all locations, websites, and subsidiaries.

For more information about setting up SCIS for different locations and subsidiaries, read [Setting Up SCIS for Multiple Countries](#).

## General SCIS Settings

On the general subtab, you can define the discounts, shipping methods, logos, and SCIS Saved Searches available to SCIS users. Note that these saved searches are available for employees based on the combination of subsidiary, website and location defined on the filters subtab.

### Setting general preferences for SCIS:

1. Go to Customization > Lists, Records, & Fields.
2. Scroll to **SCIS Settings**, and then click **List** in that row.
3. Click **Edit** next to an existing SCIS Settings record to make changes.
4. Click the **General** subtab to set the following:
  - [Discounts and Shipping](#)
  - [SCIS Logo Settings](#)
  - [Saved Search](#)
  - [Autocomplete Login](#)
  - [Shipping Label Fields](#)
  - [Automatic Log Out](#)



## Discounts and Shipping

Define the following settings for discounts and shipping:

- In the **SCIS Location Discounts** list, select the discounts that you want to make available at this location.
- In the **SCIS Shipping Methods** list, select the shipping methods you want to make available for this location.
- Check the **Use Default Discount** box to make custom discounts available.
- Select a value in the **Default Discount** list.  
Select the discount item to use with custom discounts. The value you select here is the actual discount item used for custom discounts. If you do not make a selection here, the default value is "Partner Discount."
- (Optional) Select one or more searches in the **SCIS Saved Searches** list. The saved searches you select here are available to the SCIS Sales Clerk when they are logged in.

For more information, see [Configuring Discounts](#). See also, [Publishing Saved Searches to SCIS Users](#).

## SCIS Logo Settings

Consider using a transparent background for your logo image. Note the supported file formats: PNG files are recommended. JPEG files are also supported. SVG files are **not** supported.



**Important:** Ensure that the **Available Without Login** box is checked on the image file you use for the logo or background. To ensure the Available Without Login box is checked, click the image while the SCIS Settings record is in View mode to be directed to the image file record. You can edit the image file record to check the box.

Select or add your logo images using the following fields on the General subtab:

- **Logo** – Select the image to display in SCIS as your company logo. This shows in the upper left corner after logging in to SCIS.
- **Login Logo** – Select the logo image that displays on the SCIS Login page. Because this image is displayed when employees first visit the page, prior to logging in, only the website filter is applied here. Location and subsidiary filters are not applied to the Login Logo.
- **Printable Logo** – Select the logo image intended for printing on receipts.
- **Wallpaper** – Select the background image on the main SCIS application screen.

## Logo Image Dimensions

The size of the images that you select on the SCIS Settings record should have the same dimensions as the images used in SCIS by default. Note the dimensions for each type of logo. The following table shows the default image files installed with SCIS and the corresponding Logo fields on the SCIS Settings record.

| Logo Field | Default Image File | Dimensions |
|------------|--------------------|------------|
| Logo       | logo.png           | 215 x 46px |

| Logo Field     | Default Image File | Dimensions   |
|----------------|--------------------|--------------|
| Login Logo     | logo-login.png     | 243 x 66px   |
| Printable Logo | logo-black.png     | 600 x 100px  |
| Wallpaper      | wallpaper.jpg      | 1273 x 955px |

## Autocomplete Login

To enable the auto-complete login feature, check to the **Use Login Autocomplete** box on the SCIS settings record.

The first time the sales associate logs in after Autocomplete has been enabled, their email address is stored in the local database on the device. After that, the sales associate can take advantage of auto-complete capabilities on subsequent log-ins.

## Saved Search

(Optional) Select one or more searches in the **SCIS Saved Searches** list. The saved searches you select here are available to the SCIS Sales Clerk when they are logged in. For more information about creating these saved searches, see [Publishing Saved Searches to SCIS Users](#).

## Shipping Label Fields

The following fields are used for shipping fulfillment requests. When orders are shipped from the store, the shipping label is sent by email before it is printed. You can change the default text in the following fields:

- **Shipping Label Email Body** – This text appears in the email message.
- **Shipping Label Email Subject** – This is the text that appears as the subject of the email message.
- **Shipping Label Email Prefix** – This text appears before the @ symbol in the email address.

## Automatic Log Out

Security guidelines for the retail industry advise limiting the time a point-of-sale (POS) device will stay logged in during an idle session. An idle session is a period in which the application receives no manual input from a sales associate or other user.

The SCIS Settings > General subtab **Automatic Log Out** value determines the length of time a session can be idle before logging the sales associate out. After this time, the associate must log back in to continue using the device.

The maximum idle time is **180** minutes, with a minimum of **1** minute. 30 minutes is the default. Enter the number value only, without any text.

 **Note:** The Automatic Log Out time set here applies to devices assigned to the Locations, Subsidiaries, and Websites selected on the **Filters** subtab.

## SCIS Settings for Printing

To complete printer setup for SuiteCommerce InStore (SCIS), you must configure printer settings on the **SCIS Settings** custom record. Enter printer names and set paper sizes for the printers you are using with

SCIS. You can also set up automatic printing, so that receipt printing is automatically initiated when an order is submitted.

For step-by-step instructions, read [Setting Up Receipt Printers for SCIS](#).

 **Important:** Printing configuration is required for each location.

 **Note:** For details about printing checks (outside of SCIS), see the help topic [Printing Checks](#).

## SCIS Custom Attributes for PDP, Cart, Item, and Customer Search

Administrators can customize the SuiteCommerce (SCIS) user interface by displaying additional field attributes on certain pages. Placeholders, or **zones** define areas in SCIS that can be customized. Administrators define the fields, or **attributes** that should appear in each zone.

For more information, see [Creating SCIS Custom Attributes](#).

## SCIS Customer Settings

Use the SCIS Settings record to grant customer center access, set the default customer group, and add SCIS Custom Attributes to the Customer profile page. These settings affect new customer records created using SuiteCommerce InStore (SCIS).

- Check the **Give Access** box to grant customer center access to each customer who places an order. An email message is sent to the customer as notification that customer access has been granted.
- (Required) In the **Default Customer Group** list, accept the default value, **Default Customer**. For more information, read [Default Customer Group](#).

 **Important:** The Default Customer Group is a required field. Changing this setting from **Default Customer** may affect the ability to search for customers in SCIS.

- Click **New SCIS Custom Attributes** to create additional content for display on the Customer Profiles page. For more information, read [Customer Profile](#).

## SCIS Settings for Orders

The SCIS Settings record includes settings for orders submitted using SuiteCommerce InStore (SCIS). Click the Order subtab to define the following:

- **Charge Payments** – Check this box to ensure that credit card payments are charged. You can clear the box while you are testing your SCIS implementation on Sandbox, or while troubleshooting.
- **Signature Folder** – Enter the name of the folder in which you want to store signature images. If you have not created a folder for credit card signatures, then the folder is automatically created with the first credit card transaction that requires a signature.
- **Signature File Type** – Enter the file type you use for signature images. In most cases, enter **.png**.

 **Note:** The payment partner managing your payment devices (PIN pads) determine if and how signatures are required for credit card payments.

- **Voided Item** – Select the item record you use to represent voided line data. This item must be a non-taxable, non-inventory item with a price of zero (0).

- **Rounding Item** – (Required if you use multiple currencies) Select the item record used to represent the rounding amount for Payment Methods that use rounding. SCIS already provides this item by default. For more information, read [Setting up Currency Rounding for SCIS](#).
- **Search Transaction by Serial Number** – Check this box to enable the search of transactions by serial number or lot number. If this box is checked, you can find a transaction using the serial number or the lot number of an item on the transaction.

 **Note:** Using this transaction search setting may impact performance.

- **Execute Client Scripts** – Enables the system to execute AvaTax integration code as Client Scripts. This setting can help improve performance in SCIS, but it can affect transactions. Leave this box cleared if you do not use AvaTax, or you use AvaTax and your account does not experience any slowness when entering or working with orders.

 **Warning:** SCIS only supports client scripts for use with AvaTax integrations. You are responsible for testing and maintaining the client scripts that you create. Ensure your scripts work properly with each managed bundle update.

- **Enable Split Tender Refunds** – Check this box to enable paying refunds to customers using two or more payment methods on the same transaction.
- **Search Transaction Using Exact Match** – When the box is cleared, SCIS search returns a list of transactions based on the first characters of the transaction identifier. When the box is checked, SCIS search returns transactions based on exact match.
- **Optimize EMV** – Check this box to enable a performance enhancement. When this box is checked, SCIS submits a customer payment and invoice during the EMV device priming process. Because customer payments do not calculate taxes, or typically run several user event scripts, this optimization speeds up the process of submitting a sales transaction. When the box is cleared, a cash sale is created during the EMV device priming process.

This check box affects specific types of sales transactions:

- Sales transactions where the entire amount is processed using an EMV payment method.
- Sales transactions where an EMV payment method is the first one used in a split payment of more than one payment method.

Optimize EMV uses the **Invoice in Advance of Fulfillment** accounting option. For information about how Optimize EMV works for Pickup or Shipment orders, see [Invoice in Advance of Fulfillment with Optimize EMV](#)

 **Important:** Optimize EMV changes the payment process. If you want to use this setting, enable it in your sandbox account first and perform tests using sales and return transactions.

## QuickAdd Bar and Forms Settings for SCIS

Use the **Other Configuration** subtab on the SCIS Settings record to define QuickAdd bar behavior and forms settings for SuiteCommerce InStore (SCIS).

### QuickAdd Bar

- **Show Related Items** – Check the box to show an additional tab that displays related items associated with the last item on an order. You can define one or more related items by selecting them on item records.

- **Show Correlated Items** – Check the box to show an additional tab that displays Correlated Items associated with the last item on an order. Correlated items are items that are frequently bought together. This list is automatically generated by the system and cannot be configured.
- **Start Raised** – Check the box to show the SCIS main application screen with the QuickAdd bar expanded. When this box is cleared, the QuickAdd bar is collapsed on the main application page, and users can click the arrow to expand it.

## Transaction Forms

On the **Transaction Forms** subtab, select the forms you want to use for transactions submitted through SCIS. Select a form to use for each transaction.

 **Note:** Standard forms and forms that are installed by SCIS are updated or changed during scheduled updates to SCIS. Custom forms that you create are **not** changed during these updates.

The following screenshot shows a custom form selected for invoices, but standard forms selected for other transactions.

 **Tip:** You should create custom forms to avoid unexpected changes during a scheduled update. To create your custom forms, use the standard forms in NetSuite as templates. For more information about creating custom forms, read [Creating Custom Transaction Forms for SCIS Best Practice](#).

You are responsible for maintaining your own custom forms. Test your custom forms after each scheduled update to ensure your custom forms continue to work as expected.

## Creating Custom Transaction Forms for SCIS Best Practice

Administrators create custom forms to ensure there are no unexpected changes after a scheduled upgrade, or to implement a specific business process. Note that using custom forms which include fewer fields, only the fields required to capture essential information, can improve the performance of SCIS.

The more fields that are included on a custom form, the more likely it is that users will experience slower performance. Extra, non essential fields on a form can create lag time after clicking the submit button, while the application waits to write data to the system. SCIS installs a set of **Minimal forms**, but using these forms is not required.

 **Important:** You should test custom forms on your Sandbox environment to ensure they work as expected.

### To create custom transaction forms for SCIS:

1. Create a custom transaction form in NetSuite that is based on a Standard form.  
For example, if you want to create a custom version of the Standard Product Invoice, go to Customization > Forms > Transaction Forms, and then click **Customize** next to **Standard Product Invoice**.
2. Name your custom form.
3. Use the following guidelines when creating custom forms for SCIS:
  - Ensure that the **Enable Item Line Shipping** field is marked to show on transaction forms. This field is required on forms used for SCIS transactions.

- **Do not change or remove default tax settings.** If you modify default tax settings on these forms, tax may not be calculated properly, or you may not be able to submit transactions through SCIS.
  - To view the line item location on transactions entered using SCIS, ensure the **Line Item Location** field is marked to show on custom forms.
4. After you create custom transaction and entry forms, go to the **SCIS Settings** record to select the forms you want to use.

For general reference information about creating custom forms, read the help topic [Creating Custom Entry and Transaction Forms](#).

## Entry Forms

On the **Entry Forms** subtab select forms you want to use for customers created with SCIS, employees logging into SCIS, and more. To learn how to customize the entry form used for the Customer Profile, read [Configuring the Customer Entry Form](#).

## SCIS Settings for Receipts

Use the SCIS Settings record to set the source for generating certain SuiteCommerce InStore (SCIS) receipts, to select a receipt form, and to define the subject line on email receipts.

For more information about configuring receipts, read [Advanced Receipt Templates for SCIS](#).

## Source Receipts from Local Session

This setting adjusts the source for rendering receipts when a payment or refund occurs through an SCIS-supported payment device with Optimize EMV enabled. By default, SCIS uses records from the local session as the source for receipts from these transactions.

Using local-session sourcing for receipts reduces the time that customers who use a payment device must wait before they are released.

Using the local session is also the default for receipts from transactions that include an Invoice record. This invoice default means that most retailers experience optimal receipt performance even if they do not use Optimize EMV with payment devices.

Payment types such as cash use records transmitted to and received from the NetSuite database as the source for receipts.

Although we include the steps to disable using the local-session as the source for receipts, that should only be done if you are experiencing issues with your receipts.

### To disable local-session sourcing for rendering receipts:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Scroll to **SCIS Settings**, and then click **List** in that row.
3. Click **Edit** next to an existing SCIS Settings record to make changes.
4. Click the **Receipt** subtab to configure settings:
5. Clear the **Source Receipts from Local Session** option.

Clearing the option means that it is disabled. All receipts will be generated via NetSuite-sourced records.

 **Tip:** Checking the **Source Receipts from Local Session** option re-enables it.

6. Click **Save**.

### To select an SCIS receipt form:

1. Go to Customization > Lists, Records, & Fields.
2. Scroll to **SCIS Settings**, and then click **List** in that row.
3. Click **Edit** next to an existing SCIS Settings record to make changes.
4. Click the **Receipts** subtab to configure settings:
  - [Email](#)
  - [Preview](#)
5. Click **Save**.

## Email

Define settings in each of the following fields:

- **Order Subject** – Enter the subject line for receipts sent by email from an SCIS order.
- **Return Subject** – Enter the subject line for receipts sent by email from a return submitted through SCIS.
- **Email body** – Enter text sent in the body of an email attached to a receipt for an order or return transaction.
- **Email From** – Enter an address or an employee ID. This setting controls the from address when sending an email receipt. If you leave this field blank, then the sales associate ID is used. The email address comes from the employee record.

## Preview

SCIS periodically checks the print job status. In the **Message Timeout** field, define the interval time in milliseconds when the system checks the print queue. The default setting is 5,000, or 5 seconds.

## Selecting Sales Reports for SCIS

Administrators can select the sales reports they want to display in SuiteCommerce InStore (SCIS). You can use the saved searches installed by the SuiteApp, or you can use a custom saved search that you created.

 **Note:** To customize a saved search for use with SCIS, you must work from a copy of a saved search installed by the SuiteApp. For more information, read [Saved Searches, Reports, and Audit Logs](#).

On the **Sales Report** subtab. Select an SCIS sales report search for each of the following:

- **Net Sales Search** – Select a search for displaying daily sales graph data.
- **Sales by Department Search** – Select the search you want to use for displaying total sales by department graph data.

- **Retail Tenders Search** – Select the search you want to use for displaying total sales for each payment method (except Gift Cards).

## SCIS Cash Drawer Management Settings

SuiteCommerce InStore (SCIS) supports traditional, cash based point-of-sale capabilities. Administrators must complete general setup steps to use cash drawer management.

Advanced Cash Drawer Management provides features for sales associates working in multiple locations. Additional setup is required for Advanced Cash Drawer Management, including configuration of custom records and permissions. For more information, read [SCIS Cash Drawer Management](#).

## Localizing SCIS

SCIS provides localization support for Canada, Australia, New Zealand, UK, France, Germany, Italy, Japan, and Spain. This section includes setup information for localizing SCIS.

The following general capabilities are supported in SCIS:

- Currency
- Decimal precision
- Item pricing
- Taxes
- Receipts
- Cash rounding
- Address formats
- Phone formats
- Date formats



**Note:** Set the date format at Setup > Company > General Preferences. . For OneWorld accounts, the date format is specified on the default website subsidiary record. To modify this setting, edit the subsidiary record at Setup > Company > Subsidiary, and change the date format on the Preferences subtab.

## Custom Billing Address Form Templates

SCIS supports custom form templates for the customer profile billing address. Account administrators and other users with the Custom Address Form permission can create customized versions of a billing address form and assign it to be used in one or more countries.

Creating custom address forms is a task associated with NetSuite customization, and not specifically with SCIS. For more information about custom address forms, see the help topic [Customizing Address Forms](#).

In SCIS, the custom billing address forms that you create display in the customer profile only.

## Taxes and Localization

Typically, applicable taxes are displayed in the cart, checkout pages, and order confirmation. Alternately, you can set the website preference, **Prices Include Tax** to include tax in item prices displayed in SCIS.



**Note:** The **Prices Include Tax** check box is only applicable to the United Kingdom and International editions of NetSuite.

### To include tax in item prices:

1. Go to Commerce > Websites.
2. Click **Edit** next to your SCIS website.
3. Click the **Shopping** subtab.
4. Check the box next to **Prices Include Tax**.
5. Click **Save**.

When this preference is set, tax is included in the price of each item. If shipping and handling also include tax, then tax is included in the cost of shipping and handling. However, a separate line for tax still displays in the SCIS transaction summary.

Read the following topics to learn how to complete localization setup:

- [Setting Up SCIS for Multiple Countries](#)
- [Setting up Currency Rounding for SCIS](#)
- [Managing Multiple Languages for SCIS](#)

## Setting Up SCIS for Multiple Countries

To configure SuiteCommerce InStore (SCIS) for any country or region, you must complete some general setup in NetSuite, such as entering supported currencies, and entering prices for each currency on item records. You must also configure custom SCIS records appropriately.

**Note:** If you use Multiple Currencies in your account, an Administrator must ensure that the Currency permission exists on the SCIS Clerk role. For more information, read [SCIS Clerk](#).

### To assign multiple currencies to item records:

1. Setup currencies in NetSuite. Follow general NetSuite setup instructions. For more information see, [Multiple Currencies](#).
2. Enter currency prices on item records.

**Note:** If you use multiple currencies, you must enter prices in your base currency in addition to other currencies you support.

- a. Go to Lists > Accounting > Items.
- b. Click **Edit** next to the item record you want to update.
- c. Click the **Sales/Pricing** subtab.
- d. Enter prices for additional currencies.
- e. Click **Save**.

Follow these steps to create a new SCIS custom record as needed for each region.

### To create new SCIS custom records for certain regions:

1. To create a new custom record, go to Customization > Lists, Records, & Fields > Record Types.

2. Find the record type in the list.
3. Click **New Record**.
4. (Required) On the **Filters** subtab, select the appropriate Location, Website, and Subsidiary for each record.
5. Make sure employee records have the same subsidiary and location as the SCIS website that supports a particular region. Go to Lists > Employees to view employee records and verify Subsidiary and Location settings. For more information, see [Configuring Employee Records for SCIS](#).

## Configuring SCIS Custom Records for Multiple Regions

It's important to ensure that the proper locations and subsidiaries are selected for each SCIS custom record. In some cases, you must create a new record to define settings for a particular region. Ensure that the proper locations and subsidiaries are selected for each of the following SCIS custom records:

■ **SCIS Settings** – Required for the following items:

- Discounts
- Shipping
- Saved searches
- Logo and background images
- Settings for printing
- Custom attributes
- Customer settings
- Settings for orders
- QuickAdd bar
- Transaction forms
- Entry forms
- Settings for email receipts
- Sales reports



**Note:** You may need to create a new SCIS Settings record for certain settings that apply to a particular website, location, and subsidiary.

- **SCIS Quick Cash Denominations** – Required to support various currency denominations. There should be an SCIS Quick Cash Denomination record to reflect denominations for each currency in which you transact.
- **SCIS Permission** – Required for SCIS Clerk to access items. Ensure that you select the appropriate locations and subsidiaries on the Filters subtab.
- **SCIS Payment Method** – Required for payment methods that are only valid for a particular locale. There should be an SCIS Payment Method record to reflect payment methods that apply to each currency in which you transact.
- **SCIS QuickAdd Group** – Required for grouping items by locale. Ensure that you select the appropriate locations and subsidiaries on the Filters subtab.
- **SCIS QuickAdd Key** – Required for items to display correct currency symbol and price. Ensure that you select the appropriate locations and subsidiaries on the Filters subtab.
- **SCIS Discount Reasons** – Required to create a custom discount for subsidiary, website, and location. Ensure that you select the appropriate locations and subsidiaries on the Filters subtab.

- **SCIS Return Reason** – Required so that return reasons can be filtered by subsidiary, website, and location. Ensure that you select the appropriate locations and subsidiaries on the Filters subtab.

## Setting Filters on Custom Records

Click the **Filters** subtab on each custom record to select your settings.

Select a value for each filter that corresponds with the place where you want to support in SCIS. For example, if the SCIS Retail website, under the UK subsidiary in London supports the British Pound, then you would select **London** for **SCIS Location**, **Retail** for **Website**, and **Parent Company : UK** for **Subsidiary**.

If you do not want to setup specific localizations, then check the **Apply to All** boxes.

 **Note:** By default, the Filters are set to apply to all locations, websites, and subsidiaries.

## Setting up Currency Rounding for SCIS

SCIS can round the total order amount (up or down) to the nearest currency value for a particular locale. In this way, SCIS manages decimal precision effectively.

First, you must select the rounding item on the SCIS Settings record. Then, select a rounding setting on the **SCIS Payment Method** records you use for cash and for custom payment methods.

 **Note:** Rounding only applies to cash transactions and custom payments. After you complete the setup tasks, currency rounding is applied to the total amount of every cash payment or custom payment method, and refund involving a cash payment or custom payment method.

### To set up currency rounding:

1. Go to Customization > Lists, Records, & Fields.
2. Scroll to **SCIS Settings**, and then click **List** in that row.
3. Click **Edit** to modify an existing record.
4. Click the **Order** subtab.
5. Select the Rounding Item installed by the SuiteCommerce InStore SuiteApp. It is named, **ns\_pos\_rounditem**
6. Click **Save**.
7. Edit the **CustomConfiguration.js** file.

Add IDs for the tax groups you want to use for calculating tax on transactions where rounding was applied. Set the applicable zero percent tax groups for rounding. (Replace 0 with the ID for the applicable tax groups in your account.)

```

1  ,   nonTaxableTaxCodes: {
2      US: 0
3      ,   CA: 0
4      ,   AU: 0
5      ,   NZ: 0
6      ,   GB: 0
7      ,   SP: 0
8      ,   DE: 0
9      ,   FR: 0

```

8. Set the **Rounding** field on **SCIS Payment Method** records.

- a. Go to Customization > Lists, Records, & Fields.
  - b. Scroll to **SCIS Settings**, and then click **List** in that row.
  - c. Set rounding on cash payment methods and custom payment methods.  
Cash amounts are rounded up or down according to the smallest SCIS quick cash denomination, according to the currency in your locale and your settings. Select from the following options:
    - **Round up** – Select this option to always round up to the nearest Quick Cash Denomination.
    - **Round down** – Select this option to always round down to the nearest Quick Cash Denomination.
    - **Auto** – Select this option to round up or down to the nearest Quick Cash Denomination based on the number. For example, if the smallest Quick Cash Denomination is 0.5, then:
      - An order subtotal of 10.1 rounds to 10.0
      - An order subtotal of 10.4 rounds to 10.5
    - Select the blank option, if you do not want to enable rounding for that payment method.
9. On the **Filters** subtab, select filters for Location, Website, and Subsidiary.

 **Note:** By default, the filters are set to apply to all locations, websites, and subsidiaries.

10. Click **Save**.

To view a list of SCIS installation tasks, see [SuiteCommerce InStore Installation](#).

## Managing Multiple Languages for SCIS

Administrators can set up SCIS to support multiple languages. This is useful if you use SCIS in multiple retail locations where sales associates speak different languages. Sales associates can select the language of their choice in the User Menu. First enable the Multi-Language feature in your NetSuite account, select languages in NetSuite, and then select them on your SCIS website.

### To setup SCIS to support multiple languages:

1. Ensure that the **Multi-Language** feature is enabled at Setup > Company > Enable Features.
2. Enable the languages that you want to show in SCIS. Do this in your NetSuite account first. Go to Setup > Company > General Preferences. On the languages subtab, select the languages you want to show in SCIS.
3. Select the languages on the SCIS website. Go to Commerce > Websites.
  - a. Click **Edit** next to your SCIS website.
  - b. Click the **Shopping** subtab.  
At the bottom of the page, click **Languages**. Mark the languages you want available online. Sales associates will be able to choose these languages in the SCIS User menu.
4. Click **Save**.

SuiteCommerce InStore installs a language folder in the file cabinet which includes translations for UI strings. The folder contains a set of JavaScript files—one for each language supported in SCIS.

You can make changes to any of these JavaScript files to change the translation for a particular term. Note, however that the languages folder is updated and each file is overwritten periodically with each major and minor release to the managed SuiteApp. If you make changes to one of the language files,

save a copy of the modified file on your computer. After a scheduled release, you can upload your modified file to reapply your customization.

 **Important:** If you make changes to one of the JavaScript files in the Languages folder, download and save the modified file on your computer. After a managed SuiteApp update, all files in the languages folder are overwritten. After an update, you must upload your modified file to reapply your customization.

## Advanced Receipt Templates for SCIS

SCIS supports the Advanced PDF/HTML Templates feature in NetSuite for customizing receipts. You can use SCIS Receipt Templates to create your own receipts for print and email. The SuiteCommerce InStore SuiteApp installs a set of receipt templates.

### Creating Custom Receipt Templates

To create a custom receipt template, you must make a copy of the template you want to use, and then make changes to the copy. Don't use the default receipt templates in everyday business. Because, SCIS is a managed SuiteApp, any changes to the default templates will be overwritten by future updates to the SuiteApp. For more information read, [Customizing a Receipt Template for SCIS](#).

 **Important:** Do not modify any of the receipt templates that are installed by default. Because SuiteCommerce InStore is a managed SuiteApp, your changes to the templates will be overwritten by automatic updates to the SuiteApp.

### Creating SCIS Receipt Template Custom Records

You must create an **SCIS Receipt Template** custom record for each receipt template you use with SCIS. For example, if you want to create different receipts for different locations, you must create a custom record to define the location where each receipt template is available. For more information, see [Creating SCIS Receipt Template Records](#)

## Customizing a Receipt Template for SCIS

### SCIS Customize Basic Receipts

To customize one of receipt templates installed by the SuiteCommerce InStore SuiteApp, make a copy. After you make a copy of the receipt template, you can modify your copy to fit your particular business needs.

#### To make a copy of the SCIS Receipt Template:

1. Ensure that you have enabled the advanced templates feature in your NetSuite account.
  - a. Go to Setup > Company > Setup Tasks > Enable Features.
  - b. Click the **SuiteCloud** tab.
  - c. Under SuiteBuilder, check the **Advanced PDF/HTML Templates** box.
  - d. Click **Save**.
2. Go to Customization > Forms > Advanced PDF/HTML Templates.
3. Find the **SCIS Receipt Template** you want to modify.

4. Make a copy of the SCIS Receipt Template.
  - a. Click **Edit**.
  - b. Click **Template Setup**, and then enter a name for the copy.
  - c. Click **Save** in Template Setup.
  - d. Click **Save As** in the Advanced Template window.

After you have created your own receipt template, you can make changes as needed. For example, you may want to include custom fields on the print or email receipt. For more information about adding custom fields, read [Adding Fields to Custom SCIS Receipt Templates](#). See also, [JSON Object Data for SCIS Receipt Templates](#)

Next, you must create an SCIS Receipt Template custom record to make your copy available in SCIS. For more information, read [Creating SCIS Receipt Template Records](#).

## Creating SCIS Receipt Template Records


After you have customized receipt templates for use in SuiteCommerce InStore, create an SCIS Receipt Template custom record for each receipt template. The custom records enable sales associates to select your custom receipt templates in SCIS.

### To make your receipt template available in SCIS:

1. Go to Commerce > InStore > Receipt Templates.
2. Click **New SCIS Receipt Template**.
3. In the **Custom Form** list, select Standard or Custom SCIS Receipt Template.
4. Enter a **Name** for the receipt template. This is the name that is displayed in SCIS.
5. (For use only in Japan) In the **Minimum Amount for Fiscal Stamp** field, enter the amount over which the receipt will include a space for a Fiscal Stamp.
6. On the **Filters** subtab, select the location, website, and subsidiary where this template will be applied. If you do not want to make specific selections, check the **Apply to All** boxes.
7. On the **Template Settings** subtab, set the following:
  - **Use as Default** – (Optional) Check this box to set the template you select for printed receipts to show in the following scenarios:
    - ☐ When a transaction is submitted (also applies when auto-print is enabled).
    - ☐ When a transaction is about to be suspended.
    - ☐ When a transaction is searched and the receipt is shown.
    - ☐ When a quote is generated.
  - **Template Type** – (Required) Select a type of template. You can choose to apply a template to receipts sent by email, apply it to printed receipts, or to both print and email. If you apply the same template to both print and email, then the sales associate can choose a receipt type when completing the transaction.
  - **Select a Template** – (Required) Select the copy of the SCIS receipt template that you created.
8. Click **Save**.

When you create multiple SCIS Receipt Template custom records, sales associates can select the appropriate receipt template on completing the transaction. The screenshot below shows a list of available receipt templates in the right pane. To select a receipt template for the order, the sales associate clicks an option in the list. The text and layout of the selected receipt displays in the left pane. Because

the selected receipt template is available for both print and email, the sales associate can also choose the type of receipt at the top.

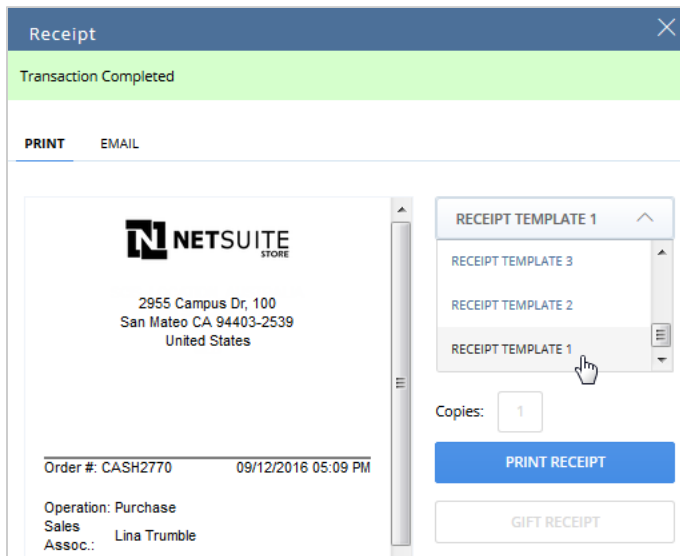

**Note:** The Print Receipt button is only displayed on tablets running SCIS for iOS or SCIS for Windows.

## Adding Fields to Custom SCIS Receipt Templates

You can add transaction fields to the receipt templates you use in SuiteCommerce InStore (SCIS). To add a field that doesn't already appear on a receipt, first modify the CustomConfiguration.js file. Next, modify your custom receipt template, adding the field to the receipt template code.

### To add a field to a receipt template:

1. Modify the CustomConfiguration.js file. Add the following code snippet, including the field you want to add inside the corresponding array. You can add more than one field to your custom receipt template. Note the following example, which includes various fields added for display on the receipt template:

```
1 // Add custom fields to show in receipt
2 customMappingFields: {
3 //Define extra fields in the order
4 order: ['ismultishipto'],
5 //Define extra fields in the creditmemo
6 creditMemo: ['billcountry'],
7 //Define extra fields in the lines of the order
8 line: ['itemtype'],
9 //Define extra fields in the lines of the creditmemo
10 creditMemoline: ['printitems']
11 },
```

**Note:** All field types are supported except fields of type Select.

View the **SuiteScript Records Browser** to see a complete list of the fields you can add to each array. Note the following:

- For order, the supported fields are listed in the SuiteScript records browser, under [Cash Sale](#). Only objects listed under Fields are supported.

- For creditMemo, the supported fields are listed in the SuiteScript records browser, under [Credit Memo](#). Only objects listed under Fields are supported.
  - For line, the supported fields are listed in the SuiteScript records browser, under [Cash Sale](#). Only objects listed under item-Items are supported.
  - For creditMemoLine, the supported fields are listed in the SuiteScript records browser, under [Credit Memo](#). Only objects listed under item-Items are supported. Also note that only and/or operations are supported.
  - A custom field can be placed in any of the following arrays: order, creditMemo, line, or creditMemoLine.
2. Save your changes to the CustomConfiguration.js file.
  3. Modify your custom SCIS Receipt Template.
    - a. Go to Customization > Forms > Advanced PDF/HTML Templates.
    - b. Click **Edit** next to the custom SCIS Receipt Template you want to modify.



**Important:** Do not modify the default SCIS Receipt Templates, because these templates may be overwritten during periodic SuiteApp updates.

- c. Add lines to the receipt template code to display additional fields. Refer to the following examples:

```

1 //Show an additional field on the order
2 Multiship: ${JSON.customExtraFields.ismultishipto}
3
4 //Show an additional field on the creditmemo
5 Country: ${JSON.creditmemo.customExtraFields.billcountry}
6
7 //Show an additional field on the line
8 <#list JSON.lines as line>
9     Type: ${line.customExtraFields.itemtype}
10 </#list>

```

For more information, read [JSON Object Field Mapping](#).

4. Go to Customization > Lists, Records, & Fields > Record Types.
5. Find **SCIS Receipt Templates** in the list, and click **New Record**.
6. Create a new SCIS Receipt Template with the new custom template selected.
7. Click **Save**.

## JSON Object Field Mapping

To generate the receipt template, SCIS includes logic that gets data from a global JSON object. The following bulleted list provides a high-level description of the structure. Use the following information as a guide to get the fields you require:

- creditmemo (object)
  - lines (array)
    - customExtraFields (array)
 

If you want to get a field that you defined in the creditMemoline array, you can get that field from the creditmemo object (in the lines array, in customExtraFields . )
  - customExtraFields (array)
 

If you want to get a field that you defined in the creditMemo array, you can get that field from the customExtraFields array, in the creditmemo object.



- customExtraFields (array)

If you want to get a field that you defined in the order array, you need to get that field from the **customExtraFields** array.

- lines (array)

- customExtraFields (array)

If you want to get a field that you defined on the line array, you need to get that field from the customExtraFields array in the lines array.

## JSON Object Data for SCIS Receipt Templates

The following tables describe the global JSON object included in receipt templates, as well as other objects included in the global object. For your convenience, some fields are exposed here that you can also access through the existing SuiteScript API.

| Object Name        | Object Type      | Description                                                                                                                                                                                                                                                                                                                    |
|--------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| createddate        | String           | Date that was created the order. Format MM/DD/YYYY HH:mm                                                                                                                                                                                                                                                                       |
| creditmemo         | JSON object      | Order summary information, such as total amount, discounts, and tax amount and lines of a credit memo                                                                                                                                                                                                                          |
| customer           | JSON object      | Customer assigned to the order.                                                                                                                                                                                                                                                                                                |
| customExtraFields  | JSON object      | Additional fields on the custom receipt template form. For more information, read <a href="#">JSON Object Field Mapping</a> .                                                                                                                                                                                                  |
| includeTaxInPrices | Boolean          | Flag to indicate when the prices have tax included.                                                                                                                                                                                                                                                                            |
| internalid         | String           | Internal ID for the transaction record.                                                                                                                                                                                                                                                                                        |
| labels             | JSON object      | Translated text that appears in the default template.                                                                                                                                                                                                                                                                          |
| lines              | Array of objects | Lines added to the order, each line contain an item.                                                                                                                                                                                                                                                                           |
| line               | JSON object      | Contains information about each line item on an order.                                                                                                                                                                                                                                                                         |
| location           | JSON object      | Current location from the employee.<br>Location information from the employee record.                                                                                                                                                                                                                                          |
| operation          | String           | Type of order. Possible values [ "Suspend"   "Exchange"   "Return"   "Purchase" ]                                                                                                                                                                                                                                              |
| payments           | Array of objects | Payments made to the order.                                                                                                                                                                                                                                                                                                    |
| payment            | JSON object      | Contains information about the payment associated with the order.                                                                                                                                                                                                                                                              |
| posStatus          | String           | Status of the order, mapped from the POS Status field. A numeric ID is displayed for each status value: <ul style="list-style-type: none"> <li>■ 1 - Open</li> <li>■ 2 - Tendering</li> <li>■ 3 - Closed</li> <li>■ 4 - Suspended</li> <li>■ 5 - Canceled</li> <li>■ 6 - Partially returned</li> <li>■ 7 - Returned</li> </ul> |

| Object Name | Object Type      | Description                                                                                                |
|-------------|------------------|------------------------------------------------------------------------------------------------------------|
|             |                  | <ul style="list-style-type: none"> <li>8 - Tendering and suspended</li> <li>9 – Dismissed</li> </ul>       |
| receiptType | String           | Possible value ["purchase"].                                                                               |
| recordtype  | String           | Contains the transaction record type. Possible values are, ["cashesale"   "invoice"   "creditmemo"].       |
| returnType  | String           | Contains the type of return transaction. Possible values are [ "unvalidated"   "validated" ].              |
| salesassoc  | JSON object      | Sales associate assigned to the order.                                                                     |
| status      | String           | Contains the status of the order transaction. Possible values [ "open"   "paidInFull"].                    |
| subsidiary  | JSON object      | Subsidiary assigned to the employee record.                                                                |
| summary     | JSON object      | Order summary information, such as total amount, discounts, and tax amount.                                |
| taxes       | Array of objects | Contains an array of tax Objects grouped by rate, it is added to the order summary and creditmemo summary. |
| tax         | JSON object      | Contains information about the tax charged on an order.                                                    |
| templateId  | String           | Internal ID of the receipt template record.                                                                |
| urlLogo     | String           | URL for company logo.                                                                                      |

## creditmemo

This object only exists if the recordtype is invoice.

| Object Name       | Object Type      | Description                                                                                                                                                                                     |
|-------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| customer          | JSON object      | Customer assigned to the credit memo.                                                                                                                                                           |
| customExtraFields | JSON object      | Additional fields on the custom receipt template form. For more information, read <a href="#">JSON Object Field Mapping</a> .                                                                   |
| discountitem      | JSON object      | Global discount applied of the creditmemo                                                                                                                                                       |
| entity            | String           | Customer Name as it appears in NetSuite, for example, 3832 John Smith.                                                                                                                          |
| internalid        | String           | ID for the transaction.                                                                                                                                                                         |
| lines             | Array of objects | Lines returned in a credit memo, each line contain an item.                                                                                                                                     |
| posStatus         | String           | Status of the order, mapped from the POS Status field. A numeric ID is displayed for each status value. For more information, see <a href="#">JSON Object Data for SCIS Receipt Templates</a> . |
| refunds           | Array of objects | Refund from credit memo.                                                                                                                                                                        |
| salesassoc        | JSON object      | Sales associate assigned to the credit memo.                                                                                                                                                    |
| salesrep          | JSON object      | Sales rep assigned to the credit memo.                                                                                                                                                          |

| Object Name             | Object Type | Description                                                                                    |
|-------------------------|-------------|------------------------------------------------------------------------------------------------|
| <a href="#">summary</a> | JSON object | Order summary information, such as total amount, discounts, and tax amount on the credit memo. |

## customer

This JSON object includes information about customer records including the default customer record used at the point-of-sale.

| Object Name | Object Type | Description                                                                                                                                                                                |
|-------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| email       | String      | Customer email address.                                                                                                                                                                    |
| entityid    | String      | Default customer record. This includes the following: ID, name of customer, name of employee and subsidiary in parentheses. For example, 11 Default Customer (Jane Smith, Parent Company). |
| internalid  | Number      | Customer record internal ID.                                                                                                                                                               |
| isdefault   | Boolean     | Returns true if this is a default customer record.                                                                                                                                         |
| isinactive  | Boolean     | Returns true if this customer record is marked inactive.                                                                                                                                   |
| isperson    | Boolean     | Returns true if this customer record is an individual as opposed to a company.                                                                                                             |
| name        | String      | Name, if the customer is an individual. If the customer is a company, this is the company name.                                                                                            |

## labels

This JSON object contains labels from the default template.

| Object Name      | Object Type | English Translated Text   |
|------------------|-------------|---------------------------|
| change           | String      | "Change"                  |
| customer         | String      | "Customer"                |
| discount         | String      | "Discount"                |
| giftcards        | JSON object |                           |
| ■ giftcard       | String      | "Giftcard"                |
| ■ giftcertnumber | String      | "Gift Certificate Number" |
| handlingCost     | String      | "Handling Cost"           |
| operation        | String      | "Operation"               |
| payments         | JSON object |                           |
| ■ authcode       | String      | "Authorization Code"      |
| ■ ccexpiredate   | String      | "CC Expiration"           |
| ■ ccname         | String      | "Name"                    |
| ■ ccnumber       | String      | "CC Number"               |

| Object Name    | Object Type | English Translated Text              |
|----------------|-------------|--------------------------------------|
| refunds        | JSON object |                                      |
| ■ checknum     | String      | "Checknum"                           |
| ■ refund       | String      | "Refund"                             |
| returnDiscount | String      | "Returned Items Discount"            |
| returnSubtotal | String      | "Returned Items Subtotal"            |
| returnTax1     | String      | "Returned Tax" or "Returned GST/HST" |
| returnTax2     | String      | "Returned PST"                       |
| returnTotal    | String      | "Returned Item TOTAL"                |
| salesAssoc     | String      | "Sales Assoc."                       |
| salesRep       | String      | "Sales Rep."                         |
| shippingCost   | String      | "Shipping Cost"                      |
| subtotal       | String      | "Subtotal"                           |
| tax1           | String      | "GST/HST"                            |
| tax2           | String      | "PST"                                |
| thanks         | String      | "Thanks for coming!"                 |
| total          | String      | "TOTAL"                              |

## lines

This is an array of line objects added to the order. JSON format is the same as `creditmemo.lines`.

## line

This JSON object contains information about each line item on an order.

| Object Name       | Object Type | Description                                                                                                                   |
|-------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------|
| amount            | String      | Amount on the line item.                                                                                                      |
| customExtraFields | String      | Additional fields on the custom receipt template form. For more information, read <a href="#">JSON Object Field Mapping</a> . |
| item              | JSON object | Describes the line item.                                                                                                      |
| ■ displayname     | String      | Item display name.                                                                                                            |
| ■ internalid      | String      | Item ID of the item record.                                                                                                   |
| ■ isVoid          | Boolean     | Defines the void item.                                                                                                        |
| ■ itemType        | String      | Defines the type of item.                                                                                                     |
| ■ thumbnail       | String      | Defines the thumbnail image.                                                                                                  |

| Object Name | Object Type | Description                                                                                                                   |
|-------------|-------------|-------------------------------------------------------------------------------------------------------------------------------|
| ■ voidqty   | Number      | Stores the original quantity of the line, if the line is voided from the order.                                               |
| ■ price     | Number      | Defines the item price.                                                                                                       |
| line        | Number      | Defines the line item.                                                                                                        |
| order       | String      | True if the line was marked as an order, or False if the line is a cash sale.                                                 |
| quantity    | String      | Quantity on the item line.                                                                                                    |
| tax_code    | String      | Contains the internal ID of the tax code associated with this line, for example if the item is Not Taxable it shows -7 or -8. |

## location

This object contains information about the location associated with the transaction.

| Object Name                            | Object Type | Description                                                                      |
|----------------------------------------|-------------|----------------------------------------------------------------------------------|
| address                                | String      | SCIS location where the transaction occurred.                                    |
| city                                   | String      | City where the transaction occurred.                                             |
| country                                | String      | Country where the transaction occurred.                                          |
| custrecord_ns_pos_location_diffaccount | String      | Difference account associated with the sales associate on the order.             |
| custrecord_ns_pos_location_safeaccount | String      | Safe account (or initial loan) associated with the sales associate on the order. |
| custrecord_ns_pos_servicehours         | String      | Service hours for the SCIS location.                                             |
| internalid                             | String      | ID for the location record associated with the transaction.                      |
| name                                   | String      | Name of the location associated with the transaction.                            |
| state                                  | String      | State from the location record associated with the transaction.                  |
| zip                                    | String      | Postal code from the location record associated with the transaction.            |

## payments

This is an array of Payment objects.

### payment

This object contains information about the payment associated with the order.

| Object Name | Object Type | Description                                 |
|-------------|-------------|---------------------------------------------|
| changeDue   | String      | Change due after cash payment on the order. |
| internalid  | String      | Internal ID of the payment method.          |

| Object Name       | Object Type | Description                                                                                                     |
|-------------------|-------------|-----------------------------------------------------------------------------------------------------------------|
| paymentmethod     | String      | Contains the ID of the payment method record from the Accounting List. (Setup > Accounting > Accounting Lists.) |
| paymentmethodname | String      | Name of the payment method associated with the transaction.                                                     |
| total             | String      | Contains the total of each payment made on the order.                                                           |
| totalTendered     | String      | Total amount paid.                                                                                              |

## salesassoc

This object contains information about the sales associate on the order.

| Object Name | Object Type | Description                                                  |
|-------------|-------------|--------------------------------------------------------------|
| id          | String      | Internal ID from the employee record of the sales associate. |
| name        | String      | Name of the employee.                                        |

## subsidiary

This object contains information about the subsidiary associated with a transaction. This is applicable for accounts using OneWorld.

| Object Name | Object Type | Description                     |
|-------------|-------------|---------------------------------|
| legalname   | String      | Subsidiary legal name.          |
| tin         | Boolean     | Taxpayer Identification Number. |

## summary

This object contains information from the order summary section of an order.

| Object Name            | Object Type      | Description                                                                                                                                                                                      |
|------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| amountdue              | Number           | Amount due on the order.                                                                                                                                                                         |
| changedue              | String           | Change due after cash payment on the order.                                                                                                                                                      |
| createddate            | String           | Date the order was created.                                                                                                                                                                      |
| discounttotal          | String           | Total discount applied to the order.                                                                                                                                                             |
| giftcertapplied        | String           | Gift certificate applied to the order.                                                                                                                                                           |
| handlingcost           | String           | Handling cost applied to the order, if applicable.                                                                                                                                               |
| shippingcostoverridden | String           | Contains a value related to the Shipping cost activation/deactivation in SCIS (sidebar). If you changed the shipping cost to zero, the value is T. If shipping cost was not modified it shows F. |
| subtotal               | String           | Subtotal of the order.                                                                                                                                                                           |
| taxes                  | Array of objects | Contains a list of taxes grouped by rate                                                                                                                                                         |

| Object Name | Object Type | Description                                                                                                            |
|-------------|-------------|------------------------------------------------------------------------------------------------------------------------|
| taxtotal    | String      | Total tax charged on the order.                                                                                        |
| tax2total   | String      | If multiple taxes were applied, then this shows the other tax amount. For example if both GST and PST tax is incurred. |
| total       | String      | Total amount of the order.                                                                                             |
| tranid      | String      | Transaction ID of the order.                                                                                           |

## taxes

This object contains an array of tax objects grouped by rate, it is added to the order summary and creditmemo summary.

## tax

This object contains information about the tax charged on an order.

| Object Name   | Object Type | Description                                                                                                                 |
|---------------|-------------|-----------------------------------------------------------------------------------------------------------------------------|
| amount        | Number      | Amount of tax on the order.                                                                                                 |
| amountCharged | Number      | When the tax applied to the order is a Tax Group, the amount charged is the total amount of the order (taxes not included). |
| fromTax       | String      | Describes the number of the tax which belongs to a tax groups. It can be tax1 or tax2. This value is used internally.       |
| rate          | Number      | Describes the tax that was applied in the line. Examples tax1 or tax2.                                                      |

## Custom Receipt Template Setup for SCIS

Use the following instructions to ensure that your custom receipt template is used on sales transactions submitted in SCIS.



**Important:** Customers are solely responsible for working with their designated third party credit card processor to ensure that any credit card digit fields included on sales receipts generated by the NetSuite SuiteCommerce InStore (SCIS) module comply with applicable laws including, but not limited to, the Fair and Accurate Credit Transactions Act (FACTA). The content of such credit card digit fields (for example, a "Shopper Print Block" field) are auto-populated with information received directly from Customers' designated third party credit card processor and is not modified by Oracle.

### To set a custom receipt template as the SCIS receipt template:

1. Go to Customization > Forms > Advanced PDF/HTML Templates.
2. Click **Edit** next to your customized template. Ensure that the **Source Code** toggle is on.
3. Copy the source code that is your customized receipt.
4. After you have copied the source code, go back to the **Advanced PDF/HTML Templates** list page and click **Customize** next to **Standard SCIS Receipt Template PDF/HTML Template**.

The **Custom SCIS Receipt Template PDF/HTML Template** page appears.

5. On the **Custom SCIS Receipt Template PDF/HTML Template** page, ensure the **Source Code** toggle is on, and then paste the source code of the receipt template you copied in Step 3.
6. Click **Template Setup**. Change the title to something that describes your customized receipt template. Click **Save**.
7. Click **Save** on the Advanced PDF/HTML Template page to save your template.
8. Go to Customization > Forms > Advanced PDF/HTML Templates. Verify that your template is on the list of Advanced PDF/HTML templates.
9. Set your custom template as the **SCIS Receipt Template**.  
In the global search box, search for the **SCIS Receipt Template** page. Alternately, go to Customization > Lists, Records & Fields > Records > SCIS Receipt Template. Then edit the record you are using in SCIS.
  - a. Set SCIS Receipt Template filters.
  - b. Select your custom template.
  - c. Click **Save**.

## Configuring SCIS Payment Methods

SuiteCommerce InStore (SCIS) uses payment methods configured in your NetSuite account. The SCIS Payment Methods custom record makes payment methods that you have already configured in NetSuite available for SCIS. Before you configure the custom record for SCIS, you must create a payment method in NetSuite. For step-by-step instructions, read the help topic [Creating a Payment Method](#).

## SCIS Payment Method Records

Each SCIS Payment Method requires at least one authorized role. Administrators can configure payment methods and set authorized roles. You must configure an SCIS Payment Method record for each payment method you want to use with SCIS. At minimum, create one SCIS payment record for each type of credit card you plan to use, and an SCIS payment record for cash.

### To configure SCIS Payment Method records:

1. Create a payment method in NetSuite. The SCIS Payment Method is associated with the payment method in NetSuite. For more information read, [Creating a Payment Method](#).
2. Go to Commerce > InStore > Payment Methods.
3. Click **New SCIS Payment Method**.
4. Configure the required fields described below. All other fields are optional based on the intended behavior of the payment method.
  - **Payment Method** – (Required) Select the payment method you want to use with SCIS.
  - **Open Cash Drawer** – Specifies that the cash drawer should be opened when using this payment type.
  - **Capture Signature** – Indicates that a customer signature is required when using this payment method.



**Note:** The payment partner managing your payment devices (PIN pads) determine if and how signatures are required for credit card payments.

- **Credit Card Pattern** – Defines the appropriate credit card pattern, if this payment method represents a credit card type. For more information, read [Credit Card Patterns for SCIS](#).
- **Is Check** – Prompts for a check number when using this payment method.



- **Is Main** – Check this box to show the payment method in the list on the transaction summary pane of the SCIS main screen.
- **Icon** – Defines the appropriate credit card icon, if this payment method represents a credit card type. For more information, read [Credit Card Icons](#).
- **Authorized Roles** – (Required) Defines the roles authorized to submit transactions with this payment method. You must select at least one Authorized Role for the payment method to show in SCIS. See also, [Role-Based Payment Methods](#).

 **Note:** Employees with authorized roles must have an SCIS Access Code on their employee records. For more information, see [Configuring Employee Records for SCIS](#).

- **Require Authorization Roles** – Defines roles that require additional authorization to submit a transaction with this payment method.
  - **Use Cash Drawer Account** – Check this box to use the cash drawer account associated with the SCIS Clerk.
  - **Rounding** – This setting is used for currency rounding in NetSuite accounts that use multiple currencies. Set rounding on cash payment methods and custom payment methods. Cash amounts are rounded up or down according to the smallest SCIS quick cash denomination, according to the currency in your locale and your settings. Select from the following options:
    - Select the blank option, if you do not want to enable rounding for that payment method.
    - **Round up** – Select this option to always round up to the nearest Quick Cash Denomination.
    - **Round down** – Select this option to always round down to the nearest Quick Cash Denomination.
    - **Auto** – Select this option to round up or down to the nearest Quick Cash Denomination based on the number. For example, if the smallest Quick Cash Denomination is 0.5, then: An order subtotal of 10.1 rounds to 10.0, An order subtotal of 10.4 rounds to 10.5.
5. Select the **Location**, **Website**, and **Subsidiary** where you want the payment method to be available. You can select more than one value in each box. Check the **Apply to All** boxes if you want to enable the payment method to all locations, SCIS websites, or subsidiaries. See also, [Location-Based Payment Methods](#).

 **Note:** By default, the filters are set to apply to all locations, websites, and subsidiaries.

6. Click **Save**.

## Role-Based Payment Methods

Setting an authorized role enables employees with the authorized role to accept payment with the SCIS Payment Method. For example, you might not want checks accepted as payment for purchases made through SCIS. In this case, you would select Administrator as the only Authorized Role for that payment method. With this configuration, Check is not available to sales associates using SCIS.

## Location-Based Payment Methods

Selecting a location on a payment method enables you to configure different locations for payment methods. For example, if you want to make a certain credit card available as a payment method for sales associates to use at a retail location in California, you can select California as the location on the payment method. You must also select the sales associate's role as the Authorized Role on the payment method.

Typically, multiple payment methods are available to most sales associates. The following order of precedence determines the payment methods available:

1. **Location Specific** – used when the location is defined.
2. **General** – used when neither a Requires Authorization role nor location are defined.

You can view a list of all transactions submitted with SCIS. The list includes the person with the authorized role. For more information, see [SCIS Audit Log](#).

## Credit Card Patterns for SCIS

Credit card patterns are regular expressions that are used to match a credit card number with its provider. SuiteCommerce InStore (SCIS) uses these regular expression in the following contexts:

- To associate a credit card number or provider with a specific payment type.
- To verify a credit card number when a sales associate manually enters credit card information.

### To configure the credit card pattern:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find **SCIS Payment Methods** in the list, and then click **List** in the same row.
3. Click **Edit** next to the SCIS Payment Method custom record that corresponds with a credit card.
4. In the **Credit Card Pattern** field, copy and paste the pattern that corresponds with the credit card provider. Use the table below to find the appropriate pattern.
5. Click **Save**.

To configure the credit card pattern, edit the corresponding SCIS Payment Method. For more information, see [Configuring SCIS Payment Methods](#). The following table lists the credit card patterns for each provider.

| Provider         | Pattern                                                                                        |
|------------------|------------------------------------------------------------------------------------------------|
| VISA             | ^4[0-9]{12}(?:[0-9]{3})?\$                                                                     |
| MasterCard       | ^(?:5[1-5][0-9]{2}   222[1-9]   22[3-9][0-9]   2[3-6][0-9]{2}   27[01][0-9]   2720)[0-9]{12}\$ |
| American Express | ^3[47][0-9]{13}\$                                                                              |
| Diners           | ^3(?:0[0-5]   [68][0-9])[0-9]{11}\$                                                            |
| Discover         | ^6(?:011   5[0-9]{2})[0-9]{12}\$                                                               |
| JCB              | ^(?:2131   1800   35\d{3})\d{11}\$                                                             |

## Credit Card Icons

For each credit card type, you can assign an icon to each credit card provider. SuiteCommerce InStore (SCIS) installs a set of credit card icons in the file cabinet. To assign an icon to a credit card payment method, edit the corresponding SCIS Payment Method custom record. For more information, see [Configuring SCIS Payment Methods](#).

### To assign an icon to a credit card payment method:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find **SCIS Payment Methods** in the list, and then click **List** in the same row.
3. Click **Edit** next to the SCIS Payment Method custom record that corresponds with a credit card.
4. In the **Icon** field, start typing the file name of the icon you want to use, and then select the appropriate credit card icon.

5. Click **Save**.

The following table lists the name of the icon associated with each provider.

| Provider         | Filename     |
|------------------|--------------|
| Visa             | visa.png     |
| Master Card      | master.png   |
| American Express | american.png |
| Diners           | diners.png   |
| Discover         | discover.png |
| JCB              | jcb.png      |

## Setting Up Payment Services for SCIS

SuiteCommerce InStore (SCIS) supports a variety of in-person payment types including Apple Pay, EMV, Android Pay, Samsung Pay, and PIN Debit. Support for certain payment types and devices depends on the Payment Service Provider you choose.

To configure payment services for SCIS, you must establish a merchant account with a PSP that provides a SuiteApp for installation in your NetSuite account. You must also create a payment processing profile and payment method in NetSuite, and then configure related SCIS custom records.

**Note:** The procedures in the following topics must be performed during the initial installation and configuration of SuiteCommerce InStore (SCIS).

Read the following topics for more information:

- [Understanding Payment-device Processing](#)
- [Payment Result Preview Processing](#)
- [Configuring SCIS Gateway Records](#)
- [Configuring EMV Payment Services for SCIS](#)
- [Configuring SCIS Payment Methods](#)

**Note:** Before you start to configure any payment service for SCIS, you must establish a merchant account with a Payment Service Provider outside of NetSuite.

**Important:** Customers are solely responsible for working with their designated third party credit card processor to ensure that any credit card digit fields included on sales receipts generated by the NetSuite SuiteCommerce InStore (SCIS) module comply with applicable laws including, but not limited to, the Fair and Accurate Credit Transactions Act (FACTA). The content of such credit card digit fields (for example, a "Shopper Print Block" field) are auto-populated with information received directly from Customers' designated third party credit card processor and is not modified by Oracle.

## Understanding Payment-device Processing


This section provides an overview of the SuiteCommerce InStore (SCIS) flow used to tender credit card and other payments made through an EMV-enabled payment device.

It also covers the Payment Result Preview (PRP) feature you can use to reduce the time spent waiting for a payment to complete.

- [Payment Processing Flow](#)
- [Payment Result Preview Processing](#)
  - [Payment Partner Setup](#)
  - [Role Setup](#)
  - [Reviewing Payment Result Preview Records](#)

## Payment Processing Flow

This diagram and corresponding steps illustrate how SCIS and NetSuite interact to process payments. Because processes can be customized or include options, the information is intended as a general overview.

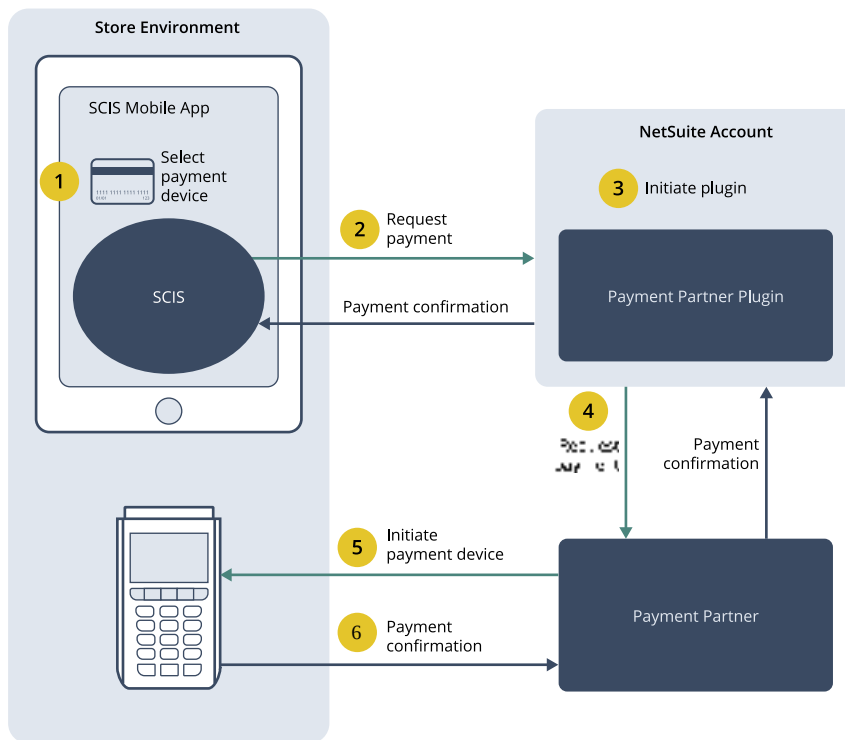

### 1. Select payment device

The sales associate uses SCIS to select a payment device. SCIS displays an informational message to the sales associate, indicating the payment device is being initialized.

### 2. Request for payment

The request for payment occurs between SCIS and the NetSuite account. At this time, a transaction record is created in NetSuite. SCIS begins to send requests for payment status periodically to the transaction record created in NetSuite.

### 3. Initiate Plugin

It is through the transaction record that the request for payment reaches the payment partner plugin. The payment partner plugin receives the request and starts communication with the payment partner gateway, if a gateway is configured. Alternately, the request goes directly to the payment device.

#### 4. Request for payment

The payment partner plugin sends a request to the payment partner for payment device initialization and sends the request for the payment.

#### 5. Initialize PIN pad

SCIS displays an informational message to the sales associate, "waiting for customer payment."

Next, the shopper interacts with the payment device. If a payment gateway is configured, then data is exchanged between the payment device and the gateway. This communication is not monitored by SCIS.

#### 6. Payment confirmation

The payment partner sends payment confirmation to NetSuite, and then the transaction record is updated. Through its continual requests, SCIS discovers the confirmed payment status. The sales transaction in SCIS is complete.

## Payment Result Preview Processing

This processing boosts performance for credit card and other payments made through an EMV-enabled payment device.

Standard EMV payment processing creates and updates a transaction record in NetSuite. One update is saving the payment **Pending** status. The Pending status is saved before processing the **Accept** or **Reject** result from the payment partner. This intermediate step can delay tendering a payment and providing a receipt.

Preview processing creates a **Payment Result Preview** (PRP) record in addition to the transaction record. The preview posts the Accept or Reject status from the payment partner without waiting for the Pending status to save in NetSuite. The PRP record uses fewer fields than a transaction record and doesn't run scripts or work flows, so it is quicker to update.

## Payment Partner Setup

To get the benefits of PRP processing, your payment partner needs to set up their processes to use the PRP record. If your payment partner isn't set up, completing a payment will take longer because you'll have to wait for the Pending status to save.

## Role Setup

To include PRP processing when tendering payment, the sales associate or employee must have **View Payment Result Previews** permitted in their role assignment. The **SCIS Clerk** role has this permission by default, but you'll usually need to update custom roles.

If an associate takes an EMV payment without this permission, the system does the standard wait for NetSuite to save the Pending status.



**Important:** To enable PRP at the point-of-sale (POS), the associate performing a transaction must have **View Payment Result Previews** permitted to their role. Review and update the roles you use at the POS, including your custom roles.

### Assigning View Payment Result Previews to a role:

1. Go to Setup > Users/Roles > Manage Roles.

2. Locate the role and click **Edit**.
3. Under the **Permissions** subtab, look for **View Payment Result Previews**.
4. If **View Payment Result Previews** is not listed:
  - a. Begin entering View Payment Result Previews.
  - b. Select **View Payment Result Previews**.
  - c. Click **Add**.
5. If you made changes, click **Save**. Otherwise, click **Cancel**.

For more information about working with roles, see [SCIS Roles and Permissions](#).

## Reviewing Payment Result Preview Records

You can review the PRP records created for prior transactions through a **Saved Search**. The records are not viewable through the Transactions tab.

In NetSuite, go to Lists > Search > Saved Searches > New. Choose **Payment Result Preview** as the **Search Type**.

## Configuring SCIS Gateway Records

Before you create an SCIS Gateway record, you should already have a payment processing profile in NetSuite for your payment services provider. For more information about creating payment processing profiles, see the help topic [Setting Up Payment Processing Profiles in NetSuite](#).

The SuiteCommerce InStore SuiteApp adds the SCIS Gateway custom record type. This custom record lets you use payment processing profiles in SCIS. When you set up SCIS Gateway records, you add location info for each payment processing profile.

### To configure the SCIS Gateway custom record:

1. Go to Commerce > InStore > Payment Gateways.
2. Click **New SCIS Gateway**.
3. In the **Name** field, enter a name for the SCIS Gateway. You may consider a name that includes the payment processing profile name.
4. Select a **Location** from the list. The SCIS Gateway will be available for the location you choose.
5. Select a payment processing profile from the **Gateway** list.
6. Click **Save**.

It's important to set the location where certain payment services are available, especially if you use international payment services for some locations. After you've set up SCIS Gateway records, you can define SCIS Payment Method records.

## Configuring EMV Payment Services for SCIS

EMV is the standard for chip card technology. SuiteCommerce InStore (SCIS) supports in-store technology used for processing payments made with smart-chip cards. To configure EMV support, you must first install a SuiteApp distributed by a Payment Service Provider (PSP) that works with NetSuite. Next, create

a payment processing profile and payment method in NetSuite, and then configure related SCIS custom records.

### To configure EMV payment services for SCIS:

1. Go to Setup > Accounting > Accounting Preferences.
2. Click the **Items/Transactions** subtab. Check the following boxes under **Payment Processing**:
  - **Use Strict Rules for the Selection of Payment Processing Profiles.**
  - **Preserve Transactions When Payment is On Hold.**
3. Create a Payment Method in NetSuite flagged as EMV.
  - a. Go to Setup > Accounting > Accounting Lists.
  - b. Create a new **Payment Method**. Name it for the payment processing solution you plan to use.
  - c. Check the **EMV** box.
  - d. Click **Save**.
4. Set up a payment processing profile in NetSuite for your Payment Service Provider. Go to Setup > Accounting > Payment Processing Profiles.
  - a. In the **Primary** section, complete the information as appropriate.
  - b. In the **Authentication Credentials** section, enter the account information provided by the payment service provider.
  - c. Under **Payment Information**, select the payment methods you want to process with this profile.
  - d. In the **Gateway Request Types** section, select the requests this profile supports.
5. Create an SCIS Payment Method custom record.
  - a. Go to Customization > Record Types > SCIS Payment Method > List.
  - b. Click **New SCIS Payment Method**.
  - c. In the **Payment Method** field, select the EMV payment method you created in Step 3.
  - d. Check the **Is Main** box.
  - e. Complete other fields on this page as needed. For more information about creating SCIS payment methods, see [SCIS Payment Method Records](#).
  - f. Click **Save**.
6. Define SCIS Payment Devices. This custom record identifies the device you plan to use to process the EMV payment type.

After an administrator has configured all the components above to support EMV transactions, a new button appears in the Transaction Summary area on the main SCIS screen. The sales associate clicks this button to process orders paid with a smart-chip card. If you've configured multiple EMV devices, you can pick one up from a list that appears after you click the EMV button. If the customer's signature is required, it's added to the receipt and saved on the transaction record in NetSuite.

## EMV Error Handling – When an Invoice Fails to Save


EMV credit card payments include behind-the-scenes steps that save an invoice in NetSuite. If an invoice fails, SCIS attempts to automatically refund the customer's payment to their credit card. The error-handling process alerts the sales associate to the payment error and shows whether the refund to the card was successful.

For the automatic refund to work, the EMV payment needs to include a Payment Number Reference (PNRF) so you can refund without the physical card. Some Payment Processing Profiles provide a PNRF for payment transactions, while others don't.

If an automatic refund fails, the alert states that the refund must be processed manually. Your administrator handles manual refunds in NetSuite.


 **Important:** The customer's payment must be refunded before the sales associate can attempt to take payment again

- **Customer payment was automatically refunded** — This alert means that no action is needed from the sales associate for the refund.

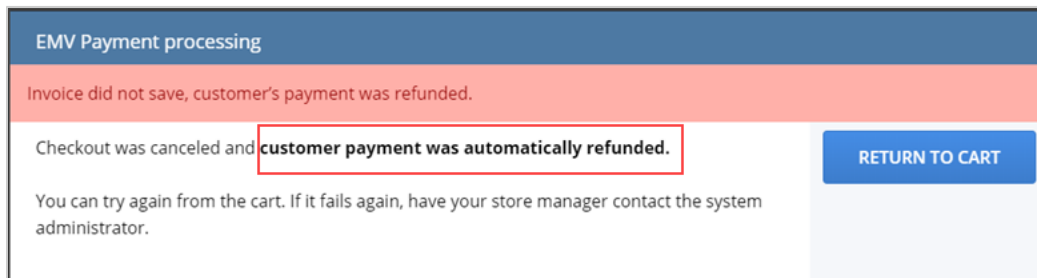

The associate should:

1. Tap **Return to Cart**
  2. Try submitting the payment again.
  3. If the error continues to happen, the associate should ask their store manager to report the error to the system administrator.
- **You must manually refund the payment** — The automatic refund failed to complete. An administrator must process the refund in NetSuite before the sales associate can complete the transaction.

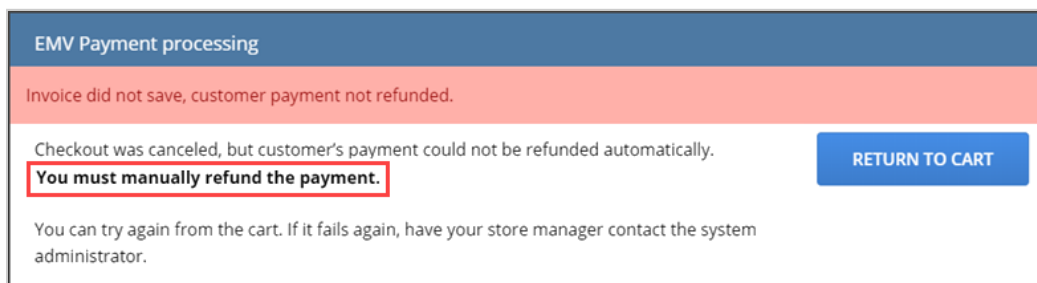

1. The sales associate will notify their store manager, who will contact the system administrator. The administrator will:
  - a. Log into **NetSuite**.
  - b. Find the customer's payment and refund their credit card.  
See the help topic [Refunding an Open Balance](#).
  - c. Notify the store manager when the refund is complete.
2. When notified by the manager that the refund has been made, the sales associate will:
  - a. Tap **Return to Cart**.
  - b. Try submitting the payment again.



- c. If the error continues to happen, they will notify the store manager and ask for instructions on how to proceed with the customer.

If notified by the store manager that the error continues to occur, the administrator should contact NetSuite Customer Support for assistance.

**Note:** Failure to save an invoice is not due to an issue with the credit card. The customer can try to pay again using the same card, a different card, or another payment method, such as cash.

## SCIS Payment Device Custom Records

After you have completed setting up EMV payment services, configure payment devices in SCIS for use with EMV. Define each device by configuring an **SCIS Payment Device** record. You must configure an SCIS Payment Device record to support each EMV device at each location.

### To configure an SCIS Payment Device:

1. Go to Commerce > InStore > Payment Devices.
2. Click **New SCIS Payment Device**.
3. In the **Name** field, enter a name for the device. Enter a name that you can use to identify the device, for example, Device-1234.
4. Enter the **Device ID**. This value is commonly an IP or an unique value the payment processor uses to communicate with the device.
5. In the **Supported Payment Method** list, select the EMV payment method supported on the device.
6. Select the **Locations** that can use this payment device. You can select one or more options in the list.
7. Click **Save**.

After you've set up the SCIS payment device record, test the device. When a sales associate picks a payment method in SCIS, a popup shows the available payment devices. The sales associate then selects a payment device to continue.

## Modifying Cash Payment Denominations

Administrators set up cash payment denominations in SCIS so sales associates can enter the cash amount the customer gives at checkout. Set up SCIS Quick Cash Denomination records to match the cash denominations you usually use in your currency.

The screenshot displays the 'Cash Payment' interface. On the left, the 'Amount due' is \$37.99 and the 'Amount tendered' is \$40.00. A green 'TENDER UP' button is visible. On the right, a message says 'Please collect Cash payment from customer.' Below this, a red box highlights a grid of denomination buttons: \$1.00, \$5.00, \$10.00, \$20.00, \$50.00, and \$100.00. At the bottom, there are 'APPLY PAYMENT' and 'RESET' buttons.

At the point-of-sale, the sales associate clicks the cash denomination to reflect the cash added to the cash drawer.

 **Note:** The following procedures must be performed during the initial installation and configuration of SuiteCommerce InStore (SCIS).

### To view or modify cash payment denominations:

1. Go to Commerce > InStore > QuickCash Denominations.
2. Find **SCIS Quick Cash Denominations** , then click **List** in that row.
3. Add or modify entries in the list:
  - Click **New SCIS Quick Cash Denominations** to add a cash denomination to the list.
  - Click **Edit** next to an existing denomination to change the name, filter settings, or delete.
4. Click the **Filters** subtab, and then select the Location, Website, and Subsidiary where you want the cash denomination to be available. You can select more than one value in each box.

 **Note:** By default, the filters are set to apply to all locations, websites, and subsidiaries.

5. Click **Save**.

# SCIS Fallback

- [SCIS Fallback Overview](#)
- [Setting Up SCIS Fallback](#)
- [Fallback and Storage Limits for Mobile Apps](#)
- [Working with Customers in SCIS Fallback](#)
- [Fallback Data Delivery](#)
- [Transaction Creation Process](#)
- [SCIS Fallback Transaction Reconciliation](#)
- [Avoiding Storage Issues by Using a Fallback Catalog Limit](#)
- [Avoiding Storage Issues by Using the Fallback Open Item](#)

## SCIS Fallback Overview

Fallback enables sales associates to perform basic point-of-sale operations when SuiteCommerce InStore (SCIS) can't connect to NetSuite. Fallback is included in the SCIS SuiteApp and runs locally on the mobile device you use for point-of-sale transactions. To start using Fallback when NetSuite isn't available, an administrator must enable it and perform some configuration tasks in NetSuite.

While SCIS relies on backend capabilities provided by NetSuite, such as payment processing, tax calculations, and storing customer and product data, Fallback runs independently. The SCIS mobile app stores assets such as images (logos and background), printing settings, and specific Fallback settings. After Fallback has been configured in NetSuite, logging in to SCIS on the mobile device triggers the download of the product catalog. The product download is transparent to the sales associate who's logged in. It occurs automatically upon login and doesn't disrupt the typical workflow.

## Best Practice for Using Fallback

If the connection to NetSuite is interrupted, the Fallback login screen displays. After logging in to Fallback with a Fallback PIN, the sales associate can continue creating orders and submitting sales transactions.

Fallback can be used during the following events when NetSuite isn't available:

- NetSuite twice yearly major updates
- NetSuite scheduled maintenance
- Temporary internet outage

## Operating in Fallback

Note the following considerations for sales associates entering orders in Fallback, and for administrators and store managers setting up Fallback and working in NetSuite.

### Sales Associates

After logging in to Fallback, sales associates can enter orders when SCIS isn't available, but with limited capability. For example, orders aren't submitted to the system in real time. Also, some SCIS operations such as shipping and in-store pickup aren't available in Fallback.

**Note:** In Fallback, sales associates can use custom discounts regardless of authorization requirements.

## Administrators and Store Managers

Orders submitted in Fallback are posted to NetSuite through a consolidation process that occurs asynchronously. An administrator or manager may need to reconcile a Fallback transaction if it fails to create a transaction in NetSuite. General ledger accounts and inventory will be out of date until transactions are posted in NetSuite.

## Operations Supported in Fallback

The following table shows which operations are and are not supported in Fallback.

| Operation                                                                                                                                                                                     | Supported in Fallback | Not Supported in Fallback |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------|
| <b>Shopping Cart Operations</b>                                                                                                                                                               |                       |                           |
| Void lines on orders<br>(Voided lines are removed from Fallback transactions.)                                                                                                                |                       | X                         |
| Currency rounding                                                                                                                                                                             |                       | X                         |
| Change item quantity                                                                                                                                                                          | X                     |                           |
| Add/edit/delete item-level note                                                                                                                                                               | X                     |                           |
| Quantity or customer based pricing                                                                                                                                                            |                       | X                         |
| QuickAdd Key groups                                                                                                                                                                           | X                     |                           |
| QuickAdd key dynamic lists (related and co-related item in the cart)                                                                                                                          |                       | X                         |
| <b>Operations on Customer Records</b>                                                                                                                                                         |                       |                           |
| Customer profile                                                                                                                                                                              |                       | X                         |
| Creating new customers                                                                                                                                                                        |                       | X                         |
| Editing customer information                                                                                                                                                                  |                       | X                         |
| <b>Order-level operations</b>                                                                                                                                                                 |                       |                           |
| Assigning customers to orders                                                                                                                                                                 |                       | X                         |
| Add/edit/delete order-level note                                                                                                                                                              | X                     |                           |
| Returns                                                                                                                                                                                       |                       | X                         |
| Refunds                                                                                                                                                                                       |                       | X                         |
| Quotes                                                                                                                                                                                        |                       | X                         |
| Shipping and Pickup                                                                                                                                                                           |                       | X                         |
| <ul style="list-style-type: none"> <li>Shipping and pickup options aren't available at line-level or order level.</li> <li>Fulfillment tasks aren't available to sales associates.</li> </ul> |                       |                           |

| Operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Supported in Fallback | Not Supported in Fallback |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------|
| <ul style="list-style-type: none"> <li>■ Pick up in-store isn't available for customers.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                           |
| <p>Limited payment methods. The following payment methods are the only ones supported in Fallback:</p> <ul style="list-style-type: none"> <li>■ Cash</li> <li>■ External PIN Pad (this includes any electronic payment supported by EPP, such as Google Wallet, credit card, all-in-one payment method)</li> <li>■ Check</li> <li>■ Any custom non-electronic payment method</li> </ul> <div>  <b>Note:</b> Systems that <b>only</b> use NetSuite payment processing aren't supported.         </div> <p>For more information about setting up payment methods for Fallback, see <a href="#">SCIS Fallback Payment Methods</a>.</p> | X                     |                           |
| Partial payments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | X                     |                           |
| Email receipts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       | X                         |
| Print receipts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X                     |                           |
| Sales rep selection on orders                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | X                     |                           |
| Adding touchpoints, extra attributes, or event validators.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       | X                         |
| <b>Login and Shift</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       |                           |
| Email and password login credentials                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                       | X                         |
| Generic PIN login per location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X                     |                           |
| <p>SCIS Cash Drawer Management</p> <ul style="list-style-type: none"> <li>■ Entering initial loan or end of day transactions aren't available for sales associates.</li> <li>■ Opening a shift or closing a shift isn't available.</li> </ul> <p>Information for administrators is included in the topic, <a href="#">Cash Drawer Management for Fallback</a>.</p>                                                                                                                                                                                                                                                                                                                                                   |                       | X                         |
| Manager authorization                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                       | X                         |
| <b>Promotions, Gift Certificates, Discounts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                       |                           |
| Adding custom discounts and price override                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | X                     |                           |
| <p>Adding Promotions</p> <p>(Sales associate can add a custom discount at the line item level, or order level to emulate the promotion)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       | X                         |
| Using Gift Certificates for payment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       | X                         |
| Purchasing Gift Cards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                       | X                         |
| <b>Search</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |                           |

| Operation                                         | Supported in Fallback | Not Supported in Fallback |
|---------------------------------------------------|-----------------------|---------------------------|
| Search for products                               | X                     |                           |
| Transaction search                                |                       | X                         |
| Search for customers                              |                       | X                         |
| <b>Product Display</b>                            |                       |                           |
| Serialized or lot items                           |                       | X                         |
| Images of products                                |                       | X                         |
| UPC code and Item name                            | X                     |                           |
| Product Detail Page (PDP)                         |                       | X                         |
| Product lists                                     |                       | X                         |
| Parent matrix items                               |                       | X                         |
| Child Matrix Items                                | X                     |                           |
| View of inventory information                     |                       | X                         |
| Multiple Languages<br>(Only English is supported) |                       | X                         |

## Setting Up SCIS Fallback

Fallback is included in SuiteCommerce InStore (SCIS) and runs locally on the mobile device you use for point-of-sale transactions. To start using Fallback, an administrator must perform some configuration tasks in NetSuite.

To prepare for using Fallback, complete the following steps:

### Prerequisites

To prepare for using Fallback, administrators must complete some steps. Note the following:

- Configure Fallback in NetSuite at Commerce > Instore > Fallback Mode Settings. See [SCIS Fallback Settings](#).
- If you use SCIS on an iPad, ensure that SCIS mobile apps are up to date. See [SCIS for iOS \(iPadOS\) and SCIS for Windows Mobile Applications](#).
- If your devices use iPadOS 14 or later, ensure that you have and maintain at least 1 GB of free space on each device.
- If an external PIN-pad payment method is available, ensure that its setup is complete. See [SCIS Fallback Payment Methods](#).

### SCIS Fallback Settings

This section includes information for administrators configuring the SCIS Fallback Settings record in NetSuite.

You must configure the SCIS Fallback Settings record in NetSuite before you can start using Fallback. Here, you define the following important settings:

- The locations and subsidiaries where Fallback can be used.
- A personal Identification Number (PIN) so that sales associates can log in to Fallback when SCIS isn't available.
- The default tax rate applied to transactions entered in Fallback.
- The role assigned to employees using Fallback. (Typically, this is the SCIS Clerk role.)

After you configure Fallback settings, the next time you launch the SCIS for iOS or SCIS for Windows app, your product catalog and Fallback settings are downloaded and stored in the app running on the point-of-sale device. After initial configuration, you can change Fallback settings as needed. The catalog and settings are downloaded periodically to stay up-to-date.

## Best Practice: Subsidiary and Location Considerations

When configuring the SCIS Fallback record, consider the following about using subsidiaries and locations:

- **Enabling Fallback**– You can enable Fallback for certain subsidiaries and locations, and not for others.
- **Defining a Fallback tax rate** – Define a default tax rate for fallback. You can define a tax rate by subsidiary or by location. All orders entered in Fallback use the default tax rate you define. For more information about how taxes are calculated on Fallback transactions, see [Tax Calculation in Fallback](#).

 **Note:** After initial setup, you can change the tax rate in Fallback Settings. The new tax rate you define will be used the next time you go to Fallback when SCIS isn't available.

### To configure the SCIS Fallback Settings record:

1. Go to Commerce > InStore > Fallback Mode Settings.
2. (For OneWorld accounts) Check the **Enable All Subsidiaries** box if you want to enable Fallback for all Subsidiaries in your OneWorld account.
3. (For OneWorld accounts) In the **Subsidiaries** list, select one or more Subsidiaries where you want to enable Fallback.
4. (For accounts without OneWorld) Check the **Enable All Locations** box if you want to enable Fallback for all Locations in your account.
5. In the **Locations** list, select one or more Locations where you want to enable Fallback.

When you enable subsidiaries, locations that are associated with those subsidiaries are automatically enabled. To disable certain locations, remove them from the list at the top of the page.

6. Click the link below the **Default Access PIN** field to enter a Personal Identification Number (PIN) that employees can use to log in to Fallback. The PIN must be 4-8 digits and only numbers are allowed.

The Default Access PIN is applied to all subsidiaries and locations where Fallback is enabled. If you want to define an Access PIN per subsidiary, or per location, select the subsidiary or location in the sublist, clear the Default Access PIN box, and enter a unique Access PIN.

 **Note:** By default, the Access PIN assigned to a subsidiary is automatically shared with its associated locations. To change the setting in a particular location, edit the location in the sublist.

7. In the **Default Tax Rate** field, enter the tax rate that should be applied to orders in Fallback.  
In Fallback only one tax code is applied to all transactions in a particular location. This tax rate is used for all items (regardless of a non-taxable setting) in all transactions entered in a Fallback

session. If you want to define a Tax Rate per location, select the location in the sublist, clear the Default Tax Rate box, and enter a tax rate.

If you change the tax rate setting, the change takes effect in the next session. For more information about Fallback Sessions, see [SCIS Fallback Session and SCIS Transmission Batch Records](#).

 **Note:** By default, the tax rate assigned to a subsidiary is automatically shared with its associated locations. To change the setting, click the Location sublist and make the change. For more information, see [Tax Calculation in Fallback](#).

8. Use the sublists on the SCIS Fallback Settings page to make configuration changes for specific subsidiaries and locations (for accounts with OneWorld) .
  - a. The following list describes each column on the **Subsidiaries** sublist:
    - **Subsidiary** – Shows the names of subsidiaries.
    - **Default Access PIN** – Check this box to use the Default Access PIN entered in the Default Settings section of the page.
    - **Subsidiary Access PIN** – This is an input field, used for overriding the Default PIN. The Default Access PIN box is automatically cleared when you enter a PIN in this field.
    - **Default Tax Rate** - Check this box to use the Default Tax Rate entered in the Default Settings section of the page.
    - **Subsidiary Tax Rate** - This is an input field, used for overriding the Default Tax Rate. The Default Tax Rate box is automatically cleared when you enter a Tax Rate in this field.
    - **Fallback is Enabled** – This is a read only checkbox reflecting the Fallback Enabled setting at the top of the page.
  - b. The following list describes each column on the **Locations** sublist:
    - **Location** – Shows the names of locations.
    - **Subsidiary Access PIN** - (For accounts with OneWorld) Check this box to use the same access PIN as the subsidiary with which this location is associated.
    - **Default Access PIN** - (For accounts without OneWorld) Check this box to use the Default Access PIN in this location.
    - **Location Access PIN** – You can enter a different Access PIN for the location.
    - **Subsidiary Tax Rate** - (For accounts with OneWorld) Check this box to use the same Tax Rate as the subsidiary with which the location is associated.
    - **Default Tax Rate** - (For accounts without OneWorld) Check this box to use the Default Tax Rate in this location.
    - **Location Tax Rate** - When the Subsidiary Tax Rate box is cleared, you can enter a different Tax Rate for the location.
    - **Fallback is Enabled** - This is a read only checkbox reflecting the Fallback Enabled setting at the top of the page.

 **Note:** If you want to remove SCIS from your NetSuite account or change the NetSuite account associated with SCIS, contact NetSuite Customer Support. A Customer Support rep can help you identify any Fallback transactions that may have occurred on a point-of-sale device but may not have posted to NetSuite.

When sales associates log in to SCIS, the product catalog and settings are downloaded. The download process is transparent to the sales associate. It occurs automatically upon login, and doesn't disrupt the typical workflow.



## SCIS Fallback Payment Methods

Fallback is designed to work when there's no internet connection. Because Fallback works offline, payment methods used in Fallback can't rely on communication with the NetSuite backend. When operating in Fallback, sales associates can use payment methods such as cash, check, and custom non-electronic payment methods that you may have created.

The **External PIN Pad** payment method, installed by the SCIS SuiteApp, is set as a Fallback payment method by default. Don't make any changes to this record other than setting location, subsidiary, and website filters. Fallback doesn't support credit or debit card gateways or gift cards issued through NetSuite from the store. EMV is only supported on external payment terminals that don't interact with NetSuite payment gateways.

### To set filters in the External PIN Pad Payment Method:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find **SCIS Payment Method**, and click **List**.
3. Click **Edit** next to **External PIN Pad**.



**Important:** Don't change the **Payment Method** field or the **Is Fallback External PIN Pad** box. The setting can be enabled on only one SCIS Payment Method record. Other SCIS Payment Method records show the box as read-only.

4. Click the **Filters** subtab.  
Select the **Location**, **Website**, and **Subsidiary** where you use Fallback. You can select more than one value in each box.
5. Click **Save** to save your changes.



**Note:** If you haven't configured external payment terminals in your store, or for business reasons sales associates shouldn't use credit cards with Fallback, you can mark the SCIS Payment Method **External PIN Pad** as inactive.

## Fallback and Storage Limits for Mobile Apps

To run Fallback, ensure your mobile devices have enough free space for the mobile application used. Here are steps to help avoid interruptions at the point-of-sale (POS) caused by losing an internet connection or having too little storage available.

### Space Availability Maximums

Fallback includes storage limitations that depend on the mobile application used.

### SCIS for iOS Mobile App

The maximum database storage available to SCIS Fallback under iPadOS 13 or later is 500 MB. This limit could affect how SCIS processes and saves transactions on your POS devices.

- If the space needed for Fallback on an iPadOS 13 or later device exceeds 500 MB, the SCIS application will fail on that device.
- If an iPadOS 13 or later device has less than 1 GB of free space, the space available for Fallback is reduced to 50% of that free space.


For example, if only 700 MB is free on the device, storage for Fallback is limited to 350 MB. If storage isn't monitored, this reduced availability could cause the SCIS application to fail.

## SCIS for Windows Mobile App


For the Windows mobile app, the maximum database storage available to SCIS Fallback is 300 MB.

## Fallback Storage Free Space Alerts


The following images show example alerts that can appear upon losing an internet connection. If more free space is needed to run Fallback, the alert lists the storage amounts that must be cleared before proceeding.

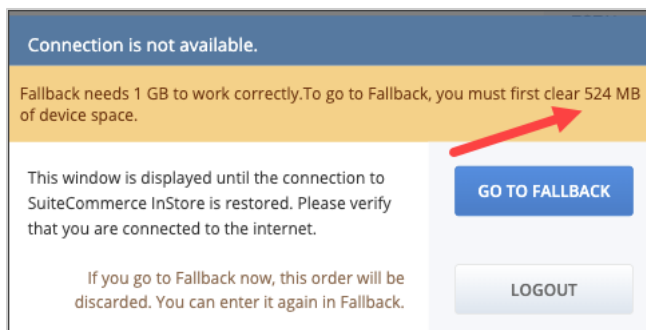

This alert can appear after you log in but before you process a transaction. To clear the space, tap logout and perform the cleanup. Log in again to check if you've cleared enough space. When the minimum space is cleared, tap **Go to Fallback**.

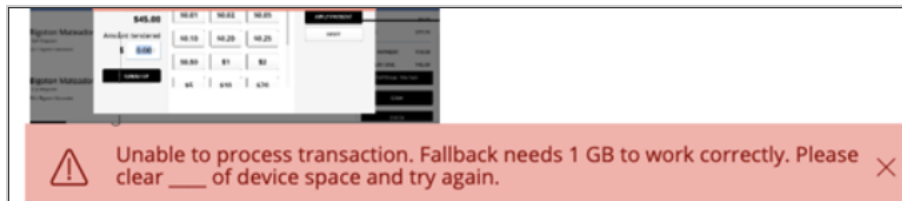

This alert can appear if you lose your internet connection during a transaction. To complete the transaction in Fallback, you must delete it, log out, free the required space, and start the transaction again after logging in.

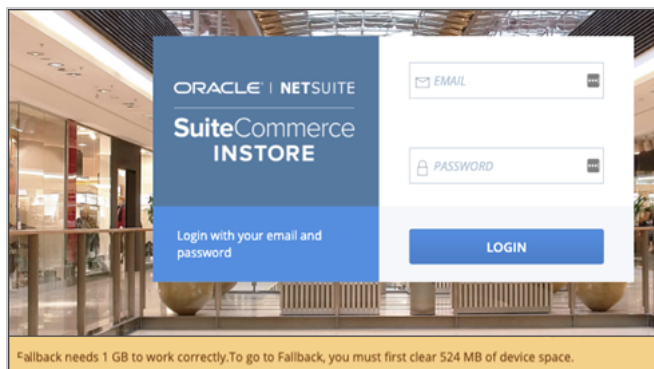

This alert can appear when you open the login page. Before you log in, close SCIS and clear the required space. This ensures you can enter Fallback if the device loses its connection.

## Reasons that Fallback could Exceed the Available Space

Situations that could impact the free space available to the iOS mobile app include:

- A download of your catalog to the device for use by Fallback exceeds 500 MB.
- The transaction volume stored offline in a Fallback session exceeds 500 MB.
- The device has less than 1 GB of free space, reducing the amount available to Fallback by 50%.

Similar situations could apply to the Windows mobile app with the 300 MB maximum.

## Avoiding Fallback Storage Issues

SCIS includes options to help prevent application errors caused by exceeding the storage available to Fallback on your mobile device. Combined, these setups provide a unified solution that ensures your stores are covered in the event of an outage.

- **Fallback Catalog Limit** — This method limits catalog storage on a mobile device to 20,000 items SKUs. You can select the items to include or you can rely on a NetSuite script to select and download item information from recent orders. See [Avoiding Storage Issues by Using a Fallback Catalog Limit](#).
- **Fallback Open Items** — This solution replaces catalog downloads with a single generic item. See [Avoiding Storage Issues by Using the Fallback Open Item](#). The feature includes capabilities to automatically reconcile transactions.



**Tip:** Enabling the Catalog Limit also enables the Open Item option..

## Fallback Open Items

See [Avoiding Storage Issues by Using the Fallback Open Item](#) for one optional solution to issues with free space. This solution replaces catalog downloads with a single generic item.

## Best Practices to Avoid Space Issues under iPadOS 13.X or Later

You should keep at least 1GB of free space on every mobile device.

If you're using Fallback, have some devices on iPadOS 13 or later, and you aren't experiencing failures, your item/price and transaction volumes likely don't exceed the free space limit.

If SCIS on an iPadOS 13 or later device is taking too long to respond or freezes after a sales associate logs in, you should:

1. Disable Fallback for the device's location.
2. Uninstall the SCIS application on the device.
3. Reinstall the SCIS application on the device.

### To disable Fallback by Location:

1. Log in to NetSuite.
2. Go to Commerce > Instore > Fallback Mode Settings.
3. Clear the highlight for **Locations** using devices affected by the iPadOS 13 or later space issue.

 **Note:** This action will disable Fallback for all devices at those locations.

4. Click **Save**.

NetSuite Customer Support is available to assist you and answer your questions.

## Working with Sales Associates in SCIS Fallback

In Fallback, sales associates work as they do in SCIS online. However, SCIS Permissions which you may have applied to restrict certain operations in SCIS online aren't supported in Fallback. For example, SCIS Permission restrictions on custom discounts aren't supported. Sales associates can apply a discount of any value without manager approval.

In general, SCIS Permissions are **not** supported in Fallback. Note that SCIS permissions aren't enforced for the following operations:

- Deleting a transaction
- Voiding a line
- Payment Methods
- 100% discount

 **Note:** Only custom discounts are supported in Fallback.

## Working with Customers in SCIS Fallback

You can't enter new customer information in Fallback. However, a sales associate can click or touch the **Assign Customer** link to assign an existing customer to an order. The Assign Customer capability only works if there's a customer record in NetSuite that matches the customer identifier entered in Fallback. The customer identifier can be an email address, a customer ID, or the customer's first or last name.

After the order is submitted in Fallback, during the transaction creation process in NetSuite, the customer identifier is matched against the list of customers in the system. If the identifier matches an existing customer, the customer is associated with the SCIS Fallback Transaction record, and then the customer information is carried through to the final transaction created in NetSuite.

If the customer identifier doesn't match an existing customer, or if it matches more than one customer, the final transaction isn't created. In this case, an administrator or SCIS Fallback Auditor must perform a manual reconciliation by editing the SCIS Fallback Transaction in NetSuite to trigger creation of the final transaction. For more information, see [SCIS Fallback Transaction Reconciliation](#).

 **Note:** In Fallback, you can't search for or add customers, and the Customer Profile isn't available.

If a sales associate doesn't assign a customer to the order in Fallback, a default Fallback customer is assigned to the order.

For step-by-step instructions for sales associates, see the help topic [Assigning a Customer to an Order in Fallback](#).


## Fallback Data Delivery

This section includes information about the process by which orders submitted in Fallback are posted to NetSuite.

### Data Delivery and Consolidation

Data delivery and consolidation occur automatically, without any interaction from an administrator. During the data delivery process, data from Fallback transactions is transferred to NetSuite. The automatic consolidation process ultimately results in a final NetSuite transaction record that represents the order submitted in Fallback. When the NetSuite transaction is created, inventory and general ledger accounts are impacted.

The data from the order submitted in Fallback is saved on the device where the order was submitted. When NetSuite is back online, and a sales associate logs in to use SCIS, the process that sends transaction data to NetSuite is initiated. The delivery process creates SCIS Fallback Session and SCIS Fallback Transmission Batch records in NetSuite.

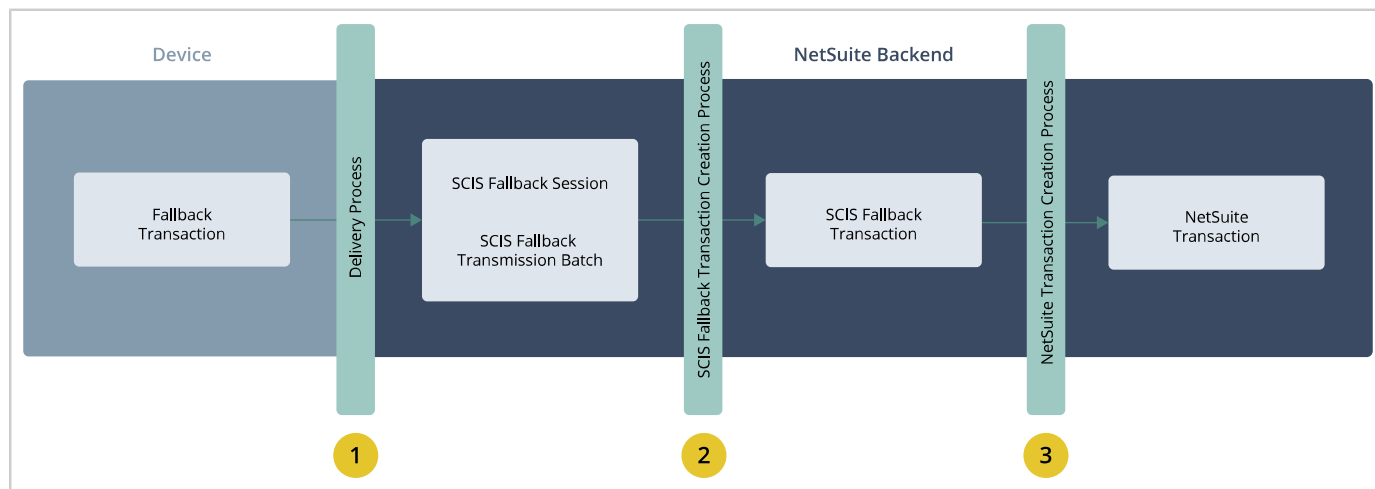

### SCIS Fallback Session and SCIS Transmission Batch Records

Administrators can view these records for reference and troubleshooting purposes:


- **SCIS Fallback Session** records in NetSuite represent the session created each time a sales associate logs in to Fallback. One SCIS Fallback Session can be linked to multiple SCIS Transmission Batch records.
- **SCIS Transmission Batch** records contain the original output of transaction data in JSON format. There can be multiple transactions in a Transmission Batch record.

**Note:** SCIS Fallback Session and SCIS Transmission Batch records are locked. These records are intended for reference purposes only.

### Transaction Creation Process

This section describes the process by which SCIS Fallback Transaction records and corresponding cash sale transactions are created in NetSuite.

Each **SCIS Fallback Transaction** record in NetSuite represents an order entered in Fallback. This custom record is created by a scheduled script that runs every 15 minutes. The script also creates a corresponding final **NetSuite transaction**.

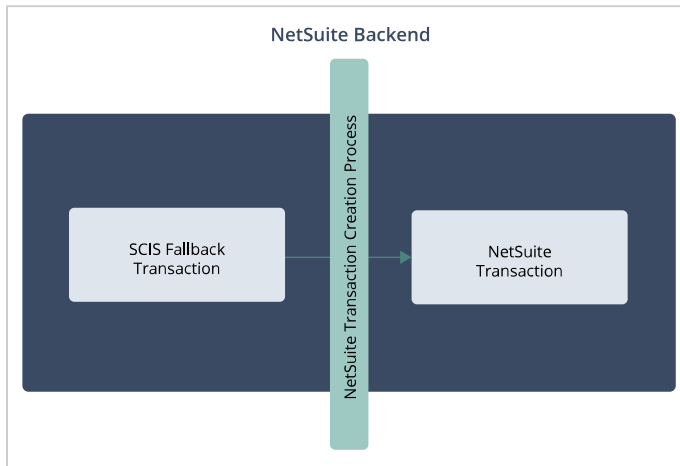

## SCIS Fallback Transaction

Use SCIS Fallback Transactions to see details about each order, such as items sold and the payment method used on the order.

Each SCIS Fallback Transaction record includes a link to the following linked Fallback records:

- **SCIS Fallback Line** – This record contains information from each line in the order that was submitted using Fallback.
- **SCIS Fallback Payment** – This record contains the payment information from the order submitted in Fallback.
- **SCIS Fallback Notes** – If the sales associate added a note to the transaction entered in Fallback, the note appears here.
- **Final NetSuite Transaction** – This is the cash sale in NetSuite that corresponds to the Fallback Transaction. The NetSuite transaction only appears after the transaction creation process is complete, and has successfully created the transaction. However, a link to a final NetSuite transaction may not appear on the SCIS Fallback Transaction record for the following reasons:
  - The transaction creation process hasn't completed. In this case, the Status on the SCIS Fallback Transaction is **Waiting to write transaction data**.
  - The transaction creation process has failed to create the NetSuite transaction. In this case, the Status on the SCIS Fallback Transaction is **Failed to create Cash Sale**.

### To view the Fallback Transaction List:

1. Go to Commerce > InStore > Fallback Mode Transaction.
2. Click View to open an entry for review.

## Final NetSuite Transaction

During the transaction creation process, a cash sale transaction record is created for each SCIS Fallback Transaction record without any interaction from an administrator. NetSuite transactions created from Fallback Transactions include the following information about the SCIS Fallback Transaction subtab:

- **Fallback Transaction** – Shows a link to the related SCIS Fallback Transaction.
- **Sales Date** – Shows the date and time the transaction was submitted in Fallback.
- **Reconciliation Status** – Shows the Fallback Consolidation Status.

## SCIS Fallback Transaction Reconciliation

Reconciliation is the process by which an administrator or SCIS Fallback Auditor edits an SCIS Fallback Transaction record to trigger the creation of a cash sale in NetSuite.

Typically, a scheduled script runs periodically to create a NetSuite cash sale for each SCIS Fallback Transaction. However, there are cases when a NetSuite cash sale transaction can't be created. Use the **Fallback Transactions without Transaction** saved search in NetSuite to identify SCIS Fallback transactions that require reconciliation.

### To reconcile an SCIS Fallback Transaction record:

1. Go to Reports > Saved Searches > All Saved Searches.
2. Find the saved search named **Fallback Transactions without Transaction**. Click **View**.
3. Click **Edit** next to the Fallback Transaction you want to modify.
  - a. View the Error Log. Examine the data to identify errors.
  - b. Edit fields on the SCIS Fallback Transaction record as needed.
4. Click **Save**.

The transaction creation process is triggered for the SCIS Fallback Transaction.

If reconciliation is successful, a cash sale transaction is created in NetSuite and the Transaction status of the SCIS Fallback Transaction becomes **Cash Sale created**. The SCIS Fallback Transaction is removed from the saved search.

If an error occurs that prevents the cash sale from being created, the SCIS Fallback Transaction status doesn't change. The SCIS Fallback Transaction continues to appear in the saved search.

## Cases when NetSuite Transactions aren't created and Reconciliation is Required

The following table describes issues that may prevent the creation of a cash sale from the SCIS Fallback Transaction. The table also shows how to fix these issues and trigger the creation of a cash sale transaction in NetSuite.

| Case                                         | Solution                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Subsidiary doesn't exist (or it's inactive). | <ol style="list-style-type: none"> <li>1. Find the subsidiary, location, or item record in NetSuite. Ensure the record is active and configured correctly.</li> <li>2. Edit the <b>SCIS Fallback Transaction</b>.</li> <li>3. Update the ID on the transaction to ensure the correct subsidiary, location, or item is selected.</li> <li>4. Click <b>Save</b> on the SCIS Fallback transaction.</li> </ol> |
| Location doesn't exist (or it's inactive).   |                                                                                                                                                                                                                                                                                                                                                                                                            |
| Item doesn't exist (or it's inactive).       |                                                                                                                                                                                                                                                                                                                                                                                                            |

| Case                                                                              | Solution                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sales rep record becomes inactive, or the sales rep location changes in NetSuite. | <ol style="list-style-type: none"> <li>1. Edit the <b>SCIS Fallback Transaction</b>.</li> <li>2. Update the transaction to ensure the correct sales rep information is selected.</li> <li>3. Click <b>Save</b> on the SCIS Fallback transaction.</li> </ol>                                                                                          |
| Payment method doesn't exist (or it's inactive).                                  | <ol style="list-style-type: none"> <li>1. Find the payment method in NetSuite. Ensure it's marked as active. Also, ensure it's configured correctly with a corresponding SCIS Payment custom record.</li> <li>2. Edit the <b>SCIS Fallback Transaction</b>.</li> <li>3. Select the correct payment method,</li> <li>4. Click <b>Save</b>.</li> </ol> |

## Cases when NetSuite Transactions are Different from Transactions Entered in Fallback

The **Transaction Difference from Fallback** field shows a value only if there's a difference between the sales transaction entered in Fallback and the final transaction created in NetSuite. This field appears on the SCIS Fallback subtab on the final transaction.

The following table describes data as it may appear on the final transaction with corresponding values in the **Transaction Difference from Fallback** field.

| Data on the final transaction in NetSuite                                          | Values in the Transaction Difference from Fallback field                                                                                                                                   |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sales Rep is missing from the final transaction.                                   | <ul style="list-style-type: none"> <li>■ The selected sales rep is disabled or doesn't exist.</li> <li>■ The sales rep selected in Fallback isn't associated with the location.</li> </ul> |
| The amount on one or more transaction lines is different from the expected amount. | Transaction line was recalculated because of a different tax rate on the Fallback transaction.                                                                                             |
| The discount amount on the final transaction isn't as expected.                    | Order discount was recalculated because of a different tax rate on the Fallback transaction.                                                                                               |

## Tax Calculation in Fallback

The default tax rate you specify on the SCIS Fallback Settings record is applied to all orders submitted using Fallback. You can specify a default tax rate for each location and subsidiary. For example, if you have a subsidiary with two locations, in New York and California, you can create two tax rates, one for each location. Alternately, you can define one tax rate for the subsidiary that would be inherited by the two locations.

It's recommended that tax rates you define in Fallback settings are the same as those defined in your NetSuite account.

## Sales Tax Difference Between Fallback and NetSuite

The following are examples of how transaction amounts are calculated if the sales tax defined on the SCIS Fallback Settings record is different from sales tax items defined in NetSuite.



## Example of Recalculation for a Transaction Line

A shirt was purchased using Fallback. The price (rate) of the shirt was \$15.00 before tax. The default tax rate for Fallback was set to 6%. On the Fallback transaction, \$0.90 was charged for tax, so the total amount for the transaction line in Fallback was \$15.90.

However, the sales tax rate in NetSuite is 10%. In this case, the amount on the cash sale created in NetSuite must be modified to ensure the total amount for the transaction line equals \$15.90.

## Example of Recalculation Including an Order Discount

For accounting purposes, the total amount on the cash sale in NetSuite must be the same as the amount on the SCIS Fallback Transaction. To maintain the impact to the general ledger, a discount or markup is added when creating the cash sale from the Fallback transaction. This way, the difference in tax calculation is noted, but the total amount of the order stays the same in Fallback and SCIS.

For example, a shirt is purchased using Fallback for \$9.17. The sales associate adds a \$1.00 discount. With 8% tax applied, the total amount of the order is \$8.82. However, in NetSuite, the tax code applied to the transaction is 10%.

After the NetSuite transaction creation process is complete, the NetSuite transaction has the following values in the item list on the transaction: The shirt has a rate of \$9.00, but the amount shows \$9.17, so that it's the same as on the Fallback transaction. A custom discount is applied for \$0.98, and the Tax amount is \$0.80 Tax. The order total is the same as the order total on the Fallback transaction, \$8.82.

## Prices Include Tax

Fallback supports the **Prices Include Tax** setting on item records. This setting enables you to save the item price as either tax inclusive or tax exclusive.

**Note:** In Fallback, discounts are always added before tax.

If you change the Prices Include Tax setting on item records, you must log in to SCIS on each device to ensure the catalog of items is downloaded with the updated setting. Allow 5 to 10 minutes before going to Fallback to ensure that updated settings have been downloaded properly.

## Avoiding Storage Issues by Using a Fallback Catalog Limit

Fallback relies on a downloaded copy of your item and price catalog. This copy is refreshed each time a sales associate logs in to the device.

However, mobile iOS and Windows devices have storage limits for a Fallback catalog. Exceeding the storage limit can cause the SCIS application to fail on a device. This limit often applies to catalogs with more than 20,000 items. See [Fallback and Storage Limits for Mobile Apps](#) for more information about storage limits.

The Fallback Catalog Limit feature limits periodic catalog downloads to your mobile devices to 20,000 item SKUs. You can select the items to include plus rely on a NetSuite script to flag and include items purchased in recent orders. Manually-selected items have priority over items flagged due to being recently purchased.

## Initial Fallback Catalog Limit Download

The first time the script runs, it reviews past orders for items that weren't manually selected for inclusion. It flags and adds those unique items to the manual items until the item count reaches 20,000. These items are included in your initial Fallback item catalog.

## Subsequent Fallback Catalog Limit Downloads

The next weekly run looks for items that were sold but not currently in the catalog list. Then the script removes items with the oldest transaction dates and replaces them with items from recent purchases. It also adds items recently marked to **Include Item in Fallback** and removes items that were inactivated. To maintain performance, subsequent catalog downloads consist of catalog updates only.



**Tip:** Enabling the Catalog Limit also enables using the Fallback Open Item for SKUs not downloaded. Together, these options ensure that your sales associates are covered in the event of an outage. See [Avoiding Storage Issues by Using the Fallback Open Item](#).



**Note:** Changes made to manually include or stop including items can take up to two hours to download.

## Setting up a Fallback Catalog Limit and Open Item option

Use these procedures to enable a Fallback Catalog limit and configure how SCIS selects the items to include.

- 1. [Enable the Fallback Catalog Limit Feature](#)
- 2. [Add Fallback Catalog Limit Field Sets](#)
- 3. (Optional) [Choose Specific Items to Include](#)

To adjust the scheduled query used to keep your Fallback Catalog current, see [Working with the Fallback Catalog Limit Script Schedule](#).



**Important:** Fallback must be enabled in your SCIS setup. To verify that Fallback is ready, go to Commerce > InStore > Fallback Mode Settings. If one or more Subsidiaries or Locations are highlighted, then Fallback is enabled.

### 1. Enable the Fallback Catalog Limit Feature

In addition to enabling a Fallback Catalog Limit, these steps enable the Open Item option.



**Important:** If you've used Fallback during internet interruptions and haven't experienced issues, you probably don't need to enable this feature.

#### To enable the Fallback Catalog Limit:


1. Go to Commerce > InStore > Settings > Search.
2. Click **Edit** for your settings record.
3. Open the **General** subtab.
4. Check the **Enable Fallback Catalog Limit** box.
5. Click **Save**.

## 2. Add Fallback Catalog Limit Field Sets

These field sets add the catalog limit check boxes to the item record page.

### To add Fallback Catalog Limit field sets to your website:

1. Go to Commerce > Websites.
2. Click **Edit** for the website associated with your SCIS setup.
3. Open the **Field Sets** subtab.
4. Locate the **SCIS Fallback** section.
5. Open an insertion field by clicking in the right-hand column of that section.
6. Add the field sets from the **Field Set** list:
  - a. Click the list icon.
  - b. In the **Select** field, begin entering the first field set:  
Include item in Fallback (Custom)  
(You can also scroll through the list.)
  - c. Select the set and click **Add**.
  - d. Begin entering the second field set:  
Scis Include item in fallback (Custom)
  - e. Select the set and click **Add**.
  - f. Click **Submit**.
7. Click **OK**.

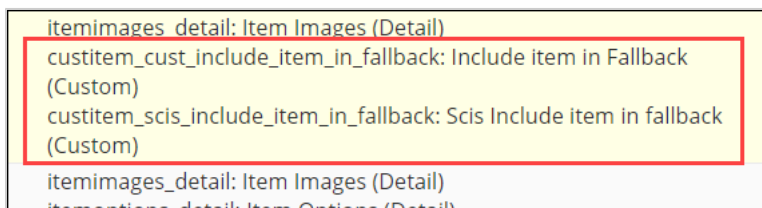

You'll see the two sets added to the **SCIS Fallback** section.

8. Click **Save**.

**Note:** If you disable the **Fallback Catalog Limit** option later, it's not necessary to remove these field sets.

## 3. (Optional) Choose Specific Items to Include

In addition to using the Fallback Catalog Limit script to identify items from recent orders, you can choose which items should always be available in Fallback. Items selected manually using these steps take priority over items identified from the transaction history. These manual items aren't replaced when the history changes.

### To choose items for your Fallback Catalog Limit:

1. In NetSuite, go to Lists > Accounting > Items.
2. Expand the **Filters** list and select **Inventory Item**.

3. Locate the item you want and click **Edit**.
4. Open the **Custom** subtab.
5. Check the **Include Item in Fallback** box.
6. Click **Save**.
7. Repeat for the next item as appropriate.

## Working with the Fallback Catalog Limit Script Schedule

You can adjust when the script reviews orders and items for inclusion in the Fallback Catalog download. You might make this change to ensure orders from your busiest days are included in the count sooner. The default runtime is weekly on Monday night.

### To adjust the Fallback Catalog Limit script schedule:

1. In NetSuite, go to Customization > Scripting > Scripts.
2. Expand the **Filters** list and select **Map/Reduce**.
3. Find the **Check fallback items** script and click **View**.
4. Open the **Deployments** subtab and click the script **Title**.
5. To adjust the **Schedule**, click **Edit** and change as you want.
6. Open the **Parameters** subtab.
7. The **Total Items** value is the number of items to be included in your Fallback Catalog Limit.



**Warning:** You shouldn't increase the **Total Items** to greater than 20,000. Otherwise, your devices can experience storage issues.

8. Choose the period to **Prioritize Items Sold In**.

This field optimizes how NetSuite populates your Fallback Catalog. The script reviews the transaction history and identifies items that are likely to be purchased. Items are identified by how many times they were sold during the previous period.

The period length should be based on your business volume. If the number of items regularly sold is large, you can limit the number of unique items by reducing the period length. For example, your catalog might be more current or focused if you limit transaction history to the previous quarter or month instead of the previous year.

If the number of items identified as frequent purchases exceeds the **Total Items** limit, NetSuite only includes the items found before the limit was reached.



**Note:** Inventory item records with **Include Item in Fallback** checked are added to the Fallback Catalog first. Items found by the script are added next.


9. Click **Save**.

## Avoiding Storage Issues by Using the Fallback Open Item

If your catalog might exceed the iOS or Windows device storage limits, you can use the **Fallback Open Item** solution. This option uses a single generic item instead of the item being sold. Your other catalog items aren't loaded for Fallback.

Fallback relies on a downloaded copy of your item and price catalog. This copy is refreshed each time a sales associate logs in to the device.

However, mobile iOS and Windows devices have storage limits for a Fallback catalog. Exceeding the storage limit can cause the SCIS application to fail on a device. This limit often applies to catalogs with more than 20,000 items. See [Fallback and Storage Limits for Mobile Apps](#) for more information about storage limits.

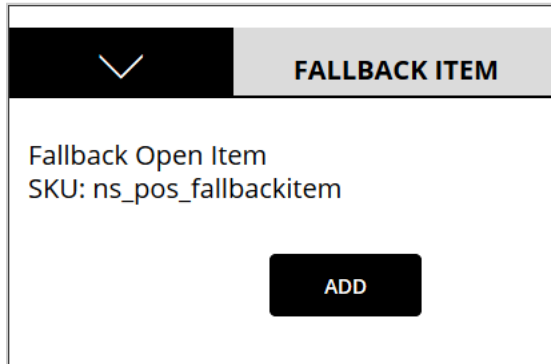

Sales associates can scan an item's barcode to add an Open Item instead of the real item, or search for it using the term Fallback Open Item.

The sales associate process is:

1. Shopper presents items for purchase.
2. Associate scans an item or, if the bar code won't scan, adds an Open Item from a search.
3. Associate manually enters the item's price.
4. If the item didn't scan, associate opens a Note and enters the ScannedUPC digits.
5. Associate repeats these steps for each item.
6. Associate tenders payment and provides receipt.

| Variable Price Item                                                                                           |                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Fallback Open Item</b><br><br>Amount<br>\$ <span style="border: 1px solid red; padding: 2px;">9.95*</span> | Choose available amount below<br><div> <div>\$0.01</div> <div>\$0.05</div> <div>\$0.10</div> <div>\$0.25</div> <div>\$1</div> <div>\$5</div> <div>\$10</div> <div>\$20</div> <div>\$50</div> <div>\$100</div> </div> <div> <div>ADD</div> <div>CANCEL</div> </div> |

|                                                                                                                                      |                    |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Store Manager</b><br>SoMa - San Francisco, #100<br>401 11th Street<br>San Francisco CA 94103<br>United States<br><br>415 555-1000 |                    |
| Order #:                                                                                                                             | 5/26/2020 14:15 PM |
| FBTRNnull000001                                                                                                                      |                    |
| <b>Operation: Purchase</b>                                                                                                           |                    |
| (1x) Fallback Open Item                                                                                                              | \$9.95             |
| ** ScannedUPC: 055555333331                                                                                                          |                    |
| (1x) Fallback Open Item                                                                                                              | \$7.49             |
| ** ScannedUPC: 055555444442                                                                                                          |                    |
| Subtotal                                                                                                                             | \$17.44            |
| Tax                                                                                                                                  | \$1.61             |
| <b>Total</b>                                                                                                                         | <b>\$19.05</b>     |

Note that the receipt lists Fallback Open Items with the UPC for each item purchased.

See the following topics:

- [Enabling the Fallback Open Item option](#)
- [Adding the Fallback Open Item to the QuickAdd Bar](#)
- [Enabling Associates to Manually Enter a Reconcilable UPC](#)

- [Reconciling Fallback Open Item Transactions](#)
  - [Automatic Reconciliation](#)
  - [Reviewing Fallback Open Item Auto-reconciliation Success](#)
  - [Performing Manual Open Item Reconciliation](#)
- [Item Types That Won't Automatically Reconcile](#)



**Important:** For accounting purposes, the price that is entered manually remains the price in the transaction, even if it doesn't match the catalog price. You might want to have a pricing worksheet available for offline events that require using Fallback.

## Capturing the UPC

SCIS captures the UPC from the scan and saves it as a **ScannedUPC Note** that is included in the transaction record. Before manually entered UPCs can be automatically reconciled, you must set up a ScannedUPC Note type. See [Enabling Associates to Manually Enter a Reconcilable UPC](#).

## Using the QuickAddBar

In addition to scanning an item's barcode or searching, you can choose to make the Open Item available in the QuickAdd Bar. See [Adding the Fallback Open Item to the QuickAdd Bar](#) for the steps to enable this option.

## Reconciliation

Open Item transactions must be reconciled later to replace generic items with real items from your NetSuite catalog. Most transactions can be automatically reconciled from the ScannedUPC Note. See [Reconciling Fallback Open Item Transactions](#).

## Enabling the Fallback Open Item option

This option becomes active when you enable the Fallback Catalog feature. See [Setting up a Fallback Catalog Limit and Open Item option](#).



**Tip:** To view the steps store associates take at the point-of-sale, see the help topic [Entering an Order using a Fallback Open Item](#) in the SCIS User Guide.



**Warning:** The Fallback Open Item ns\_pos\_fallbackitem is saved as a **Non-inventory item for Sale** in NetSuite. Do **not** change the item name or details. Doing so will cause the Open Item process to fail.

## Adding the Fallback Open Item to the QuickAdd Bar

You can add a Fallback Open Item by scanning an item's barcode, searching for **Fallback Open Item**, or selecting the Open Item from the QuickAdd Bar.

Items don't appear in the QuickAdd bar automatically. Instead, you must add the item to a QuickAdd Group as a QuickAdd Key. See [Configuring QuickAdd Keys](#) for more information.

## To create a QuickAdd Key for the Fallback Open Item:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. First, review your **QuickAdd Groups** to determine in which group to include the Fallback Open Item.
  - a. Find the **SCIS QuickAdd Group** record.
  - b. Click **List**.
  - c. Determine the correct group to use.
  - d. Go back to the **Record Types** list.
3. Find the **SCIS QuickAdd Key** record and click **List**.
4. Click **New SCIS QuickAdd Key**.
5. Select a **QuickAdd Group** from the **Key Group** list.
6. In the **Item** field, start typing or search for the name **ns\_pos\_fallbackitem**.
7. Click the **Filters** subtab, and select filters for **Locations**, **Websites**, and **Subsidiaries**.

Filters determine where the Fallback Open Item will appear in the QuickAdd Bar. For most businesses, you can select **Apply to All** for the three filters.

 **Important:** Filter settings are required. If a filter isn't set up for **Locations**, **Websites**, and **Subsidiaries**, NetSuite will ignore this SCIS custom record. Selecting **Apply to All** meets the filter requirement.

8. (Optional) Select from the **Search Criteria** subtab options as needed. For details about the options, see [QuickAdd Keys](#).
9. Click **Save**.

## Enabling Associates to Manually Enter a Reconcilable UPC

Automatic reconciliation uses the UPC saved from a scan as a ScannedUPC Note. Because some items might not be scannable, you can enable your sales associates to enter a ScannedUPC Note manually. Without this setup, manual notes can't be automatically reconciled.

### To enable manual ScannedUPC Note entries:

1. Go to Commerce > InStore > Transaction Notes.
2. Click **New SCIS Transaction Notes Types**.
3. In the **Name** field, enter ScannedUPC, without a space.

 **Important:** Enter the characters ScannedUPC exactly as shown here.

4. Open the **Filters** subtab.
5. Select the **Locations**, **Websites**, and **Subsidiaries** in which the manual note type will be used. For most setups, you'll select **Apply to All** for each choice.
6. Click **Save**.

After setup, the sales associate will see the following after tapping the **Note** icon to manually enter a UPC.



They should tap **+ScannedUPC** and enter the UPC using digits only.

## Reconciling Fallback Open Item Transactions

Fallback transactions won't appear in NetSuite until the point-of-sale (POS) device is back online and the sales associate logs in. The SCIS POS device uploads transactions to NetSuite for processing into Cash Sale or Invoice records. Processing occurs every 15 minutes.

After the transactions are processed into records, the individual transaction lines that contain a Fallback Open Item must be updated to replace the Open Item with the real item from your catalog. The process of updating line items is called reconciliation.

### Automatic Reconciliation

Most transaction lines can be reconciled automatically without manual intervention. This process for Fallback Open Items uses the UPC captured as a **ScannedUPC Note** to replace the generic item name (ns\_pos\_fallbackitem or Fallback Open Item) with the item from your NetSuite catalog. The UPC is captured in the note by the sales associate scanning an item's barcode or entering a UPC manually.

**Important:** If a sales associate enters a UPC manually, the note must contain the UPC digits only. Entering other characters, such as dashes (hyphens, the minus sign), will prevent the transaction line from being automatically reconciled.

Automatic reconciliation begins soon after the Fallback transaction records are received in NetSuite. For accounting purposes, the price that was entered manually remains the price in the transaction, even if it doesn't match the catalog price.

Auto-reconciliation will reconcile items from most transactions, including inventory items, non-inventory items, and matrix inventory items.

Certain non-standard item types, such as lot or kit items, require manual reconciliation. See [Item Types That Won't Automatically Reconcile](#). UPCs not found in your catalog and manual UPC entries with extra characters also require manual reconciliation.

- Inventory Item
- Non-Inventory Item
- Matrix Inventory

**Note:** Automatic reconciliation runs as a script in the background of your NetSuite environment. The script is called: NS\_RP\_Fallback\_Create\_Transaction\_Inner.js.

## Reviewing Fallback Open Item Auto-reconciliation Success

Follow these steps to verify whether all lines in a Fallback Open Item transaction were reconciled successfully.



### To review Fallback Open Item transaction lines:

1. In NetSuite, in the search bar at the top, enter **SCIS Fallback Transaction**.
2. Click **Page: SCIS Fallback Transaction** (near the list bottom).  
The **SCIS Fallback Transaction List** displays.
3. If not in date order, click the **Transaction Date** column to sort by recent transactions.  
The transactions to review will show:
  - **Status** — Transaction Completed
  - **Final Transaction** — Cash Sale or Invoice
4. Click **Cash Sale** or **Invoice** for the first transaction to verify.
5. Open the **SCIS Fallback** subtab. A message displays if any Open Items failed to automatically reconcile.
6. If some items weren't automatically reconciled, see the next steps: [Performing Manual Open Item Reconciliation](#).  
If all items reconciled successfully:
  - a. Click **Back** to return to the **SCIS Fallback Transaction List**.
  - b. Review the next Fallback transaction to confirm reconciliation.

## Performing Manual Open Item Reconciliation

Follow these steps to reconcile transaction lines that failed automatic reconciliation. Manual reconciliation must always be performed for certain non-standard item types, such as lot or kit items.

The **Note** column is often helpful for identifying why auto reconciliation failed for a line. The column holds the scanned or manually-entered UPC.

Other reasons that automatic reconciliation failed might not be obvious without viewing the transaction line details.

In these steps, you'll add catalog items and quantities to replace the unreconciled Open Item lines.

### To manually reconcile a Fallback Open Item transaction:

1. Use the previous steps to display the Fallback transaction.
2. Open the **Items** subtab.  
Open Items that didn't reconcile have the **Item** name **ns\_pos\_fallbackitem**.
3. Click **Edit**.
4. Scroll right to display the **Item Note** column. This column holds the ScannedUPC from the bar code scan or manual entry.

✓ **Tip:** The **Items** subtab has its own scroll bar.

5. Copy the UPC numbers. For example, copy 05555533332 only.
6. Click **Add Multiple**.
7. Paste the UPC and click **Search**.

✓ **Tip:** If the UPC isn't available, enter any part of the item name.

8. Highlight the item you want and enter the **Qty** (quantity) purchased.

9. Click **Done** to add the catalog item to the Fallback transaction.
10. Ensure that the catalog **Price** matches the price entered for the Open Item. If not, replace the catalog price.



**Important:** For accounting purposes, you should use the price entered for the purchase when the device was in Fallback.

11. If appropriate, edit other catalog line fields with details from the Open Item line.
12. Click **OK** if needed to close the new catalog item line.
13. Highlight the Open Item line you're replacing and click **Remove**.
14. Use **Add Multiple** to replace the next Open Item line.
15. Continue until all lines are reconciled with your catalog items.
16. Click **Save**.

## Item Types That Won't Automatically Reconcile

Certain non-standard item types, such as lot or kit items, will always require manual reconciliation. These are:

- Downloadable Items
- Gift Cards
- Item Groups
- Kit Items
- Lot Items
- Serial Items
- Service Items
- Discount Items (defined in NetSuite to use for promotions)

# Configuring Records for SCIS

SuiteCommerce InStore (SCIS) uses standard NetSuite records to display items, manage employee login access, and store information displayed in the Customer Profile. SCIS also uses custom records for various configuration settings. This section includes information about setting up standard NetSuite records and custom SCIS records.

You must specify a location on each employee record that gets access to SCIS. If you use OneWorld, you must select a subsidiary on item records and employee records.



**Important:** You must perform all of the procedures described in the topics below when you first set up SuiteCommerce InStore.

Read the following topics for more information:

- [Customer Records and SCIS](#)
- [Configuring Item Records for SCIS](#)
- [Configuring QuickAdd Keys](#)
- [Configuring Employee Records for SCIS](#)

After you've installed and set up SCIS, you can refer to the topics on configuring records if you need to change any settings.

## Customer Records and SCIS

Customer records you create in NetSuite are automatically available in SuiteCommerce InStore (SCIS). You can create, edit, and view customer records in either NetSuite or SCIS. When you create a customer record in SCIS, the status field is automatically set to CUSTOMER-Closed Won.

When configuring customer records, consider the following settings:

- **Taxable settings** – Administrators can check the Taxable box and set the Tax Item on the Financial subtab of the customer record. These settings are applied automatically when the customer record is submitted, based on the customer's address.
- **Currency settings** – Currencies the customer uses on transactions are tracked on the Financial subtab of the customer record.
- **Sales Rep** – If your store pays commissions to sales reps, an administrator can assign a sales rep to a customer record.



**Important:** A NetSuite sales rep assignment in a customer record doesn't override default sales rep settings in SCIS.

For example, if SCIS is set to automatically assign the sales rep to the associate who creates the transaction, it'll override the NetSuite sales rep assignment.

## Default Customer

NetSuite requires a customer record for each transaction. A sales associate can create a new customer in the process of entering a sales transaction. However, for customers who don't share their contact information, the default customer record stores transaction data in NetSuite.

SCIS automatically creates a Default Customer record for each sales associate. Administrators can access the Default Customer record in NetSuite at Lists > Relationships > Customers.

## Default Customer Group

The **Default Customer Group** field on the **SCIS Settings** record defines which customer records are identified as default customer records. It defines the SCIS Customer Group to which default customers belong. Default customer records are only used when the sales associate doesn't create a new customer, or select a particular customer for a transaction. For more information, see [SCIS Customer Settings](#).

## Default Customer and Transactions

Some transactions can't be processed without a unique customer record. To process the following transactions, a sales associate must select an existing customer or create a new one:

- Delivery
- Store Pickup

To use the following refund and payment methods, a sales associate must select an existing customer or create a new one:

- Credit Memos
- Purchase on Account

The following SCIS features can't be used with a default customer:

- Wish List
- Customer Profile

## Subsidiary Customers in SCIS

SCIS supports multi-subsidiary capabilities on customer records. Sales associates can use search in SCIS to find customers and transactions regardless of the subsidiary where they were originally created. Each transaction entered in SCIS shows the subsidiary where it was submitted.

For example, a sales associate working in Subsidiary A can create a transaction for a customer assigned to Subsidiary B. When an administrator sees the transaction in NetSuite, it shows the subsidiary where it occurred. The subsidiary is then added to the list of subsidiaries on the customer record.

## Configuring the Customer Entry Form

When sales associates create new customers in SuiteCommerce InStore (SCIS), they use a customer entry form that you can configure based on fields in a saved search. Here, you define which fields are required and which are optional. Follow the steps in this section to configure a customer entry form for SCIS.

Sales associates use the Customer Profile to see information about existing customers displayed in timelines and charts. To configure the data displayed in the Customer Profile, you need to change the related saved searches in NetSuite.

## Customer Profile Entry Form for SCIS

To use a customer entry form other than the default forms installed by the SuiteCommerce InStore SuiteApp, you must create a customer saved search based on the default SCIS Individual Company or

SCIS Individual Customer form. Next, define your custom search form in the CustomConfiguration.js file. Optionally, you can add custom fields to the customer entry form and make fields mandatory.

### To create a customer search form based on the SCIS default:

1. Go to Lists > Search > Saved Searches.
2. Click **Edit** next to the custom searches installed in your account by the SuiteCommerce InStore SuiteApp:
  - **SCIS Individual Company Form** – For customers that are companies.
  - **SCIS Individual Customer Form** – For individual customers.
3. Click the **Results** subtab. Here, you can specify the fields that are displayed in the customer entry form. You can also enter a custom label for any field.
  - a. To add a field, make a selection in the blank row at the bottom of the **Field** column.
  - b. Optionally, enter a label in the **Custom Label** column.
  - c. Click **Add**.
  - d. To remove a field, select an existing row in the list and click **Remove**.
4. Enter a new name for the search.
5. Click **Save As**.

The fields you select on the saved search are displayed when sales associates create new customers or edit existing customers. After you create your saved search, you must define this search in the CustomConfiguration.js file. See the following steps to add the ID for your custom saved search.

Defining the customer search in the configuration file is what enables your customer entry form to be displayed in SCIS.

### To define your customer search in CustomConfiguration.js file:

1. Go to Commerce > Hosting > Website Hosting Files.
2. Find the **SuiteCommerce InStore folder** in the File Cabinet. Go to Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore
3. Click **Edit** next to **CustomConfiguration.js**.
4. In the file record, click **Edit** in the Media Item section, next to the file name.
5. Add the ID for the customer search you configured in the **Customer Options** section of the configuration file. Note the following example. The definition for the search form must be included in the identifiers section.

```

1 | customer: {
2 |     defaults: {
3 |
4 |     },
5 |     identifiers: {
6 |         //Add the code and the saved search id here
7 |         customerIndividualCustomerFormSearch: 'customsearch_ns_pos_individual_custome_2',
8 |     }
9 | },

```



**Note:** The following steps are optional. Fields aren't required to be mandatory to appear on the customer entry form.

### To specify required fields on the customer entry form:

1. Go to Customization > Forms > Entry Forms.
2. Click **Customize** next to the **Customer Form** checked as **Preferred**. The subtype of the customer entry form is Customer/Lead/Prospect. In an account that hasn't been customized, use the **Standard Customer Form**.
3. Click the **Fields** subtab.
  - a. Check the box in the **Show** column for fields you want to display on the form.
  - b. Check the box in the **Mandatory** column next to the fields you want to be required on the Customer Profile entry form.
4. Click **Save**.

## Required Fields on the Customer Entry Form

Fields displayed on the Required or Optional tabs in SCIS are based on the customer entry form. To make certain fields required in SCIS, you need to set them as mandatory on the customer entry form.

For example, to make sure that the customer's job title is captured when an employee creates a new customer in SCIS, set the Job Title field as mandatory on the customer entry form. Any field you set as mandatory on the customer entry form appears on the Required tab of the customer entry form in SCIS.

## Defining SCIS Customer Notes

Administrators can use the SCIS Customer Note Types custom record to define notes for types of information associated with a customer. This custom record is installed with SuiteCommerce InStore (SCIS).

After an administrator defines customer notes, sales associates can add them to the customer profile in SCIS. For example, you may want to track the customer's item preferences or frequent purchases.

### To define SCIS Customer Note Types:

1. Go to Commerce > InStore > Customer Notes.  
The note types include a **Custom Note** by default. Sales Associates can enter any text into the note in SCIS.
2. To create a new note type, click **New SCIS Customer Note Types**.
3. Enter a **Name** for the customer note type. The name is displayed in SCIS, so sales associates can select it and enter additional information.
4. You can choose particular **Locations**, **Websites**, and **Subsidiaries**, or make the note available to all of them.
5. Click **Save**.

In SCIS, sales associates can add notes to customer profiles and see existing notes. The notes are also saved in the system on the customer record on the **Communication** subtab, under **User Notes**.

## Configuring Item Records for SCIS

- [Setting Up Products for Sale on SCIS](#)
- [Configuring Serialized Items and Lot Numbered Items in SCIS](#)

- [Configuring Item Images for SCIS](#)
- [Fields Displayed on the Product Detail Page](#)
- [Creating an Open Item in SCIS to Prompt for Price](#)
- [Configuring QuickAdd Keys](#)

## Setting Up Products for Sale on SCIS

Product information is stored on item records in NetSuite and displayed in SuiteCommerce InStore (SCIS). Sales associates can access product information by using the search bar or the QuickAdd bar in SCIS. The following item record types are compatible with SCIS:

- Inventory items
- Matrix items
- Non-inventory items
- Gift card items
- Discount for sale items
- Service items
- Kit items
- Serialized items
- Lot Numbered items



**Important:** SCIS doesn't support the Bin Management and Advanced Bin/Numbered Inventory Management features.

To use SCIS, you must ensure that item records are configured correctly. Consider the following when configuring item records:

- If you use OneWorld, the item must be in the same subsidiary as the SCIS website.
- You must select a Tax Schedule on each item record and set a corresponding nexus, if applicable.

See the following steps to configure item records. To complete setup, you must create a QuickAdd Key for each item. Sales associates can't add an item to a transaction if a QuickAdd Key doesn't exist for the item in SCIS. For more information, see [Configuring QuickAdd Keys](#).

### To configure items for SCIS:

1. Go to Lists > Accounting > Items > New.
2. Enter a value in the **Item Name/Number** field. This value appears in lists in NetSuite. It appears as the product name in SuiteCommerce InStore if the **Display Name/Code** field is blank.
3. Enter a value in the **UPC Code** field. This lets you scan a bar code for the item. The UPC Code must be unique for each item.  
If you have additional codes, use the **Additional UPCs** field on the **Custom** subtab to enter multiple UPC codes, separated by commas.
4. Enter a value in the **Display Name/Code** field. This value appears as the product name in SuiteCommerce InStore and on the website. If this field is blank, the value in the **Item Name/Number** field is displayed.
5. (Optional) Add the item to a location. In the **Location** list, select the SCIS location where the item will be available for purchase. If you don't select a location, the item will be available in all locations.

6. Click the **Accounting** subtab. Select a **Tax Schedule**.
7. Click the **Sales / Pricing** subtab. In the **Price Levels** section, enter a **Base Price** for the item. Enter the same price level for each currency that can be used to purchase the item.

If you offer different prices based on the quantity purchased, enter a purchase **QTY** and then the “each” or single-item price for that quantity. Any purchase that meets or exceeds that quantity will use that price, up to the next QTY you set.



**Note:** SuiteCommerce InStore uses the Base Price (not Online Price) as the product price. If you don't enter a Base price, an error occurs when the item is added to an order. Zero is a valid entry.

8. Click the **Web Store** subtab to configure the following:
  - a. Check the **Display in Web Store** box.
  - b. (Optional) Enter a short description of the item in the **Detailed Description** field. This is recommended, but not required. This description appears in SuiteCommerce InStore.
  - c. (Optional) In the **Out of Stock Behavior** list, leave the default selection.
  - d. Click **Web Site Categories**. In the **Site** column, select the **SuiteCommerce InStore** website. In the **Category** column, select **Home**.
9. Click **Save**.

The item isn't available in SCIS until a search index update is completed. When you click Save on the Item record, it triggers an update to the search index. To see the status of the search index, go to Commerce > Websites > Website List and click View in the Search Index Status column.

For information about printing item labels, see the help topic [Item Labels From Item Records](#).

## Configuring Serialized Items and Lot Numbered Items in SCIS

You can sell serial numbered and lot numbered items using SuiteCommerce InStore (SCIS), but first you must create them in NetSuite. This section includes links to setup and configuration information.

1. To use serialized inventory, you must first enable the feature and then set up item records. Read the instructions in the following topics:
  - a. [Enabling Serial Numbered Inventory](#)
  - b. [Entering Serialized Inventory Records](#)
2. To use lot numbered items, you must first enable the feature and then create item records with the lot numbers:
  - a. To enable the feature, go to Setup > Company > Setup Tasks > Enable Features. On the **Items & Inventory** subtab, check the Lot Tracking box and click Save.



**Important:** SCIS doesn't support the Bin Management and Advanced Bin/Numbered Inventory Management features.

- b. To create lot numbered item records, follow the instructions in the topic [Creating Lot Numbered Items](#).
3. The SCIS Settings record includes a preference for searching transactions using serial and lot numbers. Administrators can set this preference at Customization > Record types > SCIS Settings. On the **Orders** subtab, check the box next to Search transactions by Serial Number.



 **Note:** This setting can make searches for transactions take longer, so only use it if you use serial or lot numbered items.

For more information about how sales associates can add serial numbered and lot numbered items to orders in SCIS, see the help topic [Adding a Serialized or Lot Numbered Item to an SCIS Order](#).

## Configuring Item Images for SCIS

 [Watch a related video.](#)

Configuring item images is an important task in setting up SuiteCommerce InStore (SCIS). As with Commerce web stores, image files automatically match with item records in NetSuite based on criteria that you include in the image file name. The criteria that you include in the image file name is the item identifier. You can match images to items based on the value in a field that appears on item records in NetSuite. Choose one of the following fields:

- Display Name/Code
- UPC Code
- URL Component
- Additional UPCs

After you decide on the item identifier and the format you want to use for image file names, rename your image files and upload them to the file cabinet.

To learn how to configure item images for SCIS, see [Example of Item Image Configuration](#).

## Best Practice for Setting up Image Size Parameters for SCIS

You can't define custom Image Size IDs for the SCIS website. You must use the Image Size IDs that are installed by the SCIS SuiteApp. Changing or removing any Image Size IDs for SCIS will result in distorted images on the site.

You should only change image size parameters by adjusting the Maximum Width and Maximum Height values.

## Using a Keyword to Support Multiple Images

In other cases, you must set a keyword as a placeholder category to map images to items correctly. You can create your own keyword. The only requirement is that all images must contain the **same** keyword. For example, you can use the following structure to name your image files, but make sure all your image file names use the same structure.

```
1 | [Display Name/Code]_media-[number].[file extension]
```

## Example of Item Image Configuration

For example, you have two .jpg images to add for the item "Plastic Spatula." You can choose Item Display Name/Code as the item identifier. Next, rename the image files you plan to use for items. Use the following naming convention for your image files based on the preceding image file:

1 | [Display Name/Code]\_media-[number].[file extension]

If your NetSuite account has another Commerce web stores site, you can copy the image mapping criteria and use it for your SCIS site. If your only Commerce web stores website is used for SCIS, see the following steps to set up image mapping criteria. In this case, you must rebuild the search index to update all the items with the image files uploaded.

The following steps use the item from the previous example. You can replace image file names and folder names with file and folder names that correspond with your account.

### Sample steps to configure item images:

1. On your computer, rename the image files using the naming convention from the preceding example.
  - a. Rename the primary image to **PlasticSpatula\_media-0.jpg**
  - b. Rename the second image to **PlasticSpatula\_media-1.jpg**
  - c. Create a ZIP file for all your image files.

 **Note:** Using numbers in your image file names lets you use more than one image for each item. Sequential numbers help you organize your images.

2. Go to Commerce > Websites > Website List.
  - a. Click **Edit** next to your SCIS website and click the **Images** subtab.
  - b. In the **Item Identifier** field, select **Display Name/Code**.

 **Warning:** All images you upload must use the same item identifier. If you change it, some product images won't appear on your SCIS website.

- c. In the **Image Domain** field, select the domain you use for SCIS.
  - d. In the **Image Folder** field, select Web Site Hosting Files > Live Hosting Files > Images.

 **Note:** This is the folder you create in the Live Hosting Files folder to store item images.

- e. Click **Save**.
3. Upload your image files from Step 1 to Web Site Hosting Files > Live Hosting Files > Images.
  - a. Go to the folder at Commerce > Hosting > Website Hosting Files > Live Hosting Files > images.
  - b. Click **Advanced Add**.
  - c. In the **ZIP Archive to Add** field, choose the ZIP file on your computer.
  - d. Verify the **Destination Folder** is where you intend to upload files.
  - e. Check the **Unzip Files** box.
  - f. Check the **Make all Files Available Without Login** box.
  - g. Check the **Overwrite Files with Same Name** box to avoid uploading duplicate files in this folder. Files with the same name are automatically updated with the latest version you upload.
  - h. Click **Add**.
4. Rebuild the search index. This step is required if you're adding item images, you only have one Commerce web stores website, and you use that site for SCIS.

- a. Go back to Commerce > Websites > Website Lists.
- b. Click the **Actions** menu.
- c. Select **Rebuild Search Index**.


The time it takes to rebuild the search index depends on the number of items in the account and your network connection. To check the status of the search index, go to Commerce > Websites > Website List. Click **View** under **Search Status Index**.

When the search index status is completed, you can verify that images are correctly associated with item records. Go to the item record at Lists > Accounting > Items. Click Edit next to an item record. Confirm that images are listed on the **Web Store** subtab, under **Associated Images**.

For more detailed instructions on configuring images, see the help topic [Item Images](#).

## Fields Displayed on the Product Detail Page

After you configure item records in NetSuite, the product information you entered is displayed on the Product Detail Page in SuiteCommerce InStore (SCIS). SCIS uses templates to display product information, but you can't change them. Use the following information to see which fields from item records are displayed on the Product Detail Page.

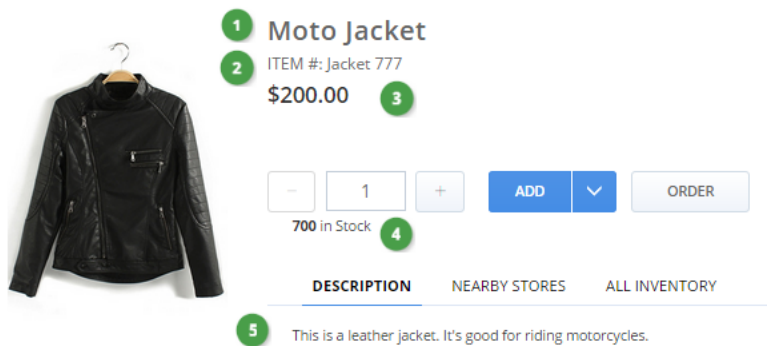

|   | Item Field                                                        | Notes                                                                                                                      |
|---|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1 | Display Name/Code                                                 | Item Name/Number appears as the product name if you don't enter a value for Display Name/Code.                             |
| 2 | Item Name/Number                                                  |                                                                                                                            |
| 3 | Base Price                                                        |                                                                                                                            |
| 4 | Quantity On Hand, stock status                                    | The stock status message is generated by NetSuite. You can set preferences on the item record or the Web Site Set Up page. |
| 5 | Detailed Description from the Web Site subtab of the item record. |                                                                                                                            |

## Product Detail Page Specific Options

You can change some field labels displayed on the Product Detail Page by editing the JavaScript configuration file. For instructions on editing this file, see [Editing the CustomConfiguration.js File](#).

You can change the string that appears before the Item Name/Number by changing the value for `labelForItemId`. Note the following code sample:

```

1 // Product Detail Page specific options
2 pdp: {
3   // If true it will show the Item ID label on the page
4   // showItemIdInPDP: true,
5
6   // Label used for describing the product ID
7   labelForItemId: 'Item #: '
8 },

```

You can also change the item name display in the cart. For more information, see [Item Display in Cart](#).

## Creating an Open Item in SCIS to Prompt for Price

The open item is a generic item record configured as a variable price item. The administrator creates the item and the sales associates use it. Sales associates can set the price of the item when they add it to the cart. They can use the open item to sell items that may not have a price, or items that aren't configured in NetSuite. For example, if the customer wants to buy a floor model, the sales clerk can add it to the order and set the price in the cart.

You can create more than one open item record. You might use an open item to add shipping costs or a charge for gift wrap.

### To create an open item:

1. Go to Lists > Accounting > Items > New.
2. Enter a value in the **Item Name/Number** field. This value appears in lists in NetSuite. It appears as the product name in SuiteCommerce InStore if the **Display Name/Code** field is blank.
3. (Optional) Add the item to a location. In the **Location** list, select the SCIS location where the item will be available for purchase. If you don't select a location, the item will be available in all locations.
4. Click the **Accounting** subtab. Select a **Tax Schedule**.
5. Click the **Sales / Pricing** subtab. In the **Price Levels** section, enter 0.00 for the **Base Price**. Enter the same price level for each currency that can be used to purchase the item. If you use multiple quantities, enter a price for each sales unit.

**Note:** SuiteCommerce InStore uses the Base Price (not Online Price) as the product price. If you don't enter the Base price, an error occurs when the item is added to an order. Zero is a valid entry.

6. Click the **Web Store** subtab to configure the following settings:
  - a. Check the **Display in Web Store** box.

- b. (Optional) Enter a short description of the item in the **Detailed Description** field. You might want to provide some guidance for sales associates on how to use the open item appropriately.
- c. Check the **Variable Amount** box. This lets the sales associate enter a price.



**Note:** The **Don't Show Price** box and the **No Price Message** field don't affect the display in SCIS.

- d. Click **Web Site Categories**. In the **Site** column, select the **SuiteCommerce InStore** website. In the **Category** column, select **Home**.

After you create the open item in NetSuite, you must also create an SCIS QuickAdd Key so that sales associates can add the open item to orders. For more information, see [Configuring QuickAdd Keys](#).

## Configuring QuickAdd Keys

In SuiteCommerce InStore (SCIS), sales associates can use QuickAdd Keys to add items to an order. You can configure QuickAdd Keys to display products at any SCIS location. To display an item QuickAdd Key at a certain location, the location specified on the QuickAdd Key must match the SCIS location and the location specified on the sales associates' employee records.

### QuickAdd Groups

The first step in configuring QuickAdd Keys is to configure QuickAdd Groups. QuickAdd Groups are the tabs you use on the QuickAdd bar to organize the display of items in the SCIS user interface. Note that because of responsive design, the appearance of QuickAdd Groups changes when you resize the browser. If the browser window is narrow, QuickAdd Groups may be stacked in multiple rows.

#### To configure QuickAdd Groups:

1. Go to Commerce > InStore > QuickAdd Groups.
2. Add or change entries in the SCIS QuickAdd Group List.
  - a. Click **New SCIS QuickAdd Group** to create a new grouping.
  - b. Click **Edit** next to an existing group to make changes.
3. Click the **Filters** subtab, and select the Location, Website, and Subsidiary where you want these settings to apply. You can select more than one value in each box.



**Note:** By default, the filters are set to apply to all locations, websites, and subsidiaries.

4. Click **Save**.

### QuickAdd Keys

After you configure QuickAdd Groups, you can create a QuickAdd Key for each product you want to show in SCIS. Hotkey is a custom record type that is created when you install InStore. Configure QuickAdd Keys in NetSuite for display in SCIS.

#### To create a new QuickAdd Key:

1. Go to Commerce > InStore > QuickAdd Key.

2. Click **New SCIS QuickAdd Key**.
3. Select a QuickAdd Group from the **Key Group** list.
4. Select an item from the **Item** list.
5. (Optional) Select the **Order** in which this QuickAdd Key will appear in the QuickAdd Bar.
6. (Optional) Select any options you want from the **Search Criteria** subtab.
  - Specify a **Role**. This is useful if you want to make certain QuickAdd Keys visible to sales associates with a specific role.
  - Specify a **User**. This is the list of employees who can access SCIS. The QuickAdd Key appears for the user you specify.
  - Select a **Customer Group**. This list is sourced from the SCIS Customer Group list. If you select a customer group, the QuickAdd Key is only available when the sales associate adds a customer from this group to a sales transaction. If you don't make a selection, the QuickAdd Key is available for all customers.
  - Select a **Customer**. The QuickAdd Key is only available when the customer is selected on a transaction. If you don't make a selection, the QuickAdd Key is available for all customers.
7. Click the **Filters** subtab, and select filters for **Locations**, **Websites**, and **Subsidiaries**.  
Filters determine the locations and other areas in which the QuickAdd Key item will appear. For example, you might not want to include the item in certain stores. For most businesses, you can select **Apply to All** for all three filters.



**Important:** Filter settings are required. If a filter isn't set up for **Locations**, **Websites**, and **Subsidiaries**, NetSuite will ignore this SCIS custom record.

8. Click **Save**.

### To edit a QuickAdd Key:

1. Go to Customization > Lists, Records, & Fields > Record Types
2. Find the **SCIS QuickAdd Key** row and click **List** in that row.
3. Click **Edit** next to the QuickAdd Key.
  - a. To change the QuickAdd Group, make a selection in the **Key Group** field.
  - b. To change criteria for availability, such as location, role, or customer group, click the **Search Criteria** tab.
4. Click **Save**.

## QuickAdd Keys CSV Export and Import

After you finish setting up all of the item QuickAdd Keys, you can back up your QuickAdd Key data by exporting it to a CSV file. In the unlikely event that you need to reinstall SuiteCommerce InStore, you can use CSV import capabilities in NetSuite to restore your item QuickAdd Key configuration.

### To export QuickAdd Key data as a CSV file:

1. Go to the Hotkey List page.  
Go to Customization > Lists, Records, & Fields > Record Types. In the **SCIS QuickAdd Key** row, click **List**.
2. Click the **Export - CSV** icon at the top of the list. The CSV file is saved in the Downloads folder on your computer.

3. Open the file to verify data was saved correctly. You can store this file on your computer or in the NetSuite file cabinet for safe keeping.

Before you import item QuickAdd Key data, verify that the Key Group is correct in the CSV file. For example, if you've customized the data in NetSuite, verify that your customizations are up-to-date in the CSV file. If your reinstall SuiteCommerce InStore, any custom Key Groups will be removed.

### To import QuickAdd Key data:

1. Go to Setup > Import/Export > Import CSV Records.
2. On the **Scan & Upload CSV File** screen, select the following:
  - a. For **Import Type**, select **Custom Records**.
  - b. For **Record Type**, select **SCIS QuickAdd Key**.
  - c. Select the appropriate **Character Encoding**.
  - d. Choose **One File to Upload**.
3. On the **Import Options** screen, under **Data Handling**, choose **Add**. Leave default settings in the other fields.
4. On the **Field Mapping** screen, leave default settings.
5. On the **Save Mapping & Start Import** screen, entering information in the fields isn't required. Follow the instructions on the screen.
6. Click **Save & Run** to start the import.

## Configuring Employee Records for SCIS

Create an employee record for each person who'll be using SuiteCommerce InStore (SCIS) to enter transactions. To add a sales associate, you must create and configure a new employee record in NetSuite.

The following must be configured:

- **Location** – Set the location on the employee record to ensure the sales associate can access items and customers in the same location.
- **Access** – Select one or more roles for each SuiteCommerce InStore user on the employee record. You must select the SCIS Clerk role installed by the SuiteCommerce InStore SuiteApp, or a role configured using the SCIS Clerk role as a template.
- **SCIS Access Code** – (Optional) Custom field setting only required for employees with manager override permission.
- **SCIS Location** – (Required) Select one or more locations for each employee. Employees can log in to SCIS at more than one location, but they might need additional permissions.
- **SCIS User Settings** – Custom record that links the employee record to other records, such as default customer, default sales rep, and cash drawer account. For more information, see [SCIS User Settings](#).

### To add a new SCIS sales associate:

1. Go to Lists > Employees > New.



**Important:** Create employee records using the Standard Employee Form. The SCIS Access Code field is added to the Standard Employee form when you install SCIS.

2. Enter name, email, and address information.
3. (Required if you use OneWorld) Make a selection from the **Subsidiary** list.

4. Select an employee location from the **Location** drop down.

 **Note:** You must configure the location before an employee can use SuiteCommerce InStore. If you don't set this field, the employee won't be able to log in.

5. (Required) Click the **Custom** subtab. Select at least one **SCIS Location**. If you have employees who work in more than one location, see [Working with Employees in Multiple SCIS Locations](#).
6. (Required if you use Departments) Make a selection from the **Department** drop down.
7. (Optional) Click the **Human Resources** subtab, and check the **Sales Rep** box.
8. (Required for employees with Authorized Roles) Click the **Custom** subtab. Enter a value in the **SCIS Access Code** field. For more information, see [Manager Override](#).
9. Click the **Access** tab.
10. Check the **Give Access** box.
11. Check the **Send New Access Notification Email** box.

When you check this box, the employee receives an email notification that access has been granted to your NetSuite account. The email contains a link so that the employee can set up a NetSuite password.

**(Optional)** If you prefer to set up the employee's password yourself, follow these steps instead:

- a. Don't check the **Send New Access Notification Email** box.
  - b. Check the **Manually Assign or Change Password** box.
  - c. In the **Password** field, enter a password for the employee to use to log in. As you type, the characters are validated against the password policy criteria and the results displayed.
  - d. In the **Confirm Password** field, re-enter the password. You must tell the employee the password you set.
  - e. Check the **Require Password Change on Next Login** box to require this employee to change their password on their next login to NetSuite.
12. In the **Roles** column, select one or more roles for the employee.

 **Important:** For employees expected to enter transactions using SuiteCommerce InStore, you must use the SCIS Clerk role installed by the SuiteApp, or use a role that you create using the SCIS Clerk role as a template.

13. Click **Save**.

## Working with Employees in Multiple SCIS Locations

Many retailers have more than one store in the same city, so employees may work at multiple locations. To set up SuiteCommerce InStore (SCIS) for employees in multiple locations, an administrator or store manager must use NetSuite to configure point-of-sale devices and employee records.

 **Note:** You can assign the SCIS Support Role to let employees configure mobile devices for use in multiple locations. For more information, see [SCIS Support](#).

SCIS installs the **Device Location** field on the SCIS Mobile Device record, and the **SCIS Locations** list on the employee record. Selecting SCIS locations is a one-time setting when you configure a new Employee.

### To set up SCIS for employees in multiple locations:

1. Assign locations to mobile devices:



- a. Go to Customization > Lists, Records, & Fields > Record Types.
  - b. Find **SCIS Mobile Device** and click **List** in that row.
  - c. Click **Edit** next to the mobile device you want to configure for a particular location.
  - d. In the **Device Location** list, select a location for the device. The options in the list are sourced from the list of locations that you configured in NetSuite. You can choose one location per device.
  - e. Click **Save**.
2. Assign locations to Employee records:
- a. Go to Lists > Employees.
  - b. Click **Edit** next to the employee record you want to change.
  - c. Click the **Custom** subtab.
  - d. In the **SCIS Locations** list, select the locations where this employee logs in to SCIS.
  - e. Click **Save**.

If the list on the employee record includes the same location configured on the mobile device, the employee is automatically logged in to SCIS.

## SCIS User Settings

An SCIS User Settings custom record is automatically created for each employee after they log in to SCIS for the first time. The SCIS User Settings record links the employee record to other records critical to SCIS transactions, such as the default customer record and the employee's cash drawer account.

### To view the SCIS User Settings custom record:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find **SCIS User Settings** and click **List** in that row.
3. Click **View** next to a name in the list of employees to check the settings. If you want to change or update them, click **Edit**.
4. Note the following user settings:
  - **Employee** – Shows the employee name. This field is automatically populated, and is linked to the employee record.
  - **Default Customer** – Shows the default customer record associated with the employee. For more information, see [Default Customer](#).



**Important:** Don't change the default value in the **Default Customer** field. Changing this can affect the ability to track sales transactions submitted for customers who don't provide personal information such as name or email address.

- **Default Sales Rep** – Defines the default sales rep for the employee.
- **Account** – Defines the cash drawer account assigned to the employee.
- **EULA Version Presented** – Shows the ID of the latest version of the End-User License Agreement (EULA) presented to the user. This field is automatically updated each time a new version of the EULA is displayed in SCIS.
- **EULA Review Date** – Shows the date and time when the user accepted the terms of the EULA.
- **EULA Acceptance** – This box is checked if the SCIS user accepted the terms of the EULA. If the box is cleared, the SCIS user hasn't accepted the EULA.

5. Click **Save**.

# SCIS Customization

You can customize your SuiteCommerce InStore (SCIS) implementation in these ways:

- Change optional settings in the CustomConfiguration.js file. For more information, see [Customizing the Configuration File](#).
- Display additional item attributes in the cart, search result lists, and on product detail pages. You can also display additional customer information in the Customer Profile or customer search results. For more information, see [Creating SCIS Custom Attributes](#).
- Web developers can write custom scripts that run before or after a specific event occurs in the shopping cart. For more information, see [SCIS Event Validators](#).
- Web developers can create custom popup windows that can be displayed in the SCIS shopping cart. For more information, see [SCIS Extensions](#) and [SCIS Extensibility API](#).

 **Note:** SCIS only supports client scripts for use with AvaTax integrations. You're responsible for testing and maintaining the client scripts you create. Ensure your scripts work properly with each managed bundle update.

## Customizing the Configuration File

SuiteCommerce InStore (SCIS) includes the CustomConfiguration.js file where you can change optional settings. This section includes instructions on how to change the file to meet your business needs:

- For step-by-step instructions, see [Editing the CustomConfiguration.js File](#).
- For more information about optional settings, see [Optional Settings in CustomConfiguration.js](#).

## Managed SuiteApp Updates not Applied to CustomConfiguration.js

SuiteCommerce InStore is a managed SuiteApp, which means that updates and enhancements to the SuiteApp are pushed automatically to your account. However, the JavaScript configuration file for SuiteCommerce InStore is an exception. The CustomConfiguration.js file isn't updated automatically.

When you add or change a section of code in CustomConfiguration.js, those changes remain in place through subsequent automatic upgrades.

## Editing the CustomConfiguration.js File

To make changes to the CustomConfiguration.js file in SuiteCommerce InStore (SCIS), you must perform the same general steps.

### To edit the CustomConfiguration.js file:

1. Go to Commerce > Hosting > Website Hosting Files.
2. Find the **SuiteCommerce InStore** folder in the File Cabinet. Go to Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore
3. Click **Edit** next to **CustomConfiguration.js**.
4. In the file record, click **Edit** in the Media Item section, next to the file name.
5. When you're finished making changes, click **Save** on the file record.

## Optional Settings in CustomConfiguration.js

SuiteCommerce InStore (SCIS) has several optional custom configurations. Each optional configuration is documented in the JavaScript configuration file. To learn about the options you can configure, see the CustomConfiguration.js file.

The following topics give you more information about optional configurations for SCIS:

- [Filters for Customer Search](#)
- [Switch the Sales Rep After Each Transaction](#)
- [Item Display in Cart](#)
- [Customize Location Display](#)
- [SCIS Event Validators](#)

### Filters for Customer Search

You can customize the default filters used for searching customers in SCIS. To apply settings that make sense to sales associates in your organization, modify the following section of code in CustomConfiguration.js.

The settings that are commented are the default settings. You can change the default settings and then remove the comments around the code snippet.

```

1 // Customer options
2 customer: {
3     // Internal ids for the fields used to search customers in the Search Modal.
4     // For example customer can be searched by: Internal Id (internalid), Last Name (lastname), Phone (phone), email (email),
5     and
6     // Company Name (company name). These filters can be configured by adding or removing values. Take note that search won't
7     work
8     // if an invalid internalid is issued here. If fullname is added to this list, the search will also be performed on the
9     concatenation
10    // of firstname and lastname.
11    //
12    // searchFilters:[
13    //     'fullname'
14    // , 'firstname'
15    // , 'lastname'
16    // , 'phone'
17    // , 'email'
18    // , 'companyname'
19    // ],

```

### Switch the Sales Rep After Each Transaction

If you use commissions to compensate sales reps, you may want to customize the workflow for selecting the sales rep on an order. By default, the sales associate can select a sales rep after logging in to SuiteCommerce InStore. The sales rep selected remains in place on all subsequent orders until the sales associate changes it.

```

1 // Switch sales rep. after each transaction.
2 //
3 switchSalesRep: false,

```

### Item Display in Cart

By default, each item added to the cart shows the item number as the subtitle under the item name. You can configure the subtitle shown below the item name by adding a line to the CustomConfiguration.js file.

|                                       | Qty | Price   | Total   |
|---------------------------------------|-----|---------|---------|
| Red Lipstick #1<br>ITEM #793100111408 | 1   | \$20.00 | \$20.00 |

For example, the following sample code will display the text, ITEM #, followed by the UPC code from the item record:

```
1 | itemList: { subtitleLabel: 'ITEM #', subtitleField: 'upcocode' }
```

**Note:** You must add the value for subtitleField to the list of Search Fields on the Web Site Setup page. For example, if you use SKU as the subtitle, you'll need to add it to the list of Search Fields before putting it in CustomConfiguration.js.

## Customize Location Display

SuiteCommerce InStore includes information about physical store locations where products are in stock and available for pickup. This information is sourced from location settings on item records in NetSuite. You can customize how location information is displayed in SCIS. First, create a saved search to display the location information you want to share, and then edit the CustomConfiguration.js file to define the saved search you want to use.

**Important:** If you choose to change the **SCIS Inventory Locations** saved search, ensure that the **Make Inventory Available** field is included on the Results tab of your custom saved search. If you don't include this field, the inventory count on the Product Detail Page will show 0.

For more information about creating the saved search, see [Modifying Included Saved Searches](#).

- Create a new Location Search with criteria that filters the locations displayed in SCIS. You can also specify how they're sorted. Replace the default values for locationSearch and inventoryLocationSearch with the ID of your custom saved search.

```
1 | location: {
2 |     // Id of the search for displaying locations in Nearby stores and in Pick up locations
3 |     locationSearch: 'customsearch_ns_pos_locations',
4 |
5 |     // Id of the search for searching the inventory of an item by location
6 |     inventoryLocationSearch: 'customsearch_ns_pos_inventory_locations',
```

- In the nearby stores tab, exclude stores that don't have stock available. Set nearbyStoresRemoveNoStock: true.

```
1 | // Remove locations without stock on that item
2 | nearbyStoresRemoveNoStock: false,
```

- Sort Nearby Stores and Store Pickup locations by distance to the current SCIS user's location. If you choose not to sort by location distance, then search results sort order is used. You can set the sort parameters for Nearby Stores and Store Pickup, and set a limit to the number of stores in the list.

```
1 | // Extra order to put in the order screen. Possible values are
2 | // 'none' use saved search order
3 | // 'nearby:desc' sort by nearby stores, near last
4 | // 'nearby:asc' sort by nearby stores, near first
5 | nearbyStoresExtraSort: 'none',
6 |
7 | // How many locations displayed in all locations
```

```

8      // 0 means no limit.
9      nearbyStoresLimit: 0,
10
11      // Extra order to put in store pickup tab. Possible values are
12      // 'none' use saved search order
13      // 'nearby:desc' sort by nearby stores, near last
14      // 'nearby:asc' sort by nearby stores, near first
15      storePickupExtraSort: 'none',
16
17      // How many locations displayed in the store pickup tab
18      // 0 means no limit.
19      storePickupLimit: 0,
20  }

```

## Creating SCIS Custom Attributes

This section provides information about how to define custom attributes for SuiteCommerce InStore (SCIS). Use the SCIS Settings record to define attributes for display in certain zones on SCIS pages you can customize. From the **SCIS Settings record**, you can create an **SCIS Custom Attribute record** to define various properties, including the fields you want to show and the zones where they should appear.

You can add multiple attributes to one zone. There's no limit to the number of attributes allowed in a particular zone, and no character limits in the attributes you define.

### To create custom attributes for SCIS:

1. Go to Commerce > InStore > Custom Attributes.
2. Click a subtab named for the area you want to customize.
3. Click **New SCIS Custom Attributes**.
  - a. **Label** – Enter a label for the field. The text you enter in this field displays in SCIS.
  - b. **Field ID** – Enter a field ID for an item attribute, or a field ID associated with the customer record.

How you define properties for custom attributes is different depending on the area you want to customize. See the following for more information:

- To define custom attributes for the **PDP**, **item search** results page, and **cart**, you must use field IDs defined in the Details field set. For more information, see [Product Detail Page, Item Search, and Cart](#).
- To define custom attributes for display on the **Customer Profile** and in **Customer Search** results, use field IDs from the list displayed at [Customer Profile and Customer Search Results](#).
- c. **Zone** – Select the area where you want to display a custom attribute: **right**, **left**, **top**, or **bottom**.



**Note:** If you see **Undefined** in the Zone column, select a different value for the zone. Custom attributes associated with a zone that is undefined won't appear in SCIS.

The following list shows the zones that apply to each SCIS area:

- [Product Detail Page](#) – Top, Bottom, Left
- [Item Search](#) – Top, Bottom
- [Cart](#) – Right, Left
- [Customer Profile](#) – Right, Left

- **Customer Search** – Top, Bottom
- d. **Allowed Roles** – Define the roles that can view the custom attributes you define.
- e. **Order** – If you have more than one attribute in a zone, enter the order you want them to appear. You can use numbers or letters.
- f. **Parent select lists** – Select the SCIS Settings record you want the custom attributes associated with.

## Product Detail Page, Item Search, and Cart

To define custom attributes for the PDP, item search results page, and cart, you must use field IDs defined in the details field set. You can use any field ID defined in field sets associated with your SCIS website. If a field ID doesn't exist in the list of field sets, it can't appear as an attribute.

### To use a field ID in your SCIS website:


1. Go to Commerce > Websites.
2. Click the **Field Sets** subtab.

Any field ID listed in the **Details** field set can be a valid attribute. The following screenshot shows an example of a field ID you can use to define a custom attribute. You can use any field ID that appears in the **Fields Included in Field Set** column.

3. Select the field ID you want.
4. Click **Save**.


## Product Detail Page

The following screenshot shows the zones you can select when creating custom attributes for display on product detail pages. You can use zones: (1) **Top**, (2) **Bottom**, or (3) **Left** to customize the PDP.

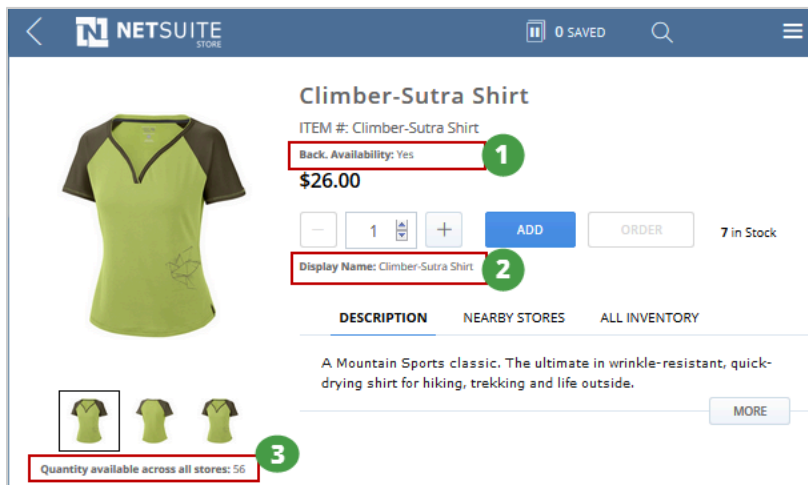


## Item Search

The following screenshot shows the top zone, which you can customize in the item search grid view. Note that the list view doesn't support custom attribute fields.

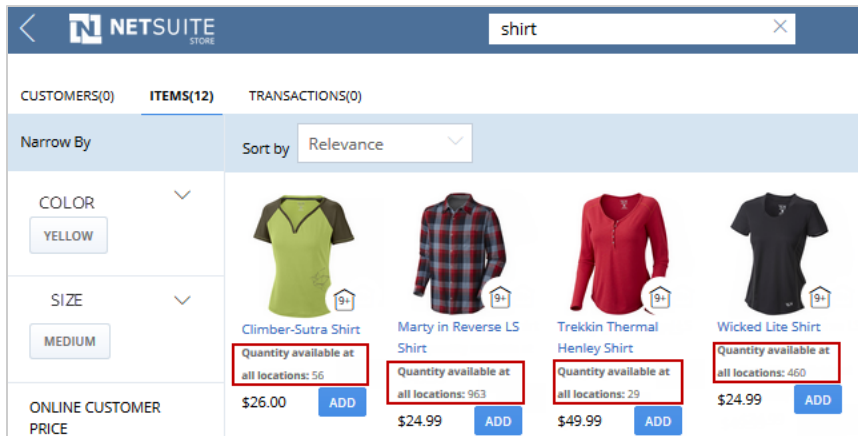

## Cart

The following screenshot shows the zones in the cart where you can display custom attributes. You can use zones: (1) **Right**, or (2) **Left** to customize the Cart.

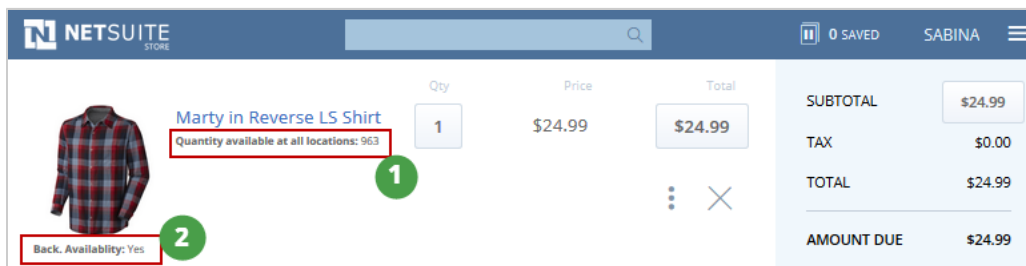


## Customer Profile and Customer Search Results

You can define custom attributes for display on the Customer Profile and in customer search results. The fields available are pulled from the columns configured for customer saved searches. This includes fields that are displayed in the following searches, **SCIS Individual Customer Form Fields** and **SCIS Individual Company Form Fields**.

## Customer Profile

The following screenshot shows the zones on the customer profile where you can display custom attributes. You can use zones: (1) **Left**, or (2) **Right**.

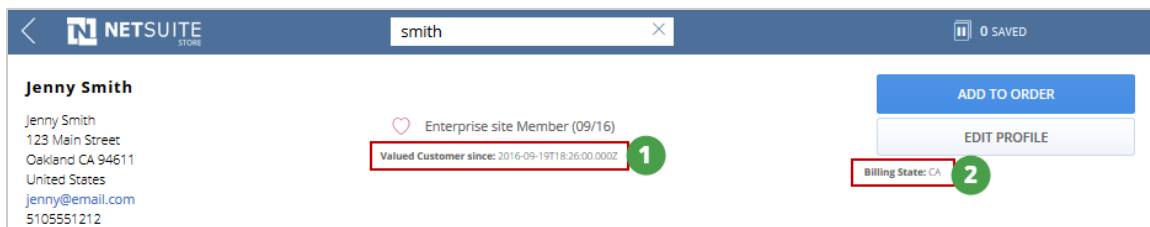



## Customer Search

The following screenshot shows the zones on the customer profile where you can display custom attributes. You can use zones: (1) **Top**, or (2) **Bottom**.

| Customer                                        | Enterprise site Member # | Email                   | Phone        |                        |
|-------------------------------------------------|--------------------------|-------------------------|--------------|------------------------|
| Jenny Smith                                     | 518                      | jenny@email.com         | 5105551212   | <a href="#">SELECT</a> |
| Valued Customer since: 2016-09-19T18:26:00.000Z |                          |                         |              |                        |
| Additional Customer Info: 5105551212            |                          |                         |              |                        |
| Susan Smith                                     |                          | susansmith@netsuite.com | 555-123-1234 | <a href="#">SELECT</a> |
| Valued Customer since: 2014-03-25T21:29:00.000Z |                          |                         |              |                        |
| Additional Customer Info: 555-123-1234          |                          |                         |              |                        |

## SCIS Event Validators

SuiteCommerce InStore (SCIS) enables administrators to customize the application to meet specific business and layout needs. The **validator.js** file contains code snippets that can run before or after a specific backend event occurs in the shopping cart. The pre-validation code defines what is returned. For example, either the event doesn't run (and an error message appears in the SCIS UI), or it succeeds ("1" is returned) and the event runs as expected.

**Note:** Using event validators is the best way to customize the application for specific business workflows and layout needs. Client scripts aren't supported for this purpose. They're only supported with AvaTax integrations.

This section includes reference information about how to modify the `validator.js` file and available methods, supported backend events, and a list of objects and their properties. For more information, see the following topics:

- [How to Modify the validator.js File](#)
- [Methods](#)
- [Events](#)
- [Arguments](#)

## How to Modify the validator.js File

The `validators.js` file is installed by the SuiteApp. By default, the JavaScript is commented, but administrators or web developers can remove the comments in the code to use the default values or make changes to the file.

### To modify the validator.js file:

1. Go to Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore.
2. Click **Edit** next to **validators.js**.

3. Remove the comment around the code snippet to use the default values included in the file. You can also edit the code to customize your implementation of SCIS.
4. Click **Save**.

## Setting a Variable in Session

You can use a validator to implement a particular workflow that's important to your business. For example, you can add a popup message when some value is missing from an order. To do this with a supported event validator, you must set a variable in the user session.

Note the following example:

```
1 var context = nlapiGetContext();
2 context.setSessionObject('mykey', 'my value');
3
4 // then
5
6 var theValue = context.getSessionObject('mykey');
```

## Methods

The following methods are available:

- [addLine\(data\)](#)
- [updateLine\(data\)](#)
- [getLines\(\)](#)
- [getSummary\(\)](#)

### addLine(data)

This has a callback function with an argument of type line. Note the following example:

```
1 //EVENTS
2 var data = {"line": {"isNew": true,"quantity":1, "line": 1, "item":{"internalid":108}}};
3 SCISCartComponent.addLine(data).then(function(line) {
4     console.log('The line added was: ' + JSON.stringify(line));
5 });
```

### updateLine(data)

updateLine(data)

```
1 var data = {"item":{"internalid":108},"quantity":2, "line": 1};
2 SCISCartComponent.updateLine(data).then(function(line) {
3     console.log('The line updated was: ' + JSON.stringify(line));
4 });
```

### getLines()

This has a callback function with an array argument, this contains objects of type line. Note the following example:

```

1 SCISCartComponent.getLines()
2 .then(function(lines)
3 {
4     var countLines = lines.length;
5     if (countLines >= 10)
6     {
7         throw new Error('You have added ' + countLines + ' items. You should add only until ten items');
8     }
9 });

```

## getSummary()

This has a callback function and returns an object of type summary, note the following example:

```

1 SCISCartComponent.getSummary()
2 .then(function(summary)
3 {
4     if (summary.total > 10000) {
5         throw new Error('You can not make sales with a total greater than 10000');
6     }
7 });

```

## Events

You can customize certain events that occur in the shopping cart.

object.on('event', callback, [context])

- event <String> name of the event
- callback<Function>

The following events in SCIS can be customized:

- beforeAddLine
- afterAddLine
- beforeVoidLine
- afterVoidLine
- beforeUpdateLine
- afterUpdateLine
- beforeSetCustomer
- afterSetCustomer
- beforeReturnLine
- afterReturnLine
- beforeAddDiscount
- afterAddDiscount
- beforeAddGiftItem
- afterAddGiftItem
- beforeAddGlobalDiscount
- afterAddGlobalDiscount
- beforeCancelTransaction
- afterCancelTransaction

- beforePay
- afterPay

## beforeAddLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeAddLine', function(line) {
3     console.log('EVENT0 BeforeAddLine ', JSON.stringify(line));
4 });
```

## afterAddLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterAddLine', function(line) {
3     console.log('EVENT AfterAddLine ', JSON.stringify(line));
4 });
```

## beforeVoidLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeVoidLine', function(line) {
3     console.log('EVENT BEFORE VOID LINE', ' line is void: ' + line.voidLine);
4 });
```

## afterVoidLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterVoidLine', function(line) {
3     console.log('EVENT AfterVoidLine', ' line is void: ' + line.voidLine);
4 });
```

## beforeUpdateLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeUpdateLine', function(line) {
3     'use strict';
4     console.log('EVENT BeforeUpdateLine', JSON.stringify(line));
5     var quantity = line.quantity;
6     if (quantity > 10) {
7         throw new Error('You can not update lines with quantity greater than 10.');
```

## afterUpdateLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterUpdateLine', function(line) {
3     console.log('EVENT AfterUpdateLine', ' line updated: ' + JSON.stringify(line));
4 });
```

## beforeSetCustomer

The callback gets one argument ([Customer](#)). Customer is an ID for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeSetCustomer', function(customer) {
3     'use strict';
4     console.log('EVENT BeforeSetCustomer' + JSON.stringify(customer));
5     var customerId = 0;
6     if (customer == customerId) {
7         throw new Error('The customer with the id ' + customerId + ' can not be used.');
```

## afterSetCustomer

The callback gets one argument ([Customer](#)). Customer is an ID for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterSetCustomer', function(customer) {
3     console.log('EVENT AfterSetCustomer' + JSON.stringify(customer));
4 });
```

## beforeReturnLine

The callback gets one argument ([Line](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeReturnLine', function(line) {
3     'use strict';
4     console.log('EVENT BeforeReturnLine', JSON.stringify(line));
5     var quantity = line.quantity;
6     if (quantity > 2) {
7         throw new Error('You can not return lines with quantity greater than 2.');
```

## afterReturnLine

Note the following example:

```
1 //EVENTS
2 SCISCartComponent.on('afterReturnLine', function(line) {
3     console.log('EVENT AfterReturnLin', JSON.stringify(line));
```

```
4 | });
```

## beforeAddDiscount

The callback gets one argument ([Discount](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeAddDiscount', function(discount) {
3     'use strict';
4     console.log('EVENT BeforeAddDiscount', JSON.stringify(discount));
5
6     var discountValue = discount.baseprice
7     ,   isPercentage = discountValue.indexOf('%') > 0
8     ,   discountRate = discountValue.replace('%', '').replace('-', '');
9
10    if (discountValue && isPercentage && discountRate > 50) {
11        throw new Error('You can not apply discounts greater than 50%.');
12    }
13 });
```

## afterAddDiscount

The callback gets one argument ([Discount](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterAddDiscount', function(discount) {
3     'use strict';
4     console.log('EVENT AfterAddDiscount', JSON.stringify(discount));
5 });
```

## beforeAddGiftItem

The callback gets one argument ([gift](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeAddGiftItem', function(gift) {
3     'use strict';
4     console.log('EVENT BeforeAddGiftItem', JSON.stringify(gift));
5
6     var giftValue = gift.baseprice
7     ,   maxValue = 400;
8
9     if (giftValue > maxValue) {
10        throw new Error('You can not add a gift card with amount greater than ' + maxValue + '.');
11    }
12 });
```

## afterAddGiftItem

The callback gets one argument ([gift](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterAddGiftItem', function(gift) {
3     'use strict';
4     console.log('EVENT AfterAddGiftItem', JSON.stringify(gift));
5 });
```

## beforeAddGlobalDiscount

The callback gets one argument ([Discount](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('beforeAddGlobalDiscount', function(discount) {
3     'use strict';
4     console.log('EVENT BeforeAddGlobalDiscount', JSON.stringify(discount));
5
6     var discountValue = discount.rate
7     ,   isPercentage = discountValue.indexOf('%') > 0
8     ,   discountRate = discountValue.replace('%', '').replace('-', '');
9
10    if (isPercentage && discountRate > 20) {
11        throw new Error('You can not apply discounts greater than 20%.');
12    }
13 });
```

## afterAddGlobalDiscount

The callback gets one argument ([Discount](#)), for example:

```
1 //EVENTS
2 SCISCartComponent.on('afterAddGlobalDiscount', function(discount) {
3     'use strict';
4     console.log('EVENT AfterAddGlobalDiscount ', JSON.stringify(discount));
5 });
```

## beforeCancelTransaction

The callback gets one argument ([Transaction](#)), for example:

```
1 //EVENTS
2
3 SCISCartComponent.on('beforeCancelTransaction', function(transaction) {
4     'use strict';
5     console.log('EVENT BeforeCancelTransaction ', JSON.stringify(transaction));
6 });
```

## afterCancelTransaction

The callback gets one argument ([Transaction](#)), for example:

```
1 //EVENTS
2
3 SCISCartComponent.on('afterCancelTransaction', function(transaction) {
4     'use strict';
5     console.log('EVENT AfterCancelTransaction ', JSON.stringify(transaction));
6 });
```

## beforePay

The callback gets one argument (params). The argument (params) is an object with two attributes. The attribute '0' contains the order and the attribute '1' contains an array of payment objects. Note the following example:

```

1 //EVENTS
2
3 SCISCartComponent.on('beforePay', function(params) {
4     'use strict';
5     console.log('EVENT BeforePay ', JSON.stringify(params));
6     var order = params[0]
7     ,   payments = params[1];
8     if (order && payments)
9     {
10         var countPayments = payments.length
11         ,   lastPayment = countPayments > 0 ? payments[countPayments - 1] : undefined
12         ,   maxPaymentAllowed = 1000;
13
14         if (lastPayment && lastPayment.paymentmethodname !== 'Cash' && order.total > maxPaymentAllowed)
15         {
16             throw new Error('You can not apply a payment with a total greater than ' + maxPaymentAllowed + '. It is only allowed to
17             cash payments. ');
18         }
19     });

```

## afterPay

The callback gets one argument (params). The argument (params) is an object with two attributes. The attribute '0' contains the order and the attribute '1' contains an array of payment objects. Note the following example:

```

1 //EVENTS
2
3 SCISCartComponent.on('afterPay', function(params) {
4     'use strict';
5     console.log('EVENT AfterPay ', JSON.stringify(params));
6 });

```

## Arguments

The following arguments are accessible:

- Line
- Payment
- Discount
- Customer
- Transaction

## Line

This argument contains the following properties in SCIS:

- line
- item
- quantity
- displayname
- upccode



- isinactive
- type
- baseprice
- matrix\_parent
- minimumquantity
- additional\_upcs
- isdonationitem

Note the following example:

```

1 | {
2 |   "line":1,
3 |   "item": {"internalid": 108},
4 |   "isdonationitem":false,
5 |   "quantity":"1.0",
6 |   "voidLine":true,
7 |   "order":"F",
8 |   "description":"",
9 |   "giftcertfrom":"Mrs. Wolfe",
10 |  "giftcertmessage":"You received a gift from MySCISWebsite",
11 |  "giftcertnumber":"1234560",
12 |  "giftcertrecipientemail":"email address",
13 |  "giftcertrecipientname":"Mr. Wolfe",
14 |  "tax_code":"116",
15 |  "note":"",
16 |  "excludefromraterequest":"F",
17 |  "custcol_ns_pos_voidqty":""
18 | }

```

## Payment

This argument contains the following properties in SCIS:

- paymentmethod
- paymentmethodname
- payment
- total
- rounding

Note the following example:

```

1 | {
2 |   "paymentmethod": "1",
3 |   "paymentmethodname": "Cash",
4 |   "payment": 1300,
5 |   "total": 1300,
6 |   "rounding": true
7 | }

```

## Discount

This argument contains rate as the only property in SCIS. Note the following example:

```

1 | {

```

```

2 |
3 | "rate": "-20%"
4 | }

```

## Customer

This argument contains id as the only property in SCIS. Note the following example:

```

1 | 114

```

## Transaction

This argument contains id as the only property in SCIS. Note the following example:

```

1 | 2123

```

## Summary

This argument contains the following properties in SCIS:

- amountdue
- changedue
- couponcode
- createddate
- createdfrom
- discounttotal
- giftcertapplied
- handlingcost
- shippingcost
- shippingcostoverridden
- shippingtax1rate
- subtotal
- tax2total
- taxtotal
- total
- tranid

Note the following example:

```

1 | {
2 |   "amountdue": -7.38,
3 |   "changedue": 7.38,
4 |   "couponcode": "",
5 |   "createddate": "2017-08-03T16:08:00.000Z",
6 |   "createdfrom": "",
7 |   "discounttotal": "0.00",

```

```

8      "giftcertapplied": "0.00"
9      "handlingcost": "0.00",
10     "shippingcost": "",
11     "shippingcostoverridden": "F",
12     "shippingtax1rate": "",
13     "subtotal": "1042.62",
14     "tax2total": null,
15     "taxtotal": "0.00",
16     "total": "1042.62",
17     "tranid": "CS1659",
18   }

```

## SCIS Extensions

Web developers can use the Extensibility API to customize the display of popup windows in the SCIS shopping cart. Layout and cart components enable web developers to create option and information windows that provide users with feedback about an operation. These windows fill only the amount of space required for the message, so users can still see what they're doing in the cart.

For more information, see the following topics:

- [Option Windows and Information Windows](#)
- [Build and Deploy an Extension for SCIS](#)
- [Activate Extensions for SCIS](#)
- [SCIS Extensibility API](#)


## Option Windows and Information Windows

Web developers can create option and information windows with personalized and dynamic content. Note the following:

- **Option window** – This window enables the sales associate to choose between two options. Use the option window to display the following:
  - Toast notification based on one of the status values available for extensions (warning, error, success, information).
  - Paragraph with text that can be loaded dynamically.
  - Two buttons that can be customized.
- **Information window** – This window shows an informational message. You can only have one action in the Information window, typically to acknowledge the message and close the popup window. Use the information window to show the following:
  - Toast notification based on one of the status values available for extensions (warning, error, success, information).
  - Paragraph with text that can be loaded dynamically.
  - One button that can be customized.
- **Status values** – Option and information windows indicate a particular status. Each window is marked with a color bar at the top. Note the following supported status values and colors:
  - **Success** – green
  - **Information** – blue
  - **Warning** – yellow
  - **Error** – red

## Anatomy of the Option Window


The following describes the areas you can customize in the option window.

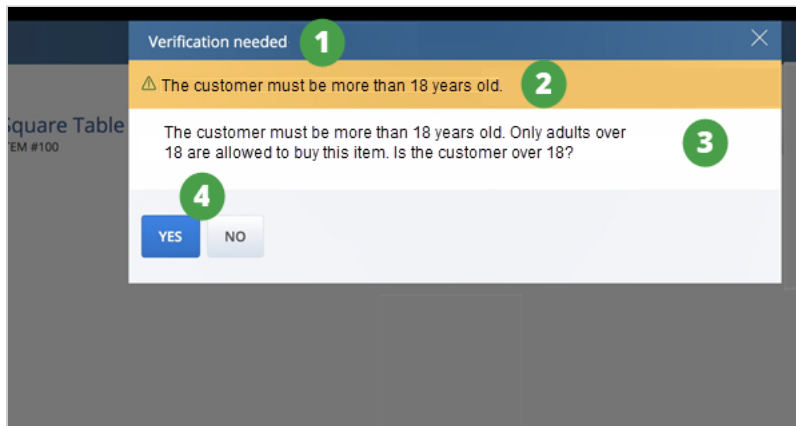

|   | Customizable Area                   | Description                                                                                                   |
|---|-------------------------------------|---------------------------------------------------------------------------------------------------------------|
| 1 | Toast title area                    | Name for the popup window.                                                                                    |
| 2 | Toast content area and status color | Description or reason for the popup, and the status value color bar.                                          |
| 3 | Message area                        | Message text. This field can use Rich Text Format (RTF) for bold, italics, and to add HTML links to websites. |
| 4 | Buttons area                        | The option window can have two buttons. You can customize text on the buttons.                                |

## Anatomy of the Information Window

The following describes the areas you can customize in the information window.

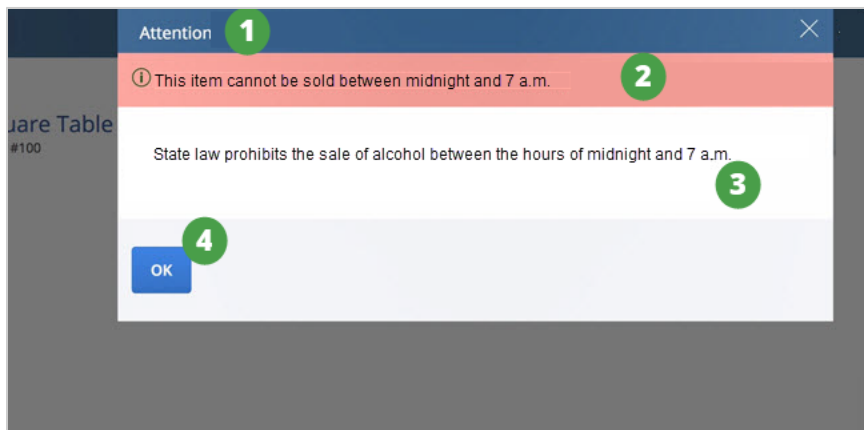

|   | Customizable Area                   | Description                                                          |
|---|-------------------------------------|----------------------------------------------------------------------|
| 1 | Toast title area                    | Name for the popup window.                                           |
| 2 | Toast content area and status color | Description or reason for the popup, and the status value color bar. |

|   | Customizable Area | Description                                                                                                                                                                                                                                                                                                                                              |
|---|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3 | Message area      | Message text. This field can use Rich Text Format (RTF) for bold, italics, and to add HTML links to websites.                                                                                                                                                                                                                                            |
| 4 | Buttons area      | <p>The information window can only have one button. You can customize text on the button.</p> <div>  <b>Note:</b> You can only have only one action in the Information window, typically to acknowledge the message and close the popup window at the same time. </div> |

## Build and Deploy an Extension for SCIS

To start building extensions for SCIS, install the **SuiteCommerce Extension Management** bundle in your NetSuite account. Web developers can use the tools provided in the bundle to build and deploy extensions to your NetSuite account. Administrators can activate extensions for SCIS by using the Extension Manager in NetSuite.

See the help topic [Install Your Commerce Website Applications](#) for information about the **SuiteCommerce Extension Management** SuiteApp and the Bundle ID.

NetSuite Commerce web stores provides tools to create, test, and deploy code as extensions for SCIS. Not all of the same events and methods that are available for Commerce web stores are available in SCIS. However, the way you build extensions, using the Extensibility Layer API is the same. The following instructions describe general information about setting up your development environment and building an extension for SCIS.

 **Note:** Option and information windows can only be triggered by logic associated with frontend SCIS events.

### To set up your development environment and build an extension for SCIS:

1. [Install Node.js](#)
2. [Install Gulp.js](#)
3. [Set Up Extension Developer Tools](#)
4. Use events and methods available with the SCIS API. For more information, see [SCIS Extensibility API](#).

 **Note:** SCIS doesn't support views, templates, or themes.

5. Use Gulp to create your extension.
6. Deploy your extension. Follow the instructions in [Deploy an Extension to NetSuite](#).
7. After the extension is deployed, an administrator can activate it in SCIS. For more information, see [Activate Extensions for SCIS](#).

## Activate Extensions for SCIS

Administrators can activate extensions for SCIS by using the Extension Manager in NetSuite. For more information, see the help topic [Overview](#).

## To activate an extension for SCIS:

1. After the extension is created and deployed in NetSuite, use the **Manage Extension Wizard** to activate your extensions in SCIS.

Go to Commerce > Extensions > Extension Manager.

2. Click **New Activation**.

The following are required settings for SCIS Extensions:

- Select the site you want to manage from the **Select a Web Site** list.
- Select the domain you want to manage from the **Select a Domain** list.



**Note:** If you choose a domain that already has themes and extensions activated, you can edit or update the current activations.

- Select the subsidiary from the **Select Subsidiary** list.
- Select the location from the **Select Location** list.



**Note:** If you leave the Subsidiary or Location setting blank, your activation applies to all subsidiaries or all locations.

3. Click **Next** to select themes and extensions for the domain, or click **Cancel** to stop the activation process.
4. Select extensions to activate:
  - a. Click the **Extensions** tab.
  - b. Check the **Active** box next to any extensions you want to activate.
5. Click **Activate** to activate the selected extensions.  
To stop the activation process, click **Cancel**.

## To deactivate extensions:

1. Go to Manage Extension Wizard.
2. Click the **Extensions** tab.
3. Clear the **Active** box next to the extension you want to deactivate.

# SCIS Roles and Permissions

Different employees interact with SuiteCommerce InStore (SCIS) and with NetSuite based on their roles. These roles get installed in your NetSuite account when you add the SuiteCommerce InStore SuiteApp:

- **SCIS Clerk** – This role is assigned to sales associates. It enables them to enter orders and includes permissions required to access SCIS on an approved device, search for customers and enter transactions.
- **SCIS Support** – It lets them enter orders and gives them permission to access SCIS, search for customers, and enter transactions. It doesn't include permission to enter transactions.
- **SCIS Store Manager** – This role lets managers view Cash Drawer Activity for sales associates at their store and close shifts for employees. This role's only for use with Advanced Cash Drawer Management.
- **SCIS Fallback Auditor** – This role lets users reconcile SCIS Fallback Transactions. Anyone with this role can log in to NetSuite and edit SCIS Fallback Transaction records to trigger cash sale transactions. For more information, read [SCIS Fallback Transaction Reconciliation](#).

For more information, read [SuiteCommerce InStore Roles](#).

## Permissions

The SuiteApp installs a basic set of permissions for operations that are typical in retail transactions, such as void lines, or apply discount. Employees using SCIS need the right NetSuite permissions to perform these operations. The SCIS Permission custom record manages restricted operations that need authorization. For more information, read [Defining Permissions](#).

## Manager Override

To complete restricted operations, a manager or authorized employee needs to enter an SCIS Access Code and approve the transaction. A NetSuite Administrator needs to define authorized roles on SCIS Permission custom records. Employees with authorized roles also need an SCIS Access Code to approve restricted operations. To see a list of the operations that are restricted by default, see [Operations that Require Authorization](#).

**SCIS Access Code** is a field on the Custom subtab on the Employee record. When this field is populated, employees can use the SCIS Access Code to authorize restricted transactions.

## SCIS Audit Log

The SCIS Audit Log shows every operation that requires permission. You can use this log to track approvals of restricted operations. For more information, read [SCIS Audit Log](#).

## SuiteCommerce InStore Roles

SCIS users need specific permissions set up on roles from the SuiteCommerce InStore SuiteApp. This section describes SCIS roles and role-based permissions.

Employees also require authorization to perform certain operations in SCIS, defined on SCIS Permission records. For more information, read [SuiteCommerce InStore Permissions](#).

For secure authentication, roles for employees who will be using SCIS on tablets must also be restricted by Device ID. For more information about Device ID setup, see the help topic [Device ID and the SCIS SuiteApp](#).

## SCIS Clerk

Employees entering transactions in SCIS, must use the SCIS Clerk role, or a role configured using the SCIS Clerk role as a template. Removing any permissions that are already configured on an SCIS role can prevent employees from performing basic tasks.

### Role-Based Permissions for SCIS Clerk

The following table includes a list of permissions required on the SCIS Clerk role. If you use a custom role, go to Setup > Manage Roles, and verify that the role you use for SCIS includes all of the following permissions.

| Permission Type     | Permission                                                                                                                                     | Level  |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| <b>Transactions</b> |                                                                                                                                                |        |
|                     | Access Payment Audit Log                                                                                                                       | View   |
|                     | Cash Sale                                                                                                                                      | Edit   |
|                     | Credit Memo                                                                                                                                    | Edit   |
|                     | Customer Deposit                                                                                                                               | Edit   |
|                     | Customer Payment                                                                                                                               | Edit   |
|                     | Customer Refund                                                                                                                                | Edit   |
|                     | Find Transaction                                                                                                                               | View   |
|                     | Fulfill Orders                                                                                                                                 | Edit   |
|                     | Fulfillment Request                                                                                                                            | Full   |
|                     | Invoice                                                                                                                                        | Edit   |
|                     | Invoice Approval                                                                                                                               | Edit   |
|                     | Item Fulfillment                                                                                                                               | Edit   |
|                     | Sales Order                                                                                                                                    | Edit   |
|                     | Sales Order Approval                                                                                                                           | Edit   |
|                     | Estimate                                                                                                                                       | Edit   |
|                     | SCIS Closing Drawer                                                                                                                            | Create |
|                     |  <b>Note:</b> Required for Advanced Cash Drawer Management. |        |
|                     | SCIS Opening Drawer                                                                                                                            | Create |
|                     |  <b>Note:</b> Required for Advanced Cash Drawer Management. |        |
|                     | Store Pickup Fulfillment                                                                                                                       | Full   |
|                     | View Payment Results Previews                                                                                                                  | View   |
| <b>Lists</b>        |                                                                                                                                                |        |



| Permission Type      | Permission                                                                                                                                     | Level  |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                      | Accounts                                                                                                                                       | Full   |
|                      | Currency                                                                                                                                       | View   |
|                      |  <b>Note:</b> This is required for using Multiple Currencies. |        |
|                      | Custom Record Entries                                                                                                                          | View   |
|                      | Customers                                                                                                                                      | Edit   |
|                      | Documents and Files                                                                                                                            | Create |
|                      | Employee Record                                                                                                                                | Full   |
|                      | Employees                                                                                                                                      | View   |
|                      | Items                                                                                                                                          | View   |
|                      | Locations                                                                                                                                      | Edit   |
|                      | Notes Tab                                                                                                                                      | Full   |
|                      | Perform Search                                                                                                                                 | View   |
|                      | Phone Calls                                                                                                                                    | View   |
|                      | Promotion                                                                                                                                      | View   |
|                      | Shipping Items                                                                                                                                 | View   |
|                      | Subsidiaries                                                                                                                                   | View   |
| <b>Setup</b>         |                                                                                                                                                |        |
|                      | Accounting Lists                                                                                                                               | View   |
|                      | Custom Lists                                                                                                                                   | View   |
|                      | Fulfillment Exception Reason                                                                                                                   | Edit   |
|                      | Set Up Company                                                                                                                                 | View   |
|                      | SuiteScript                                                                                                                                    | View   |
| <b>Custom Record</b> |                                                                                                                                                |        |
|                      | SCIS Audit Log                                                                                                                                 | Create |
|                      | SCIS Cash Drawer                                                                                                                               | Full   |
|                      | SCIS Fallback Settings                                                                                                                         | View   |
|                      | SCIS Fallback Transactions                                                                                                                     | View   |
|                      | SCIS Location Distance                                                                                                                         | View   |
|                      | SCIS Mobile Device                                                                                                                             | Create |
|                      | SCIS Shift                                                                                                                                     | Full   |
|                      | SCIS User Setting                                                                                                                              | Edit   |

## SCIS Support

Assign this role to employees who are tasked with configuring devices for SCIS. By default, this role is not restricted by device ID, and is intended to allow employees to log in to NetSuite on a tablet and configure the SCIS Mobile Device record.

To configure a device for a location, go to Customization > Lists, Records, & Fields > Record Types > SCIS Mobile Device. Click Edit next to a mobile device record, and then set the Device Location field. For more information, read [Working with Employees in Multiple SCIS Locations](#).

## Role-Based Permissions for SCIS Support

The following table includes a list of permissions required on the SCIS Support role.

| Permission Type      | Permission              | Level |
|----------------------|-------------------------|-------|
| <b>Lists</b>         |                         |       |
|                      | Currency                | View  |
|                      | Custom Record Entries   | View  |
|                      | Subsidiaries            | View  |
| <b>Setup</b>         |                         |       |
|                      | Custom Record Types     | View  |
|                      | Mobile Device Access    |       |
|                      | Set Up Company          | View  |
| <b>Custom Record</b> |                         |       |
|                      | SCIS Mobile Certificate | Edit  |
|                      | SCIS Mobile Device      | Edit  |
|                      | SCIS Settings           | Edit  |

## SCIS Store Manager

This role is only used with Advanced Cash Drawer Management. Employees with the SCIS Store Manager role can view shifts for all sales associates at the store. The Store manager can close shifts for other employees. This capability is useful if a sales associate is called away unexpectedly and is unable to close a shift on their own.



**Important:** Before closing a sales associate's shift, the SCIS Store Manager must ensure that the sales associate has stopped entering orders. If there is an order in progress when the store manager closes a shift, one order could be split across two different shifts. This could impact the closing drawer transaction.

### To allow the SCIS Store Manager role to view and close shifts:

1. Go to Commerce > InStore > Shifts.
2. Click **Edit** next to **Store\_Manager**.
3. In the **Authorized Roles** list, select **SCIS Store Manager**.
4. Click **Save**.

## Role-Based Permissions for SCIS Store Manager

The following table includes a list of permissions required for the SCIS Store Manager role.

| Permission Type     | Permission                                                                                                                                       | Level  |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| <b>Transactions</b> |                                                                                                                                                  |        |
|                     | Access Payment Audit Log                                                                                                                         | View   |
|                     | Cash Sale                                                                                                                                        | Edit   |
|                     | Credit Memo                                                                                                                                      | Edit   |
|                     | Customer Payment                                                                                                                                 | Edit   |
|                     | Customer Refund                                                                                                                                  | Edit   |
|                     | Find Transaction                                                                                                                                 | View   |
|                     | Fulfill Orders                                                                                                                                   | Edit   |
|                     | Fulfillment Request                                                                                                                              | Full   |
|                     | Invoice                                                                                                                                          | Edit   |
|                     | Invoice Approval                                                                                                                                 | Edit   |
|                     | Item Fulfillment                                                                                                                                 | Edit   |
|                     | Sales Order                                                                                                                                      | Edit   |
|                     | Sales Order Approval                                                                                                                             | Edit   |
|                     | Estimate                                                                                                                                         | Edit   |
|                     | SCIS Closing Drawer                                                                                                                              | Create |
|                     |  <b>Note:</b> Required for Advanced Cash Drawer Management.   |        |
|                     | SCIS Opening Drawer                                                                                                                              | Create |
|                     |  <b>Note:</b> Required for Advanced Cash Drawer Management.   |        |
|                     | Store Pickup Fulfillment                                                                                                                         | Full   |
| <b>Lists</b>        |                                                                                                                                                  |        |
|                     | Accounts                                                                                                                                         | Full   |
|                     | Currency                                                                                                                                         | View   |
|                     |  <b>Note:</b> This is required for using Multiple Currencies. |        |
|                     | Custom Record Entries                                                                                                                            | View   |
|                     | Documents and Files                                                                                                                              | Create |
|                     | Employee Record                                                                                                                                  | Full   |

| Permission Type      | Permission                   | Level  |
|----------------------|------------------------------|--------|
|                      | Employees                    | View   |
|                      | Items                        | View   |
|                      | Locations                    | Edit   |
|                      | Notes Tab                    | Edit   |
|                      | Perform Search               | View   |
|                      | Phone Calls                  | View   |
|                      | Promotion                    | View   |
|                      | Shipping items               | View   |
|                      | Subsidiaries                 | View   |
| <b>Setup</b>         |                              |        |
|                      | Accounting Lists             | View   |
|                      | Custom Lists                 | View   |
|                      | Fulfillment Exception Reason | Edit   |
|                      | Set Up Company               | View   |
|                      | SuiteScript                  | View   |
| <b>Custom Record</b> |                              |        |
|                      | SCIS Audit Log               | Create |
|                      | SCIS Cash Drawer             | Full   |
|                      | SCIS Fallback Settings       | View   |
|                      | SCIS Fallback Transactions   | View   |
|                      | SCIS Location Distance       | View   |
|                      | SCIS Mobile Device           | Create |
|                      | SCIS Shift                   | Full   |
|                      | SCIS User Setting            | Edit   |

## SCIS Fallback Auditor

An individual with the Fallback Auditor role can reconcile SCIS Fallback Transactions. You might need to reconcile SCIS Fallback Transactions when NetSuite doesn't automatically create a corresponding transaction. Employees with the SCIS Fallback Auditor role can log in to NetSuite and edit SCIS Fallback Transaction records to trigger cash sale transactions. For more information about the process of reconciliation, read [SCIS Fallback Transaction Reconciliation](#).

## Role-Based Permissions for SCIS Fallback Auditor

The following table includes a list of permissions required for the SCIS Fallback Auditor role.

| Permission Type      | Permission                         | Level |
|----------------------|------------------------------------|-------|
| <b>Transactions</b>  |                                    |       |
|                      | Cash Sale                          | Full  |
|                      | Find Transaction                   | Full  |
|                      | Opportunity                        | Full  |
| <b>Lists</b>         |                                    |       |
|                      | Custom Record Entries              | View  |
| <b>Setup</b>         |                                    |       |
|                      | Custom Record Types                | View  |
| <b>Custom Record</b> |                                    |       |
|                      | SCIS Fallback Consolidation Status | None  |
|                      | SCIS Fallback Session              | Edit  |
|                      | SCIS Fallback Settings             | Edit  |
|                      | SCIS Fallback Transaction          | Edit  |
|                      | SCIS Fallback Transaction Line     | Edit  |
|                      | SCIS Fallback Transaction Note     | Edit  |
|                      | SCIS Fallback Transaction Payment  | Edit  |
|                      | SCIS Fallback Transaction Batch    | Edit  |

## Creating Custom Roles for SCIS

You might want to create more roles beyond the ones installed by the SuiteCommerce InStore SuiteApp. For example, maybe your organization uses **Sales Associate** instead of Clerk. You can create a custom role in your account called **Sales Associate**, based on the original SCIS Clerk role. If you need more roles, an administrator must create custom ones with the same permissions as those installed by the SuiteCommerce InStore SuiteApp.



**Tip:** When creating new roles for use with SCIS, best practice is to always use a role installed by the SuiteCommerce InStore SuiteApp as a template. This will preserve permissions that are required for entering and searching for transactions. If role permissions are not set correctly, critical operations could be disabled for users with that custom role.

### To customize a role installed by SCIS:

1. Go to Setup > Users/Roles > Manage Roles.
2. Click **Edit** next to **SCIS Clerk**.
3. In the **Name** field, enter a name for the role you are creating. The name you create displays in NetSuite on the list of roles.
4. Add permissions as needed.



**Important:** Do not remove any permissions for Transactions, Lists, Setup, or Custom Records. Removing permissions can prevent workers from completing standard transactions in SCIS.

5. Check the **Restrict this Role by Device ID** box.
6. Click **Save As** to add your custom role to the list. This preserves all the permissions on the original role installed by SCIS.

After you create roles for employees who will be using SCIS, grant permissions for each role. For more information, see [SuiteCommerce InStore Permissions](#).

## SuiteCommerce InStore Permissions

The SuiteCommerce InStore (SCIS) SuiteApp installs **SCIS Permission** records which represent a basic set of operations that are typical for point-of-sale transactions. An administrator needs to review each SCIS permission and set roles so employees can perform operations.

You can set up manager override capabilities for restricted operations. If employees aren't allowed to complete a restricted operation, the button is hidden or an alert pops up when they try. Another authorized employee can enter a code to allow the operation..

For example, you can require that a manager authorize the transaction anytime an item is voided from an order. Edit the VOID\_LINE permission, and then select the manager's role in the **Authorized Roles** list. Next, select the sales associate's role in the **Requires Authorization** list. The sales associate will need authorization from the manager to complete an order each time an item is voided. To configure VOID\_LINE so that the sales associate can void an item without further authorization, select the sales associate's role as the Authorized Role, and then leave the Requires Authorization list blank.

## Defining Permissions

The following steps describe how to define the SCIS Permission record to ensure that each employee using SCIS has the correct permissions to complete daily tasks.

### To define SCIS Permission records:

1. Go to Commerce > InStore > Permissions.
2. Click **Edit** next to the permission record you want to modify.
  - a. **Name** – Do not edit this field. This is the name of the operation. It is used as a key to identify the permission.
  - b. **Description** – (Optional) Enter a description for the operation.
  - c. **Authorized Roles** – (Required) Select one or more roles that are allowed to perform the operation. The roles selected here have manager override capability.
  - d. **Require Authorization Role** – (Optional) Select the role that needs authorization to perform the operation. You can select more than one role.
3. Click the Filters subtab. Set the **Locations**, **Websites**, and **Subsidiaries** where you want the permission to apply.
4. Click **Save**.
5. Go to Lists > Relationships > Employees.

6. Enter an **SCIS Access Code** for each employee granted manager override on SuiteCommerce InStore transactions.
  - a. Click **Edit** next to employee records with authorized roles.
  - b. Click the **Custom** subtab, and then enter a value in the **SCIS Access Code** field.
7. Click the **Filters** subtab, and then select filters for Location, Website, and Subsidiary.



**Important:** Filter settings are required. If filters are not selected, the SCIS custom record is ignored entirely. If you **do not** want to setup specific localizations, then you must check the **Apply to All** boxes on the Filters subtab.

8. Click **Save**.

## Operations that Require Authorization

The following table provides a list of operations associated with the SCIS Permission custom record. Any role derived from the default **SCIS Clerk** role requires authorization to complete the operations listed below.

| Operation                                                                                                       | SCIS Permission      |
|-----------------------------------------------------------------------------------------------------------------|----------------------|
| Pay with a Credit Memo                                                                                          | APPLY_CREDITMEMO     |
| Pay with a Gift Card                                                                                            | APPLY_GIFTCARD       |
| Apply customer terms of payment to an order                                                                     | APPLY_TERMS          |
| Enable an employee to configure a device                                                                        | CONFIGURE_DEVICE     |
| Required for Administrators logged in to NetSuite on a desktop computer to set the SCIS Mobile Device Location. | EDIT_DEVICE_LOCATION |
| Apply Custom Discounts                                                                                          | CUSTOM_DISCOUNT      |
| Apply Order level discount                                                                                      | GLOBAL_DISCOUNT      |
| Apply line level discount                                                                                       | LINE_DISCOUNT        |
| Open the cash drawer between transactions with No Sale operation                                                | OPEN_CASH_DRAWER     |
| Convert quotes to sales                                                                                         | QUOTES_CONVERT       |
| Create quotes                                                                                                   | QUOTES_CREATE        |
| Edit or change quotes                                                                                           | QUOTES_UPDATE        |
| Remove or delete transaction                                                                                    | REMOVE_TRANSACTION   |
| Resume order                                                                                                    | RESUME_ORDER         |
| Close a shift for a sales associate.                                                                            | STORE_MANAGER        |
| Suspend Orders                                                                                                  | SUSPEND_ORDER        |
| Unvalidated Return                                                                                              | UNVALIDATED_RETURN   |
| Validated Return                                                                                                | VALIDATED_RETURN     |
| Void Line                                                                                                       | VOID_LINE            |

# SCIS Cash and Transactions

Review the administrator topics in this chapter to see how SuiteCommerce InStore (SCIS) configures and processes transactions at the point-of-sale (POS). You'll find details about record handling in NetSuite and steps to configure SCIS to meet your business needs, such as configuring gift certificates.

- [Sales Transactions](#)
- [Payment Configurations](#)
- [SCIS Purchase on Account](#)
- [SCIS Cash Drawer Management](#)
- [SCIS Ship from Store, Pickup In-Store Overview](#)
- [Setting Up Quotes in SCIS](#)
- [Discounts, Markups, and Promotions for SCIS](#)
- [Returns and Refunds](#)
- [Configuring Gift Certificates for SCIS](#)
- [Voiding a Line and Deleting a Transaction](#)
- [Calculating Taxes on Transactions](#)
- [Saved Searches, Reports, and Audit Logs](#)

## Sales Transactions

NetSuite records all transactions made through SuiteCommerce InStore (SCIS) at the point-of-sale (POS). SCIS installs saved transaction searches you can use for sales reporting. For more information, see [Saved Searches, Reports, and Audit Logs](#).

- [Cash Sales](#)
- [Invoices](#)
- [Optimize EMV Enabled Sales Transactions](#)
- [POS Status Definitions](#)
- [Orders for Delivery](#)


Also see:

- [Recovering From Cash, Check, or Custom Tendering Issues During Payment](#)

## Cash Sales

Each sales transaction starts as a cash sale. For cash-and-carry sales with split payments, the cash sale turns into an invoice. For delivery orders, sales orders are created. When delivery orders are processed and shipped, item fulfillments are created from the sales order.


A basic sales transaction entered in SCIS, paid with one payment method is recorded on a cash sale transaction form. Administrators can view or edit cash sale transactions in NetSuite. Go to Transactions > Sales > Enter Cash Sales > List.

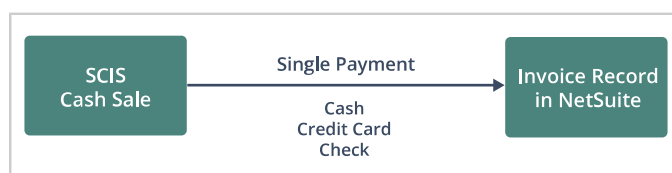



## Invoices

A basic sale, paid with multiple payment methods is recorded on an invoice form. For example, an invoice form is used when a customer pays part of the amount due in cash, and the remaining amount with a credit card. The Standard Product Invoice form is used by default. To view or edit an invoice in NetSuite, go to Transactions > Sales > Create Invoices > List.

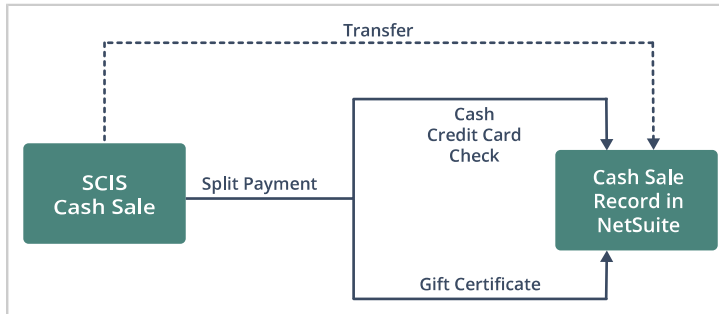


**Note:** If the sales associate applies a gift card payment first in a split tender transaction, the result is a Cash Sale record, not an Invoice record.

## Optimize EMV Enabled Sales Transactions

When the Optimize EMV preference is enabled, SCIS submits a customer payment and invoice during the EMV device priming process. Because customer payments don't calculate taxes, or typically run user event scripts, submitting a sales transaction is faster.

**Note:** The Optimize EMV preference affects specific types of sales transactions:

- Sales transactions where the entire amount is processed using an EMV payment method.
- Sales transactions where an EMV payment method is the first one used in a split payment.

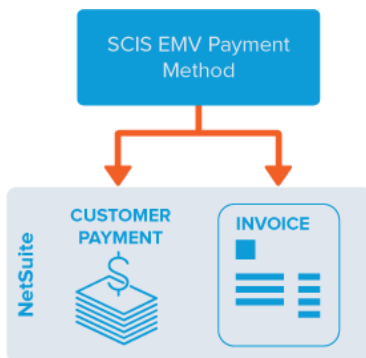

## POS Status Definitions

The POS Status field appears on all transactions entered with SCIS. This field displays values that aren't part of the standard transaction record. The values displayed in this field provide information about transactions that are closed or in progress. This is a read-only field that's set automatically as transactions are created and processed in SCIS.

The following list includes values that can appear in the POS Status field and their descriptions:

- **Closed** – Status when a transaction is paid in full or has a Credit Memo fully applied.
- **Dismissed** – Status when an associate doesn't resume a transaction that was interrupted during an EMV payment, usually because the SCIS application closed unexpectedly. When a transaction is interrupted, the associate can either resume or dismiss it.
- **Open** – Status when a transaction is created. Also if a saved transaction is resumed but not completed.
- **Partially Returned** – Status when one or more (but not all) items in a transaction are returned.
- **Returned** – Status when all items in a transaction are returned.
- **Tendering** – Status when a transaction is only partially-paid.
- **Suspended** – Status for saved or suspended transactions.

**Note:** Suspended orders are classified as an “Unapproved Payment Status.” To place a transaction in “Unapproved” status, a credit card payment method must be selected. The specific payment method isn't relevant and has no impact. Unapproved is the only status that allows a non-posting transaction to be created without affecting reports and inventory.

## Recovering From Cash, Check, or Custom Tendering Issues During Payment

A cash, check, or custom payment might experience issues during the tendering phase, after tapping **Apply Payment**. One issue is when a SCIS mobile device loses connection while processing the payment. Another issue is when the SCIS application is closed while a payment is tendering.


SCIS displays prompts with actions your sales associates can take to recover and complete a payment, such as reconnecting, resuming, going to Fallback, or dismissing the transaction. The recovery options display in popup windows, either when the issue occurs or when the SCIS application is restarted.


**Note:** These payment methods aren't supported for tendering recovery: Purchase on Account (also called Terms), Gift Card, and Credit Memo.

The following are typical message prompts and the actions available.


### ■ Connection is not available

This issue might occur when an internet connection is lost while applying a payment. SCIS tries to restore the connection for 60 seconds, with an option to retry for another 60 seconds.

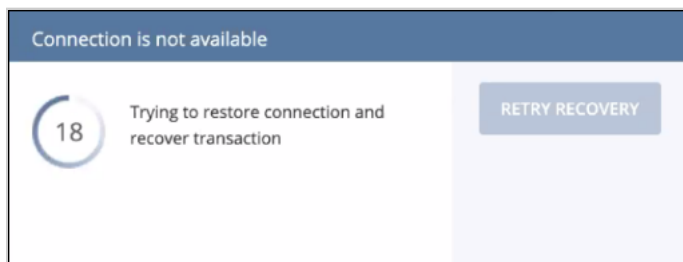

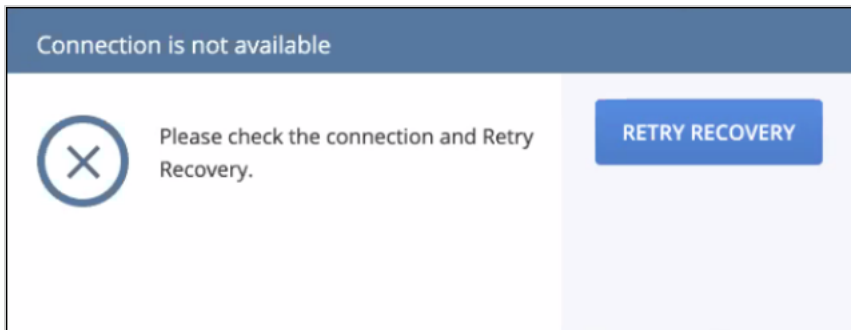


If Fallback is enabled in your setup, sales associates can stop the recovery attempts by going to Fallback and re-entering the transaction.

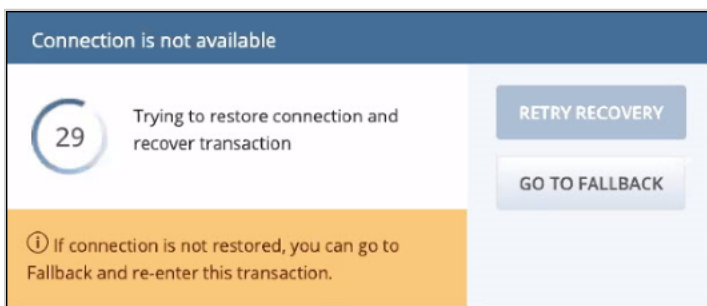

■ **Application was closed while the payment was in progress**

If the SCIS application is closed during a payment, and then restarted, the application offers to resume and complete the transaction. The application might close because the sales associate shut it down by accident, or SCIS might experience an issue that causes it to close.

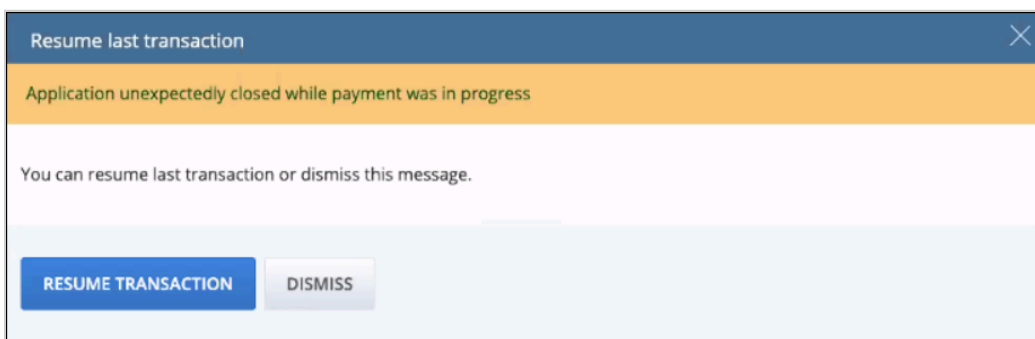

Sales associates can dismiss the transaction instead of resuming it. This option is helpful if they need to start a new transaction.

**Note:** If a sales associate dismisses the transaction, the associated record in NetSuite is assigned a POS Status of **Dismissed**.

Different popup windows are displayed based on the type of payment issue and whether Fallback is enabled. In each case, the messages list the options sales associates can take.


## Payment Configurations

With SuiteCommerce InStore (SCIS), sales associates can accept various forms of payment from customers. You must follow all the procedures described in the following topics when you first install and set up SCIS.

- [Modifying Cash Payment Denominations](#)
- [Setting Up Payment Services for SCIS](#)

## SCIS Purchase on Account

SuiteCommerce InStore (SCIS) supports the Purchase on Account payment option that allows customers to purchase items using payment terms. After selecting a customer on the order, the sales associate can select the Purchase on Account option from the list of Other Payment options.



When an order is placed using Purchase on Account, an invoice is created in NetSuite. If the customer already has terms defined on the customer record, those terms are already selected in SCIS. If the sales associate is entering a new customer at point-of-sale, they can select from the list of customer payment terms already defined in NetSuite.

**Note:** After the initial order is submitted in SCIS using Purchase on Account, any further payments on the order can be made only in NetSuite.

## Permission for Purchase on Account

The Purchase on Account payment option depends on the SCIS Permission record, `APPLY_TERMS`. You must ensure that the permission record is configured with authorized roles and filters for location, website, and subsidiary.

### To configure permission for purchase on account:

1. Go to Commerce > InStore > Permissions.
2. Click **Edit** next to **APPLY\_Terms**.
3. Ensure the roles that should be allowed to use Purchase on Account are selected in the **Authorized Roles** list.
4. Click the **Filters** subtab. Ensure the location, website, and subsidiary are selected where you want Purchase on Account to be available.
5. Click **Save**.

# SCIS Cash Drawer Management

SuiteCommerce InStore (SCIS) supports traditional, cash-based point-of-sale capabilities. This section provides information for administrators about Cash Drawer Management in SCIS.



**Important:** The SuiteCommerce InStore mobile app is always required when using SCIS on an iPad, or with the Windows Operating System on a tablet or computer. Using SCIS on a desktop or laptop computer with a web browser such as Safari, Chrome, or Firefox isn't supported.

## Overview

With Cash Drawer Management, sales associates can use SCIS to enter opening and closing drawer transactions. Administrators can use NetSuite to view the opening and closing drawer transactions and also track all transactions sales associates enter in SCIS. Administrators must complete general setup steps to use cash drawer management. Additional setup is required for Advanced Cash Drawer Management.



**Important:** Advanced Cash Management supports two or more printers of the same brand and model per location only for Star and Epson network printers with a static IP or a domain name assigned.

## SCIS Cash Drawer Management Accounts

The first step in setting up Cash Drawer Management is to edit and save each location where you use SCIS. This action triggers the automatic creation of the following accounts in the NetSuite chart of accounts:

- **SCIS Store Safe Account**
- **SCIS Cash Drawer Difference account**

These accounts are used for tracking the movement of cash from the store safe to the cash drawer.

When you use Cash Drawer Management, each sales associate using SCIS is assigned a **Cash Drawer** account. The Cash Drawer account is automatically created in the chart of accounts when a sales associate logs in to SCIS for the first time.

For example, if you have five sales associates entering transactions in SCIS, you'll have five cash drawer accounts in NetSuite. Each cash drawer account name is appended with the sales associate's name. The cash drawer account uses the same location as the employee.

## Advanced Cash Drawer Management

Advanced Cash Drawer Management is useful for organizations with sales associates working in multiple locations. Because Advanced Cash Drawer Management uses the **SCIS Cash Drawer** custom record, administrators can group a receipt printer and cash drawer configuration by location. To use Advanced Cash Drawer Management, an administrator must set the preference on the **SCIS Settings** record.

When Advanced Cash Drawer Management is enabled, the following custom records require configuration:

- **SCIS Cash Drawer custom record** – Configured by an administrator for each cash drawer and printer combination used at each retail store.

 **Note:** Each Printer can be associated to only one Cash Drawer.

- **SCIS Shift custom record** – Created when sales associates open a shift in SCIS. This record is linked to the SCIS Cash Drawer. It also enables the administrator to track information about each shift, such as opening and closing date and time, as well as the amount in the initial loan and closing drawer transactions.

For more information about setting up Cash Drawer Management, see the following topics:

- [SCIS Cash Drawer Management Setup](#)
- [Advanced Cash Drawer Management Setup for SCIS](#)
- [Cash Drawer Management for Fallback](#)
- [SCIS Cash Drawer Management Workflows and Tracking](#)
- [Cash Drawers](#)

## SCIS Cash Drawer Management Setup

Administrators must first complete the following general Cash Drawer Management setup steps whether they plan to use Advanced Cash Drawer Management in SuiteCommerce InStore (SCIS).

For more information about setting up Advanced Cash Drawer Management, see [Advanced Cash Drawer Management Setup for SCIS](#).

For reference information about the custom fields and records used in Cash Drawer Management, see the section on [Cash Drawer Management](#) custom fields and records.

### To set up Cash Drawer Management in SCIS:

1. Go to Setup > Company > Locations.
2. Click **Edit** next to each location using SCIS, and then click **Save**.  
This action triggers the automatic creation of an **SCIS Store Safe Account** and **SCIS Cash Drawer Difference** account for each Location. The accounts are also saved on Location records automatically.
3. Ensure the **Use Cash Drawer Account** box is checked on the SCIS Payment record for cash, and for any other payment method for which you want the cash drawer to open.
  - a. Go to Commerce > InStore > Payment Methods.
  - b. View or edit the SCIS Payment record used for cash. Ensure the **Use Cash Drawer Account** box is checked. This box must be checked on all payment methods for which you want the cash drawer to open.

## Advanced Cash Drawer Management Setup for SCIS

The following instructions are for administrators using SuiteCommerce InStore (SCIS) with Advanced Cash Drawer Management.

### To set up Advanced Cash Drawer Management:

1. Enable Advanced Cash Drawer Management on the SCIS Settings record.
  - a. Go to Commerce > InStore > Settings.
  - b. Click the **Cash Drawer Management** subtab.
  - c. Check the **Advanced Cash Drawer Management** box.
  - d. Select a **Close Shift Receipt Template**.

 **Note:** If you need to view certain fields on the Close Shift Receipt Template, create a custom receipt template.

Because SuiteCommerce InStore is a managed SuiteApp, any changes to default receipt templates will be overwritten by automatic updates to SCIS. For more information, see [Customizing a Receipt Template for SCIS](#).

- e. (Optional) Check the **Hide Expected Cash on Shift Close** box. When it's checked, sales associates can't see the expected amount in the cash drawer when closing a shift.
  - f. (Optional) Check the **Mandatory Open Shift** box. When it's checked, sales associates can't enter an order unless they've entered the amount in the cash drawer and selected a register.
  - g. Click **Save**.
2. Create one or more bank accounts to track funds collected in cash drawers.

 **Tip:** You'll use this bank account when you create an **SCIS Cash Drawer** record in a later step (Step 3a).

- a. Go to Lists > Accounts > New.
- b. Click **New**.
- c. Enter a name (and number, if applicable) for the account.
- d. If you use OneWorld, select a **Subsidiary** for the account.
- e. (Required) In the **Restrict to Location** field, select the location to which this account is available.

 **Note:** If you leave this field blank, the account isn't available for selection on the SCIS Cash Drawer record.

3. Create an **SCIS Cash Drawer** record for each cash drawer and printer combination.
- a. Go to Customization > Lists, Records, & Fields > Record Types > SCIS Cash Drawer.
    - **Name** - Enter a name for the cash register or cash drawer.
    - **Register Location** - Select a location for the cash drawer. The options on the list are sourced from the list of locations set up in your NetSuite account.
    - **Printer/Register** - Enter the name of the printer associated with the cash drawer.
    - **Register Account** - Select the bank account you created in Step 2b. The options on the list are filtered by the **Restrict to Location** setting on the bank account record you created in Step 2.
  - b. Click **Save**.
4. Ensure the **SCIS Clerk** role has Edit-level permission for the SCIS Closing Drawer and SCIS Opening Drawer transactions.

 **Note:** Role permission should be in place by default. For more information about the SCIS Clerk role and related permissions, see [SCIS Clerk](#).

5. Assign the SCIS Store Manager role to an employee, and set it as an authorized role in SCIS permissions. For more information, see [SCIS Store Manager](#).

When Advanced Cash Drawer Management is set up, the sales associate opens a shift by entering the amount in the cash drawer and selecting a register. They can't enter a sales transaction without selecting a cash drawer and register.

Selecting a cash drawer and register creates an SCIS Shift record automatically in NetSuite. The shift record shows opening and closing shift time, the register used, and includes links to the opening drawer and closing drawer transactions. For more information about Cash Drawer Management tracking, see [SCIS Cash Drawer Management Workflows and Tracking](#).

## Advanced Cash Drawer Management Calculator

When you use Advanced Cash Drawer Management, the SCIS user interface includes a **Calculator**. Administrators must configure SCIS Quick Cash Denomination records for the calculator to be most useful. For more information, see [Modifying Cash Payment Denominations](#).

If cash denominations haven't been configured, the calculator doesn't show any cash values. The calculator is useful for sales associates when they enter an opening drawer or closing drawer transaction, and when entering a cash drawer adjustment.

Starting Cash

\$ 250.00

CALCULATE DRAWER CASH

Denominations


|       |   |    |   |     |   |   |   |
|-------|---|----|---|-----|---|---|---|
| \$100 | - | 0  | + | \$5 | - | 0 | + |
| \$50  | - | 1  | + | \$1 | - | 0 | + |
| \$20  | - | 5  | + |     |   |   |   |
| \$10  | - | 10 | + |     |   |   |   |

CONTINUE CANCEL BACK

## Cash Drawer Management for Fallback

Sales submitted in Fallback are tracked in a Fallback cash drawer bank account. The Fallback cash drawer account is automatically created in the chart of accounts during the consolidation process. One Fallback cash drawer account is created for each location in NetSuite. The following diagram shows two locations, Embarcadero Store and SoMa Store. Each location has its own Fallback cash drawer account.




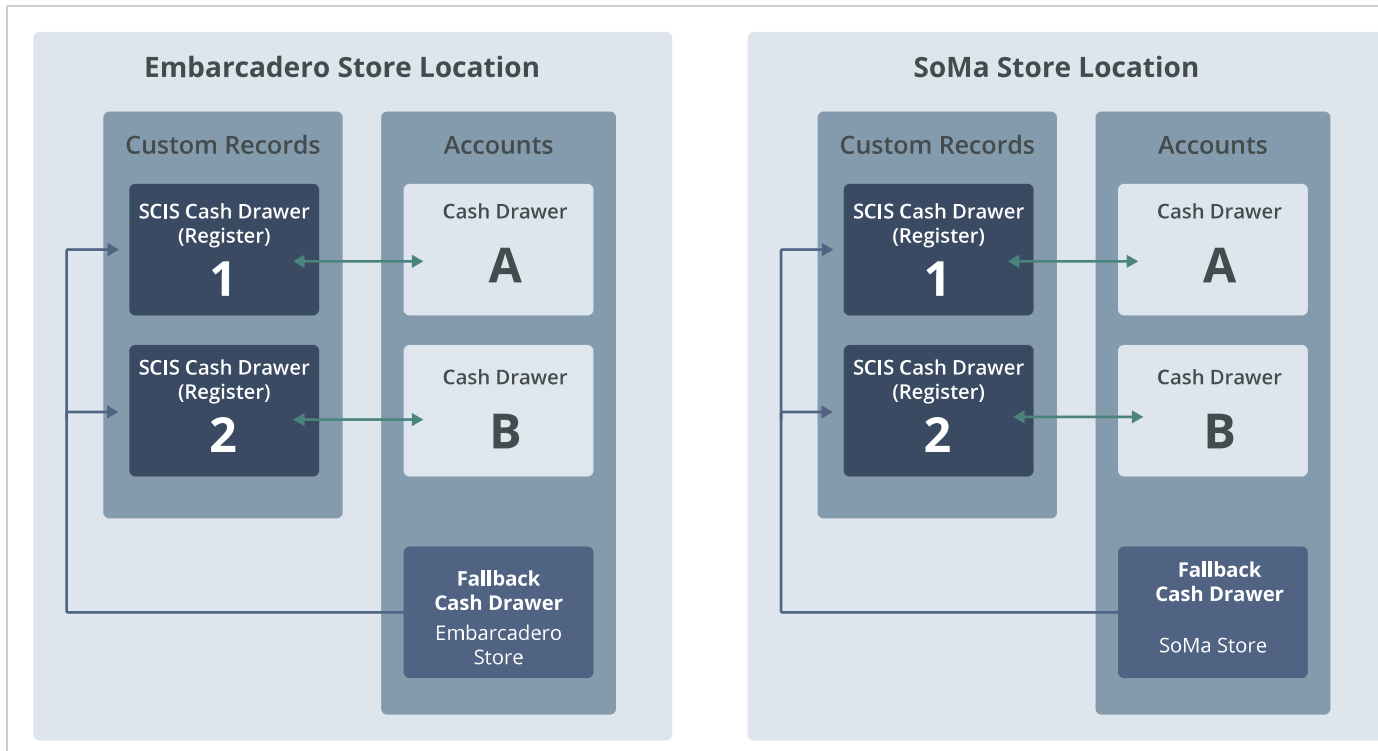

## Fallback Cash Drawer and SCIS Cash Drawer

In SCIS, a register or physical cash box is associated with one cash drawer account. The register or physical cash box is represented in NetSuite as a custom record called **SCIS Cash Drawer**.

The following diagram shows the Embarcadero store location, where Cash Drawer A, in the chart of accounts is associated with Register 1. While, Cash Drawer B, in the chart of accounts is associated with Register 2. It also shows transactions entered in SCIS, plus a transaction entered in Fallback.

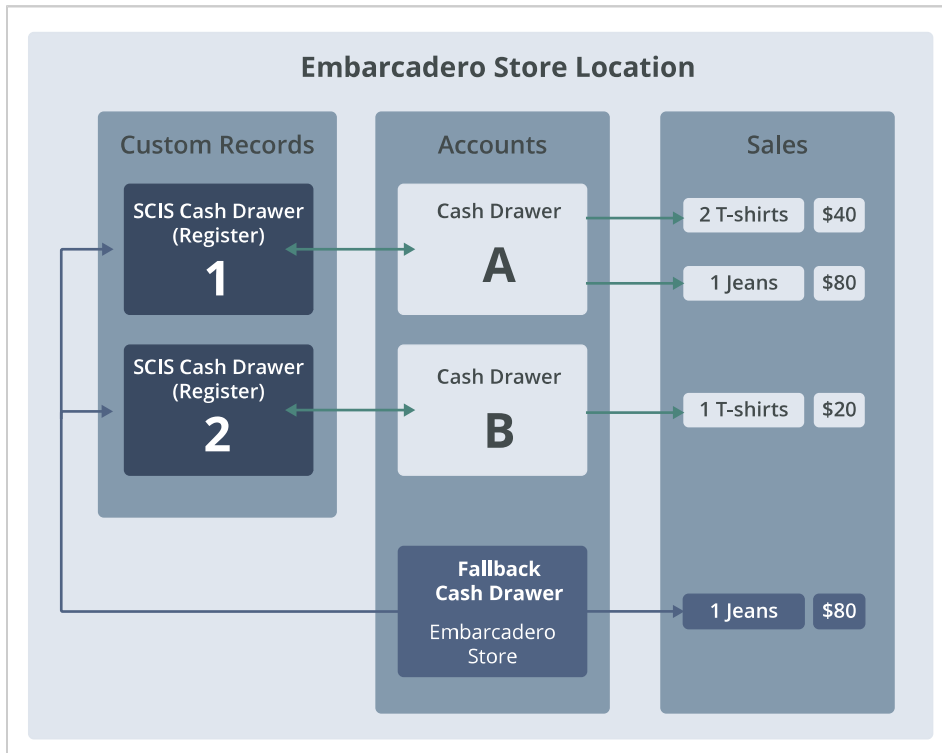

When working in Fallback, a transaction submitted from any register is allocated to the Fallback cash drawer for that location. Note the following key points in this example:


- In SCIS, on Register 1, a sales associate sold two T-shirts for \$40 and a pair of jeans for \$80.
- In SCIS, on Register 2, another sales associate sold one T-shirt for \$20.
- While in Fallback, one pair of jeans was sold for \$80.

(This sale could have been entered from either Register 1 or Register 2. While in Fallback, a transaction entered on any register is allocated to the Fallback cash drawer account.)

When each sales associate closes their shift, the close shift operation only counts transactions that occurred at each register. Transactions entered in Fallback aren't considered in closing drawer or closing shift operations.

**Important:** The transaction entered in Fallback isn't counted in the expected amount on the Close Shift screen for each register.

The following diagram shows Close Shift operations entered in SCIS by sales associates using Register 1 and Register 2.

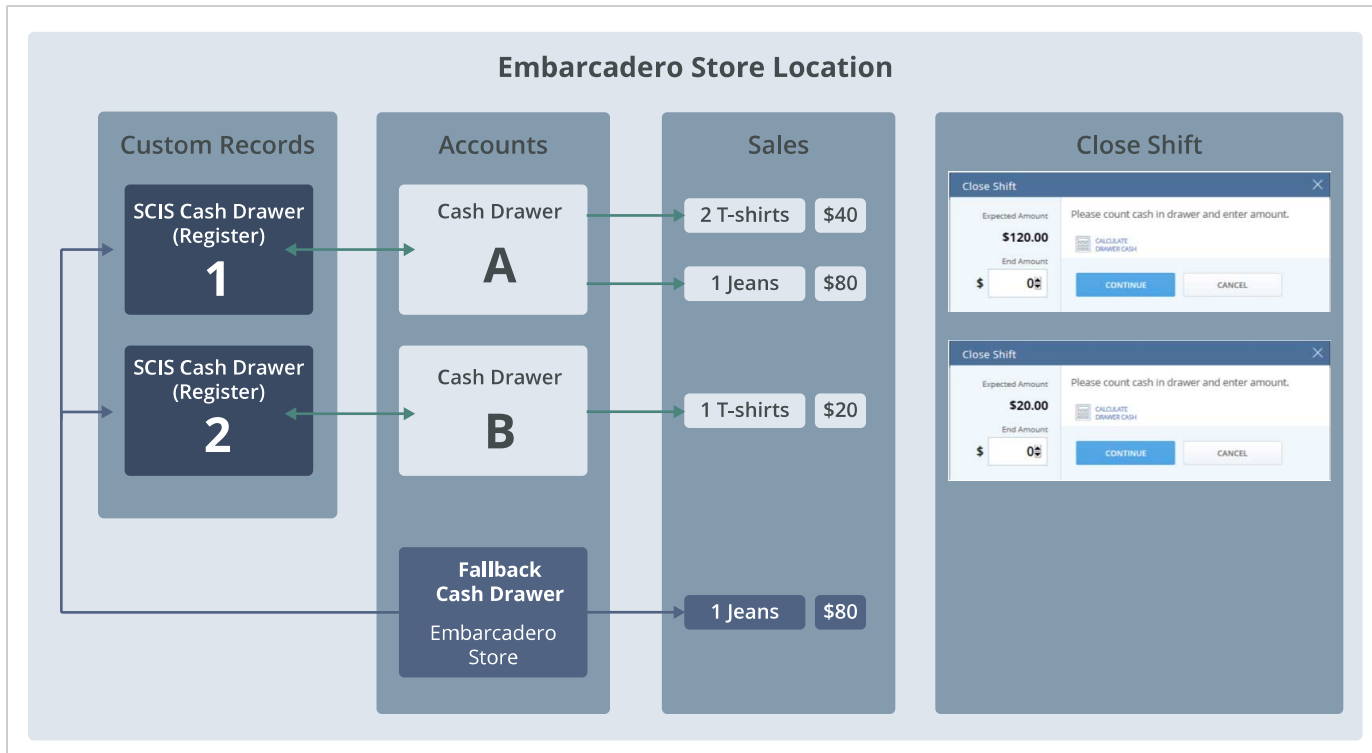

## Tracking Sales Transactions Entered in Fallback

To keep track of sales entered in Fallback, you must go to the chart of accounts in NetSuite, at Lists > Accounts. Then find the SCIS Fallback Cash Drawer account for each location using SCIS. The amount collected from sales transactions submitted in Fallback is displayed in the SCIS Fallback Cash Drawer account for that location.

The following table represents the balance in each cash drawer account based on the Close Shift screen in the preceding diagram.

| Chart of Accounts                      |      |         |
|----------------------------------------|------|---------|
| Account                                | Type | Balance |
| Cash Drawer A                          | Bank | 120.00  |
| Cash Drawer B                          | Bank | 20.00   |
| SCIS Fallback Cash Drawer Location 48* | Bank | 80.00   |

\*Note that the Fallback cash drawer uses the location ID in the account name.

## SCIS Cash Drawer Management Workflows and Tracking


This section includes workflow diagrams showing how sales associates open and close the cash drawer with and without Advanced Cash Drawer Management. The workflows for sales associates are slightly different depending on whether Advanced Cash Drawer Management is enabled for SCIS. This section also includes information about tracking opening and closing drawer transactions in NetSuite.

## Workflows for Sales Associates

At the beginning of a shift, the sales associate receives a cash drawer. Before entering any sales transactions, they must enter an **Initial Loan** or **Open Shift** transaction to document the amount of cash in the drawer.


### Opening a Shift with Advanced Cash Drawer Management

When Advanced Cash Drawer Management is enabled, after logging in to SCIS, the sales associate must enter the initial loan amount and select a cash drawer.

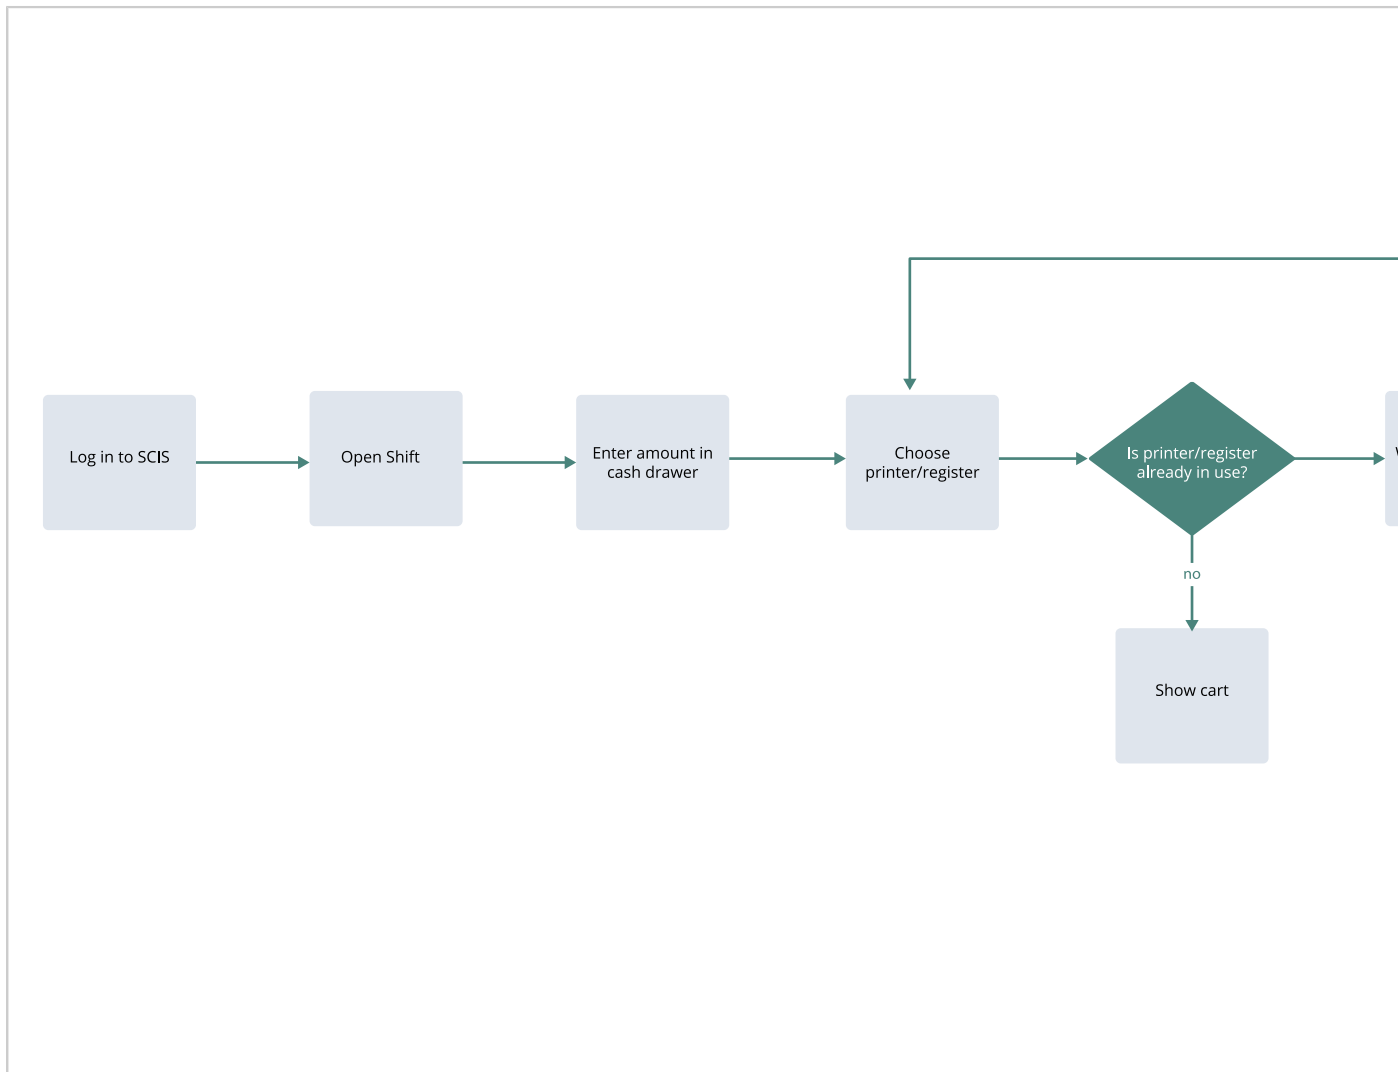


### Opening a Shift with Standard Cash Drawer Management

If Advanced Cash Drawer Management is **not** enabled, the sales associate uses the **Drawer Operations...** option in the User Menu to open the **Initial Loan** dialog screen. Next, enter the total amount for each cash denomination in the cash drawer.

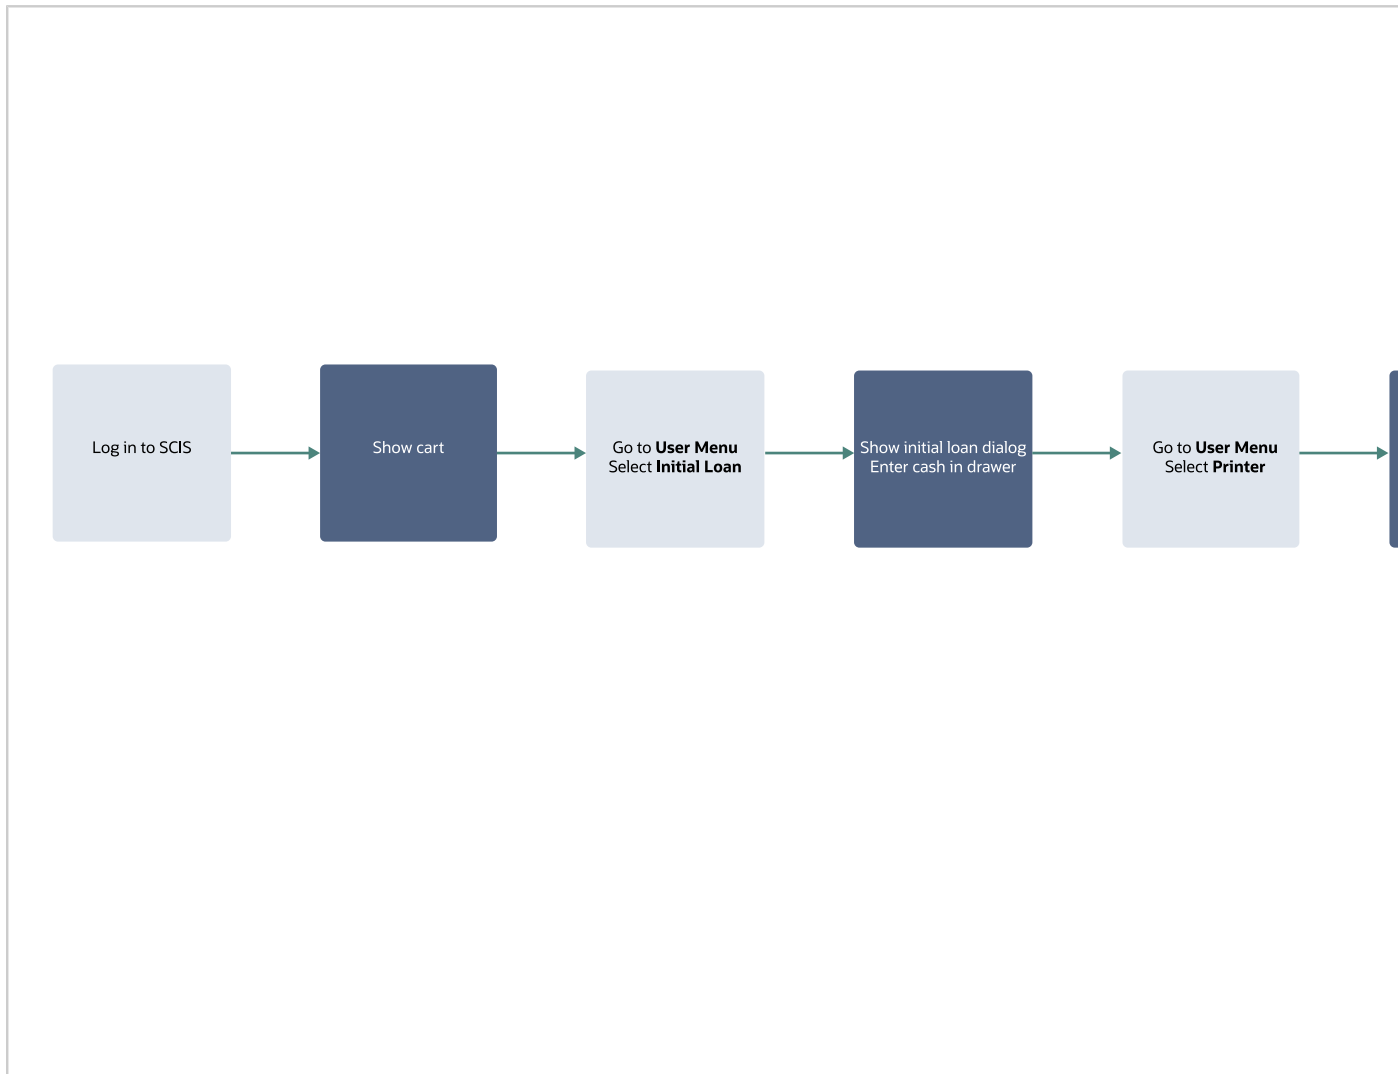


## Closing a Shift with Advanced Cash Drawer Management

If Advanced Cash Drawer Management is enabled, the sales associate must select **Close Shift** from the User Menu (Drawer Operations... > Close Shift). Next, count the cash in the drawer, and enter the amount of cash in the drawer. If the amount of cash in the drawer doesn't equal the expected amount, the sales associate must enter a note to explain why. A Close Shift receipt is printed and then the sales associate is automatically logged out of SCIS.

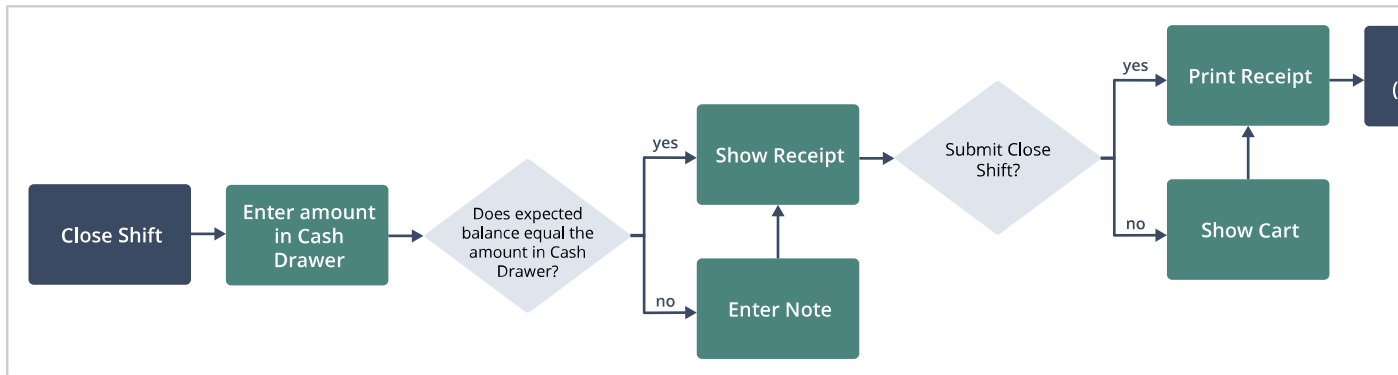

## Closing a Shift with Standard Cash Drawer Management

If Advanced Cash Drawer Management is **not** enabled, the sales associate selects **End of Day** from the User menu to start the process. Next, the sales associate enters the amount of cash in the drawer.

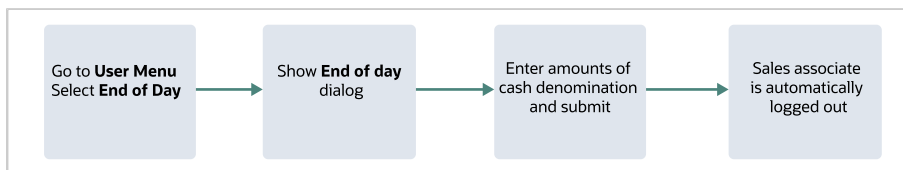

## Tracking Opening and Closing Drawer Transactions

SuiteCommerce InStore (SCIS) enables administrators and managers to track the cash transactions that occurred during a shift. The custom transactions, **SCIS Opening Drawer** and **SCIS Closing Drawer** show a line for each cash denomination that moves from the safe to the cash drawer, and from the cash drawer back to the safe.

### Opening Drawer

Typically, at the beginning of a shift, the sales associate receives cash in a drawer. If you use standard Cash Drawer Management, when the sales associate logs in to SCIS, their Cash Drawer account is created automatically. If you use Advanced Cash Drawer Management, an SCIS Shift record is created after the sales associate enters an Opening Shift transaction. In either case, the first task for a sales associate is to enter the opening drawer amount.

In NetSuite, the administrator can see the sales associate's cash drawer account on transactions entered using standard Cash Drawer Management. With Advanced Cash Drawer Management, the shift is displayed on each cash sale transaction submitted. The administrator can also view or edit SCIS Opening Drawer transactions.

#### To view SCIS Opening Drawer transactions:

1. Go to Customization > Lists, Records & Fields > Transaction Types.
2. Find **SCIS Opening Drawer** in the list. Click **List** in that row.
3. Click **View** to view details of the SCIS Opening Drawer.

Each line in the list tracks the transfer of cash from the SCIS Store Safe Account to each sales associate's cash drawer account. Note that only the last amount entered as part of the opening drawer is displayed in the list.

## Closing Drawer

At the end of each shift, the sales associate uses SCIS to enter the amount of cash that is in their cash drawer. Whether you use standard Cash Drawer Management or Advanced Cash Drawer Management, this is tracked as an SCIS Closing Drawer transaction in NetSuite. After the sales associate submits the closing drawer transaction, they're automatically logged out of SCIS. An administrator can view or edit the SCIS Closing Drawer transaction in NetSuite.

### To view SCIS Closing Drawer transactions:

1. Go to Customization > Lists, Records & Fields > Transaction Types.
2. Find **SCIS Closing Drawer** in the list. Click **List** in that row.
3. Click **View** to see details of the SCIS Closing Drawer transaction.

The Closing Drawer transaction tracks the transfer of cash from the sales associate's cash drawer account or the register account back to the SCIS Store Safe Account. Note that only the last amount entered as part of the SCIS Closing Drawer transaction is displayed in the list.

## SCIS Ship from Store, Pickup In-Store Overview

**Note:** Advanced Order Management is required to set up order fulfillment capabilities for SCIS. Contact your NetSuite account representative for more information.

With SuiteCommerce InStore (SCIS), merchants with SCA websites can let customers order online and have orders shipped from store locations or picked up in-store. This topic gives a general overview of the ship from store, pickup in-store capabilities.

To enable shipping and pickup from your store, you must configure your fulfillment process in NetSuite. Also, ensure that you've enabled the features required to perform your workflow. For more information, see [Setting Up Ship from Store, Pickup In-Store for SCIS](#).

SCIS supports the following order management features:

- Fulfillment Request
- Pick, Pack, and Ship
- Automatic Location Assignment Rules
- Store Pickup

Sales associates click or touch the shopping bag icon in the SCIS header bar to view the **Fulfillment Request** page. Here, the sales associate sees a list of all orders in queue for shipping and pickup.

| Fulfillment Request |                 |              |                  |                   |        |
|---------------------|-----------------|--------------|------------------|-------------------|--------|
| Any Type            |                 | Any Status   |                  |                   |        |
|                     | Document Number | Name         | Fulfillment Type | Date              | Status |
| ▼                   | 122851          | Mario Jones  | Store Pickup     | 7/10/2017 3:51 pm | New    |
| ▼                   | 122852          | Carlos Bueno | Ship             | 7/11/2017 4:18 pm | New    |

Sales associates can use the filters at the top of the page to filter orders by type or status. For example, they can filter the list to view only orders for shipping, only orders for pick up, or all orders. The information that's displayed on this page is output from a saved search. For more information, see [Ship from Store, Pickup In-Store Workflow](#).

## Setting Up Ship from Store, Pickup In-Store for SCIS

This topic includes instructions for administrators to set up Ship From Store, Pickup In-Store capabilities in SuiteCommerce InStore (SCIS).



**Important:** Fulfillment requests must be configured properly to use ship from store and pickup in-store capabilities in SCIS.

### To set up ship from store, pickup in-store for SCIS:

1. Configure fulfillment requests in your account. See the topic, [Setting Up Fulfillment Requests](#). Ensure that you complete all the steps listed in that topic.
2. Select a sales order form on the **SCIS Settings** record.
  - a. Use global search in NetSuite to find the **SCIS Settings** record.
  - b. Click **Edit** next to **SCIS Settings**.
  - c. On the **Transaction Forms** tab, click **Other Configuration**.
  - d. In the **Sales Order** field, select the **Standard Sales Order – BOPIS**.



**Note:** You can use a custom sales order form. However, for potential troubleshooting purposes, it's best to use the Standard Sales Order – BOPIS form where the **Location** and **Fulfillment Choice** fields are displayed by default. If you use a custom form, ensure that these fields are marked to show on your customized sales order form.

3. Ensure that the Fulfillment Request permission is present on the **SCIS Clerk** role at Setup > Users/Roles > Manage Roles.
4. Ensure that the **SCIS Fulfillment Requests** saved search includes all the required fields. The Results subtab should have the following:

| FIELD *                        |
|--------------------------------|
| Internal ID                    |
| Created From : Document Number |
| Fulfillment Type               |
| Date Created                   |
| Status                         |
| Assignee                       |
| Customer : Name                |



**Note:** You can change the filters in the saved search, but you can't change the columns that are displayed.

## Ship from Store, Pickup In-Store Workflow

This topic includes general information for administrators about sales associates' workflow for fulfilling orders in SuiteCommerce InStore (SCIS).



 **Note:** You can configure the exception reason that appears when one or more line items are rejected in a fulfillment. For more information, see the help topic [Defining Fulfillment Exception Reasons](#).

- [Ship from Store](#)
- [Pickup in Store](#)
- [Fulfilling Orders With and Without Automatic Location Assignment](#)

## Ship from Store

Sales associates can perform the entire fulfillment process: pick, pack, print receipts, label packages, and ship. When a sales associate is working on an order, the order is displayed on the Fulfillment Request list as in progress, along with the current status and the sales associate's name. Only the sales associate who is working on an order can complete fulfillment on that order.

Note the following:

- When fulfilling an order, if there's a reason why the sales associate can't pick items for the order, they can select a fulfillment exception reason.  
An administrator must enter Fulfillment Exception Reasons at Setup > Order Management > Fulfillment Preferences > Fulfillment Exception Reasons.
- The shipping method determines the shipping label that's printed for the package.
- The same shipping items configured for use on your website are also available in SCIS for shipping from the store. Customers can track orders using the My Account application associated with your SCA website.
- The shipping label must be printed in PDF format.

 **Important:** To print shipping labels, the administrator must ensure the appropriate shipping items are configured in NetSuite.

## Pickup in Store

When an order is marked for pickup in-store, the sales associate finds it on the Fulfillment Request list. Next, the sales associate marks the items in the order as picked. When the customer arrives at the store for pickup, the sales associate prints the receipt. At this point, the sales associate and the customer have the option to add items to the order.

For more information about the workflow for sales associates, see the help topic [Fulfilling Orders for Shipping and Pickup with SCIS](#).

Note the following limitations for shipping from store and pickup in store:

- Serialized inventory and lot numbered items can't be shipped.
- Partial quantities can't be shipped or picked up in store. If the entire quantity on a line item isn't available, the sales associate must reject that line on the picking list. The order appears on the Fulfillment Request list again, assigned to a different location for processing.

## Fulfilling Orders With and Without Automatic Location Assignment

On orders that are shipped from the store or picked up in the store, Location assignment is different based on whether you've enabled the **Automatic Location Assignment** feature, and the **Default Order**

**Location** setting for SCIS. The following table describes how the fulfillment field is set on sales order line items based on the configuration of your NetSuite account.

| Feature and Configuration           |                        | How is the fulfillment location set on sales orders?                                                                             |
|-------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Automatic Location Assignment (ALA) | Default Order Location |                                                                                                                                  |
| Enabled                             | Not Enabled            | Fulfillment location is set by ALA.                                                                                              |
| Not Enabled                         | Enabled                | Default Order Location setting is applied to fulfillment location.                                                               |
| Enabled                             | Enabled                | Default Order Location setting applied to fulfillment location.                                                                  |
| Not Enabled                         | Not Enabled            | Fulfillment location must be set manually on each line of sales order. Use the NetSuite user interface to edit each sales order. |



**Note:** In the following scenarios, SCIS sets the Fulfillment Location field:

- **Items for Store pickup** — SCIS sets the store location as the fulfillment location.
- **Items to be shipped along with cash-and-carry items on the same sales transaction** — Cash-and-carry items are set with the store location as the Fulfillment Location.

## Invoice in Advance of Fulfillment with Optimize EMV

The Optimize EMV option in SCIS creates a customer payment before creating an invoice. This sequence helps accelerate the payment process. However, when the option to **Invoice in Advance of Fulfillment** is disabled and the order is for pickup or shipping, the flow is directed to use standard EMV processing.

This table shows when SCIS uses Optimize EMV for pickup and shipping orders based on the Invoice in Advance of Fulfillment option.

| Order Type         | Invoice in advance of Fulfillment? | Optimize EMV enabled? | EMV payment action   |
|--------------------|------------------------------------|-----------------------|----------------------|
| Pickup or Shipment | Yes                                | Yes                   | Optimize EMV payment |
| Pickup or Shipment | No                                 | Yes                   | Standard EMV payment |



**Note:** When **Invoice in Advance of Fulfillment** isn't enabled:

- SCIS won't use Optimize EMV to process payment for pickup or shipping orders.
- Orders where a payment failed from a payment device can't be saved (suspended) using the pause icon.



**To enable or disable Invoice in Advance of Fulfillment:**

1. Go to Setup > Accounting > Accounting Preferences.
2. Open the **Order Management** tab.
3. In the **Invoicing** section, check or clear the **Invoice in Advance of Fulfillment** box.
4. Click **Save**.

## Setting Up Quotes in SCIS

In NetSuite, you can give customers an estimate before the order is accepted. In SuiteCommerce InStore (SCIS), estimates are called Quotes. A sales associate can create a quote in SCIS based on items and discounts in the cart, and then print or email it to the customer. After the customer reviews the order amount, the sales associate can make changes as needed, and then convert the quote into a sales order or cash sale.

As the NetSuite administrator, you define which fields are displayed in the Quotes entry form in SCIS. In SCIS, the sales associate enters information in the required fields. Any sales associate can use SCIS to find a quote and convert it to a sale. You can find existing quotes by scanning the transaction number displayed on the receipt, or by typing the transaction number or the customer's name in SCIS.

To set up quotes in SCIS, you must complete the following tasks:

1. [Permissions for Quotes](#)
2. [Defining Fields for Display on the Quote Form in SCIS](#)

## Permissions for Quotes

The sales associate must have permission to create Estimates. To grant additional permissions to sales associates, you must modify the SCIS Clerk role. Also, check that permissions are set properly for creating quotes.

 **Note:** To work with quotes in SCIS, a role with edit-level permission for the Estimate transaction is required. For more information about role-based permissions for SCIS, see [SuiteCommerce InStore Roles](#).

### To check that permissions for Quotes are set appropriately:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find **SCIS Permission**, and click **List** in that row.
3. On the SCIS Permission records for quotes, ensure that the expected roles appear in the list of **Authorized Roles**. For example, if you want sales associates to enter and modify quotes, the SCIS Clerk role must be an Authorized role.

Click **Edit** next to the following roles:

- QUOTES\_CONVERT
- QUOTES\_CREATE
- QUOTES\_UPDATE

4. Click **Save** after making changes.

## Defining Fields for Display on the Quote Form in SCIS

To configure the entry form used for Quotes in SCIS, an administrator must create a copy of the default saved search, and then modify the CustomConfiguration.js file. By creating a modified copy of the default saved search, you can define which fields appear in the popup window presented to the sales associate in SCIS. In the configuration file, you define the search you want to use in SCIS.

### To create a modified copy of the saved search for quotes:

1. Go to Reports > Saved Searches > All Saved Searches.
2. Click **Edit** next to **SCIS Estimate Header Fields**.
3. Check the **Public** box.
4. Click the **Results** subtab. Select the fields you want to display in the Quotes popup window.




**Important:** Ensure the fields that are on the original saved search also exist on your customized saved search. If you've created a custom Quote form with custom fields, you should be able to select those fields on the Results subtab.

5. Click **Save**.

### To define your saved search for quotes in the CustomConfiguration.js file:

1. Go to Commerce > Hosting > Website Hosting Files.
2. Find the **SuiteCommerce InStore** folder in the File Cabinet. Go to Web Site Hosting Files > Live Hosting Files > SSP Applications > NetSuite Inc. - POS > SuiteCommerce InStore
3. Click **Edit** next to **CustomConfiguration.js**.
4. In the file record, click **Edit**.



5. Add the following line in the CustomConfiguration.js file, after the section where forms are defined. Replace 'customsearch\_xxxx\_xxxx\_xxxx' with the ID for the custom search you want to use.

```
1 | quote: {
2 |     quoteHeaderFieldSavedSearch: 'customsearch_xxxx_xxxx_xxxx'
```

```
3 | },
```

Note the following example:

```
// Forms used to validate different records. For example different forms can be used here to validate
// fields
forms: {
  // customer: -2,
  // invoice: 92,
  // cashSale: 95,
  // creditMemo: 94,
  // customerRefund: 41,
  // customerPayment: 70,
  // salesOrder: 68,
},
quote: {
  quoteHeaderFieldSavedSearch: 'customsearch_ns_pos_quote_header_field_2'
},
```

After you modify the saved search, a sales associate can click Quotes in SCIS to open the popup window and enter information in the fields you've defined.

## Discounts, Markups, and Promotions for SCIS

Use the topics in this section to work with the various types of pricing discounts and overrides available in SuiteCommerce InStore (SCIS). Administrators must set up discounts and promotions in NetSuite before those price adjustments can be applied to a transaction. SCIS options for promotions include the capabilities found in SuitePromotions. Sales associates can use markups or price overrides to replace a designated price while processing a transaction. These overrides don't require configuration by the administrator.

- [Configuring Discounts](#)
- [Price Override for SCIS](#)
- [Promotions and Coupon Codes for SCIS](#)

### Configuring Discounts

In NetSuite, discounts are a type of item record. You must configure discount items in NetSuite, and then make the discount available for SCIS by selecting it on the SCIS Settings record. Sales associates can then apply discounts to the orders they create in SuiteCommerce InStore (SCIS).



**Important:** SCIS assigns a **discount Item record** to the **SCIS Custom Discount** to calculate rates and perform other tasks. Never use that discount Item for other discounts or for NetSuite promotions or promotion codes. Doing so can lead to errors.

#### To create a discount for SuiteCommerce InStore:

1. Go to Lists > Accounting > Items > New.
2. Click **Discount** in the list of item types.
3. Enter information in the following fields:
  - **Item Name/Number** – Enter a name for the discount. This information is displayed in SCIS.
  - **Description** – (Optional) Enter a description for the discount. This information isn't displayed in SCIS.

- **Rate** – Enter a dollar amount or percentage for the discount rate. This information is displayed in SCIS.
  - **Subsidiary** – (Required if you use OneWorld) Select a subsidiary from the list.
4. Click **Save**.
  5. Go to Customization > Lists, Records, & Fields.
  6. Scroll to **SCIS Settings**, and then click **List** in that row.
  7. Click **Edit** next to an existing SCIS Settings record to make changes.
  8. Click the **General** subtab.
  9. In the **SCIS Location Discounts** list, select the discounts you want to make available to SCIS.

 **Note:** If you use multiple SCIS websites, note that discounts defined on the SCIS settings record are applied depending on the combination of location, subsidiary, and website defined on the filters subtab. For particular discounts to be available to a particular employee, the location and subsidiary defined on the employee record must match those settings on the SCIS Settings record.

10. Click **Save**.

To apply a discount in SCIS, the sales associate clicks the order subtotal to view a list of the discounts available. They can select one of the discounts in the list, or add a custom discount. If they select a custom discount, then they enter the discount amount and also need to submit a discount reason.

## Discount Reasons

**Discount Reasons** is a custom transaction body field that displays when a custom discount is applied to a sale. The sales associate needs to enter a value in this field. The value is output on the resulting transaction record. This custom field doesn't require any configuration.

**SCIS Discount Reasons (List)** is a custom record type that you can modify. SCIS installs two default values: **Regular Customer** and **Other**. You can modify this list to define reasons for applying sales discounts that make sense for your organization.

### To modify the list of discount reasons:

1. Go to Commerce > InStore > Discount Reasons.
2. Edit existing values or enter additional values into the list.
3. Click the **Filters** subtab, and then select the **Location**, **Website**, and **Subsidiary** where you want these settings to apply. You can select more than one value in each box.

 **Note:** By default, the filters are set to apply to all locations, websites, and subsidiaries.

4. Click **Save**.

## Price Override for SCIS

In SuiteCommerce InStore (SCIS), store managers and sales associates can override an order subtotal. The price override capability lets you increase the amount of the order. Administrators don't need to do any additional configuration to support the price override capability.

To apply a price override or markup in SCIS, the sales associate clicks the amount in the line item in the cart or the order subtotal. They can then use the custom discount dialog to increase the amount. For more information, see the help topic [Applying a Markup or Price Override](#).

## Promotions and Coupon Codes for SCIS

SuiteCommerce InStore (SCIS) supports the use of promotions or coupon codes. For example, a customer might bring a flyer to your store for 10% off their purchase. The sales associate enters the coupon code from the flyer, and the promotion is applied to the order subtotal.

With SCIS, you can use the following solutions for creating promotions:

- SuitePromotions
- Standard Promotions
- Advanced Promotions



**Important:** To learn about limitations in SCIS support for Advanced Promotions, see the help topic [Migrating to SuitePromotions](#).

In each case, an administrator must complete the following tasks before promotion codes can be used in SCIS:

1. Configure promotion records in NetSuite.
2. Use the SCIS Settings record to define the discounts associated with the promotions you want to offer

For more information about the different options available for configuring promotions, see the help topic [Promotions Overview](#).

To enable SuitePromotions capabilities, go to Setup > Enable Features. Click the **Transactions** subtab, and then check the boxes next to **SuitePromotions** and **Auto-Apply Promotions**.

## Coupon Codes and SCIS

Because the administrator enables features and configures records for SCIS, different types of promotions and coupon code eligibility may not be obvious to sales associates. Sales associates only add items to the order and enter coupon codes. The administrator is responsible for configuring promotion records with stackable and auto-apply capabilities, then training sales associates as needed.



**Important:** A promotion can be used together with a discount on a line item, only if the **Prices Include Tax** preference is **disabled** on the item record. This preference is only available in NetSuite accounts (except US and Canada) that don't use the Advanced Taxes feature.

To learn more about configuring all types of promotions, see the help topic [Creating Promotions](#).

## Auto-Apply Free Gift Promotions

In SCIS, the free gift item is added to the cart based on how the Free Gift promotion is defined in NetSuite. To use free gift promotion capabilities in SCIS, an administrator must set up the promotion correctly. For setup information, see the help topic [Creating Free Gift Promotions](#).

For example, you set up an auto-apply store promotion where customers receive a free t-shirt along with the purchase of a particular item. In SCIS, the sales associate places the item associated with the free gift promotion in the cart. When they select a payment option, a popup dialog is displayed enabling them to add the free t-shirt to the order. If the item associated with the free gift promotion is removed from the order, SCIS prompts the sales associate to remove the t-shirt.

 **Note:** Matrix items aren't supported as free gifts. Promotions for more than one free item aren't supported either.

To learn how sales associates apply different types of promotions to orders in SCIS, see the help topic [Applying Promotion Codes to Transactions in SCIS](#).

## Returns and Refunds

Sales associates can use SuiteCommerce InStore (SCIS) to process returns and issue refunds to customers. When SCIS processes a return, NetSuite generates a **customer return** transaction and a **credit memo**. These transaction records are created in addition to the original sales transaction created when the item was purchased.

Administrators can track activity by viewing transaction records, customer records, or sales reports in NetSuite. Returns and credit memos are associated with customer records. Sales associates and store managers can view transaction and customer activity in SCIS.

### Returns

- [Return Types](#)
- [Validated Returns](#)
  - [SCIS and NetSuite Processing for Validated Returns](#)
  - [Promotions and Manual Verification of Return Quantities](#)
- [Unvalidated Returns](#)
- [Working with Return Reasons](#)

### Refunds

- [Refunding a Return](#)
- [Split Tender Refunds](#)
- [Refund by Credit Memo](#)
- [Refund by Exchange](#)
- [Supported Refund Use Cases](#)

### Return Types

Using SCIS, sales associates can process two types of returns:

- **Validated Returns**



## ■ Unvalidated Returns

### Validated Returns

In a validated return, the sales associate can verify the details of a purchase by reviewing the original transaction. Validated returns can reduce fraud and mistakes because they enable the associate to confirm the purchase was made through the retailer. As long as SCIS has access to the original transaction, it can process validated returns for items purchased in the store, through a NetSuite commerce website, or through other connected sources. The customer's timeline will include purchases from those connected sources.

Associates can find the transaction in SCIS by:

- Scanning the customer's copy of the receipt.
- Entering the transaction ID from the receipt into the Search Bar.
- Searching for the customer and reviewing their Customer Profile timeline.
- Reviewing the Transaction History list.

 **Note:** To return a serial or lot numbered item, associates must use the validated return process.

### SCIS and NetSuite Processing for Validated Returns

SCIS works with NetSuite record processing to verify details and generate a credit memo for the refund. The processing maintains the integrity of the original transaction record while documenting the changes produced from the return. The internal steps are:

1. Locate the original transaction record.
2. Generate the credit memo.
3. Save the items and item quantities returned.

The last step is an SCIS process to control the items and quantities eligible for return. It's used to maintain the integrity of the transaction record.

### Promotions and Manual Verification of Return Quantities

Promotions that were in effect when the original transaction occurred can impact the SCIS item-quantity verification process. This automatic process reviews the original transaction and any previous returns made against the original to control the quantities shown as eligible for return.

 **Important:** If the original transaction included a **promotion**, SCIS can't verify the **item quantity** originally purchased or previously returned.

#### If Original Transaction Included a Promotion

If the original transaction included one or more promotions that were in effect on the transaction date, and the promotion has ended, SCIS can't control the quantity of items eligible for return.


This limitation is part of an SCIS return process that protects the integrity of the original transaction record in NetSuite. The process used to protect the original isn't compatible with certain NetSuite processes.

Because SCIS can't control the return quantity if a promotion was in effect, a customer could return more of an item than was originally purchased. For example, if a customer bought three hats on promotion, but now wants to return them, SCIS won't automatically limit the return to only three hats. The sales associate must verify the eligible quantities before proceeding with the return.

### Promotion Alerts

To reduce the chance of a sales associate accepting an incorrect return quantity, SCIS reviews the transaction at the start of a return to see if it included a promotion. If SCIS finds that a promotion was in effect, an alert displays on the **Returns** page.

The alert instructs the associate to verify that quantities returned are less than or equal to the original transaction and any previous returns.

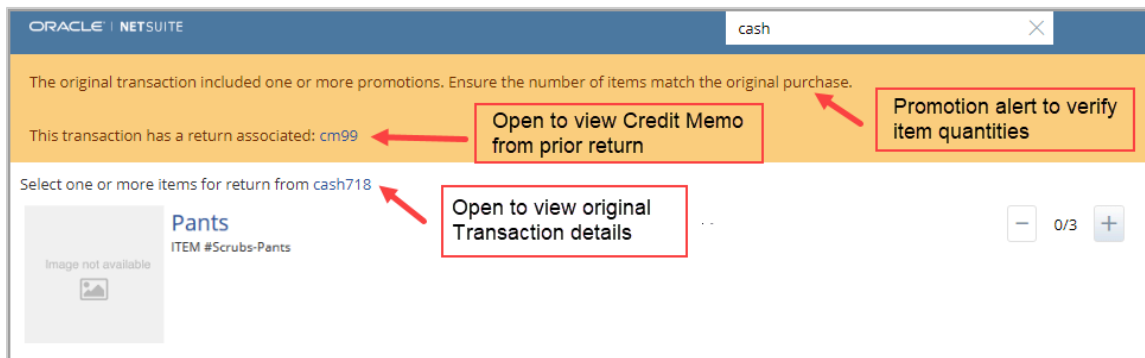

If there are previous returns against the original, these are shown as **Credit Memo** links that the associate can click to see the details.

### If Original Transaction Didn't Include a Promotion

If the original transaction didn't include a promotion, SCIS will automatically control the quantities eligible for return. The sales associate doesn't need to verify the quantity details.

## Unvalidated Returns

This return type doesn't require the sales associate to find the original transaction. Instead, the associate scans the returned item to determine the refund amount. This method can be quicker than a validated return, but it's more prone to fraud.

Your store might have procedures you must follow when making unvalidated returns.

## Working with Return Reasons

Sales associates can select a return reason before submitting an item return transaction. Return Reasons is a custom list installed by SCIS. The custom list includes values you can modify, or you can add more.

**Note:** If a return reason isn't selected, the text **Return Reason** appears on the transaction in NetSuite.

### To modify or add return reasons:

1. Go to Commerce > InStore > Return Reasons.

2. Add to or modify the return reason list:
  - Click **New SCIS Return Reasons (List)** to add a new value to the list.
  - Click **Edit** next to an existing value to change the name or modify filter settings.
3. Click the **Filters** subtab, and then select the Location, Website, and Subsidiary where you want these settings to apply. You can select more than one value in each box.

 **Note:** By default, the filters are set to apply to all locations, websites, and subsidiaries.

4. Click **Save**.

## Refunding a Return

A refund occurs as part of the return process. Sales associates can use any payment method available in SCIS for returns, including a split tender refund, using more than one payment method on the same return transaction. The refund amount is displayed in NetSuite on the **Customer Refund** transaction page.

If the sales associate chooses to refund cash, the refund is provided from the cash drawer. If the original payment was made with only one credit card, and the payment provider supports referenced refunds, the sales associate doesn't need to use the payment device to process the return.

A **Credit Memo** is always created to capture information from return transactions. If the customer wants a refund in cash or by credit card, the credit memo is closed out at the time of the refund.

 **Note:** By default, refunds and exchanges can only occur if the accounting period in which the transaction took place has a **Status** of **Open**. To allow refunds and exchanges for a **Closed** period, see [Permit Refunds or Exchanges for Transactions in Closed Accounting Periods](#).

## Split Tender Refunds

Sales associates can provide a refund using more than one payment type, such as cash and credit card.

For example, a customer returns a set of items totaling \$100. The sales associate wants to refund \$25 in cash and \$75 to a credit card. In SCIS, the sales associate clicks **Refund Cash** to enter the cash amount, and then clicks **Refund Credit Card** to enter the remaining amount. The refund transaction isn't complete until the total amount is entered.

After the refund is submitted in SCIS, a credit memo is created in NetSuite to capture the data from the return. The credit memo is linked to the original sales transaction in the **SCIS Returns Credit Memo** field on the Related Records Subtab.

## Refund by Credit Memo

When choosing how to refund a customer, the sales associate can apply the refund to a credit memo. This type of refund is an alternative to providing refunds in cash or to a credit card. The customer can use the credit memo later to pay for a future transaction. NetSuite saves the refund as a credit memo on the customer record. The customer's return receipt includes a credit memo identifier for the refund amount.

To redeem a credit memo for a transaction, the sales associate chooses **Other Payment** and then **Credit Memo**. The associate can scan the receipt or select manual entry to choose from a list. If they select manual, SCIS displays the credit memos available to the customer.

Payment - Credit Memo

Amount Due  
\$33.70

Please scan the Credit Memo to continue.

NEXT

CANCEL

| #     | Number | Date       | Amount |
|-------|--------|------------|--------|
| 19737 | 26     | 10/28/2019 | 33.70  |

**Note:** A credit memo can't be used as payment unless it's associated with a **customer record**. If a credit memo is required for refund of a purchase made using the Default Customer record, the sales associate must create a new customer record. For more information, see [Default Customer](#).

## Credit Memos Not Valid for Sales Orders

Sales associates can't accept a credit memo as payment for any transaction that generates a **sales order**. NetSuite creates sales orders for SCIS transactions that have items for shipping or pick up in-store. SCIS displays an alert if a sales associate tries to use a credit memo as payment for a sales order. The transaction can't proceed until the associate selects a different payment method.

## Refund by Exchange

Rather than receive a cash/credit card refund or a credit memo, a customer can request an item exchange. When processing an exchange, NetSuite creates an **invoice** for the new order and uses the return **credit memo** to adjust the balance due.

To perform an exchange, the sales associate adds the exchange item to the cart during the return. The exchange item can be the same as the return item. The balance due or refund due to complete the exchange depends on the following factors:

- If the total of the exchange **is more** than the total of the return, then a balance is due.
- If the total of the exchange **is equal** to the total of the return, then no balance or refund is due.
- If the total of the exchange **is less** than the total of the return, then a refund is due.

If no balance or refund is due, the associate can tap **End Transaction** to finish the exchange.

**Important:** Sales associates can't perform exchanges that include an item for **shipping** or **pickup**.  
For example, a customer can't exchange an item they've already purchased for an item that will be shipped or picked up in-store. Instead, the associate must first complete a return transaction and then enter a sales transaction for the shipping or pickup item.

## Supported Refund Use Cases

The following table shows customer refund scenarios based on payments received using a PIN pad device. Note that the **Payment Network Reference ID (PNREF)** is a unique identifier assigned to a transaction payment.

Sales associates can only process a referenced refund when the original sales transaction has **one** credit/debit card payment method. After the payment is approved, the payment provider sets a PNREF to it. When the refund takes place, SCIS uses the PNREF to send the refund directly to the credit/debit account. In this case, the sales associate doesn't need to use the payment device to complete the refund.

**Note:** If the original payment was submitted with more than one credit/debit card, then to process the refund, the sales associate must use the payment device to swipe or enter each card associated with the original payment and select the amounts to be refunded.

| Payment Received from Customer in SCIS with payment device | Sales Transaction Automatically Created in NetSuite | Number of Items Purchased | Number of Items Returned | Split Refund (With PNREF) | Split Refund (Without PNREF) |
|------------------------------------------------------------|-----------------------------------------------------|---------------------------|--------------------------|---------------------------|------------------------------|
| One credit/debit card                                      | Cash Sale                                           | 1                         | 1                        | OK                        | OK                           |
| One credit/debit card                                      | Invoice                                             | 1                         | 1                        | OK                        | OK                           |
| One credit/debit card                                      | Cash Sale                                           | 2                         | 1                        | OK                        | OK                           |
| One credit/debit card                                      | Invoice                                             | 2                         | 1                        | OK                        | OK                           |
| Multiple credit/debit cards (Split Payment)                | Invoice                                             | 1                         | 1                        | Not Supported             | OK                           |
| Multiple credit/debit cards (Split Payment)                | Invoice                                             | 2                         | 1                        | Not Supported             | OK                           |

## Gift Certificates in SuiteCommerce InStore

To sell a gift card or gift certificate in SuiteCommerce InStore (SCIS), an administrator must configure a gift certificate item record in NetSuite. A check box on this item record defines the gift certificate as a physical gift card or a digital gift certificate. The digital gift certificate is redeemable with only the authorization code. The gift certificate can be configured so that the sales associate sets the amount at the time of sale. For more information, see [Configuring Gift Certificates for SCIS](#).

An administrator can also modify the CustomConfiguration.js file to set the default values displayed in fields on gift certificates. Changing the default values in these fields is optional. For more information, see [Setting Gift Certificate Attributes For SCIS](#).

## Selling Gift Certificates

After Gift Certificates are configured in NetSuite, they're treated as items in SCIS. After the gift certificate is added to the cart, the sales associate can click the line item to change the information, if needed. When a **gift card** is added to the cart, SCIS prompts the sales associate to swipe the card and enter the price (if the gift card is configured with a variable amount). For more information useful for sales associates, see the help topic [Working with Gift Cards in SCIS](#).

Selling a **digital gift certificate** is similar, except there's no card to swipe. Also, the sales associate is prompted to enter information for the notification email message sent to the recipient. The sales associate enters the names of the gift certificate giver and recipient, the recipient's email address, the

authorization code, and a message. When the order is complete, the authorization code is sent to the gift recipient in an email message and printed on the receipt.

## Applying a Gift Certificate as Payment

After adding items to an order, the sales associate clicks the Other Payment button in SCIS, and selects Gift Certificate. Next, the sales associate swipes the gift card, or enters the authorization code for a digital gift certificate. After the authorization code is entered, the transaction summary window shows the gift certificate amount applied to the order and the remaining amount due. For more information useful for sales associates, see the help topic [Paying With a Gift Card](#).

## Configuring Gift Certificates for SCIS

To offer Gift Certificates in SuiteCommerce InStore (SCIS), you must first set them up in NetSuite. Ensure the gift certificate feature is enabled, and accounting preferences are set correctly. This section includes instructions on how to set up gift certificates for sale in SCIS.

### To set up gift certificates for SCIS:

1. Ensure the Gift Certificates feature is enabled at Setup > Company > Enable Features. Click the **Items & Inventory** subtab.
2. Set accounting preferences:
  - a. Go to Setup > Accounting > Preferences > Accounting Preferences.
  - b. Click the **Items/Transactions** subtab.
  - c. In the Other Item Preferences section, set the following:
    - In the **Matrix Item Name/Number Separator** field, enter -.
3. Go to Lists > Accounting > Items > New. Click **Gift Certificates**.
4. In the **Item Name/Number** field, enter a name for your gift certificate. This field displays internally in NetSuite on lists. If you want to display a different name for the gift certificate on the SCIS website, enter it in the **Display Name/Code** field.
5. If you use OneWorld, select the **Subsidiary**. Optionally, you can select a **Location**.
6. On the **Accounting** subtab, select the following:
  - **Income account**
  - **Liability account**
  - **Tax Schedule**
7. On the **Custom** subtab, check the **SCIS Gift Card** box if you want this to be a gift card. Leave the box clear if you want to use a digital gift certificate. The digital gift certificate sends an email message to the gift recipient at the time of sale. If you use a gift card, you must also modify the CustomConfiguration.js file.

For more information, see [Setting Gift Certificate Attributes For SCIS](#).

8. On the **Web Store** subtab, set the following:
  - a. Check the **Display in Web Store** box to display the gift certificate in SCIS.

- b. (Optional) Check the **Variable Amount** box, if you want to let the sales associate set the gift certificate amount.
  - c. (Optional) Enter a maximum amount for the gift certificate in the **Maximum Variable Amount** field.
  - d. Click **Web Site List**, and then select the SCIS website in the **Site** column. Under **Site Category**, select **Home**.
9. (Optional) If you want to define a set price for the gift certificate, instead of a variable price, click the **Sales/Pricing** tab, and then enter the amount.
  10. Click **Save**.
  11. Upload images for the gift certificate. The process is the same as uploading images for other types of items. For more information, see [Configuring Item Images for SCIS](#).
  12. Create a QuickAdd key for the Gift Certificate. For more information, see [Configuring QuickAdd Keys](#).

## Setting Gift Certificate Attributes For SCIS

When you use gift cards in SuiteCommerce InStore (SCIS), you must modify the CustomConfiguration.js file to include settings for swiping gift cards. You can configure default gift certificate attributes for SCIS. These attributes are displayed in entry fields when sales associates create new gift certificates. The default values you set are displayed as prompts in SCIS. When selling a gift certificate, the sales associate overwrites the default values.

**Note:** CustomConfiguration.js includes settings for card separator and gift card fields. It's best to accept the defaults. Changing these settings in the configuration file can affect gift certificate capabilities.

## Gift Card Separator, Scanning, and Fields

To use physical gift cards in SCIS, you must modify gift card settings in the CustomConfiguration.js file. Find the following code snippet, and then make modifications as described in the code sample given here:

```

1 // RegularExpression used to decide if a character is a Card separator
2 // Used to distinguish Gift Card and Employee Access Cards fields
3 //
4 // separator: '[\|/]',
5 // separator: '[-]',
6
7
8 // Characters ignored during the scan
9 //
10 // ignore: ['%', '?'],
11
12 // Gift card Fields in order of appereance.
13 //
14 // fields: ['upccode', 'quantity', 'giftcertauthcode'],
15 },

```

## Modifying Display of Authentication Code

You can hide the authorization code field on the gift certificate entry form at the point-of-sale. Add the following line to the CustomConfiguration.js file:

```

1 | hideAuthorizationCode: true

```

2 | },

To display the authorization code field, change the setting from true to false.

## Modifying Gift Card Entry Field Attributes

Define the following parameters in the giftCertificate entry:

- **defaultFromName:** defines the default name of the purchaser of the gift certificate. By default, this name is automatically read from the application environment.
- **defaultToName:** specifies the default recipient of the gift certificate.
- **fallbackEmail:** defines a generic email address associated with the gift certificate.
- **defaultMessage:** specifies a default message that appears on the gift certificate receipt.

The following code sample shows the syntax for the giftCertificate entry:

```

1 // Gift card selling configuration
2 giftCertificate: {
3   // The name that appears on the gift certificate in the 'From' field by default
4   //
5   // defaultFromName: 'Your store'
6
7   // The name that appears on the gift certificate in the 'To' field by default
8   //
9   // defaultToName: 'Customer',
10
11   // The email that appears on the 'Email' field by if the order customer has
12   // no email set and the user didn't specify a email on the gift certificate
13   //
14   // fallbackEmail: 'mail@example.com',
15
16   // The message that appears on the gift certificate in the 'Message' field by default
17   //
18   //
19   // defaultMessage: 'You received a Gift Card from this store',
20 },

```

## SCIS Gift Certificates FAQ

The following questions are frequently asked about configuring gift certificates for SuiteCommerce InStore (SCIS).

### What format should I use when ordering a batch of gift certificates?

When ordering a batch of gift cards from a third-party printer, use barcode Code 128. Use the format, UPC//authcode, for example 12345//00001. Ensure the UPC Code field is populated on the gift certificate record in NetSuite.



### How many numbers can I use in a gift certificate?

System-generated gift certificates use 9 alphanumeric characters. If you enter the number manually at the point-of-sale or set it up in the backend, the maximum length is 9 alphanumeric characters.

### Does SCIS only support system-generated authorization codes?

Preferred setup steps include selecting the **System Generated** option in the **Gift Certificate Auth Code Generation** field in **Accounting Preferences**.

However, you can choose to show or hide the authorization code on the gift certificate entry form in SCIS. Also, during the sale of a gift certificate, if you choose not to show the Authorization Code field on the gift certificate, or show it and leave it empty, then the code is automatically generated. Alternately, the sales associate can enter a 9 character alphanumeric code at the point-of-sale.

### How do I scan a physical gift card?

If you're scanning the gift card to pay for items purchased, you can swipe the gift card to get the authorization code or enter it manually.

If the customer is purchasing a gift card, you must scan the barcode. SCIS performs a search to identify the gift card as an item. Then a dialog is displayed where the sales associate must enter the required information, and then add it to the cart.

### Can an order that includes a physical Gift Card be shipped?

No, you can't ship a gift card. You can only ship line items that aren't gift certificates. You can ship line by line, excluding the gift certificate.

## SCIS No Sale

Typically, the cash drawer opens automatically based on the payment method used on an order. However, sales associates can use the **No Sale** option in the SCIS User Menu to open the cash drawer without a sales transaction. After selecting No Sale in the User menu, the sales associate must choose a reason for opening the cash drawer.

Administrators must enable permissions for roles that are authorized to use the No Sale option, and for roles that require manager override. They must also define reasons for opening the cash drawer. Configure SCIS Open Drawer Reason custom records for this purpose.

### To enable permission to use No Sale:

1. Go to Commerce > InStore > Permissions.
2. Click **Edit** next to **OPEN\_CASH\_DRAWER**.
3. In the **Authorized Roles** list, select the roles that are authorized to use No Sale.
4. In the **Require Authorization Roles** list, select the roles that require manager override.
5. Click **Save**.

Employees with authorized roles enter their SCIS Access Codes to enable employees that require authorization to open the cash drawer.

### To configure SCIS Open Drawer Reason custom records:

1. Go to Commerce > InStore > Open Drawer Reasons.
2. Click **New SCIS Open Drawer Reason**.
  - a. Enter a **Name** for the reason. This name is what displays to the sales associate using SCIS.
  - b. Choose the SCIS **Location**, **Website**, and **Subsidiary** where this open drawer reason should apply. You can also apply it globally, by checking the **Apply to All** boxes.

The reasons you define appear in a list that displays when the sales associate selects the No Sale option in the SCIS User Menu. The cash drawer won't open until the sales associate selects a reason.

## Voiding a Line and Deleting a Transaction

In SuiteCommerce InStore (SCIS), a sales associate can void an item to remove it from a transaction, or delete the transaction entirely. When an item is voided from a sales transaction, it's replaced with the void item configured during installation. Administrators can view or modify transactions in NetSuite.

### Voiding a Line in a Transaction

To remove an item from a sales transaction, the sales associate must void the item by clicking X on the transaction line in SCIS. This action removes the item from the transaction and replaces it with a **void item** (ns\_pos\_voiditem). The void item isn't visible to the sales associate using SCIS, but appears on the transaction record in NetSuite.

You must configure the void item during installation of SuiteCommerce InStore.

Note that performing a void on a transaction requires additional permission. Be sure to select authorized roles on the SCIS Permission custom record. For more information, see [SuiteCommerce InStore Permissions](#).

### Void Item and Multiple Subsidiaries

When you have more than one subsidiary, you must update the void item created during installation to support all subsidiaries associated with your SuiteCommerce InStore site. To update the void item, you must modify the Item record in NetSuite.

#### To apply the void item to multiple subsidiaries:

1. Go to Lists > Accounting > Items.
2. Find **ns\_pos\_voiditem** in the list.
3. Click **Edit** to modify this record.
4. In the **Subsidiary** list, select all the subsidiaries associated with your SuiteCommerce InStore implementation.
5. Click **Save**.

### Deleting a Transaction

To delete a transaction, the sales associate clicks the **Delete** waste can icon in SCIS. When a transaction is deleted, there's no record of it in NetSuite.

## Accounting Results of Void and End vs. Delete

Ending a transaction after voiding a line produces different results for your accounting records than does choosing to delete a transaction.

- Tapping **Void** for a line item and then tapping **End Transaction** generates a Cash Sale record with a total value of zero (\$0.00). SCIS creates a receipt of the transaction.
- Tapping **Delete** for an open transaction ends the transaction without creating a Cash Sale record or a receipt.

## Defining SCIS Transaction Notes

Administrators can use the SCIS Transaction Note Types custom record to define notes for different types of information needed on a transaction. This custom record is installed with SuiteCommerce InStore (SCIS).

After an administrator has defined transaction notes, sales associates can add them as they build orders. For example, a transaction note can be used to indicate that the customer was referred by a friend. The sales associate can add the note to a line item on an order or to the entire transaction in SCIS. After the order is submitted, the note displays on the transaction form in NetSuite.

The following screenshot shows the user interface for adding a note. After the sales associate chooses a note type on the left, they can enter details on the right. The names of the SCIS Transaction Note Types displayed here are: Prefers Pickup, Custom Note, and Friend Referral.


### To define SCIS Transaction Note Types:

1. Go to Commerce > InStore > Transaction Notes.
2. Click **New SCIS Transaction Note Types**.
3. Enter a **Name** for the transaction note type. This name is displayed in SCIS. The sales associate can select a note type, and then enter additional information. The Custom Note is installed by default.
4. On the **Filters** subtab, you can select particular **Locations**, **Websites**, and **Subsidiaries**, or make the note available to all of them.

**Note:** Settings on the **Notes** subtab and **Files** subtab don't affect SCIS.

5. Click **Save**.

In SCIS, sales associates can apply one note to a line item on an order, or apply multiple notes to a transaction. Be aware of the following capabilities depending on where the note is added.

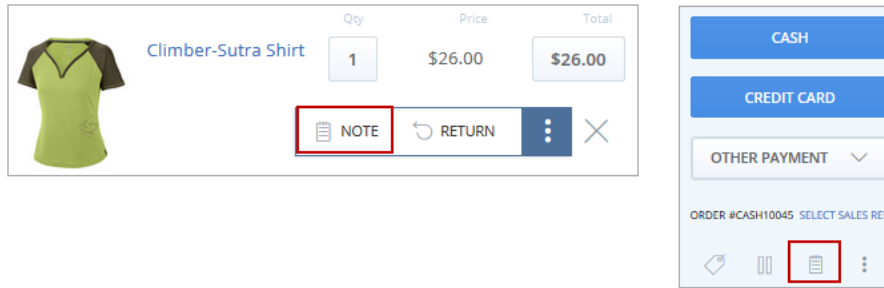

## Adding a Note to a Line Item

- Only one note can be added to a line item.
- After the transaction is submitted, each note is stored on the line item on the transaction form in NetSuite.
- Line-item notes are best for comments about a particular item.

## Adding a Note to a Transaction

- Multiple notes can be added to a transaction.
- After the transaction is submitted, the notes are attached to the transaction form in NetSuite, on the **Communication** subtab under **User Notes**.
- Transaction-level notes are best for notes about the whole transaction.

## Calculating Taxes on Transactions

SuiteCommerce InStore (SCIS) calculates tax based on the tax settings you configure in NetSuite. For sales tax to be calculated correctly, you must enable the Advanced Taxes feature in NetSuite, set the tax preferences required for SCIS, and create tax schedules. Set up tax preferences according to SuiteCommerce InStore Installation guidelines. For more information, see [Required Features and Settings for SCIS](#).

Tax Schedules, created in NetSuite, determine how taxes are calculated for items in each nexus. Tax schedules are useful in countries such as the U.S. and Canada where some goods and services aren't taxable in certain states and provinces. For more information about setting up Tax Schedules, see the help topic [Creating Tax Schedules](#).

**Note:** The Advanced Taxes feature is required for SuiteCommerce InStore. Tax schedules are required in accounts that use Advanced Taxes. For more information, see the help topic [Advanced Taxes](#).

You create nexuses to establish different tax jurisdictions. For general information about setting up tax nexuses, see the help topic [Nexuses and Subsidiaries](#).

## Tax Codes and Tax Groups

In NetSuite, there are important distinctions between tax codes and tax groups. You can create a tax group to combine several tax codes that can be applied to one transaction, even if the taxes are paid to different jurisdictions. The tax group rate is the sum of these separate tax codes.

For example, if you have two retail locations in Illinois, you may have the following tax groups configured in NetSuite:

- **Tax Group IL\_ASES** – The tax rate is 7%, which is the sum of the two tax codes included in the group.
  - Includes two tax codes: IL\_IL state tax of 6.25%, and IL\_ASES at 0.75%.
  - Applicable to certain postal codes, such as 60002.
- **Tax Group IL\_ALGONQUIN\_ARXL** – The tax rate is 7.75%, which is the sum of three tax codes included in the group.
  - Includes three tax codes: IL\_IL at a rate of 6.25% (State), IL\_ALGONQUIN at 0.75% (City), and IL\_ARXL at 0.75% (Transit).
  - Applies only to postal code 60102.

The setting in NetSuite, **Enable Tax Lookup on Sales Transactions**, determines the appropriate tax group or tax code for a customer based on the postal code in the customer's shipping address.

## Sales Tax for Customers

Based on the preceding example, if a product is sold to the "Default Customer" with the postal code 60102 (ALGONQUIN), NetSuite sets the tax rate to 7.75%. Alternatively, if there's no tax group, tax calculation for the order depends on the tax item set on the Default Customer record. To charge tax on the order, note that the customer record must be marked as taxable, and a tax nexus must be configured. Both of these are tax preference settings included in the installation guidelines.

The default customer record is marked as taxable by default. Also, note that part of configuration is setting the default tax item for new customers.

## Cash and Carry

When selecting a customer on an SCIS transaction, the sales tax is calculated based on the tax code or tax item set on the customer record. If there's no tax code or tax item on the customer record, then the tax is calculated based on the SCIS location address. Note that **Customers Default to Taxable** is a tax preference setting included in the installation guidelines.

## Delivery Orders

For products ordered through SCIS (the product is shipped to the customer), tax is calculated based on the tax code or tax item set on the customer record. An administrator configures tax settings for new customers as part of installation.

## Saved Searches, Reports, and Audit Logs

SuiteCommerce InStore (SCIS) includes a set of saved searches you can use as reports. The saved searches installed with the SuiteApp are locked. To modify any SCIS saved search you must first make a copy, and then create a customized report for your organization. See the following sections to learn more about SCIS reporting capabilities:

- [Modifying Included Saved Searches](#)
- [Custom SCIS Sales Reports](#)
- [Publishing Saved Searches to SCIS Users](#)

## ■ [SCIS Audit Log](#)

# Modifying Included Saved Searches

The SuiteCommerce InStore SuiteApp installs a set of saved searches in your NetSuite account. Many of these saved searches are used for displaying certain fields and data from your NetSuite account in SuiteCommerce InStore (SCIS).

For example, the **SCIS Individual Customer Form Fields** saved search exposes fields to the customer entry form used in SCIS. Also, the **SCIS Locations** saved search displays location information from your NetSuite account on the Nearby Locations subtab of the Product Detail Page in SCIS.



**Important:** If you choose to modify the **SCIS Inventory Locations** saved search, ensure that the **Make Inventory Available** field is included on the Results tab of your custom saved search. If this field isn't included, the inventory count on the Product Detail Page shows 0.

For a list of saved searches installed by SCIS, see [SCIS Custom Fields, Lists, Records, and Searches](#).

For instructions on how to modify specific saved searches, see [Customize Location Display](#), and [Custom SCIS Sales Reports](#).

Use the following steps to modify any type of saved search. The default searches installed with SCIS are locked. To modify any of the saved searches you must first make a copy, and then make changes to your copy.

## To make a copy of an SCIS saved search:

1. Go to Reports > All Saved Searches.
2. Click **Edit** next to the saved search you want to copy.
3. Change the name in the **Search Title** field.
4. (Optional) Check the **Public** box so others can view the report in NetSuite. Set other check boxes on the form as needed.



**Note:** To make the saved search available to sales associates on the User Menu in SCIS, you **must** check the Public box.

5. Change the values on saved search subtabs as needed. The most common modifications are adding and removing values on the **Criteria** subtab, and changes to the **Results** subtab.
6. Click **Save As**.

After you click Save As, a new ID is generated for the modified saved search. The name of your modified saved search and the ID are displayed on the list of saved searches.

# Custom SCIS Sales Reports

In NetSuite, you can view sales reports by using the saved searches included in SuiteCommerce InStore (SCIS). The following sales reports are installed by default:

- SCIS Daily Sales
- SCIS Sales by Department
- SCIS Daily Tenders

To modify the data displayed in NetSuite, you must first make a copy of an SCIS saved search. Then, create your own custom search to meet your business needs. For example, you may want to create a saved search that shows SCIS sales for each month. To do this, copy one of the saved transaction searches installed by SCIS. Next, set the date filter, and then save a report for each month.

### To create a sales report for each month:

1. Follow the instructions for [Modifying Included Saved Searches](#).
2. On the criteria subtab, select **Date Created**, and then select the first and last day of the month.
3. Click **Save As**.

## Publishing Saved Searches to SCIS Users

As an administrator, you can share information with employees about day to day business operations by defining a saved search for display in the SCIS User Menu. For example, you might share a list of customers who visited the store this week, or inventory that's out of stock. Sales associates can click a Saved Search link in the User Menu to view report data organized in a way that makes sense for your organization.

To define a saved search that displays on sales associates' User Menu, create a saved search, and then select the saved search on the SCIS Settings record. The SCIS Settings record defines which sales associates can access the saved search.

 **Note:** The number of results returned from a saved search can impact performance. Saved searches that return more than 1,000 rows may not display properly.

### To publish a saved search to the User Menu in SCIS:

1. Create a saved search.
  - a. Go to Reports > All Saved Searches.
  - b. You can copy and then modify an existing SCIS saved search, or create a new one. The most common modifications are adding and removing values on the **Criteria** subtab, and changing values on the **Results** subtab.

 **Note:** The saved searches installed with SCIS are locked. To modify any of the saved searches you must first make a copy, and then make changes to your copy.

- c. Be sure to check the **Public** box so others can view the report in NetSuite. Set other check boxes on the form as needed.
  - d. Change the values on saved search subtabs as needed.
  - e. Click **Save As**.
2. Go to Customization > Lists, Records, & Fields > Record Types.
  3. Find **SCIS Settings** in the list, and then click **List** in that row.
  4. Click **Edit** next to an **SCIS Settings** record.
  5. Select one or more saved searches in the **SCIS Saved Searches** list.
  6. Click **Save**.

The saved search will display in the User Menu depending on the settings for SCIS Location, Subsidiary, and Website that exist on the SCIS Settings record. Sales associates whose employee records match the same criteria as the SCIS Settings record are able to view the saved search.

## SCIS Audit Log

You can use the SuiteCommerce InStore (SCIS) Audit Log to track restricted operations performed during SCIS transactions. Restricted operations are events that require approval from authorized personnel. Audit logs are generated automatically after a restricted operation occurs.

The SCIS Audit Log shows the time and date when a restricted operation occurred. It includes the operation performed, the employee who initiated the operation, and the employee who authorized the operation. For example, it shows the clerk and the authorizing store manager.

Restricted operations include authorizing discounts greater than designated limits and performing unvalidated returns. The transaction topics in this guide include steps for where an authorization might be required.

Authorization to perform approvals is granted by assigning specific permissions to the authorizing employee's role. For more information, see [SCIS Roles and Permissions](#).

 **Note:** The option to view an audit log at the transaction-record level is limited to SuiteScript 2.0 setups.

### To view an SCIS Audit Log:

1. Go to Customization > Lists, Records, & Fields > Record Types.
2. Find the **SCIS Audit Log** row and click **List**.
3. Sort the list by clicking the header of the **Date Created** column.
  - **Owner** – Employee who started the restricted operation. This is the sales associate logged in to SuiteCommerce InStore.
  - **Date Created** – Date and time when the operation occurred.
  - **Operation** – Type of operation.
  - **Authorizer** – Employee who authorized the operation, such as the store manager.
  - **Transaction** – Transaction where the operation was performed. For example, if a sales associate applied a credit memo to an invoice, Invoice is the transaction that displays in this column. The transaction number is also included.
  - **Approved** – Yes or No, depending on whether the operation was successfully authorized.
  - **Detail** – Column is not in use.
  - .

 **Tip:** You can click the **Owner** and **Authorizer** fields to display their employee records.

4. Click **View** for an audit log to start reviewing the details.

Similar to the audit log list, the page provides the **Owner**, **Date created**, and other details, including:

- **Operation** - Action that required authorization.
- **Transaction** - Transaction number.
- **Approved** – A check mark means the operation was approved.

 **Note:** To ensure audit logs are accurate, you shouldn't **Edit** a log. Note that all changes to a record are logged in NetSuite, including audit log changes.

5. To view details about a transaction, click the **Transaction** link.





**Tip:** To view restricted operations from the transaction details, click the **Custom** subtab and then **SCIS Audit Log**.

## Audit Log Details In Transaction Records

You can also view an audit log while reviewing a transaction record, such as a sales order or return transaction.

Not every restricted operation is available at the transaction-record level. This table lists the transaction type and the restricted transaction operations that are logged:

| Transaction Type        | Restricted Operation Logged                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Sales Order             | Apply Credit Memo<br>Apply Gift Card<br>Global Discount (transaction total discount)<br>Line Discount (line-item discount) |
| Customer Deposit        | Apply Terms<br>Pay with any payment method                                                                                 |
| Customer Deposit/Refund | Refunds with any payment method                                                                                            |
| Credit Memo             | Unvalidated Return                                                                                                         |
| Return Authorization    | Validated Return                                                                                                           |

## Restricted Operations Not Available from Transaction Records

These operations are only available for viewing from **SCIS Audit Log** records:

- Configure Device
- Convert Quote to Order
- Create Quote
- Edit Device Location
- Remove Transaction
- Resume Order
- Store Manager Permission
- Suspend Order
- Update Quote
- Void Line

# SCIS Custom Fields, Lists, Records, and Searches

This section includes reference information about the custom fields, lists, records, and searches installed by the SuiteCommerce InStore SuiteApp. See this section to learn general information, such as which custom fields require configuration. You'll find links to detailed configuration steps included in the descriptions. To view or configure custom fields in NetSuite, go to Customization > Lists, Records, & Fields, and then make a selection from the list.

This section also includes general information about saved searches associated with SuiteCommerce InStore (SCIS). SCIS uses data from saved searches in the customer profile to display location information on the Product Detail Page and show sales report data in SCIS and NetSuite. Administrators can view and modify all saved searches in NetSuite.

For more information about custom fields, lists, records, and searches associated with SCIS, see the following topics:

- [Mobile Device Settings](#)
- [Cash Drawer Management](#)
- [Customer Profile](#)
- [Discounts and Returns](#)
- [Employee](#)
- [Location](#)
- [Item](#)
- [Transactions](#)
- [Opening and Closing Drawer](#)
- [QuickAdd Keys](#)
- [Payments](#)
- [Printer Settings](#)
- [Sales Reports](#)
- [SCIS Receipts](#)
- [Transactions](#)
- [Fallback Custom Records](#)

## Mobile Device Settings

The following custom records are used to configure the mobile device you use to run SCIS. You configure these custom records after installing the SCIS POS application. For more information, see [Installing the SCIS Mobile App](#).

### SCIS Mobile Device

- **ID:** customrecord\_ns\_pos\_mobile\_device
- **Description:** Use this record immediately after installing the SCIS POS application on a mobile device. This custom record stores the mobile device ID. It also stores the SCIS website and printer technology associated with the mobile device.

## SCIS Domain Safelist

- **ID:** customrecord\_ns\_domain\_whitelist
- **Description:** This custom record contains a list of domains that are allowed access to SCIS. These safelisted domains are global to your account, regardless of location or subsidiary. The following domains are available by default and can't be disabled. These domains are required for SCIS to function properly:
  - system.netsuite.com
  - system.na1.netsuite.com
  - system.na2.netsuite.com
  - sandbox.netsuite.com

 **Note:** After applying any configuration changes, including changes to the Domain Safelist or Certificates, the user must log out and log in again to refresh the updated settings to the device.

## SCIS Mobile Certificate

- **ID:** customrecord\_ns\_pos\_certificate
- **Description:** This custom record stores the list of authorizing certificates. When certificates go out of date, you must add updated certificates to the list. After applying any configuration changes, the user must log out and log in again to refresh the updated settings to the device.

## Cash Drawer Management

### SCIS Store Safe Account

- **ID:** custrecord\_ns\_pos\_location\_safeaccount
- **Description:** Account used for tracking the amount in the store safe. You must define a store safe account for each point-of-sale location. Set this field on the Location record.

### SCIS Cash Drawer Difference

- **ID:** custrecord\_ns\_pos\_location\_diffaccount
- **Description:** A custom field on location records. For each location that uses SCIS, you must select the account to use when there's a discrepancy between the amount in the cash drawer and the amount entered in SCIS for the Closing Drawer transaction.

## SCIS Register

- **ID:** customrecord\_ns\_pos\_registers
- **Description:** (Required for Advanced Cash Management) A custom record that must be configured for each cash drawer and printer combination used at the retail store.

## SCIS Shift

- **ID:** customrecord\_ns\_shifts
- **Description:** (Advanced Cash Management) A custom record that's created automatically each time a sales associate opens a shift in SCIS.

## Customer Profile

To configure fields that appear in the Customer Profile in SuiteCommerce InStore (SCIS), you must modify the custom searches installed by the SuiteCommerce InStore SuiteApp. The following saved searches generate fields for the customer entry form used in SCIS, and data for the Customer Profile. You can find these saved searches in NetSuite at Reports > Saved Searches > All Saved Searches. For more information about modifying any custom searches that impact the Customer Profile, see [Modifying Included Saved Searches](#).

For general information about the Customer Profile in SCIS, see the help topic [Working with Customer Profile Information](#).

## SCIS Customer Group (List)

- **ID:** customrecord\_ns\_pos\_customergroup
- **Description:** Defines the group to which default customer records belong. For more information, see [Default Customer](#).

## SCIS Customer Notes Types

- **ID:** customrecord\_ns\_pos\_customer\_notes\_types
- **Description:** Defines notes for different types of information associated with a customer. After an administrator has defined customer notes, sales associates can add them to the customer profile in SCIS. For more information, see [Defining SCIS Customer Notes](#).

## Customer Saved Searches

- [SCIS Individual Company Form](#)
- [SCIS Individual Customer Form](#)
- [SCIS Support Calls](#)
- [SCIS Shipping Status List](#)
- [SCIS Transactions Detail](#)
- [SCIS Transactions Totals](#)
- [SCIS Purchases and Returns](#)
- [SCIS Purchase Breakdown](#)

## SCIS Individual Company Form

- **ID:** customsearch\_ns\_pos\_company\_customer

- **Description:** Defines fields for company customers on the customer entry form in SCIS. For more information, see [Configuring the Customer Entry Form](#).

## SCIS Individual Customer Form

- **ID:** customsearch\_ns\_pos\_individual\_customer
- **Description:** Defines fields shown for individual customers on the Customer Profile in SCIS. For more information, see [Configuring the Customer Entry Form](#).

## SCIS Support Calls

- **ID:** customsearch\_ns\_pos\_supportcalls
- **Description:** Returns the information that's used on the Customer Profile in the timeline to show Support Calls.

## SCIS Shipping Status List

- **ID:** customsearch\_ns\_pos\_shipping\_status
- **Description:** Returns the information that's used in the Customer Profile timeline on the Shipments Tabs.

## SCIS Transactions Detail

- **ID:** customsearch\_ns\_pos\_transactions
- **Description:** Returns the information that's used in the Customer Profile on the TimeLine.



**Warning:** Don't modify this saved search. Changing the ID or removing fields from the default search may cause errors in the Customer Profile.

## SCIS Transactions Totals

- **ID:** customsearch\_ns\_pos\_last\_transactions
- **Description:** Returns the information that's used on the Customer Profile in the Visit Count Chart.

## SCIS Purchases and Returns

- **ID:** customsearch\_ns\_pos\_purchases\_returns
- **Description:** Returns the information that's used in the Customer Profile to generate the Purchases & Returns Chart.

## SCIS Purchase Breakdown

- **ID:** customsearch\_ns\_pos\_purchase\_breakdown

- **Description:** Returns the information that's used in the Customer Profile to generate the Purchases Breakdown Chart.

## Discounts and Returns

SuiteCommerce InStore (SCIS) installs the following custom fields and records that apply to discounts and returns. Configure these custom fields with values that make sense for your organization.

### Discount Reason

- **ID:** custbody\_ns\_pos\_tran\_dct\_reason
- **Description:** Stores the custom discount applied to an order. This custom field requires no configuration. When a custom discount is applied, this field stores the reason for the discount as entered by the sales associate at the time of the transaction. When a custom discount is applied to an order, the discount reason is output to this field on the custom subtab of the transaction form. When a custom discount is applied to an item in the cart, the discount reason is output to the description field on the transaction line (on the Items subtab). SCIS requires the sales associate to enter a reason before a custom discount can be applied. For more information about setting up discounts, see [Configuring Discounts](#).

### SCIS Discount Reasons (List)

- **ID** customrecord\_ns\_pos\_dtreasons
- **Description:** Specifies a predefined list of reasons for applying a custom discount. The sales associate can select a predefined reason for the discount, and that selection is displayed in NetSuite on Cash Sales and Invoices. SCIS requires a sales associate to select a reason before a custom discount can be applied. This custom field is installed with default values, however, you can modify the values in the list. For more information, see [Discount Reasons](#).

### SCIS Return Reasons (List)

- **ID:** customrecord\_ns\_pos\_return\_reasons
- **Description:** Enables you to define reasons for an item return. A sales associate must select one of these reasons when performing a return or exchange. For more information, see [Returns and Refunds](#).

## Employee

The following custom fields apply to employee records used with SuiteCommerce InStore (SCIS). You can find these custom fields and records in NetSuite, and then modify them as needed. For more information, see the following:

### SCIS Access Code

- **ID:** custentity\_ns\_pos\_accesscode

- **Description:** Configure this custom field on the employee record. You must enter a pass code in this field for employees who have roles authorized to perform restricted operations. This field is associated with roles and permissions. For more information, see [Manager Override](#).

## SCIS Locations

- **ID:** custentity\_ns\_pos\_employee\_scislocations
- **Description:** This is a custom list on the employee record. The options in the list are sourced from the list of store locations that you configured in NetSuite. If you have employees that work at more than one location, selecting SCIS locations is a one-time setting when configuring a new Employee. For more information, see [Working with Employees in Multiple SCIS Locations](#).

## SCIS User Settings

- **ID:** customrecord\_ns\_pos\_defaultcustomer
- **Description:** This custom record defines critical user settings, such as Default Customer record, default sales rep, and cash drawer account. One of these custom records is automatically created for each employee. However, configuration is required. For more information, see the help topic [SCIS User Settings](#).

## SCIS Permission

- **ID:** customrecord\_ns\_pos\_permission
- **Description:** Stores the permission required for an action. Each permission has a name, a description, the roles that can perform the action, and the roles that require authorization to perform the action. A POS Permission custom record exists for each action that requires authorization. All actions that require authorization are logged on the SCIS Audit Log. For more information, see [SuiteCommerce InStore Permissions](#).

## Item

The following custom fields apply to item records used with SuiteCommerce InStore (SCIS). You can find these custom fields in NetSuite, and then modify them as needed.

## SCIS Gift Card

- **ID:** custitem\_ns\_pos\_physical\_item
- **Description:** Used exclusively for gift certificates, this check box differentiates gift certificates in card form from digital gift certificates. You can access this field on gift certificate item records in NetSuite. For more information, see [Configuring Gift Certificates for SCIS](#).

## Additional UPCs

- **ID:** custitem\_ns\_pos\_additional\_upcs
- **Description:** Defines additional UPC codes for items. You can enter a comma-separated list of UPC codes in this custom field on item records. For more information, see [Configuring Item Records for SCIS](#).

## Location

SuiteCommerce InStore (SCIS) uses the standard location record along with the custom records described later to define various settings such as store locations, available shipping methods and discounts. For step-by-step instructions on setting up standard location records and custom records related to location settings, see [Configuring Locations for SCIS](#).

## SCIS Settings

- **ID:** customrecord\_ns\_pos\_location\_settings
- **Description:** Defines settings for: shipping methods, predefined discounts, custom discounts, and saved searches. Define specific locations where certain shipping methods, discounts, and saved searches are available. Also, use this custom record to configure location-specific printer settings and custom attributes, and more.

 **Note:** After applying any changes to the Printer Settings, the sales associate must log out of SCIS on the mobile device, and then log in again to refresh the updated settings. For changes to printer settings, the user must also select the printer again from the main menu in the SCIS for iOS app.

For more information, see [SCIS Settings](#).

## SCIS Custom Attributes

- **ID:** customrecord\_ns\_pos\_extra\_attrs
- **Description:** Use these records to define attributes for customizing certain areas of SCIS. For more information, see [Creating SCIS Custom Attributes](#).

## SCIS Service Hours

- **ID:** custrecord\_ns\_pos\_servicehours
- **Description:** Displays service hours for your store location in the Nearby Stores subtab on product display pages. This custom field is on the Location record in NetSuite, and setting it is optional.

## SCIS Location Distance

- **ID:** customrecord\_ns\_pos\_locationdistance
- **Description:** Defines the distance between store locations. This field appears in the nearby stores tab on the product display page. For more information, see [SCIS Location Distance](#).

## Default Order Location

- **ID:** custrecord\_ns\_pos\_default\_so\_location
- **Description:** Defines the location where sales orders should be fulfilled. You can set the location of the warehouse where SCIS orders are fulfilled. Applies to delivery and pickup orders created through SCIS. Sales associates can't access this setting from the SCIS user interface. This location



is automatically set on sales order transactions for fulfillment purposes. Configure this field on the Location record.

## SCIS Store Safe Account

- **ID:** custrecord\_ns\_pos\_location\_safeaccount
- **Description:** Defines the account you use to track the amount in your store safe. You must define a store safe account for each point-of-sale location. Set this field on the Location record.

## Custom Searches for Location

The following saved searches generate location information for SCIS. You can modify these searches to meet your business needs, see [Modifying Included Saved Searches](#).

To modify the locations displayed in SCIS, you must edit the CustomConfiguration.js file. For more information, see [Customize Location Display](#).

## SCIS Inventory Locations

- **ID:** customsearch\_ns\_pos\_inventory\_locations
- **Description:** Saved search that returns the information used on the All Inventory tab on the Product Display Page.

## SCIS Locations

- **ID:** customsearch\_ns\_pos\_locations
- **Description:** Saved search that returns the list of locations you have configured in NetSuite. These locations are displayed on the Nearby Stores subtab in SCIS.

## Opening and Closing Drawer

SuiteCommerce InStore (SCIS) uses custom transaction types and custom records to track opening drawer and closing drawer transactions. Custom transaction types track the movement of cash from the store safe account into a cash drawer and from the cash drawer back to the safe. A store safe account custom record is created for each point-of-sale location. The cash drawer difference account tracks any discrepancy found in the process of reconciling the amount entered by a sales associate during the closing drawer transaction.

- [Custom Transaction Types](#)
- [Custom Records for Opening and Closing Drawer Transactions](#)

## Custom Transaction Types

Custom transaction types are used internally in NetSuite for Opening Drawer and Closing Drawer transactions, which are specific to SCIS. The following custom transaction types are added to your NetSuite account when you install SCIS.

## SCIS Opening Drawer

- **ID:** customtransaction\_ns\_pos\_initial\_loan
- **Description:** Transaction type used to record each opening drawer that's performed by a sales associate at the beginning of a shift.

## SCIS Closing Drawer

- **ID:** customtransaction\_ns\_pos\_end\_of\_day
- **Description:** Transaction type used to record the closing drawer transaction that's performed by a sales associate at the end of a shift.

## Custom Records for Opening and Closing Drawer Transactions

The following custom records appear on the location record. You must set a safe account and cash drawer difference account for each point-of-sale location. For instructions on setting up location records for SCIS, see [Configuring Locations for SCIS](#).

For more information about how the custom records are used, see [SCIS Cash Drawer Management](#).

## SCIS Cash Drawer Difference

- **ID:** custrecord\_ns\_pos\_location\_diffaccount
- **Description:** Use this field on the Location record to select the account where funds should be allocated when there's a discrepancy between the amount in the cash drawer and the amount entered in SCIS for the Closing Drawer transaction. You must define a cash drawer difference account for each point-of-sale location.

## SCIS Open Drawer Reason

- **ID:** customrecord\_ns\_pos\_opendrawerreasonlist
- **Description:** Administrators use this record to define reasons for opening the cash drawer. When a sales associate opens the cash drawer using the No Sales option, they must select a reason from the list. For more information, see [SCIS No Sale](#) and [SCIS Cash Drawer](#).

## Payments

The following custom lists and records are required for accepting payments with SuiteCommerce InStore (SCIS). You can find these custom lists and records in NetSuite. Configuration is required.

## SCIS Quick Cash Denominations

- **ID:** customrecord\_ns\_pos\_quickcash
- **Description:** Enables you to define the denominations that appear on Quick Cash buttons in SCIS. Sales associates use Quick Cash buttons when accepting cash for purchases. You can also configure

various actions associated with each payment method including which payment methods require a signature, or can trigger the cash drawer to open. For more information, see [Modifying Cash Payment Denominations](#).

## SCIS Gateway

- **ID:** customrecord\_ns\_pos\_gateway
- **Description:** Used in credit card payment processing, this record must be defined to associate a location with a payment gateway. For more information, see [Configuring SCIS Gateway Records](#).

## SCIS Payment Method

- **ID:** customrecord\_ns\_pos\_payment\_method
- **Description:** Defines payment methods used by SuiteCommerce InStore, such as cash and credit card. Configuring a custom record for each payment method is required. For more information, see [Configuring SCIS Payment Methods](#).

## SCIS Payment Device

- **ID:** customrecord\_ns\_pos\_emv\_device
- **Description:** Defines an EMV payment device for use with SuiteCommerce InStore. Configuring a custom record for each EMV payment device is required. For more information, see [Configuring EMV Payment Services for SCIS](#).

## Printer Settings

The following custom records are included to store printer settings for SCIS. Note that SCIS only supports specific paper sizes. Don't enter additional paper sizes. For more information, see [Setting Up Receipt Printers for SCIS](#).

### SCIS Available Printers

- **ID:** customrecord\_ns\_pos\_printers
- **Description:** List of known devices for printing receipts. You must configure a custom record for each printer associated with a point-of-sale device configured for SCIS.

### SCIS Paper Size

- **ID:** customrecord\_ns\_pos\_paper
- **Description:** SCIS only supports the following paper sizes: A4 or Letter for Air print, and 2 inches or 3 inches for Star printers.

### SCIS Printing Settings (AirPrint)

- **ID:** customrecord\_ns\_pos\_printing\_airprint

- **Description:** Stores preferences for the AirPrint receipt printer, such as the printer name, paper size, and SCIS settings record.

## SCIS Printing Settings (Star)

- **ID:** customrecord\_ns\_pos\_printing\_star
- **Description:** Stores preferences for the Star receipt printer, such as the printer name, paper size, and SCIS settings record.

## QuickAdd Keys

QuickAdd keys are used in SuiteCommerce InStore (SCIS) to add items to a transaction. Configuration of QuickAdd Groups and QuickAdd Keys is required. For more information, see [Configuring QuickAdd Keys](#).

## SCIS QuickAdd Group

- **ID:** customrecord\_ns\_pos\_hotkeygroup
- **Description:** List that defines the tabs that appear in the QuickAdd bar on the main application screen. You can configure QuickAdd Groups as filters to hide or show products based on criteria such as user role, location, or customer. To define a QuickAdd Group, go to Customization > Lists, Records, & Fields > Lists. Click SCIS QuickAdd Group, and then add or modify values in the list.

## SCIS QuickAdd Key

- **ID:** customrecord\_ns\_pos\_hotkey
- **Description:** Used to configure QuickAdd Keys. You configure one custom record for each QuickAdd Key associated with a product for sale. To define a QuickAdd Key, go to Customization > Lists, Records, & Fields > Record Types.

## Sales Reports

The following saved searches affect the data included in the sales report available to sales associates who are logged in to SuiteCommerce InStore (SCIS). You can modify these saved searches to create sales reports you want to see in NetSuite. For more information, see [Custom SCIS Sales Reports](#).

## SCIS Retail Tenders

- **ID:** customsearch\_ns\_pos\_retail\_tenders
- **Description:** Returns the information that's used in Sales Reports, on the Retail Tenders Chart.

## SCIS Sales by Department

- **ID:** customsearch\_ns\_pos\_sales\_by\_department
- **Description:** Returns the information that's used in the Sales Report, on the Sales by Class Chart.

## SCIS Daily Sales

- **ID:** customsearch\_ns\_pos\_daily\_sales
- **Description:** Returns the Net Sales information that's displayed on the Sales Report in the SuiteCommerce InStore User Menu.

## SCIS Receipts

SuiteCommerce InStore (SCIS) uses the following custom record and custom list so that you can customize receipts. For more information about setup and configuration, see [Advanced Receipt Templates for SCIS](#).

### SCIS Receipt Template

- **ID:** customrecord\_ns\_pos\_receipt\_templates
- **Description:** SCIS supports the Advanced PDF/HTML Templates feature for customizing receipts. The SCIS Receipt Template custom record links your customized receipt template to SCIS. You should use the template installed by SCIS as the basis for your custom receipt templates. You can create as many Advanced HTML/PDF templates as you want. For more information, see, [Advanced Receipt Templates for SCIS](#).

### SCIS Receipt Template Type

- **ID:** customlist\_ns\_pos\_template\_type
- **Description:** The SCIS Receipt Template type is a custom list with two entries: **Print** and **Email**. You can create as many different SCIS Receipt Template records as you want, but there are only two template types.

 **Important:** Don't add or remove values from this list.

## Transactions

The following custom fields are associated with transactions entered using SuiteCommerce InStore (SCIS). Data displayed in custom fields on transaction records in NetSuite provide more information about each transaction.

- [SCIS Transaction Line-Item Fields](#)
- [Custom Subtab on Transaction Records](#)
- [Billing Subtab on Transaction Records](#)
- [Other Custom Lists and Records for Transactions](#)

### SCIS Transaction Line-Item Fields

Transaction line fields are used to store and retrieve information about the line items within a transaction. These fields are typically displayed on the Items subtab on Invoices and Cash Sales generated from SCIS.

## Void Quantity

- **ID:** custcol\_ns\_pos\_voidqty
- **Description:** Stores the quantity of a voided item on an order. This field is used when you add an item back to the order, so the item retains its original quantity.

## Void %

- **ID:** custcol\_ns\_pos\_voidpct
- **Description:** Stores the ID for the percent discount applied to a line item voided from an order. The field is blank if the discount is a fixed amount.

## Voided Item

- **ID:** custcol\_ns\_pos\_voideditem
- **Description:** Stores the ID of the item voided in a transaction.

## Returned Quantity

- **ID:** custcol\_ns\_pos\_returnedqty
- **Description:** Stores the quantity of items returned. Used on validated returns to calculate returnable items.

## SCIS Return Reason (TX)

- **ID:** custcol\_ns\_pos\_returnreason
- **Description:** Stores the reason for the return. If an item is returned, a reason must be set.

## Unvalidated Return

- **ID:** custcol\_ns\_pos\_unvalidated\_return
- **Description:** Used during a return transaction, this field stores the return validation setting. This hidden field applies to an item on a sales transaction. For more information, see [Returns and Refunds](#).

## Custom Subtab on Transaction Records

The following fields show on the Custom subtab on sales transactions. These custom fields may or may not be populated based on the type of transaction submitted in SuiteCommerce InStore. For example, if a credit memo wasn't issued, the SCIS Returns Credit Memo field remains empty.

## SCIS Returns Credit Memo

- **ID:** custbody\_ns\_pos\_returns\_creditmemo

- **Description:** Stores information about the credit memo used in a return transaction when another item was purchased. This field is populated on an invoice form generated from an exchange transaction. It links the invoice with the return by showing the credit memo transaction number.

## SCIS Created From

- **ID:** custbody\_ns\_pos\_created\_from
- **Description:** Used to create a reference to the original transaction. This field applies to sales transactions, for example, an invoice created from a sales order.

## Sales Associate

- **ID:** custbody\_ns\_pos\_sales\_associate
- **Description:** Stores the sales associate's name on the transaction.

## POS Status

- **ID:** custbody\_ns\_pos\_transaction\_status
- **Description:** Defines the status of a transaction. The POS Status field appears on all transactions entered with SCIS. This field contains values that aren't part of the standard transaction record. This is a read-only field that's set automatically as transactions are created and processed with SCIS. It requires no configuration. For more information, see [POS Status Definitions](#).

## Billing Subtab on Transaction Records

The following fields are displayed on the Billing subtab of sales transactions.

### Total Tendered

- **ID:** custbody\_ns\_pos\_total\_tendered
- **Description:** Stores the total amount of money accepted from the customer to complete a transaction. This field applies to sales and customer payments.

### Credit Card Signature

- **ID:** custbody\_ns\_pos\_signature\_image
- **Description:** Stores the electronic signature provided by the customer after performing a credit card transaction.

### Change Due

- **ID:** custbody\_ns\_pos\_change\_due
- **Description:** Lists the amount of change due when performing a cash transaction.

## Suspended Total

- **ID:** custbody\_ns\_pos\_suspended\_total
- **Description:** Stores the total for each suspended transaction. This field stores the total of the transaction at the moment it was suspended, and displays it in the list of suspended orders. For more information about suspended transactions, see the help topic [Saving \(Suspending\) an Order](#).

## Other Custom Lists and Records for Transactions

The following custom lists and records are also associated with transactions, but they don't appear on the transaction record.

### SCIS Transaction Status

- **ID:** customlist\_ns\_pos\_transaction\_status
- **Description:** Used internally to store the status of transactions generated by SCIS. The values in this list are displayed in the POS Status field on transactions. Don't modify the values in this list. The POS Status field is updated automatically as transactions are submitted and processed.

### SCIS Audit Log

- **ID:** customrecord\_ns\_pos\_audit\_log
- **Description:** Stores information about every transaction generated from SuiteCommerce InStore related to authorization requests based on permissions.  
To view the audit log, go to Customization > Lists, Records, & Fields. Next, find SCIS Audit Log in the list. Then, click List in that row. You can click a column header on the list page to sort data. For more information, see [SCIS Audit Log](#).

### SCIS Open Credit Memos

- **ID:** customsearch\_ns\_pos\_open\_credit\_memos
- **Description:** Saved search that returns Open Credit Memos for a specific customer. Supports the refund to Credit Memo feature.

### SCIS Transaction Notes Types

- **ID:** customrecord\_ns\_pos\_notes\_types
- **Description:** This record is configured by administrators, and then used by sales associates to capture additional information about orders. For more information about configuring SCIS Transaction Note Types, see [Defining SCIS Transaction Notes](#).

## Fallback Custom Records

This section includes reference information about the custom records used for SCIS Fallback. See this section to learn about how the custom records are used with SCIS Fallback and reconciliation. To view



or configure custom fields in NetSuite, go to Customization > Lists, Records, & Fields, and then make a selection from the list.

## SCIS Fallback Settings

- **ID:** customrecord\_ns\_pos\_fallback\_settings
- **Description:** Configuring the SCIS Fallback Settings record is the first step in setting up Fallback. For more information, see [SCIS Fallback Settings](#).

## SCIS Fallback Transaction

- **ID:** customrecord\_ns\_pos\_fallback\_proto\_tran
- **Description:** This record captures all the data from a transaction submitted in Fallback. This is the parent record to the SCIS Fallback Line and SCIS Fallback Payment records. For more information, see [Transaction Creation Process](#).

## SCIS Fallback Line

- **ID:** customrecord\_ns\_pos\_fallback\_line
- **Description:** This record displays data from each line of every transaction submitted using Fallback. It's a child record of the SCIS Fallback Transaction record. You can view data from SCIS Fallback Line records on SCIS Fallback Transactions. For more information, see [Fallback Data Delivery](#).

## SCIS Fallback Payment

- **ID:** customrecord\_ns\_pos\_fallback\_payment
- **Description:** This record captures payment information from orders submitted using SCIS Fallback. It's a child record of the SCIS Fallback Transaction record. For more information, see [SCIS Fallback Payment Methods](#).

## SCIS Fallback Session

- **ID:** customrecord\_scis\_fallback\_session
- **Description:** This record represents each new session created every time a sales associate logs in to Fallback. For more information, see [SCIS Fallback Session and SCIS Transmission Batch Records](#).

## SCIS Fallback Transmission Batch

- **ID:** customrecord\_scis\_fb\_transmission\_batch
- **Description:** SCIS Transmission Batch records are grouped according to session and linked to SCIS Fallback Session records.