

ORACLE
NetSuite

SuiteCommerce SEO and Analytics

2025.2

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

Search Engine Optimization and Analytics	1
Analytics	2
Google Ads	2
Google Tag Manager	5
Set Up Google Tag Manager	6
Modify Google Tag Manager Services	13
Supported Google Tag Manager Services	15
Tracked Events	26
Set Up Google Tag Manager (SuiteCommerce Advanced Aconcagua and Earlier)	28
Google Analytics 4	35
Configuring Google Analytics 4	37
Enable Google Analytics 4 in NetSuite	38
Google Analytics 4 Conversion Events	38
Migrating from Google Universal Analytics to Google Analytics 4	39
Google Analytics with ShopFlow and Site Builder	40
Google Universal Analytics	42
Configuring GUA	43
Enable GUA in NetSuite	46
GUA Goals	53
Search Engine Optimization (SEO)	55
SEO Page Generator	56
SEO Page Generator Debug Log	57
SEO Page Generator Best Practices	59
SEO and Redirects	61
Setting Up a URL Redirect	61
Updating Redirect Domains	64
Importing Website Redirects	64
Delete Web Site Redirects Mass Update	65
SEO and Robots.txt	66
Robots.txt with Categories and Facets	68
SEO and Item Reviews	72
Sitemap Generator	72
SEO and Page Titles	78
Structured Data Markup	79
SEO and Meta Descriptions	81
SEO and Images	83
Customizing Item URLs for SEO	85
SEO and Canonicalization	86
URL Component Aliases	87
Canonical Domains	89
Adding a Third-Party Script for Analytics Tracking	90

Search Engine Optimization and Analytics

Applies to: SuiteCommerce | SuiteCommerce Advanced

Analytics and search engine optimization (SEO) are closely related. What you do for SEO can affect your analytics, and what you learn from analytics can guide your SEO. For example, if you see some pages aren't getting much traffic, you can update their titles and meta descriptions to help them rank better in search results.



[Analytics](#)

See the topics here to learn how to implement the most popular analytics tools on your site.



[Search Engine Optimization \(SEO\)](#)

Learn how to use SEO best practice to your site. Following these guidelines can help your pages rank higher in search results.

Analytics

Applies to: SuiteCommerce | SuiteCommerce Advanced

Tracking visitor traffic is a key part of managing your site, and Commerce web store works with the most popular analytics tools. The following topics show you how to set up analytics tools on your Commerce web store.

Description	For More Information
Learn how to link your Google Universal Analytics and Google Ads accounts.	Google Ads
You can manage multiple analytics tools in one place with Google Tag Manager.	Google Tag Manager
Learn how to set up Google Analytics 4, one of the most popular analytics tools. It replaces Google Universal Analytics as Google's cross-platform analytics solution.	Google Analytics 4
Learn how to set up Google Universal Analytics, one of the most widely used analytics tools.	Google Universal Analytics
 Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform analytics solution. Standard GUA properties stopped processing new data on July 1, 2023, and 360 Universal Analytics properties will stop on July 1, 2024. See Google Analytics 4 for information about GA4 and how to migrate from GUA.	

Google Ads

Applies to: SuiteCommerce | SuiteCommerce Advanced

Google Ads is a Google product you can use to create ads that display within the Google ad network. This helps drive relevant traffic to your website when people search for your products or services. Google Analytics 4 (GA4) is another Google product you can use to see how well your Google Ads campaigns are performing. Linking your Google Ads and Google Analytics accounts gives you a complete view of your customers' behavior and helps you track how effective your ad campaigns are. See [Link Google Ads and Analytics](#) on Google's support site for information about linking Google Ads with Google Analytics.

When you link Google Ads with Google Analytics, you get a clear view of your customers' journey from add click, through site activity, and conversion. This analysis helps you track your ad campaigns and make changes to improve their performance.

Perform these procedures to set up Google Ads and link to your Google Analytics account.

Prerequisites

Here's what you need before you can use Google Ads on your site:

- Google Ads account. See: [Google Ads Sign-up Guide](#) on Google's support site.
- Google Tag Manager account. See [Setup and Install Google Tag Manager](#) on Google's support site.

A GA4 account is optional. See: [Set up Analytics for a website and/or app](#) on Google's support site.

Google Ads Conversion Tracking

Google Ads conversion tracking shows you what happens after someone clicks on your Google ad. This helps you figure out the best ways to create effective ad campaigns.

To set up Google Ads conversion tracking:

1. Go to [Google Ads conversions](#) on the Google support site.
2. Follow the instructions for creating a Google Ads conversion tag.

To create a conversion tag and auto-tagging:

1. Log in to [Google Ads](#).
2. Go to Tools & Settings > Measurements > Conversions, then create a new website conversion action and tag.
3. Select Website as the source of the conversions you want to track.
4. Set up all the values, then click **Done** or **Save**.
5. Check the conversion code to retrieve the Conversion ID and the Conversion Label of the conversion tag. You'll use these in custom modules to trigger conversions.

To set Google Analytics and Google Ads to use auto-tagging:

1. Log in to [Google Analytics](#).
2. Go to Admin.
3. In the Account section (first column), select your account.
4. In the Property section (middle column), select your site.
5. In the Product Linking group under Property, click **Google Ads Linking**.
6. Select the Google Ads account you want to link, then click **Continue**.
7. Enter a title in the Link group title field, then click **Link accounts**.
8. Click **OK**.
9. Log in to your Google Ads account.
10. Click **Tools**.
11. Click **Linked Accounts** under Setup.
12. Click **Details** under Google Analytics.
13. Select your Site, Property and View, then click Save.
14. Go to Preferences and make sure the Auto-tagging feature is on.
15. Enable auto-tagging

To enable/disable auto-tagging:

1. Sign in to your [Google Ads account](#).

2. In the left page menu, click **Settings**.
3. Click **Account settings** along the top of the page.
4. Click the **Auto-tagging** section.
5. To enable auto-tagging, check the box next to “Tag the URL that people click through from my ad.”
6. Click **Save**.

The Commerce Google Ads feature adds your Google Ads conversion tracking tags to your website pages.

To enable Google Ads:

1. In NetSuite, go to Commerce > Websites > Configuration.
2. Select your website and domain.
3. Click **Configure**.
4. In the configuration record, go to the **Integrations** tab and the **Google Adwords** subtab.
5. Enter your Google Adwords ID, Google Adwords Label, and Adwords Value and click **Save**. To find these values:

1. Sign in to your [Google Ads](#) account.
2. In the Google Ads application, go to Tools & Settings > Measurement > Conversions.
3. Click a Conversion action to edit the action.
4. Scroll to the bottom of the page and click **Tag setup**.
5. Click **Install the tag yourself**.
6. Select **The global site tag on all pages was installed already when you created another conversion action in this Google Ads account** Global site tag option.
7. Select the **Page load** Event snippet option.

The Google Adwords ID is the numeric value (xxxxxxxx) in this string: ‘AW- xxxxxxxxxx/’

The Google Adwords Label is the remainder of the string following the “AW-xxxxxxxx/**label identifier**”

You'll find the Adwords Value in the **Value** field (for example: “value: **1.0**”).

To enable Google Ads (pre-Vinson):

1. Create a custom module that includes the SC.Shopping.Configuration, SC.MyAccount.Configuration, or SC.Checkout.Configuration object as a dependency.



Note: Don't edit the original source files directly. See the help topic [Develop Your SCA Customization](#) for information and best practices on customizing JavaScript.

2. Extend the googleAdWordsConversion object to set the id, value, and label to the corresponding values for the conversion tag you created in your Google Ads account. See [To create a conversion tag and auto-tagging](#).

```
1 // [Google AdWords](https://support.google.com/adwords/answer/1722054/)
2 , googleAdWordsConversion: {
3   id: 0
4   , value: 0
```

```

5 |         , label: ''
6 |     }

```

Google Tag Manager


Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

SuiteCommerce Advanced customers must implement Mont Blanc or later to use this feature.

Google Tag Manager (GTM) is a free application provided by Google that lets you manage all of your tags in one place. Tags can measure site traffic and visitor behavior. They can also provide information about the impact of online advertising and marketing campaigns.

Third-party services use tags to collect information about user activities as users browse and interact with your website. Manually creating these tags and associated triggers takes time and usually requires some technical knowledge about the service and some knowledge about how to create tags, triggers, and other variables and events. Google Tag Manager Editor is a NetSuite application that handles these tasks for you.

During setup, Google Tag Manager Editor creates the tags, triggers, and variables for the services you select and adds them to your Google Tag Manager container. You can also use Google Tag Manager Editor to add additional supported services or to remove an installed service. See [Supported Google Tag Manager Services](#) for a list of services currently supported by Google Tag Manager Editor.

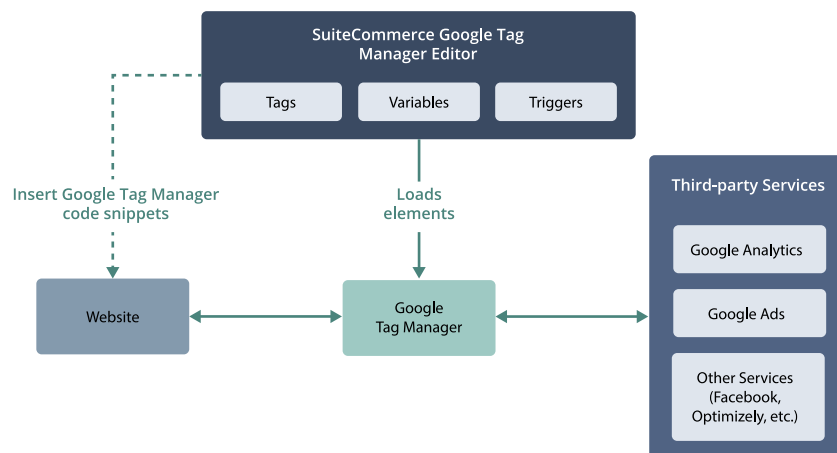

Before you Begin

Keep the following in mind:

- You must have a Google account. See [Create your Google Account](#).
- You need an account for each of the services you're adding, and you must know the identifying information required to connect to each service. For example, to add Google Analytics, you must have a Google Analytics account and must know your Google Analytics Tracking ID.

If you don't have an Analytics account and Tracking ID, see [Set Up Analytics Account and Google Analytics 4 Property](#).


Set Up Google Tag Manager

Applies to: SuiteCommerce | SuiteCommerce Advanced

This topic applies to SuiteCommerce and the 2018.2 release of SuiteCommerce Advanced (SCA) and later. If you're implementing SCA Aconcagua or earlier, see [Set Up Google Tag Manager \(SuiteCommerce Advanced Aconcagua and Earlier\)](#) for instructions.

Note: For implementations of SCA 2018.2 – 2022.2 using Google Analytics 4 with the Google Tag Manager Commerce Extension, review the data-layer structure of SCA version 2023.1 or later and compare it with your current version. With the release of SCA 2023.1, modifications were made in the data-layer code to comply with Google and correctly track information with Google Analytics events. For information about the suggested data-layer structure you should use, see the help topic [Google Tag Manager Events Not Displaying in Data Layer Upon Checkout](#).

Google Tag Manager (GTM) set up involves several steps in NetSuite and in Google applications. To set up GTM for your Commerce website, complete the steps shown in the following figure.

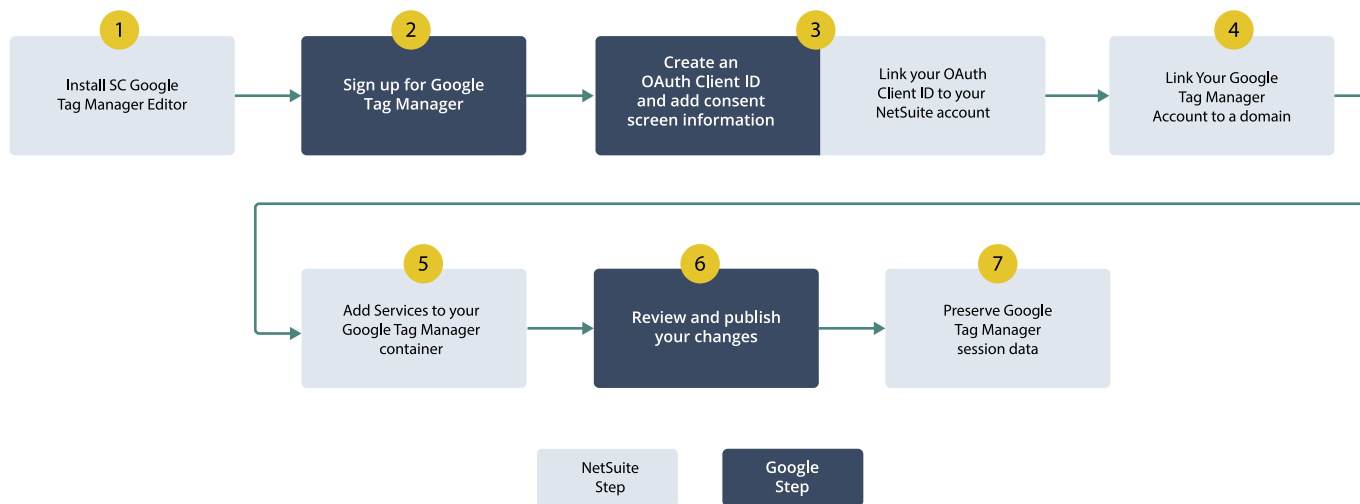

Install SC Google Tag Manager Editor

Install the **SC Google Tag Manager Editor** SuiteApp to use Google Tag Manager Editor. See the help topic [Installing Theme and Extension SuiteApps](#) for instructions about how to install an extension SuiteApp. See the help topic [Commerce Extensions](#) for the SC Google Tag Manager Editor bundle ID.

Sign Up for Google Tag Manager

To sign up for a GTM account, you must first have a Google account. If you don't already have a Google account, create one using Google's instructions. See [Create your Google Account](#).

When you sign up for your GTM account, Google creates your GTM account and a container to hold your tags, macros, and rules.


To sign up for a Google Tag Manager account:

1. Go to <https://www.google.com/analytics/tag-manager/>.
2. Sign in to GTM with your Google ID.

3. Click **Create Account**.
4. Enter a name for your account.
5. Select your country from the **Country** field.
6. Click **Continue**.
7. Enter your site name in the **Container Name** field.
Example: **www.mysite.com**
8. Select **Web** from the **Where to Use Container** field.
9. Click **Create**.
10. Close the **Install Google Tag Manager** window.

Note: You don't need the GTM code displayed in this window.

11. Go to the GTM **Workspace** tab and make a note of the GTM ID located in the submenu header area in the upper right portion of the page.

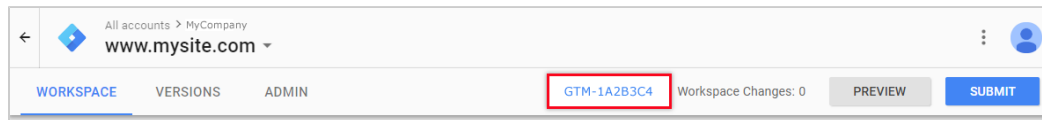

Enable the Google Tag Manager API

You must enable the GTM API prior to authenticating your NetSuite Account with the Google API.

1. Log in to [Google API Credentials Console](#) using your Google account logins.
2. Enter **Google Tag Manager** in the search box and select **API Tag Manager** from the search results.
3. Click **Enable**.

Authenticate Your NetSuite Account with the Google API

Google requires you to authenticate your NetSuite account with the Google API using a Google OAuth Client ID. Complete the following procedures to create a free Google OAuth Client ID and authenticate your NetSuite account with the Google API:

1. Create your Google API OAuth Client ID credentials.
2. Provide values for your Google API OAuth consent screen.
3. Link your Google API OAuth client ID to your NetSuite account.

Note: You only have to do these steps one time in your NetSuite account.

To create your Google API OAuth client ID credentials:

1. Log in to the [Google API Credentials Console](#) using your Google account logins.
2. Click **Create credentials** > OAuth client ID.
3. On the credentials form, select **Web application** for the application type.
4. Enter **NetSuite** in the **Name** field.
5. Enter your Authorized JavaScript origins and Authorized redirect URIs (Uniform Resource Identifiers).



Important: Log in to your NetSuite account and make a note of your **NetSuite account URL**. Enter this URL (beginning with https and ending with netsuite.com) in the **Authorized JavaScript origins** and **Authorized redirect URIs** fields. Example: https://3925220.app.netsuite.com.

Enter the values shown in the following table.

Field Name	Value
Authorized JavaScript origins	<Your NetSuite account URL> https://system.netsuite.com https://system.na1.netsuite.com https://system.na2.netsuite.com https://system.na3.netsuite.com https://system.eu1.netsuite.com https://system.eu2.netsuite.com https://system.eu3.netsuite.com
Authorized redirect URIs	<Your NetSuite account URL> https://system.netsuite.com https://system.na1.netsuite.com https://system.na2.netsuite.com https://system.na3.netsuite.com https://system.eu1.netsuite.com https://system.eu2.netsuite.com https://system.eu3.netsuite.com

- Click **Create**. A modal window provides your OAuth client ID and client secret.
- Make a note of your OAuth client ID value and click **OK**.



Note: The Google API consent screen tells your users who is requesting access to their data and what kind of data they're asking to access.

To provide values for your Google API OAuth consent screen:

- Log in to [Google API Credentials Console](#) using your Google account logins.
- Click **Credentials** in the left navigation bar.
- Click the **OAuth consent screen** tab.
- Enter the values shown in the following table.

Field Name	Value	Details
Application name	NetSuite	-
Application Logo	-	Upload your company logo (optional).
Support email	<valid email address>	Enter the email address of the person at your company responsible for answering data security questions.
Authorized domains	netsuite.com	-

Application Homepage link	https://www.netsuite.com/	-
Application Privacy Policy link	http://www.netsuite.com/portal/privacy.shtml	-
Applications Terms of Service link	<URL for your terms of service>	Enter the URL of your terms of service page (optional).

- Click **Save**.
- Click the **Edit OAuth** client icon (pencil).
- Enter the values in the following table if they don't already exist:



Important: Log in to your NetSuite account and make a note of your **NetSuite account URL**. Enter this URL (beginning with https and ending with netsuite.com) in the Authorized JavaScript origins and Authorized redirect URIs fields. Example: https://3925220.app.netsuite.com.

Field Name	Value
Name	NetSuite
Authorized JavaScript origins	<Your NetSuite account URL> https://system.netsuite.com https://system.na1.netsuite.com https://system.na2.netsuite.com https://system.na3.netsuite.com https://system.eu1.netsuite.com https://system.eu2.netsuite.com https://system.eu3.netsuite.com
Authorized redirect URIs	<Your NetSuite account URL> https://system.netsuite.com https://system.na1.netsuite.com https://system.na2.netsuite.com https://system.na3.netsuite.com https://system.eu1.netsuite.com https://system.eu2.netsuite.com https://system.eu3.netsuite.com

- Click **Save**.

To link your Google API OAuth client ID to your NetSuite account:

- In NetSuite, go to Setup > Company > General Preferences.
- Go to the **Custom Preferences** tab.
- Enter or paste your OAuth Client ID in the **Google OAuth Client ID** field.
- Click **Save**.

Link your Google Tag Manager Account to a Domain

Link your GTM ID to the SuiteCommerce configuration record for the associated domain.

To link your Google Tag Manager account to your domain:

1. Go to Commerce > Web Sites > Configuration.
2. Select your website and domain and click **Configure**.
3. In the configuration record, go to the **Integrations** tab and the **Google Tag Manager** subtab.
4. Enter your GTM ID in the **Google Tag Manager ID** field.
Leave the **Google Tag Manager Data Name** field set to the default value of **dataLayer**.
For more information, see the help topic [Google Tag Manager Subtab](#).
5. If you use separate domains for shopping and checkout, check the **Is A Multi-Domain Site** box.
6. Click **Save**.

Add Services to Your Google Tag Manager Container

Add supported service to your GTM container using the steps below. You can add more services without leaving GTM Editor, but you must add each one separately. GTM Editor creates the tags, triggers, and variables for the selected service and adds them to your GTM container. See [Supported Google Tag Manager Services](#) for a list of all supported services.

To add services to your Google Tag Manager container:

1. In NetSuite, go to Setup > SuiteCommerce Advanced > Google Tag Manager Editor.
2. Click **Sign In With Google** and choose your account.
3. Authorize NetSuite to access your Google account by clicking **Allow** for each permission.
4. On the Accounts & Containers – Google Tag Manager Editor page, click your container name.
5. Click **Add Service**.
6. Select the service you want to add in the **Service** menu.
7. Fill in the fields for the service you're adding.
Each service has a different set of fields that apply to that service. For example, if you're adding the Google Analytics service, you must enter a unique name of your choice, your Google Analytics tracking ID, and the domains you want to use with this service. Click the question mark icon for more information about finding the values to enter in these fields.
8. Click **Add**. If one instance of the service already exists, a warning displays with a link to edit the existing service. If more than one instance of the service already exists, a warning displays with a link to the list of existing container services.

You can now go to your GTM account (tagmanager.google.com) and your container, and see all of the tags, triggers, and variables added to your container.

Review and Publish Your Changes

After you add a new service to your container, the changes are displayed in GTM, but they're not published on your website.

To review and publish your changes:

1. From the Container Services page in the GTM, click **Review and Publish Changes**.
This redirects you to your workspace and container in GTM.
2. On the GTM Workspace page, click **Submit**.

3. On the Submit Changes page, you can add a version name and description.
Adding this information is optional, but adding it makes it easier for you to identify the changes made to your container.
4. Click **Publish**.

To view the data produced by each tag, log in to the service provider's page. For example, to view data produced by the Google Analytics tag, log in to your Google Analytics account and view the results on the Google Analytics site (analytics.google.com).

Preserve Google Tag Manager Session Data

Complete the following steps to preserve the data from shopping and checkout sessions. The scheduling script and associated scheduler (JavaScript) file deletes the session data when it's no longer needed.

1. **Enable SuiteScript and Custom Records** — This procedure provides instructions for enabling SuiteScript and custom records in NetSuite.
2. **Create a Custom Record** — This procedure provides instructions for creating custom records used to store data between sessions.
3. **Create Scheduler File** — This procedure provides instructions for creating the scheduler file that deletes unneeded session data records every 60 minutes.
4. **Create Scheduler Script** — This procedure provides instructions for creating the scheduler script that runs every 60 minutes.

To enable SuiteScript and Custom Records:

1. In NetSuite, go to Setup > Company > Enable Features.
2. Go to the **SuiteCloud** tab. In the SuiteBuilder section, check the **Custom Records** box.
3. In the SuiteScript section, check the following boxes:
 - **Client SuiteScript**
 - **Server SuiteScript**
 - **SuiteScript Server Pages**
4. Click **Save**.

To create a custom record:

1. In NetSuite, go to Customization > Lists, Records & Fields > Record Types > New.
2. In the **Name** field, enter a name for your custom record.
Example: SC GTM DataLayer
3. In the **ID** field, enter: `_ns_gtm_dataLayer`.
Enter this value exactly as shown (including the underscore character at the front).
4. In the **Access Type** list, select **No Permission Required for Internal Roles**.
5. Clear the **Include Name Field** box.
6. Click **Save**.
7. The new Custom Record Type page displays. The title of your new record type is displayed in the **Name** field.
8. Go to the **Fields** tab and add two new fields: **gtm_id** and **gtm_events**. Use the settings and values shown in the following table.

For information about how to add fields to a custom record type, see the help topic [Adding Fields to Custom Record Types](#).

Field	Field List 1 (gtm_id)	Field List 2 (gtm_events)
Label/Description	gtm_gid	gtm_events
ID	_ns_gtm_gid	_ns_gtm_events
Owner	Autopopulates with Your Name	Autopopulates with Your Name
Description	Enter a description of your choice (optional)	Enter a description of your choice (optional)
Type	Free-Form Text	Long Text
List/Record	-	-
Store Value	Enable	Enable
Use Encrypted Format	Disable	Disable
Show in List	Disable	Disable
Global Search	Disable	Disable
Record is Parent	-	-
Inactive	Disable	Disable
Apply Role Restrictions	-	-
Access Tab: Default Access Level	Edit	Edit
Access Tab: Default Level For Search/Reporting	Edit	Edit

9. Save the file in any accessible location.

To create the scheduler file:

1. Using a text editor, create a JavaScript file called `gtmScheduler.js`. Create a file with the following content:

```

1 function gtmScheduleController()
2 {
3     var gtm_record = 'customrecord_ns_gtm_datalayer'
4     , gtm_record_column = new nlapiSearchColumn('lastmodified')
5     , gtm_record_list = nlapiSearchRecord(gtm_record, null, null, gtm_record_column) || [];
6
7     gtm_record_list.forEach(function(record)
8     {
9
10        var record_saved_date = nlapiStringToDate ( record.getValue('lastmodified'), 'datetime').getTime()
11        , current_date = new Date().getTime();
12
13        if(current_date - record_saved_date <= 3600) {
14            nlapiDeleteRecord(gtm_record, record.id);
15        }
16
17    });
18 }
```

2. Save the file in any accessible location.

To create the scheduler script:

1. In NetSuite, upload your script file.

- a. Go to Customization > Scripting > Scripts > New.
 - b. In the **Scripts File** field, click the Plus icon (+).
 - c. Click **Choose File**.
 - d. Go to your local files to select the gtmScheduler.js file.
 - e. Click **Open**.
 - f. Click **Save**.
2. Create the script record.
- a. Click **Create Script Record**.
 - b. Click **Scheduled**.
 - c. In the **Name** field, enter: SC GTM Scheduler.
 - d. In the **ID** field, enter: _ns_gtm_scheduler_script.
 - e. On the **Scripts** tab, in the **Function** field, enter: gtmScheduleController.
 - f. On the **Deployments** tab, click **Add**.
 - g. Enter the following field values:

Field	Value
Title	GTM Scheduled
ID	_ns_gtm_scheduler_script
Deployed	Enable
Status	Scheduled
Start Date	Enter the date you want to start this scheduler
Start Time	Enter the time you want to start this scheduler
Period	Period
Frequency	Day

- h. Click **Save**.
3. Click **Deploy Script**.

Modify Google Tag Manager Services

Applies to: SuiteCommerce | SuiteCommerce Advanced

You can edit or delete services using the Google Tag Manager (GTM) Editor.

You should use GTM Editor rather than GTM to modify GTM services.

- To change service settings, see [Edit a Service](#).
- To delete a service, see [Remove a Service](#).
- To restore a service, see [Restore a Supported Service](#).

Edit a Service

After adding a service, you can change the settings using the GTM Editor. If you entered an incorrect service ID or other parameter, follow these steps to correct any of the setup parameters.

To edit a service using Google Tag Manager Editor:

1. In NetSuite, go to Setup > SuiteCommerce Advanced > Google Tag Manager Editor.
2. Click **Sign In With Google** and choose your account.
3. Authorize NetSuite to access your Google account.
4. Click the name of your container record.
5. Go to the **Configured Services** tab and click **Edit** for the service you want to change.
6. Make your changes.
7. Click **Save**.

Remove a Service

You can delete a service from your GTM container using the GTM Editor.

To remove a service using Google Tag Manager Editor:

1. In NetSuite, go to Setup > SuiteCommerce Advanced > Google Tag Manager Editor.
2. Click **Sign In With Google** and choose your account.
3. Authorize NetSuite to access your Google account.
4. Click the name of your container record.
5. Go to the **Configured Services** tab and click **Remove** for the service you want to remove.
6. Click **Remove** to confirm removal of the service.

Restore a Supported Service

To restore services, you can use two methods:

- [Restore Services Using the Restore Defaults Feature](#)
- [Restore Services by Removing and Adding a Service](#)

Restore Services Using the Restore Defaults Feature

You can use the **Restore Defaults** feature to do the following:

- Update default variable values.
- Add missing default variables.
- Add missing default triggers.
- Update valid service tag values.

To restore defaults:

1. In NetSuite, go to Setup > SuiteCommerce Advanced > Google Tag Manager Editor.
2. Click **Sign In With Google** and choose your account.
3. Authorize NetSuite to access your Google account.
4. Click the name of your container record.
5. Click **Restore Defaults**.

Restore Services by Removing and Adding a Service

If you edited a service in GTM, instead of using GTM Editor, the service might be moved to the **Other Services** tab. This tab also lists services not currently supported by GTM Editor.

To restore a supported service:

1. In NetSuite, go to Setup > SuiteCommerce Advanced > Google Tag Manager Editor.
2. Click **Sign In With Google** and choose your account.
3. Authorize NetSuite to access your Google account.
4. Click the name of your container record.
5. Go to the **Other Services** tab and click **Remove** for the service you want to restore.
For more information, see [Remove a Service](#).
6. Add the service back to your container.
For more information, see [Add Services to Your Google Tag Manager Container](#).

Supported Google Tag Manager Services

i Applies to: SuiteCommerce | SuiteCommerce Advanced

The following table lists the Google Tag Manager (GTM) services supported for your web store implementation. Click each service's link to learn about its supported events and how to find the account-specific information you'll need to connect.

Service	SuiteCommerce SuiteCommerce Advanced (2018.2 and Later)	SuiteCommerce Advanced (Aconcagua and Earlier)
AdRoll	✓	-
AWIN	✓	-
Bing Ads	✓	✓
ChannelAdvisor	✓	-
Criteo	✓	-
Facebook	✓	-
Google Ads Remarketing	✓	-
Google Ads	✓	✓
Google Analytics 4	✓	✓
Google Universal Analytics	✓	✓
Google Optimize	✓	-
Hotjar	✓	-
LiveChat	✓	-

LivePerson	✓	-
Optimizely	✓	✓
Privy	✓	-
ShareASale	✓	-
Talkable	✓	-
Visual Web Optimizer	✓	-
Zendesk Chat	✓	-

AdRoll

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

AdRoll helps you orchestrate display, social ads, email, and other marketing channels to increase revenue. For additional information about this service, see adroll.com.

To find your AdRoll Advertiser ID and Pixel ID, see [AdRoll Advertiser ID and Pixel ID](#).

GTM supports the following events for this service:

- Transaction
- pageView

AWIN

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

AWIN, previously known as Affiliate Window, is an affiliate marketing platform. For additional information about this service, see awin.com.

To locate your Merchant ID (also called Advertiser ID), log in to your AWIN account. Your Merchant ID is included on your Merchant Overview page. Visit the [AWIN Wiki](#) for more information.

GTM currently supports the following events for this service:

- SuiteCommerce — Page View
- SuiteCommerce — Transaction

Bing Ads

Bing Ads is a service that provides pay-per-click advertising on Bing and Yahoo! search engines. For additional information about this service, see advertise.bingads.microsoft.com.

To find your Bing Ads UET Tag, see [Bing Ads UET Tag](#)

GTM currently supports the following events for this service:

SuiteCommerce SuiteCommerce Advanced (2018.2 and Later)	SuiteCommerce Advanced (Aconcagua and Earlier)
■ Conversion tracking ■ Numeric value for conversion only	■ Conversion tracking ■ Numeric value for conversion only

 **Note:** To configure conversion tracking, log in to your Bing Ads account and select **Event** as the action type in your Bing Ads conversion goal record.

ChannelAdvisor

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

ChannelAdvisor provides e-commerce solutions that enable retailers and manufacturers to manage their global sales through various online channels. For additional information about this service, see channeladvisor.com

To find your ChannelAdvisor Account ID, log in to your ChannelAdvisor account, select the account, and then go to Accounts > Developer Network > Account Authorizations. For additional information, see [How to Find the AccountID for One of My Accounts](#).

GTM supports the following events for this service:

- SuiteCommerce — Page View
- SuiteCommerce — Transaction

Criteo

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Criteo provides retargeting for retailers to serve personalized online display advertisements to consumers who have previously visited the advertiser's website. For additional information about this service, see criteo.com.

To find your Account ID, see [Criteo Account ID](#).

GTM supports the following events for this service:

- Transaction
- Home Page View
- Product List
- Product View
- Cart Page View

Google Ads Remarketing

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Google Ads Remarketing helps you connect with people who have interacted with your website. For additional information about this service, see [Tag your site for Remarketing](#).

To find your Google Ads ID, see [Google Ads Conversion ID and Conversion Label](#)

GTM supports the following events for this service:

- **Non Commerce Page View** – Triggers the Google Remarketing Non-product view tag. This sends a hit on non-product pages.
- **Product List** – Triggers the Google Remarketing Non-product view tag. This sends a hit on product list pages (PLPs).
- **Product View** – Triggers the Google Remarketing Product view tag. This sends a hit on product detail pages (PDPs) and returns the following data:

- Product id
- Product price
- Page type = "product"

Google Ads

Google Ads is a pay-per-click service that allows you to target advertising to customers in specific locations or customers searching with specific keywords. For additional information about this service, see ads.google.com.

To find your Google Ads ID and Conversion Label, see [Google Ads Conversion ID and Conversion Label](#)

GTM supports the following events for this service:

SuiteCommerce	SuiteCommerce Advanced (Aconcagua and Earlier)
SuiteCommerce Advanced (2018.2 and Later)	
■ Transactions ■ Conversion tracking □ Conversion ID □ Conversion label □ Conversion value □ Currency code ■ Revenue tracking ■ Numeric value for conversion	■ Conversion tracking ■ Revenue tracking ■ Numeric value for conversion

Google Analytics 4

Google Analytics 4 (GA4) is a free web analytics service that tracks and reports website traffic. For additional information about this service, see [Google Analytics 4](#).

When setting up this service in Google Tag Manager, ensure that you select to send ecommerce data on the Tag Configuration page (Tag Configuration page > More Settings tab > Ecommerce tab, check the **Send Ecommerce data** box).

To find your GA4 Measurement ID, see [Tracking ID Support](#).

 **Note:** The Measurement ID is also called the Tracking ID or the "G-" ID.

GTM supports the following events for the GA4 service:

SuiteCommerce	SCA 2023.1 and 2023.1.1	SCA 2018.2 – 2022.2	SCA Aconcagua and Earlier (Except Denali)
SCA 2023.1.2 and Later			
Google Analytics 4			
■ Add Payment Information ■ Add Shipping Information	■ Add to Cart ■ Add to Wishlist ■ Checkout ■ Guest Checkout	■ Add to Cart ■ Add to Wishlist ■ Guest Checkout ■ Login	■ Add to Cart ■ Add to Wishlist ■ Guest Checkout ■ Login

SuiteCommerce SCA 2023.1.2 and Later	SCA 2023.1 and 2023.1.1	SCA 2018.2 – 2022.2	SCA Aconcagua and Earlier (Except Denali)
- Add to Cart - Add to Wishlist - Checkout - Guest Checkout - Login - Pageviews - Product Clicks - Product Detail Impressions - Product Impressions - Purchases - Refund - Remove from Cart - Revenue - Search - Share Content - Signup - Transaction - View Cart - View Items - Wishlist	- Login - Pageviews - Revenue - Product Clicks - Product Detail Impressions - Product Impressions - Purchases - Signup - Transaction - View Cart - View Items - Wishlist Note: If you have implemented SCA 2022.2 or later, your development team can add the following events in your data layer: - Add Payment Information - Add Shipping Information - Refund - Remove from Cart - Search - Share Content	- Pageviews - Purchases - Signup Note: If you have implemented SCA 2022.2, your development team can add the following events in your data layer: - Add Payment Information - Add Shipping Information - Refund - Remove from Cart - Search - Share Content Note: For implementations of SCA 2018.2 – 2022.2 using Google Analytics 4 with the Google Tag Manager Commerce Extension, review the data-layer structure of SCA version 2023.1 or later and compare it with your current version. With the release of SCA 2023.1, modifications were made in the data-layer code to comply with Google and correctly track information with Google Analytics events. For information about the suggested data-layer structure you should use, see the help topic Google Tag Manager Events Not Displaying in Data Layer Upon Checkout.	- Purchases - Pageviews - Signup
Google Universal Analytics			
- Add to Cart - Add to Wishlist - Guest Checkout - Login - Pageviews - Purchases - Signup	- Add to Cart - Add to Wishlist - Guest Checkout - Login - Pageviews - Purchases - Signup	- Add to Cart - Add to Wishlist - Guest Checkout - Login - Pageviews - Purchases - Signup	- Add to Cart - Add to Wishlist - Guest Checkout - Login - Pageviews - Purchases - Signup

SuiteCommerce SCA 2023.1.2 and Later	SCA 2023.1 and 2023.1.1	SCA 2018.2 – 2022.2	SCA Aconcagua and Earlier (Except Denali)
Google Universal Analytics Ecommerce			
- Purchases - Revenue	- Purchases - Revenue	- Purchases - Revenue	- Purchases - Revenue
Google Universal Analytics Enhanced Ecommerce			
- Add to cart - Checkout - Product clicks - Product detail impressions - Product impressions - Purchases	- Add to cart - Checkout - Product clicks - Product detail impressions - Product impressions - Purchases	- Add to cart - Checkout - Product clicks - Product detail impressions - Product impressions - Purchases	- Add to cart - Checkout - Product clicks - Product detail impressions - Product impressions - Purchases

Note: For implementations of SuiteCommerce Advanced (SCA) 2018.2 – 2022.2 using Google Analytics 4 with the Google Tag Manager Commerce Extension, review the data-layer structure of SCA version 2023.1 or later and compare it with your current version. With the release of SCA 2023.1, modifications were made in the data-layer code to comply with Google and correctly track information with Google Analytics events. For information about the suggested data-layer structure you should use, see the help topic [Google Tag Manager Events Not Displaying in Data Layer Upon Checkout](#).

Google Universal Analytics

Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4 and [Migrating from Google Universal Analytics to Google Analytics 4 with GTM](#) for information about migrating from GUA to GA4.

Google Universal Analytics (GUA) is a free web analytics service that tracks and reports website traffic. For additional information about this service, see marketingplatform.google.com/about/analytics.

To find your Google Analytics Tracking ID, see [Google Analytics Tracking ID](#).

Note: When adding the service in NetSuite, Google Universal Analytics is listed as Google Analytics.

GTM supports the following events for this service:

SuiteCommerce SuiteCommerce Advanced (2018.2 and Later)	SuiteCommerce Advanced (Aconcagua and Earlier)
Google Universal Analytics	
- Pageviews - Events	- Pageviews - Events

□ Purchases □ Guest Checkout □ Add to Cart □ Signup □ Login	□ Purchases □ Guest Checkout □ Add to Cart □ Signup □ Login
Google Universal Analytics Ecommerce	
■ Purchases ■ Revenue	■ Purchases ■ Revenue
Google Universal Analytics Enhanced Ecommerce	
■ Product impressions ■ Product clicks ■ Product detail impressions ■ Purchases ■ Add to cart ■ Checkout	■ Product impressions ■ Product clicks ■ Product detail impressions ■ Purchases

Google Optimize

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Google Optimize helps you optimize your website by testing changes to your layout, content and more. For additional information about this service, see [Optimize Overview](#).

To find your Google Optimize Container ID, see [Google Optimize Accounts and Containers](#).

GTM supports the Load Script event for this service:

Two tags are loaded on this event. One is the native Optimize tag which connects the Optimize Container ID and Analytics Tracking ID with your site. The second tag is Custom HTML with the following code:

```

1 <script>
2   dataLayer.push({'event': 'optimize.activate'});
3   Backbone.history.on('route', function () {
4     dataLayer.push({'event': 'optimize.activate'});
5   });
6 </script>
```

This code pushes the `optimize.activate` event each time you navigate and ensures every change is rendered on your page. Configure your Optimize Experiences Activation event as: Custom event: `optimize.activate`.

Facebook

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Facebook is a social networking and advertising service. This service uses a piece of code called a Facebook pixel that lets you measure, optimize, and build audiences for your ad campaigns. For additional information about this service, see facebook.com/business/learn/facebook-ads-pixel.

To find your Facebook Pixel ID, see [Facebook Pixel ID](#).

GTM supports the following events for this service:

- Add To Cart

- Add To Wishlist
- Complete Registration
- Initiate Checkout
- Load Script
- Page View
- Payment Info
- Purchase
- Search
- View Content

Hotjar

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Hotjar uses heatmaps and feedback and analysis tools to improve your website's user experience and performance/conversion rates. For additional information about this service, see hotjar.com.

To find your Hotjar Site ID, see [Installing Hotjar with Google Tag Manager](#) and go to Step 3. After you have activated the Hotjar service, you may need to wait a few minutes for Hotjar to detect the tracking code on your site.

GTM supports the SuiteCommerce — Load Script event for this service:

LiveChat

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

LiveChat lets you have a live online chat session with your site visitors. For additional information about this service, see livechatinc.com.

To find your LiveChat License ID, see [LiveChat License ID](#).

GTM supports the SC Load script > LChat (gtm.js) event for this service:

LivePerson

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

LivePerson provides customer engagement and conversational commerce applications and platforms. For additional information about this service, see liveperson.com

To get your LivePerson SiteID, contact your LivePerson account team representative. You can also get your LivePerson SiteID by creating, but not deploying, a LiveEngage tag. The SiteID is included in the generated tag. LivePerson Instructions about how to create the tag are provided here: [Add the LivePerson tag to your website](#). Remember to not deploy the tag—GTM Editor does this for you. A sample generated LiveEngage tag with the siteID is provided in this example code:

```
1 <!-- BEGIN LivePerson Monitor. -->
2 <script type="text/javascript"> window.lpTag=window.lpTag||{};if(typeof window.lpTag._tagCount==='undefined'){window.lpTag={site:'12345678'||'',section:lpTag.section||'',autoStart:lpTag.
```

GTM y supports the SuiteCommerce — Load Script event for this service:

Optimizely

Optimizely is a website experimentation platform that allows you to test changes to your website. For additional information about this service, see optimizely.com.

To find your Optimizely Project ID, see [Optimizely Project ID](#)

GTM supports the following events for this service:

SuiteCommerce SuiteCommerce Advanced (2018.2 and Later)	SuiteCommerce Advanced (Aconcagua and Earlier)
- pageView - Transaction	- pageView - Transaction

Privy

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Privy uses highly-targeted popups, banners, bars, flyouts, and email automation to grow your email lists and increase online sales. For additional information about this service, see privy.com.

To find your Privy Account ID, see [Privy Account ID](#).

GTM supports the Privy Load Script > SuiteCommerce Load Script event for this service:

ShareASale

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

ShareASale is an Affiliate Marketing platform. For additional information about this service, see shareasale.com

To find your ShareASale Merchant ID, log in to your ShareASale account. Your Merchant ID (xxxxx) is located on your ShareASale account page.

GTM supports the SuiteCommerce — Transaction event for this service:

Talkable

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Talkable enables you to build, launch, track, test, and analyze referral marketing programs. For additional information about this service, see talkable.com.

To find your Talkable Site ID, see [Talkable Site ID](#).

GTM supports the following events for this service:

- **Page View** – Triggers the SuiteCommerce – Talkable General tag.
- **Transaction** – Triggers the SuiteCommerce – Talkable Post Purchase tag.

Visual Web Optimizer

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Visual Web Optimizer provides a conversion optimization platform for visitor research, A/B testing, and personalization. For additional information about this service, see vwo.com.

To find your VWO Account ID, see [VWO Account ID](#).

GTM supports the PageView event for this service:

Zendesk Chat

This service only applies to SuiteCommerce and SuiteCommerce Advanced 2018.2 and later.

Zendesk Chat is a live chat and messaging service that lets you engage with customers over websites, mobile apps, and popular messaging apps such as Facebook Messenger, Twitter, and LINE. For additional information about this service, see zendesk.com/chat.

To find your ZenDesk Account ID, see [Adding the Zendesk Chat widget to your website](#). Your Zendesk Account ID is a 32-digit sequence that is included in the Web Widget snippet.



GTM supports the SuiteCommerce — Load Script event for this service:

Migrating from Google Universal Analytics to Google Analytics 4 with GTM

Applies to: SuiteCommerce | SuiteCommerce Advanced

Note: For information about migrating from Google Universal Analytics (GUA) to Google Analytics 4 (GA4) without Google Tag Manager (GTM), see [Migrating from Google Universal Analytics to Google Analytics 4](#).

Google will end data collection for the GUA service on July 1, 2023. You will no longer be able to use GUA to analyze new data, such as new visitor data to your NetSuite Commerce web store. Migrate to GA4 to continue using Google's analytics services to collect new data on your Commerce website.

Note: You will still be able to analyze existing data you gathered through GUA for an additional six months from July 1, 2023.

To migrate from GUA to GA4 (SuiteCommerce, SuiteCommerce My Account, SuiteCommerce Advanced 2018.2 and later):

1. Log in to your Google Analytics account and set up GA4. See [Migrating from GUA to GA4 in Your Google Analytics Account](#).
2. Ensure you have installed the bundle for the latest SuiteCommerce GTM Editor extension. See the help topic [Commerce Extensions](#) for the latest bundle ID and [Installing Theme and Extension SuiteApps](#) for information about installing Commerce Extension SuiteApps.
3. Implement GA4 using GTM by adding the GA4 service to the GTM Editor. See [Modify Google Tag Manager Services](#) for information about implementing GA4 using GTM and the SuiteCommerce Google Tag Manager Editor extension.

Note: For implementations of SuiteCommerce Advanced (SCA) 2018.2 – 2022.2 using Google Analytics 4 with the Google Tag Manager Commerce Extension, review the data-layer structure of SCA version 2023.1 or later and compare it with your current version. With the release of SCA 2023.1, modifications were made in the data-layer code to comply with Google and correctly track information with Google Analytics events. For information about the suggested data-layer structure you should use, see the help topic [Google Tag Manager Events Not Displaying in Data Layer Upon Checkout](#).

To migrate from GUA to GA4 (SuiteCommerce Advanced Mont Blanc, Vinson, Elbrus, Kilimanjaro, and Aconcagua):

1. Log in to your Google Analytics account and set up GA4. See [Migrating from GUA to GA4 in Your Google Analytics Account](#).
2. Confirm you have correctly configured GTM for your SCA implementation. See [Set Up Google Tag Manager \(SuiteCommerce Advanced Aconcagua and Earlier\)](#) for information about implementing GA4 using GTM and the SuiteCommerce Google Tag Manager container generator.

To migrate from GUA to GA4 (SuiteCommerce Advanced Denali, ShopFlow, and Site Builder):

1. Log in to your Google Analytics account and set up GA4. See [Migrating from GUA to GA4 in Your Google Analytics Account](#).
2. GTM isn't available for sites built on SCA Denali and earlier, ShopFlow, or Site Builder. To implement GA4 on these sites, your development team will need to customize your site's code.
For SCA Denali and earlier, your development team can add Google Analytics events in your data layer. See the help topic [Enable Google Analytics 4 \(Denali – Mont Blanc\)](#).
See [Google Analytics with ShopFlow and Site Builder](#) for information about implementing Google Analytics on a Site Builder website.

Migrating from GUA to GA4 in Your Google Analytics Account

If you're already using GTM for your Commerce website, most of the steps you must take will need to be performed in your Google Analytics account. To install GTM, see [Set Up Google Tag Manager](#).

See the following Google support topics for information about migrating from GUA to GA4:

- [Migrate from Universal Analytics to Google Analytics 4](#) – Table of contents.
- [Make the switch to Google Analytics 4](#) – Instructions about getting started and finishing the migration to GA4.
- [Comparing metrics: Google Analytics 4 vs Universal Analytics](#) – Information about comparing metrics between GA4 and GUA.
- [Migration reference](#) – Instructions about identifying the GA4 functionality you need to migrate.

 **Note:** You will not be able to import data collected in GUA into GA4.

- [Universal Analytics view-related features in Google Analytics 4 properties](#) – A side-by-side list of configurations and features associated with reporting views in GUA and GA4.
- [Data collection and tagging](#) – Information about data collection and tagging.
- [Google Ads links migration tool](#) – Instructions about migrating your GUA property's Google Ads links to your GA4 property.
- [Goals migration tool](#) – Information about the goals migration tool which lets you recreate eligible goals from your connected GUA property as conversion events in your GA4 property.
- [User migration tool](#) – Information about the user migration tool which lets you migrate your GUA users to your GA4 property.
- [Event migration guide](#) – Information about migrating your existing events from a GUA property to a GA4 property.
- [Goal and conversion migration guide](#) – Information about replicating your GUA goals and conversions in GA4.
- [Audiences migration guide](#) – Information about migrating audiences from your GUA property to your GA4 property.

- [How to check property type](#) – Instructions about how to identify if you have a GAU property or a GA4 property.

Tracked Events

Applies to: SuiteCommerce | SuiteCommerce Advanced

The following topics provide helpful information about the differences between events tracked by Google Tag Manager (GTM) and Google Analytics 4 (GA4), and by different Commerce web store implementations:

- [Tracked Events in Web Store Implementations with GTM](#)
- [Tracked Events in Google Tag Manager Versus Google Analytics 4](#)

Tracked Events in Web Store Implementations with GTM

Note: For implementations of SuiteCommerce Advanced (SCA) 2018.2 – 2022.2 using Google Analytics 4 with the Google Tag Manager Commerce Extension, review the data-layer structure of SCA version 2023.1 or later and compare it with your current version. With the release of SCA 2023.1, modifications were made in the data-layer code to comply with Google and correctly track information with Google Analytics events. For information about the suggested data-layer structure you should use, see the help topic [Google Tag Manager Events Not Displaying in Data Layer Upon Checkout](#).

The following table lists the standard events tracked by your web store implementation after you have enabled the GTM feature:

Event	SCA 2023.1.2 and Later	SCA 2023.1 and 2023.1.1	SCA 2018.2 - 2022.2	SCA Aconcagua and Earlier
action (reorder click, reorder list, create-account)	✓	✓	✓	✓
Note: The create-account event is used when a guest shopper is on the Checkout page and decides to create an account. The shopper becomes a registered user and is no longer a guest shopper.				
add_payment_info	✓	-	-	-
add_shipping_info	✓	-	-	-
addToCart	✓	✓	✓	-
addToWishlist	✓	✓	✓	-
cartUpdate	✓	✓	✓	-
cartView	✓	✓	✓	-
checkoutAsGuest	✓	✓	✓	-
checkoutView	✓	✓	✓	-

homeView	✓	✓	✓	-
login	✓	✓	✓	-
nonEcommercePageView	✓	✓	✓	-
pageView	✓	✓	✓	✓
proceedToCheckout	✓	✓	✓	-
productList	✓	✓	✓	✓
register	✓	✓	✓	-
revenue	✓	✓	-	-
selectPayment	✓	✓	✓	-
productClick	✓	✓	✓	-
productListEvent	✓	✓	✓	-
productView	✓	✓	✓	-
refund	✓	-	-	-
remove_from_cart	✓	-	-	-
search	✓	-	-	-
searchResults	✓	✓	✓	-
share	✓	-	-	-
transaction	✓	✓	✓	✓

Tracked Events in Google Tag Manager Versus Google Analytics 4

The following table lists the differences between the events tracked in the Google Analytics 4 (GA4) component of Google Tag Manager (GTM) and GA4 when it's used without GTM:

Event	GA4 with GTM	GA4 without GTM
action (reorder click, reorder list, create-account)	✓	✓
Note: The create-account event is used when a guest shopper is on the Checkout page and decides to create an account. The shopper becomes a registered user and is no longer a guest shopper.		
add_payment_info	✓	-
add_shipping_info	✓	-
addToCart	✓	-

addToWishlist	✓	-
cartUpdate	✓	-
cartView	✓	-
checkoutAsGuest	✓	✓
checkoutView	✓	-
homeView	✓	-
login	✓	✓
nonEcommercePageView	✓	-
pageView	✓	✓
proceedToCheckout	✓	-
productClick	✓	-
productList	✓	-
productListEvent	✓	-
productView	✓	-
refund	✓	-
register	✓	✓
remove_from_cart	✓	-
selectPayment	✓	-
search	✓	-
searchResults	✓	-
share	✓	-
transaction	✓	✓

Set Up Google Tag Manager (SuiteCommerce Advanced Aconcagua and Earlier)

i Applies to: SuiteCommerce | SuiteCommerce Advanced

This feature isn't available on the Denali release of SuiteCommerce Advanced.

Follow these steps to set up Google Tag Manager (GTM):

- [Sign Up for Google Tag Manager.](#)
- [Add Your Google Tag Manager ID to Your Configuration Record.](#)
- [Google Tag Manager Container Generator.](#)


- Import the JSON file into your Google Tag Manager container.

Sign Up for Google Tag Manager


When you sign up for your GTM account, Google creates your GTM account and a container to hold your tags, triggers, variables, macros, and rules.

To sign up for a Google Tag Manager account:

1. Go to <https://www.google.com/analytics/tag-manager/>.
2. Sign in to GTM with your Google ID logins.
3. GTM displays the Add a New Account page.
4. Enter the name for your account. Normally this will be the site or business name.
5. Select your country from the dropdown **Country** selector.
6. Click **Continue**.
7. In the **Container Name** field, enter your site name, for example **www.mysite.com**.
8. For **Where to Use Container**, click **Web** to select it.
9. Click **Create**.
10. Agree to the Google Tag Manager Terms of Service.
11. This displays the Install Google Tag Manager popup window which lists the code that can be placed on your web pages. Close this popup window because you do not need the code. The GTM Module places the code on your pages for you.
12. On the Workspace tab, your GTM ID is displayed in the submenu header area in the upper right portion of the page. Make a note of this ID because you need it for the configuration. See [Add Your Google Tag Manager ID to Your Configuration Record](#).

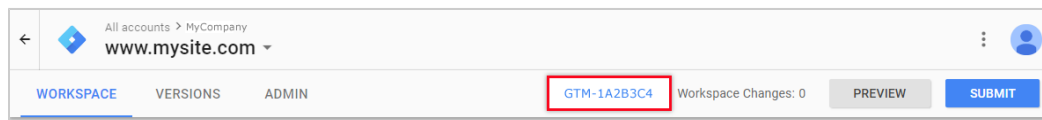


13. Next you need the Account ID. Click on the **Admin** tab, then click **Account Settings**. Make a note of your Account ID because you need it when you create the GTM import JSON file.

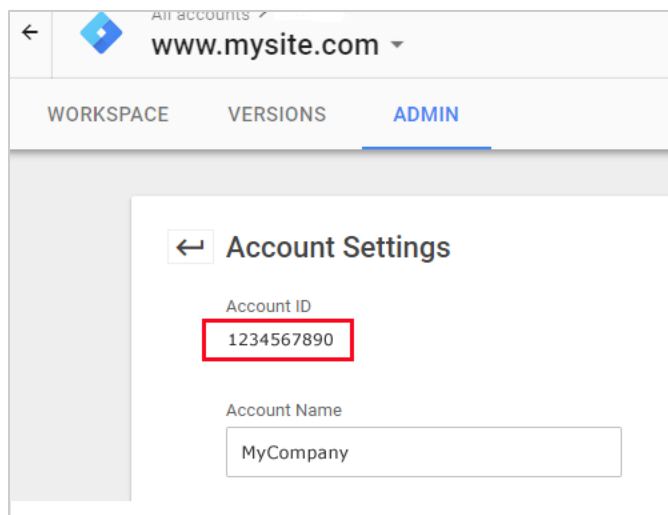

Note: You can also find the Account ID in the URL.

See [Google Tag Manager Container Generator](#).

14. The final ID you need is the container ID, which is available in the URL. You need this ID when you create the GTM import JSON file. See [Google Tag Manager Container Generator](#).

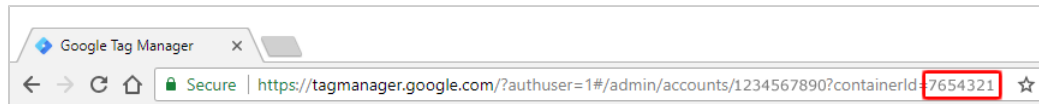

Add Your Google Tag Manager ID to Your Configuration Record

Add your GTM ID to your Suite Commerce Configuration Record to integrate GTM with your NetSuite account.

To add your Google Tag Manager ID to your configuration record:

1. Go to Commerce > Web Sites > Configuration.
2. Select your website and domain and click **Continue**.
3. In the Commerce configuration record, go to the **Integrations** tab and the **Google Tag Manager** subtab.
4. Enter your GTM ID in the **Google Tag Manager ID** field. Leave the **Google Tag Manager Data Name** field set to the default value of **dataLayer**.
For more information, see the help topic [Google Tag Manager Subtab](#).
5. Click **Save**.

To configure Google Tag Manager (pre-Vinson):

1. Create a custom module that includes the SC.Configuration object as a dependency.

Note: Do not edit the original SC.Configuration.js source file directly. See the help topic [Develop Your SCA Customization](#) for information and best practices on customizing JavaScript.

2. Redefine the id property for googleTagManager object to the Google Tag Manager ID.

Google Tag Manager Container Generator

To assist you in the process of adding tags to your GTM container, the GTM Container Generator enables you to create a JSON file you can use for importing the tags for the supported GTM services. This JSON file can then be imported into your GTM container, eliminating the need for you to manually add tags for supported services.

Note: See [Finding IDs for Different Tags](#) for information about finding specific IDs requested by GTM Container Generator.

To create the Google Tag Manager Import JSON file:


1. Go to [Generate a Google Tag Manager Container](#).
 2. In the **GTM Account ID** field, enter the number you retrieved from the GTM URL.
 3. In the **GTM Container ID** field, enter the container number you retrieved from the GTM URL.
 4. Select the services you want to add.
 - Check the **Google Ads** box to include Google Ads tags in the JSON file.
 - Enter your Conversion ID. See [To find your Google Ads Conversion ID and Label](#).
 - Enter the Conversion Label. See [To find your Google Ads Conversion ID and Label](#).
 - Check the **Google Analytics 4** box to include Google Analytics 4 (GA4) tags in the JSON file.
 - Enter your GA4 Tracking ID. See [What happened to my Tracking ID?](#) to find your Tracking ID.
 - Enter your GA4 Cross Domains. For cross domains, enter your main domain and your NetSuite checkout domain. If you use a subdomain for checkout instead of the NetSuite checkout domain, you can leave this field empty.
-  **Important:** Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024.
- Check **Bing Ads** to include Bing Ads tags in the JSON file
 - Enter your Conversion ID. See [To find your Bing Ads Conversion ID](#).
 - Check the **Optimizely** box to include Optimizely tags in the JSON file.
 - Enter your Optimizely Project ID. See [To find your Optimizely Project ID](#).
5. Click **Download**. This creates the JSON file and downloads it to your computer. The file is named `SCA.GoogleTagManager.json` and it's saved to your browser's default download location.

Import the JSON file into your Google Tag Manager container


After you create your GTM Import JSON file, import the JSON file into your GTM container. This creates the tags, triggers, and variables for your site.

To import the JSON file into your GTM container:

1. Log in to your Google Tag Manager account.
2. Click the **Admin** tab.
3. Click **Import Container**.

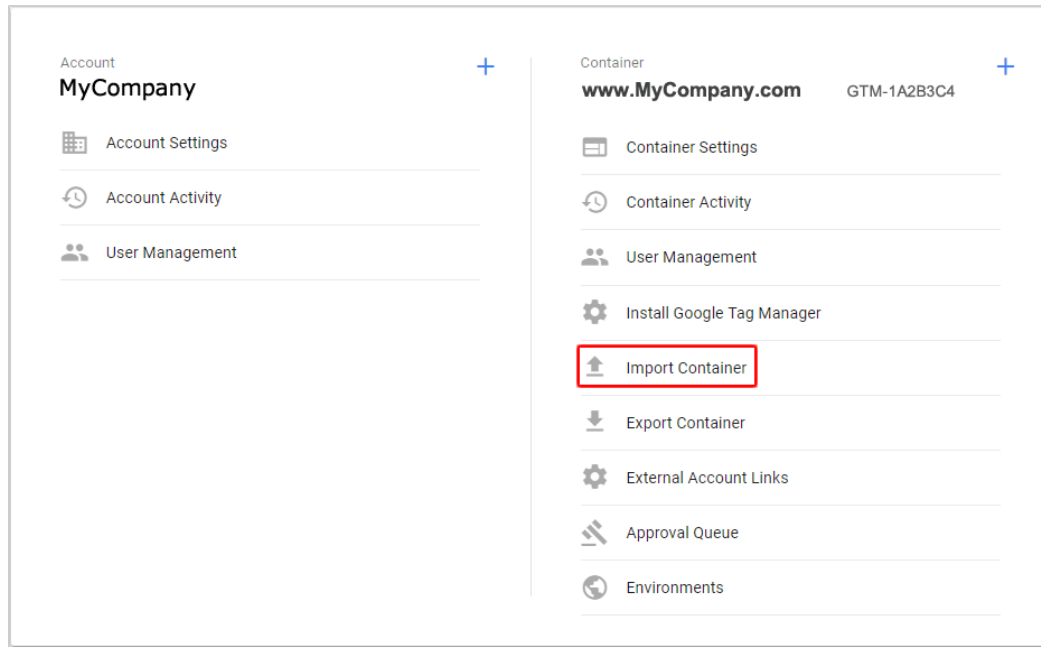

4. This displays the Import Container page. Click **Import Container** and browse to the SCA.GoogleTagManager.json file and select it.

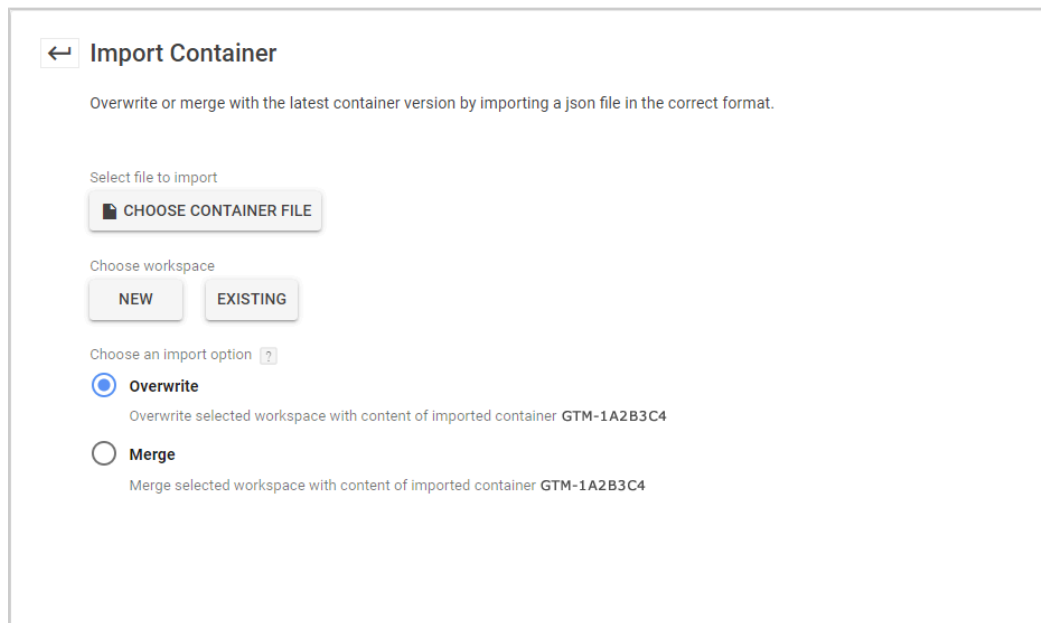

- Select **Overwrite** to overwrite any existing tags with the new tags in the JSON file.
 - Select **Merge** to merge the new tags in the JSON file with any existing tags in the container. If you select this option, specify the following sub options:
 - Overwrite conflicting tags, triggers, and variables.
 - Rename conflicting tags, triggers, and variables.
5. Click **Confirm**. This imports the JSON file and lets you preview the tags, triggers, and variables it contains.

Import Container

Overwrite or merge with the latest container version by importing a json file in the correct format.

Select file to import

SCA.GOOGLETAGMANAGER.JSON

Choose workspace

DEFAULT WORKSPACE

Choose an import option ?

☒ **Overwrite**
Overwrite selected workspace with content of imported container **GTM-1A2B3C4**

☐ **Merge**
Merge selected workspace with content of imported container **GTM-1A2B3C4**

Preview and confirm your import

Tags			Triggers			Variables		
0	0	0	0	0	0	5	0	5
New	Modified	Deleted	New	Modified	Deleted	New	Modified	Deleted

[View Detailed Changes](#)

CONFIRM **CANCEL**

- Click **Confirm** to complete the import.

Note: After you import the JSON file, publish the container to make the changes live. See the [Publishing, versions, and approvals](#) topic on Google's support site in [Tag Manager Help](#) for more information.

Finding IDs for Different Tags

When you use the GTM Container Generator to create a GTM JSON file, you're asked to provide certain data elements that will be used when creating the tags for the services you select. The following procedures serve as a reference for locating those required data elements.

Note: Do not implement the Google Analytics 4 (GA4) or Google Universal Analytics (GUA) features if you use GA4 or GUA in GTM because this causes duplicate tracking results.


To find your Google Analytics 4 ID:

- Follow the instructions in the Google support topic, [What happened to my Tracking ID?](#) to find your Google Analytics ID, which is referred to as the Tracking ID.

2. See [Set Up Analytics Account and Google Analytics 4 Property](#) for more information about setting up a GA4 account with Google and finding your Tracking and Property IDs.

To find your Google Universal Analytics ID:

1. Login to your Google Universal Analytics account at <https://www.google.com/analytics/>.
2. Click the Home tab. The UA ID is displayed next to the property name under your account.

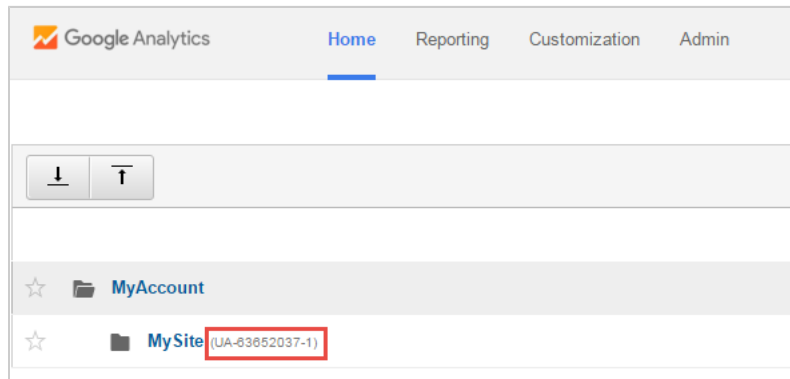

To find your Google Ads Conversion ID and Label:

1. Create a conversion in Tools > Conversions.
2. Specify your preferences and Google displays your code snippet. It includes the Conversion ID and label.



View UET tag tracking code

Click **Copy** and then paste the UET tag tracking code into every page of your website. [Learn how to do this?](#)

If you want to do this later or keep a copy, you can send it in email or download it.

If your website doesn't support JavaScript, click the Non-JavaScript tab and repeat the steps above. If you use Non-JavaScript, you can't track custom events or variable revenue. [Learn more](#)

Name: Conversion

ID: 5060613

JavaScript

Non-JavaScript

```
<script>(function(w,d,t,r,u){var f,n,i;w[u]=w[u]||[],f=function(){var o={ti:"5060613"};o.q=w[u],w[u]=new UET(o),w[u].push("pageLoad")},n=d.createElement(t),n.src=r,n.async=1,n.onload=n.onreadystatechange=function(){var s=this.readyState;s&&s!=="loaded"&&s!=="complete"&&(f(),n.onload=n.onreadystatechange=null)},i=d.getElementsByTagName(t)[0].parentNode.insertBefore(n,i))(window,document,"script","//bat.bing.com/bat.js","uetq");</script><noscript></noscript>
```

Copy


Download

Email

Done

To find your Optimizely Project ID:

- When you finish your experiment, the project ID is available in the URL.

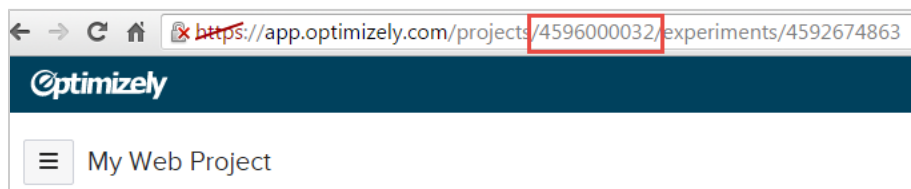

Google Analytics 4

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Google Analytics 4 (GA4) is a third-party analytics solution that helps you evaluate traffic on your website using data based on visitor tracking information.

Note: The URL for parent and child matrix items is the same and will be tracked as such by GA4.

GA4 is available in the following Commerce web store implementations:

Commerce Solution	Versions	Applications	More Information
SuiteCommerce	All	Shopping	Enable Google Analytics 4 in NetSuite

Commerce Solution	Versions	Applications	More Information
		Checkout My Account	
Suite Commerce Advanced (SCA)	2022.2 and later	Shopping Checkout My Account	Enable Google Analytics 4 in NetSuite
	2022.1 2021.2 2021.1 2020.2 2020.1 2019.2	Shopping Checkout My Account	Customization required. See the help topic Enable Google Analytics 4 (SCA 2019.2 – 2022.1) .
	2019.1 2018.2 Aconcagua Kilimanjaro Elbrus Vinson	Shopping Checkout My Account	Customization required. See the help topic Enable Google Analytics 4 (SCA Vinson – 2019.1) .
	Mont Blanc Denali	Shopping Checkout My Account	Customization required. See the help topic Enable Google Analytics 4 (Denali – Mont Blanc) .
	Pre-Denali	GA4 is not supported in pre-Denali SCA implementations. To implement GA4 on these sites, your development team will need to customize your site's code and add Google Analytics events in your data layer.	
ShopFlow Site Builder	All	Reference ShopFlow Site Builder, Reference Checkout Site Builder, Reference Checkout, External Site (WSDK)	ShopFlow and Site Builder only support basic Google Analytics functionality. See Google Analytics with ShopFlow and Site Builder .

To track visitor activity on your site, GA4 can be implemented in the shopping, checkout, and My Account areas of your Commerce web site.

After GA4 is enabled and configured, each page hit in the shopping area of your website is tracked. In the checkout area of your website, each item in the cart is tracked. When an order is completed, details of the order such as store name, shipping, state, and country are also tracked.

Note: Do not implement GA4 if you use GA4 with Google Tag Manager (GTM). Doing so causes duplicate tracking results. See [Google Tag Manager](#) for information about GTM. See [Tracked Events in Google Tag Manager Versus Google Analytics 4](#) for information about the differences between the events tracked in the GA4 component of GTM and GA4 when it is used without GTM.

Configuring Google Analytics 4

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

To use Google Analytics 4 (GA4), you must have an Analytics account and a GA4 property defined for the website you want to track. When you create your account and property, GA4 assigns a unique tracking ID for the property. Use the Tracking ID to implement GA4 on your Commerce website.

In your GA4 account, set up a data stream to start collecting data. See the following help topics for information about configuring GA4 for your Commerce website:

- [Set Up Analytics Account and Google Analytics 4 Property](#)
- [Set Up Ecommerce Measurement with Google Analytics 4](#)
- [Define Unwanted Referrals](#)
- [Set Up Site Search](#)
- [Enable Google Analytics 4 in NetSuite](#)
- [Google Analytics 4 Conversion Events](#)

Set Up Analytics Account and Google Analytics 4 Property

If you don't have an Analytics account and GA4 property, use the following procedure to create them. If you already have an Analytics account and GA4 property, follow the instructions in the Google support topic, [What happened to my Tracking ID?](#) to find your Tracking ID.

To set up your Analytics account, follow the instructions provided on Google's support website. See [Get started with data analytics](#).

To create a new GA4 property, follow the instructions provided on Google's support website. See [Create a new Google Analytics 4 property](#).

Set Up Ecommerce Measurement with Google Analytics 4

For GA4 to measure ecommerce activity, set up ecommerce events in your Analytics account to collect information about the shopping behavior of your users. Follow the instructions provided in Google's developer documentation to set up ecommerce events. See [Measure ecommerce](#).

Define Unwanted Referrals

GA4 lets you block referring domains by setting up unwanted referrals, also called referral exclusions. These exclusions help make referral traffic reporting more accurate.

Referral exclusions are useful if you use a third-party shopping cart. With a third-party shopping cart, shoppers are sent to a third-party site to check out and then brought back to your site after checkout. If you don't set up the unwanted referral, the first session ends when visitors are sent to the third-party site, and a new session starts when they return to your site after checkout. Coming back to your site is counted as a referral from the third-party site, so the session count gets skewed because the first session didn't track the entire transaction.

When you set up an unwanted referral, the same session is used from start to finish, giving you more accurate referral traffic results.

If you're using NetSuite as your checkout domain, it's important to set a referral exclusion for the shopping domain. If you don't create the referral exclusion, the shopping domain shows as a self-referral and skews your data.

Note: If you use a single secure domain for checkout and shopping, there is no need to create referral exclusions. Referral exclusions are necessary only when the checkout and shopping domains are different. See the help topic [Set Up Domains for Web Stores](#).

For more information about unwanted referrals, including instructions on how to configure them on your Analytics account, go to [Identify unwanted referrals](#) on the Google support site.

Set Up Site Search

Site Search lets you understand the extent to which users took advantage of your website's search function, which search terms they entered, and how effectively the search results created deeper engagement with your site.

For more information about Site Search, including instructions on how to set up Site Search, go to [Set up Site Search](#) on the Google support site.

Enable Google Analytics 4 in NetSuite

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

To set up Google Analytics 4 (GA4) on your Commerce website, you'll need to enter your GA4 account details in NetSuite.

For information about configuring your Commerce website using the SuiteCommerce Configuration record, see the help topic [Configure Properties](#).

To enable GA4 in NetSuite:

1. Go to Commerce > Websites > Configuration.
2. Select your website and domain and click **Configure**.
3. Go to the **Integrations** tab and the **Google Analytics 4** subtab.
4. Set feature properties as required. For more information about each configurable property, see the help topic [Google Analytics 4 Subtab](#).
5. Click **Save**.

Google Analytics 4 Conversion Events

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

In Google Analytics 4 (GA4), goals are tracked using conversion events.

Conversion events are an important GA4 tool for tracking completed activities. For a Commerce website, the most common goal is for a visitor to make a purchase. Another goal may be for a visitor to sign up to a newsletter.

When you set up conversion events, GA4 can give you tracking info like conversion counts, rates, and which campaigns got you the highest conversion rate.

There are two types of goals: macro and micro. A macro goal is the final outcome, such as a visitor making a purchase. Macro goals are made up of micro goals. Micro goals are the activities that a visitor completes before converting. Micro goals can include reviewing product details or reading product reviews.

For more information about conversion events, go to [Set up and manage conversion events](#) on the Google support site.

Funnels

Funnels show the path that traffic should take to final conversion. Funnel exploration lets GA4 track where visitors enter and exit your website.

For example, if you notice a lot of traffic leaving your site at the same spot before conversion, you can review and improve that location to help increase conversions. You might also see traffic skipping certain areas on the way to conversion, which could mean your conversion path is too long. This information can help you streamline your website and drive more conversions.

For more information about funnels, including instructions on how to create a funnel exploration, go to [Funnel exploration](#) on the Google support site.

Migrating from Google Universal Analytics to Google Analytics 4

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Google will end data collection for the Google Universal Analytics (GUA) service on July 1, 2023. You won't be able to use GUA to analyze new data, such as new visitor data for your NetSuite Commerce web store. Switch to Google Analytics 4 (GA4) to collect new data on your Commerce website.

i Note: You will still be able to analyze existing data you gathered through GUA for an additional six months from July 1, 2023.

The following Google support topics provide helpful information about migrating from GUA to GA4:

- [Migrate from Universal Analytics to Google Analytics 4](#) – Table of contents.
- [Make the switch to Google Analytics 4](#) – Instructions about getting started and finishing the migration to GA4.
- [Comparing metrics: Google Analytics 4 vs Universal Analytics](#) – Information about comparing metrics between GA4 and GUA.
- [Migration reference](#) – Instructions about identifying the GA4 functionality you need to migrate.

i Note: You will not be able to import data collected in GUA into GA4.

- [Universal Analytics view-related features in Google Analytics 4 properties](#) – A side-by-side list of configurations and features associated with reporting views in GUA and GA4.
- [Data collection and tagging](#) – Information about data collection and tagging.
- [Google Ads links migration tool](#) – Instructions about migrating your GUA property's Google Ads links to your GA4 property.

- [Goals migration tool](#) – Information about the goals migration tool which lets you recreate eligible goals from your connected GUA property as conversion events in your GA4 property.
- [User migration tool](#) – Information about the user migration tool which lets you migrate your GUA users to your GA4 property.
- [Event migration guide](#) – Information about migrating your existing events from a GUA property to a GA4 property.
- [Goal and conversion migration guide](#) – Information about replicating your GUA goals and conversions in GA4.
- [Audiences migration guide](#) – Information about migrating audiences from your GUA property to your GA4 property.
- [How to check property type](#) – Instructions about how to identify if you have a GAU property or a GA4 property.

Note: Do not follow these steps if you use GUA with Google Tag Manager (GTM). Doing so causes duplicate tracking results. See [Migrating from Google Universal Analytics to Google Analytics 4 with GTM](#) for information about migrating to GA4 with GTM.

To migrate from GUA to GA4:

1. Configure GA4 in your Google Analytics account. See [Configuring Google Analytics 4](#) for instructions, including how to set up a Google Analytics account and create an GA4 property.
2. Enable GA4 in NetSuite to implement GA4 on your Commerce website. See [Enable Google Analytics 4 in NetSuite](#).
3. Set up conversion events and funnels in your Google Analytics account. See [Google Analytics 4 Conversion Events](#).

Note: To migrate from GUA to GA4 on pre-2022.1 implementations of SuiteCommerce Advanced, first you need to enable GA4. See the help topic [Guide to Enable Google Analytics 4](#) for instructions.

Google Analytics with ShopFlow and Site Builder

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

ShopFlow and Site Builder only support basic Google Analytics features, such as page hits and geolocation data. Site Builder doesn't have a data layer that supports Google Universal Analytics or Google Analytics 4 (GA4) so advanced tracking, like e-commerce tracking, is not possible.

To implement Google Analytics on a Site Builder website, see the following help topics:

- [Configure Google Analytics 4 for ShopFlow and Site Builder](#)
- [Add GA4 Tracking Code to ShopFlow and Site Builder](#)
- [Enable GA4 for Checkout](#)
- [GA4 with Site Builder with SiteBuilder Extensions and an External Site](#)

Configure Google Analytics 4 for ShopFlow and Site Builder

See the following topics for information about setting up a GA4 account for your Site Builder site:

- [Set Up Analytics Account and Google Analytics 4 Property](#)

- [Set Up Ecommerce Measurement with Google Analytics 4](#)
- [Define Unwanted Referrals](#)
- [Set Up Site Search](#)

Add GA4 Tracking Code to ShopFlow and Site Builder

Add the code snippet from Google Tag Manager (GTM) or GA4 in the **Addition to <head>** field on the Analytics tab of the website setup record for all your websites.

If you're already using GTM, you may not need to replace any code snippets. You will need to add the new service to GTM.

To add the GA4 tracking code to Site Builder:

1. Go to Commerce > Websites > Website List.
2. Click the **Edit** link for next to your Site Builder Site.
3. Go to the **Analytics** tab.
4. Paste the GTM or GA4 code snippet, including your GA4 tracking code, into the **Addition to <head>** field.

The following example shows what your code snippet might look like:

Website Setup

Save Cancel New Website

Display Name *
Demo: Blank US OneWorld Account

Internal Name *
Demo: Blank US OneWorld Account

☐ Take Website Offline for Maintenance

☐ Inactive
Type
Site Builder

Setup Appearance Shopping **Analytics** Cart Search Email Upsell Advanced External Touch Points Dgmains System Notes

Analytics Integration

Addition to <head>

```
<!-- Global site tag (gtag.js) - Google Analytics -->
<script async src="https://www.google-analytics.com/gtag.js?id=G-24PFDLY6ZB"></script>
<script>
  window.dataLayer = window.dataLayer || [];
  function gtag(){dataLayer.push(arguments)}
  gtag('js', new Date());
  gtag('config', 'G-24PFDLY6ZB');
</script>
```

Analytics Click Attributes

Analytics Submit Attributes

Save Cancel New Website

Order Confirmation Page

Order Tracking Script HTML

Third-Party Analytics

☒ Enable Google Analytics Integration

5. Check the **Enable Google Analytics Integration** box.
6. Click **Save**.
7. Repeat steps 1 through 7 for all your websites.

Enable GA4 for Checkout

If you want to use Site Builder with Checkout, enable GA4 in the checkout application by setting your GA4 tracking ID and checkout domain. Once it's set up, GA4 enables you to track website activities from your homepage to your purchase confirmation page.

To enable GA4 for checkout:

1. Go to Commerce > Websites > Configuration.
2. Select your website and domain and click **Configure**.
3. Go to the **Integrations** tab and the **Google Analytics 4** subtab.
4. Set feature properties as required. For more information about each configurable property, see the help topic [Google Analytics 4 Subtab](#).
5. Click **Save**.

GA4 with Site Builder with SiteBuilder Extensions and an External Site

If you're using an External Site (WSDK) with your Site Builder with SiteBuilder Extensions website, place the same GA4 tracking code on your external site that you put in the Site Builder site setup record. Since the external site is a third-party site, how you add the tracking code on your website depends on how and where your third-party site is hosted. You need to place the tracking code on your site before the closing `</head>` tag.

Many content management systems offer an **addition to head** option for this purpose. Ideally, **addition to head** is at the site level, so the tracking code is automatically placed to every page. Sometimes, **addition to head** is at the page level, so you'll need to place the tracking code on all pages.

Google Universal Analytics

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced



Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4, including information about migrating from GUA to GA4.

Google Universal Analytics is a third party analytics solution that can help you evaluate traffic on your website using data based on visitor tracking information.



Note: The URL for parent and child matrix items is the same and will be tracked as the same by Google Universal Analytics.

To track visitor activity on your site, Google Universal Analytics can be implemented in the following areas:

- **Commerce Web Stores**—Shopping, Checkout, and My Account. See [GUA in Commerce Web Stores](#).
- **Site Builder**—Site Builder and Reference Checkout. See [GUA for Site Builder with Site Builder Extensions](#).
- **External Catalog (WSDK)**—In conjunction with your Site Builder site and Reference Checkout, you can also implement GUA on the External site for seamless GUA tracking. See [Step 5: GUA with Site Builder with Site Builder Extensions and an External Site \(WSDK\)](#)

After Google Analytics is enabled and configured, each page hit in the shopping area of your site is tracked. For the checkout area of the site, each item in the cart is tracked. When the order is completed, details of the order such as store name, shipping, state, country, and so forth are also tracked.

Note: Do not implement the Google Universal Analytics module if you use Google Universal Analytics in Google Tag Manager because this causes duplicate tracking results. See [Google Tag Manager](#) for more information about Google Tag Manager.

Configuring GUA

Applies to: SuiteCommerce | SuiteCommerce Advanced

Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4, including information about migrating from GUA to GA4.

To use Google Universal Analytics (GUA), you must have a GUA account and a website property defined for the website you want to track. When you create the account and property, GUA assigns you a unique tracking ID for the property and generates the tracking code. You use the tracking ID for implementing GUA. For Site Builder and External Sites, the tracking code is placed on the pages of external sites and in your Site Builder website setup record.

In your GUA account, enable ecommerce tracking and defining referral exclusions. See the following help topics for GUA configuration information:

- [Set Up GUA Account and Website Property](#)
- [Set as Ecommerce Site](#)
- [Define Referral Exclusions](#)
- [Set Up Site Search](#)
- [Enable GUA in NetSuite](#)
- [GUA Goals](#)


Set Up GUA Account and Website Property

If you do not have a GUA account and website property, use the following procedure to create them. If you already have a GUA account, see [Step 1: Retrieve Tracking Code from an Existing GUA Account](#) for instructions on retrieving your GUA Tracking ID and tracking code if needed.

To set up your GUA account:

1. Go to <https://www.google.com/analytics>.
2. Click the **Sign in** link and choose **Google Analytics**.
3. Click the **Sign up** button.
4. Click **Admin** to go to the Analytics administrative features.
5. In the Account column, click **Create Account**.
6. Enter your account name in the **Account Name** field.
7. Configure the **Account Data Sharing Settings** to control the data you share with Google.
8. Click **Next** to add a property to your account.
9. Enter a name for the property in the **Property Name** field and select the reporting time zone and currency.
10. Click **Show Advanced Options** and set the **Create a Universal Analytics Property** switch to On.

11. Enter your website in the **Website URL** field.
12. Check the **Create a Universal Analytics Property Only** box.
13. Click **Next** to provide information about your business.
14. Click **Create**.
15. Accept the terms of service and click **Finish**. The information for your new account and website property appear.

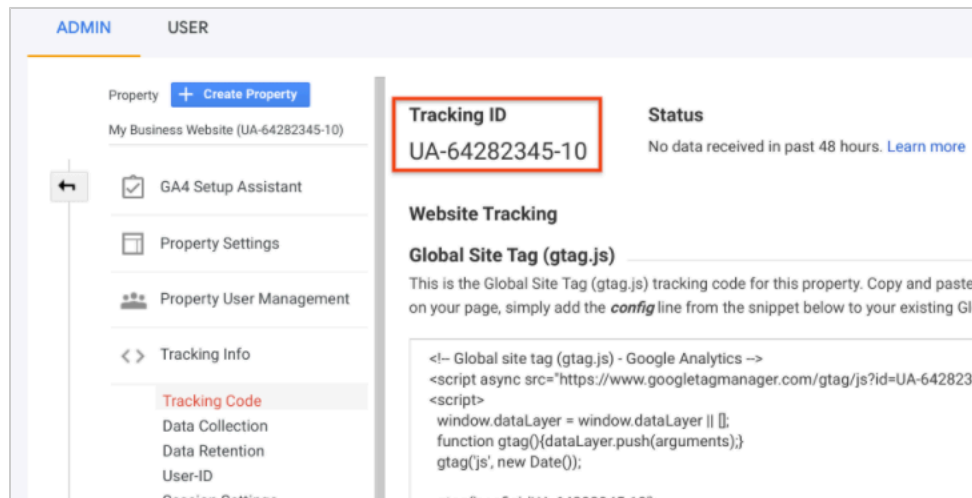

16. Save the Tracking ID in a text editor document so you can use it later.
17. If you are implementing GUA on a Site Builder or an External Site (WSDK), you will need to make a minor modification to the Tracking ID for cross-domain tracking. See [Step 2: Update Tracking Code for Cross-Domain Tracking](#).

Note: The tracking ID is not needed for Commerce web stores because the GUA module puts the tracking code in place for you.

Set as Ecommerce Site

For GUA to report ecommerce activity, you must enable ecommerce tracking in your GUA account.

To enable ecommerce tracking:

1. Login to your GUA account.
2. Select the account that contains the website property.
3. Select the website property.
4. In the **View** section, select **Ecommerce Settings**.
5. Under **Enable Ecommerce**, set the **Status** to **On**.
6. Click **Next Step**.
7. Click **Submit**.

Define Referral Exclusions

GUA lets you exclude referring domains by creating referral exclusions. These exclusions help promote more accurate referral traffic reporting.

Referral exclusions are especially useful if you use a third-party shopping cart. If you use a third-party shopping cart, when a visitor comes to your site and purchases a product, at checkout, they are redirected to the third-party site for checkout and then returned to your site after checkout. Without the referral exclusion, the first session ends when the visitor is redirected to the third-party site and a new session begins when the visitor is returned to your site after checkout. Returning to your site is seen as a referral from the third-party site. Consequently, the session count is skewed because the first session did not follow the visitor throughout the entire transaction.

By adding a referral exclusion, the same session is used from start to finish, presenting more accurate referral traffic results.

Referral Exclusions for a Commerce Web Store

If you use NetSuite as your checkout domain, it is important to set a referral exclusion for the shopping domain. If you do not set the referral exclusion, the shopping domain appears as a self-referral and skews your data.



Note: If you use a single secure domain for checkout and shopping, there is no need to create referral exclusions. Referral exclusions are necessary only when the checkout and shopping domains are different. See the help topic [Set Up Domains for Web Stores](#).

To set up referral exclusions:

1. Log in to your GUA account.
2. Click **Admin**.
3. Select the account.
4. Select the property.
5. Under Property, click **Tracking Info**.
6. Click **Referral Exclusion List**.
7. Click **Add Referral Exclusion**.
8. Enter the domain to exclude. This should be the shopping domain or domain of your external site.
9. Click **Create**.

Referral Exclusions for Site Builder and WSDK Site

If you are using an external catalog site (WSDK) and Site Builder with Site Builder Extensions, you create referral exclusions for the domain of your Site Builder or external site.

Set Up Site Search

Site Search lets you understand the extent to which users took advantage of your site's search function, which search terms they entered, and how effectively the search results created deeper engagement with your site.

To set up site search:

1. Login to your GUA account.
2. Click **Admin**.
3. Select the account, property, and view where you want to set up Site Search.
4. In the View section, click **View Settings**.

5. Under **Site Search Settings**, set **Site Search Tracking** to **On**.
6. In the **Query Parameter** field, enter the word, words, or letters that designate internal query parameters. See the Google support topic [How to Identify Search Query Parameters](#) for more information.

 **Note:** You must implement a query parameter to track site search terms accurately.

7. Specify whether you want GUA to strip the query parameter from your URL.
8. Set **Site Search Categories** to **On** or **Off**.
9. Complete the following actions if you have turned **Site Search Categories** on:
 - a. In the **Category Parameter** field, enter the word, words, or letters that designate an internal search category.
 - b. Specify whether you want GUA to strip the category parameters from your URL.
10. Click **Save**.

Enable GUA in NetSuite

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

 **Important:** Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4, including information about migrating from GUA to GA4.

See the following help topics for information about enabling Google Universal Analytics on your site:

- [GUA in Commerce Web Stores](#)
- [GUA for Site Builder with Site Builder Extensions](#)
 - [Step 1: Retrieve Tracking Code from an Existing GUA Account](#)
 - [Step 2: Update Tracking Code for Cross-Domain Tracking](#)
 - [Step 3: Add GUA Tracking Code to Site Builder](#)
 - [Step 4: Enable GUA in Checkout](#)
 - [Step 5: GUA with Site Builder with Site Builder Extensions and an External Site \(WSDK\) Optional](#)

GUA in Commerce Web Stores

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

 **Important:** Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4, including information about migrating from GUA to GA4.

The procedure for implementing Google Universal Analytics on your Commerce web store requires you to set specific configuration information regarding your Google Universal Analytics account. If you use Google Adwords, you must also set the conversion tracking ID, label, and value.

For configuration information see the help topic [Configure Properties](#).



Important: Settings on the Analytics tab in the Web Site Set Up page are not used when enabling Google Universal Analytics for Commerce web stores. Only the configuration settings as described in this topic are used. For details on how to implement Google Universal Analytics for Site Builder sites, see the help topic [Working with Google Analytics](#).

To enable Google Universal Analytics:

1. Select the domain to configure at Commerce > Websites > Configuration.
2. In the configuration record, go to the **Integrations** tab and the **Google Universal Analytics** subtab.
3. Set feature properties as required. For more information about each configurable property, see the help topic [Google Universal Analytics Subtab](#).
4. Click **Save**.

Enable Google Universal Analytics (pre-Vinson)

Applies to: SuiteCommerce Advanced

This information refers to the Denali and Mont Blanc releases of SuiteCommerce Advanced only.

The following procedure should be performed on a custom ShoppingApplication, custom CheckoutApplication, or custom MyAccountApplication module in your local source files. See the help topic [Develop Your SCA Customization](#) for information about creating a custom module.

To enable Google Universal Analytics (pre-Vinson):

1. Create a custom module that includes the SC.Shopping.Configuration, SC.MyAccount.Configuration, or SC.Checkout.Configuration object as a dependency.



Note: Do not edit the original source files directly. See the help topic [Develop Your SCA Customization](#) for information and best practices on customizing JavaScript.

2. Extend the googleUniversalAnalytics object to set the propertyID, value, and domainName.

```
1 | googleUniversalAnalytics: {
2 |     propertyID: ''
3 |     , domainName: ''
4 | }
```



Note: For more information about these properties, see the help topic [Google Universal Analytics Subtab](#).

3. For the propertyID, enter the Tracking ID for the property in your Google Analytics account. To locate the tracking ID, login to your Google Analytics account and go to Admin > Property > Property Settings.
4. For the domainName enter one of the following, depending on the custom module you are configuring:
 - ShoppingApplication: enter the domain name of your site.

- CheckoutApplication and MyAccountApplication: This is normally **checkout.netsuite.com** or **checkoutna1.netsuite.com**. You can see which checkout domain your site uses on the Setup subtab of the web site setup record. The CheckoutURL field lists the checkout domain.
- If you have your own SSL certificate running under a subdomain, use that as the value for the domain name.

The resultant code should be similar to the following:

```
1 tracking: {
2   // [Google Universal Analytics](https://developers.google.com/analytics/devguides/collection/analyticsjs/)
3   googleUniversalAnalytics: {
4     propertyID: 'UA-12345678-1'
5     ,   domainName: 'mynetsuitesite.com'
6   }
}
```

5. Optionally, enable additional tracking.

By default, the trackPageview function is used. In addition to tracking page views you can enable tracking of events. To enable event tracking set the propertyID and domainName.

```
1 tracking: {
2   // [Google Universal Analytics](https://developers.google.com/analytics/devguides/collection/analyticsjs/)
3   googleUniversalAnalytics: {
4     propertyID: 'UA-12345678-1'
5     ,   domainName: 'mynetsuitesite.com'
6   }
}
```

The trackEvent function in the Google Universal Analytics module defines several user events that can be tracked.

```
1 trackEvent: function (event)
2   {
3     if (event && event.category && event.action)
4     {
5       // [Event Tracking](https://developers.google.com/analytics/devguides/collection/analyticsjs/events#imple
mentation)
6       win[name]('send', 'event', event.category, event.action, event.label, parseFloat(event.value) || 0, {
7         'hitCallback': event.callback
8       });
9     }
}
```

GUA for Site Builder with Site Builder Extensions

i Applies to: SuiteCommerce | SuiteCommerce Advanced



Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4, including information about migrating from GUA to GA4.

If you are implementing GUA on Site Builder with Site Builder Extensions and an External (WSDK) site, see the following help topics:



Note: If you are implementing GUA on Site Builder without Site Builder Extensions, see the help topic [Working with Google Analytics](#).

- [Step 1: Retrieve Tracking Code from an Existing GUA Account](#)

- [Step 2: Update Tracking Code for Cross-Domain Tracking](#)
- [Step 3: Add GUA Tracking Code to Site Builder](#)
- [Step 4: Enable GUA in Checkout](#)
- [Step 5: GUA with Site Builder with Site Builder Extensions and an External Site \(WSDK\)](#)

Step 1: Retrieve Tracking Code from an Existing GUA Account

If you already have a GUA account and website property, use the following procedure to retrieve your tracking ID and the GUA tracking code. If you do not have a GUA account and website property, see [Set Up GUA Account and Website Property](#).

To retrieve GUA tracking code:

1. Go to <https://www.google.com/analytics>.
2. Click the **Sign in** link and choose **Google Analytics**.
3. Click the **Admin** tab.
4. If you have only one GUA account, it is automatically selected for you. If you have multiple GUA accounts, select the account that contains the website property.
5. Select the website property for which you need the tracking code. If you have only one property, it is automatically selected for you.
6. Under Property click **Tracking Info**.
7. Click **Tracking Code**. This displays the following Tracking Code page:

Tracking ID
UA-72852957-2

Status
No data received in past 48 hours. [Learn more](#)

[Send test traffic](#) ?

Website tracking
This is the Universal Analytics tracking code for this property.
To get all the benefits of Universal Analytics for this property, copy and paste this code into every webpage you want to track.

```
<script>
(function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;r=i[r]||function(){
(i[r].q=i[r].q||[]).push(arguments)};i[r].l=1*new Date();a=s.createElement(o),
m=s.getElementsByTagName(o)[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
})(window,document,'script','/www.google-analytics.com/analytics.js','ga');

ga('create', 'UA-xxxxxxx-x', 'auto');
ga('send', 'pageview');

</script>
```

8. Copy the Tracking ID and paste it in a text editor document so you have it for later.
9. Copy the Website tracking code and paste it in a text editor document so you have it for later.

Step 2: Update Tracking Code for Cross-Domain Tracking

The tracking code generated by GUA requires modification before you place it on the pages of your external site and in the Site Builder **Addition to <head>** field. Locate the following line of code:

```
1 | ga('create', 'UA-xxxxx-x', 'auto');
```


Enable GUA in Checkout (pre-Vinson)

i Applies to: SuiteCommerce Advanced

This information refers to the Denali and Mont Blanc releases of SuiteCommerce Advanced only.

The following procedure details the steps for creating a custom configuration module to enable Google Universal Analytics in checkout. See the help topic [Develop Your SCA Customization](#) for more information.

To enable GUA in Checkout (pre-Vinson)

1. In your source files create the following custom module directory structure:
Modules/extensions/Configuration@1.0.0/JavaScript
2. In the JavaScript folder create the javascript file to define your custom configuration options. In this example, the file is named ConfiguratorCheckout.js.
3. Add the following javascript to the ConfiguratorCheckout.js file to set the GUA configuration options.

```

1  define('ConfiguratorCheckout'
2    , [
3      'SC.Checkout.Configuration'
4    ]
5    , function (
6      Configuration
7    )
8    {
9      'use strict';
10     return {
11       mountToApp: function()
12       {
13         Configuration.tracking.googleUniversalAnalytics.propertyID = 'UA-12345678-9';
14         Configuration.tracking.googleUniversalAnalytics.domainName = 'my.webstore';
15       }
16     }
17   });

```

i Note: Use your domain and GUA property ID. See [Configuring GUA](#) for information about obtaining your GUA property id.

4. Create an ns.package.json file in the Configuration@1.0.0 directory.

```

1  {
2    "gulp": {
3      "javascript": [
4        "JavaScript/*.js"
5      ]
6    }
7  }

```

5. Edit the distro.json file and add the custom module to the **modules** object. Your entry should be similar to the following:

```

1  "modules": {
2    "extensions/Configuration": "1.0.0",
3    "suitecommerce/Account": "2.0.1",
4    ...

```

6. In the distro.json file, add your custom module to the list of taskConfig, javascript dependencies for the checkout.js file. To do this, locate the following section of code:


```

1      "entryPoint": "SC.Checkout.Starter",
2      "exportFile": "checkout.js",
3      "dependencies": [
4          "Backbone.View.Plugins",

```

7. Add your custom configuration file as the first dependency in the list:


```

1      "entryPoint": "SC.Checkout.Starter",
2      "exportFile": "checkout.js",
3      "dependencies": [
4          "ConfiguratorCheckout",
5          "Backbone.View.Plugins",
6          ...

```

8. Test your custom module on the local server and then deploy to the development SSP application in NetSuite. See the help topic [Set Up SCA Developer Tools](#) for more information.

Note: You can use the Tag Assistant extension for Google Chrome to verify your GUA implementation on your site. In the following screenshot you see an entry for Google Universal Analytics on the site:

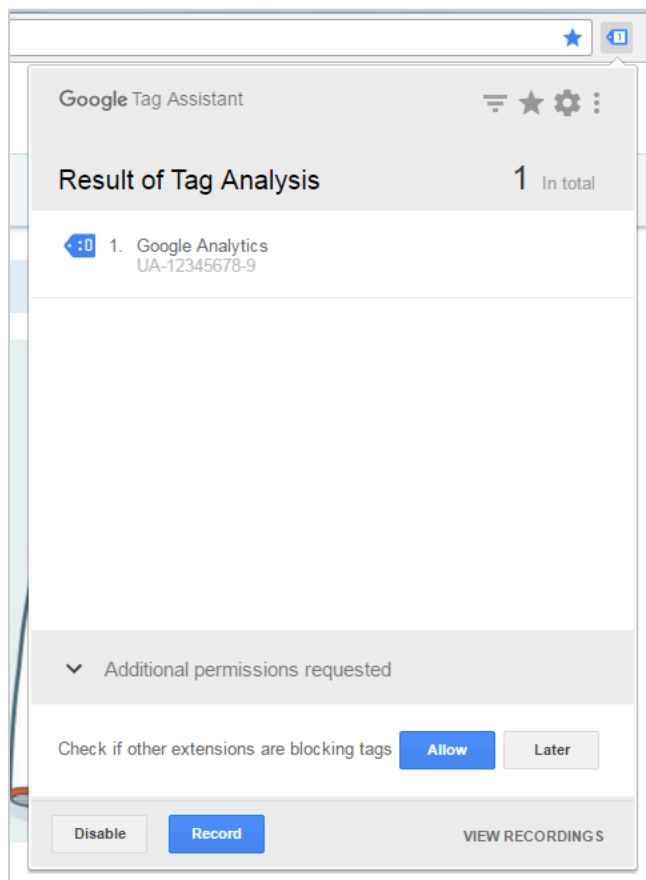

Step 5: GUA with Site Builder with Site Builder Extensions and an External Site (WSDK)

If you use an External Site (WSDK) with your Site Builder with Site Builder Extensions site, you must place the same GUA tracking code on your external site that you placed in the Site Builder site setup record.

Because the external site is a third party site, the method that you use for putting the tracking code on your site varies depending on how and where your third party site is hosted. The tracking code needs to be placed on your site before the closing `</head>` tag.

Many content management systems have an **addition to head** option for this purpose. Ideally, addition to head is at the site level, so that tracking code is automatically placed on every page. In some instances, addition to head is at the page level, in which case you need to place it on all pages.

GUA Goals

Applies to: SuiteCommerce | SuiteCommerce Advanced



Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4](#) for information about GA4, including information about migrating from GUA to GA4.

Goals are an important tool for Google Universal Analytics. Goals track completed activities, commonly known as conversions. For an ecommerce website, the most common goal is for the visitor to make a purchase. Another goal may be for a visitor to submit a newsletter sign up form or a request for more information form.

By defining goals, you help GUA give you important tracking information such as the number of conversions, conversion rates, and which campaigns gave you the highest conversion rate.

Micro and Macro Goals

There are two types of goals, macro goals and micro goals. A macro goal represents the final goal, such as the visitor purchasing something. Macro goals are made up of micro goals. Micro goals represent the activities that a visitor completes prior to the conversion. Micro goals can include reviewing product specifications or reading product reviews.

Funnels

Funnels represent the path that traffic should take to final conversion. The funnel lets GUA track where visitors enter and exit the site. If for example, you see that you have an excessive amount of traffic leaving your site at the same location prior to conversion, you can evaluate that location and rework it to help increase the number of conversions. You may also see traffic skipping certain areas on the path to conversion, perhaps indicating that your path to conversion is too long. Again, this information can help you streamline your site for a smooth process that leads to more conversions.

The following procedure details how to set up a goal for a purchase conversion on a site.

To set up goals in GUA:

1. Login to your GUA account.
2. Click the Admin tab.
3. Select the Account.
4. Select the Property.
5. In the View section, click **Goals**.

6. Click the **New Goal** button.
7. In the Template selection section, under **Revenue**, select the **Buy merchandise** template.
8. Click the **Continue** button.
9. In the **Name** field, enter a descriptive name for this goal, for example, **Purchase**.
10. Select the Goal ID and Goal Set from the **Goal slot ID** dropdown list. For more information, see [Goal ID and Goal Sets](#).
11. For **Type**, select **Destination**. For more information, see [Goal Types](#).
12. Click the **Continue** button.
13. In the Goal details section, for **Destination** select **Equals to**.
14. In the **Destination** field enter **/confirmation**. This is the page a customer sees after making a purchase.
15. You can assign a monetary value by clicking the **Value** option to turn it **On** and enter the dollar value. For more information, see [Goal Value](#).
16. To define the path to conversion, click the **Funnel** option to turn it **On**.
17. Add the following steps for this path:

Step	Name	Screen/Page
1	Cart	/cart
2	Login	/login-register
3	Shipping Address	/shipping/address
4	Shipping Method	/shipping/method
5	Payment	/billing
6	Review	/review

 **Note:** If your site has customizations that do not follow this path, then enter the steps for your customized path to conversion.

The **/confirmation** page is the final sequence in this goal. However, you do not list the confirmation page in the funnel, because it is listed in the **Destination URL** field.

For more information about funnels see [Funnels for Destination Goals](#).

18. Click the **Save** button.

Search Engine Optimization (SEO)

Applies to: SuiteCommerce | SuiteCommerce Advanced

NetSuite gives you lots of tools to help make sure your site's pages are optimized for search engines. Using these tools and following SEO best practices can help improve your ranking on search results pages.

You can use the tools and techniques in the table to optimize your Commerce website for search engines—and they're available to all Commerce sites.

SEO Tools	Description	For More Information
Images - Image File names - Image Alt Text	Access image files from item records in your account to update the Image Alt Text.	Add Alternate Text SEO and Images
Content Delivery	Use the Content Delivery SuiteApp to access the following page elements: - Page Title - Meta Description - Page Header - Addition to <head>	Using Content Delivery
Descriptive URLs for Item Detail Pages	You can customize any product URL on your site.	Customizing Item URLs for SEO
SEO page generator	Commerce web stores automatically build full HTML pages, so search bots can easily index your website.	SEO Page Generator
Third-Party Scripts in SSP Files	You can connect third-party services like analytics, affiliate programs, or tracking code to your Commerce web store. Use the ns-server-execute flag in your SSP file to reference a script attached to the SSP application.  Important: If you're customizing a Commerce web store, you can't reference the script as above because of the single-page architecture.	For more information about adding a third-party script to a Commerce web store, see Adding a Third-Party Script for Analytics Tracking .
Sitemap Generator	Sitemap Generator builds an XML sitemap for your website for SEO.	Sitemap Generator
Structured Data Markup	SuiteCommerce and SuiteCommerce Advanced 2020.1 and later support JSON-LD structured data markup. Major search engines use structured data markup to find more details about a page and improve search results.	Structured Data Markup
Robots.txt File	Create a robots.txt file to control which pages on your site get indexed.	SEO and Robots.txt
Google Analytics	Learn how you can integrate Google Analytics 4 into your Commerce web store.	Google Analytics 4

SEO Page Generator

Applies to: SuiteCommerce | SuiteCommerce Advanced

SuiteCommerce web stores use single-page application (SPA) technology to provide a rich and responsive experience to users. When a user first visits a website that's built using an SPA, a single HTML page loads using JavaScript to build an interactive web application in the user's browser. After the SPA is built in the user's web browser, any interactions with the website take place within this application. This means reusing templates and previously loaded data, and only loading new data as needed. This boosts web performance by speeding up loading times between pages and soft navigations, since only the data needed for that page is loaded from the server.

However, many search engines, such as Google and Bing, send crawlers to websites that might not run JavaScript. This could mean that providing them with the same SPA technology that human users use could cause issues. To ensure that web stores are discoverable and indexable by search engine crawlers, an alternative approach is used.

To support search engine crawlers, server-side rendering (SSR) is used instead—this is what we call the SEO page generator. The SEO page generator is a virtual web browser that receives the crawler's requested page, executes the SPA JavaScript, and then sends the HTML content to the crawler. This means that the crawler receives prerendered pages and never has to run JavaScript.

Performance Optimizations

The SEO page generator's main value is that it serves prerendered content to users who can benefit from it, such as search engine crawlers. Prerendering content with SSR comes with a performance cost, so in some cases, the page generator won't run if it's not needed. Skipping prerendering means SSR content isn't created and loading performance improves. These optimizations include:

- When [CDN Caching](#) is enabled, prerendered pages are stored for a short period of time so that they can be sent to other users requesting the same page. The page generator doesn't run since fresh content is already available.
- User agent detection is used to see if the requester identifies as a web crawler or other bot. If the system is sure the user is human, the page generator won't run.
- The page generator won't run when a user is logged in or in a recognized state. For more information, see the help topic [Roles](#).

This applies to both public and private parts of the website, such as shopping, checkout, and My Account.

- Some JavaScript won't load if it's not useful for crawlers. For example, the [Application Performance Management \(APM\) for Commerce](#) library isn't requested if the page generator is processing the page. Developers can also exclude custom resources from prerendered HTML by following the [SEO Page Generator Best Practices](#).
- The page generator won't run if you request a page in a local developer environment with the Commerce developer tools. For more information, see the help topic [Tools Overview](#).

To learn more about the SEO page generator, refer to the following sections:

- [SEO Page Generator Debug Log](#)
- [SEO Page Generator Best Practices](#)

SEO Page Generator Debug Log

Applies to: SuiteCommerce | SuiteCommerce Advanced

The SEO page generator gives you a comprehensive logging feature so you can analyze the content of a page created by the server-side rendering (SSR) process. The log includes:

- The content of the HTML page after it's been processed
- Timings
- Memory usage
- CPU usage
- A breakdown of the subrequests made, such as to JavaScript and CSS files
- Console messages, warnings, and errors, if present

The debug log helps developers and SEO experts check that the page content served to search engine crawlers matches what human users see, and is error-free.

Viewing the SEO Page Generator Debug Log

The main way to generate debug logs from the SEO page generator is to add the `seodebug=T` parameter to a SuiteCommerce web store page URL and then view its source.

To view the debug log provided by the SEO page generator:

1. Go to the URL of the page you want to debug.
2. Right-click on the page and select **View page source**.
3. Modify the page's URL and append `?seodebug=T` as a URL parameter. If it's the only URL parameter, you need to use a question mark (?) first. If there are other parameters, use an ampersand (&). For example, your URL will look something similar to the following:
`view-source:www.mywebstore.com/Salida-Backpack?seodebug=T`
`view-source:www.mywebstore.com/Salida-Backpack?color=red&seodebug=T`
4. Select **Enter** to reload the page with the new parameter added.
5. After the page loads, scroll down to view the debug log from the SEO page generator. It will look something similar to the following:

```

1 | <!--
2 | Debug output:
3 | [09:12:15.780] [ +0 ms ] Requested URL with SEO generator relevant params: https://www.mywebstore.com/Salida-Backpack?seodebug=T
4 | [09:12:15.780] [ +0 ms ] Source URL: https://www.mywebstore.com/scs/shopping.ssp#/Salida-Backpack?seodebug=T
5 | [09:12:15.780] [ +0 ms ] Rewrite Path: /s.nl?sitepath=/scs/shopping.ssp
6 | [09:12:16.099] [ +319 ms ] Generated the frame page for the requested URL
7 | [09:12:22.215] [ +6116 ms ] Got a response from Prerender
8 | [09:12:22.216] [ +1 ms ] Memory usage: 30.523438MB
9 | [09:12:22.216] [ +0 ms ] CPU usage: 0.650000s
10 | [09:12:22.216] [ +0 ms ] Sub request total: 5.277000s
11 | ...
12 | -->

```

Troubleshooting Tips

Avoid Cached Responses

After a URL has been requested from the page generator, it will be cached. That means that if you make a change and then request the same URL, you may get a cached version that doesn't reflect your changes.

To work around this, add another URL parameter to make the request unique without changing the page content. To do this, you can use the **preview** parameter and give it a new value each time you make a request. For example:

```
view-source:www.mywebstore.com/Salida-Backpack?seodebug=T&preview=1234
```

The next time you request the page, you should change the number, for example, by incrementing it by 1 from **1234** to **1235**.

Use a Fresh Browsing Session

The SEO page generator won't run in some cases. The most common is when you use a browsing session where the user is logged in or recognized. If the page generator doesn't run when requested, it returns a log describing the reason. For example:

```
1 [04:05:20.169] [ +253 ms ] SEO page generator wasn't executed: bypassSeoGeneratorAfterSspForward: notGeneratable=false incorrectS
tatusOrContentForSeoGenerator=false bypassSeoGeneratorForRecognizedOrLoggedIn=true bypassSeoGeneratorSwitchEnabled=false, url=http
s://www.mywebstore.com/Salida-Backpack/?seodebug=T
```

In this case, `bypassSeoGeneratorForRecognizedOrLoggedIn` returns true, which means that the user is currently logged in or has logged in recently.

To avoid this, use a fresh browsing session, such as your browser's incognito mode, or try a different browser.

Investigate Console Logs for Errors

Because the page generator uses SSR for JavaScript, there may be errors when it's parsed and executed. These will be returned in the debug log and may mean there's a problem with your code. The most common problems happen when your JavaScript uses features newer than ECMAScript 5.1. This is because the page generator doesn't support them and will throw errors. When this happens, you'll see a standard JavaScript error. For example:

```
1 [04:53:02.240] [ +0 ms ] Logs generated by console.log():
2 [ +0 ms ] SyntaxError: Invalid character: ''
3 at anonymous (https://www.mywebstore.com/Salida-Backpack?seodebug=T:54)
4 [ +74 ms ] SyntaxError: Unexpected token 'const'
5 at anonymous (https://www.mywebstore.com/scs/extensions/shopping_2.js?t=1654728269538:63)
```

In this example, errors occurred because the developer used template literals and constant variables, which ES5.1 doesn't support.



Important: When investigating logs, the page generator also sends generic console logs and warnings, may might not mean there's a real problem.

Investigate Sub-Request Errors

The debug log provides a breakdown of every additional resource requested when the page loaded, including the status code and how long the page took to load.

```
1 [09:12:22.217] [ +1 ms ] Details of 15 sub requests:
2 GET https://www.mywebstore.com/scs/public/shopping.environment.ssp?lang=es_AR&cur=&X-SC-Touchpoint=shopping&t=1714685769941
[status 200]
```

```

3   Requested at 2024-08-06T16:12:16.216Z and responded by 2024-08-06T16:12:16.912Z (which took 696ms)
4   GET https://www.mywebstore.com/scs/public/shopping.environment.shortcache.ssp?X-SC-Touchpoint=shopping&t=1714685769941 [status
   200]
5   Requested at 2024-08-06T16:12:16.217Z and responded by 2024-08-06T16:12:18.417Z (which took 2200ms)
6   GET https://www.mywebstore.com/scs/languages/shopping_en_US.js?t=1714685769941 [status 200]
7   Requested at 2024-08-06T16:12:16.217Z and responded by 2024-08-06T16:12:16.313Z (which took 96ms)
8   ...

```

You should check each status code for any error status codes, such as 404s and 500s.

Three Dots in Main Div When Viewing Source

If you use the **view-source** URI without the **seodebug=T** URL parameter, it won't trigger the page generator by default. That's because if you view the page's source HTML without either running the SPA JavaScript or triggering the page generator, you'll be served the SSP 'frame page'. This is the barebones HTML that makes up the page before resources load and JavaScript runs.

The frame page can be identified by three dots (an ellipsis) in the main div. For example: `<div id="main" class="main">...</div>`.

This is served by default so that at least some content is returned, with the expectation that it'll be replaced later with the actual page's content after the browser or page generator renders it.

Therefore, receiving the three dots does not necessarily indicate an error since it's the default response from the server when the page generator is bypassed. It may indicate an error if it's served in scenarios when fully rendered content should have been served, such as in response to a search engine crawler or when using **seodebug=T**.

Note that, in this scenario, other parts of the page won't be fully rendered or executed since it's just the frame page. For example, if the frame page is served, it's unlikely that title or meta tags have been produced yet, since they're usually produced during rendering.

Other Ways of Viewing Prerendered Content

SEO page generator content can be viewed without including outputs generated by the debug log. This may be preferable since it'll show you the exact content that's generated and served to search engine crawlers.

- **Search Engine Tools** – many search engines provide tools to website owners so that they can analyze their site, including looking at specific pages that they have indexed. For example, Google's [URL Inspection Tool](#) can provide you with the HTML it received and a screenshot.
- **User Agent Spoofing** – web browser and CLI developer tools let you request page content using a custom user agent string. If you set this user agent string to one that a search engine crawler uses, it should trigger the page generator to run.

SEO Page Generator Best Practices

Applies to: SuiteCommerce | SuiteCommerce Advanced

When customizing your SuiteCommerce web store, it's important to consider how your changes might affect the SEO page generator. If the server-side rendering (SSR) malfunctions or fails entirely, partial content may be served to search engines, potentially harming your SEO. Therefore, when you test your changes, treat the SEO page generator like another browser you're testing in.

JavaScript Standards

The SEO page generator only supports JavaScript as defined in ECMAScript 5.1 (ES5.1):

- In your extensions, don't use JavaScript from newer versions, such as the `let` and `const` keywords or template literals.
- When customizing the core code of a SuiteCommerce Advanced site built using 2019.2 or newer, you can use TypeScript and modern JavaScript if you run it through the developer tools' standard transpilation process that converts it to ES5.1.
- If a third-party plugin or library uses JavaScript newer than ES5.1, it must be excluded from SSR using the methods detailed below.

Excluding Content from the SEO Page Generator

Remember that the SEO page generator's role is to create a version of your web page so a search engine can crawl and index it. Accordingly, there may be customizations to your web store that are designed to help human users, like a chatbot plugin, but these aren't important to web crawlers. In some cases, these customizations may negatively affect web crawlers by making it harder to parse the page, causing extra content to get indexed, or using up crawl budget.

When this happens, you should prevent this JavaScript from being included in the SSR process. To help developers exclude content, the core code and extensibility API includes utility functions for wrapping JavaScript that shouldn't be rendered by the page generator.

The best practice, which is available when writing extensions and modern versions of SuiteCommerce Advanced, is to use [a method on the Environment component](#).

```
1 // Using the extensibility API (SuiteCommerce and SuiteCommerce Advanced Aconcagua (R2) or newer
2 // In an extension entry point file's mountToApp() function
3
4 var Environment = container.getComponent('Environment');
5 if (!Environment.isPageGenerator()) {
6   // Code that won't run when being rendered on the server
7 }
```

If you cannot use the extensibility API, you may use a utility function attached to the SC global variable.

```
1 // A simple check
2 if (!SC.isPageGenerator()) {
3   // Code that won't run when being rendered on the server
4 }
5
6 // Alternative function
7 if (SC.ENVIRONMENT.jsEnvironment === 'browser') {
8   // Code that won't run when being rendered on the server
9 }
```

Suggestions for Content to Exclude

Here's a list of things that can cause problems for SSR, or might be unnecessary, so you may want to exclude them from the page generator.

- JavaScript that was introduced in a version of ECMAScript newer than 5.1.
- Plugins and libraries that don't benefit the page's content, such as chatbots, advertising, marketing, analytics, and similar tools.

- jQuery plugins and methods that only add UI benefits, such as creating transitions or animations.
- Calls to web APIs that add new functions for human users, such as the Geolocation API.

Limits

There are several governance limits that apply to any page sent for SSR, including memory usage, CPU usage, and execution time. If the page generator stops running because of one of these limits, it usually means that there's a problem with the JavaScript, such as recursion, forgotten timers, unresolved callbacks, or too much DOM querying.

- A web page should load as fast as possible, but the page generator will generally time out after 20 seconds.
- If the page generator can't finish SSR, the generated content is returned as-is with a 206 (Partial Content) status code.

SEO and Redirects

i Applies to: SuiteCommerce | SuiteCommerce Advanced

You can create URL redirects in NetSuite to make your web pages available under different URLs. This comes in handy if you move your site to a new domain or need to redirect a commonly misspelled domain.

URL redirection helps search engines that have already ranked your pages find your new site and update their links. Search engines treat URL redirects made in NetSuite as **301 moved permanently** redirects.

NetSuite provides the following ways for you to set up URL redirects:

- You can add or update URL redirects one at a time on the Redirect record page. See [Setting Up a URL Redirect](#).
- You can swap redirect domains to move several URL redirects from one domain to another. See [Updating Redirect Domains](#).
- You can bulk add or update URL redirects by importing a CSV file. NetSuite has an import assistant and template for this. See [Importing Website Redirects](#).
- You can delete URL redirects in bulk with a mass update action. See [Delete Web Site Redirects Mass Update](#).

Setting Up a URL Redirect

i Applies to: SuiteCommerce | SuiteCommerce Advanced

This section covers how to set up one URL redirect at a time.

You can set up redirects for any shopping domain you've added in NetSuite. First, select the domain, then enter the URL parameters you want to redirect from, and finally display in the URL for the right page. The domain and the URL you're redirecting from have to be different from the URL you're redirecting to.

Note: If you use Site Builder, you must enable the Descriptive URLs feature. You cannot redirect from Site Builder URL parameters such as `/s.nl/sc.26/category.321802/.f`. You must use a descriptive URL such as `/Product-Catalog/office-accessories`.

Wildcards in URL Redirects

If you need to redirect from a URL with parameters, you can use the wildcard to stand in for the parameters in the URL. For example, if you have the URL `http://mysite.com/womens/blouses?parameter1=a¶meter2=b`, you can create a redirect from `/womens/blouses*` to `/womens/newcat/blouses`. When you use the wild card in the redirect, all parameters are passed to the redirect URL so that the final URL is `http://mysite.com/womens/newcat/blouses?parameter1=a¶meter2=b`.

Warning: You cannot use a wildcard to redirect from one descriptive URL to another.

To set up a redirect:

1. Go to Commerce > Hosting > Redirects > New.
2. Select a domain in the **Domain Name** field. The domains listed are the ones you set up at Setup > Website > Domains.

Note: If you have set one of your custom domains as the Primary Web Site URL, then make sure you create a redirect with that domain, as well as other domains. For more information, read [Using the Primary Web Site URL in Redirects](#).

3. In the **Redirect From URL** field, enter the URL that points to the page you want to redirect. Do not include the domain and instead use a relative URL.
4. In the **Redirect To URL** field, enter the URL that points to the page where you want visitors to go. Here, you can enter any of the following:
 - a relative URL that points to a page on your NetSuite site
 - an absolute URL that points to a page on your NetSuite site
 - a descriptive URL that points to a tab, category, or item detail page
 - an absolute URL that points to another site

For more information, read [Relative vs. Absolute URLs](#)

5. Click **Save**.

Note: Redirects go into effect immediately when you save them.

After you save the redirect record, you can visit the Redirects list page to see all the redirects set up for your web site.

Using the Primary Web Site URL in Redirects


If you use one of your custom domains as the Primary Web Site URL, you need to pick that domain when you create a redirect. For example, say your site has two custom domains: [www.mysite.com](#) (the Primary Web Site URL) and [mysite.com](#) (the secondary). To make the redirect work, you have to use [www.mysite.com](#). Choose [www.mysite.com](#) as the domain for a redirect that goes from `/tshirt` to `/special-tshirt`. If you set up the redirect on the secondary domain and go to [mysite.com/tshirt](#), you'll first be redirected to [www.mysite.com/tshirt](#), so the secondary redirect won't work.

Relative vs. Absolute URLs

When you create URL redirects, it's important to figure out if the URL should be relative or absolute. A relative URL uses the path to the page without the domain, for example /office-furniture. An absolute URL includes both the domain and the path, like mysite.com/office-furniture.

When to use Relative URLs

When you want to create a redirect from one page to another on the same domain, you can use a relative URL. Since you pick the domain on the Redirect page in NetSuite, you can use relative URLs for both the Redirect From and Redirect To fields. The redirect is created using the domain you selected.

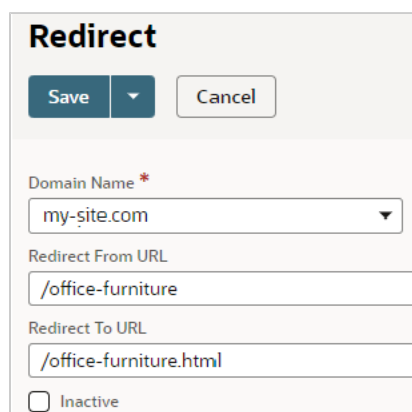

Redirect

Save [dropdown] Cancel

Domain Name *
my-site.com [dropdown]

Redirect From URL
/office-furniture

Redirect To URL
/office-furniture.html

☐ Inactive


This is the method you should use when you retire a page on your site, restructure your site, or change the name of a page.

When to use Absolute URLs

When you move from one domain to another, it's important to use absolute URLs instead of relative URLs. Consider the following example:

Your domain has changed from **myoldsite.com** to **mynewsite.com**. You'll want to redirect traffic from myoldsite.com/office-furniture.html to mynewsite.com/office-furniture.html.

When you set up the redirect, you pick your old domain (in this case, myoldsite.com) as the domain. For the Redirect From URL, you enter the relative path from the old domain. For the Redirect To URL, you use the absolute path to the new domain page.

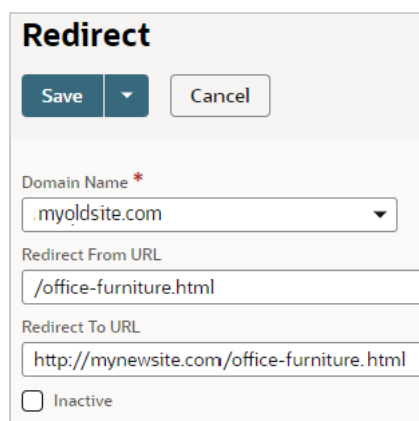

Redirect

Save [dropdown] Cancel

Domain Name *
myoldsite.com [dropdown]

Redirect From URL
/office-furniture.html

Redirect To URL
http://mynewsite.com/office-furniture.html

☐ Inactive

Consequently, when a visitor goes to **myoldsite.com/office-furniture.html**, they are redirected to **mynewsite.com/office-furniture.html**.

Updating Redirect Domains

Applies to: SuiteCommerce | SuiteCommerce Advanced

Use the Redirects list page to update multiple URL redirects from one domain to another.

Remember, any domain you want to use has to be on your shopping domains list. Redirects won't be converted if you use the Domains page to overwrite or delete the original domain.

For information about how redirect URLs work, see [Setting Up a URL Redirect](#).

To change the domain on multiple redirects:

1. Go to Commerce > Hosting > Redirects.
2. In the Filters section of the **Redirects** list page, select a domain in the **Change domain from field**, and then select another domain in the **to field**.
3. Click **Update Redirects**.

Immediately after updating the list of redirects, a popup window is displayed, confirming the number of changed records.

Importing Website Redirects

Applies to: SuiteCommerce | SuiteCommerce Advanced

Besides [Setting Up a URL Redirect](#) individually on the Redirect record page, you can use the website redirects import assistant to add and update URL redirects in bulk from a CSV file. You can import up to 100,000 URL redirects at one time.

This import assistant is available at Commerce > Hosting > Redirects > Import, when the Web Site and Host HTML Files features are enabled. You'll need the Set Up Web Site permission.

CSV Template File for URL Redirects

The website redirects import assistant includes a link to a CSV template file. Populate your CSV file with the following fields for each redirect record:

Field	Notes
Domain Name	Must match the name of an existing domain. You need to set up domains in NetSuite before importing URL redirects. See the help topic Domains. Maximum field size= 80
Redirect From URL	Must be a relative URL that is also a descriptive URL. Maximum field size=4000
Redirect To URL	Can be any of the following:


Field	Notes
	■ a relative URL that points to an HTML page on your NetSuite site ■ a descriptive URL that points to a tab, category, or item detail page ■ an absolute URL that points to another site
	Maximum field size=4000

Using the Website Redirects Import Assistant

To import URL redirects from a CSV file:

1. Go to Commerce > Hosting > Redirects > Import.
2. Click the **Redirect Template File** link.
3. Save the CSV file and populate it with your data, following the guidelines provided.
4. In the Import Assistant, click **Select**, and then browse to your CSV file. Click **Next**.

The second page of the Import Assistant shows how the fields in your file are mapped to NetSuite fields. This mapping is automated and you should not have to change it.

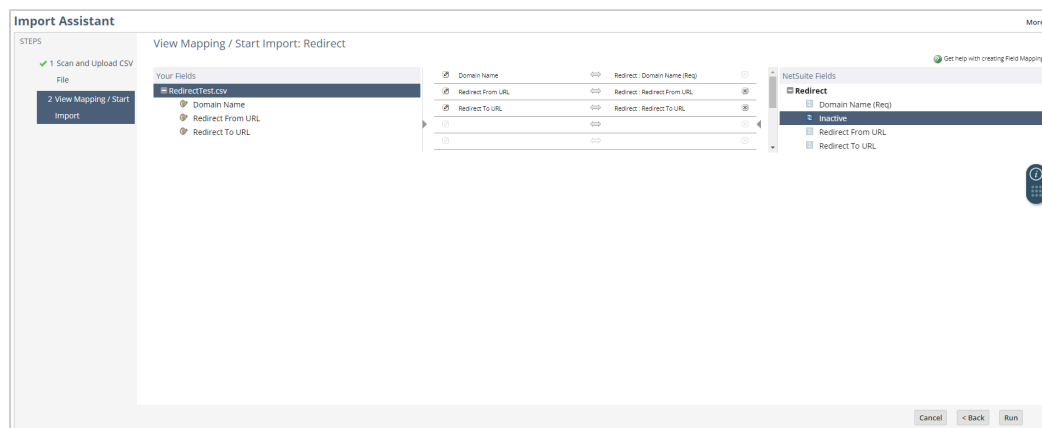

5. Click **Run**.

During the import, the system attempts to match the **Domain Name** and **Redirect From URL** values to existing redirect records.

- If a match is found, the import updates the existing redirect record with the Redirect To URL value.
- If no match is found, the import adds a new redirect record.

You can use the import Job Status page to review the progress of your import. Note that the count of redirect records successfully imported to NetSuite includes only values for Redirect From URL in the CSV file used for import.

Delete Web Site Redirects Mass Update

Applies to: SuiteCommerce | SuiteCommerce Advanced

If you have the Mass Updates permission, you can use the Mass Updates feature to delete multiple redirect records simultaneously. When you set up this kind of mass update, you enter criteria for which

redirects you want to delete. The system shows you a list of records that match, and then you can delete them right away or save the mass update definition for later. If you've got the Schedule Mass Updates permission, you can also schedule a mass update to run regularly.

To define a mass update that deletes URL redirects in bulk:

1. Go to Lists > Mass Update > Mass Updates.
2. In the **Mass Updates** list, expand **Web Site Redirects**, and click **Delete Web Site Redirects**.
3. In the **Title of Action** field, enter a name for this update.
4. On the **Criteria** subtab, select a filter for finding the redirect records to be deleted.
For information, see the help topic [Advanced Search Criteria Filters](#).
5. (Optional) On the **Results** subtab, define display options for the Mass Update Preview page that lists redirect records to be deleted.
For information, see the help topic [Search Results Display Options](#).
6. (Optional) On the **Audience** subtab, if available, define the users who can run the update.
7. (Optional) If you are an administrator and you want to run the mass update on a recurring basis, set up this recurrence on the **Schedule** subtab. See the help topic [Scheduling a Mass Update](#).
8. Click **Preview** to review the records to be changed.
9. Choose one of the following options:
 - Click **Perform Update** to delete the records.



Warning: After you click Perform Update, you cannot stop or cancel the mass update, so proceed with caution!

- Click **Save** to save this mass update for future use.
 - When you save the update, it is not run. The mass update is saved with the search filters you have selected to find records that should be deleted. When you run the mass update in the future, it uses these search filters and lets you preview the list of returned records before performing the delete.
 - To run a saved mass update, go to Lists > Mass Update > Saved Mass Updates, and click **Preview** next to the name of the update. On the Mass Update Preview page, click **Perform Update**.

For more information, see the help topic [Mass Updates](#).

SEO and Robots.txt

Applies to: SuiteCommerce | SuiteCommerce Advanced

The robots.txt file is the first file that a search engine requests when indexing your site. This file lets you tell search engines which pages on your site shouldn't be indexed. When you're first setting up your site, it's important to have your robots.txt file ready before you go live. This is especially important if you've got faceted navigation. Faceted navigation can create lots of URLs that look like they have the same content to search engines. Duplicate content can hurt your search engine ranking, so you should use the robots.txt file to control what gets indexed and stop search engines from indexing pages that seem the same. For information about creating the robots.txt file when you use faceted navigation, see [Robots.txt with Categories and Facets](#).

Important: Test the Robots.txt File

Before you take your site live, it's important to test the robots.txt file to see how different URLs behave. The best tool for this is the Robots Testing Tool in Google Webmaster Tools.

<https://www.google.com/webmasters/tools/robots-testing-tool>

Edit your robots.txt and check for errors. [Learn more.](#)

Latest version seen on 1/5/15, 4:13 AM OK (200) 51 Bytes [See live robots.txt](#)

```

1 User-agent: *
2 Disallow: /ShopFlow/
3 Crawl-Delay: 10
4

```

0 Errors 1 Warnings Submit

<http://www.yourathleticshop.com/> Googlebot TEST

How to Create the Robots.txt File

The robots.txt file is a text file, so you can use any text editor to create it.

Robots.txt Common Commands

The following sample robots.txt files show you some common ways to allow or block indexing.

Allow all web crawlers to crawl all content:

```

1 User-agent: *
2 Disallow:

```

Block all web crawlers from all content:

```

1 User-agent: *
2 Disallow: /

```

Block a specific web crawler from all content:

```

1 User-agent: Googlebot
2 Disallow: /

```


Block a specific web crawler from a specific facet and all its values:

```
1 | User-agent: Googlebot
2 | Disallow: /facet/*
```

Block all crawlers from a specific facet disregarding the order in which it appears:

```
1 | User-agent: *
2 | Disallow: */facet/*
```

Allow all crawlers to crawl a specific facet value within a facet, disregarding the order in which it appears:

```
1 | User-agent: *
2 | Disallow: */facet/*
3 | Allow: */facet/facet-value-1
```

Allow all crawlers to crawl a specific facet value within a facet only when this facet appears first:

```
1 | User-agent: *
2 | Disallow: /facet/*
3 | Allow: /facet/facet-value-1
```

Block all web crawlers from adding items to cart by following “Add to Cart” links:



Note: This is applicable only to Site Builder sites. Commerce web stores do not have “Add to Cart” links available to web crawlers.

```
1 | User-agent: *
2 | Disallow: /additemtocart.nl
```

Robots.txt File Location

The robots.txt file should be in the root folder of your website. You can create the robots.txt file on your local drive and upload it to the file cabinet.

To add the robots.txt file to the file cabinet

1. Go to Documents > Files > File Cabinet.
2. In the file cabinet, go to Web Site Hosting files > Live Hosting Files.
3. Click **Add File**.
4. Browse to the location of your robots.txt file and select it.
5. Click **Open**. This adds the file to the file cabinet.

Robots.txt with Categories and Facets

Applies to: SuiteCommerce | SuiteCommerce Advanced

When you use categories and facets on your website, there are a few scenarios you should consider since they affect how you create your robots.txt file. These scenarios are:

- Site Uses Only Categories
- Site Uses Categories and Facets
- Site Uses Facets as URL Paths
- Site Uses Facets as URL Parameters

With faceted navigation and facets as URL paths, you can end up with a huge number of URLs—many with duplicate or similar results. When a visitor or search engine selects multiple facets, every option in each facet can generate a new URL. Multiply the number of facets by the number of options, plus any combinations, and you'll see how the number of URLs can explode.

SuiteCommerce Advanced has some built-in ways to manage URLs for facet navigation. The URL always shows facets in the same order, no matter how they were applied. For example, two of your facets are color and size. If one visitor selects color and then size and another visitor selects size and then color, the URLs for both are identical.

This standardization prevents some duplicate content, but you can still get similar content on different URLs. Search engines see this as the same content on different pages, and your ranking can suffer because of it. That's why it's important to review your facets and decide which ones search engines should crawl and which they shouldn't.

These are the rules to follow for facets as URL paths when you create the robots.txt file:

- If the applied facet changes the content of the search result page, let search engines crawl it.
- If the applied facet does not change the content of the search result page, use the robots.txt file to disallow indexing of that page.

Site Uses Only Categories

When your site uses only categories, you don't need to worry about stopping indexing of facet pages. But you still need to use the robots.txt file to list any other pages you don't want search engines to index.

Site Uses Categories and Facets

Some sites may be set up to use both categories and facets. In this case, setting up your robots.txt file can get more complex depending on your site's structure, how your products are categorized, and your faceted navigation settings. If all your item pages are accessible from the category pages and your facets use URL paths for navigation, you can set up your robots.txt file to prevent indexing all facet pages. If you've got some items that are only accessible with faceted navigation, allow indexing for those facets and disallow it for the others.



Note: If your site uses URL parameters for facets, you don't need to disallow facets in the robots.txt file because URL parameters don't affect SEO. The Facets as URL parameters feature is available with the Elbrus release of SuiteCommerce Advanced and later.

All Items Accessible Through Categories

If all items on your site can be found by browsing categories, you can block indexing for all facets. Search engines will index all your pages except the facet pages.

Here's an example of how to set up the robots.txt file for this scenario.

The site has two categories and two facets.

Categories

- Men
- Women

Facets

- Color = red, green, blue
- Size = L, M, S

To prevent indexing of facets, your robots.txt file would look like this:

```
1 User-agent: *
2 Disallow: */color/*
3 Disallow: */size/*
```

These entries in the robots.txt file tell search engines to ignore any URL with the facets **color** or **size**. By using * wildcards, these pages won't get indexed no matter where the facet appears in the URL.

Some Items Accessible only Through Facet



Note: If your site uses URL parameters for facets, there is no need to disallow facets in the robots.txt file because URL parameters do not impact SEO. The Facets as URL parameters feature is available with the Elbrus release of SuiteCommerce Advanced and later.

If you've got some items that are only accessible on a facet page and your site uses URL paths for facets, you'll need to identify those items and update your robots.txt file to disallow some facets while allowing others. First, you need to figure out which facets should be indexed and make sure they're allowed in the robots.txt file.

This example uses the same categories and facets as the previous example:

Categories

- Men
- Women

Facets

- Color = red, green, blue
- Size = L, M, S

Here are the possible URL combinations for items with one facet filter:

- example.com/category/men/color/
- example.com/category/men/color/red
- example.com/category/men/color/green
- example.com/category/men/color/blue
- example.com/category/men/size/
- example.com/category/men/size/l
- example.com/category/men/size/m
- example.com/category/men/size/s

You've got the same combinations for the women category.

For pages with multiple facet filters, the URLs look like this:

- example.com/category/men/color/blue/size/l
- example.com/category/men/color/blue/size/m
- example.com/category/men/color/blue/size/s
- example.com/category/men/color/red/size/l
- example.com/category/men/color/red/size/m
- example.com/category/men/color/red/size/s
- example.com/category/men/color/green/size/l
- example.com/category/men/color/green/size/m
- example.com/category/men/color/green/size/s

You've got the same combinations for the women category.

All the items will be visible to search engines if they're allowed to index the categories and facet title. In this case, the URLs example.com/category/[men or women]/color/ and example.com/category/[men or women]/size/ are the ones that should be indexed, since they're the facets that show all items. For example **/category/men/color/** or **/category/men/size/**. Search engines shouldn't index any URLs with multiple facets or with a facet value. To set up this kind of indexing, you'd create the robots.txt file like this:

```
1 | User-agent: *
2 | Disallow: /*/*/*/*
```

The search engine interprets this disallow statement as follows:

- 1st * = category <- allowed
- 2nd * = men and women <- allowed
- 3rd * = facet title <- allowed
- 4th * = facet values <- disallowed and is not indexed

This tells the search engine to ignore everything after the fourth slash, which, as you can see from the sample URLs, are the facet values. By letting the search engine crawl the facet titles, all products are shown by default with pagination.

Site Uses Facets as URL Paths

For sites that use only faceted search and no categories, you'll need to figure out the best way to block all facets that don't change the page content. For example, you may need to disallow the following facets:

- Price
- Marketing Facets
- Seasonal Facets

Site Uses Facets as URL Parameters

If your site uses URL parameters for facets, you don't need to disallow facets in the robots.txt file because URL parameters don't affect SEO. For more information, see the help topic [Facets as Parameters](#).

SEO and Item Reviews

Applies to: SuiteCommerce | SuiteCommerce Advanced

If you allow item reviews on your site, reviews might show up higher in search results than the item page. That's why, if you're using any ShopFlow version other than 1.06, you should use the robots.txt file to block indexing of reviews and new review pages. You don't need to do this for version 1.06 because it automatically blocks indexing of reviews. Here's a sample robots.txt file to block reviews:

```
1 User-Agent: *
2 Disallow: /*/reviews
3 Disallow: /*/reviews/new
```

This setup blocks indexing of review and new review pages for any site where "reviews" in the URL comes right after the domain name. If your site has customized URLs, add the right number of wildcards in the disallow statement.

If there's one folder between the domain and the review pages, the Disallow statements would be:

Disallow: /*/*/reviews

Disallow: /*/*/reviews/new

If there are two folders between the domain and the review pages, the Disallow statements would be:

Disallow: /*/*/*/reviews

Disallow: /*/*/*/reviews/new

Any other customized URL should follow this same standard, with one * for each folder in the URL.

Sitemap Generator

Applies to: SuiteCommerce | SuiteCommerce Advanced



Important: Customizations such as Catalog Segmentation, Gift Wrap, and Add-on Items can affect Sitemap Generator output. Therefore, you shouldn't use Sitemap Generator for sites with these customizations. Note that the legacy sitemap generator that crawls the links on your Commerce web stores has been renamed Sitemap Crawler. Sitemap Crawler works with some Commerce web stores, but customizations can affect its output. For better performance and experience, you should use the new Sitemap Generator for your Commerce web stores.

Sitemap Generator creates an XML sitemap for your Commerce web store to help with Search Engine Optimization. By default, Sitemap Generator includes your Homepage URL with URLs of all [Commerce Categories](#), Subcategories, and Items published to your Commerce web store. You can also edit Sitemap Generator settings to include up to 10,000 extra URLs in the sitemap.



Note: Site Builder Category URLs are not included by default. However, you can manually add Site Builder Category URLs with other user-defined URLs.

Sitemap Generator creates your sitemap files and automatically places them in the file cabinet. In your Domain Settings, the value you set for the **HTML Hosting Root** field determines where your sitemap files are placed. In most cases, it's the Live Hosting Files folder. For more information, see the help topic [Set Up Domains for Web Stores](#).

In accordance with the Sitemap Protocol, the sitemap generation process generates one index file referencing one or more sitemap files for each set of 50,000 URLs.

The XML index file is named `sitemap_DomainName_Index.xml` and the XML sitemap files use the following naming convention: `sitemap_DomainName_Timestamp_SequenceNumber`. If there are multiple sitemap files in the Live Hosting Files folder, the timestamp in the file name helps you differentiate between sitemaps generated at different times.

Every time a sitemap is generated, Sitemap Generator automatically notifies search engines such as Google and Bing that your sitemap has been updated. You can also schedule automatic sitemap generation so that your sitemap is always up-to-date. For more information, see [Sitemap Generator Scheduler](#).



Note: If you regenerate a sitemap, the new sitemap files overwrite the existing ones in the same file cabinet folder. If sitemap regeneration fails, an error file with the same name as the index file (but with a `.txt` extension) is created in the same folder. That way, the existing sitemap files remain intact and aren't replaced if sitemap regeneration fails.

This topic includes the following subsections:

- [Prerequisites](#)
- [Generate a Sitemap](#)
- [Add Site Management Tools Landing Pages to the Sitemap](#)
- [Add User-Defined URLs to the Sitemap](#)
- [Sitemap Generator Scheduler](#)
- [Advanced Sitemap Configuration](#)
- [View Generated Sitemap Files](#)
- [Update Sitemap Details in the robots.txt File](#)
- [Best Practices](#)

Prerequisites

An Item URL is added to the generated sitemap only if the following conditions are fulfilled:

- The Display in Web Store option is enabled on the item record.
- The Exclude from Sitemap option isn't enabled on the item record.
- The item isn't marked as Inactive.

A Commerce Category URL is added to the generated sitemap only if the following conditions are fulfilled:

- The Commerce Categories feature is enabled as described in [Enable Commerce Categories Feature](#).
- A Commerce Catalog is created, and the Commerce Category is assigned to the Catalog.
- A URL is specified for the Commerce Category in the URL Fragment field.
- Display in Web Site is enabled for the Commerce Category.
- The Commerce Category isn't marked as Inactive.

A Commerce Subcategory URL is added to the generated sitemap only if the following conditions are fulfilled:

- The Commerce Categories feature is enabled as described in [Enable Commerce Categories Feature](#).

- A Commerce Catalog is created, and the parent Commerce Category is assigned to the Catalog.
- The Commerce Subcategory is specified under the Subcategories tab of the parent Commerce Category.
- A URL is specified for the Commerce Subcategory in the URL Fragment field.
- Display in Web Site is enabled for the Commerce Subcategory.
- The Commerce Subcategory isn't marked as Inactive.



Important: When an item goes out of stock, the item URL isn't removed from the sitemap. If your selected Out Of Stock Behavior is to remove an item when it's out-of-stock, web crawlers might still be able to discover the product details page through the sitemap.

Generate a Sitemap

When you generate a sitemap, it automatically includes your Homepage URL, Item URLs, Commerce Category URLs, and Commerce Subcategory URLs. To add extra URLs such as Site Builder Category URLs or blog posts, follow the steps outlined in [Add User-Defined URLs to the Sitemap](#). To set how often each URL changes, follow the steps outlined in [Advanced Sitemap Configuration](#).

To add metadata such as last modified date, change frequency, and priority for each URL, follow the steps outlined in [Advanced Sitemap Configuration](#).



Note: For Matrix Items, only URLs for the matrix parent items are included in the sitemap.

To generate a sitemap:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
The Sitemap Generator – Websites page appears.
2. From the list of domains, select one or more domains for which you want to generate a sitemap.
3. Click **Generate Sitemap**.
You can view the progress in the Status column.
4. The first time you generate the sitemap, you must add the sitemap index file name to the robots.txt file as described in [Update Sitemap Details in the robots.txt File](#).



Note: If the sitemap generates without errors, the Status column displays the status as **Generated**, the timestamp appears in the Last Generated column, and the number of URLs generated appears in the URL Count column. If there are errors, the Status column displays the status as **Generated with errors**. If the sitemap generation fails, the Status column displays the status as **Failed**. You can click **Generated with errors** or **Failed** to view the error report and troubleshoot the issue.

Add Site Management Tools Landing Pages to the Sitemap

You can add SMT landing page URLs to your sitemap along with the default Homepage URL, Item URLs, Commerce Category and Subcategory URLs. For more information about SMT Landing Pages, see the help topic [Landing Pages](#).

To add SMT landing page URLs to the sitemap:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
2. Click **Edit** in the **Settings** column for the desired domain.
3. Check the **Add SMT Landing Pages** box.
4. Click **Save**.

The next time you generate a sitemap for this domain, URLs for the published SMT landing pages are included. For more information, see [Generate a Sitemap](#).

Note: If you set a landing page to go live on a certain date and time, its URL isn't added to the sitemap automatically after it's published. The sitemap updates when you manually regenerate it or at the next scheduled interval (if you've set up automatic generation), if the landing page is visible on that date.

If you set a landing page to expire on a certain date and time, its URL isn't removed from the sitemap automatically after it expires. The URL is removed after you regenerate the sitemap after the page expires.

Add User-Defined URLs to the Sitemap

You can add up to 10,000 user-defined URLs to the sitemap by editing Sitemap Generator's settings, in addition to the most important page URLs that are added by default.

To add user-defined page URLs to the sitemap:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
2. Click **Edit** in the **Settings** column for the desired domain.
3. Select the **Include these Pages in the Sitemap Generation** option.
4. Manually add all the desired page URL paths.
5. Click **Save**.

The next time you generate a sitemap for this domain, the user-defined page URLs you added are included. For more information, see [Generate a Sitemap](#).

Sitemap Generator Scheduler

You can set Sitemap Generator to update your XML sitemap automatically every day, week, or month. Scheduling ensures you always have an up-to-date sitemap for search engines to index.

For example, if you frequently add new items or update product details, you can set Sitemap Generator Scheduler to run weekly.

To schedule automatic sitemap generation:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
2. Click **Edit** in the **Settings** column for the desired domain.
3. Click the **Scheduling** subtab.
4. Check the **Enable Scheduling of Sitemap Generation** box.

5. To set the frequency of automatic sitemap generation, select one of the following:
 - Daily – Triggers sitemap generation every day.
 - Weekly – Triggers sitemap generation on a specified day every week.
 - Monthly – Triggers sitemap generation on a specified day every month.
6. Click **Save**.

Advanced Sitemap Configuration

Advanced sitemap configuration lets you add extra metadata for each URL in your XML sitemap. Search engines use this information when indexing your site. Adding metadata such as the last modified date, change frequency, and priority, helps search engine crawlers to index your site more effectively.

You can add the following optional metadata in your XML sitemap through advanced sitemap configuration:

- **Show Last Modified** — Specifies the date when each page was last modified.
- **Change Frequency** — Defines how often you change your website pages. Valid values are: Always, Hourly, Daily, Weekly, Monthly, Yearly, and Never.
- **Priority** — Specifies the relative importance of this URL compared to other URLs in your site. You can select a priority from 0.0 to 1.0 on item and category records. All URLs have a default priority of 0.5, including the Homepage URL.

 **Note:** Using the advanced sitemap configuration, you can only specify if you want to include the URL priority in the sitemap or not. The URL priority itself is defined on the item and category record pages.

To add or edit the advanced sitemap configuration:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
2. Click **Edit** in the **Settings** column for the desired domain.
3. Click the **Advanced** subtab.
4. (Optional) To add the last modified date for each URL in the sitemap, select **Yes** from the Show Last Modified dropdown.
5. (Optional) To add the relative priority for each URL in the sitemap, select **Yes** from the Priority dropdown.
6. (Optional) To include the change frequency for each URL, select a value from the Change Frequency dropdown.
7. Click **Save**.

The next time you generate a sitemap for this domain, the metadata you selected is included. For more information, see [Generate a Sitemap](#).

View Generated Sitemap Files

The generated sitemap files are stored in the file cabinet.

To view the generated sitemap files:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
2. Click **Sitemap Files** in the **View** column for the desired site.

You are redirected to the folder in the file cabinet where the XML sitemap files are stored.

Update Sitemap Details in the robots.txt File

To help search engines locate your sitemap files, you must update your robots.txt file with the name and location of the sitemap index file.

 **Note:** This process currently isn't automated because robots.txt files can be heavily customized.

To update the robots.txt file with the sitemap index file name:

1. Go to Commerce > Marketing > SEO > Sitemap Generator.
2. Click **Sitemap Files** in the **View** column for the desired site.
You are redirected to the Web Site Hosting Files folder in the file cabinet where the robots.txt file is stored.
3. Note the sitemap index file name. For example, sitemap_mywebstore.com_Index.xml.
4. Edit the robots.txt file as described in [Editing Files in the File Cabinet](#).
5. Add the sitemap index file name in the following format: sitemap: http://domain/indexfilename.
For example, if your sitemap index file name is sitemap_mywebstore.com_Index.xml, add the following entry in the robots.txt file: sitemap: http://mywebstore.com/sitemap_mywebstore.com_Index.xml
6. Save the robots.txt file.

Because sitemaps are domain-specific, if multiple domains share the file cabinet root directory, you need to have two robots.txt files that point to two different sitemaps. You can do this by setting up URL redirects, as shown in the following example:

- www.mywebstore1.com/robots.txt redirects to /robots-mywebstore1.txt
- www.mywebstore2.com/robots.txt redirects to /robots-mywebstore2.txt

For information about URL redirects, see [SEO and Redirects](#).

Best Practices

When you use Sitemap Generator to generate a sitemap, consider the following best practices:

- If you use Site Builder Categories, edit Sitemap Generator's settings and manually add the Site Builder Category URLs.
- Use standard item names and avoid special symbols in the Web Store Display Name field or in the URL Component field. Sitemap Generator ignores any URLs that aren't formatted correctly, and generates the sitemap without errors.
- Use a short, descriptive name for the item in the URL Component field of the item record. Setting a name to show in the URL can help your pages rank better in search engines. If you leave it blank, the internal item ID is used as the identifier in the URL.
- Don't update the generated sitemap files manually. If you missed adding some URLs, edit Sitemap Generator's settings to include them, then regenerate the sitemap.



Important: If you use a third-party sitemap generator, verify that all URLs are valid in the generated sitemap. If your sitemap contains invalid URLs, such as those containing undefined strings (url:undefined), the invalid URLs may be returned in Google search results.

SEO and Page Titles

Applies to: SuiteCommerce | SuiteCommerce Advanced

The page title is an important component of your site's SEO because it is the primary label for the page. Page titles should be descriptive, unique for each page, and contain keywords relative to the content of the page. The page title:

- Is normally used as the main description and link in search results
- Is displayed in the title bar or tab of web browsers
- Is often used by third party websites when providing a link to a page on your site

Most SEO experts and major search providers agree that page titles should be about 55 characters long. Try to keep your page titles as informative and concise as possible. Place important keywords and phrases at the beginning of the title, so they're less likely to get cut off in search results.

The location where you set your page titles varies, depending on the page for which you need to set a title. See the following sections for information about setting page titles for a particular page:

- [Home Page Title](#)
- [Item Detail Page Titles](#)
- [Landing Page Titles](#)
- [Facet Search Page Titles](#)



Note: There is a 300 character limit for all page title fields.

Home Page Title

By default, the title for the home page of a standard SCA site is **Welcome to the Store**. You can change the home page title to follow SEO best practices for page titles.

If you use Site Management Tools, you can set the home page title by enhancing the home page. For more information, see the help topic [Enhanced Pages](#).

If you use Content Delivery, you can set the home page title with a custom module.

To change the home page title with a custom module:

1. In your local source files, edit the HomeView.js file in your custom Home module.
2. Locate the following line of code and replace Welcome to the Store with the value you want to use as the title for the home page of your site.

```
1 | , title: _('Welcome to the Store').translate()
```

3. Deploy the custom module to your site. For more information about creating a custom module, see the help topic [Develop Your SCA Customization](#).

For more information, see the help topic [Setting Page Titles with Content Delivery](#).

Item Detail Page Titles

You specify the title for item details pages on the item record. This lets you create a unique, and descriptive title for each item in your store. When you create titles for your item detail pages, follow SEO best practices and use a unique, descriptive title with keywords or phrases that shoppers are likely to search for. Adopt a consistent title naming convention such as **brand, item** or **brand, model, item**. For example **Major Brand Men's Classic Oxford** or **Major Brand Z-Series LED Television**. Following this practice helps you standardize your item page titles across your site and ensures strong SEO page titles for your items.

To set titles for item detail pages

1. Go to Lists > Websites > Items.
2. Click the **Edit** link for the item.
3. On the **Web Store** subtab, enter the page title for the item in the **Page Title** field.
4. Click **Save**.

For more information about item records, see the help topic [Item Record Management](#).

Landing Page Titles

When you create a landing page, you can set key SEO details, including the page title. Common landing pages might include pages for **About Us**, **Contact Us**, **Return Policy**, and so on. Use the same SEO best practices as you do for other pages. A good page title for a contact us page is **Your Company — Contact Us**.

If you use Site Management Tools, you can set the landing page titles as you create the page. For more information, see the help topic [Landing Pages](#).

If you use Content Delivery, you can set the landing page titles directly on the Content Delivery landing page record. For more information, see the help topic [Using Content Delivery](#).

Facet Search Page Titles

You can use enhanced pages to set SEO-friendly page titles for your search pages. This lets you create unique page titles for different combinations of facet filters applied to the page. For example, if a customer filters an item list page for a name brand manufacturer of sports equipment. You can set the page title **Major Brand Sports Equipment**. Or if the filter is for men's loafers for a major designer you can set the page title to **Major Designer Men's Loafers**.

If you use Site Management Tools, you set the titles by enhancing the facet page. For more information, see the help topic [Enhanced Pages](#).

If you use Content Delivery, you can create an enhanced page to set the title. For more information, see the help topic [Using Content Delivery](#).

Structured Data Markup

Applies to: SuiteCommerce | SuiteCommerce Advanced

The JSON-LD Structured Data Format feature needs:

- SuiteCommerce or SuiteCommerce 2020.1 (or later)

- A theme based on the 2020.1 (or later) Base Theme.

Major search engines use structured data markup to discover more details about a page and improve search results.



Note: The URL for parent and child matrix items is the same and will be tracked as the same by search engines.

SuiteCommerce web stores use JavaScript Object Notation for Linked Data (JSON-LD) when implementing structured data markup. The JSON-LD markup is located within script tags in the HTML head section of product detail pages. Product list pages don't include the JSON-LD markup.

See schema.org/product for more information about product-related schema.

Setup

To use structured data markup for your domain, you need to configure two options in the domain configuration record. After you save your changes, SuiteCommerce websites automatically add valid JSON-LD structured data markup to each product detail page. See [JSON-LD Product Schema Properties](#) for an alphabetical list of properties used in the structured data markup.

Enable Structured Data Markup

1. In NetSuite, go to Commerce > Websites > Configuration.
2. Select your website and domain and click **Configure**.
3. In the configuration record, go to the **Shopping Catalog** tab and the **Structured Data Markup** subtab.
4. Select JSON-LD in the **Markup Type** field to add it to all product detail pages, or pick No Markup if you don't want it added.
5. Choose an Out of Stock Behavior—these options only matter if backorders are allowed.
Options include:
 - **InStock** — Choose this when backorders are allowed, and the availability property will be set to: <http://schema.org/InStock>. InStock is the default value.
 - **PreOrder** — Choose this when backorders are allowed, and the availability property will be set to: <http://schema.org/PreOrder>.
6. Click **Save**.

JSON-LD Product Schema Properties

SuiteCommerce and SuiteCommerce Advanced use the properties listed in the table to describe product content.

Property	Content
aggregateRating	Overall rating, based on a collection of reviews or ratings, of the item. For additional information about each associated subfield, see AggregateRating .
availability	Availability of the item when backorders are permitted. Options include InStock or PreOrder. InStock is the default.
description	Description of the item.

image	Location URL of an image of the item. See ImageObject .
name	Name of the item.
offers	Details about the item offered for sale.
price	Offer price of the item.
priceCurrency	Currency code used for the price. See ISO 4217 for a list of valid currency codes.
ratingValue	Content rating.
review	Review of the item.
reviewCount	Total number of reviews.
sku	Merchant-specific identifier for the item.
url	URL of the item.

See the following sample of JSON-LD markup:

```

1 <script type="application/ld+json">
2 {
3   "@context": "https://schema.org",
4   "@type": "Product",
5   "name": "Yamaha 2017 BB735A Electric Guitar - Dark",
6   "aggregateRating": {
7     "@type": "AggregateRating",
8     "ratingValue": "5",
9     "reviewCount": "1"
10  }
11  "description": "The Yamaha 2017 BB735A Electric Guitar is a superior guitar.",
12  "url": "https://search.google.com/Yamaha-2017-BB735A-Electric-Guitar-Dark?quantity=1",
13  "image": "http://test.commerceapplication.com/Images/yamaha_2017_bb735a.00.jpg?resiseid=31&resizeh=600&resizew=600",
14  "sku": "Yamaha 2017 BB735A Electric Guitar - Dark",
15  "offers": {
16    "@type": "Offer",
17    "url": "https://search.google.com/Yamaha-2017-BB735A-Electric-Guitar-Dark?quantity=1",
18    "availability": "http://schema.org/InStock",
19    "price": "769.00",
20    "priceCurrency": "USD"
21  },
22  "review": []
23 },
24 </script>

```

SEO and Meta Descriptions

Applies to: SuiteCommerce | SuiteCommerce Advanced

Meta tags are HTML elements you can add to the pages of your site to give search engines more information about each page. The content of the meta tag doesn't display on your website for visitors. Meta tags go in the head section of a page's HTML code, and are available to search engines. The most important of these meta tags is the meta description.

The meta description tag lets you describe your page to the search engine. Search results pages often use this description to summarize your page. Since this is what people see in search results, make sure your description includes keywords and enough information to encourage people to click your link. You should usually keep the meta description to 155 characters. Like any marketing copy, the description should include a call to action that encourages people to visit your site.

Meta tags use a name/value pair format. Here's an example of a meta description for a website that sells shoes:

```
1 <meta name="description" content="Do your feet a favor! Shop the best deals on men's dress shoes, loafers, sneakers, boots, and more at YourSite.com!">
```

The search results page will show this entry as:

Men's Shoes | YourSite.com
www.YourSite.com/mens ▾ YourSite ▾
 Do your feet a favor! **Shop** the best deals on **men's dress shoes**, loafers, sneakers, boots, and more at YourSite.com!

In this example, the first line comes from the [Home Page Title](#), and the description comes from the meta description. The search keywords are displayed in bold.

Placing Meta Tags on the Pages of Your Site

How you place meta tags on your site can vary depending on the page. Check out these topics for information about adding a meta description to each page.

- [Homepage Meta Description](#)
- [Facet Page Meta Description](#)
- [Item Detail Page Meta Description](#)
- [Landing Page Meta Description](#)

 **Note:** If your meta description doesn't show up, try clearing your browser cache.

Homepage Meta Description

The meta description on your homepage is your invitation for people to click through from search results. It should be clear and concise, while also encouraging people to visit your website. A good way to write better descriptions is to look at what your competitors or similar businesses are doing.

You can set your site's meta description with Site Management Tools by enhancing the home page. See the help topic [Enhanced Pages](#).

If you use Content Delivery, you can set the meta description with a content delivery enhanced page. See the help topic [Meta Description for the Home Page](#).

Facet Page Meta Description

You can use Site Management Tools to create the meta description for facet search pages. For example, for a facet filter of men's shoes, your description may be **Shop the best deals on men's dress shoes, loafers, sneakers, boots, and more at YourSite.com.**

When you use Site Management Tools, you can set the facet page description by enhancing the facet page. See the help topic [Enhanced Pages](#).

If you use Content Delivery, you can set the meta description with a Content Delivery enhanced page. See the help topic [Meta Description for Facet Pages](#)


Item Detail Page Meta Description

By setting the meta description for your items, you can describe each item detail page to search engines. The description might also show up as the summary in search results when someone searches for that item. You can set the meta description for each item on the item record.

Since people searching for a specific item are looking at a product level, be sure to include details like the brand, make, model, and so on. You should also add unique marketing content to make your description your sales pitch to shoppers.

To set the meta description for items:

1. Go to Lists > Website > Items.
2. Click the **edit** link for the item.
3. On the **Web Store** subtab, in the **Meta Tag HTML** field, enter the full HTML code for the meta description. For example:

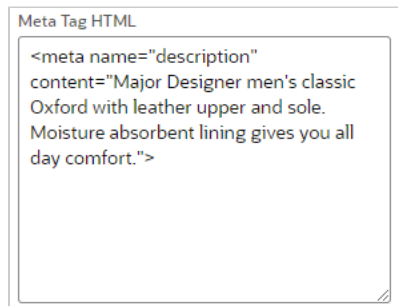

The screenshot shows a text area titled "Meta Tag HTML" containing the following HTML code:

```
<meta name="description"
content="Major Designer men's classic
Oxford with leather upper and sole.
Moisture absorbent lining gives you all
day comfort.">
```

4. Click **Save**.

Landing Page Meta Description

Like other pages, the meta description tag for a landing page like **About Us** or **Contact Us** tells search engines about the page and is often used as the page summary in search results. So, be sure to follow best practices when writing these descriptions. Be sure to include keywords shoppers are likely to use when searching for this type of information. Equally as important, make sure those keywords appear in the text on the landing page too.

You can set the landing page metadata description in Site Management Tools when you create the Landing Page. See the help topic [Landing Pages](#).

If you use Content Delivery, you can set the landing page meta description on the content delivery landing page record. See the help topic [Using Content Delivery](#).

SEO and Images

Applies to: SuiteCommerce | SuiteCommerce Advanced

Two important SEO considerations for image files are the image alternate text and the image file name.

- [Image Alternate Text](#)
- [Image File Names](#)

Image Alternate Text

The image alternate text tag serves three important functions:

- Alternate text shows up on the page if an image doesn't load, like when a browser is set not to show images.
- Screen readers use alternate text to describe images out loud, since they can't see the image.
- Alternate text also tells search engines what the image is about.

That's why you should always add alternate text to your site's images. Good alternate text gives a clear description of what's in the image. For example, if the image shows men's beige cargo shorts from a name brand, the alternate text could be **[Brand Name] Men's Cargo Shorts-Beige**. The `img` HTML tag for this image would look like this:

```
1 | 
```

You can add alternate text to your item images on the item record.

To add alternate text for item images:

1. Go to Lists > Accounting > Items.
2. Click the **Edit** link for the item for which you need to add image alternate text.
3. Select the **Web Store** subtab.
4. The **Associated Images** subtab lists all image files associated with this item.
5. Click the filename link to open the File Detail page.
6. Click **Edit**.
7. In the **Alt Image Tag** field, enter the alternate text for this image.

The screenshot shows the 'File Detail' page in NetSuite. At the top, there are buttons for 'Save', 'Cancel', and 'Reset', along with an 'Actions' dropdown. The form contains the following fields:

- FILE NAME ***: OL5755.mens-cargo-shorts-beige-front.jpg
- FILE TYPE**: JPEG Image
- FILE SIZE (BYTES)**: 58,818
- FOLDER ***: Web Site Hosting Files : Live Hosting Files : Images
- DESCRIPTION**: (Empty text area)
- ALT IMAGE TAG**: Name Brand Men's Cargo Shorts-Beige (This field is highlighted with a red border)

Note: It's important to enter the text in the Alt Image Tag field on the File Detail page, not the Inventory Item page. Alt text on the Inventory Item page gets truncated at 35 characters, but on the File Detail page, it doesn't.

8. Click **Save**.

Note: You can only update alt text one image at a time, unless you use customization. To learn more about customization, see the help topic [Develop SCA Customizations](#).

Image File Names

SEO best practice states your image file names should be descriptive and show what the image is about. It's easier for search engines to index your images when you use descriptive file names. Also, SuiteCommerce Advanced can automatically match your image files to items if you start the image file name with the item identifier and a delimiter.


The item identifier can be any of the following:

- Display Name/Code
- UPC Code
- URL Component

You specify the identifier on the **Images** subtab of the Web Site Setup page at Commerce > Websites > Website List. Consider the following sample file name:

0L5755.mens-cargo-shorts-beige-front.jpg

The first part of the file name, 0L5755., is the item's UPC Code, and the period is the delimiter. SuiteCommerce Advanced uses this to know which item the image belongs to. In this screenshot, you can see the UPC field from the item record.

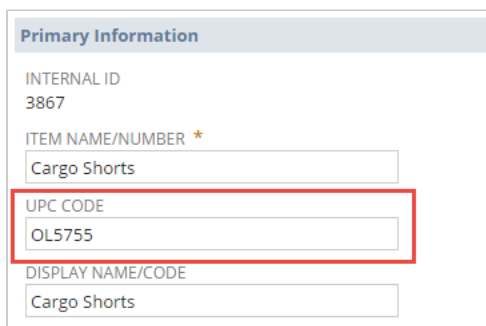

The screenshot shows a form titled "Primary Information" for an item record. It contains several fields: "INTERNAL ID" with the value "3867", "ITEM NAME/NUMBER" with the value "Cargo Shorts", "UPC CODE" with the value "0L5755", and "DISPLAY NAME/CODE" with the value "Cargo Shorts". The "UPC CODE" field is highlighted with a red rectangular box.

The rest of the file name describes the image: men's cargo shorts, beige, front view. Search engines can figure out this information by analyzing the file name.

For more information about setting up images for SuiteCommerce Advanced Websites, see the help topic [Item Images](#).

Customizing Item URLs for SEO

Applies to: SuiteCommerce | SuiteCommerce Advanced

A well-defined item URL provides both shoppers and search engine web crawlers an indication of what the destination page will be about. In NetSuite, you can customize Commerce website URLs for items and facets. Website managers, administrators, and anyone with access to item records and facets can enter URL components and aliases. By default, the item URLs are displayed using URL Components defined on item records. If URL component is not defined for an item, the internal ID of the item is used. For

example, you may see something similar to `www.mywebstore.com/product/361` as the URL for an item. To get the most out of SEO, it's better to use URL components, so you'll see URLs like `www.mywebstore.com/namebrandhelmet`.

URL Component Aliases are useful when you update URL components that point to items on your website, and you want to keep a list of the URL aliases that were used in the past. For more information, see [URL Component Aliases](#).

Use URL Components for Item URLs

Here's what you should do to use URL Components for item URLs:

1. Set URL Components on the items records.
2. Add the **URL Component** field to the Search Field Set.

To set URL Component on an item record:

1. Go to Lists > Accounting > Items.
2. Click **Edit** next to the desired item.
3. Click the **Web Store** subtab.
4. Under the Search Engine and Feeds section, enter the desired URL Component value in the **URL Component** field.
5. Click **Save**.

The URL Component field is now set for the item. To define URL Component Aliases for the item, see [URL Component Aliases](#).

To add the URL Component field to the Search Field Set:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the desired website.
3. Click the **Field Sets** subtab.
4. For the Search Field set, select **Fields Included in Field Set** details and click the **Set** icon in the lower right corner.
5. In the **Field Set** popup window, select the **URL Component** field from the **Field Name** list and click **Add**.
6. Click **Submit** and then **Done** on the Search field set line item.

SEO and Canonicalization

Applies to: SuiteCommerce | SuiteCommerce Advanced

In SEO, canonicalization means picking a standard URL when a page is available through different links. For example, if people can get to the same page on your site by three URLs, each link splits the page's popularity, so it won't be as popular as it could be. Canonicalization lets you tell the web crawler which URL you prefer people to use for the page. For more information, see [URL Component Aliases](#).

These same principles hold true if visitors can access your site by using different domains. For Example `http://www.mywebstore.com` and `http://mywebstore.com` both take a visitor to the home page of your

site. SEO best practice states that you should choose only one and be consistent in its use. For more information, see [Canonical Domains](#)

URL Component Aliases

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

If you're using URL Components on your item records, URL Component Aliases let you set up aliases for items or facets where you've changed the URL Component. For example, maybe you first set up a prelude tank top with the URL Component **tank-top-prelude**, but later decide that **Prelude-Tank-Top** works better.

Remember, if you change a URL parameter, the page might already be indexed with the old one, and visitors may have bookmarked or shared the previous URL. If you change the URL parameter, any search engine that tries to visit the page will get a 404 Page Not Found error.

By using the URL Component Aliases feature, you can change the URL Component for the item to **Prelude-Tank-Top**, and define a URL Component Alias for **tank-top-prelude**. When a visitor visits <http://mywebstore.com/tank-top-prelude>, they are automatically redirected to <http://mywebstore.com/Prelude-Tank-Top>. You can define the following URL Component Aliases for the same item:

- tank-top-prelude
- Tank-Top-Prelude
- prelude-tank-top

 **Note:** URL Component Aliases are available only for Shopflow 1.06 or later.

To use URL Component Aliases, you must first enable the URL Components Alias feature in NetSuite. For more information, see [Enable URL Components Alias](#). Then you can enter URL Components on item records, and use the URL Component Alias subtab to maintain a list of aliases for that item. For more information, see [URL Components on Items](#). To manage URL components for facets, you can use the URL Components for Facets page. For more information, see [URL Components for Facets](#).

Enable URL Components Alias

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

URL component aliases are useful when you update URL components that point to products on your site, and you want to keep a list of the URL aliases that were used in the past. By enabling the URL Component Aliases feature, you can consolidate all your different variations into one main URL component and avoid duplicate content.

 **Note:** The URL Component Aliases feature is only supported in SuiteCommerce and SuiteCommerce Advanced.

To enable the URL Components Alias feature:

1. Go to Setup > Company > Enable Features.
2. Click the **Web Presence** subtab.
3. Check the box next to **URL Component Aliases**.

4. Click **Save**.

URL Components on Items

Applies to: SuiteCommerce | SuiteCommerce Advanced

In Commerce web stores, you can keep a list of URL components for the products you sell on your website. First, enter the URL component you want to use on your website, then add the previous value to the list of aliases. Use the URL Component Alias subtab to keep a list of old aliases for that product .

To use the URL Component Alias subtab:

1. Go to Lists > Accounting > Items.
2. Click **Edit** next to the item record you want to modify.
3. Click the **Web Store** subtab.
4. Under the Search Engine and Feeds section, enter the desired URL Component value in the **URL Component** field.
5. Click the **URL Component Alias** subtab at the bottom of the page and enter an alias.
6. Click **Add**.
7. To modify an existing alias, click the alias, make your change, and then click **OK**.
8. Click **Save** to store your changes.



Important: The following file extensions are not supported in URL Components, as there may be conflicts with Commerce web stores or NetSuite framework technologies: **nl | nlqs | f | xls | doc | jws**.

Additional Notes on URL Component Alias Management

- For Site Builder websites, URL aliases are ignored.
- If the URL Component Alias feature is enabled, the **URL Component Alias** subtab is displayed on supported record types.
- If the URL Component Alias feature is disabled all existing aliases are deleted and the subtab is removed.
- The word **category** is a reserved keyword for NetSuite URLs. Using **category** as a URL component results in the following error:

The URL component you entered is a reserved character string in the NetSuite application. Enter a different URL component to continue".

URL Components for Facets

Applies to: SuiteCommerce | SuiteCommerce Advanced

Use NetSuite to set up and change URL Components for facets. Use the URL Definition page to set up URL Components for facets. NetSuite lets you try different URL Components on your site and keeps a list of old aliases. The supported URL configuration looks similar to `www.mywebstore.com/kitchen/plastic-spatulas`.

Note: When you use the URL Component Alias feature in Commerce web stores, some configuration is required to fully integrate facet URL aliases. Modify the configuration to use the same facet values you set on the URL Components for Facets in NetSuite. For detailed information about customizing these values, see the help topic [Select and Configure Facet Fields](#).

To manage URL components for facets:

1. Make sure the feature is enabled. For more information, see [Enable URL Components Alias](#).
2. Go to Commerce > Marketing > SEO > URL Components for Facets.
3. Click **Edit** or **View** on the URL Components for Facets page to access the URL Definition page.
4. Enter a value in the **URL Component** field.

The following fields are displayed on the on the URL Definition page:

- a. **Facet Field Name** – (Read-only) Shows the facet field name mapped from the **Facet Fields** subtab on the Web Site Setup page.
 - b. **Web Site** – (Read-only) Shows the website associated with the facet. Note: One facet used on multiple sites has the same URL component and list of aliases for each site.
 - c. **URL Component** – This field contains the URL component for the facet field.
 - d. **Alias** – This is a list of URL Component aliases that were previously used for this facet field. You can add, modify or remove values in this list.
5. Click **Save**.

Go back to the list on the URL Components for Facets page to view your changes. To see a list of all values for a certain facet, click **View Values**. You can also click Edit from the Facet Values List page to further modify facet values.

Important: If you do not see expected updates to the list of URL components for facets, wait until the search index process is complete. If the list is still not updated, [Rebuild the Search Index Manually](#).

Additional Notes on Managing URL Components for Facets

- When you add a facet on the Web Site Setup page, it is then added to the list at Commerce > Marketing > SEO > URL Components for Facets.
- A facet value must be displayed on the URL Components for Facets list before it can be modified.
- The following actions trigger the search index rebuild:
 - Clicking Save on the URL Component Definition page after modifying a facet value. The URL component value is not available for further modification until after it is displayed in the list of URL Components for Facets.
 - Adding a new facet to an item record. After the search index process is complete, the newly added facet value is displayed in the list at Commerce > Marketing > SEO > URL Components for Facets.

Canonical Domains

Applies to: SuiteCommerce | SuiteCommerce Advanced

The canonical domain is the preferred domain for your website. This matters when visitors can reach your site through different domains. Even though most people know that **http://www.mysite.com** and

http://mysite.com are the same website, search engines see them as two different websites. That's why it's important to tell search engines which domain you prefer for your site.

The WWW domain and the non-WWW domain are equal when it comes to SEO. The important thing is to pick one and stick with it across your site. That means if you pick the non-www domain, any absolute links to other pages on your site should use the non-www domain.

When you have multiple CNAME records for your domain, use the Domains subtab on the website setup record to set the primary URL and define any aliases, so visitors using any alias are redirected to your site's primary URL. Also, search engines treat this as a 301 redirect from any alias to your site's primary URL.

The canonical URL displays the URL options you selected in the Facets SEO subtab in the SuiteCommerce Configuration record. See the help topic [Facets SEO Subtab](#).

To set the canonical domain for your site:

1. Go to Commerce > Websites > Website List.
2. Click the **edit** link for the website for which you need to establish a canonical domain.
3. Select the **Domain** subtab.
4. In the list of Domains, locate your primary domain.
5. In the **Primary Web Site URL** column for your primary domain, check the box to indicate that this is the primary domain for the site.
6. Enter a new record in the table for each domain alias for which you have a CNAME record.

 **Note:** Any domain alias you enter here must have a corresponding CNAME DNS record defined with your domain provider.

7. Click **Save**.

When visitors or search engines access your site with any of the domain aliases that you specify here, they are automatically redirected to the URL that you have marked as the primary website URL.

Adding a Third-Party Script for Analytics Tracking

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

You can connect third-party services to your SuiteCommerce Advanced website. However, keep in mind that the SEO page generator doesn't evaluate third-party scripts by default. You can specify `ns-server-execute='T'` to make sure the script runs.

Scripts stored in the NetSuite file cabinet are evaluated automatically in the SEO page generator. Any JavaScript file referenced by a NetSuite domain URL, like `system.netsuite.com`, or by your custom website domain, runs automatically in the SEO page generator. To avoid running tracking scripts like Google Analytics or visual-only JavaScripts twice, the SEO page generator doesn't automatically evaluate third-party scripts. This keeps the script from running in both the browser that made the request and the SEO page generator.

If you're calling a script from a different location, like a third-party website, it doesn't run automatically. So, you need to specify `ns-server-execute='T'` to make sure the script runs as expected. See the following code sample:

```
1 | <script type='text/javascript' ns-server-execute='T' src='http://thirdparty.com/script.js'>
```



Important: The third-party scripts run in a Single Page Application (SPA) website, and not all third-party scripts are set up for SPAs. Consequently, the scripts might not work, or you might need a more complex integration than adding a script tag like above.

If you don't want a script in the file cabinet to run in the SEO page generator, specify `ns- serverexecute='F'` to make sure it isn't evaluated.

If JavaScript dynamically injects a `<script>` tag into the DOM, the script will run in the SEO page generator no matter what the domain is or if you use `ns- server-execute='F'` attribute. But you can wrap the script in a statement like this to show it's not meant for the SEO page generator:

```
1 | if(!ISC.isPageGenerator()){  
2 | // Insert non-page generator content here }
```