

ORACLE
NetSuite

SuiteCommerce System Management

2025.2

January 7, 2026



Copyright © 2005, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

If this document is in public or private pre-General Availability status:

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

If this document is in private pre-General Availability status:

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described in this document may change and remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Sample Code

Oracle may provide sample code in SuiteAnswers, the Help Center, User Guides, or elsewhere through help links. All such sample code is provided "as is" and "as available", for use only with an authorized NetSuite Service account, and is made available as a SuiteCloud Technology subject to the SuiteCloud Terms of Service at www.netsuite.com/tos.

Oracle may modify or remove sample code at any time without notice.

No Excessive Use of the Service

As the Service is a multi-tenant service offering on shared databases, Customer may not use the Service in excess of limits or thresholds that Oracle considers commercially reasonable for the Service. If Oracle reasonably concludes that a Customer's use is excessive and/or will cause immediate or ongoing performance issues for one or more of Oracle's other customers, Oracle may slow down or throttle Customer's excess use until such time that Customer's use stays within reasonable limits. If Customer's particular usage pattern requires a higher limit or threshold, then the Customer should procure a subscription to the Service that accommodates a higher limit and/or threshold that more effectively aligns with the Customer's actual usage pattern.

Beta Features

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in pre-General Availability status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your pre-General Availability trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

Table of Contents

Domains	10
Overview	10
Introduction to Domains	11
Types of Domains	12
Domain Options for Web Stores	13
Secure Domains	13
Overview of SSL Encryption	14
Types of Secure Domains in NetSuite	15
Automatic and Manual Certificates	16
Set Up Domains for Web Stores	18
Set Up a Domain	19
Secure Your Domain	21
Deploy Your Domain	22
Set Up DNS Verification	22
Convert a Web Store Only Domain to a Single Domain for Web Store and Checkout	24
Link a Checkout Domain with Your Web Store	24
Point Your Domain Name at Your Domain (DNS Settings)	26
Importance of Proper DNS Setup	27
Troubleshoot Domain Setup Errors	29
Deployment Status	31
DNS Status	31
DNS Verification Status	32
Certificate Status	32
Designate a Primary Domain	33
Delete a Domain	34
Advanced Domain Setup	35
Manual Certificates	35
Select Type of SSL Certificate	36
Generate a CSR	37
Submit Your CSR	38
Retrieve Your Certificates	38
Secure Domain Using Manual Certificate	38
Maintenance of Manual Certificates	39
Manual Certificates FAQ	41
Secure Domain Licenses	42
Web Store Sessions	43
Roles	44
Session States, Sign in, and Cookies	44
Shopping Cart Use Case	45
Website Domains and Email Hosting	48
CNAME Flattening (Dynamic A Record)	48
Static A Record	50
Configuration	51
Overview	51
Configure Properties	52
Configuration Properties Reference	55
Store Locator Tab	55
Store Locator Google Maps Subtab	56
Store Locator Subtab	58
My Account Tab	61
Subscriptions Subtab	61
Return Authorization Subtab	63
Preferences Subtab	64

Overview Subtab	64
Transaction List Columns Subtab	65
SCIS Integration Subtab	69
Cases Subtab	70
Quotes Subtab	71
List Header Subtab	75
Addresses Subtab	75
Advanced Tab	76
Cache Subtab	76
Security Subtab	77
Extensions Subtab	78
Invoice Subtab	79
Email Verification Subtab	80
Blocklist Email Domains Subtab	81
Pagination Subtab	82
Search Results Subtab	84
Backend Subtab	85
Filter Site Subtab	87
Favicon Path Subtab	88
Item Options Subtab	88
Custom Fields Subtab	90
Image Resize Subtab	90
Shopping Tab	91
Quick Order Subtab	91
Reviews Subtab	92
Wishlist Subtab	95
Item Options Subtab	97
Newsletter Subtab	97
Checkout Tab	97
Pick Up In Store Subtab	98
Checkout Experience Subtab	99
Forms Subtab	100
Quantity Stock Message Subtab	101
Payment Instruments & Methods Tab	102
Payment Methods Subtab	103
Payment Instrument ACH Subtab	103
Credit Card Subtab	104
Integrations Tab	106
Twitter Subtab	106
Pinterest Subtab	110
Facebook Subtab	113
Google Analytics 4 Subtab	116
Google Universal Analytics Subtab	118
Google Tag Manager Subtab	119
Google AdWords Subtab	120
Captcha Subtab	121
Site Management Tools Subtab	123
Categories Subtab	125
Multi-Domain Tab	128
Translations Subtab	129
Hosts Subtab	130
Search Tab	132
Type Ahead Subtab	132
Result Sorting Subtab	133
Search Results per Page Subtab	134

Search Results Subtab	134
Result Display Options Subtab	135
Shopping Catalog Tab	136
Structured Data Markup Subtab	140
Recently Viewed Items Subtab	141
Item Options Templates Subtab	142
Facets SEO Subtab	143
Facets Delimiters Subtab	144
Facets Subtab	147
Product Details Information Subtab	150
Multi-Image Option Subtab	151
Layout Tab	152
Header Subtab	152
Cookies Warning Banner Subtab	153
Images Subtab	154
Navigation Subtab	154
Carousel Images Subtab	155
Bottom Banner Images Subtab	156
Color Palettes Subtab	156
Light Colors Subtab	158
Footer Subtab	158
Legacy Tab	158
Newsletter Subtab	159
Footer Subtab	160
Configuration File Types	161
JSON Configuration Files	161
Create JSON Configuration Files	163
JavaScript Configuration Files	179
Site Management Tools Configuration	181
Site Management Tools Templates and Areas	181
Area and Scope	181
Templates and Areas	185
Site Management Tools Custom Preview Screen Sizes	196
Working with Site Management Tools Landing Pages in a Sandbox Account	197
Changing Site Management Tools to Use a Different Hosting Root	198
Configuring Escape to Log In	199
Internationalization of Site Management Tools Administration	200
CMS Records for Site Management Tools	200
Custom Record for CMS Content	201
CMS Contents Record	202
CMS Page Record	204
CMS Page Type Record	205
Site Management Tools Custom Content Type	208
Custom Record for Custom Content Type	208
CMS Content Type Record	211
Templates and Theme Areas for SuiteCommerce Themes	214
My Account Theme Area	214
Checkout Theme Area	215
Shopping Theme Area	215
Caching	217
Overview	217
CDN Caching	218
Enable CDN Caching	220
Configure CDN Caching	220
Bypass CDN Cache	221

Cache Invalidation	222
Cache Invalidation Request	222
Cache Invalidation Status	223
Automatic Cache Invalidation	224
Find URLs for Cache Invalidation	225
Cache Invalidation in Specific Scenarios	225
CDN Caching for Secure Domains	228
Product Merchandising Rule Caching	230
Application Performance Management (APM) for Commerce	231
Application Performance Management (APM) for Commerce	231
APM for Commerce Terminology	232
APM for Commerce Prerequisites	233
Installing APM for Commerce Features	234
Granting Access to APM for Commerce Features	236
APM for Commerce Dashboards	238
SuiteCommerce Performance Dashboard	239
SuiteCommerce Page Type Diagnostics	240
SuiteCommerce Page View Details	244
SuiteCommerce Action Diagnostics	245
SuiteCommerce InStore Performance Diagnostics	246
APM for Commerce Action Performance	249
APM Action Diagnostics	253
APM Action History	255
APM Action History Detail	256
APM Scenarios for SuiteCommerce	260
APM Scenarios for SCIS	261
Microsites	264
Overview	264
Multi-Site Development	265
Configure NetSuite for Multi-site	265
Organize Source Files for Multi-site	265
Deploy a Specific Website	266
Assign Customers to Websites	267
SuiteCommerce and OneWorld	270
Multi-Currency	270
Cross-Subsidiary Fulfillment	271
Localization	274
Set Up NetSuite for Localized Content	274
Create Custom String Literals	276
Configure Hosts for Sites with Multiple Languages	277
The Translation Process	279
Pass String Literals	281
Pass Parameters and HTML	282
Localize Content from the Content Delivery Service	282
Integration	284
Overview	284
Single Sign-on Integration with External Websites	285
SAML Single Sign-on Access to Web Store	285
SAML SSO Configuration for Web Stores	286
OpenID Connect (OIDC) Access to Web Store	287
Outbound Single Sign-on (SuiteSignOn) Access from Your Web Store	288
SuiteCommerce InStore Integration	289
Configure your Site for SCIS Integration	289
Content Delivery Integration	291
Understanding Content Delivery	291

Using Content Delivery	292
Creating a Content Record	295
Understanding Content Delivery Caching	296
SEO Considerations for Content Delivery	297
Preparing Pages for Content Delivery	299
Permission Validation	300
Site Security	302
Overview	302
Feature Access Permissions	303
My Account Menu Permissions	303
Customer Center Custom Permissions	304
Website Restriction	306
Restrict Access to Your Entire Site	306
Restrict Access to Pricing Information	308
McAfee Secure	309
Website System Notes	310
Website Deletion and Deactivation	311
Overview	311
Deleting a Website	312
Making a Website Inactive	313
Taking a Website Offline for Maintenance	315
Differences between Deleting, Inactivating, and Taking a Website Offline	316
SSP Applications	317
Overview	317
SSP Application Overview	318
Components of SSP Applications	319
SSP Applications Compared to Customization with SuiteScript	320
SSP Applications (SuiteScript 1.0 Compared with SuiteScript 2.0)	322
Create and Use SSP Applications	324
The URL Root and its Components	324
View and Add Application Publishers	325
Create an SSP Application Folder	326
SuiteScript 1.0 SSP Applications	326
Enable Required Features for SuiteScript 1.0 SSP Applications	327
Create a SuiteScript 1.0 SSP Application Record	327
Upload SSP Application Files	329
Set Execute as Role Permissions for .ss and .ssp Files	330
Select Supported Touch Points	331
Link a Website or Domain to an SSP Application	332
Remove Touch Points	333
Change SSP Application Precedence	334
Sample SSP Application Code (SuiteScript 1.0)	334
Debug a SuiteScript 1.0 SSP Application	342
SuiteScript 2.0 SSP Applications	343
Create a SuiteScript 2.0 SSP Application Record	344
Upload SSP Application Files to the File Cabinet	345
Set Execute as Role Permissions for .ss and .ssp Files	345
Select Default SSP File	346
Make SSP Application available on System Domain	347
Deploy and Undeploy SSP Applications	347
Sample SSP Application Code (SuiteScript 2.0)	348
Debug a SuiteScript 2.0 SSP Application	352
Records that Support Execute as Role Permissions	353
Integration with Third-Party Checkout Providers	355
Integrating with PayPal Express	355

Integrating with 3D Secure (SCA Elbrus and Earlier)	357
Bundle an SSP Application	364

Overview

i Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

A domain is the physical location on a web server where your website lives. A domain name is the **address** of that physical location. If you think of a website as a store, the website is the building, the domain is the land it's built on, and the domain name is the official street address. Without a domain and a domain name, a website is like a building plan in an architect's office — the owners know what it'll look like, but it doesn't physically exist and customers can't visit it.

To make your website available to customers, do the following:

- Buy a domain name from a provider
- Set up a domain on a NetSuite server
- Link the domain and domain name together

You can also use domains in NetSuite to:

- Send bulk email through campaigns or email merges
- Point to a web page in your NetSuite File Cabinet
- Redirect to any URL you choose
- Redirect to a promotional domain

See the following topics for more information about domains:

- [Introduction to Domains](#) – provides an introduction to domains and how they work in NetSuite. It also covers secure domains and how you can secure a domain in NetSuite. The [Domain Setup Checklist](#) has step-by-step instructions for setting up a domain in NetSuite.
- [Set Up Domains for Web Stores](#) – explains how to set up and automatically secure different types of domains, like web stores, shopping domains, custom checkout domains, and hosted domains. It also covers common setup errors and how to fix them.
- [Advanced Domain Setup](#) – covers advanced topics like:
 - how to manually secure domains with SSL certificates from your preferred certificate authorities (CAs).
 - how web stores transfer shopping session data between shopping and checkout domains, when these domains are separate.
 - how to set up email domains for large email campaigns.
 - how to upload a custom maintenance page to display during routine updates or scheduled NetSuite maintenance.




Important: All domain types you set up in NetSuite must be secured. See [Secure Your Domain](#).

Introduction to Domains

i Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Every website is located (hosted) in a specific physical location (domain) on a web server connected to the internet. The physical location is identified by an IP address, which is a long string of numbers that's hard to remember. To make things easier, each website's IP address is linked to a text-based domain name, like `www.example.com`.

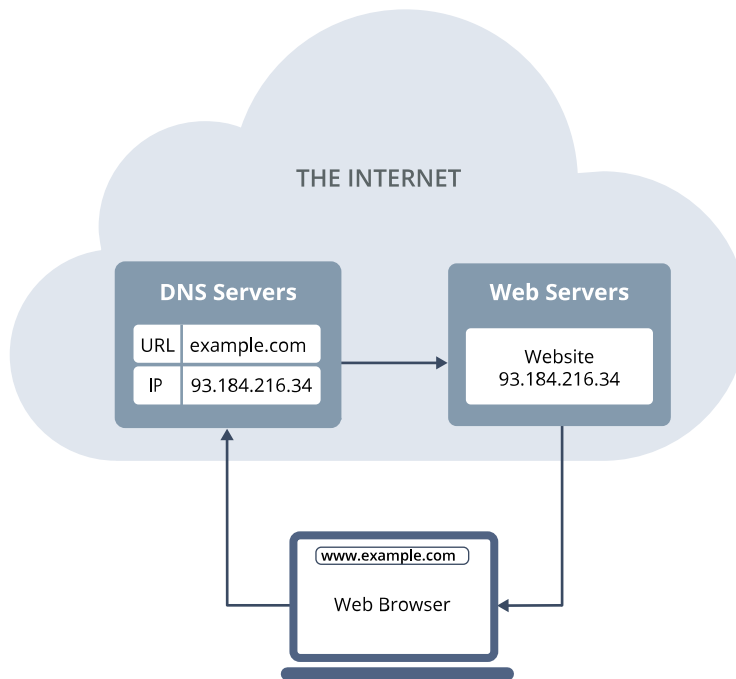

When a user wants to access a website, they type the domain name into their browser, which sends the domain name to a global network of servers that form the Domain Name System (DNS). These servers contain lists of domain names and their associated IP addresses. The servers look through these lists, find the IP address for the domain, and then send the browser's request to the right web server. The web server is where the website is located. The web server fetches the website and sends it back to the browser.

Commerce web stores are hosted on NetSuite servers. You can use your own domain name by linking it to your website's location on the NetSuite hosting domain. For example, if you have the following domain names registered – `shop.mysite.com` and `www.mysite.com` – you can use them for your Commerce web store.

Domains Simplified

If you're not familiar with domains, think of it like trying to find a store you've never been to before. The store sits on a plot of land (domain) that's part of a big retail park (web server). You can enter the store's coordinates (IP address) into your GPS (web browser), or use the easier-to-remember store address (domain name). Your GPS sends messages to the satellite network (DNS) and works out how to get you to the store. The store has different areas, like the reception, clothing section, accessories, and checkout. These areas are like the different pages on your website.

Domain Setup Checklist

Complete the items on the following checklist to set up your website domains:

1. Decide which domain types you need for your website — see [Types of Domains](#).
2. Determine how to set up your shopping and checkout domains — see [Domain Options for Web Stores](#).
3. Buy the domain names you need from a domain registrar like [godaddy.com](#) or [name.com](#).
4. Set up, secure, and deploy (if needed) your chosen domain type — see [Set Up a Domain](#).
5. Link your domain name with your NetSuite domain — [Point Your Domain Name at Your Domain \(DNS Settings\)](#).

Types of Domains

i Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

You need domains for different purposes in NetSuite. All domain types available in NetSuite can and must be secured. See [Secure Your Domain](#).

When you're setting up an online store where your customers can browse and buy products, the following domain types are available in NetSuite:

- **Web Store Only** – also called the shopping domain, this is your main website where users can browse products. On its own, a web store domain acts as a product catalog. Customers can browse, but they can't buy anything. If you want customers to buy products, you need to link the web store domain with a Checkout domain.
- **Checkout Only** – this is where users buy products, and where you collect payment details.
- **Single Domain for Web Store and Checkout** – this combines both web store and checkout functions into one secure domain, so customers can browse, add items to their basket, and check out securely.

i Note: If you're using SuiteCommerce MyAccount, set the **Domain Type** to **Single Domain for Webstore and Checkout**.

Depending on what you need, you can set up one or more of these domain types for your web store. For more information, see [Domain Options for Web Stores](#).

You can also set up the following domains to add extra features to your website:

- **Email Campaign** – the domain you use to replace references to [netsuite.com](#) in your email and marketing templates. You'll need this if you send more than 10,000 emails a month. For more information, see [Website Domains and Email Hosting](#) for more information.
- **Hosted Web Page** – the domain that points to a page in your NetSuite File Cabinet.
- **Promotional URL** – the domain that a promotional URL redirects to. It can be the same as your shopping domain or a separate one. For more details, see the help topic [Promotional URLs](#).
- **Redirect URL** – the domain where URLs are redirected to, either to a different domain or another page. For more information, see the help topic [SEO and Redirects](#).

Domain Options for Web Stores

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

The first step in setting up an online store is deciding the type of shopping and checkout domains to use. You need to decide if you want to use one domain for both shopping and checkout, or if you'd rather keep them separate.

Depending on what you decide, the following combinations are available:

- **Single secure domain for both shopping and checkout** – You can run both shopping and checkout on one HTTPS domain. A single domain gives your customers a seamless buying experience. In NetSuite, this type of domain is called **Single Domain for Web Store and Checkout**.

Note: If you're using SuiteCommerce MyAccount, set the **Domain Type** to **Single Domain for Webstore and Checkout**.

- **Secure shopping domain combined with separate secure checkout domain** – In NetSuite, a standalone shopping domain is called **Web Store Only**. You can use an SSL certificate to secure your store's shopping area. You can choose from:
 - a single, secure shopping domain paired with a single, secure checkout domain
 - multiple secure shopping domains paired with a single, secure checkout domain

If you decide to keep shopping and checkout domains separate, the following types of checkout domain are available:

- Custom checkout domain secured using an SSL certificate. In NetSuite, this type of domain is called **Checkout Only**.
- Preset checkout domain.

For details on how to set up the different types of domain, see [Set Up Domains for Web Stores](#).


Secure Domains

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

When a user browses a website, the browser and the site send data back and forth using a secure protocol called HTTPS.

Secure domains use **HTTPS**, the secure version of hypertext transfer protocol (HTTP). With HTTPS, all communication between a browser and a website is encrypted. HTTPS is the industry standard for ecommerce, and shoppers like seeing the secure icon in their browser. Including secure technology in your web store lets your customers know their activities are safe. Search engines also tend to rank secure sites higher than non-secure ones. Running your web store under a secure domain is one way to boost your SEO.

NetSuite doesn't support non-secure domains. See [Secure Your Domain](#) for information about securing your domain.

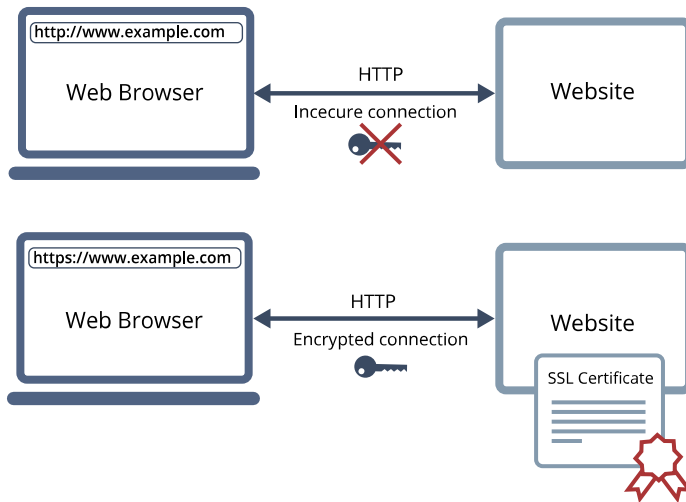

For a domain to use HTTPS, its encryption process needs to be certified. You do this by buying an SSL certificate from a certificate authority. This digital certificate contains the files that encrypt information sent between a website and a browser. See [Overview of SSL Encryption](#) for information about how SSL encryption works.

In NetSuite, all domain types can be secured using an SSL certificate. You can use a certificate from Oracle NetSuite or obtain your own from an authorized certificate authority. For details, see [Types of Secure Domains in NetSuite](#) and [Automatic and Manual Certificates](#).

Overview of SSL Encryption

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced


SSL is a standard security technology that creates an encrypted link between a server and a client, usually a web server and a browser. It lets sensitive information like credit card numbers, social security numbers, and login details be sent securely. To establish this secure connection, the browser and the server need an SSL certificate.

SSL certificates have a key pair: one public key and one private key. These keys, which are simply large numbers, work together to create an encrypted connection. The certificate also contains the identity of the certificate/website owner.

To get a certificate, you need to create a certificate signing request (CSR) for your domain. This process creates both a private key and a public key. The CSR file that you send to the SSL certificate issuer (called a certificate authority or CA) contains the public key. The CA uses the CSR data file to create a data structure that matches your private key without compromising the key itself. The CA never sees the private key.

Note: The certificate created with a particular CSR only works with the private key that was generated with it.

After you receive the SSL certificate, install it on your server. You also install an intermediate certificate, which links your SSL certificate to your CA's root certificate. When the SSL certificate is installed and active, your domain is secure.

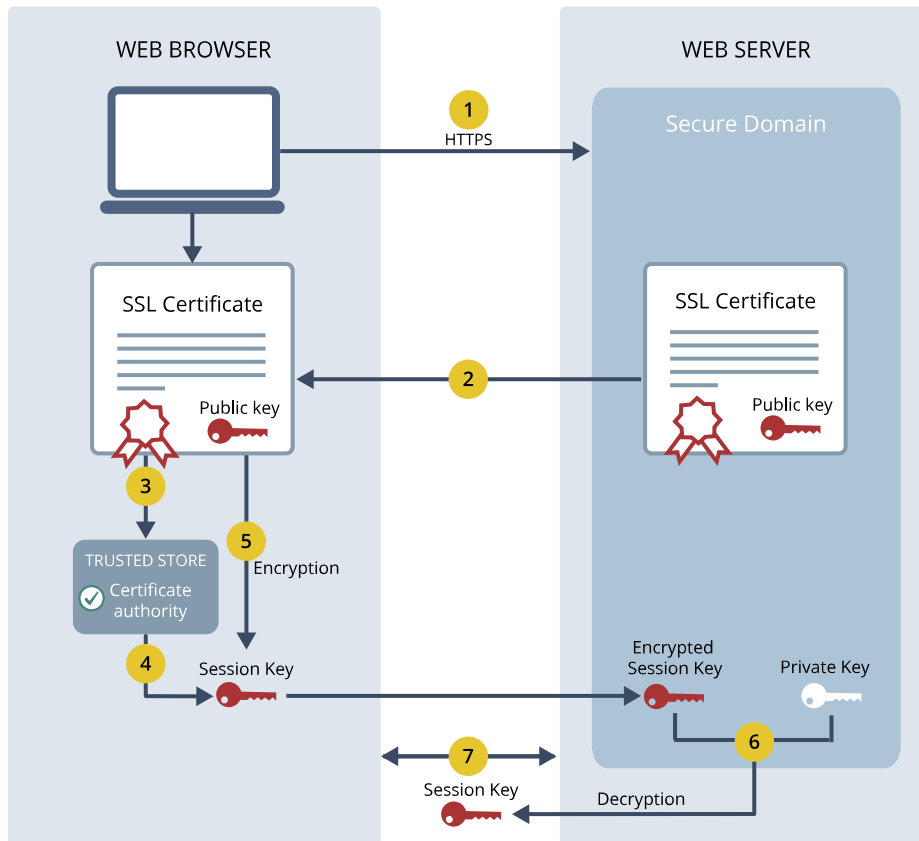

When a user tries to access your website:

1. The user's browser connects to your secure domain using HTTPS.
2. Your domain responds with its SSL certificate, which contains its public key.
3. The browser verifies the certificate by checking the signature of the CA. For this to work, the CA needs to be in the browser's trusted store, which is a list of trusted CAs that all browsers have.
4. The browser creates a session key, which is a temporary key that's only valid while the browser and domain interact. If the user leaves your site and comes back, a new session key is made.
5. The browser encrypts the session key with the public key and sends it to the secure server.
6. The server uses the private key to decrypt the session key.
7. Now, the browser and server use the session key to encrypt and decrypt all data they send. This is a secure channel because only the browser and the server know the symmetric session key, and the session key is only used for that session.

Types of Secure Domains in NetSuite

① Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

NetSuite has ended support for non-secure (HTTP) domains, so you need to secure all your domains. See [Secure Your Domain](#) for information about securing your domain.

All of the following domain types, that are available in NetSuite need to be secured with an SSL certificate.

- **Single Domain for Web Store and Checkout** – lets you run your shopping and checkout on one secure HTTPS domain.
- **Web Store Only** – also called shopping domains.
- **Checkout Only** – these domains handle customer payment details. For more details, see [Link a Checkout Domain with Your Web Store](#).
- **Hosted Web Page domains** – these domains point to a page hosted in your NetSuite File Cabinet.
- **Redirect URL domains** – these domains redirect to a different website or page.
- **Email Campaign domains** – these domains replace references to netsuite.com in your email and marketing templates.
- **Promotional URL domains** – the domain a promotional URL redirects to.

How you secure these domain types depends on whether you use automatic or manual certificates. For information, see [Automatic and Manual Certificates](#).

Automatic and Manual Certificates

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

You have two options for obtaining SSL certificates to secure a domain in NetSuite:

- [Automatic Certificate Option](#)
- [Manual Certificate Option](#)

You should use automatic SSL certificates to secure your domain, unless you have a good reason to use the manual option. Automatic certificates from NetSuite:

- Are provided free of charge.
- Follow security and encryption industry standards.
- Automatically renew with no downtime.

Use the manual certificate option if you have a specific need, like you need to use an Organization Validation (OV) or Extended Validation (EV) certificate.

Automatic Certificate Option

The automatic certificate option is usually the quickest and easiest way to secure a domain. If you use the automatic certificate option, Oracle NetSuite obtains a domain validated (DV) certificate for your NetSuite-hosted domain. The benefit is that Oracle NetSuite obtains, applies, maintains, and renews the certificate for you automatically. This service is provided at no additional cost.

To use the automatic certificate, you need to use two DNS records.

The first DNS record needs to use the CNAME that NetSuite displays on the Domain page. An example of the format for a CNAME is `<yourDomainName>.hosting.netsuite.com` (where `<YourDomainName>` is a variable representing the name of your domain, such as `shop.example.com`).

The second DNS record is to set up a CNAME for acme-challenge. The format of the acme-challenge is, `_acme-challenge.<yourDomainName>`, pointing to `<yourDomainName>.hosting-verify.netsuite.com`.

Be aware that if you switch to the automatic certificate option, don't include a CAA record in DNS. A CAA record in DNS may block the deployment of the automatic certificate.



Important: Sometimes, the manual certificate option is a better fit. These scenarios include:

- **CNAME flattening**—If you are using a CNAME flattening feature from your DNS provider, you must use the manual certificate option. The automatic option doesn't support CNAME flattening unless you're using a second-level domain.

Second-level domains have to use CNAME flattening since they don't support CNAMEs. This applies to both manual and automatic certificates. However, don't use CNAME flattening with the acme-challenge DNS record.

- **Organization Validation (OV) or Extended Validation (EV) certificate**—If your business needs OV or EV certificates, use the manual option.

Manual Certificate Option

You might choose the manual certificate option for specific reasons, like the ones listed in the previous section. You might also use the manual option if you want to use an SSL certificate from a CA you choose. For a list of certificate authorities, see the [Mozilla Included CA Certificate List](#).

With the manual option, first download a certificate signing request (CSR) for your domain from NetSuite, then send it to your CA when you buy a certificate. When you receive the certificate from your CA, upload it to NetSuite so it can be used on your NetSuite-hosted site. You can't use this certificate outside of NetSuite. You're also responsible for maintaining and renewing the certificate. For more information, see [Manual Certificates](#).



Note: Using the manual certificate option requires extended setup steps and may incur additional cost.

Set Up Domains for Web Stores

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Before you start setting up domains for your online store, you need to know which types you want to use. The possibilities are:

- **Single secure domain for both shopping and checkout** - follow the steps in [Set Up a Domain](#) for the domain type **Single Domain for Web Store and Checkout**.

This type of domain lets you run both shopping and checkout on one secure HTTPS domain. A single domain gives your customers a seamless buying experience.

Note: The following requirements and limitations apply:

- If you're using SuiteCommerce MyAccount, set the Domain Type to **Single Domain for Webstore and Checkout**.
- You can't use Single Domain for Web Store and Checkout domains in Site Builder.

- **Secure shopping domain combined with separate secure checkout domain**

- For the shopping domain, follow the steps in [Set Up a Domain](#) for the domain type **Web Store Only**. Make sure you follow the steps in [Secure Your Domain](#) to secure the domain.
- For the secure checkout domain:
 - If you want to use a preset checkout domain, this is set up automatically when you set up a Web Store Only domain.
 - If you'd rather use a custom checkout domain, follow the steps in [Set Up a Domain](#) for the domain type **Checkout Only**.

To link a custom checkout domain or an unbranded NetSuite checkout subdomain with the secure shopping domain, follow the steps in [Link a Checkout Domain with Your Web Store](#).

For more information about these domain types, see [Types of Domains](#) and [Domain Options for Web Stores](#).

After you have set up the domains you need, you must [Point Your Domain Name at Your Domain \(DNS Settings\)](#). Doing so makes it available to your customers.

To add to your web store, you can also set up the following types of domain as described in [Set Up a Domain](#).

- **Hosted Web Page**— Hosted web page domains aren't linked to a Web Site Setup record and don't offer web store features like checkout. However, you can use them for any static website, like a promotional site.
- **Redirect URL**— Redirect URL domains send visitors to a different website or page. See the help topic [SEO and Redirects](#) for more information.
- **Promotional URL**— Promotional URL domains send visitors to a promotional URL you create at Setup > Other Setup > Promotional URLs > New. See the help topics [Promotional URLs](#) and for more information.
- **Email Campaign Domain**— Email campaign domains replace references to netsuite.com in your email and marketing templates with your own domain. You'll need this if you send more than 10,000 emails a month with campaigns or email merge operations. See [Website Domains and Email Hosting](#) and for more information.

You'll need to set up all of these domains as secure. See [Secure Your Domain](#).

After you've set up your domain, the Domain Health Status feature shows you if the setup has been done correctly and provides guidance on how to fix any errors. See [Troubleshoot Domain Setup Errors](#) for details.

Set Up a Domain

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Note: NetSuite has ended support for non-secure (HTTP) domains. See [Secure Your Domain](#).

Setting up any domain type in NetSuite works the same way, but the information you enter in the Domain record depends on the domain type you select.

To set up a domain:

1. Go to Commerce > Hosting > Domains > New.
2. Select the type of domain you want to create from the **Domain Type** list. The options are:
 - Single Domain for Web Store and Checkout
 - Web Store Only
 - Checkout Only
 - Hosted Web Page
 - Redirect URL
 - Promotional URL
 - E-mail Campaign

See [Set Up Domains for Web Stores](#) for information about each of these domain types.

Tip: You can also add or manage domains from the Website Setup record.

- Go to Commerce > Websites > Website list and click **Edit** next to the website for which you want to add or manage domains.
- Go to the **Domains** tab.
- Click **Add New Domain** or **Manage Domains**.

3. In the **Domain Name** field, enter the domain URL without https://. For example: www.example.com. The domain name can contain up to 64 characters.

In the DNS area, the **CNAME** records populate automatically for the hosting and DNS verification records using the value you enter in the **Domain Name** field.

Use these CNAME records to configure DNS settings with your domain name provider. You should configure DNS settings before you finish setting up the domain record in NetSuite. For more information, see [Point Your Domain Name at Your Domain \(DNS Settings\)](#).

 **Important:** Always point your domain names to a CNAME record, and make sure CNAME records are set up correctly to avoid problems with SSL certificates and domain security.

4. The domain type you selected in Step 2 determines which of the following fields are displayed on the domain setup form. Fill in all visible fields as follows:

- **Web Site** – Select from the list the website that uses the domain name.

This list shows all websites in your NetSuite account that work with the domain type you selected.

- **Hosting Root** – Select **Live Hosting Files** for a live site or **Staging Hosting Files** for a test site. For information about setting up a domain name for a test site, see the following help topics:

- SuiteCommerce, SuiteCommerce MyAccount, and SuiteCommerce Advanced (SCA) Aconcagua and later – [Test a Theme on a Local Server](#) and [Test an Extension on a Local Server](#).
- SCA (pre-Aconcagua) – [Test SCA Customizations on a Local Server](#).
- Site Builder – [Website Staging Environment](#).

- **Use CDN Cache** – Check this box to cache your Commerce web store data on the content delivery network (CDN). This helps your website load faster.

 **Important:** Before you choose CDN caching for your checkout domain, review the information about prerequisites, caching, and IP address ranges in [CDN Caching for Secure Domains](#). For more information, see [CDN Caching](#) and [Configure CDN Caching](#). You need to set up CDN caching in NetSuite. Third-party CDN setups aren't supported.

- **Maintenance Content Folder** (optional) – Select the custom site maintenance folder you want to use if your site is down for repairs or routine updates.

For more information about setting up a custom site maintenance page, see the help topic [Custom Maintenance Folder and Content](#).

- **Not-Found Page** (optional) – Select the hosted page where customers are directed if they go to an inactive page. By default, they're redirected to your home page.

Start by entering the page name, then press **Tab** or click the down arrow for a list of pages.

- **Home Page** – If you're setting up a Hosted Web Page domain, select the file from your File Cabinet that the domain name should point to.

- **Redirect URL** – If you're setting up a redirect URL domain:

- In the **Redirect URL** field, enter the URL of the web page or site where you want to redirect visitors.
- Check the **Include File Path and Parameters in the Redirect** box if you want to preserve the original path when redirecting visitors to the Redirect URL domain.
If you check this box, <https://www.example1.com/product-a?param=1> redirects to <https://www.example2.com/product-a?param=1>.
If you don't check this box, <https://www.example1.com/product-a?param=1> redirects to <https://www.example2.com>.

5. To secure your domain with an SSL certificate, complete the steps provided in the help topic, [Secure Your Domain](#). All domain types used in NetSuite need to be secured.

You need to enter the domain name in the **Domain Name** field before you download the CSR.

 **Important:** Make sure CNAME records are always set up correctly to avoid problems with SSL certificates and domain security.

As required, follow the steps outlined in these topics to complete the domain setup process:

- [Secure Your Domain](#)
- [Deploy Your Domain](#)
- [Set Up DNS Verification](#)

 **Note:** Setting up DNS verification is only required for secure domains.

Secure Your Domain

 **Applies to:** SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

[Secure Your Website Domain](#)

You can secure all domain types in NetSuite. You should secure your domains because this is now the industry standard. Including secure technology for your domain lets your customers know they're safe on your website. Also, search engines often rank secure sites higher than non-secure ones. See [Secure Domains](#) for more information.

 **Note:** If your domain name matches a previously deleted secure domain and the old certificate is still valid, NetSuite automatically uses that certificate to secure your new domain. You can view the details of the certificate in the Certificate section of the Domain record page in NetSuite. If you don't want to use the old certificate, you can change it by clicking **Change Certificate**.

To secure your domain:

1. Go to Commerce > Hosting > Domains > and click **Edit** next to the domain name you want to secure.
2. In the Certificate section, check the **Use SSL Certificate to Secure Domain** box.
Additional certificate-related fields display up so you can choose the type of certificate you want to use.

 **Note:** The **Use SSL Certificate to Secure Domain** checkbox is not displayed if you are setting up a **Single Domain for Web Store and Checkout** or **Checkout Only** domain. These domain types must always be secure, so all certificate-related fields are displayed by default.

3. If you want Oracle NetSuite to obtain a domain validated (DV) certificate for your domain, click the **Automatic** button and then check the box to accept the terms and conditions.

 **Note:** Automatic certificates are provided at no extra cost and are maintenance-free because Oracle NetSuite handles the renewal process.

4. If you'd rather obtain a certificate from your preferred CA, see [Manual Certificates](#) for instructions.

Your CSR file is now associated with your domain. Next, you'll need to deploy your domain. See [Deploy Your Domain](#) for instructions.

Note: To secure your domain, you'll need to set up a CNAME records for DNS verification and web hosting. See [Point Your Domain Name at Your Domain \(DNS Settings\)](#) for information about setting up CNAME records with your domain provider and [Set Up DNS Verification](#) for information about DNS verification.

Deploy Your Domain

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Important: For secure domains, be aware that deployment includes both setting up CNAME records for DNS verification and website hosting with your domain provider. See [Point Your Domain Name at Your Domain \(DNS Settings\)](#) for information about setting up CNAME records with your domain provider and [Set Up DNS Verification](#) for information about DNS verification.

All domain types used in NetSuite must be secured. See [Secure Your Domain](#).

To deploy your domain:

1. If you haven't already, go to your domain provider's website to set up CNAME records for hosting and DNS verification. For more information, see [Point Your Domain Name at Your Domain \(DNS Settings\)](#).

Important: Your domain name should always point to a CNAME record, and you need to keep these records set up correctly at all times to avoid SSL or security issues.

Note: For information about setting up DNS verification records, see [Set Up DNS Verification Records](#).

2. After you've finished DNS configuration with your domain provider, go back to the Domain record in NetSuite and click **Save**.

If you previously saved the Domain record, go to Commerce > Hosting > Domains > and click **Edit** next to your domain name, then click **Save** to redeploy.

Most deployments go live in about 90 minutes, but in rare cases, it can take up to six hours.

You can track progress with the **Deployment Status** field, which updates automatically as deployment and DNS propagation proceed. To view deployment status, go to Commerce > Hosting > Domains > and click **View** next to your domain name.

See [Deployment Status](#) for information about each of the possible deployment statuses.

Note: You can't make changes to the domain settings until the deployment status is **Live**.

After you set up your domain name in NetSuite and configure DNS with your provider, your domain starts redirecting to your website. How long it takes for your web store to go live depends on your provider, but it usually happens within 2 to 48 hours after setup.

Set Up DNS Verification

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Starting with NetSuite 2024.1, HTTP-based challenges to verify domain ownership have been replaced by DNS-based verification.

DNS Verification Status Field

You can view the DNS verification status in the Status area of the NetSuite Domain record. The **DNS Verification Status** field lets you know if the ACME challenge is set up and configured correctly for your domain.

The **DNS Verification Status** field can have one of the two following statuses:

- Your DNS record is configured correctly.
A green tick icon is displayed to the left of this message.
- Your DNS record is configured incorrectly.
A red cross error icon is displayed to the left of this message. There will also be a red cross displayed in the DNS column on the Set Up Domains page.

 **Note:** The DNS status on the Set Up Domains page includes both the DNS and DNS verification statuses.

If there's an error with the DNS Verification Status, check with your domain provider to make sure the CNAME record for DNS verification is set up correctly.

Convert a Web Store Only Domain to a Single Domain for Web Store and Checkout

 **Applies to:** SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

The information in this topic refers to SuiteCommerce and the Elbrus, Kilimanjaro, and Aconcagua releases of SuiteCommerce Advanced only.

You can only upgrade secure Web Store Only domains to Single Domains for Web Store and Checkout. To secure a Web Store Only domain with an automatic certificate, follow the steps in [Secure Your Domain](#). You can also use a manual certificate, as described in [Manual Certificates](#).

After the Web Store Only domain is secure, you can upgrade it to a Single Domain for Web Store and Checkout by editing the domain record and selecting **Single Domain for Web Store and Checkout** from the **Domain Type** list.

Link a Checkout Domain with Your Web Store

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

If you've set up a standalone secure Web Store Only domain, you need to link it to a secure checkout domain before your customers can buy products from your store.

There are two checkout domain options for Web Store Only domains:

- Secure shopping domain combined with a separate secure custom checkout domain.
- Secure shopping domain combined with a separate secure preset checkout domain

No matter which checkout domain you choose, users on your website enter their information using an SSL connection. An SSL connection is protected by encryption. Users can tell they're on an SSL connection because the browser displays a padlock and the address bar starts with https instead of http. SSL

provides the confidence that private data sent to the website is kept confidential. See [Overview of SSL Encryption](#) for more information.

To link a Web Store Only domain with a Checkout Only domain:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website whose Web Store Only domains you want to link to the checkout domain.
3. On the **Domains** tab, select the Checkout domain from the **Checkout URL HTTPS://** list.
This list contains the preset checkout domain and any custom checkout domains you have already set up. It also contains unbranded checkout subdomains if you have enabled them.

Note: Your Checkout Only domain must be a custom secure domain. To use a custom checkout domain, follow the steps in [Set Up a Domain](#) for the domain type Checkout Only, and then follow the steps in [Secure Your Domain](#). If you can't see your configured checkout domain in the **Checkout URL HTTPS://** list, contact your account manager.

4. Click **Save**.
All the Web Store Only domains for the website are now linked to the selected checkout domain.

Note: These steps don't apply to the Single Domain for Web Store and Checkout domain type because a single domain is used for both the web store and checkout.

To set up a secure subdomain for checkout:

1. Go to Commerce > Websites > Website List.
 - a. Click the **Web Presence** subtab.
 - b. Check the box next to **Customizable Checkout Subdomains**.
 - c. Click **Save**.
2. Go to Commerce > Websites > Website List.
3. Click **Edit** for the desired website.
4. On the **Domains** subtab, enter your checkout **Domain Prefix**. Enter the prefix as one word, all lower case and without punctuation (for example, `mysite`).

A domain prefix can help a user to identify areas on your site.

The screenshot shows the 'Domains' subtab in the SuiteCommerce System Management interface. Under the 'Checkout Domain' section, there is an 'Edit | View' link. To the right, there is a 'Domain prefix' text input field containing the text 'mysite'. To the right of that is a 'Checkout URL https://mysite.' dropdown menu, which currently shows 'onlinecheckout.com'.

5. Select your preferred checkout subdomain in **Checkout URL**.
The subdomain is appended to the domain prefix to construct your checkout URL. For example, if your domain prefix is `mysite` and your selected subdomain is `example.com`, the checkout URL is `https://mysite.example.com`.
6. (For Site Builder websites only) Enter a **URL Alias**. Enter the alias as one word, all lower case and without punctuation (for example, `mysite`).
A URL alias is another way for people to visit your site.
7. Click **Save**.

After you set up a checkout subdomain, changing to a different one might take up to 30 minutes to redirect. This delay happens because the previous subdomain needs to be cleared from the web store caches.

Point Your Domain Name at Your Domain (DNS Settings)

📘 Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

To ensure visitors to your website (for example, www.example.com) arrive at your NetSuite-hosted domain, you need to configure DNS settings with your domain name provider. Your domain name provider uses DNS settings to send visitors to the domain hosted on NetSuite servers.

In non-technical terms, configuring DNS settings is like setting up a mail redirection when you move house — you tell the post office (domain name provider) to send all letters addressed to your old address (your domain name) to your new address (your NetSuite-hosted domain). The people sending you letters use your old address but you receive them at the new address. The information the post office holds, mapping your old address to your new address, is the equivalent of DNS settings.

Your domain provider uses CNAME records to make your domain name an alias for the NetSuite-hosted domains linked to your account. You can get the CNAME records for your domain hosting and DNS verification from the NetSuite Domain record.

When you're setting up DNS settings with your domain provider, be aware of the following:

- Domain names should always point to a CNAME record. CNAME records must be correctly set up at all times to avoid issues with SSL certificates and securing your domain.
- If you're using CNAME flattening (also known as a dynamic A record or ANAME record), the records must be correctly set up with your domain provider. See [CNAME Flattening \(Dynamic A Record\)](#).
- Wildcard DNS records aren't supported.
- NetSuite provides CDN and caching services, which must be enabled in NetSuite. Third-party CDN and caching services are not supported and must not be used as they can cause operational issues. See [Enable CDN Caching](#).
- All domain types available in NetSuite must be secured. See [Secure Your Domain](#).
- When you're using a secure domain, you'll also need to set up a CNAME record for DNS verification with your domain provider. See [Set Up DNS Verification](#).

For more information about the importance of proper DNS setup and the risks of improper DNS setup, see [Importance of Proper DNS Setup](#).

For information about the different types of CNAME records you can set up for your Commerce website, see the following topics:

- DNS verification record – See [Set Up DNS Verification](#).
- DNS hosting record (CNAME) – See Step 3 of the process documented in [Set Up a Domain](#).
- CNAME flattening/Dynamic A record – See [CNAME Flattening \(Dynamic A Record\)](#).



Important: When setting up your DNS, ensure that the time to live (TTL) is not higher than 3600 (an hour in seconds). If you exceed this value, you can encounter issues with your domain.

To configure DNS settings with your domain provider:

1. Obtain the CNAME records for your domain as described in Step 3 of the help topic, [Set Up a Domain](#).

The CNAME records for your domain will resemble the following example:

▼ DNS	
www.example.com	CNAME www.example.com.hosting.f.netsuite.com
_acme-challenge.www.example.com	CNAME www.example.com.hosting-verify.f.netsuite.com
Copy this information and use it to add two CNAME records to DNS at your domain provider's website. Learn more...	

Note: The CNAME records assigned to each domain name in each NetSuite account are unique. Make sure you copy the CNAME records for the domain you want to set up.

2. Log in to your domain provider's website to manage DNS settings and to set up CNAME records.

Note: DNS configuration is a task that you complete outside of NetSuite.

Important: Changing DNS settings affects the ability to view your website. Therefore, changes should be made by someone with DNS setup experience. Also, consider consulting with your domain provider before updating your DNS settings.

3. Configure the DNS settings using the instructions provided by your domain provider. Most providers have online help with step-by-step guides for adding and editing CNAME records. Instructions vary depending on the domain provider.
4. After you've set up the DNS settings with your domain provider, you'll need to set up the domain record in NetSuite. For more information, see [Set Up a Domain](#).

If the domain record already exists in NetSuite, go to the Domain record page, click **Edit** and then click **Save**. This redeploys the domain record and connects it to your domain name. For more information about deploying a domain, see [Deploy Your Domain](#).

Add or Change a Domain Name

Every time you add a new domain name in NetSuite, you'll need to use the CNAME records shown for that domain to set up DNS with your domain provider. The CNAME records are displayed on the Domain record in NetSuite.

Changing your domain name is not supported in NetSuite. If you want to change the domain name, you must delete the old domain and create a new one. Then, set up the DNS with your domain provider and use the CNAME records shown for the new domain in NetSuite.

Importance of Proper DNS Setup

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

For your Commerce website to work properly, NetSuite needs to establish and retain control over your domain's DNS.

This is especially important for domains secured with automatic certificates. Setting the DNS verification (ACME challenge) CNAME to point to a NetSuite domain lets NetSuite prove domain ownership to the

Certification Authority (CA) for you. It also lets NetSuite obtain new domain certificates or renew the existing one.

NetSuite servers and databases store your data and serve the web content on your domain. Using a CNAME that points to a NetSuite hosting DNS record lets NetSuite host your domain and deliver web content to your customers.

NetSuite uses its own state-of-the-art content delivery network (CDN) and, with the right DNS setup, you can fully benefit from all of its features, including, but not limited to:

- Enhanced caching to improve your web store's performance..
- Security features to protect your web store, customers, and users from threats like DDoS attacks, aggressive bots, and fraud.
- On-demand cache clearing.
- SuiteCommerce-specific protections like rate limiting, bot management, web application firewall, IP reputation management, and geo-blocking based on Oracle policy.

A team of network and security engineers monitors and updates these measures 24/7.

If your DNS isn't set up right, or you use a third-party CDN, you could run into issues like:

- **Reliability** – NetSuite can't guarantee reliable service if your DNS isn't set up correctly. Problems caused by a improper DNS setup are hard to investigate because NetSuite has limited visibility and control.
- **Disaster recovery** – If there's a disaster, NetSuite will move customer accounts and domains to safe regions. If your DNS isn't set up right, or a third-party CDN is used, your domain might not be moved because the change happens at the DNS level. Third-party CDNs and reverse proxies often use hardcoded hostnames or IPs and don't respect DNS changes.
- **Cache control** – NetSuite uses caching to improve performance. If you use a third-party CDN, NetSuite can't control what gets cached or for how long. SuiteCommerce, SuiteCommerce Advanced, and SuiteCommerce MyAccount have built-in automated cache clearing, but this won't work properly with a third-party CDN because there's another caching layer involved NetSuite that can't control. This can slow down your site and cause problems with stale content.
- **Automatic SSL certificates** – If your DNS isn't set up right, NetSuite might not be able to issue SSL certificates automatically. If NetSuite can't verify domain ownership, it won't be able to issue or renew your certificate. Without a valid certificate, your domain won't be secure and might not be able to process transactions.



Note: You should use automatic SSL certificates to keep your domain secure. See [Automatic and Manual Certificates](#).

- **Security** – When a proxy or CDN handles SSL traffic, NetSuite can't control the SSL version or cipher profile, and third-party CDNs might not meet NetSuite's security standards.
- **Traffic** – If your DNS isn't set up right, or you use a third-party CDN, your website traffic could be blocked or the wrong traffic could get through.
 - If you use a third-party CDN, your NetSuite account might not be able to forward traffic to another data center when load balancing is needed.
 - Third-party CDNs might not use the same filtering methods to block malicious traffic.

Using DNS Query Tools

To check that your DNS is set up properly, you can use online dig or server lookup tools to query DNS servers. If you're using Windows, it comes with a nslookup tool that can also be used to query DNS servers.

The following example shows the response from a dig command run on `www.correct-netsuite-dns.com` for web hosting. You can see the CNAME being translated and the hits to Akamai, so we know the CNAME for web hosting is set up correctly.

```

1 $ dig www.correct-netsuite-dns.com
2
3 ; <<> DiG 9.10.6 <<> www.correct-netsuite-dns.com
4 ;; global options: +cmd
5 ;; Got answer:
6 ;; ->HEADER<<- opcode: QUERY, status: NOERROR, id: 42979
7 ;; flags: qr rd ra; QUERY: 1, ANSWER: 5, AUTHORITY: 0, ADDITIONAL: 1
8
9 ;; OPT PSEUDOSECTION:
10 ; EDNS: version: 0, flags:; udp: 1232
11 ;; QUESTION SECTION:
12 ;www.correct-netsuite-dns.com.      IN  A
13
14 ;; ANSWER SECTION:
15 www.correct-netsuite-dns.com. 3600 IN CNAME www.correct-netsuite-dns.com.hosting.netsuite.com.
16 www.correct-netsuite-dns.com.hosting.netsuite.com. 300 IN CNAME www.correct-netsuite-dns.com.e99999.c12345567.hosting.netsuit
17 e.com.edgekey.net.
18 www.correct-netsuite-dns.com.e99999.c12345567.hosting.netsuite.com.edgekey.net. 10800 IN CNAME e123456.x.akamaiedge.net.
19 e123456.x.akamaiedge.net. 20 IN A 2.16.153.216
20 e123456.x.akamaiedge.net. 20 IN A 2.16.153.214
21
22 ;; Query time: 70 msec

```

The following example shows the response from a dig command run on `www.correct-netsuite-dns.com` for DNS verification. You can see the CNAME being translated and the hits to the ACME challenge, so we know the CNAME for DNS verification is set up correctly.

```

1 $ dig _acme-challenge.www.correct-netsuite-dns.com
2
3 ; <<> DiG 9.10.6 <<> _acme-challenge.www.correct-netsuite-dns.com
4 ;; global options: +cmd
5 ;; Got answer:
6 ;; ->HEADER<<- opcode: QUERY, status: NXDOMAIN, id: 39090
7 ;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 1, ADDITIONAL: 1
8
9 ;; OPT PSEUDOSECTION:
10 ; EDNS: version: 0, flags:; udp: 1232
11 ;; QUESTION SECTION:
12 ;_acme-challenge.www.correct-netsuite-dns.com. IN  A
13
14 ;; ANSWER SECTION:
15 _acme-challenge.www.correct-netsuite-dns.com. 3600 IN CNAME www.correct-netsuite-dns.com.hosting-verify.netsuite.com.
16
17 ;; AUTHORITY SECTION:
18 hosting-verify.netsuite.com. 300 IN SOA a1-124.akam.net. dnsadmin.nsgbu.internal. 76 3600 1800 604800 1800
19
20 ;; Query time: 72 msec
21 ;; SERVER: 2606:b400:300:d:feed::1#53(2606:b400:300:d:feed::1)
22 ;; WHEN: Mon Sep 30 10:44:16 CEST 2024
23 ;; MSG SIZE rcvd: 226

```

Troubleshoot Domain Setup Errors

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

After you've set up a domain, you can view its status in NetSuite on the Set Up Domains page, where all your domain names are listed. The Domain Status feature helps you troubleshoot by running health tests and flagging any issues with Deployment, DNS, or Certificates.

For information about the importance of proper DNS setup and the risks of improper DNS setup, see [Importance of Proper DNS Setup](#).

You can view a summary of your domain's health on the Set Up Domains page by status icons displayed in the Deployment, DNS, and Certificate columns. If you notice any issues in these columns, click **View** next to your domain name to troubleshoot.

Note: The DNS column on the Set Up Domains page includes the status for both DNS and DNS Verification. If there's an issue with either status, you'll see an error icon in the DNS column.

Important: The Encryption column on the Set Up Domains page displays an error status icon if you're using a non-secure (HTTP) domain. That's because NetSuite no longer supports non-secure domains. You'll need to secure all your domains. See [Secure Your Domain](#).

On the Domain page, the Status section tells you the cause of the problem.

Note: To actively monitor your domain health, add the Domain Configuration Alert reminder to your reminder portlet. For more information, see the help topic [Setting Up Reminders](#).

The Status section can contain the following message types:

- **Informational** – These messages provide information about an ongoing or completed task.
- **Warning** – These messages point out issues that could cause problems later if you don't fix them.
- **Error** – These messages mean the task didn't finish because of a user or system error and needs your attention.

There is also information about the actions that can trigger these messages. The issues fall into one of four categories:

- [Deployment Status](#)
- [DNS Status](#)
- [DNS Verification Status](#)
- [Certificate Status](#)

The "This domain already exists" error does not fall into any of these categories. This message is displayed if you try to create a domain record that already exists or was recently deleted. It can take up to two hours for a deleted domain's DNS record to be fully removed from all DNS servers. You'll need to wait until the record is fully removed before you can create it again.

The following is an example of the Status section on the Domain page displaying issues with the DNS status and DNS verification status:

Domain

Edit

Back

Actions

▼ Status

Deployment Status

✓ Live

DNS Status

✗ Your DNS record is configured incorrectly.

DNS Verification Status

✗ Your DNS record is configured incorrectly.

Deployment Status

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Message	Message Type	Cause	Action
Live	Informational	Deployment successful, all processes complete.	None Note: You cannot make changes to the domain settings until the Deployment Status is Live.
Deployment in progress	Informational	DNS propagation underway.	None Note: NetSuite Hosting deployments take about 10 minutes. CDN deployments go live in up to 45 minutes. If this status has not changed after six hours, edit and save the NetSuite Domain record to redeploy it.
Pending	Informational	The domain record has been created but the certificate has not been uploaded.	Upload your SSL certificate. For more information, see Manual Certificates .
Removing	Informational	DNS switched to new provider, old provider being removed or the domain is in the process of being deleted.	None
Failed	Error	Deployment failed. This issue seldom occurs. Some internal error might have caused this issue.	Contact NetSuite Customer Support to resolve this issue.

DNS Status

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Message	Message Type	Cause	Action
Your DNS record is configured correctly.	Informational	—	No action required.
Your DNS record is configured incorrectly.	Error	Your DNS entry for this domain does not point to the CNAME required by NetSuite.	Ensure that you are using the correct CNAME for the domain in the DNS record. See Point Your Domain Name at Your Domain (DNS Settings) for more information.
Your DNS record is configured with a CNAME on a second-level domain. This can result	Error	This error is shown when a second-level domain is used.	Contact your domain provider to check your DNS configuration.

Message	Message Type	Cause	Action
in errors such as email server failures. Please check your DNS configuration with your DNS provider.		You should not use second-level domains in NetSuite because they typically do not permit use of a CNAME DNS entry.	
Unable to verify DNS status because this is a root domain. Root domains in NetSuite must use CNAME flattening.	Error	This error is shown when a root domain is used. You should not use root domains in NetSuite because they typically do not permit use of a CNAME DNS entry.	You must use a CNAME flattening service for this domain, as described in Website Domains and Email Hosting. If you already use a CNAME flattening service for this domain, you can ignore this message.

DNS Verification Status

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Message	Message Type	Cause	Action
Your DNS record is configured correctly.	Informational	—	No action required.
Your DNS record is configured incorrectly.	Error	Your DNS entry for this domain does not point to the CNAME required by NetSuite.	Ensure that you are using the correct CNAME for DNS verification in the DNS record. See Set Up DNS Verification for more information.

Certificate Status

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Message	Message Type	Cause	Action
Your certificate is valid.	Informational	—	—
Your SSL certificate will expire soon.	Warning	The SSL certificate will expire in fewer than 30 days.	Renew your SSL certificate before it expires.  Warning: If you do not renew the certificate, the website will become inaccessible 7 days after the certificate expires, even if the user has previously accepted a security exception in the browser. For more information, see Maintenance of Manual Certificates.
Your SSL certificate has expired.	Error	—	Renew your SSL certificate.

Message	Message Type	Cause	Action
			 Warning: If you do not renew the certificate, the website will become inaccessible 7 days after the certificate expires, even if the user has previously accepted a security exception in the browser. For more information, see Maintenance of Manual Certificates .
Awaiting upload of SSL certificate.	Warning	The domain record has been created but the certificate has not been uploaded.	Upload your SSL certificate. For more information, see Manual Certificates .

Designate a Primary Domain

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

When you designate a Primary Web Site URL, any domain you set up in NetSuite will redirect to the one you marked as the Primary Web Site URL. The domain name marked as the Primary Web Site URL appears on your list of websites as the Primary Domain.

For example, you might set up two shopping domains such as **www.mystore.com** and **shop.mystore.com**. If you set **www.mystore.com** as the primary domain, then customers who type **shop.mystore.com/item** in their browser are redirected to the same page on the primary domain, **www.mystore.com/item**.

Primary Domain Notes:

- If you have a secure Web Store Only domain, only that domain can be set as Primary.
- If your site uses a Single Domain for Web Store and Checkout, only that domain can be set as Primary.
- If your site uses multiple Single Domains for Web Store and Checkout, you can't set any domain as Primary.
- All domain types available in NetSuite must be secured.

You can set a domain as your website's Primary Web Site URL from the Domains subtab on the Web Site Setup record.

Note: Selecting a Primary Web Site URL is optional for Commerce web stores, but required for Site Builder.

Sticky Domains

In a Commerce web store, if you don't designate a primary domain, then each domain name persists as users move around your site. You can change the shopping experience for users by linking different domains to different SSP applications.

Best Practice for Using Sticky Domains

You can use an SSP application with multiple shopping domains in one Commerce web store. In this case, use the Touch Points subtab to link an SSP application with a touch point for the site. Next, use the Domains setup to link a domain with an SSP application.

Touch Points

Touch points defined on a domain override those set on the **Touch Points** subtab on the **Web Site Setup** page. However, you always need to define touch points on the Web Site Setup page, since domain-only touch point setup isn't supported. For information about using touch points, see [Link a Website or Domain to an SSP Application](#).

Delete a Domain

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

If you don't need a domain anymore, you might want to delete it permanently. Deleting a domain removes it permanently and irrecoverably. No one can access it, and there's no history or audit trail kept.

To delete a domain:

1. Go to Commerce > Hosting > Domains.
2. Click **Edit** next to the domain you want to delete.
3. In the **Actions** menu, click **Delete**.
4. Review the confirmation messages, then click **Yes** to delete the domain.

Deleting a domain can take some time. When it's gone from your list of domains, it's been deleted.

Note: Deleting a secure domain doesn't remove the SSL certificate. NetSuite keeps it until it expires, but there's no security risk. However, if you've got a manual certificate and want to revoke it, contact your certificate authority (CA).

Advanced Domain Setup

i Applies to: SuiteCommerce | SuiteCommerce Advanced

The simplest way to set up an online store in NetSuite is to create a Single Domain for Web Store and Checkout domain and secure it using an automatic certificate. This keeps both shopping and checkout activities on the same domain, so it's faster and more efficient. It's also easier to maintain because automatic certification means Oracle NetSuite takes care of renewing your certificate for you.

However, in some cases, you might want to keep your web store and checkout on different domains. For details on how this setup works, see [Web Store Sessions](#).

You may also prefer to obtain a certificate from your preferred certificate authority. For details on how to do this, see [Manual Certificates](#).

Manual Certificates

i Applies to: SuiteCommerce | SuiteCommerce Advanced

To secure a domain in NetSuite using an SSL certificate from a certificate authority (CA) of your choice, you must first acquire the SSL certificate. Complete the following steps to do this:

1. **Confirm you have access to the required features associated with secure domains.** Certain fields that are required for the secure domain setup process in NetSuite do not appear unless you have enabled the required features. See [Set Up Domains for Web Stores](#).

i Note: A fixed number of secure domain licenses are included with a Commerce web store license. If you need more secure domains, you need to obtain additional secure domain licenses or free up one of your existing licenses. See [Secure Domain Licenses](#) for more information.

2. **Identify the type of SSL certificate you need.** For information about selecting an SSL certificate type, see [Select Type of SSL Certificate](#).
3. **Generate and download a Certificate Signing Request (CSR).** The CA uses the CSR to verify your company's identity.

To obtain a CSR for your secure domain, you first need to set up the domain with the correct domain name. For information about downloading the CSR for your domain, see [Generate a CSR](#).



Warning: Be aware of the following:

- You must download the CSR file from the Domain record page in NetSuite. If you use any other CSR to get your SSL certificate, it won't work to secure your NetSuite domain. To view the Domain record page, go to Commerce > Hosting > Domains and click **View** next to your domain name.
- You must generate and download the CSR file on the same day. If you don't, you may not be able to upload your certificate in NetSuite.
- If you don't click **Save** after you download your CSR file, you may not be able to upload your certificate in NetSuite.
- For more information, see [Generate a CSR](#).

4. **Submit your CSR to the CA.** After you have obtained the CSR for your domain, you must submit it to the CA. This is something you do outside of NetSuite. For more information, see [Submit Your CSR](#).
5. **Retrieve your certificates.** After the CA notifies you that your SSL certificate is ready, you must retrieve your certificate files. This is something you do outside of NetSuite. For more information, see [Retrieve Your Certificates](#).
6. **Secure your domain using the SSL certificates.** After you've downloaded your certificate files, link them to your domain to secure it. For information about how to do this, see [Secure Domain Using Manual Certificate](#).

For information about the difference between automatic and manual certificates, see [Automatic and Manual Certificates](#).

Select Type of SSL Certificate

Applies to: SuiteCommerce | SuiteCommerce Advanced

The first step to acquiring a manual SSL certificate is to identify what type you need. You might want a manual certificate instead of the automatic one from NetSuite if you need an Extended Validation (EV) certificate for your domain. EV certificates require a more thorough validation process before they're issued.

You can select an SSL certificate from the vendor of your choice, but it must meet the following requirements:

- All SSL certificates you want to use with NetSuite require:
 - A 2048-bit RSA (private and public) key. 4096-bit key lengths are not supported.
 - The private key must use the PKCS#1 RSA Cryptography Standard.



Note: The PKCS#8 Private-Key Information Syntax Standard isn't supported. See [Q:](#) if the private key issued to you uses the PKCS#8 standard.

- Must be Apache-compatible and PEM-encoded.
- You need to buy SSL certificates that use the SHA-2 hash function or better. For more information, see the help topic [Supported TLS Protocol and Cipher Suites](#).

- The following are **not supported**:
 - Wildcard certificates
 - Self-signed certificates
 - ECC (Elliptic Curve Cryptography) SSL certificates
 - Subject Alternative Name (SAN) fields on an SSL certificate (that is, adding multiple domain names to a single certificate). Only the Subject Name on a certificate is considered. In cases where SANs are specified on a certificate (using a subjectAltName field), they are ignored.

For a list of certificate authorities, see the [Mozilla Included CA Certificate List](#).

Note: To test if a certificate is trusted by your selected web browser, click the link in the **URL to Test Website or Example Cert** column of the [Mozilla Included CA Certificate List](#). You can buy certificates from providers not on the Mozilla Included CA Certificate list, but they might not be trusted by all browsers or by NetSuite. Check with your certificate provider for more information.

Generate a CSR

Applies to: SuiteCommerce | SuiteCommerce Advanced

Warning: You must download your Certificate Signing Request (CSR) file from the Domain record page in NetSuite. If you obtain an SSL certificate using any other CSR, the certificate cannot be used to secure your NetSuite domain.

To view the Domain record page, go to Commerce > Hosting > Domains and click **View** next to your domain name.

To generate a CSR:

1. After you have completed the initial domain setup steps specified in [Set Up a Domain](#), click **Generate CSR File** on the Domain record page in NetSuite to generate the CSR file. This can take up to 15 minutes.
To view the Domain record page, go to Commerce > Hosting > Domains and click **View** next to your domain name.
2. When your CSR file is ready, click **Download CSR File** to download the file to your computer.
You must submit the CSR file to your Certificate Authority (CA) when you purchase an SSL certificate for your domain. For more information, see [Manual Certificates](#).

Warning: You must generate and download the CSR file on the same day. If you do not do this, you may not be able to upload your certificate in NetSuite.

3. The next step is to add the SSL certificate. However, it typically takes some time for the CA to issue a certificate after you submit the CSR so click **Save** to save the domain record with the existing information.

Note: The domain is not deployed until you upload the certificate.

Warning: If you do not click **Save** after you download your CSR file, you may not be able to upload your certificate in NetSuite.

Submit Your CSR

Applies to: SuiteCommerce | SuiteCommerce Advanced

After you select the type of SSL certificate to buy and submit your payment information, the certificate authority typically requires that you submit a Certificate Signing Request (CSR).

Best practice indicates that you should have your CSR ready when purchasing SSL certificates.

Note: You can purchase an SSL certificate from the certificate authority of your choice if it meets the restrictions listed in the topic [Select Type of SSL Certificate](#).

Submit a CSR

Open the .csr file in a text editor such as Notepad and then copy and paste the data from the .csr file into the appropriate area of the enrollment form provided by the certificate authority. Do not use Microsoft Word for this process, as it may insert extra hidden characters that alter the contents of the CSR.

After your company's identity has been verified, the certificate authority typically sends you an email message to inform you that it is time to [Retrieve Your Certificates](#).

Retrieve Your Certificates

Applies to: SuiteCommerce | SuiteCommerce Advanced

After the certificate authority (CA) has validated your company's identity, they notify you that your SSL certificates are ready for retrieval. The time it takes to get your SSL certificates signed varies depending on the type of certificate you request, and the certificate authority you choose to work with.

After you have successfully submitted your payment information and CSR, the certificate authority verifies your company's identity, and then issues your SSL Certificates. The process for retrieving your certificates is slightly different for each vendor. Follow the directions provided by your certificate vendor to retrieve your certificate.

Note: Some CAs provide an intermediate certificate and SSL certificate separately and some CAs provide a single certificate bundle file that contains both certificates.

After successfully retrieving your SSL certificates from the certificate authority, you should have:

- A single certificate bundle file (secure.domainname.crt), or
- An SSL certificate (for example, secure.domainname.crt) and a separate intermediate certificate (for example, secure.domainname_ca.crt)

Now, you can continue with the setup process and [Manual Certificates](#).

Secure Domain Using Manual Certificate

Applies to: SuiteCommerce | SuiteCommerce Advanced

When you have the certificate files available, upload them to the corresponding domain.

Note: You are responsible for maintaining your SSL certificates. For more information, see [Maintenance of Manual Certificates](#).

To secure your domain using a manual certificate:

1. Go to Commerce > Hosting > Domains.
2. Click **Edit** next to the domain to which you want to add the certificate.
3. In the Certificate section of the domain form, click **Upload Certificate** and upload the certificate files provided to you by the CA. You can also drag and drop the certificate files into the specified area on the form.

If your CA has given you an intermediate certificate (for example, secure.domainname_ca.crt) as well as the SSL certificate (for example, secure.domainname.crt), make sure you select all the files at the same time during upload. You cannot upload them one at a time.

Note: The only files you can select when setting up your domains are certificate files with the following extensions: .cer, .cert, .crt, or .pem. Files with extensions such as .pfx or .p12 do not work.

4. Deploy the domain as described in [Deploy Your Domain](#).

Warning: Do not delete (disable) an existing certificate until the new domain certificate deploys. Otherwise you may have an interruption in service.

Maintenance of Manual Certificates

Applies to: SuiteCommerce | SuiteCommerce Advanced

If you use a manual certificate to secure your web store, you are responsible for renewing and maintaining your SSL certificates with your certificate provider, as well as configuring DNS for your secure domains with your domain provider. Maintaining your certificates also includes updating information in NetSuite.

NetSuite is only responsible for allocating CNAME records for your checkout domain and the DNS verification, providing you with a CSR for your domain, and binding your SSL certificates to the CNAME.

Note: This section is about maintenance tasks associated with your manual certificate. For information about purchasing certificates, generating CSRs, and securing domains with manual certificates, see [Manual Certificates](#).

You are responsible for the following maintenance tasks associated with your secure domain:

- [Renewal](#)
- [Update Certificates in NetSuite](#)
- [Upgrade](#)
- [Revocation](#)

Renewal

Manual SSL certificates are valid for a certain period of time. You are responsible for keeping track of the date when it is time to renew your certificate with your certificate provider. NetSuite displays the valid dates for your certificate on your domain records.

 **Warning:** Ensure you use only valid (unexpired) certificates for your secure websites, including websites used for testing. If you do not renew the certificate, the website will become inaccessible seven days after the certificate expires, even if the user has previously accepted a security exception in the browser.

To view valid dates for an SSL certificate:

1. Go to Commerce > Hosting > Domains.
2. Click **View** for the desired domain.
3. Review the **Certificate Status** field.

Contact your SSL certificate provider for more information about the maintenance tasks associated with your certificates.

Update Certificates in NetSuite

After you complete each of the maintenance tasks with your certificate provider, you must update the certificate information in NetSuite. This involves adding, deleting, and updating certificate files on the Domain record page.

 **Note:** Some certificate vendors, such as GoDaddy, may revoke an old certificate 72 hours after issuing a new one.

To update your certificate files in NetSuite:

1. Go to Commerce > Hosting > Domains.
2. Click **Edit** next to the domain name whose certificate you want to update.
3. Generate and download a new CSR file for the domain as described in [Generate a CSR](#).
4. Obtain a new SSL certificate from your certificate authority (CA) as described in [Submit Your CSR](#) and [Retrieve Your Certificates](#).
5. Click **Change Certificate** in the Certificate section.
6. Click **Upload Certificate** and upload the certificate files provided to you by the CA. You can also drag and drop the certificate file into the specified area on the form.

If your CA has given you an intermediate certificate (for example, secure.domainname_ca.crt) as well as the SSL certificate (for example, secure.domainname.crt), make sure you select all the files at the same time during upload. You cannot upload them one at a time.

7. Click **Save**.

Your existing secure domain is continuously served until the new certificate is deployed. NetSuite often deploys domains during the day. During this time, checkouts made through your secure domain are not interrupted. You will receive a notification email message when your new certificate is live.

Upgrade

You may be allowed to upgrade your SSL certificates based on the options provided by your certificate authority.

Revocation

You may need to revoke your certificate if it becomes compromised. When revoked, the certificate remains in NetSuite for seven days, after which it is removed. Before removal, the revoked certificate still allows customers to access the website after accepting a security exception offered by the browser. After removal, the website is no longer accessible.

Manual Certificates FAQ

i Applies to: SuiteCommerce | SuiteCommerce Advanced

How do I generate a Certificate Signing Request (CSR)?

See [Generate a CSR](#) for information about what you need to do to generate a CSR in NetSuite. Next, follow the instructions for generating a CSR provided on the website of your certificate authority (CA). If you cannot find these instructions, contact your CA for details.

What are the requirements for the SSL certificates I buy for the custom checkout domain I use with NetSuite?

You can select an SSL certificate from the vendor of your choice, but it must meet the following requirements:

- All SSL certificates you use with NetSuite require:
 - A 2048-bit RSA (private and public) key. 4096-bit key lengths are not supported.
 - The private key must use the PKCS#1 RSA Cryptography Standard.
- i Note:** The PKCS#8 Private-Key Information Syntax Standard is not supported. If the private key issued to you uses the PKCS#8 standard, see [Q:](#) .
- Compatibility with Apache and encoded in PEM-format.
 - You are required to purchase SSL certificates that use the SHA-2 hash function or better. For more information, see the help topic [Supported TLS Protocol and Cipher Suites](#).
 - The following are **not supported**:
 - Wildcard certificates
 - Self-signed certificates
 - ECC (Elliptic Curve Cryptography) SSL certificates
 - Subject Alternative Name (SAN) fields on an SSL certificate (that is, adding multiple domain names to a single certificate). Only the Subject Name on a certificate is considered. In cases where SANs are specified on a certificate (using a subjectAltName field), they are ignored.

i Note: To test if a certificate is trusted by your selected web browser, click the link in the **URL to Test Website or Example Cert** column of the [Mozilla Included CA Certificate List](#). You can purchase certificates from providers not listed in the Mozilla Included CA Certificate list. However, they may not be trusted by your browser. Contact your certificate provider for more information.

How can I change the private key from PKCS#8 to PKCS#1?

Some certificate providers generate the private key encrypted in the unsupported PKCS#8 key format. The unsupported PKCS#8 key starts with the following line:

```
1 | -----BEGIN PRIVATE KEY-----
```

You can convert this unsupported PKCS#8 key to the PKCS#1 key format using the following command:

```
1 | $ openssl rsa -in <my-key-filename>.key -out <my-key-filename>-rsa.key
```

The PKCS#1 formatted key starts with the following line:

```
1 | -----BEGIN RSA PRIVATE KEY-----
```

What happens if my manual SSL certificate expires?

An expired certificate is automatically deleted 30 days after the expiration date, and makes your website inaccessible.

To avoid this, make sure your certificates are always valid (unexpired) for all your secure websites, including test websites.

Secure Domain Licenses

i Applies to: SuiteCommerce | SuiteCommerce Advanced

A Commerce website license includes a fixed number of secure domain licenses. You need to secure all the domains you use for your Commerce website.

Each license covers one secure domain. For example, if to set up three domains to support three different languages and currencies on your website, you can set them up as follows:

- Language A – Combined Web Store and Default Checkout domain (uses one secure domain license)
- Language B – Combined Web Store and Default Checkout domain (uses another secure domain license)
- Language C – Secure Web Store domain with Custom Checkout domain (uses two secure domain licenses)

If you need more secure domain licenses, contact your account manager.

Free Up a Secure Domain License

You can free up a license already in use by replacing the Custom Checkout domain with a default checkout subdomain. To do this, follow the steps in the [To set up a secure subdomain for checkout:](#) procedure to replace the custom checkout domain with a default checkout subdomain.

⊗ Warning: If any of your custom scripts or features have the checkout domain name hard coded, make sure you update them first. Otherwise, they might stop working when you switch to the default checkout subdomain.

When you have a free secure domain slot available, you can use it to set up a secure Web Store domain or combined Web Store and Checkout domain.

Web Store Sessions

Applies to: SuiteCommerce | SuiteCommerce Advanced

Note: This topic describes how domain bridging works in your SuiteCommerce or SuiteCommerce Advanced (SCA) web store. The type of domain bridging you use (encrypted or not) depends on your web store setup and any customizations that might not work with encrypted domain bridging. SuiteCommerce and most SCA sites use encrypted domain bridging, but some SCA setups use domain bridging without encryption.

Note: This topic applies to web store implementations that use separate shopping and checkout domains, not single-domain setups. For more information about domains and NetSuite, see [Set Up Domains for Web Stores](#).

If your web store uses a separate, non-secure web store domain with a secure checkout domain, each one holds different information for the same session:

- **Non-secure HTTP web store domain:** Supports non-secure content and shopping pages.
- **Secure HTTPS checkout domain:** Supports secure content and checkout and My Account pages.

Both environments are deeply integrated into NetSuite and do not have access to state or session information from the other environment. To achieve a seamless customer experience between secure and non-secure domains, tokens and linkable attributes are passed between the two server environments through URL parameters and are stored as cookies to maintain the transferred state over time on each domain. This process is called domain bridging.

With encrypted domain bridging, the URL parameters are also encrypted.

Note: NetSuite never sends usernames or passwords from a non-secure domain and always uses the secure domain for authentication.

Domain bridging doesn't transfer any information about the user's browser or computer. The data exchanged only relates to the user's shopping state like user cart, used promotion codes, and chosen shipping information.

Session Management

A Commerce web store uses entities and roles to manage session information across domains.

Definitions:

- **Entity:** This is the ID for a specific NetSuite user. It's usually a Customer, but can also be a Vendor or Employee.
- **Role:** This is assigned to a user and sets what they can see or do in NetSuite.
- **Session:** This is an open browser tab, and NetSuite uses it to track the user's EntityID and Role.

Explicit Session Invalidation

Explicit session invalidation helps keep your site secure and applies to all SuiteCommerce, SCA, and Site Builder web stores.

If a user's credentials change during an active session (like their password or role), explicit session invalidation kicks in and ends the session.

The following examples describe explicit session invalidation scenarios:

- If a website administrator changes a user's password, all their sessions end. If the user was logged in to an active session, they are automatically logged out and must log in to your website again.
- If a user starts a password reset (like using the Forgot My Password link), all their sessions end.
- If a logged-in user changes their password in My Account, their session in that tab continues, but any other sessions end.
- If a user's role changes (including by script), all their sessions end.

Roles

i Applies to: SuiteCommerce | SuiteCommerce Advanced

The following two NetSuite roles are used with Commerce web stores:

- [Shopper Role](#)
- [Customer Center Role](#)

Shopper Role

The Shopper role is for users who aren't logged in and don't have a Customer Center role. When someone visits your site, they're assigned the Shopper role by default unless they've logged in before.

The Shopper role has read-only permissions that are limited to record types in your NetSuite account, such as items. They can't create new records except for registering as a customer.

i Note: Because of how the Shopper role is used in Commerce web stores, some functionality is not supported. For example, the newsletter functionality is currently not supported in Commerce web stores because a user with the Shopper role cannot directly create a new lead record.

Customer Center Role

The Customer Center role controls what customers see in My Account and what they can access after registering. All new customers are automatically assigned this role after they register as customers.

The Customer Center role provides elevated permissions for records, such as transactions, that are required to create the Checkout and My Account experiences. You can customize this role to change or limit what customers can see or do.

For more information about the Customer Center role, see the help topic [Create the Website Customer Center Role](#).

Session States, Sign in, and Cookies

i Applies to: SuiteCommerce | SuiteCommerce Advanced

A session state indicates the degree of authentication that the server understands about the current website user. It's managed during the user's session and depends on their entity and role.

Commerce web stores use three session states:

- **Anonymous state** - The web store doesn't know who the user is (no entity ID). This usually happens when someone visits your site for the first time or after signing out. Anonymous users can use the

unsecured shopping domain fully, but only have limited access to checkout and My Account so they can log in.

- **Authenticated state** - The user is logged in, so the server knows their entity ID and role (EntityID: 1234 and Role: Customer Center).
- **Recognized state** - The server knows the user's entity ID, but they're not logged in (EntityID: 1234 and Role: Shopper). This usually happens when someone who logged in before comes back later.

The following table provides examples of session states:

Session State	EntityID	Role	Degree of Authentication
Authenticated	1234	Customer Center	User is currently logged in.
Recognized	1234	Shopper	User has logged in some time in the past.
Anonymous	0	Shopper	User is unknown and is likely a first-time visitor.
IMPOSSIBLE	0	Customer Center	Authentication cannot occur.

Sign In

If an anonymous user tries to access the secure HTTPS checkout or My Account domains, they need to log in or create an account and can only view the login or register page.

If an anonymous user signs in or creates an account on the secure domain, their role changes from Shopper to Customer Center and an entity ID is assigned. However, this only occurs on the secure HTTPS domain.

After logging in to the secure domain, the user's role and entity haven't changed yet on the unsecured domain. For the unsecured domain to sync with the secure domain, the user needs to return to the unsecured domain and, through the link, pass the appropriate information to sync the secure session's information. After the unsecured domain is in sync, the user then has the same entity ID (1234) and elevated role (Customer Center) on both domains.

Cookies

The following cookies are used to retain website session information specific to the Commerce web store experience:

- **NLShopperID** - This cookie is for encrypted domain bridging and links a browser to a cart. It stays in the browser even after you close it, and its value is kept in sync between servers to help recognize returning customers.
- **CkID/ShopperID** - These cookies are for domain bridging without encryption. They link a browser to a cart, stick around after you close the browser, and are kept in sync between servers to recognize returning customers.
- **JSESSIONID** - This cookie links a browser to a session on a NetSuite server. If you shop on both the unsecured and secure domains, each one gets its own JSESSIONID.

Shopping Cart Use Case

i Applies to: SuiteCommerce | SuiteCommerce Advanced

If a user visits a web store for the first time on their work computer (Session 1 in the following example), they're given an NLShopperID cookie that identifies the specific browser and computer being used and references the shopping cart.

Note: If domain bridging isn't encrypted, the user is issued a ShopperID cookie instead of an NLShopperID cookie.


After the user goes to the checkout page, the HTTP shopping domain requests a secure domain bridging URL. The domain bridging URL uses encrypted parameters to transfer information about the user's browser, computer, and their cart to the HTTPS checkout domain. The user, browser, and cart connection between the two NetSuite server environments is preserved to create a single unified experience.

Note: If domain bridging isn't encrypted, the HTTP shopping domain passes the ShopperID to the HTTPS checkout domain through the CkID cookie. This cookie links the user's browser and computer to their cart.

If a user logs in from another computer or browser, they get a new NLShopperID cookie. The old cart and the new one are merged and linked to the new cookie and the user's EntityID.

Note: If domain bridging isn't encrypted and a user later logs in to your website from another computer or a different browser, a different CkID is passed. The pre-existing cart and the new cart are merged and associated with the new CkID cookie and the user's EntityID.

Example: Session 1 (Work Computer)

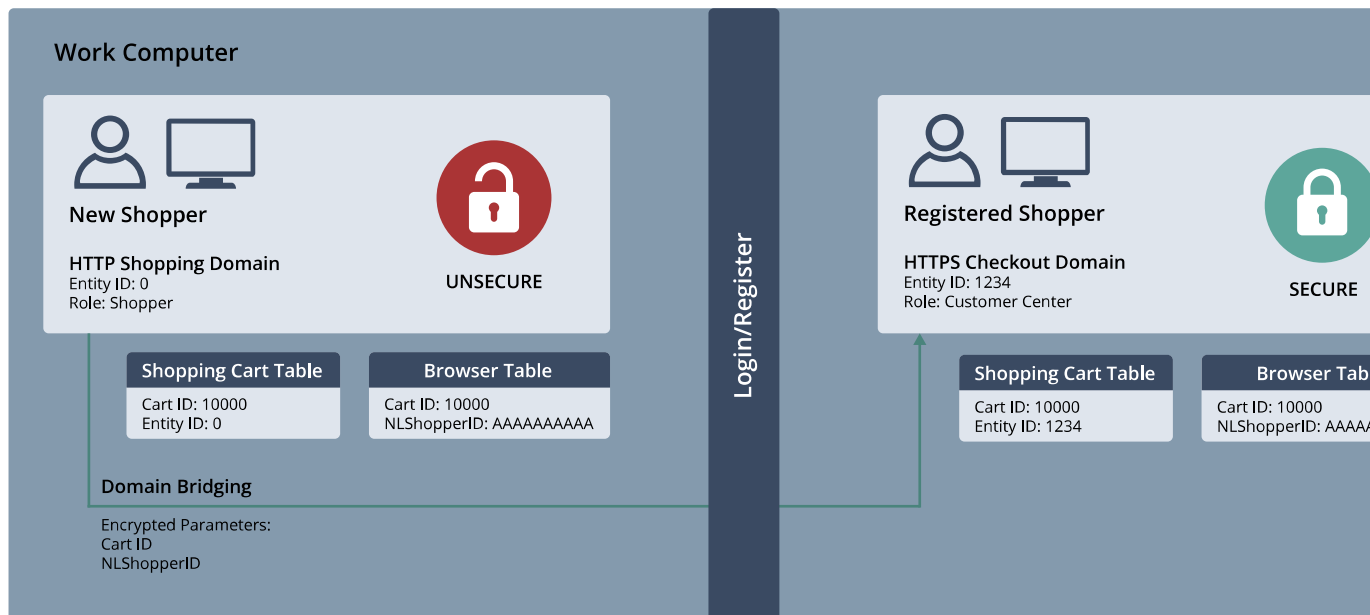

A new user who has never visited your site goes to your web store. They're not recognized and are assigned an EntityID of 0 and the default Shopper role. At the same time, a shopping cart is created (CartID: 10000) and linked to the NLShopperID cookie. However, because the user hasn't created an account, the shopping cart's EntityID is 0.

Note: If domain bridging is not encrypted, a CkID cookie is created along with the shopping cart and is associated with the newly created CartID.


Next, the user goes to the secure domain, intending to log in or register. The NLShopperID and CartID cookies are passed from the shopping environment using an encrypted parameter in the domain

bridging link, and the checkout domain starts off with the same attributes as the shopping server. Since the session's role is Shopper, the user sees a login or register page.

Note: If domain bridging is not encrypted, the CkID cookie is passed from the shopping environment along with the CartID.

After the user creates an account on the secure checkout domain, the shopping cart on the checkout domain is linked to the newly created EntityID: 1234, directly connecting the cart to the customer.

Example: Session 2 (Home Computer)

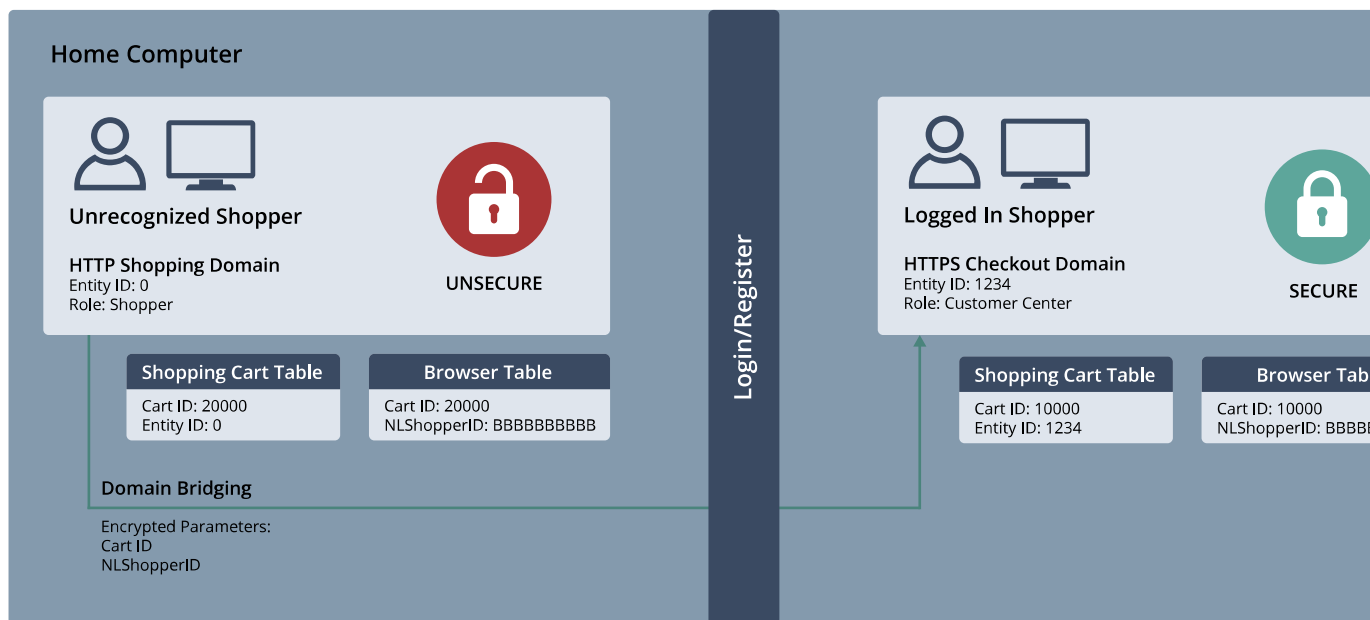

The same user leaves work and goes home. At home, they decide to return to your web store on their home computer. When they return to your web store, they're not recognized and are treated as a new user with an EntityID of 0 and the default Shopper role.

Next, the user goes to the secure HTTPS checkout domain, intending to log in. The NLShopperID cookie is passed from the shopping environment using an encrypted parameter in the domain bridging link, and the checkout domain starts off with the same attributes as the shopping server. Because the session's role is Shopper, the user is presented with a login or register page.

Note: If domain bridging is not encrypted, the CkID cookie is passed from the shopping environment, and the checkout domain starts off with the same attributes as the shopping server.

The user signs back into their account with the new credentials they created earlier at work. After the user logs in, the system recognizes an existing cart with the same EntityID and updates NLShopperID to point to the existing CartID. If the user added items at home and their cart already had items from work, the system merges everything into the original cart and updates their session information.

Note: If domain bridging is not encrypted, the system recognizes an existing cart with the same entity ID and updates CkID to refer to the existing CartID.

Note: A single cart can have more than one NLShopperID (or CkID, if domain bridging isn't encrypted) linked to it. That's how NetSuite syncs carts between work, home, and mobile devices.

Website Domains and Email Hosting

Applies to: SuiteCommerce | SuiteCommerce Advanced

If you're planning to send more than 100,000 marketing emails in 30 days, you need to set up a campaign domain. Similarly, if you're sending more than 10,000 emails in one campaign, you'll also need a campaign domain. You can use your own domain for your email campaigns.

To set up a domain for your email campaign, you'll need to configure your Domain Name System (DNS) settings to point your domain to NetSuite hosting servers. Most of the time, your domain provider can redirect your domain using a CNAME record (Canonical Name record). This designates your domain an alias of the NetSuite hosting domains assigned to your account. For more information about setting up a CNAME record, see [Point Your Domain Name at Your Domain \(DNS Settings\)](#) and for more information about using a custom domain for email campaigns, read the help topic [Campaign Email Domains](#).

You might not need a campaign domain as described above, but you may need one to host company emails. As a best practice, you shouldn't use your domain for multiple purposes. The most common example is when you're using your root domain to host several services. As an example, the website <https://wolfelectronics.com> and the company email jwolfe@wolfelectronics.com are sharing the same root domain.

Warning: You shouldn't use the same root domain for your website and your email campaigns. Problems can occur when you assign multiple DNS records to one root domain. For example, if you set up **example.com** for both shopping and email marketing, you may encounter problems such as email server failures.

CNAME Flattening (Dynamic A Record)

Applies to: SuiteCommerce | SuiteCommerce Advanced

CNAME flattening (sometimes called a dynamic A record or ANAME record) lets you use CNAME records on the root domain. In DNS, CNAME records point one domain to another, basically acting as a redirect. This means you can't have any other records in the domain's DNS. Root domains almost always have more than one DNS record, so you can't use a CNAME record there. That's where CNAME flattening comes in.

Some DNS providers offer CNAME flattening as a feature, and how you set it up depends on your provider. CNAME flattening dynamically resolves the domain to its IP address and uses that IP as an A record instead of a CNAME. The advantage of using an A record is that it can exist alongside other DNS records, so you won't have conflicts.



Important: If NetSuite verifies your DNS setup, using CNAME flattening may cause a DNS-status error on the related DNS record.

NetSuite checks your DNS setup when you use acme-challenge, third-level domains, or automatic certificates.

How to Set Up CNAME Flattening

You should use CNAME flattening only when configuring a second-level custom domain (like example.com) for a site hosted on the NetSuite platform. In this specific case, you can't use a standard CNAME record because DNS doesn't allow CNAMEs at the root level. Also, using a static A record might stop working because NetSuite IP addresses may change over time.

To ensure proper DNS resolution without relying on static IP addresses, you must enable CNAME flattening for that second-level domain.



Important: Enable CNAME flattening only for second-level domains you are pointing to NetSuite (like example.com).

Don't enable CNAME flattening for any of its subdomains (like www.example.com) and hosting verification records (like _acme-challenge.example.com). Doing so may interfere with DNS validation and cause issues with issuing certificate or domain verification.

While CNAME flattening setup varies by provider, the general steps are:

1. Go to your DNS provider's control panel or dashboard and find the DNS management or records page.
2. Create a new DNS record for the domain, example.com. Check your DNS provider's documentation for instructions about how to do this.
 - Some DNS providers automatically flatten root-level CNAMEs. If yours does, create a DNS record of the CNAME type like this:

```
1 | example.com CNAME example.com.hosting.netsuite.com
```

- Other DNS providers need you to add specific record types to enable CNAME flattening, usually an ALIAS, A, or ANAME record. If that's the case for your provider, select the record type that's mentioned in their help documentation. Depending on the record type, your DNS record should look like one of the following:

```
1 | example.com ALIAS example.com.hosting.netsuite.com
2 | example.com ANAME example.com.hosting.netsuite.com
3 | example.com A example.com.hosting.netsuite.com
```

3. Review and save your changes.
4. Give DNS some time to update. Changes can take a few hours to a day to spread across the internet. Your DNS provider can give you an estimate.
5. After DNS updates, test your domain to make sure it points to the right place. You can use dig, nslookup, or an online DNS tool for this.

Note: Someone with DNS experience should perform these tasks. Check your DNS provider's support resources for detailed instructions, since each provider has different interfaces and options.

You should always check with your domain provider, but here are some examples of how to set up a DNS record for CNAME flattening:

- Use an ALIAS record at the root domain to point to a NetSuite hosting domain.

```
1 | example.com ALIAS example.com.hosting.netsuite.com
```

- Use an ANAME record at the root domain to point to a NetSuite hosting domain.

```
1 | example.com ANAME example.com.hosting.netsuite.com
```

- Use the CNAME at the root domain to point to a NetSuite hosting domain.

```
1 | example.com CNAME example.com.hosting.netsuite.com
```

- Use the A record at the root domain with NetSuite hosting domain name instead of an IP address.

```
1 | example.com A example.com.hosting.netsuite.com
```

In all of these examples, the DNS provider automatically converts this to an A record with the IP address for the hosting domain. From the user's perspective, the redirection is seamless and transparent.

If CNAME flattening works as expected, you'll end up with something like this:

```
1 | example.com A 2.16.153.216
```

Static A Record

Applies to: SuiteCommerce | SuiteCommerce Advanced

Unlike CNAME flattening (a dynamic A record), a static A record points to a fixed IP address. NetSuite doesn't support static A records because that would create a static dependency on a specific IP address.

The advantage of CNAME flattening is that the IP resolution and A record creation happen dynamically. This means that if NetSuite changes the IP address, it'll automatically update in your DNS.

Overview

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Commerce websites let you configure common properties and modify application behavior for a specific domain using the NetSuite UI, instead of having to customize the source code. The SuiteCommerce Configuration record feature provides this capability and is installed with the SuiteCommerce Configuration bundle.

You can:

- Configure properties for a domain
- Read configuration file types information
- Browse the site configuration properties reference section
- Configure and maintain Site Management Tools

To access a SuiteCommerce Configuration record, go to Commerce > Websites > Configuration.

See the following topics for more information:

- [Configure Properties](#) – This section explains how to configure properties for a domain and how to copy a SuiteCommerce configuration record.
- [Configuration Properties Reference](#) – This section lists all the configuration properties SuiteCommerce supports. They're grouped by how they appear in the Configuration record.
- [Configuration File Types](#) – This section explains the different configuration files you may encounter when setting up SuiteCommerce. The types of files and their purpose can change depending on your SuiteCommerce version.
- [Site Management Tools Configuration](#) – This section explains how to set up and manage Site Management Tools..
- [Templates and Theme Areas for SuiteCommerce Themes](#) – This section outlines the template files and pre-defined areas you can use to install a custom extension or to add a custom content type to your SuiteCommerce theme.

Configure Properties

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These topics explain how to configure your Commerce website using the SuiteCommerce Configuration record. For this record to appear in your account, you must install the SuiteCommerce Configuration bundle, which is available for SuiteCommerce, SuiteCommerce MyAccount, and the Vinson release of SCA and later. See the help topic [Install Your Commerce Website Applications](#) for more information.

i Note: This configuration method is available for SuiteCommerce, SuiteCommerce MyAccount, and the Vinson release of SuiteCommerce Advanced and later. When configuring the Mont Blanc or Denali release of SCA, you must customize JavaScript configuration files. See the help topic [Develop Your SCA Customization](#) for more details.

This topic explains how to:

- [Configure Properties for a Domain](#)
- [Copy a SuiteCommerce Configuration Record](#)

! Important: If you're using SuiteCommerce Advanced (SCA) and moving to a later release from Denali or Mont Blanc, you can copy your previous configuration files and include them directly in the Vinson JavaScript files. If you do this, you don't need to install the SuiteCommerce Configuration bundle. These existing configuration files take priority over the SuiteCommerce Configuration record. However, if you're installing Vinson or a later release as your first SCA installation, you need to install the SuiteCommerce Configuration bundle to set up your site.

i Note: Before configuring a Commerce web store, ensure that you've created a website and domain for your NetSuite account. See and [Set Up Domains for Web Stores](#) for more information.

Configure Properties for a Domain

Use the SuiteCommerce Configuration record when you want to update properties for your domain.

To configure properties for a domain:

1. Go to Commerce > Websites > Configuration.
2. Choose the site that you want to configure from the **Select Website** list.
3. Select the domain that you want to configure from the **Select Domain** list.
4. Click **Configure**.
5. Configure properties for the domain by clicking the tab and subtab for the feature you want to update. See [Configuration Properties Reference](#) for details.
6. Save the record.



Important: Saving changes to the SuiteCommerce Configuration record creates a custom record for the selected domain. To configure multiple domains, you need to save a SuiteCommerce Configuration record for each one separately.

You can also copy one domain's configuration to another using the **Copy Configuration** feature. See [Copy a SuiteCommerce Configuration Record](#).



Important: The SuiteCommerce Configuration record works with valid JSON data, like strings, numbers, booleans, objects, arrays, or null. The [Configuration Properties Reference](#) explains the type of data expected for each property.



Note: If your domain is mapped to a CDN, any changes you make to the Shopping Application with the SuiteCommerce Configuration record take about five minutes to take effect. This happens because the configuration information is published to the `sc.shopping.environment.ssp` file, which has a five-minute CDN cache by default. See [CDN Caching Times](#) for more details.

Copy a SuiteCommerce Configuration Record

Use the Copy Configuration function to copy a SuiteCommerce Configuration record from one domain to another.

Common scenarios where this function is useful include:

- When you move a site from staging to production
- When you upgrade from one SCA release to another



Note: The two domains do not have to be on the same release of SCA. For example, you can copy a Kilimanjaro Configuration record from one domain to another Kilimanjaro domain or to an Aconcagua domain. Because newer SCA versions often have fields that older releases don't, the tool copies all the fields they share and uses default values for any new fields.

To use the Copy Configuration feature, select the origin domain and the destination domain, then click Copy Configuration.

In the procedure below:

- **Origin Website/Domain** refers to the source configuration record. The tool copies the configuration record values from this website/domain, but doesn't change anything there.
- **Destination Website/Domain** is the configuration record you're overwriting. The tool populates the field values from the origin record into this one.



Important: This procedure overwrites the destination domain's configuration with the origin domain's setting. Copy to a test domain first (especially if you're copying from a Sandbox domain) before to copying to a production domain. Make sure that the configuration values you're copying match what you want for the destination domain.

To copy a SuiteCommerce Configuration record:

1. Go to Commerce > Websites > Configuration.
2. Click **Copy Configuration**.
3. Select the origin website from the **Origin Website** list.

4. Select the origin domain from the **Origin Domain** list.
5. Select the destination site from the **Destination Website** list.
6. Select the destination domain from the **Destination Domain** list
7. Click **Copy Configuration**.
8. Optional: If you want to change any values in the destination SuiteCommerce Configuration record, see: [Configure Properties for a Domain](#).



Note: The Copy Configuration function is a part of the SuiteCommerce Configuration bundle.

Configuration Properties Reference

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This section contains a list of the configuration properties supported by Commerce web stores. In this section, properties are grouped by functionality based on how they appear in the Configuration record, listed by tab and subtab.

The Theme and Extensions tabs also appear in the Configuration record if you have activated them for your domain. Each tab and subtab appears differently based on the theme or extension you activated.

- [Store Locator Tab](#)
- [My Account Tab](#)
- [Advanced Tab](#)
- [Shopping Tab](#)
- [Checkout Tab](#)
- [Integrations Tab](#)
- [Multi-Domain Tab](#)
- [Payment Instruments & Methods Tab](#)
- [Search Tab](#)
- [Shopping Catalog Tab](#)
- [Layout Tab](#)
- [Legacy Tab](#)

Note: SuiteCommerce Configuration is available as a separate bundle and requires SuiteCommerce or SuiteCommerce Advanced (Vinson release or later). See the help topic [Install Your Commerce Website Applications](#) for more information. If you don't have the SuiteCommerce Configuration bundle installed, this reference still works with the configuration properties available in your implementation.

Each property in this reference comes with a brief description and the following details, which you'll find in the subtab reference pages. Often, you'll also see links to topics with more information.

- **ID** – the name of the property in the JavaScript and JSON configuration files. This value should only have letters, numbers, and periods—no special characters. Sometimes, the ID is different in pre-Vinson implementations.
- **UI location** – the tab and subtab location in the Configuration record's user interface. This is where you configure the property in Vinson implementations and later of SuiteCommerce Advanced and in SuiteCommerce.
- **Configuration file (pre-Vinson)** – the JavaScript file where you configure the property in pre-Vinson implementations of SuiteCommerce Advanced. This only works with pre-Vinson implementations of SuiteCommerce Advanced.

Store Locator Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced

The settings on this tab let you configure properties for the Store Locator feature. This tab includes the following subtabs:

- [Store Locator Google Maps Subtab](#)
- [Store Locator Subtab](#)

Store Locator Google Maps Subtab

📘 Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings specify the Google Maps properties for the Store Locator feature.

This feature and its settings require:

- SuiteCommerce Advanced – Vinson and later
- SuiteCommerce

More Information: [Store Locator](#)

Google > API Key

This string sets the Google Maps API key for the Store Locator feature.

⚠ Important: The Store Locator feature uses the Google Maps JavaScript API. For this feature to work properly on your site, you must acquire an authentication API key from Google.

ID	storeLocator.apiKey
UI location	Store Locator > Store Locator Google Maps
JSON file	StoreLocatorGoogle.json

Google > Center Position Latitude

This number sets the default Google-specific latitude position (as a string) to center the map when geolocation is disabled.

ID	storeLocator.mapOptions.centerPosition.latitude
UI location	Store Locator > Store Locator Google Maps
JSON file	StoreLocatorGoogle.json

Google > Center Position Longitude

This number sets the default Google-specific longitude position (as a string) to center the map when geolocation is disabled.

ID	storeLocator.mapOptions.centerPosition.longitude
UI location	Store Locator > Store Locator Google Maps

JSON file	StoreLocatorGoogle.json
------------------	-------------------------

Google > Zoom Level

This number sets the Google-specific default map zoom level. The default is 11.

ID	storeLocator.mapOptions.zoom
UI location	Store Locator > Store Locator Google Maps
JSON file	StoreLocatorGoogle.json

Google > MapTypeControl

This boolean value enables the Google Map Type Control setting. Map Type Control lets the shopper choose the map type (roadmap, satellite, etc.). If this property is set to true, the map shows the control in the upper left corner. If you set it to false, the control won't display.

ID	storeLocator.mapOptions.mapTypeControl
UI location	Store Locator > Store Locator Google Maps
JSON file	StoreLocatorGoogle.json

Google > StreetViewControl

This boolean value enables the Google Street View Pegman icon. The Pegman icon is a Google control shoppers can drag onto the map to enable Street View. If you set this property to true, the map displays the control in the lower right corner. If you set it to false, the control won't display.

ID	storeLocator.mapOptions.streetViewControl
UI location	Store Locator > Store Locator Google Maps
JSON file	StoreLocatorGoogle.json

Google > MapTypeID

This string sets the default Google map type. You can choose from these options:

- **roadmap** – displays the default road map view (default)
- **satellite** – displays Google Earth satellite images
- **hybrid** – displays a mixture of normal and satellite views
- **terrain** – displays a physical map with terrain information

ID	storeLocator.mapOptions.mapTypeId
UI location	Store Locator > Store Locator Google Maps
JSON file	StoreLocatorGoogle.json

Store Locator Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings control the information that's displayed when shoppers use the Store Locator feature.

This feature and its settings require one of the following:

- SuiteCommerce Advanced – Vinson and later
- SuiteCommerce

More Information: [Store Locator](#)

Icons > Stores

This string sets the store marker icon that appears in the store list, next to the store name, and in the Store Information popup (if it's enabled).

ID	storeLocator.icons.stores
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Icons > Position

This string sets the store marker icon that appears on the map at the store's relative location.

ID	storeLocator.icons.position
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Icons > Autocomplete

This string sets the store marker icon that appears to the left of the store name within the predicted results of the auto-complete list.

ID	storeLocator.icons.autocomplete
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Zoom Level for Store Details

This number sets the map zoom level to be applied when shoppers view specific store details (applied in StoreLocator.Details.View.js). The default is 17.

ID	storeLocator.zoomInDetails
UI location	Store Locator > Store Locator

JSON file	StoreLocator.json
------------------	-------------------

Show Store Popup

This boolean value enables the Store Information popup when a shopper hovers over a store in the Store Locator list. This setting is enabled by default.

ID	storeLocator.openPopupOnMouseOver
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Title

This string sets the title for the Store Locator feature as it appears on the main view and in the header. The default title is Store Locator.

ID	storeLocator.title
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Is Enabled

This boolean value enables the Store Locator feature. It's set to enabled by default.

ID	storeLocator.isEnabled
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Radius

This number sets how far from the current location or entered address the map will show stores. You can set the radius units to kilometers or miles using a different configuration property. The default radius is 50.

ID	storeLocator.radius
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Show Localization Map

This boolean value enables the search map setting for mobile devices. If you enable this property, a small map displays at the top of the screen on mobile devices when shoppers search for an address. This property only works with mobile devices.

ID	storeLocator.showLocalizationMap
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Number of Stores per Page

This number sets how many stores display per page after a shopper clicks the **See complete list of stores** link. The default is 28.

ID	storeLocator.showAllStoresRecordsPerPage
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Default Type of Locations

This string sets which types of locations to display—stores, warehouses, or both. If you leave this blank, the map and list will show both location types. Possible values are:

- **1** – returns only locations listed as **Stores** in NetSuite.
- **2** – returns only locations listed as **Warehouses**.
- **1,2** – returns only locations listed as **Stores** or **Warehouses**.
- Leave blank to return locations listed as stores, warehouses, or undefined.

ID	storeLocator.defaultTypeLocations
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Default Quantity of Locations

This number sets the maximum number of locations to display if there aren't any results within the search radius specified with the **Radius** property.

ID	storeLocator.defaultQuantityLocations
UI location	Store Locator > Store Locator
JSON file	StoreLocator.json

Distance Unit

This string sets the measurement units for the radius—either miles or kilometers. The default is miles.

ID	storeLocator.distanceUnit
UI location	Store Locator > Store Locator

JSON file	StoreLocator.json
------------------	-------------------

My Account Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on the My Account tab let you configure properties related to the My Account application on your Commerce web store. This tab includes the following subtabs:

- [Subscriptions Subtab](#)
- [Return Authorization Subtab](#)
- [Preferences Subtab](#)
- [Overview Subtab](#)
- [Transaction List Columns Subtab](#)
- [SCIS Integration Subtab](#)
- [Cases Subtab](#)
- [Quotes Subtab](#)
- [List Header Subtab](#)
- [Addresses Subtab](#)

Subscriptions Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The following settings configure the SuiteBilling Subscriptions for Commerce feature:

- Subscription Line Status Change
- Allow the User to Cancel/Suspend Required Lines
- Subscription General Status Change
- Disallow the User to Upgrade Quantity
- Disallow the User to Downgrade Quantity

More information: [Subscriptions for Commerce Websites](#)

Subscription Line Status Change

This setting works with:

- SuiteCommerce Advanced – 2019.2 and later
- SuiteCommerce
- SuiteCommerce MyAccount

This string lets you choose if shoppers can:

- Suspend and resume a subscription line item
- Cancel a subscription line item
- Change the status of a subscription line item

ID	subscriptions.lineStatusChange
UI location	My Account > Subscriptions
JSON file	subscriptions.json

Allow the User to Cancel/Suspend Required Lines

This property works with:

- SuiteCommerce Advanced – 2019.2 and later
- SuiteCommerce

This boolean value lets you choose if shoppers can cancel or suspend required subscription lines.

ID	subscriptions.allowToCancelSuspendRequiredLines
UI location	My Account > Subscriptions
JSON file	subscriptions.json

Subscription General Status Change

This property works with:

- SuiteCommerce Advanced – 2019.2 and later
- SuiteCommerce

This string lets you control whether shoppers can:

- Suspend and resume a subscription
- Cancel a subscription
- Change the status of a subscription

ID	subscriptions.generalStatusChange
UI location	My Account > Subscriptions
JSON file	subscriptions.json

Disallow the User to Upgrade Quantity

This property works with:

- SuiteCommerce Advanced – 2019.2 and later
- SuiteCommerce

This boolean value lets you choose if shoppers can increase the quantity of a subscription line item.

ID	subscriptions.disallowUpgradeQuantity
UI location	My Account > Subscriptions
JSON file	subscriptions.json

Disallow the User to Downgrade Quantity

This property works with:

- SuiteCommerce Advanced – 2019.2 and later
- SuiteCommerce

This boolean lets you choose if shoppers can decrease the quantity of a subscription line item.

ID	subscriptions.disallowDowngradeQuantity
UI location	My Account > Subscriptions
JSON file	subscriptions.json

Return Authorization Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings configure properties for the Return Authorization feature.

Cancel URL Root

This string lets you set a custom domain to override the default one for canceling a return authorization.

ID	returnAuthorization.cancelUrlRoot
UI location	My Account > Return Authorization
JSON file	ReturnAuthorization.json
Configuration file (pre-Vinson)	Configuration.js

Return Authorizations Reasons

This array sets the return reasons shoppers can choose from. Each reason contains the following properties:

- **Reason** (string) – the text for the return reason, up to 300 characters (including special characters).
- **ID** (number) – the internal ID for the return reason. Each one needs a unique ID.
- **Order** (number) – where the return reason appears in the dropdown list.
- **Is Other** (boolean) – specifies if the return reason is "Other".

IDs	returnAuthorization.reasons.text returnAuthorization.reasons.id returnAuthorization.reasons.order returnAuthorization.reasons.isOther
UI location	My Account > Return Authorization
JSON file	ReturnAuthorization.json

Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js
--	-------------------------------

Preferences Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The **Allow User to Reorder Items** setting lets shoppers reorder items.

For more information see the help topic [Reorder Items](#).

Allow User to Reorder Items

This setting works with SuiteCommerce MyAccount.

This boolean lets you choose if shoppers can reorder items.

ID	myAccountPreferences.reorderEnabled
UI location	My Account > Preferences > Allow users to reorder items
JSON file	ReorderItems.json

Overview Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings options for the My Account page.

Customer Support URL

This string sets the URL for your customer support page.

ID	overview.customerSupportURL
UI location	My Account > Overview
JSON file	Overview.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Recent Orders Quantity to Show

This number sets how many recent orders show up on the My Account Overview page. By default, the last three orders are displayed.

ID	overview.homeRecentOrdersQuantity
UI location	My Account > Overview
JSON file	Overview.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Home Banners

This array sets the banners to display in the My Account area of SuiteCommerce, SuiteCommerce Advanced, and SuiteCommerce MyAccount. You can set up home banners to customize promotions for your customers. Each banner requires the following properties:

- **Image URL** (string) – sets the URL for the banner image.
- **Link URL** (string) – where users are directed after they click the image.
- **Link Target** (string) – sets where to open the Link URL. For example, `_blank` opens it in a new browser window.

IDs	overview.homeBanners overview.homeBanners.imageSource overview.homeBanners.linkURL overview.homeBanners.linkTarget
UI location	My Account > Overview
JSON file	Overview.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

 **Note:** Only one banner is displayed at a time. If you add more than one, the page picks one banner at random each time it loads.

Public URLs

This array of strings sets your public URLs. For more information, see the help topic [Set Public URLs](#).

ID	overview.publicUrls
UI location	My Account > Public URLs
JSON file	PublicUrls.json

Transaction List Columns Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The **Transaction List Columns** subtab lets you configure how transaction column fields appear in the My Account area of your site. When you enable column management for a list, you can specify which fields appear.

You can configure the following transaction lists:

- Order History
- Quotes
- Returns
- Open Invoices
- Paid Invoices

Note: If you enable column management for a list, the settings on the **Transaction List Columns** subtab override any other configuration. For example, if you connect SCIS to your site and enable column management here, your My Account transaction columns will follow these settings. To add columns from your SCIS integration later, create them manually as described below.

More information:

- For feature documentation, see the help topic [Transaction Lists](#)
- For applicable fields and their IDs, refer to the **Search Columns** list on the following Record Browser pages:
 - [Sales Order-related fields](#)
 - [Invoice-related fields](#)
 - [Quote-related fields for Estimate record](#)

Enable Return Authorization Columns Management

This boolean enables column management for the Returns transaction list. If you enable this property, My Account uses the settings in the **Transaction List Columns Return Authorization** table to show the Return Authorization list on your site. This property is disabled by default.

ID	transactionListColumns.enableReturnAuthorization
UI location	My Account > Transaction List Columns
JSON file	MyAccountReturnAuthorizationListsColumns.json

Enable Quotes Columns Management

This boolean enables or disables column management for the **Quotes** transaction list. If you check this property, the My Account application uses the properties set in the **Transaction List Columns Quote** table to display the Quotes list on your site. By default, this property is disabled.

For this column to appear, you must enable the Quotes feature for your account. See the help topic [Quotes for Commerce Websites](#) for more information.

ID	transactionListColumns.enableQuote
UI location	My Account > Transaction List Columns
JSON file	MyAccountQuoteListsColumns.json

Enable Order History Columns Management

This boolean enables or disables column management for the **Recent Purchases** transaction list. If you check this property, the My Account application uses the properties set in the **Transaction List Columns Order History** table to display the Purchase History list on your site. By default, this property is disabled.

ID	transactionListColumns.enableOrderHistory
UI location	My Account > Transaction List Columns
JSON file	MyAccountOrderHistoryListsColumns.json

Enable Invoice Columns Management

This boolean enables or disables column management for the Open Invoices transaction list. If you check this property, the My Account application uses the properties set in the **Transaction List Columns Open Invoices** and **Transaction List Columns Paid Invoices** tables to display the Open and Paid Invoices list on your site. By default, this property is disabled.

ID	transactionListColumns.enableInvoice
UI location	My Account > Transaction List Columns
JSON file	MyAccountInvoiceListsColumns.json

Transaction List Columns Return Authorization

You can use this array to add columns to the **Returns** transaction list. The order of the columns in this table determines the order they display on your site (top-down, left-to-right).

Add a line for each field you want to display on your site. The ID and Label properties are strings. The ID property must match the Field ID of the field you want to display. The default properties are:

- trandate
- quantity
- amount
- status

 **Note:** The **Return No.** column displays by default and can't be changed.

ID	transactionListColumns.returnAuthorization transactionListColumns.returnAuthorization.id transactionListColumns.returnAuthorization.label
UI location	My Account > Transaction List Columns
JSON file	MyAccountReturnAuthorizationListsColumns.json

Transaction List Columns Quote

You can use this array to add columns to the **Quotes** transaction list. The order of the columns in this table determines the order they display on your site (top-down, left-to-right).

Add a line for each field you want to display on your site. The ID and Label properties are strings. The ID property must match the Field ID of the field you want to display. The default properties are:

- trandate
- duedate
- total
- status

 **Note:** The **Quote No.** column displays by default and can't be changed.

ID	transactionListColumns.quote
-----------	------------------------------

	transactionListColumns.quote.id transactionListColumns.quote.label
UI location	My Account > Transaction List Columns
JSON file	MyAccountQuoteListsColumns.json

Transaction List Columns Order History

You can use this array to add columns to the Order History transaction list. The order of the columns in this table determines the order they display on your site (top-down, left-to-right).

Add a line for each field you want to display on your site. The ID and Label properties are strings. The ID property must match the Field ID of the field you want to display. The default properties are:

- date
- amount
- status

 **Note:** The **Purchase No.** and **Track Items** columns display by default and can't be changed.

ID	transactionListColumns.orderHistory transactionListColumns.orderHistory.id transactionListColumns.orderHistory.label
UI location	My Account > Transaction List Columns
JSON file	MyAccountOrderHistoryListsColumns.json

Transaction List Columns Open Invoices

You can use this array to add columns to the **Open Invoices** transaction list. The order of the columns in this table determines the order they display on your site (top-down, left-to-right).

Add a line for each field you want to display on your site. The ID and Label properties are strings. The ID property must match the Field ID of the field you want to display. The default properties are:

- duedate
- trandate
- amount

 **Note:** The **Invoice No.** column displays by default and can't be changed.

ID	transactionListColumns.invoiceOpen transactionListColumns.invoiceOpen.id transactionListColumns.invoiceOpen.label
UI location	My Account > Transaction List Columns
JSON file	MyAccountInvoiceListsColumns.json

Transaction List Columns Paid Invoices

You can use this array to add columns to the **Paid Invoices** transaction list. The order of the columns in this table determines the order they display on your site (top-down, left-to-right).

Add a line for each field you want to display on your site. The ID and Label properties are strings. The ID property must match the Field ID of the field you want to display. The default properties are:

- trandate
- closedate
- amount

 **Note:** The **Invoice No.** column displays by default and can't be changed.

ID	transactionListColumns.invoicePaid transactionListColumns.invoicePaid.id transactionListColumns.invoicePaid.label
UI location	My Account > Transaction List Columns
JSON file	MyAccountInvoiceListsColumns.json

SCIS Integration Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Is SCIS Integration Enabled

You can use this boolean to enable or disable SCIS integration with your Commerce site. From the 2025.2 release of SuiteCommerce and SuiteCommerce Advanced, this setting is disabled by default.

ID	isSCISIntegrationEnabled
UI location	My Account > SCIS Integration
JSON file	ReturnAuthorization.json
Configuration file (pre-Vinson)	Configuration.js

Location Type Mapping Store Internal ID

This string lets you define the location-type identifier that Commerce web stores use to link a transaction with an in-store purchase. 1 = store, 2 = online.

ID	locationTypeMapping.store.internalid
UI location	My Account > SCIS Integration
JSON file	ReturnAuthorization.json
Configuration file (pre-Vinson)	Configuration.js

Location Type Mapping Store Name

This string lets you add a description for the `locationTypeMapping.store.internalid` property.

ID	<code>locationTypeMapping.store.name</code>
UI location	My Account > SCIS Integration
JSON file	<code>ReturnAuthorization.json</code>
Configuration file (pre-Vinson)	<code>Configuration.js</code>

Transaction Record Origin Mapping

This array lets you set what displays in a user's account. Each transaction record origin mapping object requires the following properties:

- **ID** (string) – where the purchase record came from (backend, instore, online).
- **Origin** (number) – the frontend properties related to what's displayed in a user's account. This is related to the `locationTypeMapping.store.internalid` property.
- **Name** (string) – the text displayed in the Origin column of a user's My Purchases list.
- **Detailed Name** (string) – the text displayed in the Purchase Details page.

IDs	<code>transactionRecordOriginMapping</code> <code>transactionRecordOriginMapping.id</code> <code>transactionRecordOriginMapping.origin</code> <code>transactionRecordOriginMapping.name</code> <code>transactionRecordOriginMapping.detailedName</code>
UI location	My Account > Transaction Record Origin Mapping
JSON file	<code>MyAccount.json</code>
Configuration file (pre-Vinson)	<code>SC.MyAccount.Configuration.js</code>

Cases Subtab

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you set the initial default case status values you need.

Status Start ID

This string lets you define the NetSuite status Commerce web stores use to indicate that a case has been started. Options include:

- 1 – Not Started
- 2 – In Progress
- 3 – Escalated
- 4 – Re-opened
- 5 – Closed

ID	cases.defaultValues.statusStart.id
UI location	My Account > Cases
JSON file	Case.json
Configuration file (pre-Vinson)	Configuration.js

Status Close ID

This string lets you define the NetSuite status your Commerce web store uses when a case is closed. Options include:

- 1 – Not Started
- 2 – In Progress
- 3 – Escalated
- 4 – Re-opened
- 5 – Closed

ID	cases.defaultValues.statusClose.id
UI location	My Account > Cases
JSON file	Case.json
Configuration file (pre-Vinson)	Configuration.js

Origin ID

This string lets you define the internal identifier for the case origin.

ID	cases.defaultValues.origin.id
UI location	My Account > Cases
JSON file	Case.json
Configuration file (pre-Vinson)	Configuration.js

Quotes Subtab

① **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you control how the Quotes feature works in your Commerce web store.

More Information: [Quotes for Commerce Websites](#)

Show Request A Quote Hyperlink

This property works with:

- SuiteCommerce Advanced – 2018.2 and later

■ SuiteCommerce

This boolean lets you choose if the Request a Quote link displays. By default, this is set to enabled.

ID	quote.showHyperlink
UI location	My Account > Quotes
JSON file	RequestQuoteAccessPoint.json

Hyperlink Text

This property works with:

- SuiteCommerce Advanced – 2018.2 and later
- SuiteCommerce

This string lets you set the text for the Request a Quote link. By default, it's set to "Request a Quote."

ID	quote.textHyperlink
UI location	My Account > Quotes
JSON file	RequestQuoteAccessPoint.json

Purchase Ready Status ID

This string lets you set the Customer Status that lets customers buy from a quote. This field must match the Internal ID of the Customer Status required for a customer to buy from the quote.

In NetSuite, the Estimate record's Status field lists all available Customer Statuses for the quote. When you the merchant changes this field to the Customer Status with an Internal ID that matches the **Purchase Ready Status ID**, all website links to Review or Purchasing pages are enabled. The customer can then make a purchase.

More Information: [Set the Customer Status Internal ID](#)

ID	quote.purchaseReadyStatusId
UI location	My Account > Quotes
ID (pre-Vinson)	purchase_ready_status_id
JSON file	Quote.json
Configuration file (pre-Vinson)	Configuration.js

Invoice Form ID

This string lets you set the Internal ID of the invoice form SCA uses to create a sales order with terms.

More Information: [Define an Invoice Form](#)

ID	quoteToSalesorderWizard.invoiceFormId
-----------	---------------------------------------

UI location	My Account > Quotes
ID (pre-Vinson)	invoice_form_id
JSON file	QuoteSalesorderWizard.json
Configuration file (pre-Vinson)	Configuration.js

Days Before Expiration Notification

This value lets you set how many days before a quote expires the expiration notification displays on your web site. By default, it's set to 7. All quotes use the same expiration notification configuration.

More Information: [Set Quote Expiration](#)

ID	quote.daysToExpirationNotification
UI location	My Account > Quotes
JSON file	Quote.json

Days to Expiration

This value lets you set how many days all quotes stay valid after they're first submitted. If you set this value to 0, the expiration is set by the **Default Quote Expiration (In Days)** field in the Sales Preferences record. See the help topic [Sales Force Automation Preferences](#). All quotes use the same expiration setting. After this time expires, the quote can't be turned into a purchase.

More Information: [Set Quote Expiration](#)

ID	quote.daysToExpire
UI location	My Account > Quotes
ID (pre-Vinson)	days_to_expire
JSON file	Quote.json
Configuration file (pre-Vinson)	Configuration.js

Disclaimer Summary

This string lets you set the sales representative disclaimer summary that appears under the Order Summary area of the Quote Details page. This message displays if no sales representative is assigned to the quote. What appears on your site depends on how you set up sales representative information in your account.

More Information: [Customize Sales Representative Information](#)

ID	quote.disclaimerSummary
UI location	My Account > Quotes
JSON file	Quote.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Disclaimer

This string lets you set the sales representative information disclaimer that appears at the bottom of the Quote Details page. This message displays if no sales representative is assigned to the quote. What appears on your site depends on how you set up sales representative information in your account.

More Information: [Customize Sales Representative Information](#)

ID	quote.disclaimer
UI location	My Account > Quotes
JSON file	Quote.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Default Phone Number for Sales Rep

This string lets you set the default sales representative phone number. This phone number displays on the Quote Details page if a sales associate is assigned to the quote but doesn't have a phone number set. What appears on your site depends on how you set up sales representative information in your account.

More Information: [Customize Sales Representative Information](#)

ID	quote.defaultPhone
UI location	My Account > Quotes
JSON file	Quote.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Default Email for Sales Rep

This string lets you set the default sales representative Email address. This email address displays on the Quote Details page if a sales associate is assigned to the quote but doesn't have an email set. What appears on your site depends on how you set up sales representative information in your account.

More Information: [Customize Sales Representative Information](#)

ID	quote.defaultEmail
UI location	My Account > Quotes
JSON file	Quote.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Request a Quote Bottom Message

This string lets you set the message that displays when a quote is requested. The default text is:

" Once your quote has been submitted, a sales representative will contact you in XX business days. For immediate assistance call us at (000)-XXX-XXXX or email us at xxxx@xxxx.com"

ID	quote.requestAQuoteWizardBottomMessage
UI location	My Account > Quotes
JSON file	Quote.json

Request a Quote Business Days

This string lets you set the sales representative contact message. The default text is:

"A sales representative will contact you in XX business days."

ID	quote.contactBusinessDaysMessage
UI location	My Account > Quotes
JSON file	Quote.json

List Header Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you control how lists of data and collections are displayed. The ListHeader module uses these settings.

Filter Range Quantity Days

This integer lets you set how many days are included in the date range when displaying data.

ID	listHeader.filterRangeQuantityDays
UI location	My Account > List Header
JSON file	ListHeader.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js

Addresses Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you control how addresses work on My Account pages.

See the help topic [Working with Addresses on Transactions](#) for more information about managing addresses.

Require a Phone Number With Addresses

This boolean lets you decide if customers must include a phone number when saving an address to their account. If you check this property, customers must add a phone number when entering an address. If you leave it unchecked, customers don't need to add a phone number. By default, this property is unchecked.

ID	addresses.isPhoneMandatory
UI location	My Account > Addresses
JSON file	Address.json

Advanced Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on the Advanced tab let you set up advanced options for your Commerce web store. This tab includes overall advanced properties and the following subtabs:

- [Cache Subtab](#)
- [Security Subtab](#)
- [Extensions Subtab](#)
- [Invoice Subtab](#)
- [Email Verification Subtab](#)
- [Blocklist Email Domains Subtab](#)
- [Pagination Subtab](#)
- [Search Results Subtab](#)
- [Backend Subtab](#)
- [Filter Site Subtab](#)
- [Favicon Path Subtab](#)
- [Item Options Subtab](#)
- [Custom Fields Subtab](#)
- [Image Resize Subtab](#)

Cache Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you control caching in your Commerce web store.

Content Page CDN

This string lets you set how long content pages are cached by the CDN. You can choose Short, Medium, or Long.

More Information: [CDN Caching](#)

ID	cache.contentPageCdn
UI location	Advanced > Cache
JSON file	ShoppingApplication.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Content Page TTL

This integer lets you set how long the application Time To Live (TTL) lasts for content pages. Enter this value in seconds. The total value must be between 300 (5 minutes) and 7200 (2 hours).

ID	cache.contentPageTtl
UI location	Advanced > Cache
JSON file	ShoppingApplication.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Site Cache Setting (Pre-Mont Blanc Only)

Specifies the duration of the site settings cache. This caches all properties (except touch points) with the application cache. By default, this is set to 7200. Enter this value in seconds—between 300 (5 minutes) and 7200 (2 hours).

Note: This property isn't available in the Mont Blanc release of SuiteCommerce Advanced and later, or in SuiteCommerce. If you use a SCA version before Mont Blanc, edit the **siteSettings** property in the backend Configuration.js file to set your site cache. For detailed information, see the help topic [Develop Your SCA Customization](#).

ID	cache.siteSettings
UI location	none
Configuration file (pre-Vinson)	Configuration.js

Security Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you configure security headers to control which domains can show your site's pages in a frame.

Allow Site to Be Framed

This setting lets you add HTTP headers that determine whether your web pages can be embedded in an HTML iframe.

Note: Rendering a web store in an iframe is not a best practice approach due to modern third-party-cookie restrictions. The **Allow Site to be Framed** setting doesn't change how browsers treat cookies or how NetSuite sets session cookies, so login, cart, and checkout may fail when a web store is framed.

Possible values for this setting include:

- **Disallow Framing** – Pages can be framed only by the exact same domain/origin. This is the default setting.

- **Allow Framing** – Pages can be framed by any domain/origin.
- **Allow Framing Custom** – Enter each permitted domain/origin in the **Allow Site to Be Framed By** list. Only the domains/origins in this list can frame your web pages.



Important: **Allow Framing** and **Allow Framing Custom** enable page rendering only. Session-dependent features, such as login, cart, and checkout, aren't available when the iframe's parent domain differs from your SuiteCommerce domain.

ID	security.allowFraming
UI location	Advanced > Security
JSON file	SecurityHeaders.json

Allow Site to Be Framed By

This array lets you choose which origins you want to allow to show pages in a frame. By default, SAMEORIGIN is included so pages can be displayed in a frame by your own domain.

ID	security.allowFramingBy
UI location	Advanced > Security
JSON file	SecurityHeaders.json

Add Headers to SSP Responses

This array lets you set security headers to send extra information with an HTTPS response. The array contains the following properties:

- **Name** (string) – The name of the HTTPS header (not case sensitive).
- **Value** (string) – The value of the HTTPS header.

ID	security.headers
UI location	Advanced > Security
JSON file	SecurityHeaders.json

See the SuiteCloud Platform help topic, [HTTPS Header Information](#), for more information.

Extensions Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on this subtab let you set up properties for the extensions you use on your site.

Extensibility Layer Safe Mode

This property works with:

- SuiteCommerce Advanced 2020.2.1 and later
- SuiteCommerce

This boolean is enabled by default for SuiteCommerce sites. For SuiteCommerce Advanced (SCA) sites, this boolean is disabled by default.

Enable this setting so that you know which extensions aren't developed through the Extensibility API layer and can take action to update them. Future releases of SuiteCommerce and SCA won't support extensions that don't use the Extensibility API layer.



Important: If this option is disabled, unsafe extensions can run, but they may not work as expected in the future. If you let unsafe extensions run on your SuiteCommerce site, a future update could break them. If you let unsafe extensions run on your SCA site, they won't work as expected when you upgrade SCA.

When you enable this setting, you'll see notifications in your browser console if extensions that customize or import private core modules are loaded into your site. These extensions should instead be implemented using the [Overview](#). The following types of notifications are displayed:

- An error is displayed when an extension customizes or imports a core module that's not allowed.
If there's an error, the extension isn't loaded and its features won't be available, but your site will still work.
- A warning is displayed when an extension customizes or imports a core module that's allowed for now, but won't be allowed in the future.
If you get a warning, the extension still loads and works, but be sure to update it to use the Extensibility API layer as soon as possible so it keeps working. All extensions that initially generate warnings will eventually generate errors.

ID	isSafeMode
UI location	Advanced > Extensions
JSON file	ExtensibilityLayerPatch.json

Invoice Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you set up your invoice options.

Invoice Terms and Conditions

This string lets you enter your invoice terms and conditions in HTML format.

ID	checkoutApp.invoiceTermsAndConditions
UI location	Advanced > Invoice
JSON file	Invoice.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Maximum Number of Invoices That Can Be Paid

This number lets you define the maximum number of invoices a customer can pay at the same time in the My Account area of your Commerce site. By default, the maximum is 20 invoices. If you change this, enter a value of less than 1000.

ID	checkoutApp.invoiceMaxCountPayment
UI location	Advanced > Invoice
JSON file	Invoice.json

Email Verification Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

SuiteCommerce Email Verification works with SuiteCommerce MyAccount, SuiteCommerce and SuiteCommerce Advanced 2025.2 and later. See the help topic [SuiteCommerce Email Verification](#) for more information about this feature.

These settings let you control how email verification works in your Commerce web store.

Enable Email Verification

This boolean setting lets you enable the SuiteCommerce Email Verification feature for your web store. When enabled, customers must verify their email address before finishing registration or guest checkout.

ID	emailVerification.enabled
UI location	Advanced > Email Verification
JSON file	EmailVerification.json

Sender Employee

This string lets you select the employee who will appear as the sender of the verification email. Choose from a dropdown list of employee names.

ID	emailVerification.senderId
UI location	Advanced > Email Verification
JSON file	EmailVerification.json

Email Template

This string lets you select the email template to use for sending verification codes. See the help topic [Working with Email Templates](#) for information about email templates.

ID	emailVerification.templateId
-----------	------------------------------

UI location	Advanced > Email Verification
JSON file	EmailVerification.json

Verification Code TTL (In Seconds)

This integer property lets you set how long (in seconds) a verification code remains valid after it's sent. After this period, the code expires and the customer must request a new one. The default value is 300 seconds.

ID	emailVerification.codeTTL
UI location	Advanced > Email Verification
JSON file	EmailVerification.json

Code Request Interval Code TTL (In Seconds)

This integer property lets you set the minimum wait time (in seconds) before a customer can ask for a new code. This helps prevent abuse by limiting how often codes are resent. The default value is 300 seconds.

ID	emailVerification.codeRequestInterval
UI location	Advanced > Email Verification
JSON file	EmailVerification.json

Blocklist Email Domains Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

SuiteCommerce Email Domains Blocklist works with SuiteCommerce MyAccount, SuiteCommerce and SuiteCommerce Advanced 2025.2 and later. See the help topic [SuiteCommerce Email Domains Blocklist](#) for more information about this feature.

These settings let you control how SuiteCommerce Email Domains Blocklist works in your Commerce web store.

Enable Email Domains Blocklist

This boolean setting lets you enable the SuiteCommerce Email Domains Blocklist feature for your web store. When enabled, email addresses your customers enter in forms on your web store are checked to verify that the email domain isn't on a blocklist. This setting is disabled by default.

ID	blockListEmailDomains.enableEmailBlockList
UI location	Advanced > Blocklist Email Domains
JSON file	BlockListEmail.Domains.Options.json

Blocklisted Email Domains

This array lets you add email domains to your custom list of blocked domains.

ID	blockListEmailDomains.domainList
UI location	Advanced > Blocklist Email Domains
JSON file	BlockListEmail.Domains.Options.json

Pagination Subtab

① **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings control how pagination works when multiple pages are returned. If enabled, the Page List shows links so customers can browse through pages.

Desktop > Show Page List

This boolean shows or hides the Page List on desktop browsers.

ID	defaultPaginationSettings.showPageList
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Desktop > Pages To Show

This number lets you define the maximum number of pages shown in the page list on desktop browsers. The default value is 9.

ID	defaultPaginationSettings.pagesToShow
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Desktop > Show Page Indicator

This boolean shows or hides the current page indicator in the page list on desktop browsers.

ID	defaultPaginationSettings.showPageIndicator
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Phone > Show Page List

This boolean shows or hides the Page List on mobile browsers.

ID	defaultPaginationSettingsPhone.showPageList
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Phone > Pages To Show

This number sets the maximum number of pages shown in the page list on mobile browsers. The default value is 9.

ID	defaultPaginationSettingsPhone.pagesToShow
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Phone > Show Page Indicator

This boolean shows or hides a current page indicator in the page list on mobile browsers.

ID	defaultPaginationSettingsPhone.showPageIndicator
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Tablet > Show Page List

This boolean shows or hides the Page List on tablet browsers.

ID	defaultPaginationSettingsTablet.showPageList
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Tablet > Pages To Show

This number sets the maximum number of pages shown in the page list on tablet browsers. The default value is 4.

ID	defaultPaginationSettingsTablet.pagesToShow
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Tablet > Show Page Indicator

This boolean shows or hides a current page indicator in the page list on tablet browsers.

ID	defaultPaginationSettingsTablet.showPageIndicator
UI location	Advanced > Pagination
JSON file	Pagination.json
Configuration file (pre-Vinson)	SC.MyAccount.Configuration.js, SC.Shopping.Configuration.js

Search Results Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings configure options to be passed when querying the Search API.

Search API Fieldsets

This array contains the following properties:

- **ID** (string) – sets the resource's search type. Options include:
 - Facets
 - itemDetails
 - relatedItems
 - correlatedItems
 - merchandizingZone
 - typeAhead
 - itemsSearcher
 - CmsAdapterSearch
- **Fieldset** (string) – sets the fieldset parameter value.
- **Include** (string) – sets the include parameter value.

More Information: [Define Field Sets](#)

IDs	searchApiMasterOptions searchApiMasterOptions.id searchApiMasterOptions.fieldset searchApiMasterOptions.include
------------	--

UI location (Vinson)	Advanced > Search Results
JSON file	ItemsSearchAPI.json
Configuration file (pre-Vinson)	SC.Configuration.js

Backend Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings configure SuiteScript properties. You can configure a variety of objects server-side. Changing these objects can help your website run faster by limiting search results.

nlapiSearchRecord Results Per Page

This integer sets how many search results display on each page by default.

ID	suitescriptResultsPerPage
UI location	Advanced > Backend
JSON file	SuiteScript.json
Configuration file (pre-Vinson)	Configuration.js

Items Fields Advanced Name

This string sets the **Field Set** the Item Search API uses to return item details. By default, it's set to **order**. If you use a different Field Set name, you need to define it here.

Using a different Field Set name for each application can help your site run better. Each application only receives the details it needs for its specific pages. For example, on the Shopping item details page, you may want to display different fields than on the My Account pages. In this case, you can set up two Field Sets: **details** to be used in ShopFlow and **myDetails** to be used in the My Account pages.

More Information: [Prepare the Web Site Setup Record](#)

ID	fieldKeys.itemsFieldsAdvancedName
UI location	Advanced > Backend
JSON file	SuiteScript.json
Configuration file (pre-Vinson)	Configuration.js

Shopping's Order

This array lists the keys of the Shopping application's order record. For example: shipaddress, summary, promocodes etc. To maximize performance, only include the fields you need.

ID	orderShoppingFieldKeys.keys
-----------	-----------------------------

UI location	Advanced > Backend
ID (pre-Vinson)	order_shopping_field_keys
Configuration file (pre-Vinson)	Configuration.js

Shopping's Order Items

This array lists the item fields the Commerce API returns in the Shopping application.

ID	orderShoppingFieldKeys.items
UI location	Advanced > Backend
ID (pre-Vinson)	order_shopping_field_keys.items
Configuration file (pre-Vinson)	Configuration.js

Checkout's Order

This array lists the keys of the Checkout application's order record. For example: shipaddress, summary, promocodes etc.

ID	orderCheckoutFieldKeys.keys
UI location	Advanced > Backend
ID (pre-Vinson)	order_checkout_field_keys
Configuration file (pre-Vinson)	Configuration.js

Checkout's Order Items

This array lists the item fields the Commerce API returns in the Checkout application.

ID	orderCheckoutFieldKeys.items
UI location	Advanced > Backend
ID (pre-Vinson)	order_checkout_field_keys.items
Configuration file (pre-Vinson)	Configuration.js

Item Fields Standard

This array lists the fields the Commerce API will return. To optimize performance, only include the fields your website needs. You can also use this object to make sure your account's custom item fields are included in the Item Search API results. Add the custom field name to the list.

ID	fieldKeys.itemsFieldsStandardKeys
UI location	Advanced > Backend

Configuration file (pre-Vinson)	Configuration.js
--	------------------

Filter Site Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you filter orders or records by website, so you can control what items shoppers can view.

Filter Site Option

This string sets how orders/records are filtered. The default value is **current**. Possible values are:

- **all** – Filters orders/records from all websites in your NetSuite account.
Shoppers can see orders from all web stores in your NetSuite account when they check their Purchase History in My Account.
- **current** – Filters orders/records for the current web store domain.
Shoppers can only see orders from the current web store in their Purchase History.
- **siteIds** – Filters orders/records for a website specified by its site ID. Enter the site IDs in the **Filter Site IDs** field to return results for items ordered from other websites.
Shoppers can see orders from the websites you specify when they check their Purchase History.

For example, if an order was placed on another website, the shopper may still want to view it, so you should select **all** or **siteIds** as the filter site option.

ID	filterSite.option
UI location	Advanced > Filter Site
ID (pre-Vinson)	filter_site
JSON file	FilterSite.json
Configuration file (pre-Vinson)	Configuration.js

Filter Site IDs

This array filters records for web sites you select by site ID (see [Filter Site Option](#)). It holds a list of numeric IDs, separated by commas.

To find a site ID, edit a website record in the web address bar and copy the ID value, for example: id=3. Enter the value 3 in the **Filter Site IDs** field.

ID	filterSite.ids
UI location	Advanced > Filter Site
ID (pre-Vinson)	None
JSON file	FilterSite.json
Configuration file (pre-Vinson)	Configuration.js

Favicon Path Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Favicon of the Website

This string sets the path to your website's favicon. By default, this property is blank. You should use a relative URL path.

ID	faviconPath
UI location	Advanced > Favicon Path
JSON file	Favicon.json

Item Options Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The Item Options subtab consists of properties that control how item options and custom transaction line fields appear in your web store.

Show Only the Fields Listed In: Item Options and Custom Transaction Line Fields

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This boolean controls which item options and transaction line fields display in your web store. If you leave it unchecked (which is the default), all custom transaction line fields and item options display on your site. If you check it, only the fields listed in the **Item Options and Custom Transaction Line Fields** table on this subtab will appear.

More Information: [Commerce Custom Fields](#)

ID	ItemOptions.showOnlyTheListedOptions
UI location	Shopping Catalog > Item Options
JSON file	Item.Options.json

Item Options and Custom Transaction Line Fields

 **Note:** This set of properties is called **Item Options** in the Vinson release of SuiteCommerce Advanced.

This section explains how some custom fields show up in your web store. For SuiteCommerce and the Elbrus release of SuiteCommerce Advanced (SCA) and later, these properties include Item Options and

Custom Transaction Line fields. For the SCA Vinson release and earlier, they only apply to Item Options. Each field listed in this table can contain the following properties:

- **Item Options ID** (string) – the internal ID of the Custom Item Field being displayed. If you set it, this matches the **ID** field of the corresponding Custom Item Field record in NetSuite. This property is only valid for the Vinson release of SCA and earlier and isn't required.
- **Cart Option ID** (string) – the internal ID of the Item Option you want to display. This matches the **ID** field of the Item Option record you want to display on your site. This property is required and used as the primary key.
- **Color Palette** (string) – links a color label to its hexadecimal value. Item options and faceted navigation use this object.
- **Label** (string) – sets the text of the item option displayed in the user interface.
- **URL Parameter Name** (string) – sets the key of the option that appears in the URL. This property works with the Elbrus release and later.
- **Use Labels on URL** (boolean) – controls how the item option appears in the URL. If set to false (default), the URL displays the option's Internal ID (for example, `http://mysite.com/product/485?&color=1`. If set to true, the URL contains the option's internal ID label. For example, `http://mysite.com/product/485?&color=blue`. This property works with the SCA Elbrus release and later.
- **Sort Index** (integer) – sets where the option appears on the PDP. The lower the number, the sooner it displays in the custom field. If the **Sort Index** field is empty, its value is 0. This property works with the SCA Elbrus release and later.
- **Selector Template** (string) – the template that displays the item option or transaction column field in the PDP and the Cart. This template provides the user with a means to select an option (for example, Item Color = Blue).

The associated field uses this template instead of the default selector template (as defined in the **Default Selector Templates by Item Option Type** property defined elsewhere on this subtab).

- **Show Option in Item Lists** (boolean) – controls if the item option appears in the faceted search results page. This property works with the SCA Elbrus release and later.
- **Facet Cell Template** (string) – sets the template used to display the item on the faceted search results page.

The associated field uses this template instead of the default facet cell template (as defined in the **Default Facet Cell Templates by Item Option Type** property defined elsewhere on this subtab). This property works with the SCA Elbrus release and later.

- **Selected Template** (string) – sets the template used to display the item option or transaction column field in Checkout and My Account.

The associated field uses this template instead of the default selected template (as defined in the **Default Selected Templates by Item Option Type** property defined elsewhere on this subtab).

More Information: [Commerce Custom Fields](#)

IDs	ItemOptions.optionsConfiguration ItemOptions.optionsConfiguration.cartOptionId ItemOptions.optionsConfiguration.colors ItemOptions.optionsConfiguration.label ItemOptions.optionsConfiguration.urlParameterName ItemOptions.optionsConfiguration.useLabelsOnUrl ItemOptions.optionsConfiguration.index ItemOptions.optionsConfiguration.templateSelector ItemOptions.optionsConfiguration.showSelectorInList ItemOptions.optionsConfiguration.templateFacetCell ItemOptions.optionsConfiguration.templateSelected
------------	---

IDs (Pre-Elbrus)	 Note: In the Vinson release of SCA, these properties are located on the Shopping tab and Item Options subtab. itemOptions itemOptions.itemOptionId itemOptions.cartOptionId itemOptions.colors itemOptions.label itemOptions.url itemOptions.templateSelected
UI location	Shopping Catalog > Item Options
JSON file	Item.Options.json
Configuration file (pre-Vinson)	SC.Configuration.js

Custom Fields Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Sales Order

This setting lets you choose which custom transaction body fields (by Field ID) are displayed in your web store.

More Information: [Commerce Custom Fields](#)

ID	customFields.salesorder
UI location	Advanced > Custom Fields

Image Resize Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings match image-resize values to the names you use in the application (Setup > Website > Advanced > Image Resizing). The current sizes used in Commerce web stores are:

- thumbnail: 175 x 175 (used in the search results)
- main: 600 x 600 (used as main image in the PDP)
- tinythumb: 50 x 50 (used as the tiny thumbs in the PDP's image gallery)
- zoom: 1200 x 1200 (used in the PDP's zoomed image)
- fullscreen: 1600 x 1600
- homeslider: 200 x 200
- homecell: 125 x 125

Each Image Resize property contains the following properties:

- **Size** (string) – the image size name used in the application.
- **Value** (string) – the corresponding value given in the website record (Image Size ID).

More Information: [Image Resizing and Compression](#)

IDs	imageSizeMapping imageSizeMapping.id imageSizeMapping.value
UI location	Advanced> Image Resize
JSON file	ApplicationSkeleton.Layout.Images.json
Configuration file (pre-Vinson)	SC.Configuration.js

Shopping Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced

The settings on this tab let you set up properties for the Shopping application and include the following subtabs:

- [Quick Order Subtab](#)
- [Reviews Subtab](#)
- [Wishlist Subtab](#)
- [Item Options Templates Subtab](#)
- [Newsletter Subtab](#)

Quick Order Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you set up Quick Orders.

More Information: [Quick Order](#)

This feature and its settings require:

- SuiteCommerce Advanced – 18.2 or later
- SuiteCommerce

Show Quick Order Hyperlink

This boolean controls whether the Quick Order link displays. Enable it to display the Quick Order link. By default, it's enabled.

ID	quickOrder.showHyperlink
UI location	Shopping > Quick Order
JSON file	QuickOrder.json

Hyperlink Text

This string lets you choose the text for the Quick Order link. By default, the text is "Quick Order."

ID	quickOrder.textHyperlink
UI location	Shopping > Quick Order
JSON file	QuickOrder.json

Reviews Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

These settings let you manage product reviews.

More Information: [SuiteCommerce Product Reviews](#)

Enable Product Reviews

This boolean controls whether customers can view and write product reviews on your site.

The **Enable Product Reviews** setting works with SuiteCommerce and SuiteCommerce Advanced versions 2024.2 and later. For SuiteCommerce Advanced versions 2024.1 and earlier, install the Reference Product Review Records SuiteApp. See the help topic [Product Reviews for SuiteCommerce Advanced 2024.1 and Earlier](#).

This setting is enabled by default. Clear the **Enable Product Reviews** box if you don't want customers to view or write reviews.

ID	productReviews.enableProductReviews
UI location	Shopping > Reviews
JSON file	ProductReviews.json

Max Flag Count

This number lets you choose how many flags a review needs before it's marked as flagged by users.

ID	productReviews.maxFlagsCount
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Login Required

This boolean controls whether customers need to be logged in to write a review.

ID	productReviews.loginRequired
UI location	Shopping > Reviews

JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Flagged Status

This integer lets you define the number of times a review has been flagged. If the value of the productReviews.maxFlagsCount property is reached, then this property is set to that value.

ID	productReviews.flaggedStatus
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Approved Status

This number displays how many times users have approved a review.

ID	productReviews.approvedStatus
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pending Approval Status

This number displays how many pending approvals the review has.

ID	productReviews.pendingApprovalStatus
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Results per Page

This integer lets you define how many product reviews display on each page.

ID	productReviews.resultsPerPage
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Max Rate

This number sets the highest rating an item can receive.

ID	productReviews.maxRate
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Compute Overall

If you check this boolean, the application will calculate and show the product's overall rating.

ID	productReviews.computeOverall
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Filter Options

This array lets you control how product reviews are filtered and displayed. Each filter option defines the following properties:

- **ID** (string) – the internal identifier for the filter option.
- **Name** (string) – the label for the filter option in the user interface.
- **Params** (string) – defines a JSON object that declares the filter option's URL parameters.
- **Is Default** (boolean) – sets the default filter option in the drop-down list.

IDs	productReviews.filterOptions productReviews.filterOptions.id productReviews.filterOptions.name productReviews.filterOptions.params productReviews.filterOptions.isDefault
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Sort Options

This array lets you control how product reviews are sorted. Each sort option defines the following properties:

- **ID** (string) – the internal ID for the sort option.
- **Name** (string) – the label for the sort option in the user interface.

- **Params** (string) – defines a JSON object that declares the sort option's URL parameters.
- **Is Default** (boolean) – sets the default sort option in the drop-down list.

IDs	productReviews.sortOptions productReviews.sortOptions.id productReviews.sortOptions.name productReviews.sortOptions.params productReviews.sortOptions.isDefault
UI location	Shopping > Reviews
JSON file	ProductReviews.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Wishlist Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

The Product Lists (Wishlists) feature lets customers create and manage shopping lists on your site. The settings on the **Wishlist** subtab let you set up options for product lists.

For information about product lists, see the help topic [Product Lists](#).

Enable Modifications by Customers

This boolean controls whether users can make their own lists.

- By default this boolean is enabled, so customers can create, edit, and delete their own lists on product list pages or when adding an item.
- After this boolean is disabled, customers can't create their own lists. They'll only see your store's predefined lists, including the default My List.

ID	productList.additionEnabled
UI location	Shopping > Wishlist
JSON file	ProductList.json
Configuration file (pre-Vinson)	SC.Configuration.MyAccount.js

 **Note:** Logged-in customers and their contacts can view both predefined and custom lists.

Login Required

This boolean controls whether users need to be logged in to edit a product list.

ID	productList.loginRequired
UI location	Shopping > Wishlist
JSON file	ProductList.json

Configuration file (pre-Vinson)	SC.Configuration.MyAccount.js
--	-------------------------------

List Templates

This array lets you set up predefined lists (templates) that are automatically available to your customers. Customers can't edit or delete these lists. By default, all customers receive a predefined list called My List. When a customer adds an item to the list, the system creates the required records.

Each product list contains the following properties:

- **Template ID** (string) – the internal ID for this template. Make sure it's unique.
- **Name** (string) – the list name as it appears to customers.
- **Description** (string) – the list description in the user interface.
- **Scope ID** (number) – the internal scope ID.
- **Scope Name** (string) – indicates whether the list is public or private. Currently, only private lists are supported, and each list is set to private by default.
- **Type ID** (string) – the internal type ID.
- **Type Name** (string) – sets the list as default, predefined, later, or quote. All lists added by a customer are automatically set to default. Predefined lists are available to all customers. Lists set to Save for later let customers add items to a list for a later purchase. Lists set to Quote let customers request a quote for a list of items.

For more information about save for later and quote types, see the help topics [Save for Later](#) and [Quotes for Commerce Websites](#).

IDs	productList.listTemplates productList.listTemplates.templateId productList.listTemplates.name productList.listTemplates.description productList.listTemplates.scopeId productList.listTemplates.scopeName productList.listTemplates.typeId productList.listTemplates.typeName
UI location	Shopping > Wishlist
ID (pre-Vinson)	product_lists_templates
JSON file	ProductList.json
Configuration file (pre-Vinson)	SC.Configuration.MyAccount.js

Display Modalities for Product List Items

This array lets you choose how product list items display on the My Account page. You can display items in different formats, like a condensed list without images or a list with images. By default, both condensed and list views are included. Each display modality contains the following properties:

- **ID** (string) – the display modality ID.
- **Name** (string) – the description of the modality.
- **Columns** (number) – the number of columns in the product list.
- **Icon** (string) – the item icon.

- **Is Default** (boolean) – sets the default modality.

IDs	productList.templates productList.templates.id productList.templates.name productList.templates.columns productList.templates.isDefault
UI location	Shopping > Wishlist
ID (pre-Vinson)	product_lists_templates
JSON file	ProductList.json
Configuration file (pre-Vinson)	SC.Configuration.MyAccount.js

Item Options Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

This subtab moved to the **Shopping Catalog** tab in the **Elbrus** release of SuiteCommerce Advanced. See [Item Options Subtab](#) for more information about the properties related to Item Options.

Newsletter Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

This subtab moved to the **Legacy** tab in the **2018.2** release of SuiteCommerce Advanced. See [Newsletter Subtab](#) for more information about the properties related to Newsletter.

Checkout Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on the Checkout tab let you set up properties related to the Checkout application on your Commerce website. This tab includes general checkout settings and the following subtabs:

- [Pick Up In Store Subtab](#)
- [Checkout Experience Subtab](#)
- [Forms Subtab](#)
- [Quantity Stock Message Subtab](#)

Enable Multiple Shipping

The **Enable Multiple Shipping** setting works with SuiteCommerce MyAccount, SuiteCommerce, and SuiteCommerce Advanced.

This boolean lets you control if shoppers can send items from the same order to multiple shipping addresses. For more information, see the help topic [Multiple Ship To](#).

ID	isMultiShippingEnabled
UI location	Checkout
JSON file	CheckoutApplication.json
Configuration file (pre-Vinson)	Configuration.js

Checkout Steps

The **Checkout Steps** setting works with SuiteCommerce MyAccount, SuiteCommerce, and SuiteCommerce Advanced.

This string lets you select one of three checkout flow configurations from the dropdown list. Each checkout flow guides the shopper through the same steps but in a different order.

For more information, see the help topic [Checkout Flows](#).

ID	checkoutApp.checkoutSteps
UI location	Checkout
JSON file	CheckoutApplication.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Pick Up In Store Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you control the behavior for the Store Pickup feature. For more information, [Store Pickup for SuiteCommerce Websites](#).

Enable Pickup in Store

The **Enable Pickup In Store** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Elbrus release of SuiteCommerce Advanced and later.

This boolean lets you enable the Store Pickup for Commerce Websites feature.

ID	isPickupInStoreEnabled
UI location	Checkout > Pick Up in Store
JSON file	PickupInStore.json

Pickup In Store Sales Order Custom Form ID

The **Pickup In Store Sales Order Customer Form ID** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Elbrus release of SuiteCommerce Advanced and later.

This string lets you set the ID for the sales order form customized for the Store Pickup for Commerce Websites feature.

ID	pickupInStoreSalesOrderCustomFormId
UI location	Checkout > Pick Up in Store
JSON file	PickupInStore.json

Checkout Experience Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

These settings let you set up the checkout experience for shoppers on SuiteCommerce and SuiteCommerce Advanced websites.

Skip Checkout Login

The **Skip Checkout Login** setting works with SuiteCommerce and SuiteCommerce Advanced.

This boolean lets anonymous shoppers skip the login or register page at checkout and go directly to the first checkout step. This setting is disabled by default.

After this setting is enabled, the Checkout application doesn't create a guest session until data is sent to the backend for validation (like through an Ajax call). If a shopper enters their name, a session isn't created until the order is submitted. Some session information, like payment permissions, isn't known until it's validated in the backend.

After the guest session is created, the Checkout application refers to the shopper as a **Guest**. If they want to log in as a registered user later, they need to log out first and then log in or create an account. After checkout, guests can also create an account.



Important: Invoices can't be set as a payment option if the **Skip Checkout Login** setting is enabled and your web store uses the One Page Checkout flow. The **Skip Checkout Login** setting isn't supported on Site Builder sites or when the **Multiple Ship To** setting is enabled.

For more information, see the help topic [Checkout](#).

ID	checkoutApp.SkipLogin
ID (pre-Vinson)	checkout_skip_login
UI location	Checkout > Checkout Experience
JSON file	CheckoutApplication.json
Configuration file (pre-Vinson)	Configuration.js

Use Standard Header and Footer

The **Use Standard Header and Footer** setting works with SuiteCommerce and the Aconcagua release of SuiteCommerce Advanced and later.

There are two types of headers and footers:

- **Standard:** Used on non-checkout pages, with navigation and links.

- **Checkout:** Used on checkout pages, without navigation or links, to help stop shoppers from leaving before finishing a purchase.

If you check the **Use Standard Header and Footer** box, checkout pages will show the standard header and footer. By default, this box is disabled, so checkout pages use the checkout header and footer instead.

ID	useStandardHeaderFooter
UI location	Checkout > Checkout Experience
JSON file	CheckoutApplication.json

Forms Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings work with SuiteCommerce MyAccount, SuiteCommerce, and the Vinson release of SuiteCommerce Advanced and later.

These settings control the behavior of checkout forms.

Auto Populate Name and Email

The **Auto Populate Name and Email** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Vinson release of SuiteCommerce Advanced and later.

This boolean lets you enable or disable the auto-population of a guest shopper's name and email in any forms used during checkout. If this box is cleared, the fields won't populate automatically. If this box is checked, the **Login as Guest, Show Name** and **Login as Guest, Show Email** options must be enabled to populate automatically.

ID	autoPopulateNameAndEmail
UI location	Checkout > Forms
JSON file	CheckoutApplication.json

Login as Guest, Show Name

The **Login as Guest, Show Name** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Vinson release of SuiteCommerce Advanced and later.

This boolean lets you choose whether to show the first and last name fields when a user registers as a guest. If enabled, and the **Auto Populate Name and Email** property is also enabled, first and last name information will be required and automatically populate during checkout process where needed. If disabled, the fields won't populate automatically.

ID	forms.loginAsGuest.showName
UI location	Checkout > Forms
JSON file	CheckoutApplication.json

Login as Guest, Show Email

The **Login as Guest, Show Email** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Vinson release of SuiteCommerce Advanced and later.

This boolean lets you choose whether to show the email address field when a user registers as a guest. If enabled, and the **Auto Populate Name and Email** property is also enabled, the email address will be required and automatically populate during checkout where needed. If disabled, the fields won't populate automatically.

ID	forms.loginAsGuest.showEmail
UI location	Checkout > Forms
JSON file	CheckoutApplication.json

Show Address Line 2

The **Show Address Line 2** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Vinson release of SuiteCommerce Advanced and later.

This boolean displays lets you choose whether to show a second address line during checkout.

ID	forms.address.showAddressLineTwo
UI location	Checkout > Forms
JSON file	CheckoutApplication.json

Quantity Stock Message Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The property on this subtab lets you control how the out-of-stock error message works.

Show Quantity Available on the Out-of-Stock Error Message

The **Show Quantity Available on the Out-of-Stock Error Message** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the 2023.2.4 release of SuiteCommerce Advanced and later.

An out-of-stock error message displays on the review page of your Commerce website's checkout flow if your customer orders a larger quantity of an item than you have in stock.

This boolean lets you choose whether to show the number of items in stock on the out-of-stock error message. Check the **Show Quantity Available on the Out-of-Stock Error Message** box to display how many items are in stock on the error message. By default, this property isn't checked.

ID	checkoutApp.showItemRemainingQuantity
UI location	Checkout > Quantity Stock Message
JSON file	CheckoutApplication.json

For more information, see the help topic [Out-of-Stock Messaging During Checkout](#).

Payment Instruments & Methods Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on the Payment Instruments and Methods tab let you set up how payment instruments and methods work in your Commerce web store. This tab includes general properties and the following subtabs:

- [Payment Methods Subtab](#)
- [Payment Instrument ACH Subtab](#)
- [Credit Card Subtab](#)

Remove PayPal Addresses

The **Remove PayPal Addresses** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the Elbrus release of SuiteCommerce Advanced and later.

This boolean lets you choose whether shoppers can remove their PayPal addresses from NetSuite after placing an order, since PayPal addresses aren't valid in NetSuite.

ID	removePaypalAddress
UI location	Payment Instruments & Methods
JSON file	CheckoutApplication.json

For SuiteCommerce Advanced, Vinson releases and earlier, see the help topic [PayPal Address not Retained in Customer Record](#).

PayPal Logo URL

The **PayPal Logo URL** setting works with SuiteCommerce MyAccount, SuiteCommerce, and SuiteCommerce Advanced.

This string lets you define the PayPal logo's URL. Your Commerce web store displays this logo during checkout.

ID	checkoutApp.paypalLogo
ID (pre-Vinson)	paypal_logo
UI location	Payment Instruments & Methods
JSON file	CheckoutApplication.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Enable 3D Secure Payments

The **Enable 3D Secure Payments** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the 2020.1 release of SuiteCommerce Advanced and later.

This boolean value lets you choose whether shoppers can make native 3D Secure 2 payments with the following flows on your Commerce website:

- Make a payment
- Quotes
- Reorder items
- Checkout

For more information, see the help topic [3D Secure Payment Authentication for Commerce Web Stores](#).

ID	isThreeDSecureEnabled
UI location	Payment Instruments & Methods
JSON file	CheckoutApplication.json

Payment Methods Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The **Payment Methods** array works with SuiteCommerce MyAccount, SuiteCommerce, and SuiteCommerce Advanced.

This array lets you define the Payment Method record in NetSuite using the Payment Method ID. Enter the following information:

- **Key** (string) – This number must match the property key from the JavaScript call (run in the Browser Console): `SC.ENVIRONMENT.siteSettings.paymentmethods`. Enter the key value returned to set up each method. To edit or add new payment methods in NetSuite, go to Setup > Accounting > Accounting Lists, then filter by **Payment Method**.
- **Regex** (string) – The regular expression that matches the payment method.
- **Description** (string) – A text description of the payment method.

For more information, see the help topic [Creating a Payment Method](#).

IDs	paymentmethods paymentmethods.key paymentmethods.regex paymentmethods.description
UI location	Payment Instruments & Methods > Payment Methods
JSON file	PaymentMethods.json
Configuration file (pre-Vinson)	SC.Configuration.js

Payment Instrument ACH Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The **Payment Instrument ACH** settings let you set up ACH payments on your site.

For more information, see the help topic [ACH Payments on Commerce Web Stores](#).

Enable ACH Payments from Companies Using Checkout

The **Enable ACH Payments from Companies Using Checkout** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the 2023.1 release of SuiteCommerce Advanced and later.

This boolean lets you choose whether companies can make ACH payments during checkout on your site.

IDs	checkoutApp.isAchEnabledInCheckout
UI location	Payment Instruments & Methods > Payment Methods
JSON file	CheckoutApplication.json

Enable ACH Payments from Individuals Using Checkout

The **Enable ACH Payments from Individuals Using Checkout** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the 2023.1 release of SuiteCommerce Advanced and later.

This boolean value lets you choose whether individual customers can make ACH payments during checkout on your site. Companies can also make ACH payments if you enable this option.

IDs	checkoutApp.isAchEnabledForAllCustomers
UI location	Payment Instruments & Methods > Payment Methods
JSON file	CheckoutApplication.json

Enable ACH Payments for Make a Payment

The **Enable ACH Payments for Make a Payment** setting works with SuiteCommerce MyAccount, SuiteCommerce, and the 2021.2 release of SuiteCommerce Advanced and later.

This boolean lets you choose whether shoppers can pay invoices using ACH payments.

IDs	paymentInstrumentACHEnabled
UI location	Payment Instruments & Methods > Payment Methods
JSON file	PaymentInstrumentACH.json

Credit Card Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings work with SuiteCommerce MyAccount, SuiteCommerce, and SuiteCommerce Advanced.

These settings let you set up how credit card information is displayed on your website.

Show Credit Card Help

This boolean lets you show or hide help text for finding a credit card security code.

Check the **Show Credit Card Help** box to display help text about finding the credit card security code.

IDs	creditCard.showCreditCardHelp
UI location	Payment Instruments & Methods > Credit Card
JSON file	CreditCard.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Credit Card Help Title

This string lets you set the credit card help title. This title only displays if you check the **Show Credit Card Help** box.

Enter the title for help text about finding the credit card security code.

Example: Enter the 3- or 4-digit credit card security code. The placement of this code depends on the credit card provider, as shown below.

IDs	creditCard.creditCardHelpTitle
UI location	Payment Instruments & Methods > Credit Card
JSON file	CreditCard.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

CVV All Cards Image

This string lets you specify the URL for the image showing the card verification value (CVV) number on credit cards.

Enter the URL for an image that explains where the CVV is on a credit card. This image shows a number located on the front of a credit card.

IDs	creditCard.imageCwAllCards
UI location	Payment Instruments & Methods > Credit Card
JSON file	CreditCard.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

CVV American Card Image

This string lets you specify the URL for the image showing the CVV number on American credit cards.

Enter the URL for an explanatory image showing the CVV displayed on an American credit card. This image shows a number located on the front of a credit card.

IDs	creditCard.imageCwAmericanCard
UI location	Payment Instruments & Methods > Credit Card

JSON file	CreditCard.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Credit Card Secure Info

This string lets you enter the credit card security-related text you want to display on your website.

Example: We take all reasonable steps to protect our customers' personal information against loss, misuse, and alteration. We use encryption technology whenever receiving and transferring your personal information about our site. When you're viewing a page that's requesting personal information, the URL in the address bar at the top of your browser will start with "https." This indicates your transaction session is secured through Secure Sockets Layer (SSL). If the web page you're viewing does not start with "https," please contact us.

IDs	creditCard.creditCardShowSecureInfo
UI location	Payment Instruments & Methods > Credit Card
JSON file	CreditCard.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Integrations Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on this tab let you set up properties related to different integration options available for your site, such as Google, Twitter, and Facebook. This tab includes the following subtabs:

- [Twitter Subtab](#)
- [Pinterest Subtab](#)
- [Facebook Subtab](#)
- [Google Analytics 4 Subtab](#)
- [Google Universal Analytics Subtab](#)
- [Google Tag Manager Subtab](#)
- [Google AdWords Subtab](#)
- [Captcha Subtab](#)
- [Site Management Tools Subtab](#)
- [Categories Subtab](#)

Twitter Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings control Twitter popup settings.

More Information: [Twitter Cards](#)

Enable

This boolean lets you control if the Twitter addThis property is enabled.

ID	twitter.enable
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Status

This string lets you control if the Twitter popup is enabled.

ID	twitter.popupOptions.status
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Resizeable

This string lets you control if the Twitter popup is resizable.

ID	twitter.popupOptions.resizeable
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Scrollbars

This string lets you control if the Twitter popup displays scroll bars.

ID	twitter.popupOptions.scrollbars
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Personalbar

This string lets you control if the Twitter popup displays a personal bar.

ID	twitter.popupOptions.personalbar
-----------	----------------------------------

UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Directories

This string lets you control if the Twitter popup displays a directories bar.

ID	twitter.popupOptions.directories
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Location

This string lets you control if the Twitter popup displays a location bar.

ID	twitter.popupOptions.location
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Toolbar

This string lets you control if the Twitter popup displays a tool bar.

ID	twitter.popupOptions.toolbar
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Menubar

This string lets you control if the Twitter popup displays a menu bar.

ID	twitter.popupOptions.menubar
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Width

This number lets you define the width (in pixels) of the Twitter popup.

ID	twitter.popupOptions.width
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Height

This number lets you define the height (in pixels) of the Twitter popup.

ID	twitter.popupOptions.height
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Left

This number lets you define the left offset (in pixels) of the Twitter popup.

ID	twitter.popupOptions.left
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter Popup Top

This number lets you define the top offset (in pixels) of the Twitter popup.

ID	twitter.popupOptions.top
UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Twitter VIA

This string lets you define the Twitter account of the original tweeter. For example: @MerchantName.

ID	twitter.popupOptions.via
-----------	--------------------------

UI location	Integrations > Twitter
JSON file	twitter.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you set up Pinterest integration with your Commerce web store.

More Information: [Pinterest](#)

Enable Hover

This boolean enables or disables the Pinterest Pin It to hover over the image.

ID	pinterest.enableHover
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Enable Button

This boolean enables or disables the Pinterest PinIt button.

ID	pinterest.enableButton
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Image Size

This string lets you define the Pinterest image size ID to show on Pinterest.

ID	pinterest.imageSize
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Status

This string lets you control if the Pinterest popup is enabled.

ID	pinterest.popupOptions.status
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Resizable

This string lets you control if the Pinterest popup is resizable.

ID	pinterest.popupOptions.resizable
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Scrollbars

This string lets you control if the Pinterest popup displays scroll bars.

ID	pinterest.popupOptions.scrollbars
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Personalbar

This string lets you control if the Pinterest popup displays a personal bar.

ID	pinterest.popupOptions.personalbar
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Directories

This string lets you control if the Pinterest popup displays a directories bar.

ID	pinterest.popupOptions.directories
UI location	Integrations > Pinterest
JSON file	pinterest.json

Configuration file (pre-Vinson)	SC.Shopping.Configuration.js
--	------------------------------

Pinterest Popup Location

This string lets you control if the Pinterest popup displays a location bar.

ID	pinterest.popupOptions.location
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Toolbar

This string lets you control if the Pinterest popup displays a tool bar.

ID	pinterest.popupOptions.toolbar
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Menubar

This string lets you control if the Pinterest popup displays a menu bar.

ID	pinterest.popupOptions.menubar
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Width

This number lets you define the width (in pixels) of the Pinterest popup.

ID	pinterest.popupOptions.width
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Height

This number lets you define the height (in pixels) of the Pinterest popup.

ID	pinterest.popupOptions.height
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Left

This number lets you define the left offset (in pixels) of the Pinterest popup.

ID	pinterest.popupOptions.left
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Pinterest Popup Top

This number lets you define the top offset (in pixels) of the Pinterest popup.

ID	pinterest.popupOptions.top
UI location	Integrations > Pinterest
JSON file	pinterest.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Subtab

i Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings control Facebook popup integration with Commerce web stores. The popupOptions set up here are passed as the third parameter into the window.Open method of SocialSharing.Plugins.Facebook.js.

More Information: [Facebook Share](#)

Enable

This boolean enables or disables the Facebook addThis sharing service.

ID	facebook.enable
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Application ID

This string sets the custom application ID to link the domain to your application ID.

ID	facebook.appId
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Status

This string lets you control if the Facebook popup is enabled.

ID	facebook.popupOptions.status
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Resizable

This string lets you control if the Facebook popup is resizable.

ID	facebook.popupOptions.resizable
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Scrollbars

This string lets you control if the Facebook popup displays scrollbars.

ID	facebook.popupOptions.scrollbars
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Personalbar

This string lets you control if the Facebook popup displays a personal bar.

ID	facebook.popupOptions.personalbar
-----------	-----------------------------------

UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Directories

This string lets you control if the Facebook popup displays a directories bar.

ID	facebook.popupOptions.directories
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Location

This string lets you control if the Facebook popup displays a location bar.

ID	facebook.popupOptions.location
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Toolbar

This string lets you control if the Facebook popup displays a tool bar.

ID	facebook.popupOptions.toolbar
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Menubar

This string lets you control if the Facebook popup displays a menu bar.

ID	facebook.popupOptions.menubar
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Width

This integer lets you define the width (in pixels) of the Facebook popup.

ID	facebook.popupOptions.width
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Height

This integer lets you define the height (in pixels) of the Facebook popup.

ID	facebook.popupOptions.height
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Left

This integer lets you define the left offset (in pixels).

ID	facebook.popupOptions.left
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facebook Popup Top

This integer lets you define the top offset (in pixels).

ID	facebook.popupOptions.top
UI location	Integrations > Facebook
JSON file	facebook.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Google Analytics 4 Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you manage Google Analytics 4 (GA4) for your site. GA4 is a third-party analytics tool that helps you track and understand your website traffic.

See the help topic [Google Analytics 4](#) for more information about GA4.

Google Analytics 4 ID

This string lets you enter your Google Analytics 4 Tracking ID.

The application adds this ID to every page. To find your Tracking ID, see the Google support topic [What happened to my Tracking ID?](#)

ID	tracking.googleAnalyticsFour.propertyID
UI location	Integrations > Google Analytics 4
JSON file	GoogleAnalytics4.json

Google Analytics 4 Domain

This string lets you enter the unencrypted domain hostname for GA4.

If you use different domains for shopping and checkout, enter the hostname of your secure shopping domain in this field.

Example: shopping.example.com

If you use one secure domain for shopping and checkout, leave this field blank. See [Set Up Domains for Web Stores](#) for more information.

ID	tracking.googleAnalyticsFour.domainName
UI location	Integrations > Google Analytics 4
JSON file	GoogleAnalytics4.json

Google Analytics 4 Secure Domain

This string lets you enter the secure domain hostname for GA4.

If you use one secure domain for shopping and checkout, leave this field empty.

If you use a custom checkout domain, enter its hostname in this field.

Example: checkout.example.com

If you use NetSuite for your checkout domain, enter netsuite.com in this field.

See [Set Up Domains for Web Stores](#) for more information.

 **Note:** If you're implementing SuiteCommerce MyAccount, use one secure domain and enter that URL in this field.

ID	tracking.googleAnalyticsFour.domainNameSecure
UI location	Integrations > Google Analytics 4
JSON file	GoogleAnalytics4.json

Google Universal Analytics Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced



Important: Google Analytics 4 (GA4) has replaced Google Universal Analytics (GAU) as Google's cross-platform Analytics solution. All standard GUA properties stopped processing new hits on July 1, 2023. 360 Universal Analytics properties will stop processing new hits on July 1, 2024. See [Google Analytics 4 Subtab](#) for information about configuring GA4.

These settings configure properties for Google Universal Analytics. Google Universal Analytics is a third party analytics solution that can help you evaluate traffic on your website using data based on visitor tracking information.

More Information: [Configuring GUA](#)

Google Universal Analytics ID

This string lets you define the Google Universal Analytics Tracking ID.

The application inserts this property into each page of the application. To find your tracking ID, login to your Google Analytics account and go to Admin > Property > Property Settings.

More Information: [Set Up GUA Account and Website Property](#)

ID	tracking.googleUniversalAnalytics.propertyID
UI location	Integrations > Google Universal Analytics
JSON file	GoogleUniversalAnalytics.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Google Universal Analytics Domain

This string lets you define the unencrypted (not secure) domain hostname used for Google Universal Analytics.

If you use different domains for shopping and checkout, enter the hostname of the shopping domain in this field.

Example: shopping.example.com

If you use one secure domain for shopping and checkout, leave this field blank. See [Set Up Domains for Web Stores](#) for additional information.

More Information: [Configuring GUA](#)



Note: If you're using SuiteCommerce Advanced Mont Blanc or later, use Google Tag Manager to set up your tracking codes. See the help topic [Google Tag Manager](#).

ID	tracking.googleUniversalAnalytics.domainName
UI location	Integrations > Google Universal Analytics
JSON file	GoogleUniversalAnalytics.json

Configuration file (pre-Vinson)	SC.Checkout.Configuration.js
--	------------------------------

Google Universal Analytics Secure Domain

This string lets you define the encrypted (secure) domain hostname used for Google Universal Analytics.

If you use one secure domain for both shopping and checkout, leave this field empty.

If you have a custom checkout domain, enter its hostname in this field.

Example: checkout.example.com

If you use NetSuite for your checkout domain, enter netsuite.com in this field.

See [Set Up Domains for Web Stores](#) for additional information.

Note: If you're setting up SuiteCommerce MyAccount, use one secure domain and enter its URL in this field.

ID	tracking.googleUniversalAnalytics.domainNameSecure
UI location	Integrations > Google Universal Analytics
JSON file	GoogleUniversalAnalytics.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Google Tag Manager Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings configure properties related to the Google Tag Manager.

More: [Google Tag Manager](#)

Google Tag Manager ID

This string lets you define the Google Tag Manager ID. Setting this property enables this feature on your Commerce site.

More Information: [Sign Up for Google Tag Manager](#)

ID	tracking.googleTagManager.id
UI location	Integrations > Google Tag Manager
JSON file	GoogleTagManager.json
Configuration file (pre-Vinson)	SC.Configuration.js

Google Tag Manager Data Name

This string sets the data layer object that contains all of the information that you want to send to Google Tag Manager.

ID	tracking.googleTagManager.dataLayerName
UI location	Integrations > Google Tag Manager
JSON file	GoogleTagManager.json
Configuration file (pre-Vinson)	SC.Configuration.js

Is A Multi-Domain Site?

This property works with:

- SuiteCommerce Advanced – 2018.2 and later
- SuiteCommerce

This boolean lets you specify if you're using different domains for shopping and checkout. Enable this option to preserve data between sessions when you use separate domains for shopping and checkout.

ID	tracking.googleTagManager.isMultiDomain
UI location	Integrations > Google Tag Manager
JSON file	GoogleTagManager.json

Google AdWords Subtab

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings configure Google AdWords.

More Information: [Google Ads](#)

Google AdWords ID

This string is your Google AdWords ID, which matches the conversion tag you set up in your AdWords account.

ID	2019.2 and later: tracking.googleAdWordsConversion.id 2019.1 and earlier: googleAdWordsConversion.id
UI location	2019.2 and later: Integrations > Adwords 2019.1 and earlier: Integrations > Google Adwords
JSON file	GoogleAdWords.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js SC.MyAccount.Configuration.js SC.Checkout.Configuration.js

AdWords Value

This string is the value property you set in the conversion tag in your Google AdWords account.

ID	2019.2 and later: tracking.googleAdWordsConversion.value 2019.1 and earlier: googleAdWordsConversion.value
UI location	2019.2 and earlier: Integrations > Adwords 2019.1 and later: Integrations > Google Adwords
JSON file	GoogleAdWords.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js SC.MyAccount.Configuration.js SC.Checkout.Configuration.js

Google AdWords Label

This string is your Google AdWords label, which matches the conversion tag you set up in your AdWords account.

ID	2019.2 and later: tracking.googleAdWordsConversion.label 2019.1 and earlier: googleAdWordsConversion.label
UI location	2019.2 and later: Integrations > Adwords 2019.1 and earlier: Integrations > Google Adwords
JSON file	GoogleAdWords.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js SC.MyAccount.Configuration.js SC.Checkout.Configuration.js

Captcha Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

SuiteCommerce CAPTCHA works with SuiteCommerce MyAccount, SuiteCommerce, and SuiteCommerce Advanced 2025.2 and later. See the help topic [SuiteCommerce CAPTCHA](#) for more information about this feature.

These settings let you control how CAPTCHA challenges work in your web store.

Enable for Registration

This boolean setting lets you enable the SuiteCommerce CAPTCHA feature for the account creation flow. When enabled, customers must complete a CAPTCHA challenge when creating a new account.

ID	captcha.enableRegister
UI location	Integrations > Captcha
JSON file	Captcha.json

Enable for Login

This boolean setting lets you enable the SuiteCommerce CAPTCHA feature for the login flow. When enabled, customers must complete a CAPTCHA challenge during login.

ID	captcha.enableLogin
UI location	Integrations > Captcha
JSON file	Captcha.json

Enable for Guest Checkout

This boolean setting lets you enable the SuiteCommerce CAPTCHA feature for the guest checkout flow. When enabled, customers must complete a CAPTCHA challenge when checking out as guests.

ID	captcha.enableGuestCheckout
UI location	Integrations > Captcha
JSON file	Captcha.json

Enable for Place Order

This boolean setting lets you enable the SuiteCommerce CAPTCHA feature for the order placement flow. When enabled, customers must complete a CAPTCHA challenge before completing an order at checkout.

ID	captcha.enablePlaceOrder
UI location	Integrations > Captcha
JSON file	Captcha.json

CAPTCHA Provider

This string lets you choose the CAPTCHA provider (Google reCAPTCHA v2 or hCaptcha).

ID	captcha.type
-----------	--------------

UI location	Integrations > Captcha
JSON file	Captcha.json

Site Key

This string lets you enter the public key from your CAPTCHA provider. This key is used client-side to display CAPTCHA challenges on your website.

ID	captcha.siteKey
UI location	Integrations > Captcha
JSON file	Captcha.json

Secret Key ID

This string lets you enter your CAPTCHA private key's ID. Private keys are stored in the API Secrets area of NetSuite. To view the key's ID or store a CAPTCHA private key, see the help topic [Creating Secrets](#). This key is stored server-side.



Important: Keep your private key secure and never expose it in client-side code. Enter your private key's ID in the **Secret Key ID** field. Don't enter the private key here.

ID	captcha.secretKey
UI location	Integrations > Captcha
JSON file	Captcha.json

Site Management Tools Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings configure properties for the Site Management Tools (SMT).

More Information: [Site Management Tools](#)

Use Site Management Tools

You can't use Content Delivery and SMT at the same time. If you want to use Content Delivery, this property must be unchecked.

ID	cms.useCMS
UI location	Integrations > Site Management Tools
JSON file	CMS.json
Configuration file (pre-Vinson)	Configuration.js

Disable ESC Key to Login

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This boolean enables or disables SMT's escape-to-login feature. By default, this is unchecked, so users can select ESC to log in to SMT. To disable your site's escape-to-login feature, check this property.

More Information: [Configuring Access to Site Management Tools](#)

ID	cms.escToLoginDisabled
UI location	Integrations > Site Management Tools
JSON file	CMS.json

Landing Pages URL

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This string lets you set the base URL for Site Management Tools landing pages. By default this property is blank, and landing pages use you web store's URL. If you're working in a sandbox account, set the property your sandbox URL. For example, **<https://system.sandbox.netsuite.com>**.

ID	cms.baseUrl
UI location	Integrations > Site Management Tools
JSON file	CMS.json

CMS Adapter Version

This string lets you specify which CMS Adapter version (2 or 3) Site Management Tools will use. By default, this field is set to 3. If you're adding custom content types (CCTs) to your site, set this property to 3.

More information: [Site Management Tools](#)

ID	cms.adapterVersion
UI location	Integrations > Site Management Tools
JSON file	CMS.json

Time to Wait for CMS Content (ms)

This string lets you specify the maximum time (in milliseconds) to wait for CMS content to load. If this maximum time is exceeded, the app loads first and then the CMS content loads. There may also be some flickering. By default, this value is set to 200.

More information: [Site Management Tools](#)

ID	cms.contentWait
UI location	Integrations > Site Management Tools
JSON file	CMS.json

Categories Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings configure properties related to Commerce Categories.

For examples and more information, see the help topic [Commerce Categories](#).

Category Navigation Menu Level Deepness

This integer lets you choose how many category levels to display in the navigation menu.

ID	categories.menuLevel
UI location	Integrations > Categories
JSON file	Categories.json

Show Categories Navigation Menu

This boolean enables or disables the Categories navigation menu.

ID	categories.addToNavigationTabs
UI location	Integrations > Categories
JSON file	Categories.json

Exclude Empty Categories

This boolean enables or disables the Exclude Empty Categories feature.

ID	categories.excludeEmptyCategories
UI location	Integrations > Categories
JSON file	Categories.json

Side Menu > Sort By

This string lets you specify which Category record field to use as the main sort field in the Categories sidebar. By default, this is set to sequencenumber. In this case, the sidebar categories sort by the sequence number set in NetSuite.

ID	categories.sideMenu.sortBy
-----------	----------------------------

UI location	Integrations > Categories
JSON file	Categories.json

Side Menu > Additional Fields

This string lets you add extra fields to the default list the ItemSearch API returns for the application.

The default list returned is:

- internalid
- name
- sequencenumber
- urlfragment
- displayinsite

ID	categories.sideMenu.additionalFields
UI location	Integrations > Categories
JSON file	Categories.json

Side Menu > Collapsible

This boolean lets you specify if the Categories side menu is collapsible and expandable.

ID	categories.sideMenu.uncollapsible
UI location	Integrations > Categories
JSON file	Categories.json

Side Menu > Show Max

This integer lets you specify how many categories to show before a **Show More** link appears. By default, it's set to 5.

ID	categories.sideMenu.showMax
UI location	Integrations > Categories
JSON file	Categories.json

Side Menu > Collapsed

This boolean lets you specify if the Categories sidebar is collapsed when the page loads. By default, the sidebar is set to appear expanded.

ID	categories.sideMenu.collapsed
UI location	Integrations > Categories

JSON file	Categories.json
------------------	-----------------

Sub Categories > Sort By

This string lets you choose which Category record field to use as the main sort field for sub categories. By default, this is set to sequencenumber. In this case, the sidebar categories will sort by the sequence number that you set in NetSuite.

ID	categories.subCategories.sortBy
UI location	Integrations > Categories
JSON file	Categories.json

Sub Categories > Additional Fields

This string lets you specify extra fields for the default list the ItemSearch API returns for subcategories sub categories.

The default list returned is:

- internalid
- name
- description
- sequencenumber
- urlfragment
- thumbnailurl
- displayinsite

ID	categories.subCategories.fields
UI location	Integrations > Categories
JSON file	Categories.json

Category Fields

This string lets you add optional fields to the default list for category fields. Category Fields are the fields that appear in the Category page.

ID	categories.category.fields
UI location	Integrations > Categories
JSON file	Categories.json

Breadcrumb Fields

This string lets you add extra fields to the default list the ItemSearch API returns for breadcrumb navigation. The default list returned is:

- internalid
- name
- displayinsite

ID	categories.breadcrumb.fields
UI location	Integrations > Categories
JSON file	Categories.json

Menu > Sort By

This string lets you specify which Category record field to use as the main sort field in the Navigation menu. By default, this is set to sequencenumber. In this case, the navigation menu categories will sort by the sequence number you set in NetSuite.

ID	categories.menu.sortBy
UI location	Integrations > Categories
JSON file	Categories.json

Menu Fields

This property lets you add extra fields to the default list the ItemSearch API returns for the Navigation menu.

The default list returned is:

- internalid
- name
- sequencenumber
- displayinsite

ID	categories.menu.fields
UI location	Integrations > Categories
JSON file	Categories.json

Multi-Domain Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on this tab let you configure properties for multiple domains. This tab includes the following subtabs:

- [Translations Subtab](#)
- [Hosts Subtab](#)

Translations Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you set up multiple domains so your website can support different languages or regions.

**Note:** The following fields can't be translated when pages are run through the SEO page generator:

- Meta Title
- Meta Tag HTML
- Schema Markup
- Open Graph Tags and all other social media meta tags

Your website's default language and currency will display instead of any other languages or locales you've set up.

List of Translations

This array lets you add new string translations or update existing ones. Use this method for small changes to your site's translated content. If you're making significant changes to your site's translated content, see [The Translation Process](#) for details.

Each translation array contains the following properties:

- Key** (string) – the string you want to translate.
- Language** (string) – the localized version for each locale.

More Information: [Localization](#)

IDs	extraTranslations extraTranslations.key extraTranslations.cs_CZ (Czech Republic) extraTranslations.da_DK (Danish) extraTranslations.de_DE (German) extraTranslations.en_AU (English – Australia) extraTranslations.en_CA (English – Canada) extraTranslations.en_GB (English – United Kingdom) extraTranslations.en_US (English – US) extraTranslations.es_AR (Spanish – Argentina) extraTranslations.es_ES (Spanish – Spain) extraTranslations.fi_FI (Finnish) extraTranslations.fr_CA (French – Canada) extraTranslations.fr_FR (French – France) extraTranslations.id_ID (Indonesian) extraTranslations.it_IT (Italian) extraTranslations.ja_JP (Japanese) extraTranslations.ko_KR (Korean)
-----	---

	extraTranslations.no_NO (Norwegian) extraTranslations.nl_NL (Dutch – Netherlands) extraTranslations.pt_BR (Portuguese – Brazil) extraTranslations.ru_RU (Russian) extraTranslations.sv_SE (Swedish) extraTranslations.th_TH (Thai) extraTranslations.tr_TR (Turkish) extraTranslations.vi_VN (Vietnamese) extraTranslations.zh_CN (Chinese) extraTranslations.zh_TW (Chinese – Taiwan)
UI location	Multi-Domain > Translations
JSON file	Translations.json

Hosts Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings configure information about each host for websites with multiple languages or regions. You must define a host for each language.

More Information: [Localization](#)

List of Hosts

This lets you set the host for each translated site. Use the following list to add your hosts by ID. For example, you may set up one host for English and U.S. Dollars, and another for English and French with both U.S. Dollars and Euros.

 **Important:** Each language must have its own domain.

Each host requires the following:

- **Host ID** – the host address name for the translated content. This name must match the hosted domain you set up for the associated language. For more information about setting up domains, see [Domains](#).
- **Language** – the languages available for the associated host location.
- **Language Title** – the label for the currency in the Location dropdown on your site.
- **Language Domain** – the domain name for this language. This must exactly match the hosted domain for the associated language.
- **Currency** – the label for the currency in the Location dropdown on your site.
- **Subsidiary** – the subsidiary for the host.
- **Location** – the location for the host.

IDs	multiDomain.hosts multiDomain.hosts.host multiDomain.hosts.language multiDomain.hosts.languageTitle multiDomain.hosts.languageDomain multiDomain.hosts.currency
------------	--

	multiDomain.hosts.subsidiary multiDomain.hosts.location
UI location	Multi-Domain > Hosts
ID (pre-Vinson)	hosts
JSON file	Languages.json
Configuration file (pre-Vinson)	Configuration.js

Hosts Array Parameters (pre-Vinson)

In pre-Vinson implementations, the hosts array, located in the backend Configuration.js file, maps languages and currencies to specific hosts. This array requires a title property and both the currencies and languages arrays, as shown below.

Note: The hosts array contains sample code that's hidden within a multi-line comment block. Remove the comment tags to view it, but you need to customize the properties for your site as explained below.

- **title** (string) – the label for the location in the Location dropdown on your site.
- **currencies** (array) – the currencies available for the associated host location.
 - **title** (string) – the label for the currency in the Location dropdown on your site.
 - **code** (string) – the code for the location. This maps the currency code with the specific host location and must exactly match the three-letter International Standards Organization (ISO) currency code symbol defined in the backend, or the currency won't appear in the list. See the help topic [Currency Management](#) for more information.
- **languages** (array) – the languages available for the associated host location
 - **title** (string) – the display label of the currency within the Location drop-down selector on the website.
 - **host** (string) – the host address name for the translated content. It has to match the hosted domain you set up for that language. For more information about setting up domains, see [Domains](#).
 - **locale** (string) – the country and culture code for the language per ISO standards (ISO 639 and ISO 3166 respectively). This must match the locale property defined in the backend, or the language won't appear in the list. Example: en_US or es_ES.

Your website must have a unique locale for each hosted domain and a unique domain for each language.

IDs (pre-Vinson)	hosts hosts.title hosts.currencies hosts.currencies.title hosts.currencies.code hosts.languages hosts.languages.title hosts.languages.host hosts.languages.locale
UI location	None
Configuration file (pre-Vinson)	Configuration.js

Search Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced

The settings on this tab let you set up properties for site search. This tab includes the following subtabs:

- [Type Ahead Subtab](#)
- [Result Sorting Subtab](#)
- [Search Results per Page Subtab](#)
- [Search Results Subtab](#)
- [Result Display Options Subtab](#)

Type Ahead Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you set up the Type Ahead feature, which shows search results as your Commerce website users type in the search box.

Min Length

This number lets you specify how many characters users need to type before the search starts.

ID	typeahead.minLength
UI location	Search >Type Ahead
JSON file	SearchTypeAhead.json
Configuration file (pre-Vinson)	SC.Configuration.js

Maximum Results

This number lets you specify the maximum number of search results to show.

ID	typeahead.maxResults
UI location	Search > Type Ahead
JSON file	SearchTypeAhead.json
Configuration file (pre-Vinson)	SC.Configuration.js

Sort

This string lets you specify the sort order of items returned by the Item Search API. By default, items are sorted by relevance in ascending order. However, you can also sort by other criteria, like the name property.

ID	typeahead.sort
-----------	----------------

UI location	Search > Type Ahead
JSON file	SearchTypeAhead.json
Configuration file (pre-Vinson)	SC.Configuration.js

Result Sorting Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you specify the sorting options in the Sort By dropdown, grouped by browser type (desktop, phone, or tablet). First, you must define sort fields in the Web Site Setup record. See the help topic [Select and Configure Sort Fields](#).

Each sort property contains the following (note the different property IDs for each browser type):

- **ID** (string) – the ID of the search option.
- **Name** (string) – the label for the sort option.
- **Is Default** (boolean) – the default active search option.

Desktop

This array lets you specify the sorting options in the Sort By dropdown for desktop browsers.

IDs	sortOptions sortOptions.id sortOptions.name sortOptions.isDefault
UI location	Search > Result Sorting
JSON file	SearchSort.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Phone

This array lets you specify the sorting options in the Sort By dropdown for phone browsers.

IDs	sortOptionsPhone sortOptionsPhone.id sortOptionsPhone.name sortOptionsPhone.isDefault
UI location	Search > Result Sorting
JSON file	SearchSort.json

Tablet

This array lets you specify the sorting options in the Sort By dropdown for tablet browsers.

IDs	sortOptionsTablet
------------	-------------------

	sortOptionsTablet.id sortOptionsTablet.name sortOptionsTablet.isDefault
UI location	Search > Result Sorting
JSON file	SearchSort.json

Search Results per Page Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you specify the options in the Results Per Page dropdown menu. This array contains the following properties:

- **Items** (number) – the number of search results this option displays.
- **Name** (string) – the label for this option.
- **Is Default** (boolean) – specifies whether this option is the default.

IDs	resultsPerPage resultsPerPage.items resultsPerPage.name resultsPerPage.isDefault
UI location	Search > Search Results per Page
JSON file	SearchResultsPerPage.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Search Results Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you set up the search feature in the application header.

More Information: [Select and Configure Sort Fields](#)

Search Results Title

This string lets you specify the title for the facet browse view in the application header.

ID	defaultSearchTitle
UI location	Search > Search Results
JSON file	SearchResults.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Search Keyword Maximum Length

This number lets you specify the maximum number of characters users can enter in the search field.

ID	searchPrefs.maxLength
UI location	Search > Search Results
JSON file	SearchResults.json
Configuration file (pre-Vinson)	SC.Configuration.js

Result Display Options Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you set display options for search results, grouped by browser type (desktop, phone, and tablet).

Each display option contains the following properties (note the different property IDs for each browser type):

- **ID** (string) – the internal ID for the display option.
- **Name** (string) – the label for the display option.
- **Template** (string) – the template used to display the search result option.
- **Columns** (number) – the number of columns used to display search results. This must be a divisor of 12 (1, 2, 3, 4, 6, 12).
- **Icon** (string) – the icon for the display option.
- **Is Default** (boolean) – specifies whether this display option is the default.

Desktop

This array lets you specify the display options for search results on desktop browsers.

IDs	itemsDisplayOptions itemsDisplayOptions.id itemsDisplayOptions.name itemsDisplayOptions.template itemsDisplayOptions.columns itemsDisplayOptions.icon itemsDisplayOptions.isDefault
UI location	Search > Result Display Options
JSON file	SearchItemDisplayOptions.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Phone

This array lets you specify the display options for search results on phone browsers.

IDs	itemsDisplayOptionsPhone itemsDisplayOptionsPhone.id itemsDisplayOptionsPhone.name itemsDisplayOptionsPhone.template
------------	---

	itemsDisplayOptionsPhone.columns itemsDisplayOptionsPhone.icon itemsDisplayOptionsPhone.isDefault
UI location	Search > Result Display Options
JSON file	SearchItemDisplayOptions.json

Tablet

This array lets you specify the display options for search results on tablet browsers.

IDs	itemsDisplayOptionsTablet itemsDisplayOptionsTablet.id itemsDisplayOptionsTablet.name itemsDisplayOptionsTablet.template itemsDisplayOptionsTablet.columns itemsDisplayOptionsTablet.icon itemsDisplayOptionsTablet.isDefault
UI location	Search > Result Display Options
JSON file	SearchItemDisplayOptions.json

Shopping Catalog Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced

The settings on this tab let you set up shopping-related properties, like the shopping cart, facets, and product details. This tab includes overall catalog properties and the following subtabs:

- [Structured Data Markup Subtab](#)
- [Recently Viewed Items Subtab](#)
- [Item Options Templates Subtab](#)
- [Facets SEO Subtab](#)
- [Facets Delimiters Subtab](#)
- [Facets Subtab](#)
- [Product Details Information Subtab](#)
- [Multi-Image Option Subtab](#)

Add to Cart Behavior

This string lets you define the action that occurs after a shopper adds an item to the cart. Possible values are:

- `showCartConfirmationModal` (default)
- `goToCart`
- `showMiniCart`
- `showCartConfirmationModal`

ID	addToCartBehavior
UI location	Shopping Catalog
JSON file	Cart.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Add to Cart from Facets View

This boolean lets you decide if a facet view shows the **Add to Cart** button on each search result.

ID	addToCartFromFacetsView
UI location	Shopping Catalog
JSON file	Cart.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Allow Adding More Than One PromoCode

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This boolean lets you enable or disable the SuitePromotions feature.

More Information: [Promotions in Commerce Web Stores](#)

ID	promocodes.allowMultiples
UI location	Shopping Catalog
JSON file	Cart.json

Allow custom matrix child search in the item list

This property works with:

- SuiteCommerce Advanced – Kilimanjaro and later
- SuiteCommerce

This boolean lets you enable or disable the custom matrix child item search in the Item list. If you enable this property, the item search uses the field set you defined in the **Matrix child items fieldset for search** property for the **Matrix Child Items (Detail)** field.

More Information: See the help topic [Item Search API Input Parameters](#) (matrixchilditems_fieldset parameter information).

ID	matrixchilditems.enabled
UI location	Shopping Catalog

JSON file	Cart.json
------------------	-----------

Matrix child items fieldset for search

This property works with

- SuiteCommerce Advanced – Kilimanjaro and later
- SuiteCommerce

This string lets you specify which field set is used with the custom matrix child item search feature. By default, this field uses the `matrixchilditems_search` field set. This is part of the default field set setup script. However, you can change it to match any custom matrix child item field set.

Note: If you leave this property blank, but enable the **Allow custom matrix child search in the item list**, the custom matrix child search feature won't use the custom field set. Instead, the application uses the default `matrixchilditems` field set. You can also set up this feature manually by customizing the Item Search API.

More Information: See the help topic [Item Search API Input Parameters](#) (`matrixchilditems_fieldset` parameter information).

ID	<code>matrixchilditems.fieldset</code>
UI location	Shopping Catalog
JSON file	Cart.json

If the Information is Available to your Country, shows detailed taxes in the Cart

This property works with:

- SuiteCommerce Advanced – Kilimanjaro and later
- SuiteCommerce

This boolean lets you enable or disable the per line tax details in the Cart and purchase history. This works with Australian and Canadian accounts that use PST, GST, and VAT tax codes.

More Information: [Commerce Web Store Taxes](#)

ID	<code>showTaxDetailsPerLine</code>
UI location	Shopping Catalog
JSON file	Cart.json

Enable Zoom for Images

This boolean lets you enable or disable zoom display for item images. By default, this option is enabled, so that images in the Product Details Page and Quick View display at zoom size when a user hovers over them.

ID	isZoomEnabled
UI location	Shopping Catalog
JSON file	Cart.json

Default Search URL

This string lets you specify the default search URL.

ID	defaultSearchUrl
UI location	Shopping Catalog
JSON file	DefaultSearchURL.json
Configuration file (pre-Vinson)	Configuration.js

Maximum Option Values Quantity Without Pusher

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This property sets the maximum number of option values that display in line on any mobile device's product details page before a pusher appears. For example, if an item has two dimensions with four values each, it has eight total values to display in the PDP. If you set this property to 6, shoppers will see the first dimension and its four values, plus the first two values from the second dimension, before a pusher appears on a mobile device's PDP. When a shopper taps the pusher, the next two item options display on a new screen.

 **Note:** This property only works with the PDP on mobile devices.

ID	ItemOptions.maximumOptionValuesQuantityWithoutPusher
UI location	Shopping Catalog
JSON file	ProductDetails.ItemOptions.json

Enable Strike-Through Behavior

This property works with:

- SuiteCommerce Advanced 2020.2 and later
- SuiteCommerce

When you enable boolean, it compares a customer's configured price level with the one that you set here in the **Default Price Level** field. If the customer's price level is lower than the default price level, your site displays the higher default price with a strikethrough and the lower customer price next to it.

This boolean is enabled by default with the **Default Price Level** set to pricelevel1.

More Information: [Strike-Through Pricing](#)

ID	priceLevel.enabled
UI location	Shopping Catalog
JSON file	Cart.json

Default Price Level

This property works with:

- SuiteCommerce Advanced 2020.2 and later
- SuiteCommerce

This string lets you specify the default price level to compare with the customer's price level for strike-through pricing. If the customer's price level is lower than the default price level, your site displays the higher default price with a strikethrough and the lower customer price next to it.

The default value for this fields is pricelevel1.

More Information: [Strike-Through Pricing](#)

ID	priceLevel.default
UI location	Shopping Catalog
JSON file	Cart.json

Enable Personalized Search API Endpoints

This property works with:

- SuiteCommerce Advanced 2021.2 and later
- SuiteCommerce

This boolean lets you choose if you want to use personalized Search API endpoints.

More Information: [Cacheable and Personalized Endpoints](#).

ID	isNewSearchApiEnabled
UI location	Shopping Catalog > Personalized Search API Endpoints
JSON file	Cart.json

Structured Data Markup Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings set the type of structured data used on your domain.

Markup Type

This property works with:

- SuiteCommerce Advanced – 2020.1 and later
- SuiteCommerce

This string lets you set the type of markup used for all items. Options include:

- No Markup
- JSON-LD

ID	structureddatamarkup.type
UI location	Shopping Catalog > Structured Data Markup
JSON file	structureddatamarkup.json

Out of Stock Behavior (When Item Back Orders are Allowed)

This property works with:

- SuiteCommerce Advanced – 2020.1 and later
- SuiteCommerce

This string lets you specify how out-of-stock items display when you allow back orders. This option changes the markup for all items. The default is InStock. Options include:

- InStock
- PreOrder

ID	structureddatamarkup.availabilityonbackorder
UI location	Shopping Catalog > Structured Data Markup
JSON file	structureddatamarkup.json

Recently Viewed Items Subtab

i Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you control how recently viewed items are displayed.

Use Cookies for Recently Viewed Items

This boolean value lets you track recently viewed items using a browser cookie.

ID	recentlyViewedItems.useCookie
UI location	Shopping Catalog > Recently Viewed Items
JSON file	RecentlyViewedItems.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Number of Displayed Items

This integer lets you specify how many recently viewed items to display on your website. By default, 6 items are displayed.

ID	recentlyViewedItems.numberOfItemsDisplayed
UI location	Shopping Catalog > Recently Viewed Items
JSON file	RecentlyViewedItems.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Item Options Templates Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

The Item Options Templates subtab displays properties that let you control how item options and custom transaction line fields appear in your web store. NetSuite provides some templates, which are displayed in this tab.

Default Selected Templates by Item Option Type

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This array lets you select the default templates to display item options or transaction fields in the Checkout and My Account areas of your web store. Each item option contains the following properties:

- **Option Type** (string) – the option type that uses the listed template.
- **Template Name** (string) – the default template used to display the field by item option type.

More Information: [Commerce Custom Fields](#)

IDs	ItemOptions.defaultTemplates.selectedByType ItemOptions.defaultTemplates.selectedByType.type ItemOptions.defaultTemplates.selectedByType.template
JSON file	Transaction.Line.Views.ItemOptions.json
UI location	Shopping Catalog > Item Options Templates

Default Selector Templates by Item Option Type

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This array lets you select the default templates used selecting item options in the Cart or Order Confirmation page. Each item option contains the following properties:

- **Option Type** (string) – the option types that uses the listed template.
- **Template Name** (string) – the default selector template used to display the item option type.

More Information: [Commerce Custom Fields](#)

IDs	ItemOptions.defaultTemplates.selectorByType ItemOptions.defaultTemplates.selectorByType.type ItemOptions.defaultTemplates.selectorByType.template
UI location	Shopping Catalog > Item Options Templates
JSON file	ProductViews.ItemOptions.json

Default Facet Cell Templates by Item Option Type

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This array lets you select the default templates used to display an item option (by type) the facets search results page. Each item option contains the following properties:

- **Option Type** (string) – the option types that use the listed template.
- **Template Name** (string) – the default facets template used to display the item option type.

IDs	ItemOptions.defaultTemplates.facetCellByType ItemOptions.defaultTemplates.facetCellByType.type ItemOptions.defaultTemplates.facetCellByType.template
UI location	Shopping Catalog > Item Options Templates
JSON file	ProductViews.ItemOptions.json

Facets SEO Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

Use these settings to set limits on SEO-generated links in the facets browser. After these limits are reached, the generated link uses # instead of a URL.

More Information: [SEO Page Generator](#)

Number of Facet Groups

This string lets you select how many facet groups are indexed.

ID	facetsSeoLimits.numberOffFacetsGroups
UI location	Shopping Catalog > Facets SEO
JSON file	FacetSeoLimits.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Number of Facet Values

This string lets you select how many multi-facet groups are grouped together.

ID	facetsSeoLimits.numberOffFacetsValues
UI location	Shopping Catalog > Facets SEO
JSON file	FacetSeoLimits.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Options

This string lets you select which URL options are indexed. If you don't add an option here, it won't be indexed when it appears in a URL. Valid values are:

- order
- page
- show
- display
- keywords

ID	facetsSeoLimits.options
UI location	Shopping Catalog > Facets SEO
JSON file	FacetSeoLimits.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Facets Delimiters Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

Facet delimiter settings let you specify which characters appear between facets, facet names, and their values or options in a URL.

See the help topic [Select and Configure Facet Fields](#) for detailed information about facets.

If you don't set facet delimiter values, NetSuite uses the default values shown following table:

Facet Delimiter	Facet Value
Between Facet Name and Value	/
Between Different Facets	/
Between Different Facet Values	,
Between Range Facet Values	to
Between Facets and Options	?

Between Option Name and Value	=
Between Different Options	&

Example Scenario

A Commerce website user makes the following facet selections:

- **Category** – Shoes (a facet with a single selection behavior).
- **Color** – black and brown (a facet with multiple selection behavior).
- **Display** – set results as a table.

Based on the NetSuite default delimiters, the URL will be:

`http://www.mystore.com/search/categories/shoes/color/black,brown?display=table`

More Information

Before you set up facet delimiters for your Commerce website, be aware of the following information:

- Each facet delimiter must be unique.
- A hyphen (-) can't be used as a facet delimiter.

If you use hyphens as delimiters, it can affect how URL component aliasing works when there are spaces in the URL. See the help topic [URL Component Aliases](#) for information about URL component aliasing.

Between Facet Name and Value

This string lets you specify the character that appears between the facet name and value in the URL. You should use one character as the value for this property to prevent unexpected results.

ID	facetDelimiters.betweenFacetNameAndValue
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	/

Between Different Facets

This string lets you specify the character that appears between different facets in the URL. You should use one character as the value for this property to prevent unexpected results.

ID	facetDelimiters.betweenDifferentFacets
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	/

Between Different Facets Values

This string lets you specify the character that appears between different facet values in the URL.

ID	facetDelimiters.betweenDifferentFacetsValues
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	,

Between Range Facets Values

This string lets you specify the characters that appear in the URL to delimit facet ranges.

ID	facetDelimiters.betweenRangeFacetsValues
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	to

Between Facets and Options

This string lets you specify the character that appears in the URL between a facet and its options.

ID	facetDelimiters.betweenFacetsAndOptions
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	?

Between Option Name and Value

This string lets you specify the character that appears in the URL between the option name and its value. You should use one character as the value for this property to prevent unexpected results.

ID	facetDelimiters.betweenOptionNameAndValue
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	=

Between Different Options

This string lets you specify the character that appears in the URL between two options. You should use one character as the value for this property to prevent unexpected results.

ID	facetDelimiters.betweenDifferentOptions
UI location	Shopping Catalog > Facet Delimiters
JSON file	FacetsDelimiters.json
Configuration file (pre-Vinson)	SC.Configuration.js
Default value	&

Facets Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

Facets as URL Parameters

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

This boolean lets you choose whether facets are treated as URL query string parameters or as part of the URL path.

If enabled, all facets are treated as parameters. If disabled, all facets are treated as part of the URL path. This property works with all facets unless you update the `isParameter` property for an individual facet. See [Facets](#) for details. By default, this property is disabled.

 **Note:** This property can affect SEO. See the help topic [Facets as Parameters](#) for details.

ID	facetsAsUrlParameters
UI location	Shopping Catalog > Facets
JSON file	Facets.json

Facets

More Information: [Select and Configure Facet Fields](#)

These settings control faceted navigation. Commerce web stores use this feature to display product results. With faceted navigation, shoppers can narrow down searches by selecting item attributes set up in the facet configuration.

Each facet contains the following properties:

- **Item Field ID** (string) – the internal identifier of the facet being customized. The value must match the URL Component of the facet field in NetSuite. If you don't define a value for this field, the default is

the facet field's URL Component. If the URL Component isn't set up in NetSuite, the default is the facet field's Field ID.

- **Name** (string) – the display name for the facet as it appears in the browser. If you don't define a value, the default is the id property
- **URL** (string) – the URL fragment that identifies the facet. If you don't define a value, SuiteCommerce uses the NetSuite list record ID.

This property only works with pre-Vinson releases of SCA.

- **Priority** (string) – the display order for facet choices. Facets display in order from highest to lowest priority (1–10). The default is 5.
- **Behavior** (string) – the type of facet editor in the browser. If you don't define this value, the default is single. Possible values are:
 - **Single** (string) – lets users select one option from a list.
 - **Multi** (string) – lets users select more than one option from a list.
 - **Range** (string) – lets users select a start and end value from a double slider.
- **Template** (string) – the template for the facet's HTML. If don't you define this value, the default is `facets_faceted_navigation_item_tpl`.
 - **facets_faceted_navigation_item_color_tpl** (string) – the template for a color facet.
 - **facets_faceted_navigation_item_range_tpl** (string) – the template for a ranged facet.
 - **facets_faceted_navigation_item_tpl** (string) – the template for any other facet.
- **Color Palette** (string) – the HTML color values displayed for the facet.
- **Collapsed** (boolean) – the default state of the facet. If you select this option, the facet displays in a collapsed state.
- **Non Collapsible** (boolean) – specifies whether the facet can be collapsed or expanded. If you set to this to Yes, shoppers can click an arrow to collapse or expand the facet. If you set it to No, the facet stays open.
- **Show Heading** (boolean) – specifies whether the facet heading appears in the browser. If you set this to Yes, the heading matches the name property. If you set it to No or leave it blank, the facet values display without a heading.
- **Title Format** (string) – the format for the facet title when it's selected. This can be a string, like **from \$(0) to \$(1)** for a range behavior or **foo \$(0) bar** for others. It can be also a function that accepts the facet object as a parameter.
- **Title Separator** (string) – the string that separates facets in the page title. If you don't define this value, the default is a comma and space (,).
- **Parser** (string) – adds the shopper's currency symbol (\$, £, etc.) to the price range. If you don't define this value, SuiteCommerce won't display a currency symbol.
- **Is URL Parameter?** (boolean) – specifies whether the facet is a parameter or part of the URL path. If Facets as URL Parameters is checked for all facets, any facet with Is URL Parameter? set to false (unchecked) acts as part of the URL path. If Facets as URL Parameters is unchecked, any facet with Is URL Parameter? set to true (checked) acts as a parameter.

This property works with SuiteCommerce and on the Elbrus release of SCA and later.

- **Max** (number) – the limit of options available for a facet. After this limit is reached, a "see more" link appears. This only works with multi behavior and is useful for facets with several options.

This property works with SuiteCommerce and the Elbrus release of SCA and later.

More Information: [Select and Configure Facet Fields](#)

IDs	facets
-----	--------

	facets.id facets.name facets.url (pre-Vinson) facets.priority facets.behavior facets.template facets.colors facets.collapsed facets.uncollapsible facets.showHeading facets.titleToken facets.titleSeparator facets.parser facets.isParameter (Elbrus and later) facets.max (Elbrus and later)
UI location	Shopping Catalog > Facets
JSON file	Facets.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Configuring Faceted Navigation

If your faceted navigation isn't set up right, it may look similar to the example shown below. To fix this, make sure each title is labeled correctly, use a color swatch for the second list, and add a price slider for the third list.

1

Custitem30

^

X-Small

Small

Medium

Large

X-Large

See More

2

Custitem31

^

Beige

Black

Blue

Brown

Burgandy

See More

3

PriceLevel5

^

14.99

15.99

17.99

18.99

19.99

See More

The following table provides tips on how to correctly configure each of the faceted navigation lists.

Item Number	Configuration
1	In the Configuration record on the Shopping Catalog > Facets subtab, enter custitem30 in the ItemID field, and Size in the Name field. You can leave the other defaults as they are. If you want shoppers to select more than one value from the same item, set the Behavior field to multi . For example, for the Size facet, using multi behavior lets shoppers select Medium and Large to view results for both.
2	In the Configuration record on the Shopping Catalog > Facets subtab, enter custitem31 in the ItemID field, and Color in the Name field. You can leave the other defaults as they are.

Item Number	Configuration
	If you're refining by color, you may want to use a color swatch picker for a more visual and compact experience. The requirements for this include: 1. Setting up a custom list of colors to use as a matrix option list. 2. Setting up a custom color palette to show color swatches as facet navigation items. For more information, see Color Palettes Subtab.
3	In the Configuration record on the Shopping Catalog > Facets subtab, enter pricelevel5 in the ItemID field and Price in the Name field. When the items API returns search results, each item has a price. If you don't configure anything else, each price displays as a text facet value that shoppers can choose from. To improve this experience, set up a slider so shoppers can select upper and lower amounts and filter out items outside that range. When you set up a price facet: ■ From the Behavior field, select range. ■ From the Template field, select facets_faceted_navigation_item_range.tp. ■ In the Title Format field, enter how you want the title to change when the facet is applied. For example, Price \$(1) to \$(0).  Note: If you leave the Title Format field blank, it uses the default value. You should enter a specific value for the price because the default price value will insert the upper value before the lower value.

Product Details Information Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

The Product Details Information subtab lets you add detailed information about an item in a stacked list on the Product Details Page (PDP). Each entry creates a tab in the PDP that provides information from an Item record field in your web store. Each entry contains the following properties:

- **Name** (string) – the label displayed (as a tab) on the PDP.
- **ID** (string) – the Item record field value displayed under the tab in the PDP.
- **Opened** (boolean) – specifies whether the section is open when the page loads. This property only works with pre-Elbrus implementations of SCA.
- **Itemprop** (string) – the itemprop HTML attribute (as defined by schema.org). This property is optional.

This property works with:

- SuiteCommerce Advanced – Elbrus and later
- SuiteCommerce

IDs	productDetailsInformation productDetailsInformation.name productDetailsInformation.contentFromKey productDetailsInformation.itemprop
IDs (pre-Elbrus)	itemDetails

 Note: These properties appear in the Shopping Catalog tab and Item Details subtab in Vinson implementations of SCA.	itemDetails.name itemDetails.contentFormatKey itemDetails.opened itemDetails.itemprop
UI location	Shopping Catalog > Product Details Information
UI location (pre-Elbrus)	Shopping Catalog > Item Details
JSON file	ProductDetails.Information.json
Configuration file (pre-Vinson)	SC.Configuration.js

For example:

The following setup adds a **Details** tab to your PDP that displays information from the storedetaildescription field in the Item record.

Structured Data Markup • Recently Viewed Items • Item Options Templates Facets SEO • Facets Delimiters • Facets • **Product Details Information •** Multi-Im

Product Details Information
[See Help](#)

Name *	id *	itemprop
Details	storedetaildescription	description

✓ Add

✕ Cancel

+ Insert

🗑 Remove

Details

Feels fresh and dry whether you're stuck in the office till dark or sneaking out for a of natural and synthetic fibers that push moisture to the outside of the garment for f

Features

Dri-release® blended yarns wick moisture and minimize odor

Chest pocket for small items

The Basics

Dri-release® fabric makes this an amazing shirt for travel.

Weight

8 oz. / 226 g.

Center Back Length

29" / 74 cm

Materials

Multi-Image Option Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

This property on this subtab lets you set which item option fields control the final image for the selected product on the Product Description Page (PDP). In SuiteCommerce and the Elbrus release of SCA and later, you can set up two or more item option IDs for image changes.

More Information: [\(Optional\) Configure Multi-Image Options](#)

ID	productline.multiImageOption
-----------	------------------------------

UI location	Shopping Catalog > Multi-Image Option
UI location (pre-Elbrus)	Layout > Images
JSON file	ProductLine.MultiImages.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Layout Tab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The settings on this tab let you set up properties related to your site layout. This tab has the following subtabs:

- [Header Subtab](#)
- [Cookies Warning Banner Subtab](#)
- [Images Subtab](#)
- [Navigation Subtab](#)
- [Carousel Images Subtab](#)
- [Bottom Banner Images Subtab](#)
- [Color Palettes Subtab](#)
- [Light Colors Subtab](#)

Header Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings control the application header's properties.

Hide Currency Selector

This boolean lets you hide or display the currency selector in the application. Enable this property to hide the selector.

ID	header.notShowCurrencySelector
UI location	Layout > Header
JSON file	Header.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Logo URL

This string lets you specify the location of the logo image file that's displayed at the top of the application.

ID	header.imageUrl
-----------	-----------------

UI location	Layout > Header
JSON file	Header.json
Configuration file (pre-Vinson)	SC.Checkout.Configuration.js

Show Recognized Shopper

This boolean lets you enable or disable the show recognized shopper feature when a session times out.

ID	header.showRecognizedShopper
UI location	Layout > Header
JSON file	Header.json

Cookies Warning Banner Subtab

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you configure the cookie warning banner. To display this banner, enable the Show Cookie Consent Banner property in NetSuite.

ID	cookieWarningBanner
UI location	Layout > Cookie Warning Banner
JSON file	Cookies.json
Configuration file (pre-Vinson)	SC.Configuration.js

User May Dismiss Banner

This boolean lets you specify if shoppers can close the cookie warning banner.

ID	cookieWarningBanner.closable
UI location	Layout > Cookie Warning Banner
JSON file	Cookies.json
Configuration file (pre-Vinson)	SC.Configuration.js

Save in Cookie

This boolean lets you control whether the **User May Dismiss Banner** property is stored in a browser cookie.

ID	cookieWarningBanner.saveInCookie
UI location	Layout > Cookie Warning Banner
JSON file	Cookies.json

Configuration file (pre-Vinson)	SC.Configuration.js
--	---------------------

Anchor Text

This string lets you specify the link text for a modal dialog that uses the **Message** property for its content. By default, this property is set to [Learn More](#).

ID	cookieWarningBanner.anchorText
UI location	Layout > Cookie Warning Banner
JSON file	Cookies.json
Configuration file (pre-Vinson)	SC.Configuration.js

Message

This string lets you specify the modal dialog text. This text displays when a shopper clicks the link defined in the **Anchor Text** property.

ID	cookieWarningBanner.message
UI location	Layout > Cookie Warning Banner
JSON file	Cookies.json
Configuration file (pre-Vinson)	SC.Configuration.js

Images Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you control your general site image properties.

Image Not Available URL

This string lets you define the default image URL for items without an image.

ID	imageNotAvailable
UI location	Layout > Images
JSON file	ApplicationSkeleton.Layout.Images.json
Configuration file (pre-Vinson)	SC.Configuration.js

Navigation Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

These settings let you define the default main navigation links (like Home and Shop) for your site.

This array lets you specify the following information for each link:

- **Text** (string) – the link text shoppers see.
- **HREF** (string) – the navigation link's href attribute. For example: **/search** takes shoppers to the search results page. Parent links ignore this.
- **Level** (string) – where the link appears in the navigation hierarchy.
- **data-touchpoint** (string) – the link's touchpoint, if applicable.
- **data-hashtag** (string) – the link's data hashtag.
- **Class names** (string) – adds extra HTML class names to the link.
- **ID** (string) – the link's internal ID. Parent entries must have an ID so children can reference them.
- **Parent ID** (string) – the parent ID if the link is a child.
- **Placeholder** (string) – adds the Category Tree to your website's navigation menu. Enter the value "Categories" to display categories in the menu.

IDs	navigationData navigationData.text navigationData.href navigationData.level navigationData.dataTouchpoint navigationData.dataHashtag navigationData.classnames navigationData.id navigationData.parentId navigationData.placeholder
UI location	Layout > Navigation
Configuration file (pre-Vinson)	SC.Configuration.js

Carousel Images Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

This array lets you define the carousel images that display at the top of your home page. Each carousel image requires the **URL** property. This string defines the URL of the carousel image. The order of the images in the array determines how they appear in the carousel.

 **Note:** The SCA bundle has three default images in the ShoppingApplication module. You can replace these, but your images must be stored in the file cabinet at Web Site Hosting Files > Live Hosting Files > SSP Applications > [SSP Application] > Development > img.

 **Note:** Carousel styles are configured by Sass files in the source code. If you're using SuiteCommerce or Aconcagua or later, you can change the carousel Sass as part of a theme. Sass files for the carousel are stored in the twitter-bootstrap-sass module of the SuiteCommerce Base Theme.

For more information about working with carousel images, see the following help topics:

- [Configuring Carousel Images](#) – How to set up carousel images with Commerce themes.
- [File Types Recognized in the File Cabinet](#) – List of supported image file types.

- [Displaying Device-Specific Carousel Images](#) – How to show different carousel images for mobile, tablet, or desktop users.

ID	home.carouselImages
UI location	Layout > Carousel Images
JSON file	Home.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Bottom Banner Images Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

This array lets you define the banner images that appear at the bottom of the application. Each banner image requires the **URL** property. This string defines the URL of the bottom banner image. The order of the images in the array defines the order they appear in the banner.

Note: For SuiteCommerce Advanced (Kilimanjaro or earlier), the SCA bundle has three default images in the ShoppingApplication module. These images are located in the ShoppingApplication module. You can replace these default images, but your images must be stored in the file cabinet.

ID	home.bottomBannerImages
UI location	Layout > Bottom Banner Images
JSON file	Home.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Color Palettes Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The properties on the Color Palettes subtab let you can configure the color palettes to use for facets. You can use images or any valid CSS color value. You can use the default color palettes listed in the Color Palettes subtab, or you can configure your own. Before setting up a color palette, make sure you've created a custom list of colors for your matrix items. For details, see the help topic [Custom Lists](#).

To configure a color palette:

1. Go to Commerce > Websites > Configuration.
2. Select the website and domain.
3. Click **Configure**.
4. Select the **Layout** subtab.
5. Select the **Color Palettes** subtab.
6. Click a row in the list.
7. In the **Palette ID** field, enter an ID for the color. Default color palettes use the default ID. For custom palettes, use numbers 1 to 20.

Note: Most sites use only one color palette, so the palette ID is the same for every color. However, you can have use multiple color palettes by entering a different value in the Palette ID field for each color.

8. In the **Color Name** field, enter a color name that matches the name in your custom color list (Customization > Lists, Records & Fields > Lists).
9. In the **Color Value** field, enter a color value. This can be a color name, hex value, or gradient. For best results, use hex values.
Or
10. If you want a color option that doesn't have a hex value, such as an image of fabric, leave the **Color Value** field blank and set the following fields:
 - a. In the **Image Source** field, specify the image URL. For example, /siteImgFolder/colorImage.jpg.
 - b. In the **Image Height** field, enter the image height in pixels.
 - c. In the **Image Width** field, enter the image width in pixels.
11. Click **Add**.
12. Repeat steps 6 to 11 for each color palette you want to add.

Note: To remove a color palette, click its row and select **Remove**.

13. Click **Save**.
14. Select the **Shopping Catalog** subtab.
15. Select the **Facets** subtab.
16. Select an item in the list.
17. In the **Color Palette** field, enter the palette id.
18. From the **Template** field, select facets_faceted_navigation_item_color.tpl.
19. Click **OK**.
20. Click **Save**.

Color Palettes Elbrus Release and Later

The Image fields above are available in Elbrus and later Commerce releases. For earlier versions, you can add the image as an object in the Color Value field. Set the type (image), src (URL), and width and height (in pixels).

```
{type: 'image', src: '/siteImgFolder/colorImage.png', width: 20, height: 20}
```

IDs	layout.ColorPalette layout.ColorPalette.paletteId layout.ColorPalette.colorName layout.ColorPalette.colorValue layout.ColorPalette.imgsrc layout.ColorPalette.imgheight layout.ColorPalette.imgwidth
IDs (pre-Elbrus)	facetsColorPalette

 Note: These properties appear in the Shopping Catalog tab and Facet Color Palettes subtab in Vinson implementations of SCA.	facetsColorPalette.paletteId facetsColorPalette.colorName facetsColorPalette.colorValue
UI location	Layout > Color Palettes
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Light Colors Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This array lets you set color labels in the palette that are close in hue to the background color. The color picker displays an outer border for each of these colors.

ID	layout.lightColors
ID (Pre-Elbrus)  Note: In the Vinson release of SCA, this property is located on the Shopping Catalog tab and Light Colors subtab.	lightColors
UI location	Layout > Light Colors
JSON file	ApplicationSkeleton.Layout.Colors.json
Configuration file (pre-Vinson)	SC.Shopping.Configuration.js

Footer Subtab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This subtab moved to the **Legacy** tab in the **2018.2** release of SuiteCommerce Advanced. See [Footer Subtab](#) for more information about the properties related to Footer.

Legacy Tab

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This tab lets you access properties that may move to Site Management Tools or Extensions. The Legacy Tab is only available in SuiteCommerce implementations.

SuiteCommerce and SCA 2018.1 include the templates you need to access properties on the Legacy tab and subtabs. If you have an implementation of SCA 2018.2 release or later, you don't have the templates necessary to access these properties and you shouldn't use this tab.

This tab includes the following subtabs:

- [Newsletter Subtab](#)
- [Footer Subtab](#)

Newsletter Subtab

Applies to: SuiteCommerce | SuiteCommerce Advanced

In SuiteCommerce Advanced (SCA) Aconcagua and earlier, this subtab is located under the **Shopping** tab. In SCA 2018.2 and later, it's not available.

This feature and its settings work with:

- SuiteCommerce Advanced – Vinson, Elbrus, Kilimanjaro, or Aconcagua
- SuiteCommerce 2018.1

The following settings control the Newsletter opt-in feature.

If a user signs up for the newsletter and there's no matching Customer or Lead records in NetSuite, the application creates a new Lead record. SCA then sets this new record's **Global Subscription Status** to Soft Opt-In. However, NetSuite requires a **Name** or **Company Name** for the new lead, and you set these values. By default, each field is set to **unknown**.

If a user signs up for the newsletter and there's no matching Customer or Lead records in NetSuite, the application creates a new Lead record. SCA then sets this new record's **Global Subscription Status** to **Full Subscription (Not opted in; send all messages)**. However, NetSuite requires a **Name** or **Company Name** for the new lead, and you set these values. By default, each field is set to **unknown**.

More Information: [Newsletter](#)

Generic First Name

This string lets you define the generic first name for new Leads when a user signs up for the newsletter.

ID	newsletter.genericFirstName
UI location	Legacy > Newsletter
UI location (Aconcagua and Earlier)	Shopping > Newsletter
JSON file	NewsLetter.json

Generic Last Name

This string lets you define the generic last name for new Leads when a user signs up for the newsletter.

ID	newsletter.genericLastName
UI location	Legacy > Newsletter
UI location (Aconcagua and Earlier)	Shopping > Newsletter
JSON file	NewsLetter.json

Company Name

This string lets you define the generic company name for new Leads when a user signs up for the newsletter.

ID	newsletter.company
UI location	Legacy > Newsletter
UI location (Aconcagua and Earlier)	Shopping > Newsletter
JSON file	NewsLetter.json

Footer Subtab

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

These settings let you configure the footer navigation links.

Footer Navigation

This array lets you specify which navigation links appear in the footer. You can edit the default links or create new ones.

Each link requires the following properties:

- **Text** (string) – the link text that appears in the footer.
- **URL** (string) – the link's target URL.

IDs	footer.navigationLinks footer.navigationLinks.text footer.navigationLinks.href
UI location	Legacy > Footer
UI location (Aconcagua and Earlier)	Layout > Footer
JSON file	footer.json
Configuration file (pre-Vinson)	SC.Configuration.js

Configuration File Types

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This section explains the different configuration files you may encounter when implementing a Commerce website. The types of files and their purpose differ depending on your implementation.

- [JSON Configuration Files](#) – These topics explain how to develop configuration properties for SuiteCommerce, SuiteCommerce MyAccount, and all Vinson implementations of SuiteCommerce Advanced (SCA) and later.
- [JavaScript Configuration Files](#) – These topics explain how to configure Mont Blanc and Denali implementations of SCA.

JSON Configuration Files

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This topic applies to SuiteCommerce, SuiteCommerce MyAccount, and all Vinson implementations of SuiteCommerce Advanced (SCA) and later.


To set up your Commerce website, you need to use the SuiteCommerce Configuration record. It provides you with a user interface where you can change settings for a specific domain. Any changes you make to this record are saved to a custom record and applied at runtime, as explained below. The SuiteCommerce Configuration record is all that you need to configure properties for a domain.

The user interface of this record relies on the following files:

- **JSON files** – These files list the properties and metadata you can configure for a module. Modules with configuration properties have a **Configuration** subdirectory that holds these JSON files.
- **configurationManifest.json** – When you activate an extension with configuration files, the application combines the individual JSON files into the configurationManifest.json file in the File Cabinet. If you're testing locally, you need to deploy and activate your extension to see the changes. The metadata in this auto-generated file controls how the SuiteCommerce Configuration record looks and works in NetSuite.

i Note: JSON configuration files only affect the SuiteCommerce Configuration record's user interface. They don't configure a domain. To configure properties for a specific domain, see [Configure Properties](#).

The following diagram provides an overview of JSON configuration as it relates to Commerce web stores:

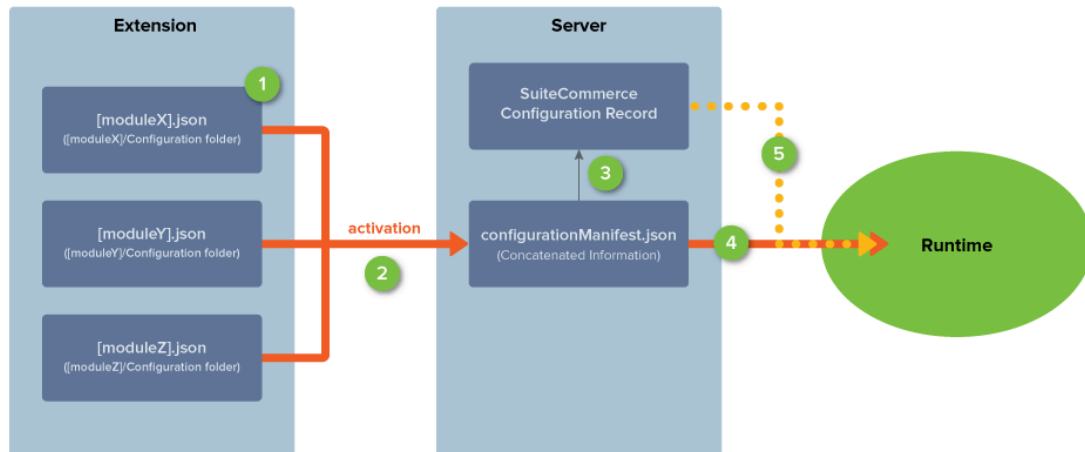

1. Individual JSON configuration files list the properties and metadata used by the SuiteCommerce Configuration record. These files are stored in the modules that use those properties.
2. When you activate an extension for a domain, the application combines all the JSON configuration files into one `configurationManifest.json` file.
3. The metadata in the `configurationManifest.json` file controls what appears in the SuiteCommerce Configuration record's user interface. For each property, it includes things like tab or subtab location, titles, possible values, default values, and more. It can also include logic for displaying certain tabs or subtabs. The `configurationManifest.json` file sets this up for all domains linked to the SSP Application.
4. At runtime, the application uses the default values from the `configurationManifest.json` file to set up configuration properties.
5. If you change and save the SuiteCommerce Configuration record, those values are saved in a custom record and merged with the `configurationManifest.json` data at runtime. These changes override any matching values in the `configurationManifest.json` file for that domain.

Note: The manifest controls the SuiteCommerce Configuration record's user interface and default property values for all domains. When you save changes, you create a custom record for that domain. To update multiple domains, you need to configure each one separately or use the Copy Configuration feature. If you don't save any changes, only the values in the `configurationManifest.json` file are used at runtime.

For example, controls how Case feature properties appear in the SuiteCommerce Configuration record user interface. This includes the tab or subtab location, default value, and possible values for each property. When you deploy and activate your extension, the individual JSON files are combined into one `configurationManifest.json` file. When you open the SuiteCommerce Configuration record, this manifest controls what you see in the user interface. You then use the record to set up your site.



Important: If you're using a SuiteCommerce Advanced release prior to Aconcagua, this process occurs when you deploy your customizations to NetSuite. See [Create JSON Configuration Files](#) for details on how to add new or modify core JSON configuration files.

Create JSON Configuration Files

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This section explains how to create a custom configuration file. This is useful when creating custom configuration properties for your extension. When you deploy your extension to NetSuite and activate it for a domain, the SuiteCommerce Configuration record user interface shows any new additions.



Note: If you're using the Kilimanjaro release of SCA or earlier, these changes happen after you deploy your custom modules. If you're using the Mont Blanc release of SCA or earlier, you need to customize the configuration JavaScript files to make any changes. See the help topic [Develop Your SCA Customization](#) for details.

JSON Configuration Files Schema

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

To create a custom JSON configuration file, you need to use a custom module and build the file with JSON Schema V4. Make sure you follow this schema when you add new properties to a custom module.



Important: Configuration property keys must only contain letters, numbers, and periods. The developer tools won't deploy customizations if the keys have special characters or spaces. Each key also needs to be unique across all configuration files.



Note: This schema follows Schema V4 for JSON, so all your configuration files have a consistent structure and define the required objects. For more information, see json-schema.org.

General Structure

Each configuration file has a root object that defines the module's configuration information. At the root level, every file needs to include the type, group, and properties objects. You can also add a subtab object if you want.

The following example depicts the general structure and order of a JSON configuration file.

```

1 //...
2 {
3   "type": "object",
4   "group": {
5     //...
6   },
7   "properties": {
8     //...
9   }
10 }
11 //...
```

Type

The type object specifies the type of object defined by the configuration file. The value of this object must always be set to object and it must be specified in the first line of the configuration file. This is required to stay compliant with the JSON schema specification.

```
1 //...
2 {
3     "type": "object",
4     //...
5 }
6 //...
```

Group

The SCA Configuration record uses this metadata to determine the tab in which to display configuration properties. The group object defines the following:

- **id** – sets an internal identifier for the tab in the SuiteCommerce Configuration record. The id can only have letters, numbers, and periods—no other special characters or spaces—and it has to be unique across all configuration files.
- **title** – sets the label for the tab shown in the SuiteCommerce Configuration record.
- **description** – gives a description of the group object.

Extra metadata in the group object can also control which groups appear in the SuiteCommerce Configuration record user interface. See [Conditional Display of Groups and Subtabs](#).

The following example, taken from the checkoutApplications.json file, starts the Checkout tab using the group id (checkoutApp). Any subtabs or properties in this tab of the UI need to use this group id.

```
1 //...
2 "group": {
3     "id": "checkoutApp",
4     "title": "Checkout",
5     "description": "Checkout Application configuration"
6 },
7 //...
```

Subtab

The SCA Configuration record uses this metadata to determine the subtab in which to display any nested properties. The subtab object, if used, defines the following:

- **id** – sets an internal identifier for the subtab in the SuiteCommerce Configuration record. The id can only have letters, numbers, and periods—no other special characters or spaces—and it has to be unique across all configuration files.
- **title** – sets the label of the subtab shown in the SuiteCommerce Configuration record.
- **description** – gives a description of the subtab object.
- **group** – sets which group (tab) the subtab belongs to. This is the tab where the subtab appears in the UI.

Extra metadata in the subtab object can also control which subtabs show up in the SuiteCommerce Configuration record user interface. See [Conditional Display of Groups and Subtabs](#).

The following example, taken from the checkoutApplications.json file, starts the Forms subtab using the subtab id (checkoutForms) and group id (checkoutApp). This locates the **Forms** subtab within the **Checkout** tab, as shown in the following image.

```

1 //...
2 {
3   "subtab": {
4     "id": "checkoutForms",
5     "title": "Forms",
6     "description": "Checkout configuration related to web forms.",
7     "group": "checkoutApp"
8   },
9 //...

```

The screenshot shows the NetSuite Checkout configuration interface. The top navigation bar includes links like 'Store Locator', 'My Account', 'Shopping', 'Advanced', 'Checkout' (highlighted), 'Integrations', 'Multi-Domain', 'Search', 'Shopping Catalog', and 'Layout'. Below the navigation bar, there's a 'See Help' link. The main content area is divided into several sections: 'Enable Pickup in Store' with a checkbox and a text input for 'Pickup in Store Sales Order Custom Form ID'; 'Skip Checkout Login' and 'Enable Multiple Shipping' checkboxes; 'Remove PayPal Addresses' checkbox; 'Use standard header and footer' checkbox; 'Enable 3D Secure payments' checkbox; 'Checkout Steps' dropdown menu set to 'Standard'; 'PayPal logo url' text input with the value 'https://www.paypalobjects.com/webstat'; 'Invoice Terms and Conditions' text area with placeholder text; 'Payment Methods' section with 'Forms' (highlighted) and 'Credit Card' tabs; and a bottom section with checkboxes for 'Auto populate name and email', 'Login as guest, show name', 'Login as guest, show email', and 'Show address line 2'.

Conditional Display of Groups and Subtabs

To control which groups (tabs) and subtabs display based on your website scope and enabled features, add conditional display keys to your module and extension JSON files. These keys work for group and subtab objects, but not for individual properties. There are two important considerations when using conditional display keys:

- You can use one or more condition keys to control whether a group or subtab is displayed.
- All the condition keys you use have to be true for the group or subtab to display.

There are two valid website scope keys and three valid feature keys you can use.

Valid Website Scope Keys (case-sensitive)

- `showIfNoneWebsiteScope`
Use this key to conditionally display a group or subtab based on a specific website scope (website type) not implemented in your account.
- `showIfAnyWebsiteScope`
Use this key to conditionally display a group or subtab based on a specific website scope (website type) implemented in your account.

Valid Website Scope Values (case-sensitive)

Website Scope	Value
SuiteCommerce	SUITE_COMMERCE
SuiteCommerce Advanced	SUITE_COMMERCE_ADVANCED
SuiteCommerce MyAccount	SUITE_COMMERCE_MY_ACCOUNT
SuiteCommerce InStore	SUITE_COMMERCE_IN_STORE

Site Builder Full Web Store	FULL_WEB_STORE
Site Builder Information and Catalog with Pricing	INFO_CATALOG_PRICING
Site Builder Information Only	INFO_ONLY

Valid Feature Keys


- **showIfNoneFeatures**
Use this key to conditionally display a group or subtab based on a specific feature not implemented in your account.
- **showIfAnyFeatures**
Use this key to conditionally display a group or subtab based on one or more specific features implemented in your account.
- **showIfAllFeatures**
Use this key to conditionally display a group or subtab based on a specific set of features all implemented in your account.

Valid Feature Values (case-sensitive)

Field IDs are used for feature key values. To find the valid values (Field IDs) for feature keys:

1. In NetSuite, go to Home > Set Preferences.
2. In the Defaults section, enable the Show Internal IDs option.
3. Click **Save**.
4. Go to Setup > Company > Enable Features.
5. Click on the field title of any of the available features to display the field level help. The Field ID is shown at the bottom right portion of the field help text.

Field ID Example:

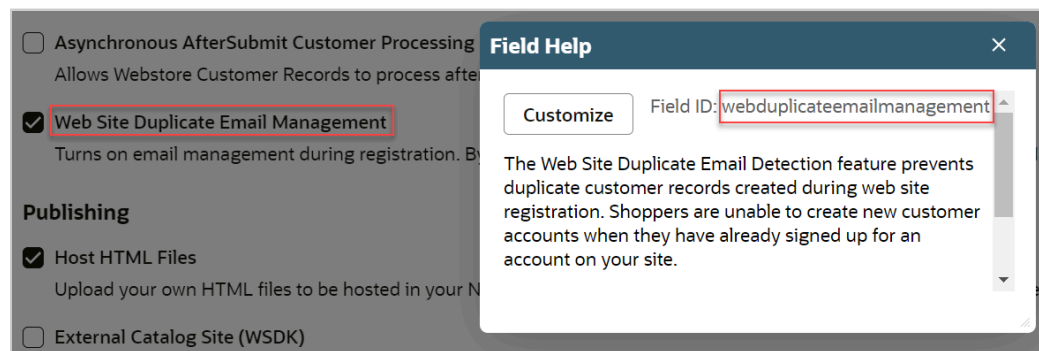

Example:

The sample below shows how to edit the CheckoutApplication.json file so the Checkout group (tab) and Forms subtab only show up if certain website scope and feature keys are set in the group and subtab objects. This file is located in the Configuration folder of your CheckoutAppplication module folder. In the example code below, the Checkout group (tab) and Forms subtab will only display if the following conditions are true:

- You're not using SuiteCommerce In Store
- You're using either SuiteCommerce Advanced or SuiteCommerce
- You're not using the Web Duplicated Email Management feature

- You're using the Multilanguage or Multicurrency feature
- You're using Advanced Site Management and Commerce Search Analytics features on a SuiteCommerce Advanced site

```

1 {
2   "type": "object",
3   "group": {
4     "id": "checkoutApp",
5     "title": "Checkout",
6     "docRef": "bridgehead_4393268798",
7     "description": "Checkout Application configuration"
8     "showIfNoneWebsiteScope": ["SUITE_COMMERCE_IN_STORE"],
9     "showIfAnyWebsiteScope": ["SUITE_COMMERCE_ADVANCED", "SUITE_COMMERCE"],
10    "showIfNoneFeatures": ["webduplicateemailmanagement"],
11    "showIfAnyFeatures": ["multilanguage", "multicurrency"],
12    "showIfAllFeatures": ["suitecommerce_advanced", "advancedsitemanagement", "commerceanalytics"]
13  },
14  "subtab": {
15    "id": "checkoutForms",
16    "title": "Forms",
17    "docRef": "section_4700765645",
18    "description": "Checkout configuration related to web forms.",
19    "group": "checkoutApp",
20    "showIfNoneWebsiteScope": ["SUITE_COMMERCE_IN_STORE"],
21    "showIfAnyWebsiteScope": ["SUITE_COMMERCE_ADVANCED", "SUITE_COMMERCE"],
22    "showIfNoneFeatures": ["webduplicateemailmanagement"],
23    "showIfAnyFeatures": ["multilanguage", "multicurrency"],
24    "showIfAllFeatures": ["suitecommerce_advanced", "advancedsitemanagement", "commerceanalytics"]
25  },
26  ...

```

Resource

The resource object lists data you can use as a resource in the configurationManifest.json file. Later, you can refer to this resource using the source of a properties object to determine the possible choices of a configurable property.

In the following example from categories.json, the resource object defines the commerce category fields to make available as a resource.

```

1 //...
2 "resource": {
3   "fields": {
4     "commercecategory": [
5       "internalid", "name", "description", "pagetitle", "pageheading", "pagebannerurl" //...
6     ]
7   }
8 }
9 //...

```

Properties

The properties object lists the configuration properties for a module. This object can include one or more properties as object literals, which list each property's members and their values, separated by commas.

Each properties object can define values for the following:

- Id
- Group
- Subtab
- Type
- Title

- Description
- Items
- Enum
- Multiselect
- Default
- Mandatory
- Translate
- Source
- Hidden
- Nstype

Id

The id is the key used in the properties object to declare the property. This sets the location of the property in the final configuration object structure. The id is required. The id must only contain alphanumeric characters and periods (no other special characters or spaces), and must be unique across all configuration files. In the following example, the property declaration, `productReviews.maxFlagCount`: `{type: "string", ...}`, results in the following configuration object:

```

1 //...
2 {
3     productReviews: {
4         maxFlagCount: 1
5     }
6 }
7 //...
```

Group

The group attribute specifies the id of the corresponding group object (tab) where the property appears in the UI. This attribute is required.

The following example from `checkoutApp.json` defines the group value of the `checkoutApp.skipLogin` property as `checkoutApp`. This means that this property appears on the **Checkout** tab in the UI:

```

1 //...
2 , "properties": {
3     "checkoutApp.skipLogin": {
4         "group": "checkoutApp",
5         "type": "boolean",
6         "title": "Skip Checkout Login",
7         "description": "Check this box to enable anonymous users to skip the login/register page...",
8         "default": false
9     },
10 //...
```

Subtab

The subtab attribute sets the id of the corresponding subtab object (subtab) where the configurable property appears in the UI.

The following example from `checkoutApp.json` defines the subtab value of the `autoPopulateNameAndEmail` property as `checkoutForms`, defined earlier. Note that this property also declares the group associated with the Checkout tab. Consequently, this property appears on the **Checkout** tab and the **Forms** subtab in the UI:

```

1 //...
2     "autoPopulateNameAndEmail": {
3         "group": "checkoutApp",
4         "subtab": "checkoutForms",
5         "type": "boolean",
6         "title": "Auto populate name and email",
7         "description": "Check this box to enable auto-population of a guest shopper's name...",
8         "default": true
9     },
10 //...

```

Type

The type attribute sets the data type of the configurable property. If specified, the user must enter a value of this type in the SuiteCommerce Configuration record. This must be a valid JSON-supported type: integer, string, boolean, array, or object. This attribute is required.

The following example from checkoutApp.json defines the checkoutApp.skipLogin property is defined as a boolean value:

```

1 //...
2 , "properties": {
3     "checkoutApp.skipLogin": {
4         "group": "checkoutApp",
5         "type": "boolean",
6         "title": "Skip Checkout Login",
7         "description": "Check this box to enable anonymous users to skip the login/register page...",
8         "default": false
9     },
10 //...

```

Title

The title attribute sets the label that appears in the SuiteCommerce Configuration record. In the preceding example, the SuiteCommerce Configuration record displays the checkoutApp.skipLogin property as **Skip Checkout Login**. This attribute is required.

Description

The description attribute sets a string that displays as help text when a user points to a label in the SuiteCommerce Configuration record.

Any property, subtab, or group can declare a description. The SuiteCommerce Configuration record displays the description on simple properties only.

Items

If a property's type is set to an array, items is required to define the different properties of the table in the SuiteCommerce Configuration record.

The following example from facets.json initializes Facets as "type" : "array". This displays as an array of properties in the SuiteCommerce Configuration record. The items attribute defines metadata to further define each configurable property (column), as shown in the image below.

```

1 //...
2 "facets": {
3     "group": "catalog",
4     "type": "array",
5     "title": "Facets",
6     "docRef": "bridgehead_4393383668",

```

```

7      "description": "Facets editor declarations",
8      "items": {
9          "type": "object",
10         "properties": {
11             "id": {
12                 "type": "string",
13                 "title": "item field id",
14                 "description": "NetSuite item field id, something like 'custitem31'",
15                 "mandatory": true
16             },
17             "name": {
18                 "type": "string",
19                 "title": "Name",
20                 "translate": true,
21                 "description": "Label for this facet in the UI",
22                 "mandatory": true
23             },
24             "url": {
25                 "type": "string",
26                 "title": "Url",
27                 "description": "Url fragment for identifying the facet in the url.",
28             },
29         },
30     },
31     //...

```

Structured Data Markup • Recently Viewed Items • Item Options Templates • Facets SEO • Facets Delimiters • **Facets** • Product Details Information • Multi-Im

[See Help](#)

☐ Facets as URL Parameters

item field id	Name	Priority	Behavior	Template	Color Palette	Collapsed	Non Collapsible	Show Heading	Title Format	Title Separator	Parser	Is URL Parameter?
pricelevel5	Price		range	facets_faceted_navigation_item_range.tpl			Yes		Price \$(1) - \$(0)	,	currency	Yes
custitem31	Color	1	multi	facets_faceted_navigation_item_color.tpl	wolfeTest			Yes			default	
		1		facets_faceted_navigation_item.tpl							default	

Enum

The enum attribute sets the set of available values for a configurable property. By default, when enum specifies multiple values, the user can only select one of the possible values. This generates a list of possible selections in the UI.

Note: Adding the enum attribute to a property renders that property as a **select** or **multi-select** field in the SuiteCommerce Configuration record UI. To render a property as a multi-select field, set the multiselect attribute to true.

The following example from facets.json specifies five possible values for the facetsSeoLimits.options property (order, page, show, display, or keywords):

```

1 //...
2 "facetsSeoLimits.options": {
3     "type": "string",
4     "group": "catalog",
5     "subtab": "facetsSeoLimits",
6     "title": "Options",
7     "description": "Description of this property",
8     "enum": ["order", "page", "show", "display", "keywords"],
9     "default": ["page", "keywords"],
10    "multiselect": true
11 },
12 //...

```

Multiselect

The `multiselect` attribute specifies that a configurable property can contain multiple values in the UI. If set to `true`, users can select multiple values as defined in `enum`. This generates a multi-select list in the UI.

In the previous example, the `facetsSeoLimits.options` property is set to accept multiple values with the following code:

```
1 | "multiselect": true
```

Consequently, users can choose multiple options from the SuiteCommerce Configuration record UI. The property can also accept multiple default values as defined in the `default` attribute.

Default

The `default` attribute sets default values based on the property type you defined earlier. These values automatically populate fields in the SuiteCommerce Configuration record UI. Defaults load in the application at runtime. These defaults only get replaced if you save changes in the SuiteCommerce Configuration record. If nobody saves a record, the application uses the defaults you set here.

In the previous example, the default values for the `facetsSeoLimits.options` property are `page` and `keywords`.

Mandatory

The `mandatory` attribute specifies that a property is required. In the following example from `facets.json`, the `name` property is set to `true`. Consequently, the attribute is required.

```
1 | //...
2 | "name": {
3 |   "type": "string",
4 |   "title": "Name",
5 |   "translate": true,
6 |   "description": "Label for this facet in the UI",
7 |   "mandatory": true
8 | },
9 | //...
```

Translate

The `translate` attribute specifies that the `title` and `description` attribute values must be translated. If this is set to `true`, its default values are translated. In the preceding example, the `name` property's `title` and `description` fields are set to be translated.

Source

The `source` attribute declares the data source to be used as possible choices when configuring the property in the UI. This can include a variable that refers to the `resource` object declared within the JSON file (or within another JSON file that makes up the `configurationManifest.json`).



Note: Adding the `source` attribute to a property renders that property as a **select** or **multi-select** field in the SuiteCommerce Configuration record. To render a property as a multi-select field, set the `multiselect` attribute's value to `true`.

The following example from `categories.json` uses the `source` attribute to refer to a local resource object (`fields.commercecategory`). In this example, `$resource` references the `fields.commercecategory` array:

```

1 //...
2 "categories.sideMenu.sortBy": {
3   "group": "integrations",
4   "subtab": "categories",
5   "type": "string",
6   "title": "Side menu > sort by",
7   "description": "Enter the Category record field to act as the primary sort field in the Categories sidebar.",
8   "source": "$resource.fields.commercecategory",
9   "default": "sequencenumber"
10 //...

```

The source attribute can also refer to data within some custom records in NetSuite via SuiteScript. In this case, source references elements of a specific record type. The variable used must match the Internal ID of an applicable custom record types.

The following fictitious example uses the source attribute to provide a list of all support issues within NetSuite (record type: Issue):

```

1 //...
2 "issue": {
3   "type": "string",
4   "title": "Support Issues",
5   "source": "issue"
6 }
7 //...

```

Hidden

The hidden attribute specifies that a property is hidden and not shown in the user interface. If set to true, the property's default values are still present in configurationManifest.json, but the user will not be able to see or edit the property using the SuiteCommerce Configuration record.

Nstype

The nstype attribute specifies a concrete NetSuite widget for editing a type parameter. If a text field is too long for normal text entry, the user can declare "nsType": "textarea" and the user interface will show a text area instead a normal text entry.

The following example from checkoutApp.json declares the nstype:

```

1 //...
2 "checkoutApp.invoiceTermsAndConditions": {
3   "group": "checkoutApp",
4   "type": "string",
5   "nsType": "textarea",
6   "title": "Invoice Terms and Conditions",
7   "description": "Invoice payment method terms and conditions text",
8   "default": "<h4>Invoice Terms and Conditions</h4.><p>Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.<p>"
9 },
10 //...

```

Configuration Modification Schema

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

This section describes the configuration modification schema. Follow these steps to create a JSON modification file.

Step 1: Add the Type Object

The type specifies the type of object defined by the configuration file. The value of this object must always be set to object. This is required to be compliant with the JSON schema specification.

```
1 {
2   "type": "object",
3 }
```

Step 2: Add the Modifications Array

When you deploy to NetSuite, the developer tools use the modifications listed in this array to create the configurationManifest.json. Each modifications object requires the target and action components. Some actions require an addition value component.

This declares the modifications to include when you deploy to NetSuite.

```
1 {
2   "type": "object",
3   "modifications": [
4
5   ]
6 }
```

Step 3: Add the Target Attribute

The target attribute contains a string representing a JSONPath query. The elements returned are the targets to be affected by the action. In this example, when you deploy your customizations, the JSONPath query searches for the enum property of the target addToCartBehavior property.

```
1 {
2   "type": "object",
3   "modifications": [
4     {
5       "target": "$.properties.addToCartBehavior.enum",
6     }
7   ]
8 }
```



Note: For more information about how to build a target JSONPath query, see <https://github.com/s3u/JSONPath>.

Step 4: Add the Action Attribute

The action attribute indicates the operation to apply over each element of the target returned by the JSONPath query. Possible actions are:

- **add** – adds a new element to the user interface, such as a value, a property, or an option. Only object, array, or string elements can be returned by the target query when using the **add** action, and each type results in a different behavior.
- **replace** – overwrites values in a configuration file. The target query can only return a number, string, boolean, or null.
- **remove** – deletes an element from an array. The target query only can return a number, string, boolean, or null inside an array.

This example includes the add action.

```

1 {
2   "type": "object",
3   "modifications": [
4     {
5       "target": "$.properties.addToCartBehavior.enum",
6       "action": "add",
7     }
8   ]
9 }

```

Step 5: Add the Value Attribute

The value attribute specifies the value to be added or replaced. Only the **add** and **replace** actions require this attribute.

When using the **add** action, the value attribute behaves differently depending on the target type:

- **Target is an Object** – The value attribute merges into the target. If the value has a property with the same name as a value in the target, the target value gets overwritten.
- **Target is an Array** – This value attribute is pushed into the array. This value can be any valid JSON element.
- **Target is a String** – This value attribute gets concatenated to the end of the target string. This value must be a number or a string.

The following example adds the `newOption` configuration option to the `addToCartBehavior` list in the user interface.

```

1 {
2   "type": "object",
3   "modifications": [
4     {
5       "target": "$.properties.addToCartBehavior.enum",
6       "action": "add",
7       "value": "newOption"
8     }
9   ]
10 }

```

Use Case Examples

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Add a New Default Property to an Array

This example uses the **add** action to introduce a new property to the object describing a `resultsPerPage` option. When you deploy this customization, the JSONPath query searches for the `resultsPerPage.items` property whose value is 12 per page. This example modification then adds `newProperty` to the array.

```

1 {
2   "type": "object",
3   "modifications": [
4     {
5       "target": "$.properties.resultsPerPage.default[?(@.items == 12)]",
6       "action": "add",
7       "value": {"newProperty" : "new property value"}
8     }
9   ]
10 }

```

After deploying this modification, the code in the configurationManifest.json looks like this:

```

1  ...
2  "default": [
3    {
4      "items": 12,
5      "name": "Show $(0) products per page",
6      "newProperty" : "new property value"
7    },
8  ...

```



Note: This example assume you have created a custom newProperty using the JSON configuration schema. For details, see [JSON Configuration Files](#).

Add Text to an Existing String

This example uses the **add** action to append text to a string, such as a label of a property within an array. When you deploy this customization, the JSONPath query searches for the `resultsPerPage.default` property whose `item` value is 12. This example modification then appends **!!!** to the end of the string in the default name property.

```

1  {
2    "type": "object",
3    "modifications" : [
4      {
5        "target": "$.properties.resultsPerPage.default[?(@.items == 12)].name",
6        "action": "add",
7        "value": "!!!"
8      }
9    ]
10 }

```

After deploying this modification, the code in the configurationManifest.json looks like this:

```

1  ...
2  "default": [
3    {
4      "items": 12,
5      "name": "Show $(0) products per page!!!",
6    },
7  ...

```

After deploying this modification, the SuiteCommerce Configuration record looks like this:

items *	Name *	Is default
12	Show \$(0) per page!!!	
24	Show \$(0) per page	Yes
48	Show \$(0) per page	

Add a New Default Option to an Array

This example uses the **add** action to introduce a new configuration option within an array. When you deploy this customization, the JSONPath query searches for the `resultsPerPage.default` property. This modification then adds a new row to the table for a default configuration of 5 items per page.

```

1 {
2   "type": "object",
3   "modifications": [
4     {
5       "target": "$.properties.resultsPerPage.default",
6       "action": "add",
7       "value": {
8         "items": 5,
9         "name": "Show 5 products per page"
10      }
11    }
12  ]
13 }

```

After deploying this modification, the code in the `configurationManifest.json` looks like this:

```

1 ...
2 "default": [
3   {
4     "items": 12,
5     "name": "Show $(0) products per page"
6   },
7   {
8     "items": 24,
9     "name": "Show $(0) products per page",
10    "isDefault": true
11  },
12  {
13    "items": 48,
14    "name": "Show $(0) products per page"
15  },
16  {
17    "items": 5,
18    "name": "Show 5 products per page"
19  }
20 ],
21 ...

```

After deploying this modification, the SuiteCommerce Configuration record looks like this:

Type Ahead •	Result Sorting	Search Results Per Page	Search Results •	Result Display Options
Search Results Per Page See Help				
items *	Name *		Is default	
12	Show \$(0) per page			
24	Show \$(0) per page		Yes	
48	Show \$(0) per page			
5	Show 5 products per page			

Change the Default Value of a Property

This example uses the **replace** action to overwrite the default value of a property. When you deploy this customization, the JSONPath query searches for the `newsletter.genericFirstName` and `newsletter.genericLastName` properties. This modification replaces the current value, `unknown`, with `FirstName` and `LastName`, consecutively.

```

1 {
2   "type": "object",
3   "modifications" : [
4     {
5       "target": "$.properties[newsletter.genericFirstName].default",
6       "action": "replace",
7       "value": "FirstName"
8     },
9     {
10      "target": "$.properties[newsletter.genericLastName].default",
11      "action": "replace",
12      "value": "LastName"
13    },
14  ]
15 }

```

After deploying this modification, the code in the configurationManifest.json looks like this:

```

1 ...
2 "properties": {
3   "newsletter.genericFirstName": {
4     "group": "shoppingApplication",
5     "subtab": "newsletter",
6     "type": "string",
7     "title": "Generic first name",
8     "description": "Enter the generic first name to populate...",
9     "default": "FirstName",
10    "id": "newsletter.genericFirstName"
11  },
12  "newsletter.genericLastName": {
13    "group": "shoppingApplication",
14    "subtab": "newsletter",
15    "type": "string",
16    "title": "Generic last name",
17    "description": "Enter the generic last name to populate...",
18    "default": "LastName",
19    "id": "newsletter.genericLastName"
20  },
21  ...

```

Change the Label of a Subtab



Note: This procedure is similar for making changes to a tab. To replace the label of a tab, use the group property.

This example uses the **replace** action to overwrite the title of a subtab. When you deploy this customization, the JSONPath query searches for the subtab with the id newsletter. This modification then changes the title from Newsletter to Email Newsletter.

```

1 {
2   "type": "object",
3   "modifications" : [
4     {
5       "target": "$[?(@property == 'subtab' && @.id == 'newsletter')].title",
6       "action": "replace",
7       "value": "Email Newsletter"
8     }
9   ]
10 }

```

After deploying this modification, the code in the configurationManifest.json looks like this:

```

1 ...
2 {
3   "type": "object",

```

```

4  "subtab": {
5      "id": "newsletter",
6      "group": "shoppingApplication",
7      "title": "Email Newsletter",
8      "docRef": "bridgehead_4685031554",
9      "description": "Configuration of the Newsletter subscription"
10 },
11 ...

```

Remove a Configuration Option

This example uses the **remove** action to remove an option for a property. When you deploy this customization, the JSONPath query searches for the addToCartBehavior property's enum array. This modification removes the showMiniCart option in the user interface.

```

1  {
2      "type": "object",
3      "modifications": [
4          {
5              "target": "$.properties.addToCartBehavior.enum[?(@ == 'showMiniCart')]",
6              "action": "remove"
7          }
8      ]
9  }

```

After deploying this modification, the code in the configurationManifest.json looks like this:

```

1  ...
2  "properties": {
3      "addToCartBehavior": {
4          "group": "catalog",
5          "subtab": "cart",
6          "type": "string",
7          "title": "Add to cart behavior",
8          "description": "Choose the action that occurs when the user adds an item to the cart.",
9          "default": "showCartConfirmationModal",
10         "enum": [
11             "goToCart",
12             "showCartConfirmationModal"
13         ],
14         "id": "addToCartBehavior"
15     },
16     ...

```

Hide a Property from the User Interface

This example uses the **add** action to introduce the hidden property and set it to true.



Important: Do not customize the source code to remove any configurable properties included with SCA. Removing configurable properties will result in errors and can break your site. To prevent a property from appearing in the SuiteCommerce Configuration record's user interface, use the add action to introduce the hidden element to the desired property. This maintains the required code in the configurationManifest.json, but removes the property from the user interface.

When you deploy this customization, the JSONPath query searches for the newsletter.companyName. This modification introduces the hidden property and sets it to true. This action prevents the property from appearing in the user interface, but maintains the code in configurationManifest.json.

```

1  {
2      "type": "object",
3      "modifications": [

```

```

4      {
5          "target": "$.properties[newsletter.companyName]",
6          "action": "add",
7          "value": {"hidden": "true"}
8      }
9  ]
10 }

```

After deploying this modification, the code in the configurationManifest.json looks like this:

```

1  ...
2  "newsletter.companyName": {
3      "group": "shoppingApplication",
4      "subtab": "newsletter",
5      "type": "string",
6      "title": "Company Name",
7      "description": "Enter the generic Company name to populate...",
8      "default": "unknown",
9      "hidden": "true",
10     "id": "newsletter.companyName"
11 }
12 ...

```

JavaScript Configuration Files

i Applies to: SuiteCommerce Advanced

This topic applies to the Mont Blanc and Denali releases of SuiteCommerce Advanced (SCA) only.

For these implementations, configuration files are stored as JavaScript files for each application module. Each of the configuration JavaScript files are contained within an application module. Each file is compiled and deployed as part of the application. To edit a configuration file, you must create a custom version of its application module.

i Note: For information about configurable properties, see [Configuration Properties Reference](#).

There are several files used to configure frontend behavior and a single file backend configuration file to modify server-side behavior.

Frontend Configuration

The SC.Configuration.js file holds general configuration properties used by SCA. Each application-specific configuration file depends on this file, and any JavaScript file in a module that needs configuration properties directly also includes it as a dependency.

SCA uses the following configuration files to control how the frontend application works. They all return a Configuration object that other modules use.

- **SC.Configuration** – sets up configuration objects and properties used by all SCA applications globally. It's part of the SCA application module.
- **SC.Checkout.Configuration** – sets up configuration objects and properties for the Checkout application. It's defined in the CheckoutApplication module.
- **SC.MyAccount.Configuration** – sets up configuration objects and properties for the My Account application. It's defined in the MyAccountApplication.SCA module.
- **SC.Shopping.Configuration** – sets up configuration objects and properties for the Shopping application. It's defined in the ShoppingApplication module.

For a detailed example on how to customize frontend configuration files in a pre-Vinson implementation, see the help topic [Extend Frontend Configuration Files](#).

Backend Configuration

The Configuration.js file in the SspLibraries module sets the backend NetSuite configuration properties for SCA. By changing this file, you can set up different server-side objects. Changing these objects can also help your site run faster by limiting search results. There is one Configuration.js file for all applications, but some objects only apply to certain applications (like Checkout).

For a detailed example on how to customize the backend configuration file in a pre-Vinson implementation, see the help topic [Extend the Backend Configuration File](#).

Site Management Tools Configuration

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

This section covers how to use templates and areas in Site Management Tools (SMT), set up custom preview screen sizes, manage your website content with CMS records, and more. For details, explore the following topics:

- [Site Management Tools Templates and Areas](#)
- [Site Management Tools Custom Preview Screen Sizes](#)
- [Working with Site Management Tools Landing Pages in a Sandbox Account](#)
- [Changing Site Management Tools to Use a Different Hosting Root](#)
- [Configuring Escape to Log In](#)
- [Internationalization of Site Management Tools Administration](#)

Site Management Tools Templates and Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

Template files control the structure of your website pages. These files contain HTML markup and placeholders for data and scripts. Site Management Tools (SMT) uses areas defined within the template files to determine the locations on a page where you can add and manage website content. For more information about using SMT, see the help topic [Site Management Tools Overview](#).

SMT areas are <div> tags that are defined in a template file. The <div> defines the location on the page where you can add content. Commerce web stores include page template files that have pre-configured areas. You can use these areas as they are defined, edit the areas, or add new areas to the templates.

To find out more about areas and templates, explore the following help topics:

- [Area and Scope](#)
- [Templates and Areas](#)

Area and Scope

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

You define areas by adding div tags to the template. Site Management Tools (SMT) uses the area div tag to find each area's location on the page and set the scope. The scope of an area determines which website pages show the assigned content. For example, if the scope of an area on the product detail page is set to **this page**, then any content added to that area displays only for that product. When you add content, each area is labeled with its scope so you know how and when the content appears. The three scope types are:

Note: Category pages support content in areas with **page type** and **all pages** scope. Areas with **this page** scope are not supported on category pages.

- [All Pages Areas](#)

- [Page Type Areas](#)
- [This Page Areas](#)

Each div tag has the two following attributes that name the area and set its scope:

- **data-cms-area** – The value of the data-cms-area attribute is a user-defined name given to the area. If you want to add an area to the main part of the page, set the value of the data-cms-area attribute to main, main-header, or main-footer. For a sidebar area, set the value of the data-cms-area to sidebar, sidebar-right, or sidebar-left, and so on. Remember, this is a user-defined value that names the area, so use the naming convention that works best for you. For example, you can name the area by its purpose or where it appears on the page.

Note: The data-cms-area name only defines the area in template files and doesn't display on your website.

- **data-cms-area-filters** – This attribute sets the area's scope, meaning on which pages display content in that area. Scope types are defined as follows:

Area Scope	data-cms-area-filters	Description
All Pages	global	The All Pages area displays content on any page, provided the page has an area with the same data-cms-area.
Page Type	page_type	The Page Type area displays content on any page of the designated type, for example, product list or product detail.
This Page	path	The This Page area is the most specific area with regard to when content displays. Content displays only on the page specified by the path in the page URL. This is the type of area to use if you want to display content for a specific product, facet, or home page.

Each page template can have multiple areas. For example, you may want to add one or more **This Page** areas and a **All Pages** area to your home page. You may want to include the same **All Pages** area on the Item Detail and Facet Browse pages. You may also want to include one or more **This Page** and **Page Type** areas on the **Facet Browse** and **Item Detail** pages. Pages can have multiple areas.

Note: Areas display visually in Edit mode when you add content to the page. The label for each area indicates the scope of that area.

All Pages Areas


You create an All Pages area by setting the data-cms-area-filters attribute in the area div to global. All Pages areas display on any page that has a global area with the same data-cms-area name. For example, if you set data-cms-area to main in the, home.tpl, facets_facet_browse.tpl, and item_details.tpl template files, any content you add to that area appears on the following pages:

- The Home Page
- All Facet Browse Pages
- All Item Detail Pages

The content is displayed on those pages because each one has a global area named "main". The following code sample illustrates this area:

```
1 | <div data-cms-area="main" data-cms-area-filters="global"></div>
```

By adding this area div to one or more templates, you create a new All Pages area on the template. In the following screenshot, you see two All Pages areas.

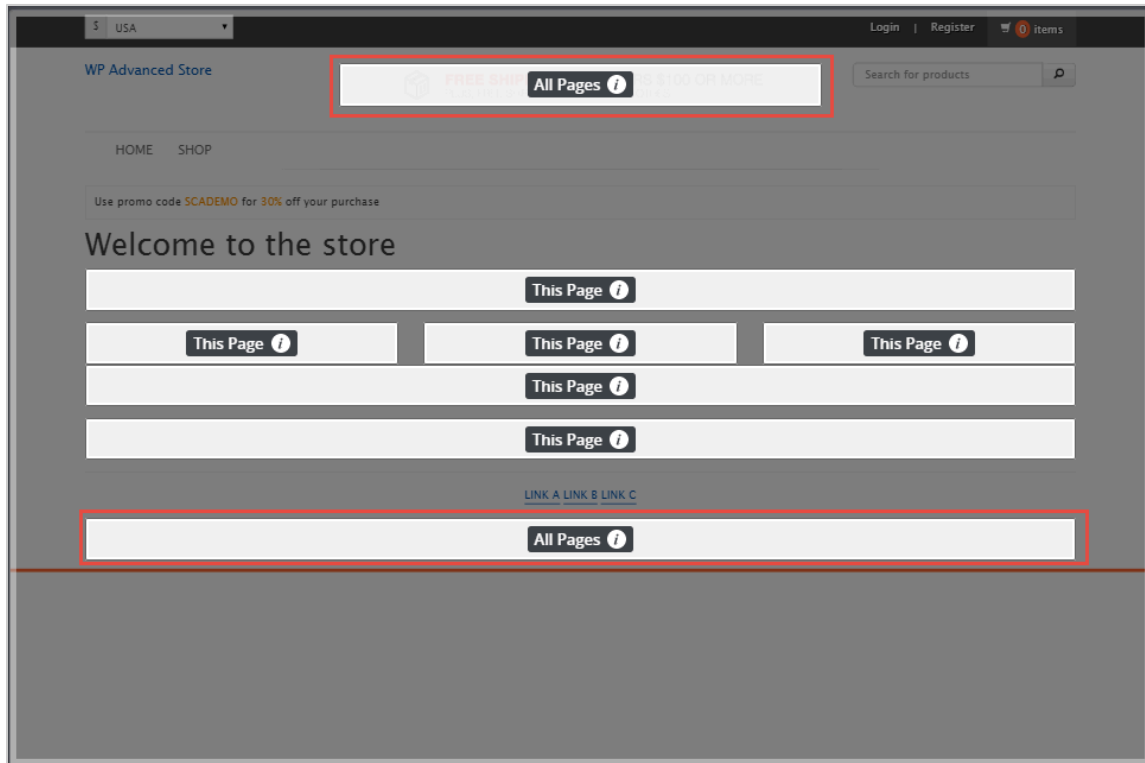

These two area divs are defined as follows:

```
1 | <div data-cms-area="header_banner" data-cms-area-filters="global"></div>
2 | <div data-cms-area="global_banner_footer" data-cms-area-filters="global"></div>
```


In this example, the divs are added to the header and footer template files. This way, the areas are available on all shopping pages without adding them to every template file.

Page Type Areas

Areas with page type scope are identified by the type of page, for example Product Detail pages or Facet Browse pages. You create an area with page type scope by setting data-cms-area-filters attribute to page_type. The page type can be the home page, Product Detail page, or Facet Browse page. To do this, modify the product details template file to add an area. Set the value of data-cms-area to item_info_bottom, and set the value of data-cms-area-filters to page_type. The div code for this area is as follows:

```
1 | <div data-cms-area="item_info_bottom" data-cms-area-filters="page_type"></div>
```

After you add this area div to the product detail page template, it's available on every product detail page. Any content you add in this area displays for every product. The area on the page looks like this:

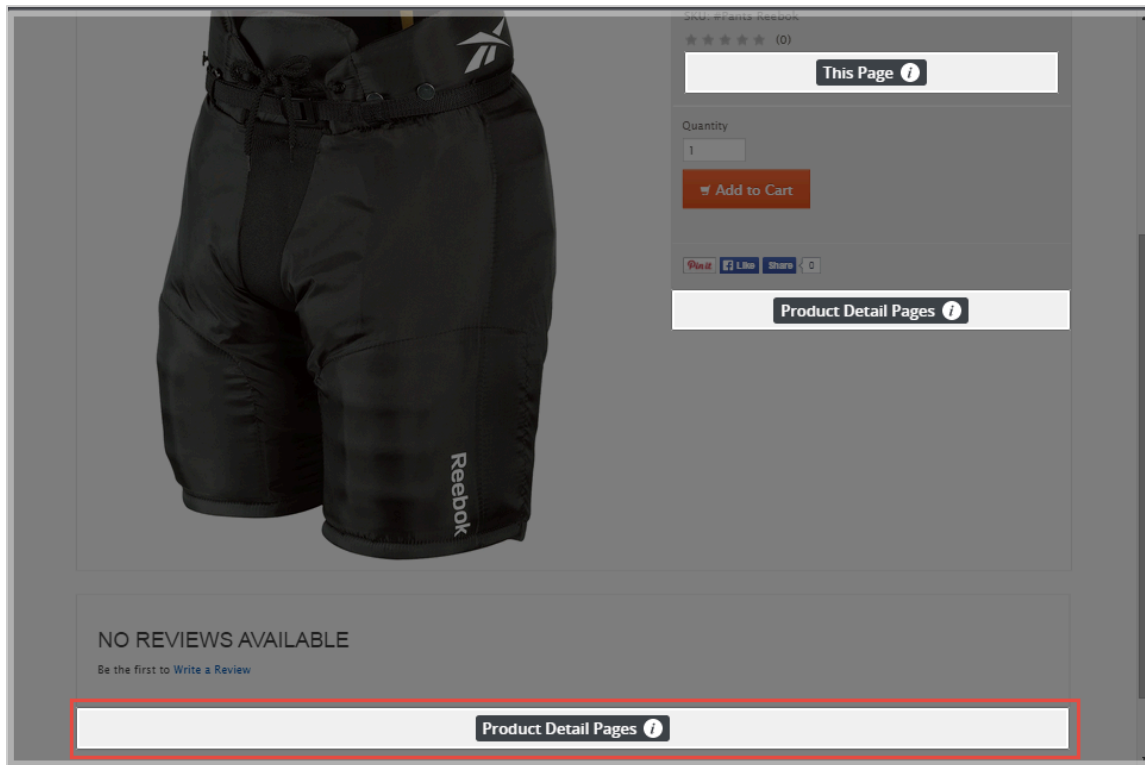


Notice that in this example, the area is labeled with the page type: **Product Detail Pages**. This lets you know that any content you add to that area displays on every product detail page.

This Page Areas

You create This Page areas by setting the value of the data-cms-area-filters to path. The This Page area is the most specific of the three areas because it only displays for a particular page path. The path is the URL without the host or any query string parameters. For example, you update the product detail template and add an area with data-cms-area set to item_info and data-cms-area-filters set to path.

When you add content to the area, it's tied to that path. For example, the URL to Reebok Pants is `http://website.name.com/pantsreebok`. The path to this product is `/pantsreebok`. Even though the page is a product detail page, content in that area only displays when customers visit `/pantsreebok`. The content won't display any other product. The div segment for this area can be defined as follows:

```
1 | <div data-cms-area="item_info" data-cms-area-filters="path">
```

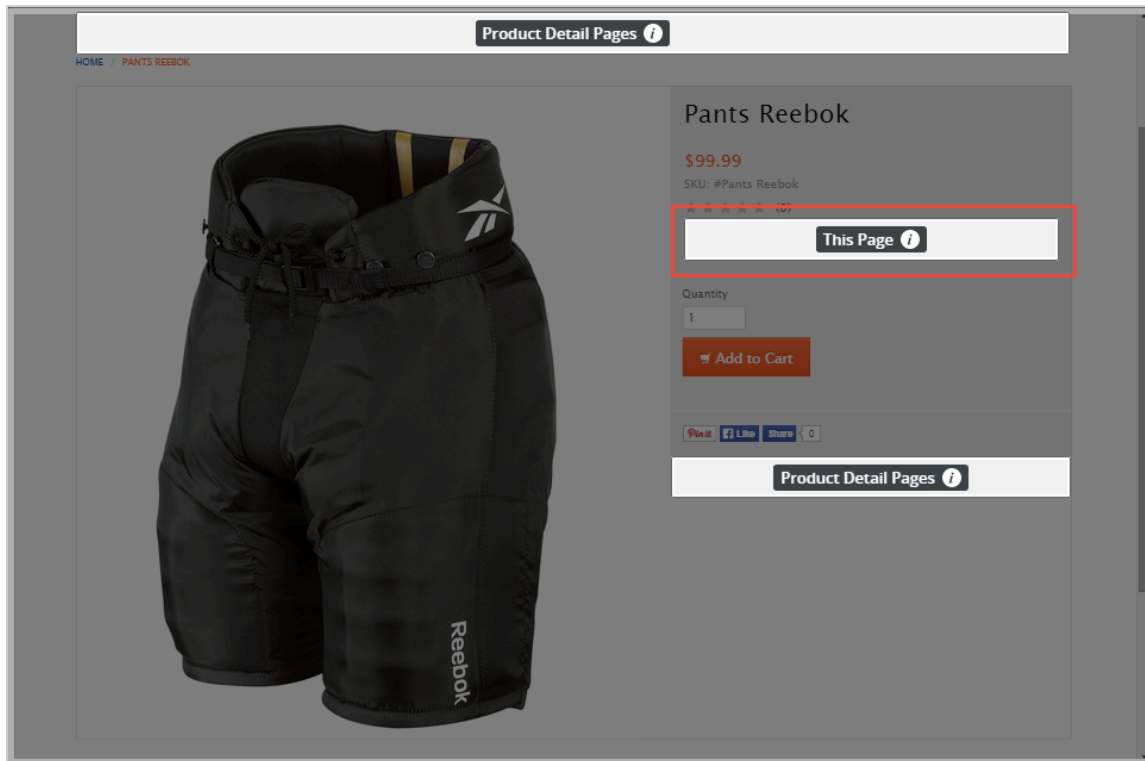

A more sophisticated use of a This Page area is to apply it to a facet search page. This way, you can display content that's specific to the facet a customer is viewing. For example, the path to a facet search of black items is `/color/black`. When you place content in a This Page area, it only displays when a customer views items with the black facet filter.

To go a step further, the path for black pants is `/category/pants/color/black`. After you add content to a This Page area, the content only displays when a customer views the pants page with the black facet filter.

Facet Order in URLs

When you use facet filters on a search page, the URL always lists the facets in the same order, no matter which order a customer selects them. For example if one customer filters by pants first and then black, and another customer filters by black first and then by pants, the URL for both customers is identical. This means that the path for black pants is always `/category/pants/color/black`, no matter which order customers select the filters.

Templates and Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

Templates control how your website pages are structured. Templates contain HTML markup and placeholders for data and scripts. Site Management Tools (SMT) uses areas defined in the templates to determine where you can add and manage content on a page. This lets you quickly add content and create different page layouts without having to build custom templates. However, if the default page layouts do not fully meet your needs, you can customize the modules to create your own areas or change

the existing ones. For example, you may want to change an area's scope to Page Type or add a new All Pages area across all shopping pages.

For more information about templates and areas, explore these topics:

- [SuiteCommerce Base Theme Templates and Areas](#)
- [Header and Footer Module Default Areas](#)
- [Home Module Default Areas](#)
- [Breadcrumb Default Areas](#)
- [Facets Module Default Areas](#)
- [Item Details Module Default Areas](#)
- [Landing Page Default Areas](#)
- [Customizing Template Files](#)
- [Site Management Tools Templates and Areas](#)
- [Area and Scope](#)

SuiteCommerce Base Theme Templates and Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

This topic provides a comprehensive list of the template areas included in the 2022.1 SuiteCommerce Base Theme.

These template areas are also available in version 3.3.0 or later of the following Commerce themes:

- [Manor Theme](#)
- [Posh Theme](#)
- [Summit Theme](#)

Note: Previous versions of the Base Theme may have additional areas or may be missing some of the areas listed in this topic.

These template areas work with Site Management Tools (SMT), but you can also target them when updating a page with an extension. See the help topic [Overview](#) for more information.

See the following help topics for specific information about template files and areas:

- [Header and Footer Module Default Areas](#)
- [Home Module Default Areas](#)
- [Breadcrumb Default Areas](#)
- [Facets Module Default Areas](#)
- [Item Details Module Default Areas](#)
- [Landing Page Default Areas](#)
- [Customizing Template Files](#)

The following table lists the template files and areas available for the 2022.1 SuiteCommerce Base Theme:

Module	Template File	Area Name	Area Scope	Area Type	
Cart	cart_detailed.tpl	cart_detailed_cms_area_1	this page	Shopping cart pages	
		cart_detailed_cms_area_2			
		cart_detailed_cms_area_3			
	cart_summary.tpl	cart_summary_cms_area_1			
		cart_summary_cms_area_2			
		cart_summary_cms_area_3			
Case	case_list.tpl	banner_caselist	all pages	Support cases page	
CMSadapter	cms_landing_page.tpl	cms-landing-page-placeholder-page-type	page type	Landing pages	
		cms-landing-page-placeholder-path	this page		
		cms-landing-page-placeholder-third-row-half-1			
		cms-landing-page-placeholder-third-row-half-2			
		cms-landing-page-placeholder-fourth-row-quarter			
		cms-landing-page-placeholder-fifth-row-three-quarter			
		cms-landing-page-placeholder-fifth-row-quarter			
		ErrorManagement			error_management_page_not_found.tpl
error_management_page_not_found_cms_area_2					
Facets	facets_facet_browse.tpl	item_list_banner	page type	Facet browse pages	
		facet_navigation_top			
		facet_navigation_bottom			
		facets_facet_browse_cms_area_1	this page		
		item_list_banner_top			
		facets_facet_browse_cms_area_2			page type
		item_list_banner_bottom			
Footer	footer.tpl	global_banner_footer1	all pages	Footer	
		global_banner_footer2			

Module	Template File	Area Name	Area Scope	Area Type
		global_banner_footer3		
		global_banner_footer4		
		global_banner_footer5		
		global_banner_footer-alternative1		
		global_banner_footer-alternative2		
		global_banner_footer-alternative3		
		global_banner_footer-alternative4		
		global_banner_footer-alternative-full		
		global_banner_footer-twocols4		
		global_banner_footer-twocols8		
	footer_simplified.tpl	simplified_footer_banner		
GlobalViews	global_views_breadcrumb.tpl	breadcrumb_top		Breadcrumb navigation section
		breadcrumb_bottom		
GlobalViewsOnline		breadcrumb_top		
		breadcrumb_bottom		
Header	header.tpl	header_banner_top		Header
		header_banner_bottom		
	header_simplified.tpl	simplified_header_banner		
Home	home.tpl	home_cms_area_1	this page	Home page
		home_cms_area_2		
		home_cms_area_3		
		home_cms_area_4		
	home_cms.tpl	home_banner_top		
		home_main		
		home_banner_1		
		home_banner_2		
		home_banner_3		
		item_list_banner_bottom		
		home_bottom		

Module	Template File	Area Name	Area Scope	Area Type
Invoice	invoice_open_list.tpl	banner_invoiceopenlist	all pages	Invoices page
LoginRegister	login_register_login.tpl	cms_login_register_login_area	this page	Login/Register page
	login_register_register.tpl	cms_login_register_register_area		
MyAccountApplication	myaccount_layout.tpl	banner_myaccount_bottom	all pages	My Account pages
	case_list.tpl	global_banner_case-top		
	invoice_open_list.tpl	global_banner_invoice-top		
OrderWizard.Module.CartItems	order_wizard_cartitems_module_ship.tpl	order_wizard_cartitems_module_ship_cms_area_1	page type	Checkout pages
OrderWizard.Module.CartSummary	order_wizard_cart_summary.tpl	order_wizard_cart_summary_cms_area_1		
OrderWizard.Module.PaymentMethod	order_wizard_paymentmethod_giftcertificates_module.tpl	order_wizard_paymentmethod_giftcertificates_cms_area_1		
OrderWizard.Module.PromocodeForm	order_wizard_promocodeform.tpl	order_wizard_promocodeform_cms_area_1		
OrderWizard	order_wizard_step.tpl	order_wizard_cms_area_1		
		order_wizard_cms_area_2		
		order_wizard_cms_area_3		
		order_wizard_cms_area_4		
ProductDetails	product_details_full.tpl	item_details_banner		Product details pages
		product_details_full_cms_area_1		
		item_info		
		product_details_full_cms_area_2	this page	
		product_details_full_cms_area_3		
		product_details_full_cms_area_4	page type	
		product_details_full_cms_area_5	this page	
		item_info_bottom		
		product_details_full_cms_area_6	page type	
		product_details_full_cms_area_7		
product_details_full_cms_area_8				

Module	Template File	Area Name	Area Scope	Area Type
		item_details_banner_bottom	page type	
	product_details_quickview.tpl	item_info_bottom		

The Modules directory holds all the modules that make up the SuiteCommerce Base Theme. A module defines a specific area of functionality (feature or utility) for your site. Each module includes a Sass and a Templates folder. The Sass folder contains the module's style sheets, and the Templates folder contains the module's templates.

Template files for the SuiteCommerce Base Theme are included in the corresponding module. Template files control how your website pages are structured. They contain HTML markup and placeholders for data and scripts. For more information about templates, see [Site Management Tools Templates and Areas](#).

Site Management Tools used areas predefined in the template files to determine where you can add and manage content on a page. This lets you create different page layouts without having to build custom templates. For more information about areas, see [Area and Scope](#).

Each area has an assigned scope, which determines when and how the content placed in that area is displayed. For example, if an area on the Product Detail page has a scope of this page, any content you add to that area displays only for that product. Area scopes include all pages, page type, and this page. For more information, see [Area and Scope](#).

Area type refers to the type of web page or area on a web page.


See the help topic [Anatomy of the Base Theme](#) for more information about the SuiteCommerce Base Theme.

Header and Footer Module Default Areas

📘 Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The header and footer modules determine your site's header and footer areas' layout. Area divs in these modules' template files adds areas to your page's header and footer. The scope of these pre-defined areas is All Pages, which means that anything you add to these areas displays across your entire shop.

When a customer visits a page on your site, the page displays not only the areas defined in the header and footer modules, but also those areas defined by the module that creates that page. In the following screenshot, you can see how the header and footer look on the home page when you add content. These same areas also display on the Search page and Item Detail pages.

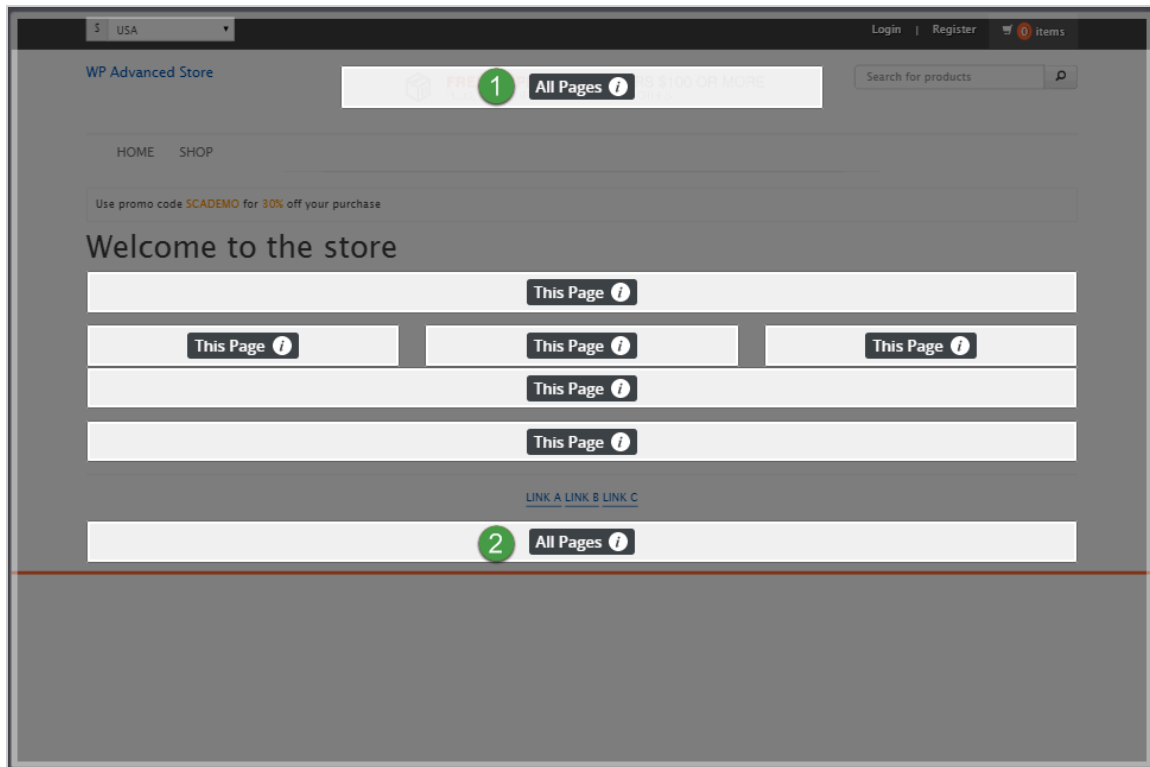


Item	Description
1	The header template file is header.tpl, and it contains one area named header_banner_top with All Pages scope.
2	The footer template file is footer.tpl, and it contains one area named global_banner_footer with All Pages scope.

Home Module Default Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The home.tpl template file in the Home@x.x.x module controls your site's home page's layout. In the following screenshot, you can see the This Page areas available on the home.tpl template file. You can also see the All Pages header and footer module areas at the top and bottom of the page.

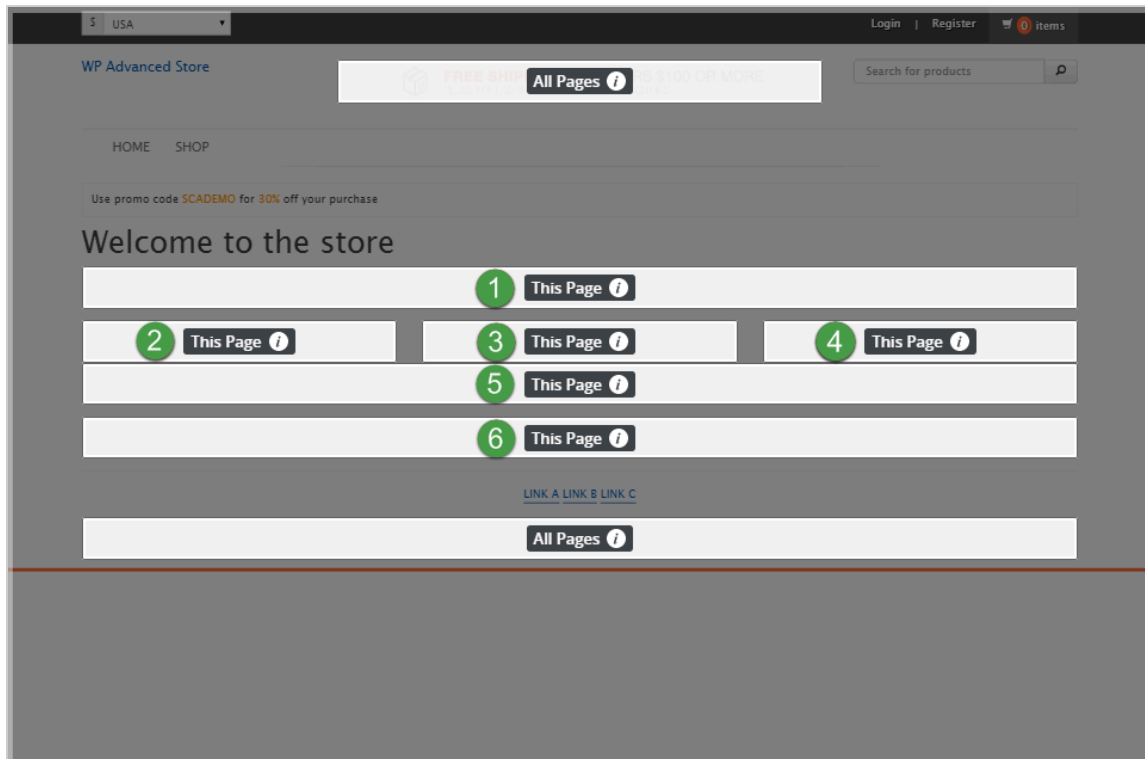


Item	Description
1	home_main
2	home_banner_1
3	home_banner_2
4	home_banner_3
5	item_list_banner_bottom
6	home_bottom

Landing Page Default Areas

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The `cms_landing_page.tpl` file in the `CMSadapter@x.x.x` module controls the layout of your landing page. In the following screenshot, you can see the defined areas. The `cms_landing_page.tpl` file has one Page Type area and one This Page area. You can also see the header, footer, and breadcrumb areas that are defined in those modules.

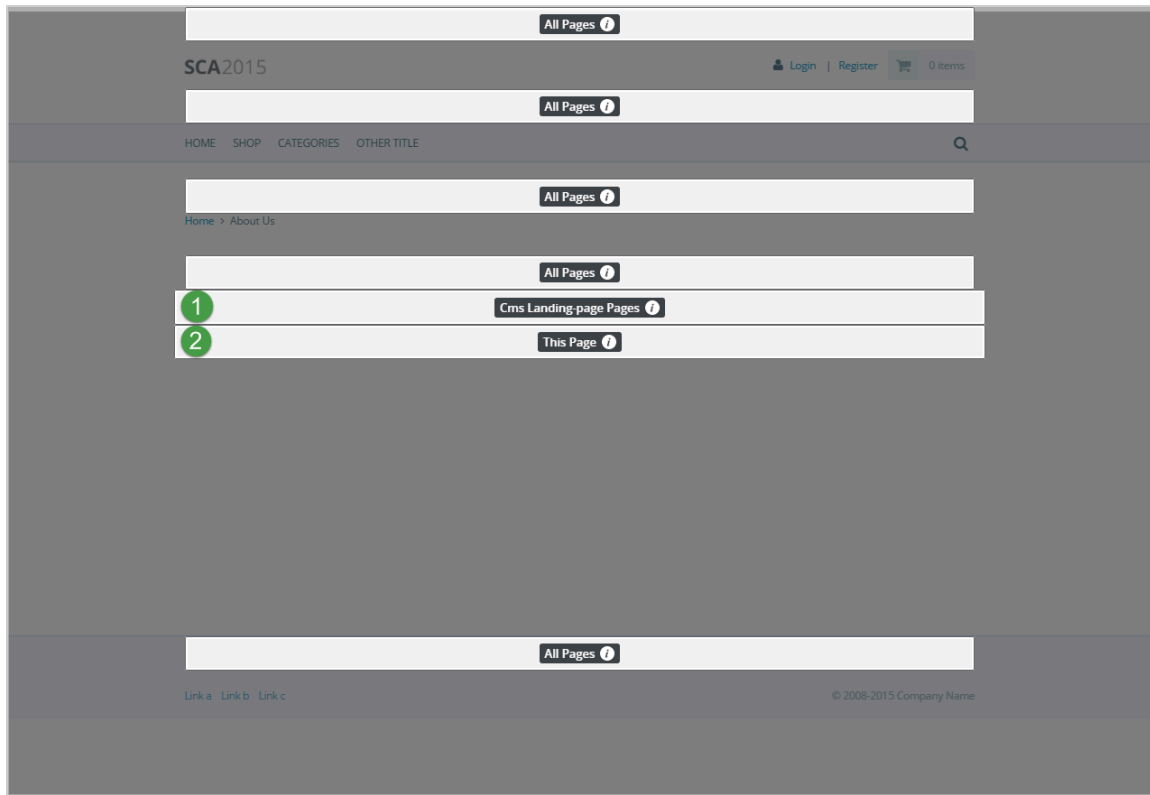

Item	Description
1	Page Type – cms-landing-page-placeholder-page-type
2	This Page – cms-landing-page-placeholder-path

Breadcrumb Default Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The `global_views_breadcrumb.tpl` template file in the `GlobalViews@x.x.x` module creates the breadcrumb navigation on your site's pages. There are two default areas. One area is located directly above the breadcrumb navigation and the other area is located directly below:




The `global_views_breadcrumb.tpl` template file contains the two following **All Pages** areas.

- breadcrumb_top
- breadcrumb_top

Facets Module Default Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The `facets_facet_browse.tpl` template file in the `Facets@x.x.x` module controls the layout of your site's search page. The `facets_facet_browse.tpl` template file has four Page Type areas and one This Page area.

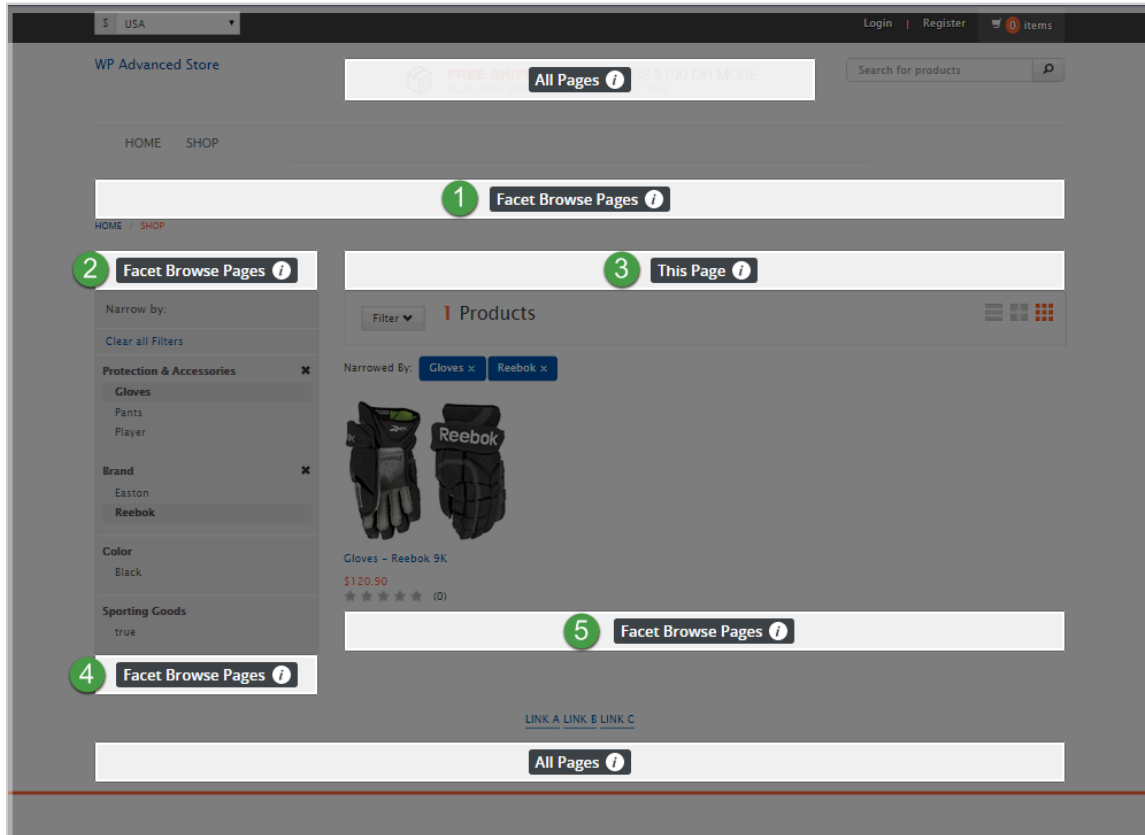


Item	Description
1	Page Type - item_list_banner
2	Page Type - facet_navigation_top
3	This Page - item_list_banner_top
4	Page Type - facet_navigation_bottom
5	Page Type - item_list_banner_bottom

Item Details Module Default Areas

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The `item_details.tpl` template file in the `ItemDetails@x.x.x` module controls the layout of your item detail pages. The `item_details.tpl` file has three Page Type areas and one This Page area.

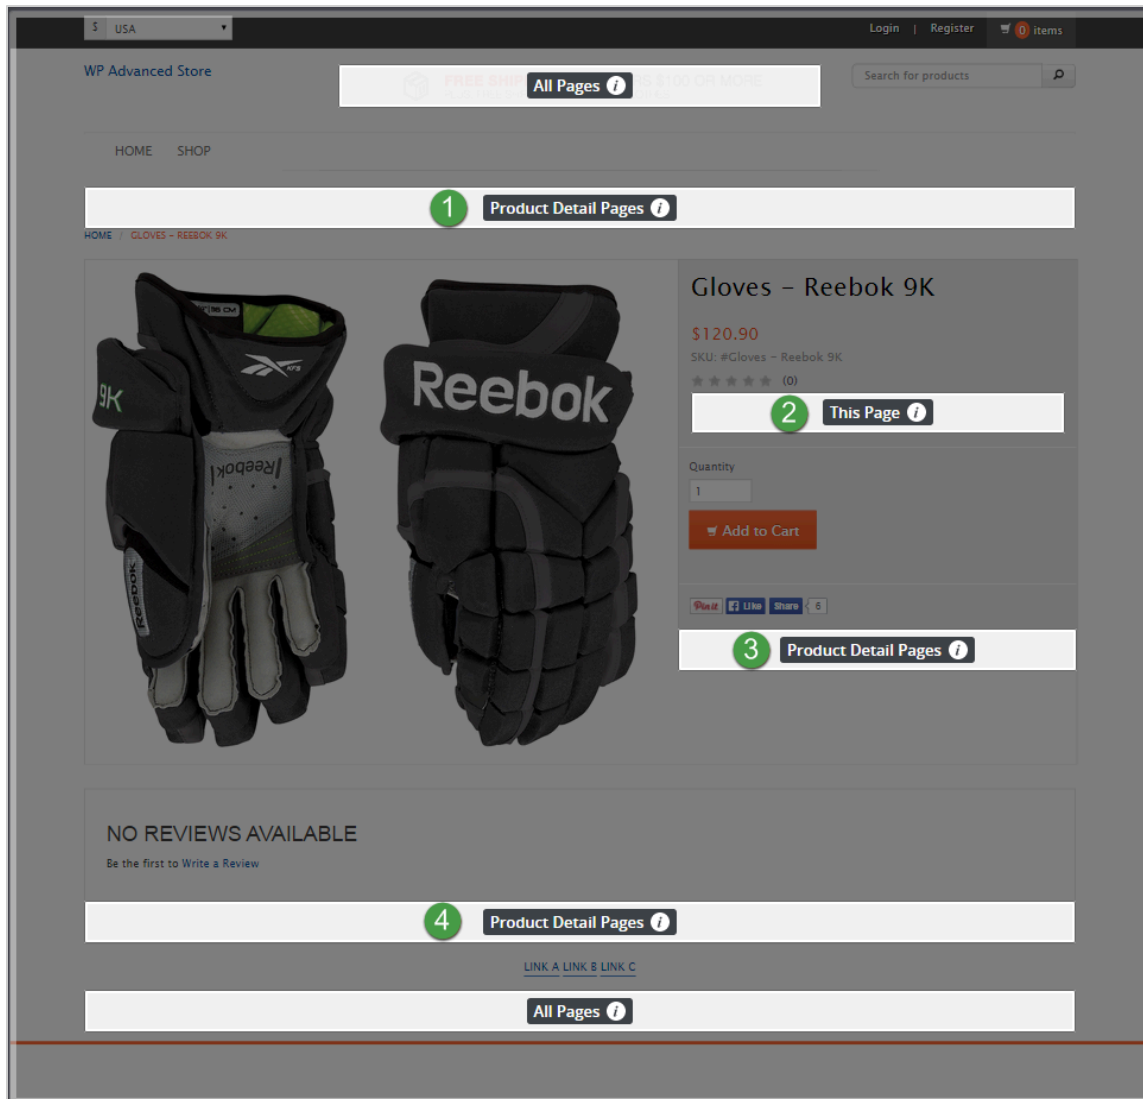

Item	Description
1	Page Type - item_details_banner
2	This Page - item_info
3	Page Type - item_info_bottom
4	Page Type - item_details_banner_bottom

Customizing Template Files

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

If you want to create, remove, or change an area, you must customize the corresponding module and update its template file. For example, if you want to add more CMS areas to the item detail page, you must create a custom ItemDetails module that replaces the default `item_details.tpl` template file with your own version. See the help topic [Set Up SCA Developer Tools](#).

Module	Template File	Local Source File Module Template Location
home@x.x.x	home.tpl	Modules\suitecommerce\home@x.x.x\Templates
ItemDetails@x.x.x	item_details.tpl	Modules\suitecommerce\ItemDetails@x.x.x\Templates
Facets@x.x.x	facets_facet_browse.tpl	Modules\suitecommerce\Facets@x.x.x\Templates
Header@x.x.x	header.tpl	Modules\suitecommerce\Header@x.x.x\Templates
Footer@x.x.x	footer.tpl	Modules\suitecommerce\Footer@x.x.x\Templates
GlobalViews@x.x.x	global_views_breadcrumb.tpl	Modules\suitecommerce\GlobalViews@x.x.x\templates

Watch the following video to learn how to add a Site Management Tools area to a template.

 [Add a Site Management Tools Area to a Template](#)

Site Management Tools Custom Preview Screen Sizes

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

If you want to preview your site with dimensions that aren't already set, you can add your own preview sizes to the adapter file. You can also override the default preview sizes so that only your custom preview sizes are available for selection.

The following sample code illustrates several custom preview screen sizes. Notice that each preview option is designated as desktop, tablet, or phone. The attributes for each preview size includes a name, width dimension, and height dimension.

```

1  var setup = { // Config values the adapter can give the cms on startup.
2    // Screen size preview override/extension
3    screen_preview: {
4      override_defaults: false,
5      sizes: {
6        desktop: [{
7          name: 'XL',
8          width: 2000,
9          height: 3000
10         }, {
11          name: 'XXL',
12          width: 3000,
13          height: 4000
14         }, {
15          name: 'Portrait',
16          width: 768,
17          height: 1024
18         }],
19        tablet: [{
20          name: 'Huge',
21          width: 1300,
22          height: 2000
23         }],
24        phone: [{
25          name: 'Massive',
26          width: 1400,
27          height: 2400
28         }],
29      }
30    }

```

```
31 | };
```

When you set custom dimensions for tablets and phones, Site Management Tools (SMT) makes sure the width is greater than the height. If you set the height higher than the width, SMT automatically swaps them so the width is greater. This rule doesn't apply to desktop dimensions.

Override Defaults

If you want to display only your custom preview sizes, in the CMS adapter, set the value of the `override_defaults` flag to `true`. Only your custom dimensions will be available. When set to `false`, both default and custom preview dimensions are listed on the dimensions dropdown list.

Enabling Custom Preview Sizes and Overriding Defaults

To enable custom preview screen sizes or override the defaults, customize the CMS adapter file to include the code for the custom screen sizes and to set the value of the `override_defaults` flag. For information about customizing a module, see the help topic [Develop Your SCA Customization](#).

Working with Site Management Tools Landing Pages in a Sandbox Account

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

When you work with Site Management Tools (SMT) in a sandbox account, you need to set the landing page URL to match your sandbox domain. If you don't set this up, you'll get a Page Not Found error when you try to open an SMT landing page in your sandbox account.

For configuration information, see [Configure Properties](#).

To set the landing pages URL:

1. Go to Commerce > Websites > Configuration > [Select Site] and [Select Domain].
2. In the SuiteCommerce Configuration record, go to the **Integrations** subtab and then the **Site Management Tools** subtab.
3. In the **Landing Pages URL** field, enter your sandbox account's URL.
The sandbox domain is your account's domain plus the unique sandbox identifier. For example, **https://345678_SB1.app.netsuite.com**.
4. Click **Save**.

See the help topics [NetSuite Sandbox](#) and [URLs for Account-Specific Domains](#) for additional information.

To set the landing pages URL (pre-Elbrus):

1. Create a custom CMSAdapter module to extend `CMSadapter.model.js`
2. Add a custom property to set `cmsPagesUrl` is as follows:

```
1 | 'https://345678_SB1.app.netsuite.com/api/cms/pages?site_id=' + siteSettings.siteid + '&c=' + nlapiGetContext().getCompany() + '&{'
```

Note: This sample URL uses your account's domain and the sandbox's unique identifier.

For more information about customizing a module, see the help topic [Develop Your SCA Customization](#). For information about deploying customizations to a sandbox account, see the help topic [Deploy to a NetSuite Sandbox](#).

Note: After you refresh your sandbox account, your customization is overwritten, so you'll need to redeploy it.

Important: If you move your customizations from sandbox to production, edit the **cmsPagesUrl** in the **CMSadapter.model.js** file to update the sandbox URL to the production URL.

Changing Site Management Tools to Use a Different Hosting Root

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

When you create a website, the Website Setup record sets the HTML Hosting Root. When you implement Site Management Tools (SMT) on that site, it uses the same HTML Hosting Root as your website. If you move the site to a different HTML hosting root, you also need to create a new CMS SSP application. This application will use the new HTML Hosting Root so that SMT can continue to function and your content continue to display. This is required because Site Management Tools and the website must use the same HTML hosting root.

Note: For example, the following procedure uses **Custom Hosting Root** as a sample folder name, but you can name yours differently.

To configure SMT to use a different HTML hosting root:

1. Publish any unpublished changes to your site. See the help topic [Create and Publish Content in Site Management Tools](#) for more information.
2. Make a copy of your SSP application in the new HTML hosting root folder. This process includes:
 - Creating the directories in the file cabinet, for example, **Custom Hosting Root/SSP Applications**.
 - Copying the SSP application to the new **SSP Applications** folder.
 - Creating the new SSP application record and pointing it to the copy of the SSP application. See [Create a SuiteScript 1.0 SSP Application Record](#)
3. Copy the **NetSuite Inc. - CMS** folder to the **Custom Hosting Files/SSP Applications** folder in the file cabinet.

Important: The folder must be named **NetSuite Inc. - CMS**. Do not rename this folder or any of its subfolders.

4. Create a new SSP application record for SMT. See [Create a SuiteScript 1.0 SSP Application Record](#). Use the original SSP application record as your model:

SSP Application

Edit
Back
Link to Site
Link to Domain

Actions

Name	URL Root	Log Level
CMS	/CMS	Debug
ID	Description	Owner
webapp686		Dave Smith
Version	Status	
1.0	Testing	☐ Inactive
Application Folder		
Live Hosting Files: /SSP Applications/NetSuite Inc. - CMS/CMS		

- a. Give the application a unique, CMS-related name.
 - b. Give the application a unique ID or leave the ID empty to use a system-generated ID.
 - c. Set the **Application Folder** to **Custom Hosting Root: /SSP Applications/NetSuite Inc. — CMS/CMS**.
 - d. Set the **URL Root** to **/CMS**.
 - e. Enter a description of the CMS SSP application. The description should provide enough information to prevent confusion.
 - f. Save the new application.
5. Edit the Website Setup record to change the **Default Hosting Root** to **Web Site Hosting Files: Custom Hosting Files**.
6. Link the new SSP application record to your site.
7. Clear the website cache.
8. Go to your site and log in to Site Management Tools.

Important: This is a crucial step so don't forget it.

9. Add simple text content to any page on your site and publish the change.
10. After you confirm that the text content published correctly, delete the text content and publish the change to remove the text from your site.

Configuring Escape to Log In

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The Escape to Login feature is available in SuiteCommerce Advanced Elbrus and later.

This feature lets you specify if you want to access Site Management Tools by pressing the escape key or by going to the admin URL. For more information, see the help topic [Configuring Access to Site Management Tools](#).

To enable or disable escape to login:

1. Go to Commerce > Websites > Configuration.
2. Select your website and domain, then click **Configure**.
3. In the SuiteCommerce Configuration record, go to the **Integrations** tab and then the **Site Management Tools** subtab.
4. Check the **Disable Esc Key to Login** box to disable the Escape key for logging in. You can clear the box to enable the Escape key for logging in.

Internationalization of Site Management Tools Administration

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

Internationalization lets the website administrator set the language for the Site Management Tools user interface. SMT uses the language preference that you selected in your NetSuite account. To select your language preference, see the help topic [Choosing a Language for Your NetSuite User Interface](#). This means that administrators can set their own language preferences when using SMT. For example, one administrator can use SMT in English and another in Spanish. SMT uses the language preference selected in each administrator's NetSuite account.

Internationalization doesn't change the language for your site's visitors. Visitor language is controlled by language preference in SuiteCommerce Advanced. See the help topic [Web Site Language Preferences](#).

Currently, internationalization is only supported in SMT V3. To check your version of SMT, see the help topic [Determine Your Version of SMT](#).

You can select any foreign language that's available in NetSuite for internationalization.

i Note: Custom Content Types aren't currently supported for internationalization.

CMS Records for Site Management Tools

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

When you add content to your website with Site Management Tools (SMT) and publish it, the content and display information is saved as NetSuite records. These records include the following:

- [Custom Record for CMS Content](#)
- [CMS Contents Record](#)
- [CMS Page Record](#)
- [CMS Page Type Record](#)

The custom record contains the content that you added to the site. For example, if you add a banner image to your site, there's a custom CMS_IMAGE record with the image source, alt text, and link. Each custom record also has a matching CMS Content record. The CMS Content record controls how and where that content appears on your site.

Note: Only published content is available as NetSuite records. Unpublished content isn't available in NetSuite.

Example 1. Example: Records Created when Adding Content

You add a banner image to the header area of your site. When you add the image, you specify the following information:

- Visibility Options
- Image File
- Alternate Text
- Link

The area where you add the image is set in the page template file, and the area's attributes provide a couple of important pieces of information. These are the content's scope, which can be global, current page, or page type. In this example, the area is in the page header and has global scope. The area also has a unique name. In this example, the name is `global_banner_top`.

When you publish the content, a new `CMS_IMAGE` custom record is created. This record stores the image source, alt text, and link. A CMS Content record is also created. This CMS Content record links to the custom record using its ID. The CMS Content record includes the visibility dates and times, area scope, area name, and other information about the content. See [Custom Record for CMS Content](#) and [CMS Contents Record](#).

Custom Record for CMS Content

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The SMT Core Content Types bundle sets up the custom records for Site Management Tools (SMT) core content types. These content types include:

- Text
- Image
- Merchandising Zone
- HTML

Note: The SMT core content type custom records are locked, so you can't edit or delete them.

The custom records are defined as follows:

Content Type	Custom Record Name	Custom Fields
Text	CMS_TEXT	clob_html
Image	CMS_IMAGE	string_link string_alt string_src
Merchandising Zone	CMS_MERCHZONE	exclude_cart exclude_current

		merch_rule_url merch_rule_count merch_rule_id merch_rule_template
Enhanced Merchandising Zone	CMS_MERCHZONETWO	merchzone_heading merchzone_merchrule merchzone_display_mode merchzone_numitems
HTML	CMS_HTML	clob_html

When you add content to your site and publish it, it's saved as a custom record of one of these types. You can view or edit the record, and any edits you make are immediately visible on the site. For example, if you notice a misspelled word in a piece of text, you can edit the custom record to correct it, and the fix appears instantly.

Each content custom record also has a CMS Content record that controls how and when the content displays on your site. See [CMS Contents Record](#).

Note: If you create custom content types, a custom record is created for each custom content type. See [Site Management Tools Custom Content Type](#).

To view the custom record for SMT content:

1. Go to Customization > List, Records, & Fields > Record Types.
2. In the **Record Types** list, locate the CMS Content Type record for the content you want to view.
The core content type records are CMS_HTML, CMS_IMAGE, CMS_MERCHZONE, CMS_MERCHZONETWO, and CMS_TEXT. You may also have a content type record for any custom content type you enable.
3. Click **List** for the content type record to see all the content for that record type.
4. Click **View**.

CMS Contents Record

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The CMS Content record defines specific information about how each instance of Site Management Tools (SMT) content is displayed. Each CMS Content record links to its matching custom content record. For example, every CMS_IMAGE custom record has a matching CMS Content record. The CMS Content record specifies how and where content displays. The CMS Content record includes the following fields:

Name	The name is an internal identifier for the content. The name isn't displayed for visitors on your website. The name field is left empty for content created with SMT.
Description	This is a user defined description of the content. The description field is left empty for content created with SMT.
Site	This specifies the site for the content.

Content Type	Identifies the content type. The core content types include: ■ CMS_IMAGE ■ CMS_HTML ■ CMS_MERCHZONE ■ CMS_MERCHZONETWO ■ CMS_TEXT Additional type values may also be available for custom content types.
Settings	Identifies the ID for the custom record that stores the content. This ID links the custom record to the CMS Content record.
Template	Determines the template used to display content. This should be set to default.
Match Type	Currently, the Match Type field isn't used by Site Management Tools or Commerce web stores.
Change URL	Shows the URL used when the content was created or changed. This isn't always the only place the content displays. For example, content with page type and global context, can display on many pages. The URL in this field reflects only the URL of the page where the content was added or last edited.
Page Type Context	This matches the SMT This Page area scope and is used for content you want to place on a specific type of page, like a product detail or facet browse page. The options are: ■ ProductDetails – denotes a product detail page. ■ facet-browse – denotes a facet browse page or a category page. ■ cms-landing-page – denotes a landing page. See This Page Areas.
Global Context	This matches the SMT All Pages area type. If content is set to show on all pages, this field displays *. See All Pages Areas.
Path Context	The matches the This Page area type and denotes the page's URL. See This Page Areas .
Area Name	Displays the name of the area on the page where this content is placed. The area name comes from the data-cms-area attribute in the page template file.
Start Date	When the content starts displaying.
End Date	When the content stops displaying. This is the date and time when the content expires. If this field is empty, the content never expires.

Edit CMS Content

Even though you can change content by editing the CMS Content record, it's best to make your edits in SMT. Avoid editing the CMS content record directly because, if you make a mistake, your content could disappear from your site.

Add CMS Content

CMS Content records are created automatically after you add and publish content on your site. You can also add a new CMS Content record directly in NetSuite. Remember, each CMS Content record links to a matching CMS custom record. Although you can manually add CMS Content and custom records, it's better to use SMT to add or edit content.

Delete CMS Content

You can use the CMS Content record to delete SMT content from your site. After you delete a CMS Content record, its matching CMS custom record is deleted too, and the content is immediately and permanently removed from your site.

To delete a CMS content record:

1. Go to Commerce > Content Management > Content > CMS Contents.
2. Click **Edit** for the record you want to delete.
3. Select **Delete** from the **Actions** menu.
4. When you're asked to confirm, click **OK**.

CMS Page Record

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The CMS page record lets you access the NetSuite records for Site Management Tools (SMT) landing and enhanced pages. This includes landing and enhanced pages for both SMT versions 2 and 3. These records include landing and enhanced pages that were created directly in SMT and those created with the CMS Page record. The CMS Page record lets you [Delete a CMS Page Record](#).

The CMS Page record only gives you access to the page itself, not the SMT content on that page. The page attributes you can set for a landing or enhanced page are the same as those you set in SMT. They include the following:

Name	The page name is an internal ID. It isn't displayed to website visitors, but it does identify the page in NetSuite and in SMT.
Site	Sets the site for this page.
Type	Specifies if this record is for a landing page or an enhanced page. 1 = landing page 2 = enhanced page
Addition to Head	This field lets you add extra information, like JavaScript or CSS, to the <head> area of the page.
URL	This is the relative path for accessing the page. The URL must only contain the relative path with no slashes or spaces.
Template	Sets the template for the page.
Page Title	The page title populates the HTML title element. For SEO, make sure it's descriptive and uses target keywords to help your page rank higher. Search engines often show this title in results and link it to your page, so follow SEO best practices.
Page Heading	Sets the heading for the page. If the page template file supports it, this heading is displayed on the page.
Meta Description	The Meta Description populates the HTML meta description element. The description is important for SEO and often appears in search results as the page description. Write a clear, accurate description with your target keywords to help your ranking, and follow SEO best practices.

Meta Keywords	The Meta Keywords populate the HTML meta keywords element for the page. Follow SEO best practices because using the wrong keywords can hurt your ranking.
Start Date	When the content starts displaying.
End Date	When the content stops displaying. This is the date and time when the content expires. If this field is empty, the content never expires.

Delete a CMS Page Record

After you delete a CMS Page record, the page is removed and can't be visited by customers or edited in SMT. Consider the SEO impact before removing a page. If search engines have already indexed the page, set up a 301 redirect so they know it had been removed and where to find the new page. This helps protect your search ranking. The 301 redirect also makes sure visitors get sent to another page instead of seeing a 404 error. For more information, see the help topic [Setting Up a URL Redirect](#).

If you delete a page that hasn't been published yet, the record is removed and it disappears from the unpublished changes list in SMT. Since the page isn't published, there are no SEO considerations when you delete it.

To delete a CMS page record:

1. Go to Commerce > Content Management > Content > CMS Pages.
2. Click **Edit** next to the page link.
3. Point to the **Actions** menu and select **Delete** from the dropdown list.
4. When you're asked to confirm, click **OK**.

Landing Pages and Sitemap Generator

When using a new NetSuite account, there are two circumstances where new landing pages may not be included in the site map:

- You create CMS Landing Page records in NetSuite instead of with SMT
- You use the CSV import to create CMS Landing Page records

To ensure Landing Pages are included in the sitemap, you must log in to Site Management Tools. Logging in to SMT creates the necessary version records for the system to create the sitemap. You don't need to do anything else while you're logged in to SMT.

To avoid any issues, it's best to use SMT to manage CMS content, CMS Landing Pages, and Commerce Categories.

For more information and best practices, see the help topic [Sitemap Generator](#).

For more information about CSV Import Files, see the help topic [Guidelines for CSV Import Files](#).

CMS Page Type Record

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The CMS Page Type record lets you access NetSuite records for Site Management Tools page types. The CMS Page Type record only gives you access to the page type, not the SMT content linked to it. A new page type record is also created when a user registers an extension.

You create a new CMS Page with the CMS Page Type you want, then add any SMT content you need.

The 19.1 release has one standard page type, landing page, that you can't delete.

You can set the following CMS Page Type Record attributes in NetSuite:

Name	The page name is an internal identifier for the page. It isn't displayed to visitors to your website, but it helps you identify the page in NetSuite and SMT. This field is also populated when an extension is registered.
Display Name	The display name is the external identifier for the page. This the name displays on the dropdown list after you create a new page. This field is also populated when you register an extension.
Description	This is a description you add for the page type.
Base URL Path	The base URL path lets you set the URL for all pages of that type. For example, if you have a page type of blog and a base URL path of blog, all blog pages will be at <code>mysite.com/blog/[page url]</code> .
Custom Record Type	This lets you create a Custom Content Type (CCT) and link it to a page type. You can add fields, JavaScript, CSS, and other custom resources. This must be implemented through SuiteCommerce extensions or SCA.
CMS Creatable	If CMS Creatable is set to Yes, the page type displays in the list when you create a new page. If CMS Creatable is set to No, you won't see the page type as an option when creating a new page.
Inactive	If a page type is marked as Inactive, you can't use it for new pages, but any existing pages will still work. Inactive types still display in SMT for sorting and filtering.
Domain Data Subtab	■ Domain – Use the dropdown list to select the domain you want to link to this page type. ■ Template – Enter the exact name of the template file you want to use for this page type. This field is case sensitive.

Add a new CMS Page Type Record

The CMS Page Type record lets you create a new page type.

The CMS Page Type record only lets you create the page type. You still need to create a new page in SMT with that type, then add your content.

To add a CMS page type record:

1. Go to Commerce > Content Management > Content > CMS Page Types > New.
2. Enter the following information.
 - **Name** – Enter a name to identify this page in NetSuite. The name isn't displayed to website visitors and only identifies the record in NetSuite. This field is also populated when you register an extension.
 - **Display Name** – This is used to display the page type to the SMT administrator. This field is also populated when you register an extension.
 - **Description** – This is a description you add for the page type.
 - **Base URL Path** – The base URL path lets you set the URL for all pages of that type. For example, if you have a page type called blog and set the base URL path to blog, all blog pages will be `example.com/blog/[page url]`.

- **Custom Record Type** – This lets you create a Custom Content Type and link it to a page type. You create the new CCT and choose your customizations. You can add fields, JavaScript, CSS, and other custom resources. This must be implemented through SuiteCommerce extensions or SCA.
- **CMS Creatable** – Select **Yes** if the SMT administrator can create pages of this type. Select **No** if they can't.
- **Inactive** – Check the **Inactive** box to prevent users from creating pages of this type. Any existing pages of this type continue to display on the site.

3. Click **Save**.

Edit a CMS Page Type Record

The CMS Page Type record lets you edit an existing CMS Page Type. You can change its attributes, but not the content on pages using that page type.

To edit a CMS page type record:

1. Go to Commerce > Content Management > Content > CMS Page Types.
2. Click **Edit** next to the page type link.
3. Make your changes.
4. Click **Save**.

Delete a CMS Page Type Record

You can only delete a CMS Page Type record there aren't any pages of that type. If you want to delete a CMS Page Type record from your NetSuite account, first you need to remove all CMS Pages linked to it.

To delete a CMS page type record:

1. Go to Commerce > Content Management > Content > CMS Page Types.
2. Click **Edit** next to the page type link.
3. Point to the **Actions** menu and select **Delete** from the dropdown list.
4. When asked if you are sure you want to delete the record, click **OK**.

Page Types Domain Level Data

This information refers to SuiteCommerce or the 2019.2 release of SuiteCommerce Advanced or later.

Along with creating different page types, you can also create and assign page types to a specific domain in your account. This lets you apply page types at the domain level. Only one entry is allowed for a specific page type and domain combination. This means you can only have one page type named blog attached to one domain. If you want more than one blog page type on a domain, give each one a unique name, like blog1, blog2, blog3, and so on.

To associate a page type to a domain:

1. Go to Commerce > Content Management > Content > CMS Page Types.
2. Choose the page type you want to link to a specific domain and click **Edit**.
3. Under **Domain Data**, choose the domain in the dropdown list you want to assign the page type to.

4. In the **Template** field, enter the exact template name you want to use. This field is case sensitive.
5. Click **Add**.
6. Click **Save**.
7. This page type is now linked to your domain.

To remove a page type association from a domain:

1. Go to Commerce > Content Management > Content > CMS Page Types.
2. Choose the page type you want to unlink from a specific domain and click **Edit**.
3. Under **Domain Data**, choose the domain and template to want to remove.
4. Click **Remove** to delete the link between the page type and the domain.
5. Click **Save**.
6. This page type is no longer associated with your domain.

Site Management Tools Custom Content Type

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

This information refers to the Kilimanjaro release of SuiteCommerce Advanced or later.

The custom content type in Site Management Tools (SMT) lets Commerce extension developers create custom website applications or features, all managed through the SMT interface. This lets Commerce users add custom content and expand their website's features. There are two main steps to add custom content types to your Commerce site. First, you create your custom Commerce module. This means creating your JavaScript code, CSS, and other resources your module needs. These must all be implemented by following Commerce best practice.

See the help topic [Create Custom Content Types for SMT](#) for best practice about creating a custom content type module.

After you create your custom module, the next step is to setup the custom content type for use in SMT. This process includes the following:

- Create the custom records and fields for your custom content type. See [Custom Record for Custom Content Type](#).
- Create the Content Type record for your custom content type. See [CMS Content Type Record](#).
- Enable the custom content type in the SMT Content Manager. See the help topic [Enabling or Disabling Content Types in Site Management Tools](#).

Custom Record for Custom Content Type

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

Site Management Tools (SMT) custom content types use NetSuite Custom records and fields to define the settings and values each custom content type needs. For example, if you have a custom content type that displays an image with a text overlay, you need to create a custom record for it and then add the custom fields your content needs. In the following screenshot you see the custom record for the SC CCT Image

Text Overlay. As part of implementing a custom content type, you link this custom record to a matching CMS Content Type record. For more information, see [CMS Content Type Record](#).

Custom Record Type
CCT Image Text Overlay

Actions

Name
CCT Image Text Overlay

ID
customrecord_ns_sc_ext_img_txt_overlay

Internal ID
509

Originating Custom Segment

Owner
Lydia Foster

Description

☒ Include Name Field

☐ Show ID

Show Creation Date
☐ On Record
☐ On List

Show Last Modified
☐ On Record
☐ On List

Show Owner
☐ On Record
☐ On List
☐ Allow Change

Access Type
No Permissions Required for Internal Roles

External roles access
View

Unauthenticated Users Access
View

☒ Allow UI Access

☐ Allow Mobile Access

☒ Allow Attachments

☒ Show Notes

☐ Enable Mail Merge

☐ Records are Ordered

☒ Show Remove Link
☐ Allow Child Record Editing
☐ Allow Delete

☐ Allow Quick Search

☒ Allow Quick Add

☒ Enable System Notes

☒ Include In Global Search

☒ Include In Search Menu

☒ Enable Optimistic Locking

☒ Enable Inline Editing

☐ Enable Name Translation

☐ Hierarchy

☐ Inactive



Important: To let any custom employee roles log in to SMT and edit or create CMS content, set the permission access level for the custom records that are listed below to **Full**.

To let any custom customer roles browse and shop on your web store, set the permission access level for the custom records below to **View**.

- CMS_HTML
- CMS_IMAGE
- CMS_MERCHZONE
- CMS_MERCHZONE2
- CMS_TEXT

For more information about users and roles in SMT, see the help topic [Users and Roles in Site Management Tools](#).

Custom Fields for Custom Content Type

After you create the custom record, the next step is to set up the custom fields. The custom fields you add display in the side panel in SMT when you add the custom content type to a page. In this example, the custom fields define the information that's displayed by the custom content type. These fields include:


- **Message** – A text area that lets you enter text to overlay on the image.
- **Vertical Align** – Lets you select the vertical alignment for the text. In this example, the **Vertical Align** field is set up as a list/record type and linked to a custom list.
- **URL** – Where you set the image source.

To use these custom fields in your custom content type module, use the ID assigned to each one. In this example, the IDs for custom fields are:

- **custrecord_sc_cct_iv_text** – Message field
- **custrecord_sc_cct_iv_valign** – Vertical Align field
- **custrecord_sc_cct_iv_imageurl** – URL field

Note: Custom content types don't support the Password field type.

After your custom content type is set up, it displays in SMT. The following screenshot shows the SC CCT ImageViewer custom content type.

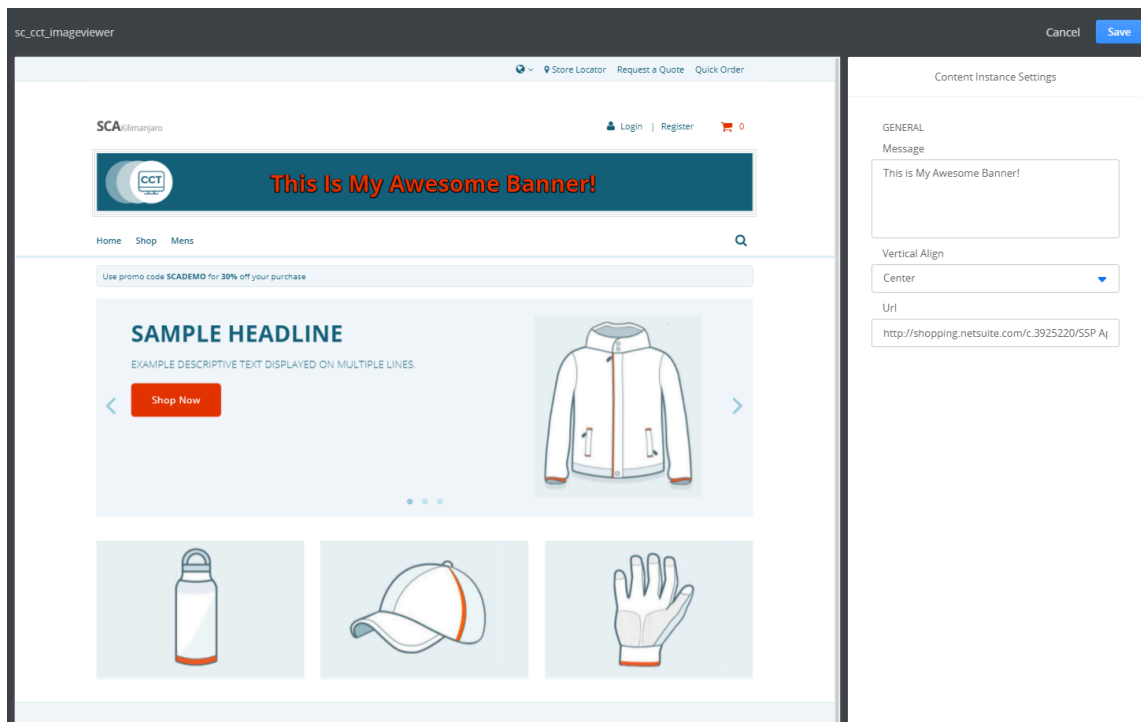

Important: Your custom content type is available in SMT only after you finish all the setup steps.

Tabs for Custom Content Type

Depending on your custom content type and the number, type, or function of fields, you may want to add tabs to organize the fields. You can add tabs in the custom record for your custom content type and assign fields to the tabs. The tabs and field setup appear in the custom content types settings in the side panel in SMT.

For more information about custom records and fields, see the help topic [Custom Records](#).

Custom Content Type Records

Each time you use SMT to add an instance of a custom content type to your site, it creates a CMS content record and a custom record for that content type. The CMS content record controls how and where your custom content displays. For details, see [CMS Contents Record](#). The custom record for the content type saves the values for your custom content elements. For the ImageViewer example, these values include:

- Message

- Vertical Align
- URL

You can view or edit custom content types in NetSuite, but it's best to make changes in SMT.

To view a custom content type record in NetSuite:

1. Go to Customizations > Lists, Records, & Fields > Record Types.
2. In the Record Types list, find your custom content type record and click **List**.
3. This displays all the instances of that custom content type.

Parent Child Record Associations

This information refers to SuiteCommerce or the 2019.2 release of SuiteCommerce Advanced or later.

With parent-child record associations, you can build more complex data sets in your custom content types. For example, you create a Custom Record Type named blog, then create a new CMS Page Type named blog, and, finally, you use the Custom Record Type dropdown menu to select which record type to link to your page type.

This way of creating new page types gives you many options, like adding specific templates, headers, footers, and more.

You must use SuiteScript or NetSuite to add, edit, or delete the custom records. Site Management Tools only manages the page types linked to your custom record and lets you manage the fields you created in your custom record. After you create a new page in Site Management Tools, the pop-out menu displays your custom fields when you click Landing Page, and you can manage your content there.

CMS Content Type Record

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Management Tools

The CMS Content Type record sets up the different content types for Site Management Tools (SMT). After you install the SMT Core Content Types bundle, it creates the CMS Content Type records for the following core content types:

- CMS_HTML
- CMS_IMAGE
- CMS_MERCHZONE
- CMS_MERCHZONETWO
- CMS_TEXT

CMS Content Type Record for CCT

After you create custom content types, you must manually create a CMS Content Type record for each one. The CMS Content Type record links to the custom record you created for your custom content type. You must create the CMS Content Type record before your custom content type is available in SMT.

To create a content type record

1. Go to Commerce > Content Management > Content > CMS Content Types > New.
2. Click **New**.
3. In the **Name** field, enter a name for this content type. Use all lowercase, and it's best not to use spaces. This name identifies the record in NetSuite, so make it descriptive. The name you specify here must be set as the value of the `id` property within the `registerCustomContentType()` method used to initialize your CCT module.
See the help topic [Create Custom Content Types for SMT](#).
4. In the **Description** field, enter more details about this custom content type to explain its purpose.
5. In the **Icon Image Path** field, enter the file path for the icon you want to use (only SVGs are supported). If you don't pick an icon, a default one will be used.
6. Specify the **Label** to use in SMT for this content type. This is what users will see.
7. In the **Custom Record** field, enter the name of the custom record you created for this custom content type.
8. Click **Save**.

CCT Icon Requirements

Icons for custom content types should be simple, single-color SVGs that are intuitive for users to recognize and link to the content type.

SVG icons made up of shape elements that can be filled, rather than strokes, work best. Don't set a color for shapes. If you use strokes, set fill to "none" and stroke to "currentColor".

Style your icon with presentational attributes, not CSS. Style elements in the SVG image may be removed.

Required Settings:

- Valid SVG
- One root element (<svg>) with valid value for `xmlns` attribute
- Root element's `viewBox` attribute is set to "0 0 48 48"
- Color
- Elements without a stroke must have fill set to "currentColor" or no fill attribute.
- Elements with a stroke must have fill set to "none" and stroke set to "currentColor".

Preferred Settings:

- Desc element
- Should describe what the image contains or looks like
- Should be the first child of the root element
- Should generally only contain shape elements (circle, ellipse, line, path, polygon, polyline, rect), but may also contain structural elements (g, defs, use, symbol)

Not Permitted:

- text, unless it's part of a logo or branding and you can't use a non-text version. If you do use text, convert it to outlines.
- raster images
- style elements
- script elements

- animation elements
- gradient elements
- font elements
- filter primitive elements
- animation attributes
- event attributes
- conditional processing attributes

Templates and Theme Areas for SuiteCommerce Themes

Applies to: SuiteCommerce | SuiteCommerce Advanced

Template files control the web page structure of your SuiteCommerce themes. They contain HTML markup and placeholders for your custom extensions and custom content types.

The following SuiteCommerce theme areas include template files with pre-defined areas where you can install custom extensions or add custom content types:

- [My Account Theme Area](#)
- [Checkout Theme Area](#)
- [Shopping Theme Area](#)

For more information about themes, see the help topic [Commerce Themes](#).

My Account Theme Area

Applies to: SuiteCommerce | SuiteCommerce Advanced

The following table shows the template files and data-view placeholders for the My Account area of your SuiteCommerce theme.

Area	Template	Data-View	Location
ACH Payment Instrument	■ paymentinstrument_ach.tpl ■ paymentinstrument_ach_edit.tpl ■ paymentinstrument_ach_edit_form.tpl ■ paymentinstrument_ach_list.tpl		
Address Book	address_list.tpl	AddressBook.AfterAddressesList	.address-list
Overview	overview_home.tpl	Overview.AfterRecentPurchases	.overview-home-order-history-results-container
Payment Methods	paymentmethod_creditcard_list.tpl	PaymentMethods.AfterMethodsList	.paymentmethod-creditcard-list
Profile Information	profile_information.tpl	ProfileInformation.CustomFields	.contact_info
Purchase Details – Items	order_history_summary.tpl	PurchaseDetails.AfterItemLines	.order-history-packages-accordion-container
Purchase Details – Summary	order_history_packages.tpl	PurchaseDetailsSummary.AfterTitle	After .order-history-summary-summary-title
		PurchaseDetailsSummary.AfterSubtotal	After .order-history-summary-summary-subtotal
		PurchaseDetailsSummary.AfterTotal	After .order-history-summary-summary-total

Checkout Theme Area

i Applies to: SuiteCommerce | SuiteCommerce Advanced

The following table shows the template files, data-view, and CMS placeholders for the checkout area of your SuiteCommerce theme.

Area	Template	Data-View	CMS	Placeholder	Location
ACH Payment Wizard	payment_wizard_paymentmethod_ach_module.tpl				
Log in Register	login_register_login.tpl	x	—	Login.CustomFields	After the password input
		—	x	Register.CustomFields	After the login form
New Customer	login_register_register.tpl	x	—	Scope:Path	After the re-entering password input
		—	x	Scope:Path	After the register form
Order Wizard Cart Module	order_wizard_cart_summary.tpl	x	—	OrderWizardSummary.AfterTitle	After .order-wizard-cart-summary-title
		x	—	OrderWizardSummary.AfterSubtotal	After .order-wizard-cart-summary-subtotal
		x	—	OrderWizardSummary.AfterTotal	After .order-wizard-cart-summary-total
Order Wizard Confirmation Page	order_wizard_confirmation_module.tpl	x	—	OrderWizard.AfterConfirmation	.orderwizard.module.confirmation
Order Wizard Payment Method Module	order_wizard_paymentmethod_selector_module.tpl	x	—	OrderWizard.AfterPaymentMethods	.order-wizard-paymentmethod-selector-module
Order Wizard Shipping Address Module	order_wizard_address_module.tpl	x	—	OrderWizard.AfterShippingAddresses	.order-wizard-address-module-placeholder
Order Wizard Shipping Method Module	order_wizard_shipmethod_module.tpl	x	—	OrderWizard.AfterShippingMethods	order-wizard-shipmethod-module

Shopping Theme Area

i Applies to: SuiteCommerce | SuiteCommerce Advanced

The following table shows the template files and data-view placeholders for the shopping area of your SuiteCommerce theme.

Area	Template	Placeholder	Location
Extended Cart Summary	cart_summary.tpl	CartSummary.AfterTitle	After .cart-summary-title
		CartSummary.AfterSubtotal	After .cart-summary-subtotal
		CartSummary.AfterTotal	After .cart-summary-total
Mini Cart	header_mini_cart_item_cell.tpl	ItemThumbnail	.header-mini-cart-item-cell-image

Area	Template	Placeholder	Location
	header_mini_cart.tpl	MiniCart.Subtotal	.header-mini-cart-subtotal container
	cart_lines.tpl	MiniCart.Actions	.header-mini-cart-buttons container
Product Details Page	product_details_full.tpl	ItemDetails.Header	Product details header, after the Global.StarRating placeholder
		ItemActions	.product-details-full-actions container
Product Listing Page	item_relations_related_item.tpl	ItemThumbnail	Product thumbnail wrapper
	- facets_item_cell_grid.tpl - facets_item_cell_list.tpl - facets_item_cell_table.tpl	ItemThumbnail	Product thumbnail wrapper
Product Reviews	- product_reviews_center.tpl - product_reviews_review.tpl - global_views_rating_by_star.tpl - row_view.tpl		

Overview

i Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

You can make your website faster and cut down page load times by caching data and site assets. Caching helps content reload quickly, which boosts site performance and user satisfaction.

Caching occurs:

- On the Content Delivery Network (CDN)
- In the user's browser
- For product merchandising rules
- At the application level (for some previous implementations of SuiteCommerce Advanced)

See the following topics for more information about caching:

- [CDN Caching](#) – These topics explain how to optimize your website and decrease page-loading time by caching data and site assets on the CDN for Commerce web stores. After you set up CDN caching, data and site assets used across your web store are always cached.
- [Cache Invalidation](#) – After your data is cached, it usually stays in the cache until it expires. These topics explain how to set up automatic or manual cache clearing before data expires, for when cached data changes at the source or shouldn't be cached anymore.
- [CDN Caching for Secure Domains](#) – Because CDN caching happens on third-party servers, only cache content that isn't highly sensitive. This topic lists factors to keep in mind when using CDN caching for secure checkout domains.
- [Product Merchandising Rule Caching](#) – This topic explains how to shorten the default cache time before a new product merchandising rule goes live.

CDN Caching

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced | Site Builder



Important: Starting September 2025, CDN caching will be required for all websites associated with NetSuite production accounts. See [Enable CDN Caching](#) to turn on CDN caching before the deadline and avoid performance issues with your site.

You can optimize your website and decrease page-loading time by caching data and site assets on the Content Delivery Network (CDN) available with Commerce web stores. After you set up a CDN cache, data and site assets that are reused across your web store are always cached. Caching lets reused data and assets be read quickly, which boosts site performance.

NetSuite SuiteCommerce uses a state-of-the-art CDN to protect you and your users from internet threats such as DDoS attacks, aggressive bots, and other fraudulent activities. NetSuite has set up and fine-tuned a wide range of protective measures for SuiteCommerce, including rate limiting, bot management, web application firewall, IP reputation management, and geo-blocking according to Oracle policy. A team of network and security engineers monitors and updates these measures 24/7.



Note: SuiteCommerce, SuiteCommerce Advanced, and SuiteCommerce MyAccount websites use Akamai as their CDN services provider. Akamai inserts the original client IP in the True-Client-IP or X-Forwarded-For header. It isn't possible to retrieve the True-Client-IP or X-Forwarded-For headers directly from browser-side JavaScript. Only server-side code has access to incoming HTTP request headers.

To learn more about CDN Caching, refer to the following sections:

- [Items Cached](#)
- [CDN Caching Times](#)
- [Types of Domains to Use with CDN Caching](#)
- [Limiting Cache](#)

Items Cached

The following items are cached by the CDN:

- All image files in the file cabinet, using file extensions such as, .gif, .jpg, .bmp, and .png, as well as static file system images that might be referenced from default site templates.
- The response output from the Item Search API. For example, a request to the Item Search API that returns a list of items.
- The response output of executed SuiteScript hosted outside the file cabinet, if it sets response headers indicating the content can be cached. This refers to SuiteScript associated with SSP applications.
- SSP files



Note: Files in the file cabinet that you sell as download items aren't cached by the CDN.

CDN Caching Times

How long a type of content stays cached in the CDN also affects how quickly returning customers see updated content.

Type of Content	Example	How long is it Cached?
Static Content	Images, CSS	7 days
Scripts	Scripts that aren't dependent on the session	2 hours
Content Delivery	page.ss	5 minutes

You can use the Cache Invalidation Request form to clear the CDN cache, but the browser cache isn't affected. For example, when you invalidate a URL, new customers see new content right away. Customers who reload the page without using the cache, for example, by using the Ctrl + F5 keys, also see new content right away. But returning customers who reload the page normally keep seeing old content until it expires in their browser cache.

If CDN's enabled, static content in the browser cache automatically expires every two hours. This means that if visitors return to the website more than two hours after their last visit, they must request fresh data from the CDN cache. If the static data in the CDN cache was refreshed, either manually or automatically, during those two hours, visitors get the new website content from the CDN cache.

Types of Domains to Use with CDN Caching

The following domain types allow CDN caching:

- Web Store Only
- Checkout Only
- Single Domain for Web Store and Checkout
- Hosted Web Pages

To use CDN caching with a web store domain, the domain must be associated with a Commerce website.

For Hosted Web Pages, the domain isn't associated with a website, but you must use an account with SuiteCommerce or SuiteCommerce Advanced.

For more information about types of domains, see [Set Up Domains for Web Stores](#).

Limiting Cache

As you build your Commerce web store, it's important to see your changes in real time. After you set up CDN caching, you can use tools and strategies to make sure you're seeing the latest website content. For more information, read the following topics:

- [Bypass CDN Cache](#) – Use this strategy to set up a subdomain for testing changes to your website.
- [Cache Invalidation Request](#) – Learn how to invalidate the cache for the whole domain or for specified URLs.
- [Find URLs for Cache Invalidation](#) – Learn how to locate specific URLs for cache invalidation requests. This topic also includes guidelines for sending cache invalidation requests for different types of website updates, such as banners and style sheets.

Enable CDN Caching

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced | Site Builder

Warning: NetSuite provides CDN and caching services that must be enabled in NetSuite. Third-party CDN and caching services aren't supported and must not be used as they can cause operational problems.

Important: Starting September 2025, CDN caching will be required for all websites associated with NetSuite production accounts. You should turn on CDN caching before the deadline to avoid performance issues with your site.

You can enable CDN caching for your website domains. For more information, see [Set Up Domains for Web Stores](#).

To enable the CDN cache:

1. Go to Commerce > Hosting > Domains.
2. Click **Edit** next to the domain name that points to your main website.

Note: Another way to access the Domain record is to go to Commerce > Websites > Website List (Administrator). Click **Edit** next to your domain and go to the **Domains** tab. Then, click **Edit** next to your domain.

3. On the Domain record, in the Advanced section, check the **Use CDN Cache** box.
4. Click **Save** to apply the change.

Read the following topics about how to use CDN caching capabilities to help in website development:

- After enabling CDN caching, data and site assets that are reused across your website are cached for a set amount of time, which you can adjust. For step-by-step instructions on configuring CDN caching, read [Configure CDN Caching](#).
- For instructions on setting up a subdomain to bypass the CDN cache while testing your site, see [Bypass CDN Cache](#).

Configure CDN Caching

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced | Site Builder

To configure CDN caching, you must have enabled it first. For more information, see [Enable CDN Caching](#).

To configure CDN caching:

1. Modify the SSP application.
2. Add the setCDNCacheable call to your SSP application and service files. For more information about using the setCDNCacheable method, see the help topic [SuiteScript 1.0 Documentation](#).

```
1 | <% response.setCDNCacheable(response.CACHE_DURATION_MEDIUM) %>
```



Important: The Shopping Application has the `setCDNCacheable` call in the `index.ssp` file by default. After your domains are set up as described above, CDN caching is enabled for the Shopping Application. If you customize the Shopping Application with external SSP applications, you can also set caching for content returned from those custom services.

After you enable and configure CDN caching, you can clear the cache by sending a cache invalidation request. For more information, see [Cache Invalidation](#).

Bypass CDN Cache

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced | Site Builder

While you're developing and testing your website, you can use a different domain to bypass the CDN and see updated content on your site. You can do this in two different ways:

- A domain without CDN caching enabled, associated with a sandbox account. For more information about setting up and using a sandbox account, see the help topic [NetSuite Sandbox](#).
- A subdomain without CDN caching enabled, associated with your main production account and set up using the following domain pattern: `development(substring).<domain>.<top-level domain>`

For example: if your domain is `example.com`, the test domain could be:

- `development.example.com`
- `development2.example.com`
- `development-temp.example.com`

When you are making changes to your website, you can visit your test domain to make sure that your site displays the changes as expected without seeing the older, cached version of your site.

Cache Invalidation

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

After your data is cached, it usually remains in the cache until it expires. If the data changes at the source or shouldn't be cached anymore, you might want to clear the cache before its expiration time. You can do this by initiating a cache invalidation request through the Cache Invalidation Request form. For more information, see [Cache Invalidation Request](#).

In some cases, an automatic cache invalidation is triggered, so you don't need to do anything manually. For more information, see [Automatic Cache Invalidation](#).

You can view the status of all cache invalidation requests on the Cache Invalidation Status page. For more information, see [Cache Invalidation Status](#).

Note: Cache invalidation doesn't affect the browser cache. For example, when you invalidate cached content, new customers see the new content right away, but returning customers still see the old content until it expires in their browser cache.

Cache Invalidation Request

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

You can trigger a cache invalidation request for more than one domain at the same time. You can also choose to invalidate the cache for the whole domain or for specific URLs.

Clearing Cache for the Whole Domain — As you develop your Commerce web store, you might need to redeploy SSP applications. To see changes to the content delivered from the file cabinet, script files, CMS, and Item Search API request output, use the Clear Cache for the Whole Domain option.

You can also choose this option if you've made several changes and don't remember all the URLs.

Clearing Cache for Specified URLs — Most content is cached in SSP and SuiteScript method calls. To target specific SSP or SuiteScript files that contain the definition of the content you want to clear from the cache, use the Clear Cache for Specified URLs option.

For example, suppose you have a banner on your website that you plan to change frequently. Every time you want to update it, submit a cache invalidation request using the URL of the SSP file (/page.ss) that defines the banner on your site.

To create a new cache invalidation request:

1. Go to Commerce > Content Management > Cache Invalidation Requests > New.

You should see the Cache Invalidation Request page.

Note: You can also create a new Cache Invalidation Request by clicking **New Invalidation Request** on the Cache Invalidation Status page.

2. From the **Available Domains** list, select one or more domains for which you want to invalidate the cache. You must select at least one domain before you continue.
Use the controls to move domains between the **Available Domains** box and the **Selected Domain** box.

Note: Commerce domains with or without CDN are listed under Available Domains if they're in the Live state.

3. Choose the type of operation you want to perform on the selected domains:
 - **Clear cache for the whole domain(s)** — Clears cache for the whole domain.
 - **Clear cache for the following path(s)** — Clears cache for the specified URLs. If you select the **Clear cache for the following path(s)** option, you must add at least one URL path before you click Submit.

Note: For information about determining which URL you should use in cache invalidation requests, see [Find URLs for Cache Invalidation](#).

4. Click **Submit**.

Note: For Commerce domains without CDN caches, only internal caches are cleared by the cache invalidation request.

Cache Invalidation Status

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

After you've created a Cache Invalidation Request, you can check its progress on the Cache Invalidation Status page. The Cache Invalidation Status page shows the status of all cache invalidation requests. If there are too many cache invalidation entries on the page, you can find the cache invalidation request you're looking for by filtering on the following fields: Submitted Date and Time, Request Type, Domain Name, User Name, and Status.

To view the status of a cache invalidation request:

1. Go to Commerce > Content Management > Cache Invalidation Requests.
You'll see the Cache Invalidation Status page with a list of cache invalidation requests.

Note: You can also check the status of a Cache Invalidation Request by clicking **Cache Invalidation Status** on the Cache Invalidation Request page.

2. (Optional) To filter the list of cache validation requests:
 1. Expand **Filters** on the Cache Invalidation Status page.
 2. Use these fields to filter the list of cache invalidation requests:
 - **Date Submitted** — Filter the list to show only requests in the specified date and time range.
 - **Request Type** — Filter the list to show only Automatic requests, Manual requests, or both.
 - **Domain** — Filter the list to show only the selected domains.
 - **User** — Filter the list to show only the selected user.
 - **Status** — Filter the list to show only requests that are Processed, In Progress, Failed, or any combination of these statuses.
 3. (Optional) Click **Reset** to return all filter fields to their default values.

4. Click **Filter Requests**.

Automatic Cache Invalidation

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Automatic cache invalidation keeps cached content accurate by not serving outdated data. It also means you don't have to make manual updates every time you update the hosted files.

For files stored under File Cabinet > Web Site Hosting Files, automatic cache invalidation is only triggered in the following scenarios

- When you modify the content of a hosted file
- When you overwrite a hosted file or media item

For hosted files, automatic cache invalidation is not triggered in the following scenarios:

- When you move, delete, or rename an existing hosted file or media item
- When you upload a new file

If automatic cache invalidation isn't triggered, you can manually invalidate the cache as described in [Cache Invalidation Request](#). However, in most cases, you don't need to because if the URL changes or is new, there's no cache to clear.

You can see the status of the triggered cache invalidation requests on the Cache Invalidation Status page. On this page, you can also filter to show only automatically triggered requests by selecting **Automatic** in the Request Type field. For more information, see [Cache Invalidation Status](#).

Note: Frequently changed files aren't cached on CDN to improve processing performance.

Group Cache Invalidation

To cut down on individual cache invalidation requests, group invalidation requests are created in the following situations:

- When you use SOAP web services to upload files to the File Cabinet.
- When you upload a .zip file to the File Cabinet as described in [Uploading Files to the File Cabinet](#).

If a certain threshold is reached, multiple path invalidation requests might be replaced with a single wildcard invalidation request.

Note: Cache invalidation requests in a group share the same timestamp, which you can see on the Cache Invalidation Status page.

To improve processing performance, automatic throttling is enabled for automatic cache invalidation. This makes sure that your environment doesn't generate too many cache invalidation requests. For example, scheduled scripts that modify files in your environment might generate a lot of cache invalidation requests, which then triggers automatic throttling.

In these cases, a cache invalidation request is created, but automatic throttling disables it. Consequently, you'll see the status as **Suspended** on the Cache Invalidation Status page.


Find URLs for Cache Invalidation

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Most data is cached in SSP and SuiteScript method calls, such as the method calls in the `sc.environment.ssp` file. To clear the CDN cache, you need to clear the cache for URLs of the files that include those methods. Enter URLs that point to the appropriate SSP, CSS, or SuiteScript files in your cache invalidation requests. You **can't** clear CDN cache with product URLs. Product URLs point to a specific item on your website, such as <http://www.mywebstore.com/blue-hat>.

For more information about determining which URL you should use in cache invalidation requests, see [Cache Invalidation in Specific Scenarios](#).

The JavaScript console on your browser is an effective tool for finding website URLs based on the guidelines described below. After you activate the JavaScript console, click the Sources tab. Then, expand a folder to find the URL for the file you want to use in your cache invalidation request.

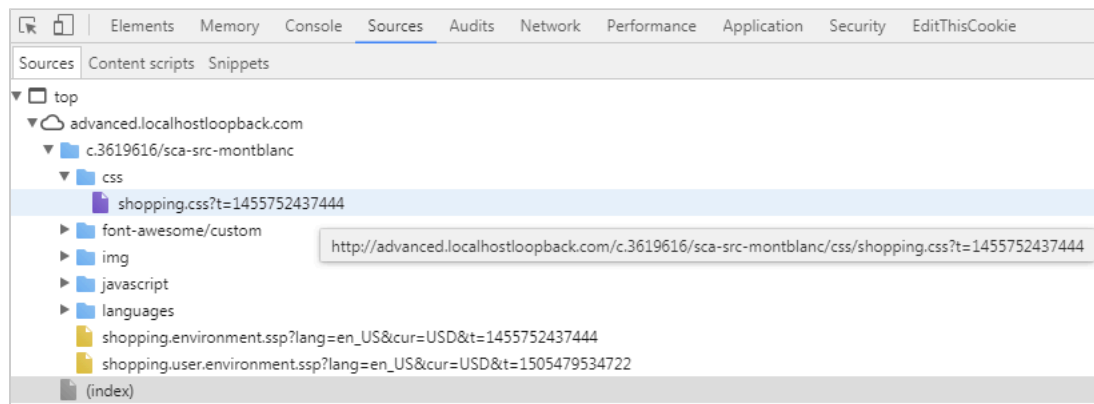

Cache Invalidation in Specific Scenarios

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

The following guidelines describe how to invalidate caches in specific scenarios:

- [Updating Stylesheets](#)
- [Changing Product Details](#)
- [Updating a Product Image](#)
- [Clearing Cached Site Management Tools Content](#)

Note: The URLs provided here are examples only. Check the exact URL for your setup before you submit an invalidation request. For information about how to find the correct URL, see [Find URLs for Cache Invalidation](#).

Updating Stylesheets

For best site performance, CSS stylesheets on Commerce websites are cached in the client-side browser for 7 days. You can submit a cache invalidation request to clear the CSS styles from the CDN cache, but

this doesn't clear the browser cache. So, when using cache invalidation to refresh CSS styles, you must plan ahead to make sure both returning and new customers see the latest CSS changes.

For example, if you want to show a new color scheme on your website in two weeks, upload the new CSS 7 days before you need it live. Then, submit a cache invalidation request for the current CSS file's URL and any URLs that reference it.

To view updated CSS styles:

1. Upload the new CSS file to the file cabinet.
2. Use the Cache Invalidation by URL page to clear the cached CSS.
 - a. In the **Domain Name** field, enter the website domain. For example: **www.mywebstore.com**.
 - b. In the **URL** field, enter the CSS file's URL. For example: **/c.7654321/shopflow-1-05-0/skins/standard/Styles-012345a6789.css**.
 - c. Click **Save**.

Changing Product Details

Code implementing Item Search API requests is cached for 5 minutes. CDN invalidation takes about 7 minutes, but you can use the Cache Invalidation by URL page to force an update.

1. In the **Domain Name** field, enter the website domain. For example: **www.mywebstore.com**.
2. In the URL field, enter the Item Search API request URL. For example: **/api/items?id=199051&fieldset=search**.
3. Click **Save**.

Updating a Product Image

To update an image on your site, you don't need to use the Cache Invalidation by URL page. Instead, you can check the **Generate URL Timestamp** box on the file record in the Web Site Hosting Files Folder.

The screenshot shows a file record form in the NetSuite interface. At the top, there are buttons for 'Save', 'Cancel', and 'Actions'. The form fields include:

- File Name ***: A text box containing 'example.jpg'.
- File Type**: A dropdown menu showing 'JPEG Image'.
- File Size (bytes)**: A text box showing '32,381'.
- Folder ***: A dropdown menu showing 'Web Site Hosting Files : Live Hosting F'.
- Options**: A list of checkboxes on the right side:
 - ☐ Inactive
 - ☐ Available for SuiteBundles
 - ☐ Hide in SuiteBundle
 - ☒ Available Without Login
 - ☐ Company-wide Usage
 - ☒ **Generate URL Time Stamp** (This checkbox is highlighted with a red rectangle in the original image).

Checking this box forces the CDN to store a new version of your file. The file cabinet adds a URL timestamp based on the last date the file was changed. A new timestamp is created each time the file changes. The URL timestamp tells the CDN and browser cache that the content has changed. For example, a new timestamp is created each time you change an image used on a landing page or banner.

Best Practice: If you notice outdated images coming from the cache while you're developing your website, check the Generate URL Timestamp box on the file record. The search service reads the new URL, and the new version of the file gets stored in the CDN cache.

 **Note:** This feature only works for URLs returned by code that uses the Item Search API, such as product images.

Clearing Cached Site Management Tools Content

Site Management Tools (SMT) content is cached like any other content on your site. When you publish new content, SMT-related caches are cleared. Cache clearing occurs for both immediate and scheduled publication.

The cache clearing task is specific to the account's site ID, so only the caches for the site where you published content are cleared. Caches for any other sites owned by the account aren't cleared.

The caches that are cleared include:

- Media Cache
- Ignite Response Cache
- Hosted Page Util Cache
- CDN Cache

CDN Caching for Secure Domains

i Applies to: SuiteCommerce | SuiteCommerce Advanced

You can take advantage of the benefits Content Delivery Networks (CDNs) offer for your secure domains. This topic lists things you should know before using a CDN.

CDN Cache Prerequisites

To enable CDN caches for secure domains, your account must meet the following conditions:

- **Custom Secure Domain** – You must provision at least one secure custom domain. Custom domains are sometimes called **vanity** domains.
- **SSL Certificate upload**– You must use automatic certificates or upload your SSL certificate to your domain record. For more information, see [Automatic and Manual Certificates](#).

CDN Caching for Private versus Public Content

Caching stores one or more copies of information about the network for a period of time. Because CDN caching happens on third-party servers, you shouldn't cache content where security is a top concern.

Content that isn't a security risk is considered public, while content that needs to be kept secure is considered private. Content marked as private should never be cached.

NetSuite uses private folders, public folders, and file extensions to decide what gets cached on CDN servers. To protect your shoppers, it's important that you **don't keep private information in public folders**. Examples of private content include shipping addresses, billing addresses, and credit card information.

Use this table to see how folders and extensions determine which information can be cached by a CDN.

Path (folder) or extension	Cached on CDN
/private/ Private folder names must be lowercase. If a private folder name is all uppercase (PRIVATE), it is treated as a public folder and the contents will be cached. Uppercase folder names do not meet standard caching rules.	Never cached.
/public/	Might be cached depending on header settings. If caching length not set, default TTL is 24 hours. Maximum is 7 days.
*.jpg, *.png, *.js, *.gif, *.css, *.html, *.ico, *.woff, *.shtml, *.txt, *.jpeg, *.ttf, *.woff2, *.json, *.jpeg, *.eot, *.pdf, *.xml, *.otf, *.cur, *.htm, *.tpl, *.swf	Might be cached depending on header settings. If caching length not set, default TTL is 24 hours. Maximum is 7 days.
All other file extensions	Never cached. Considered to be private.

 **Warning:** Don't keep sensitive content in public folders because it might get cached on third-party servers.

CDN IP Address ranges

Instead of giving your site a single IP address, a CDN assigns a range of IP addresses. This range can and will change on a daily basis. NetSuite can't predict or control which addresses the CDN will select. If you use your secure domain for secure document storage, keep in mind that an IP address managed by a CDN can't be added to a safelist.

 **Warning:** NetSuite can't predict which IP addresses CDN providers will use.

For more information, see the help topic [NetSuite IP Addresses](#).

Product Merchandising Rule Caching

📘 Applies to: SuiteCommerce | SuiteCommerce Advanced

Product merchandising rules are cached to improve performance. By default, it takes about two hours before a new merchandising rule becomes active. If you want to shorten the cache time, you must make changes to `DM_SS_Library.js` in the Product Merchandising bundle.

Caching for product merchandising rules is defined in two instances of the `TTL = attribute`. By default, it's set to `MAX_TTL`, which means a two-hour cache. To cut it down to about five minutes, change both to `MIN_TTL`.

Keep in mind that reducing cache times can affect performance.

```

1 function setTTL(paramValue){
2     //ttl is not defined
3     if(paramValue == null || paramValue == undefined || paramValue == ''){
4         ttl = MAX_TTL;
5         return ttl;
6     }
7
8     //ttl is defined but invalid
9     var paramValueInt = parseInt(paramValue);
10    if(isNaN(paramValueInt) || paramValueInt < MIN_TTL || paramValueInt > MAX_TTL){
11        ttl = MAX_TTL;
12        return ttl;
13    }
14    else{
15        ttl = paramValueInt;
16        return paramValueInt;
17    }
18 }

```

Application Performance Management (APM) for Commerce

 **Note:** This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

Monitor and improve the performance of your Commerce products with the following Application Performance Management (APM) features:

- **SuiteCommerce APM (SC APM)**– This SuiteApp shows detailed information about SuiteCommerce website performance. Use it to view content display times and view counts filtered according to page type, device, or navigation type.

Web store managers can use SC APM to find and monitor website metrics that can contribute to performance issues. Administrators can use the SuiteApp to find the causes of performance issues and investigate specific actions and timings.

- **SuiteCommerce InStore APM (SCIS APM)** – This SuiteApp shows detailed information about SuiteCommerce InStore (SCIS) performance. You can filter the information to see performance data based on particular devices running SCIS, certain retail locations, or subsidiaries.

Administrators can use SCIS APM to find customizations, such as user event scripts and workflows, that affect SCIS performance. Then, they can change settings in SCIS to enable faster performance or work with their in-house development team to optimize long-running scripts.

To set up APM for Commerce features, see the following help topics:

- [APM for Commerce Prerequisites](#)
- [Installing APM for Commerce Features](#)
- [Granting Access to APM for Commerce Features](#)

To learn more about terminologies, dashboards, and actions used in the features, see the following help topics:

- [APM for Commerce Terminology](#)
- [APM for Commerce Dashboards](#)
- [Action Sensors](#)

To track the performance of actions users performed on your SuiteCommerce sites and devices, see the following help topics:

- [APM for Commerce Action Performance](#)
- [APM Action History](#)
- [APM Action History Detail](#)

APM for Commerce Terminology

 **Note:** This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

Here are some key terms used in Application Performance Management (APM) for Commerce features:

- **Action** – A step or activity that a user performs on the website. For more information, see [APM for Commerce Action Performance](#).
- **Content Display Time (CDT)** – The time it takes to update content on a Commerce web page relative to the action the user performs.

Commerce websites use the Single-Page Application (SPA) model to dynamically update a page when a user interacts with the site. With CDT, you can monitor the time that these interactions take. Use it to identify web addresses or actions that can affect user experience.

 **Note:** CDT is not a measure of the full page load time or the time it takes to load the page from when it is first viewed to when it has finished loading all elements.

- **Navigation Types** – The ways a user loads web pages.
 - **Hard Navigation** – The user's initial launch of the web page.
 - **Soft Navigation** – Any subsequent action the user performed after the initial web page launch.
- **Statistical Values** – The different computations of metrics available on the charts and tables.
 - **Average** – Shows the average value of the metric.
 - **Median** – Shows the median (middle) value of the metric.
 - **95th Percentile** – Shows the value that is recorded for the metric 95% of the time. 95% of recorded values are lower and 5% are higher.
- **Views** – The number of times users viewed a web page.

APM for Commerce Prerequisites

 **Note:** This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

Before you install any of the Application Performance Management (APM) SuiteApps for Commerce, complete the prerequisites.

SuiteCommerce APM Prerequisites

Before you install the SuiteApp, you must be implementing SuiteCommerce or the 2020.1.1 release of SuiteCommerce Advanced or later.

Installing APM for Commerce Features

 **Note:** This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

Application Performance Management (APM) for Commerce SuiteApps, SuiteCommerce APM and SuiteCommerce InStore APM, are managed SuiteApps. They are installed separately from the APM SuiteApp and other Commerce SuiteApps.

You can install these SuiteApps in both OneWorld and non-OneWorld accounts.

After installing either APM for Commerce SuiteApp, updates and enhancements are pushed to your account automatically, and you don't need to update them manually.

Use one of these options to install the SuiteApp you need:

- [Installing the SuiteCommerce APM SuiteApp](#)
- [Installing the SuiteCommerce InStore APM SuiteApp](#)

Installing the SuiteCommerce APM SuiteApp

Follow these steps to install the SC APM SuiteApp:

To install SC APM from the SuiteApp Marketplace:

1. Go to SuiteApps.
2. In the Search field, enter **APM for SuiteCommerce**.
3. Click the SuiteApp tile.
This opens the SuiteApp details page.
4. Click **View SuiteApp**.
This opens the Bundle Details page.
5. Click **Install**. Click **OK**.
6. Click **Install Bundle**. Click **OK**.
7. The Installed Bundles page has a **Status** column to show the installation progress.
Click **Refresh** to update the status. The column shows a green check mark when the installation's done.

Installing the SuiteCommerce InStore APM SuiteApp

Follow these steps to install the SCIS APM SuiteApp:

To install SCIS APM:

1. Go to Customization > SuiteBundler > Search & Install Bundles.
2. In the **Keywords** field, enter the Bundle ID: **267306**.

3. Verify that the search result lists **SuiteCommerce InStore APM**.
4. Click the bundle name.
This opens the Bundle Details page.
5. Click **Install**. Click **OK**.
6. Click **Install Bundle**. Click **OK**.
7. The Installed Bundles page has a **Status** column to show installation progress.
Click **Refresh** to update the status. The column shows a green check mark when the installation is done.



Note: You might need to scroll to the bottom to find the SuiteCommerce InStore APM bundle and check its status. The installation could take some time.

After installing the APM for Commerce SuiteApp you need, grant roles and employees permission to use it. For more information, see [Granting Access to APM for Commerce Features](#).

Granting Access to APM for Commerce Features

Note: This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

Administrators need to grant employees permission to view performance data in SuiteCommerce (SC) APM and SuiteCommerce InStore (SCIS) APM.

See the following help topics:

- [Granting Access to SuiteCommerce APM](#)
- [Granting Access to SuiteCommerce InStore APM](#)

Granting Access to SuiteCommerce APM

Use the **SuiteCommerce Performance Setup** page to give roles and employees access to SC APM.

To grant permission to view SuiteCommerce APM:

1. Go to Customization > SuiteCommerce Performance > SuiteCommerce Performance Setup.
2. To let someone view SC APM data, do one of the following:
 - To give access to a role:
 1. Click the **Roles** subtab.
 2. From the **Role** field, select a role.
 3. Click **Add**.
 4. Repeat these steps for each role you want to add.
 - To give access to an employee:
 1. Click the **Employees** subtab.
 2. From the **Employee** field, select an employee.
 3. Click **Add**.
 4. Repeat these steps for each employee you want to add.
3. Click **Save**.

Granting Access to SuiteCommerce InStore APM

Use the **SuiteCommerce InStore Performance Setup** page to give roles and employees access to SCIS APM.

To grant permission to view SuiteCommerce InStore APM:

1. Go to Customization > SCIS Performance > SCIS Performance Setup.
2. To let someone view SCIS APM data, do one of the following:

- To give access to a role:
 1. Click the **Roles** subtab.
 2. From the **Role** field, select a role.
 3. Click **Add**.
 4. Repeat these steps for each role you want to add.
 - To give access to an employee:
 1. Click the **Employees** subtab.
 2. From the **Employee** field, select an employee.
 3. Click **Add**.
 4. Repeat these steps for each employee you want to add.
3. Click **Save**.

APM for Commerce Dashboards

Note: This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

See performance data at a glance on the various dashboards available with Application Performance Management (APM). The following table lists the dashboards you can use.


Note: APM tools display data from up to 30 days ago—the 30-day limit is also the max in the time interval dropdown. You can try to get data from farther back by customizing the date range, but the page only shows it if still available.

APM for Commerce Feature	Dashboards	Description	Navigation
SuiteCommerce APM (SC APM)	SuiteCommerce Performance Dashboard	See high-level info about the SuiteCommerce SuiteApp you're using, plus view counts and statistics for each page type and action on your site. For more information, see SuiteCommerce Performance Dashboard .	Go to Customization > SuiteCommerce Performance > SuiteCommerce Performance Dashboard.
	SuiteCommerce Page Type Diagnostics	See detailed timing and view counts for specific web and modal addresses on the page type you want to investigate. For more information, see SuiteCommerce Page Type Diagnostics .	Choose from the following: - On the SuiteCommerce Performance Dashboard page, click a row on the Page Type portlet. - Go to Customization > SuiteCommerce Performance > SuiteCommerce Page Type Diagnostics.
	SuiteCommerce Page View Details	See information about web resources and their timings for a specific time a user viewed the page. For more information, see SuiteCommerce Page View Details .	To open the page: - Go to SuiteCommerce Page Type Diagnostics. - On the Content Display Times and Views Over Time chart, click a point. - In the Page Type Views table, click the corresponding open icon.
	SuiteCommerce Action Diagnostics	See information about actions users took on the website and domain you want to check. For more information, see SuiteCommerce Action Diagnostics .	Choose from the following: - On the SuiteCommerce Performance Dashboard page, click an action tile on the Actions portlet. - Go to Customization > SuiteCommerce Performance > SuiteCommerce Action Diagnostics.

APM for Commerce Feature	Dashboards	Description	Navigation
SuiteCommerce InStore APM (SCIS APM)	SuiteCommerce InStore Performance Diagnostics	See high-level information about actions sales associates performed using SCIS as a point-of-sale solution. For more information, see SuiteCommerce InStore Performance Diagnostics .	Go to Customization > SCIS Performance > SCIS Performance Diagnostics.

SuiteCommerce Performance Dashboard

SuiteCommerce Performance Dashboard is an analytical tool that gives you high-level performance data for your Commerce websites. It's a starting point for investigating potential issues, with links to more detailed dashboards in SuiteCommerce Application Performance Management (APM).

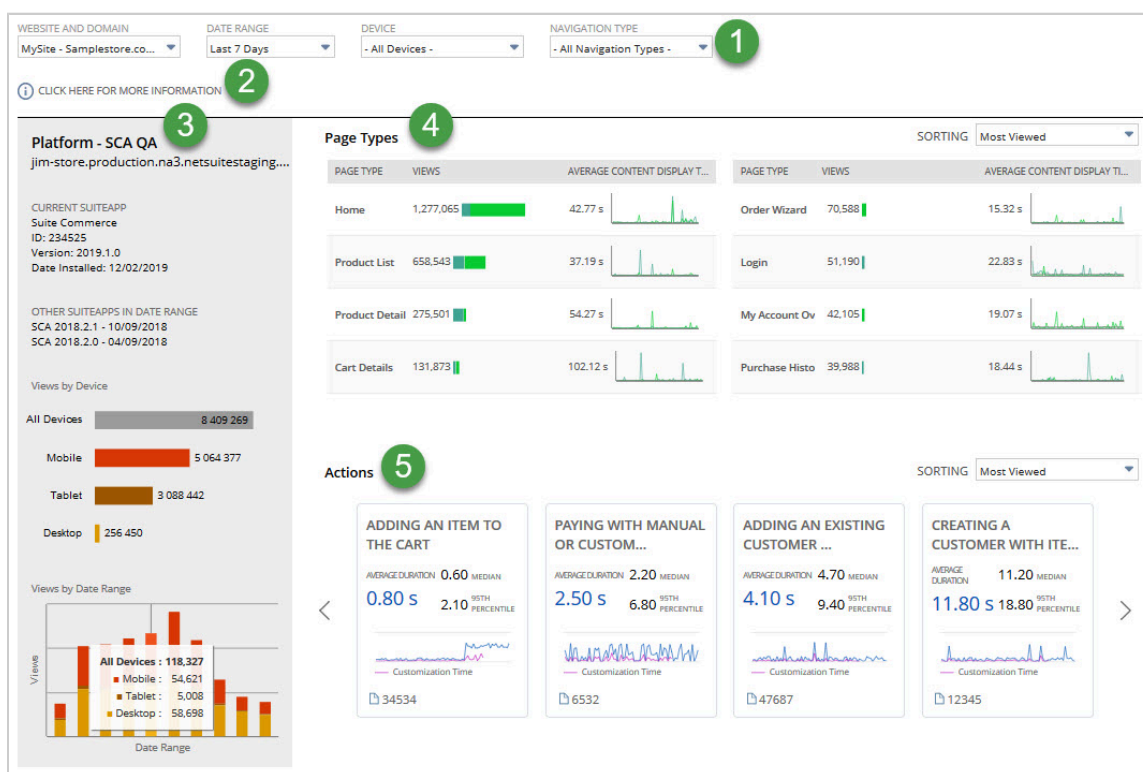


The following table points out and describes the dashboard's visual elements:

Item	Information	Description
1	Filters	Use these filters to choose what data appears on the dashboard: Website and Domain- Select the specific domain on a website that you want to monitor. Date Range- This filter is set to show the last seven days by default. Select one of the preset ranges or create a custom date range.

Item	Information	Description
		■ Device- This filter is set to show all devices by default. Select the specific device that you want to monitor. ■ Navigation Type- This filter is set to show all navigation types by default. Select the specific navigation type that you want to monitor.
2	Information Link	The information icon and text link you to the dashboard's help topic.
3	Domain Portlet	This portlet shows general statistics and trends about your domain: ■ Website and domain name ■ Name, ID, version, and installation date of the active SuiteCommerce SuiteApp in use ■ Name, version, and installation dates of the other SuiteCommerce SuiteApps installed in the account during the selected date range. ■ Bar chart of the number of views on the website for each device ■ Stacked column chart comparing device view counts across your selected date range
4	Page Type Portlet	This portlet shows a table with details for up to eight page types: ■ Views- Shows the total view count for the page type beside a stacked horizontal bar. Point to the horizontal bar to see the views for each navigation type. ■ Average Content Display Time- Shows the total time in seconds and a mini line chart of the display times across your selected date range. Point to the chart to see the total time for each navigation type. To see diagnostic data for a page type, click its chart. For more information, see SuiteCommerce Page Type Diagnostics. To sort page types, go to the top right of the portlet and pick an option in the Sorting field: ■ Most Viewed- Sort page types according to number of views. ■ Highest Content Display Time- Sort page types according to the length of content display times. ■ Most Relevant- Sorts page types according to the value calculated as the number of views multiplied by the average content display time.
5	Actions Portlet	This portlet displays four tiles, each showing performance info for an action based on your selected filters. Click a tile to see diagnostic data for that action. For more information about the what's on each tile and action diagnostics page, see SuiteCommerce Action Diagnostics. To sort actions, go to the top right of the portlet and select from these options: ■ Most Viewed- Sort actions according to number of views. ■ Highest Execution Time- Sort actions according to the length of times they took to process.

SuiteCommerce Page Type Diagnostics

SuiteCommerce Page Type Diagnostics is an analytical tool that provides high-level and detailed information about how a specific page type is performing on your website.

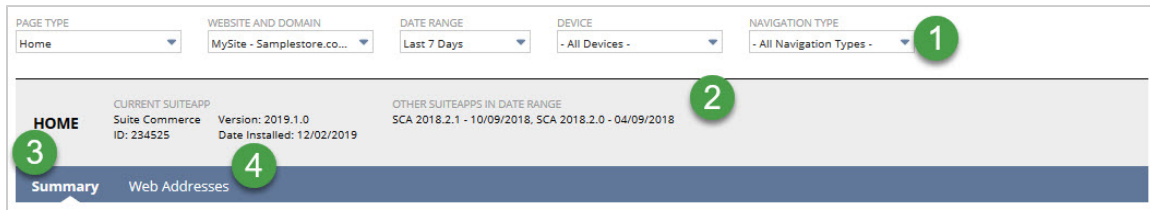


The following table points out and describes the dashboard's visual elements:

Item	Information	Description
1	Filters	Use these filters to pick what data appears on the dashboard: ■ Page Type- Select the page type that you want to analyze. ■ Website and Domain- Select the specific domain on a website that you want to monitor. ■ Date Range- This filter is set to show the last seven days by default. Select one of the preset ranges or create a custom date range. ■ Device- This filter is set to show all devices by default. Select the specific device that you want to monitor. ■ Navigation Type- This filter is set to show all navigation types by default. Select the specific navigation type that you want to monitor.
2	Domain Banner	The banner shows this general information about your selected page type: ■ Page type name ■ Name, ID, version, and installation date of the active SuiteCommerce SuiteApp in use ■ Name, version, and installation dates of the other SuiteCommerce SuiteApps installed in the account
3	Summary Tab View	Click this view to see statistics and charts for the selected page type. For more information, see Summary View.
4	Web Addresses Tab View	Click this view to see a detailed table for each URL page of the selected type. For more information, see Web Addresses View.

Summary View

SuiteCommerce Page Type Diagnostics includes a summary view.

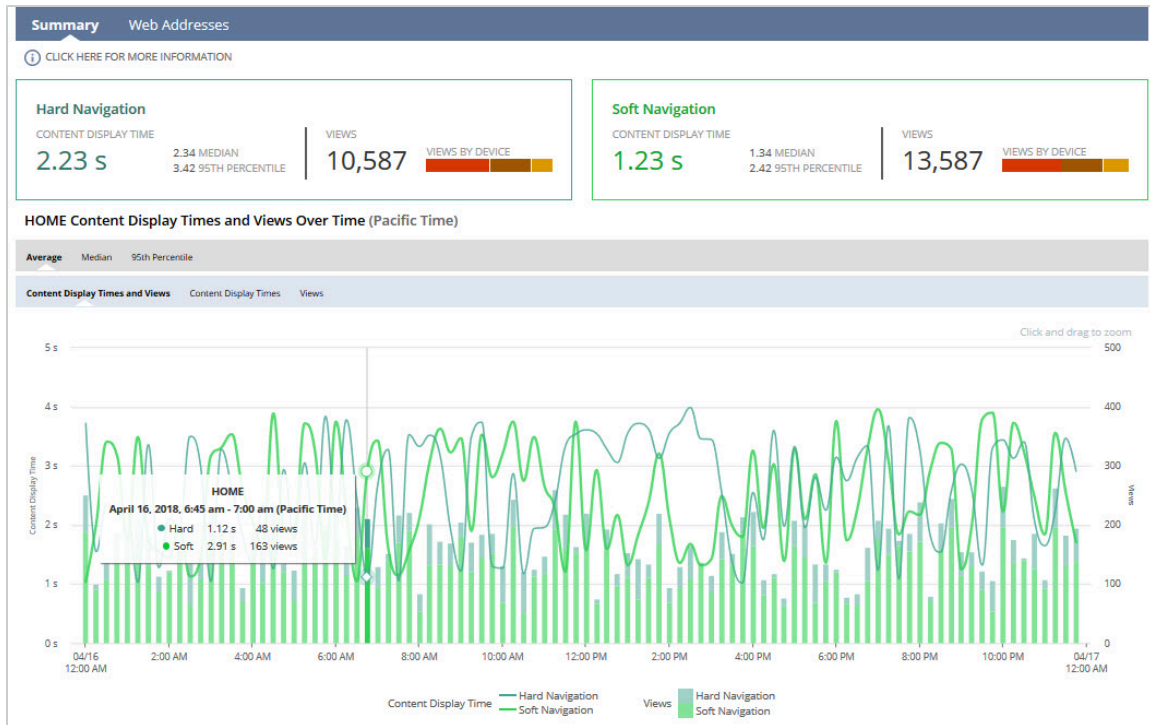

When clicked, this view shows the following statistics and charts about the selected page type:

- **Information Icon**- Links to the dashboard help topic.
- **Navigation Type Banner**- Shows content display time, total views, and device views for each navigation type.
- **Content Display Times and Views Over Time Charts**- Charts are grouped under subtabs for average, median, and 95th percentile. Each tab includes these charts:
 - Content display times and views
 - Content display times
 - Views

To see content display times and view counts for each navigation type at a specific time, hover over a spot on the chart. Click to open the Page Type Views table, or drag over an area to zoom in on a specific range.

The Page Type Views table appears when you click a specific timing on the chart, showing details for instances from that time.

Use the **Content Display Time** field to filter the table's entries.

HOME Views on April 16, 2018, 6:45 am - 7:00 am (Pacific Time) ⓘ

CONTENT DISPLAY TIME

www.abc.com... - www.def.com... Total: 165

DATE AND TIME ▲	CONTENT DISPLAY TIME	URL FRAGMENTS	NAVIGATION TYPE	DEVICE
4/16/2019 3:30 pm	4.65 s	/search?keywords=rogue	Hard Navigation	Mobile
4/20/2019 4:30 pm	3.45 s	/Shooting/Choke-Tubes/12-Gauge	Soft Navigation	Tablet
4/22/2018 5:30 pm	2.56 s	/Mega-Flawless-Cross-Amulet?gclid=EAlaQobChMi1Yult6Kg5gIVC4vI...	Hard Navigation	Desktop
4/23/2018 6:30 pm	3.66 s	/search?keywords=2358016	Soft Navigation	Mobile
4/25/2018 7:30 pm	3.88 s	/fag-6324-2rsr-c3	Hard Navigation	Tablet
4/26/2018 8:30 pm	3.94 s	/sca-dev-aconcagua/checkout.ssp?is=login&login=T&fragment=login-r...	Soft Navigation	Desktop
4/16/2019 3:30 pm	4.65 s	/search?keywords=rogue	Hard Navigation	Mobile
4/20/2019 4:30 pm	3.45 s	/Shooting/Choke-Tubes/12-Gauge	Soft Navigation	Tablet
4/22/2018 5:30 pm	2.56 s	/Mega-Flawless-Cross-Amulet?gclid=EAlaQobChMi1Yult6Kg5gIVC4vI...	Hard Navigation	Desktop
4/23/2018 6:30 pm	3.66 s	/search?keywords=2358016	Soft Navigation	Mobile

The following columns appear on the table:

- **Open Icon**- Opens the Page View Details page, where you can see resources and their timings for when the user viewed the page. For more information, see [SuiteCommerce Page View Details](#).
- **Date and Time**- Shows when the user viewed the page.
- **Content Display Time**- Shows the content display time for the page.
- **URL Fragments**- Shows the web address visited.
- **Navigation Type**- Shows how the user loaded the page.
- **Device**- Shows the device used to load the page.

Web Addresses View

SuiteCommerce Page Type Diagnostics includes a summary view.

Summary Web Addresses

CLICK HERE FOR MORE INFORMATION ⓘ

www.abc.com - www.def.com Total: 15

URL FRAGMENTS ▲	AVERAGE CONTENT DISPLAY TIME	MEDIAN CONTENT...	95TH PERCENTILE ...	VIEWS	NAVIGATION TYPE...	VIEWS BY DEVICE
Mens-Radley-Casual-Shoes?utm_cam...	2.34 s	2.54 s	5.34 s	534		
cat/athletic/gender/women	1.34 s	1.12 s	2.34 s	364		
cart	3.77 s	3.34 s	4.34 s	473		
Womens-Iokua-II-Black-Athletic-Shoes_...	3.45 s	4.23 s	1.23 s	235		
tb9024fgp-womens-mightywalk-athleti...	4.11 s	4.23 s	5.23 s	663		

When clicked, this view shows a table with the following information:

- **URL Fragments**- Shows the address of the web page.
- **Average Content Display Time (CDT)**- Shows the average content display time for the URL or web address, plus a mini line chart for the date range.
- **Median Content Display Time**- Shows the median content display time for the web address.

- **95th Percentile Content Display Time**- Shows the 95th percentile content display time for the web address—95% of views were slower than this time, and 5% were faster.
- **Views**- Shows the view count for the web address.
- **Navigation Type**- Shows a horizontal bar chart for views by navigation type.
- **Views by Device**- Shows a horizontal bar chart for views by device type.

When you click a row in the Web Addresses table, a portlet pops up with content display times and views over time charts, grouped into tabs for average, median, and 95th percentile, like in the summary view.

Click a point on the chart to open the corresponding page type views table, or drag to zoom in on a specific range.

When you click a specific timing on the chart, the Page Type Views table appears, showing details for instances from that time—similar to the table on the summary view.

SuiteCommerce Page View Details

SuiteCommerce Page View Details shows info about web resources and their timings for the exact time a user viewed the page.



The following elements are available on the dashboard:


Item	Information	Description
1	Header	Shows the following information about the page: ■ Domain- Shows the website's domain. ■ URL Fragment- Shows the URL fragment that locates the page. ■ Web or Modal Address- Shows the full URL of the page the user viewed. ■ Content Display Time- Shows how long it took to update page content for the user's action. ■ Navigation Type and Device- Shows how the user viewed the page and what device they used.

Item	Information	Description
		■ Current SuiteApp- Shows the current SuiteCommerce SuiteApp name and version.
2	Resource Timing Chart	Shows website resources and when they loaded. Hover over a bar in the chart to see what triggered the resource. The tooltip shows the timing of the following load phases: ■ DNS- Refers to Domain Name System and shows the time it took to access the web address. ■ TCP- Refers to Transmission Control Protocol and shows the time it took to properly establish a connection. ■ TTFB- Refers to Time to First Byte and shows the time it took for the browser to get the first byte from the server.

SuiteCommerce Action Diagnostics

SuiteCommerce Action Diagnostics is an analytical tool that provides high-level and in-depth information about the actions that users perform on your website.

For more information about the actions and customizations that the dashboard captures, see [APM for Commerce Action Performance](#).

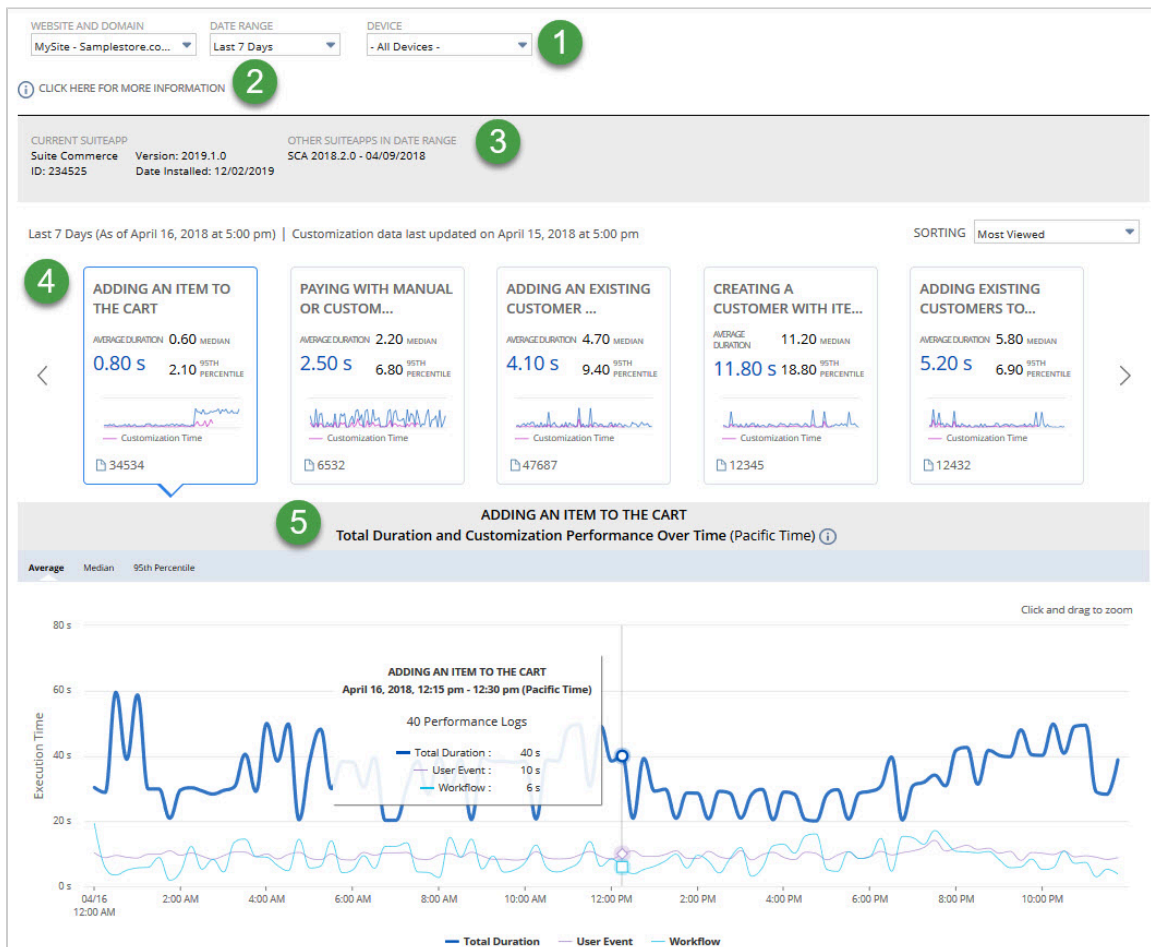

The following table points out and describes the dashboard's visual elements:


Item	Information	Description
1	Filters	Use these filters to pick what data appears on the dashboard: ■ Website and Domain- Select the specific domain on a website that you want to monitor. ■ Date Range- This filter is set to show the last seven days by default. Select one of the preset ranges or create a custom date range. ■ Device- This filter is set to show all devices by default. Select the specific device that you want to monitor.
2	Information Icon	The information icon and text link you to the dashboard's help topic.
3	SuiteCommerce SuiteApps Portlet	This portlet shows general information about your SuiteCommerce SuiteApps: ■ Name, ID, version, and installation date of the SuiteCommerce SuiteApp in use ■ Name, version, and installation dates of the other SuiteCommerce SuiteApps installed in the account
4	Action Tiles	This carousel displays up to 10 action tiles. For more information, see Action Tiles.
5	Total Duration and Customization Performance Timeline	The timeline appears when you click an action tile. For more information, see Total Duration of Actions and Customization Performance Over Time.

SuiteCommerce InStore Performance Diagnostics

SuiteCommerce InStore APM (SCIS APM) shows performance data for actions by sales associates using SCIS as a point-of-sale solution.

The date shown for customizations like user event scripts and workflows is when SCIS APM last gathered data in the past 30 days, no matter what filter range you pick. If there's no data for user event scripts, workflows, or actions in your selected date range, a notification will say that customization data isn't available.

For more information about the actions and customizations that the dashboard captures, see [APM for Commerce Action Performance](#).

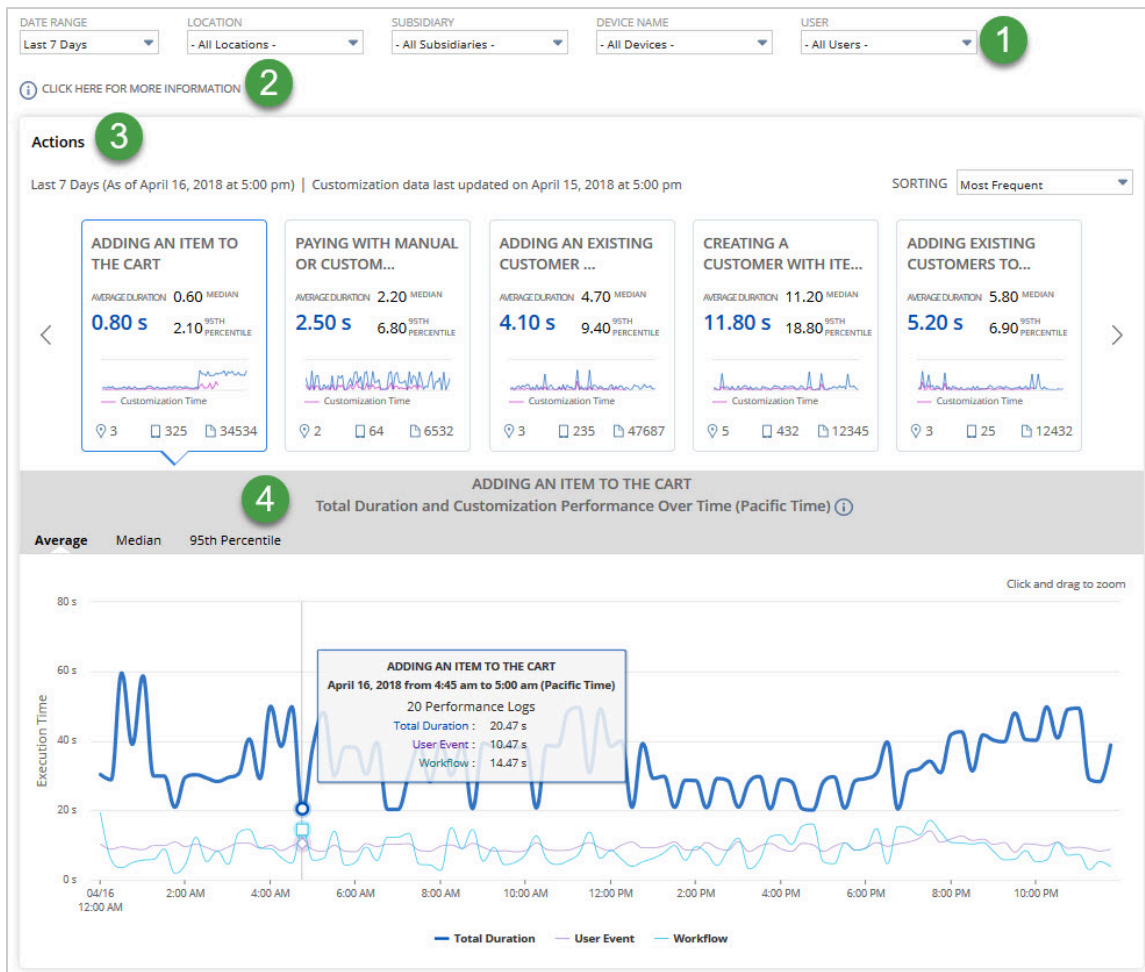

The following table points out and describes the dashboard's visual elements:

Item	Information	Description
1	Filters	Use these filters to choose what data appears on the dashboard: Date Range — (Required) Pick a date range between 1 and 30 days to view SCIS performance data. Location — Choose a location to focus on performance data from a specific store. Subsidiary — Pick a subsidiary to view performance data for actions in a certain subsidiary or all subsidiaries Note: The Subsidiary filter only appears if you are using a OneWorld account. Device Name — See performance data from a specific device or all devices running SCIS. User — Pick an employee name to view data for transactions from a specific sales associate.
2	Information Icon	The information icon and text link you to the dashboard's help topic.
3	Action Tiles	This carousel displays up to 20 action tiles.

Item	Information	Description
		For more information, see Action Tiles .
4	Total Duration and Customization Performance Timeline	The timeline appears when you click an action tile. For more information, see Total Duration of Actions and Customization Performance Over Time. Click a point in the timeline to view the action history table. For more information, see APM Action History.

APM for Commerce Action Performance

Note: This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

You can monitor specific actions users take on your websites or devices. Application Performance Management (APM) for Commerce lets you see both high-level data and the detailed history of each action on dashboards. For more information, see [Action Performance Dashboards](#).

To analyze action performance, APM for Commerce dashboards capture data from a set list of sensors, as well as from custom scripts and workflows. To learn more, see the following help topics:

- [Action Sensors](#)
- [Customization](#)

To start monitoring actions, see the following help topics:

- [APM Action Diagnostics](#)
- [APM Action History](#)
- [APM Action History Detail](#)

Action Performance Dashboards

The following table describes the dashboards that display action performance data.

APM for Commerce Feature	Dashboards	Description	Navigation
SuiteCommerce APM (SC APM)	SuiteCommerce Action Diagnostics	See information about actions users took on the website or domain you're investigating. Click a point on the timeline to view that action's history. For more information, see the following help topics: ■ APM Action Diagnostics ■ APM Action History	Choose from the following: ■ On SuiteCommerce Performance Dashboard, click an action tile on the Actions portlet. ■ Go to Customization > SuiteCommerce Performance > SuiteCommerce Action Diagnostics.
	SuiteCommerce Action History Detail	See detailed timing and performance data for a specific time an action occurred. For more information, see APM Action History Detail .	On SuiteCommerce Action Diagnostics, click a point in the timeline to open the Action History table. Locate the performance log, then click the corresponding view detail icon.
SuiteCommerce InStore APM (SCIS APM)	SuiteCommerce InStore Performance Diagnostics	See actions sales associates performed using SCIS as a point-of-sale solution. Click a point on the timeline to view that action's history. For more information, see the following help topics:	Go to Customization > SCIS Performance > SCIS Performance Diagnostics.

APM for Commerce Feature	Dashboards	Description	Navigation
		■ APM Action Diagnostics ■ APM Action History	
	SuiteCommerce InStore Action History Detail	See detailed timing and performance data for a specific time an action occurred. For more information, see APM Action History Detail.	On SuiteCommerce InStore Performance Diagnostics, click a point in the timeline to open the Action History table. Locate the performance log, then click the corresponding view detail icon.

To view all the other dashboards available with APM for Commerce features, see [APM for Commerce Dashboards](#).

Action Sensors

APM for Commerce measures performance data for certain actions during daily operations, and each action shows up as a tile on the dashboard pages.

To view the specific actions available for each APM for Commerce feature, see the following help topics:

- [SuiteCommerce APM Action Sensors](#)
- [SuiteCommerce InStore APM Action Sensors](#)

SuiteCommerce APM Action Sensors

SuiteCommerce APM captures performance statistics for the following actions:

Action	Description
Customer Registration	Measures how long it takes to register a customer on the website—from when the user clicks Customer Registration to when the HTTP response completes.
Save Address	Measures how long it takes to save an address during checkout or when editing/creating a new address in My Account.
Add to Cart	Measures how long it takes to add an item to the cart on these pages: ■ Product Detail ■ Product List ■ Quick View ■ Quick Add
Remove From Cart	Measures how long it takes to remove an item from the cart on the Cart page.
Place Order	Measures how long it takes to try to place an order on the website—from when the user clicks Place Order to when the HTTP response completes and the status field shows if the order was placed.
Save Credit Card	Measures how long it takes to save a credit card in the system during: ■ Creating a new credit card on the Checkout page ■ Adding or editing the card on the My Account page

Action	Description
Request a Quote	Measures how long it takes to submit a quote request on the website—from clicking Submit Quote Request to when the HTTP response completes.

SuiteCommerce InStore APM Action Sensors

SuiteCommerce InStore APM captures performance statistics for the following actions:

Category	Action	Description
Customers and Items	Creating a customer with an empty cart	For a customer with no record in SCIS and an empty cart, this action starts when a sales associate creates the customer, taps Create and Add , and adds them to a transaction. It ends when the associate can add items.
	Creating a customer with items in the cart	For a new customer with items in the cart, the action starts when the associate creates the customer, taps Create and Add , and adds them to the transaction, and ends when the associate can add items.
	Adding an existing customer to an empty cart	For a customer who has a record in SCIS and has an empty cart, the action starts when the associate selects and adds them to a transaction and ends when the associate can add items.
	Adding an existing customer to a cart with items	For a customer who has a record in SCIS and has items in the cart, the action starts when the associate selects and adds them to a transaction and ends when the associate can add items.
		 Note: When a new customer is created or an existing customer is added to a sales transaction in progress, the application recreates the transaction.
	Apply line-item discount, cart ready	Measures how long it takes to add a discount to an item in the cart—from when the associate applies the discount to when they can use the cart again.
	Apply transaction discount, cart ready	Measures how long it takes to apply a discount at the transaction level—from when the discount is applied to when the associate can use the cart again.
	Display add customer form	Measures how long it takes to display the form for adding a new customer—from when the associate starts to when the form appears.
	Display item search results	Measures how long it takes to show search results—from entering a keyword to seeing the results.
	Adding an item to the cart	Measures how long it takes to add an item to the cart.
Login and Authentication	Open Product Detail Page (PDP)	Measures how long it takes to load the Product Details page—from clicking the item link to being able to add the item or select options.
	Authenticate login credentials	Measures how long it takes to authenticate login credentials—from clicking Log In to selecting a role/location or going to the open cart.

Category	Action	Description
Payments, Payment Devices, and Refunds	End-to-end payment device processing	Measures the time from when the payment device initializes until the payment is processed, including customer interaction.
	Paying with credit memo	Measures how long it takes to pay with a credit memo—from applying the payment to when the receipt appears. This action excludes the time, if needed, to manually enter credit memo information. For split payments, it ends when the user is ready to apply the next payment.
	Paying with gift card	Measures how long it takes to pay with a gift card—from applying payment to seeing the receipt. This action excludes the time spent manually entering gift card information. For split payments, it ends when the user is ready to apply the next payment.
	Paying with manual or custom payment methods	Measures how long it takes to process cash, check, or manual credit card payments in SCIS (no payment device)—from applying payment to seeing the receipt. This includes custom payment methods.
	Priming the payment device	Measures how long it takes to initialize the PIN pad or payment device—from entering the amount to the device being ready to accept payment.
	Priming the payment device for refund	Measures the time to initialize the payment device for a refund—from applying the refund payment to when the device is ready for the refund.
	Refunding automatically to original card	Measures automatic refunds to the original card—from priming the device to refund applied and receipt shown.
	Refunding to specific card	Measures refunds to a specific card (not the original one)—from priming the device to refund applied and receipt shown.
Receipts	Display receipt after NetSuite payment confirmation	Starts when payment confirmation comes from NetSuite and ends when the receipt appears.
	Display email receipt status	Shows if the email receipt was sent successfully or not—from clicking Send to seeing success or failure.
	Display print receipt status	Shows if printing was successful—from clicking Print or sending an auto-print request to getting the print job status.
Returns	Submit validated return, cart ready	Measures how long it takes to prepare the cart after a validated return—from clicking Return to being able to use the cart again.
	Unvalidated return, cart ready after selecting line	Measures how long it takes after selecting a line for unvalidated return—from clicking Return for the item to using the cart again.
Transaction Retrieval	Begin return from transaction details	Measures the time to start a return from transaction details—begins when the associate initiates a return and ends when the return form opens (can start from receipt scan, transaction history, or customer timeline).
	Retrieve transaction from scan	Measures the time to retrieve transaction info by scan—starts when the transaction code is scanned and ends when SCIS gets the data from NetSuite.

Category	Action	Description
	Display retrieved transaction	Measures how long it takes to display scanned transaction info—from when SCIS gets the data to when the associate sees it.
	Display store transaction history	Measures how long it takes to show a transaction from store history—from tapping to display history to seeing the list.

Customization

Depending on your NetSuite configuration, custom scripts might run in the background while users perform actions. **User event scripts**, **client scripts**, and **workflows** are all tracked as customizations in performance data. APM for Commerce also shows performance data from custom scripts in other SuiteApps or bundles, so you can see how they impact performance.

Data for customizations is available only after the SuiteApp has processed them. To see when this data was last updated, check the note before the action tiles in SuiteCommerce Action Diagnostics or SuiteCommerce InStore Performance Diagnostics.

APM Action Diagnostics

To begin monitoring actions, use the following dashboards:

- SuiteCommerce Action Diagnostics
- SuiteCommerce InStore Performance Diagnostics

For more information, see [Action Performance Dashboards](#).

For more information concerning the elements on these dashboards, see the following help topics:


- [Action Tiles](#)
- [Total Duration of Actions and Customization Performance Over Time](#)

Action Tiles

Each tile shows detailed information about an action's performance based on your selected filters. Tiles help spot changes in action duration over time. Use the average, median, and 95th percentile data to learn about long-running processes.

Click a tile to see the timeline, then click any point to view the action's history for that time.

The following screenshot shows examples of action tiles shown on SuiteCommerce InStore APM:

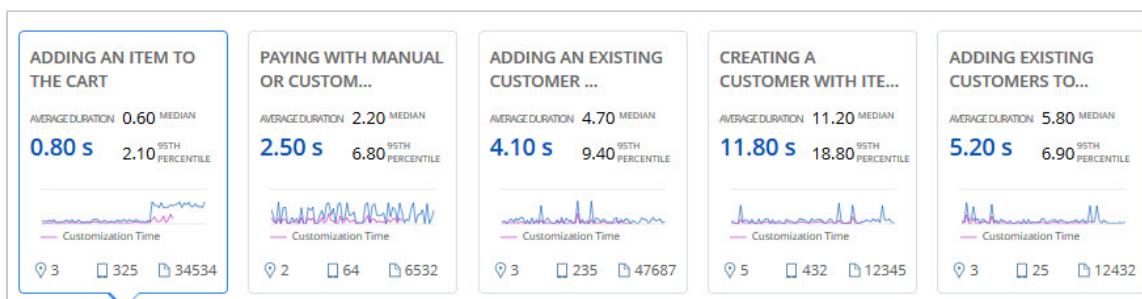

Depending on the feature that you are using, the following details are available on each tile:


APM for Commerce Feature	Data	Description
All	Action Name	Shows the name of the action.
	Average Duration	Shows the average time to process an action, based on your selected filters. The average is total duration divided by number of actions.
	Median	The median shows the middle value of the performance data, so it's not affected by extremely low or high values. Data is sorted by total duration, and the value in the middle is used.
	95th Percentile	The 95th percentile gives a realistic measure of the performance for the action most of the time.
	Customization Time Chart	Shows a smaller version of customization performance over time.
	Performance Logs	Shows how many performance logs were captured for the action. You can view these logs in the Action History table. For more information, see APM Action History .
SuiteCommerce InStore APM	Location	Shows how many locations where the action happened.
	Devices	Shows how many devices on which users performed the action.

Total Duration of Actions and Customization Performance Over Time

Note: Data related to customizations are available only after the SuiteApp has finished processing them. To see when customization data was last updated, check the note before the action tiles.

When you click a point in the timeline, you see a popup with aggregate performance data for that action, showing how many times it happened and the average time it took, including time for customizations. By default, the graph shows average total duration, but you can click tabs to see the median or 95th percentile.

You can drag to zoom in on any part of the graph. User event scripts and workflows are shown with different colored lines, and all dates and times are in Pacific Time.

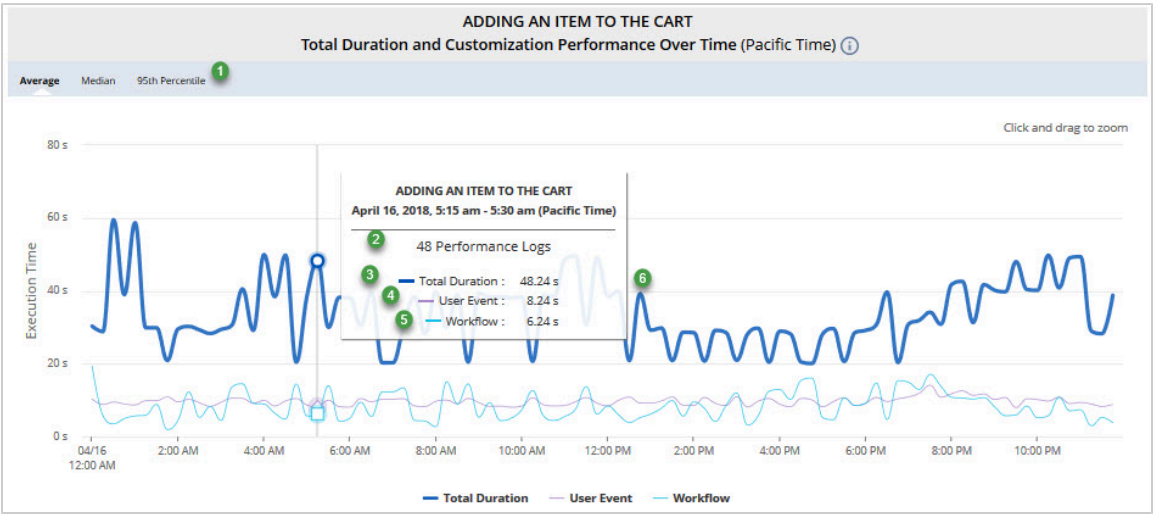

For example, the timeline graph shows the following information:

Item	Description
1	Tabs let you view Average, Median, or 95th Percentile data.
2	Shows how many times the action occurred based on your filters.
3	Shows the total time it took to process the action.
4	Shows how long user event scripts for the action took to run.
5	Shows how long workflows for the action took to run.
	Note: User event scripts and workflows are customizations. The feature shows when customization data was last available.
6	Click the node to see the Action History with details for each action.

APM Action History

Action History appears when you click the link in the popup window on the timeline. You can use these filters to limit the performance data shown:

- Total Duration
- User Event Time
- Workflow Time

ADDING AN EXISTING CUSTOMER TO A CART WITH ITEMS Action History on April 16, 2018 from 11:00 am - 11:15 am (Pacific Time) ⓘ

TOTAL DURATION USER EVENT TIME WORKFLOW TIME Filter

Log 1 - Log 10 ◀ ▶ Total: 150

	DATE AND TIME	TOTAL DURATION	USER EVENT SCRIPTS	WORKFLOW	CUSTOMIZATION PERFORMANCE	USER	DEVICE	LOCATION	SUBSIDIARY
🔗	4/16/2018 3:30 pm	12.23 s	-	-	-	Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	10.00 s	5.00 s	5.00 s		Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	12.23 s	4.25 s	5.61 s		Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	12.23 s	-	-	-	Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	1.00 s	0.20 s	0.00 s		Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	12.23 s	4.25 s	5.61 s		Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	12.23 s	4.25 s	5.61 s		Clerk 1	asbj23442	Kiosk	Montevideo
🔗	4/16/2018 3:30 pm	12.23 s	4.25 s	5.61 s		Clerk 1	asbj23442	Kiosk	Montevideo

Note: Values with an en dash (-) are still processing. Wait for the values to appear before you view details.

Depending on the feature that you are using, the following columns appear in the **Action History** table:

APM for Commerce Feature	Column	Description
All	Open Icon	Opens the details page for that action's history. For more information, see APM Action History Detail .
	Date and Time	Shows when the action occurred.
	Customization Performance	Shows the total duration of user event scripts and workflows as a graphic. Note: User event scripts and workflows are customizations. APM for Commerce features display the date and time when customization data was most recently available.
	Total Duration	Shows how long the action took, including customizations like user event scripts and workflows. For more information about what the total duration covers, see SuiteCommerce APM Action Sensors .
	User Event Scripts	Shows how long user event scripts took to run. Your developers can use this to spot and optimize any long-running scripts.
	Workflow	Shows how long workflows took to run, so you can spot and adjust long-running ones.
	Device	For SuiteCommerce APM, this shows the device type; for SuiteCommerce InStore APM, it shows the device ID.
SuiteCommerce InStore APM	Location	Shows the location where the action occurred.
	Subsidiary	Shows the subsidiary where the action occurred.

APM Action History Detail

You can see detailed timing and performance data for when an action occurred.

You can view action history details on SuiteCommerce Action History Details or SuiteCommerce InStore Action History Detail. Click the open icon in the Action History table to see these pages. For more information, see [Action Performance Dashboards](#).

For information about the action history details available for each APM for Commerce feature, see the following help topics:

- [All APM for Commerce Features](#)
- [SuiteCommerce InStore APM](#)

All APM for Commerce Features

The following details are available for all APM for Commerce features:

- **Overview** – Depending on the feature that you are using, all or some of the following information appear in the section:

APM for Commerce Feature	Information
All	Total duration of the action
	 Note: The overall total is for the whole process and isn't just the sum of individual durations in the customization portlets.
SuiteCommerce APM	Log ID or unique identifier of the performance log on the page
	Shows the domain where the user performed the action
	Shows the user's device type
	Shows the SuiteCommerce SuiteApp version
SuiteCommerce InStore APM	Shows the performance log's ID or unique identifier
	Shows the sales associate's email
	Shows where the action took place
	Shows the device ID running SCIS
	Shows the SCIS SuiteApp version

- **Time by SuiteApp** – This table includes the following information:
 - **SuiteApp** – Lists the active SuiteApps installed in your account. Each bundle is shown with its ID and name, for example: **53195 Last Sales Activity**.
If a bundle was removed, you'll still see its ID, but the name changes to something generic, for example: **2471 Uninstalled Bundle**.
 - **User Event Scripts** – Lists user event scripts from SuiteApps in your account.
 - **Workflows** – Lists workflows from SuiteApps in your account.
 - **Total Duration** – Shows how long user event scripts and workflows from active SuiteApps took. For more about total duration timing, see [SuiteCommerce APM Action Sensors](#).
- **Customization Performance Portlets** – These portlets show details about your customizations. For more information, see [Customization Performance Portlets](#).

SuiteCommerce InStore APM

The **Time Sources** diagram is available only in SuiteCommerce InStore Action History Detail. It includes the following information:

- **Server Time** includes the following:
 - **User Event Scripts** and **Workflows** – Shows customizations applied to your account or components included in SuiteApps installed in your account.
 - **Custom Client Script URL Requests** – Shows how long client script URL requests took.
 - **SCIS SuiteApp and Others** – Shows SuiteScript processing associated with the SCIS SuiteApp.
- **Overhead Time** – Shows time spent on customer payment device interactions, network latency, and SCIS data processing.

Customization Performance Portlets

Portlets on the Action History Detail page show performance data for your NetSuite customizations. If you have the Application Performance (APM) SuiteApp, you can go from the User Event Scripts or Workflows portlet straight to the **Profiler Details** and **SuiteScript Analysis** pages in APM.

Read the following to learn more:

- [User Event Scripts](#)
- [Workflows](#)
- [Custom Client Script URL Requests](#)

User Event Scripts

The User Event Scripts portlet shows detailed performance data for user event scripts. You can use this to spot long-running custom scripts your developers added.

Depending on the feature that you are using, all or some of the following information is displayed in the portlet:

- **Date and Time** – Shows the date and time when the script started running.
- **Total Duration** – Shows the amount of time it took for user event scripts associated with the action to run.
- **Record Type** – Shows the type of record against which the user event script runs.
- **Event** – Shows actions as they happen in the user event script (for example, `AfterSubmit` at the code level)
- **Script Name** – Click the script name to see the script record.
- **Function** – Shows the name of the function that the user event script used.
- **SuiteApp** – If the user event script is included in a SuiteApp, this column shows the SuiteApp that includes the user event script.
- **Operations** – Shows the number of record operations that were run by the user event script.
- **Profiler Details** – Click the link to view the **Profiler** page. **Profiler Details** is a tool where you can see timing and context details for operations, actions, or requests.
- **SuiteScript Analysis** – Opens the **SuiteScript Analysis** tool to show when a script was installed and how it performed over time.



Important: To view **Profiler Details** and **SuiteScript Analysis**, you must have the Application Performance (APM) SuiteApp installed in your account. For more information, see the help topics [Profiler Details Overview](#) and [Using SuiteScript Details](#).

Workflows

The Workflows portlet shows detailed performance data for custom workflows in your NetSuite account.

Depending on the feature that you are using, all or some of the following information is displayed in the portlet:

- **Date and Time** – Shows the date and time when the workflow started running.
- **Total Duration** – Shows how long a workflow took to run. For example, if a workflow is linked to creating a new customer, you see its total duration here.
- **Record Type** – Shows the record type linked to the workflow, like **Customer** for a new customer workflow.
- **Entry Point** – Shows which entry point the workflow script used.
- **Workflow Name** – Click the workflow name to open its page in NetSuite.
- **SuiteApp** – If the workflow is in a SuiteApp, this column shows which one.
- **Profiler Details** – Click the link to view the **Profiler** page. **Profiler Details** is a tool that lets you gather performance data about the timing and context of an operation, action, or request.



Important: To view **Profiler Details**, you must have the Application Performance (APM) SuiteApp installed in your account.

Custom Client Script URL Requests

The Custom Client Script URL Requests portlet shows data from client scripts (SuiteScripts that run in the browser). These scripts often validate user data or fill in fields during form events. The following information is displayed in the portlet:

- **Date and Time** – Shows when the client script request URL started to process.
- **Total Duration** – Shows the total duration of time that it takes the client script request to process.
- **Client Script URL** – Shows the request URL for the custom client script.

APM Scenarios for SuiteCommerce

 **Note:** This topic applies to SuiteCommerce and the 2020.1.1 release of SuiteCommerce Advanced and later.

The following scenarios are a guide to using Application Performance Management (APM) results to improve SuiteCommerce (SC) or SuiteCommerce Advance (SCA) performance:

- [Scenario A – Placing an Order is Slow](#)
- [Scenario B – Home Page is Slow](#)

Scenario A – Placing an Order is Slow

Follow these steps to fix slow order placement:

To resolve the scenario in SC APM

1. Go to Customization > SuiteCommerce Performance > SuiteCommerce Action Diagnostics.
2. Click the **Place Order** action tile.
3. On the chart, look for times when scripts or workflows ran with the action.
4. Click any point in time you're interested in to open the action history table.
5. Review the logs on the table.
6. For each log you want to check, click its open icon.
This opens the SuiteCommerce Action History Details page for that log.
7. Review the page to find out which SuiteApp, user event script, client script, or workflow is affecting performance.

Scenario B – Home Page is Slow

Follow these steps to fix a slow-loading home page:

To resolve the scenario in SC APM

1. Go to Customization > SuiteCommerce Performance > SuiteCommerce Page Type Diagnostics.
2. In the **Filters** panel, enter the information you want and click **Refresh**.
3. On the **Content Display Times and Views Over Time** chart, click the time when the home page was slow to load.
The Page Type Views table appears.
4. Review the logs on the table.
5. For each log you want to review, click its open icon.
The Page View Details page opens for that log.
6. On the Page View Details page, hover over resources that are taking the most time.
7. Use the initiator type timings in the tooltip to see which load phases are slowing down the page.

APM Scenarios for SCIS

Use these scenarios as a guide for applying Application Performance Management (APM) results to boost SuiteCommerce InStore (SCIS) performance:

- [Scenario A – Excessive time for a User Event Script](#)
- [Scenario B – Excessive time for a Workflow](#)
- [Scenario C – Excessive time for a Custom Client Script URL Request](#)
- [Scenario D – Excessive time for the SCIS & Others area](#)

To view performance in APM:

1. Go to Customization > SCIS Performance > SCIS Performance Diagnostics.
2. Set filters for the area you want to review, like a **Date Range** or **Location** with a spike in transactions. For more information, see [SuiteCommerce InStore Performance Diagnostics](#).
3. Click **Refresh**.
4. Click an **Action** tile to see a time-duration graph for your chosen **Date Range**.
5. Hover over the graph and click a point of interest to open **Action History**, which shows a performance summary and **Action History Detail** tables.

Scenario A – Excessive time for a User Event Script

A user event script is taking an excessive amount of time.

Data in SCIS APM

- **Workflow** run times appear in a table after you go to Action > Graph > Action History Details.
- Use the **Profiler Details** links to investigate any events taking too long.

To resolve the scenario:

1. Review workflows running with the script to see if they're causing long runtimes.
2. Check if the script is from a third-party bundle.
 - If yes, contact the bundle owner and ask if it needs to run in the SCIS **WebApplication** or **Payment PostBack** contexts.
 - If the script isn't required in these SCIS contexts, use the **Script Deployment** page to exclude it from those contexts.
3. Review customizations in your environment for possible issues.

If a customization shouldn't run for SCIS, exclude the script from the **WebApplication** or **Payment PostBack** contexts using the **Script Deployment** page.

To exclude a script by an SCIS execution context:

1. To exclude a script by SCIS execution context:
2. Clear highlights for **WebApplication** and **Payment PostBack**.
3. Click **Save**.

For more information, see the help topic [Updating a Script Deployment](#).

Scenario B – Excessive time for a Workflow

A workflow running for a user event script is taking an excessive amount of time to complete.

Data in SCIS APM

- The **Workflow** run times display in a table after you navigate to Action > Graph > Action History Details.
- Use the links in the **Profiler Details** column to research an event with an excessive time.

To resolve the scenario:

1. Review scripts that include the workflow to determine if they are the source of excessive runtimes.
2. Determine if the workflow is from a third-party bundle script.
 - If yes, contact the bundle owner and ask if the script is required to execute in the SCIS **WebApplication** or **Payment PostBack** contexts.
 - If the script is not required in these SCIS contexts, use the **Script Deployment** page to exclude the script from those contexts.
3. Review any customizations specific to your environment for potential problems.

If the customization should not run for SCIS, use the **Script Deployment** page to exclude the script from executing in the SCIS **WebApplication** or **Payment PostBack** contexts.

To exclude a script by an SCIS execution context:

1. Clear highlights for **WebApplication** and **Payment PostBack**.
2. Click **Save**.

For more information, see the help topic [Updating a Script Deployment](#).

Scenario C – Excessive time for a Custom Client Script URL Request

A custom client script URL request is taking an excessive amount of time.

Data in SCIS APM

Custom Client Script URL Request run times show up in a table after you go to Action > Graph > Action History Details, listing the total duration for each request.

To resolve the scenario:

1. Figure out if a user event script, workflow, or custom client script URL request is causing the long durations.
2. After you've checked, open a case with NetSuite Customer Support so they can review the script and suggest what to do. When you create the case, include:
 - APM Action Tile name

- Date and time from Action History Detail page
- Custom client script URL
- Log ID
- Sample of duration times

Scenario D – Excessive time for the SCIS & Others area

Excessively long times are showing for processes under the SCIS & Others area.

Data in SCIS APM

The time used by the SCIS application (including SuiteScript processing) is shown in a table after you go to Action > Graph > Action History Details, with the total duration for each request listed.

To resolve the scenario:

1. Figure out if a user event script, workflow, or custom client script URL request is causing the delays.
2. If none of these are the cause, open a case with NetSuite Customer Support so they can review the times and recommend next steps. When you create the case, include:
 - APM Action Tile name
 - Date and time from Action History Detail page
 - Log ID
 - Sample of duration times

Overview

i Applies to: SuiteCommerce Advanced

Depending on your license agreement, you can run multiple websites on the same NetSuite account. Each website can have its own branding, look, and feel, and you can use them for different purposes, like separate sites for different brands, countries, or languages.

If you have NetSuite OneWorld, your organization can use a single NetSuite account to manage records and transactions for multiple legal entities, or subsidiaries, conducting business across multiple tax jurisdictions, or nexuses, involving multiple currencies. You can associate multiple subsidiaries with a single Commerce website, or have multiple websites for each subsidiary.

Multiple languages and currencies are supported by default, and you can customize websites to add translated components.

See the following topics for more information about multi-sites:

- [Multi-Site Development](#) – Learn how to set up multiple sites on one NetSuite account.
- [SuiteCommerce and OneWorld](#) – See how to use NetSuite OneWorld with Commerce web stores.
- [Localization](#) – Find out how to set up and manage translated components in Commerce web stores.

Multi-Site Development

Applies to: SuiteCommerce Advanced

Depending on your license agreement, you can run multiple websites on the same NetSuite account. Each website can have its own branding, look, and feel. How you set this up depends on your implementation.

To set up your implementation for multi-site, be aware of the following tasks:

- [Configure NetSuite for Multi-site](#)
- [Organize Source Files for Multi-site](#)
- [Deploy a Specific Website](#)
- [Assign Customers to Websites](#)

Configure NetSuite for Multi-site

Applies to: SuiteCommerce Advanced

SuiteCommerce Advanced (SCA) supports using multiple website records, each with its own domain, or multiple domain configurations pointing to the same website record. When using multiple website records, you must configure item records to appear on each website. See the help topic [Item Availability](#) for more information. When you use multiple domains, each domain uses the same website record. All items configured for that website are available to both domains.

Organize Source Files for Multi-site

Applies to: SuiteCommerce Advanced

If you're implementing the Aconcagua release of SCA or later, it's best to use themes and extensions to extend your website. Themes and extensions are available for installation as bundled SuiteApps or as custom themes and extensions deployed by in-house developers. After installing or deploying, the associated theme or extension can be activated for any domain associated with a website record. You must perform the activation for each site and domain you intend to use the theme or extension. No source code organization is necessary. See the help topic [Themes and Extensions](#) for details.

Note: For details on creating themes and extensions, see the help topics [Overview](#), [Overview](#), and [Overview](#).

If you're implementing SuiteCommerce Advanced and not using themes and extensions, you must perform some set up tasks to allow multi-site development. You can also create custom modules that define different features for each website. You can also maintain different code bases for each website.

SCA lets you manage multiple websites using the same code base. This means that functionality that is common to each website uses the same core module code. Also, any customizations or extensions you create for a specific website are managed in the same way as other modules.

If you are customizing SCA and not using themes and extensions, see the help topic [Develop Your SCA Customization](#) for information about creating custom modules.

For example if you were customizing the Header module for two different websites, you might have a directory structure as follows:

```

1 Modules
2   suite_commerce
3     <shared modules>
4   custom_modules
5     Header_Site1
6     Header_Site2

```

In this example, the customized code is contained within the `custom_modules` directory. All source code shared among websites resides in the `Modules/suite_commerce` directory.

To determine which modules are included in a website, each website uses its own `distro.json` file. See the help topic [The `distro.json` and `ns.package.json` Files](#) for information about the `distro.json` file. The `json.distro` for a specific website is stored in a website-specific subdirectory within the `Sites` directory. The `Sites` directory is contained in the top-level directory of the SuiteCommerce Advanced source code. Thus, when managing multiple sites, you may have a directory structure containing directories similar to the following:

```

1 Modules
2   suite_commerce
3     <shared modules>
4   custom_modules
5     Header_Site1
6     Header_Site2
7 Sites
8   site1
9     distro.json
10  site2
11    distro.json

```

You can compile and deploy the code for a specific website by running the gulp tasks from the site-specific subdirectory. For example, to compile and deploy Site 1, you would go to the `site1` directory and run the required gulp tasks. See the help topics [Deploy SCA Customizations to NetSuite](#) and [Test SCA Customizations on a Local Server](#) for more information.

Deploy a Specific Website

i Applies to: SuiteCommerce Advanced

If you're implementing the Aconcagua release of SCA or later, it's best to use themes and extensions to extend your website. You deploy your theme and extension to an account, where it's available for activation. See the help topic [Themes and Extensions](#) for details on installing and activating themes and extensions. See the help topics [Overview](#) and [Overview](#) for information about using the theme and extension developer tools.

If you're implementing SuiteCommerce Advanced and not using themes and extensions deploy code to a specific website. You can deploy a website to the local server or to your NetSuite account.



Important: If you're implementing themes and extensions on an SCA site using the Aconcagua release or later, you don't deploy to a specific site. Any published themes and extensions are available as bundled SuiteApps. After these are installed, they can be activated for any domain on multiple sites.

To create and deploy custom websites (not using themes and extensions):

1. Install the developer tools and download the SuiteCommerce Advanced source code. See the help topic [Set Up SCA Developer Tools](#) for more information.

2. Create any custom modules required for each website. [Create a Custom Module](#) for more information.
3. In the top-level directory of the SuiteCommerce Advanced source code, create the following:
 - A directory named Sites. This directory must have this name and be located at the same level as the Modules directory.
 - A subdirectory for each website.
4. Within each site-specific subdirectory, create a custom distro.json.
You can use the default distro.json file as a template. Your custom distro.json for each website points to the following:
 - Shared module source code contains in suite_commerce.
 - Customize modules defined in custom_modules.

5. Deploy your website.

To deploy a specific website, perform the following:

1. Go to the site-specific subdirectory for the website you want to deploy.
2. Deploy the website locally or to your NetSuite account.

You can deploy your website locally using gulp local or to your NetSuite account using gulp deploy. See the help topics [Deploy SCA Customizations to NetSuite](#) and [Test SCA Customizations on a Local Server](#) for more information.

When deploying from a site-specific subdirectory, the gulp task creates the corresponding DeployDistribution and LocalDistribution directories within the site-specific directory. The compiled application files for the website are contained in these directories.

Assign Customers to Websites

 **Applies to:** SuiteCommerce Advanced

If you run multiple websites, you may want to ensure that a customer who registers on a website only has login access on that particular site. To ensure that customers are automatically assigned to the website where they registered, you must first check the **Assign New Customers to this Web Site** box on the Web Site Setup page in NetSuite.

 **Note:** Before you check the Assign New Customers to this Web Site box, customers aren't assigned to any site. After you check the box, only new customers are assigned to the website. The checkbox doesn't affect existing customers.

Viewing the Source Website

You can use the **Source Web Site** field on each customer record to view the website where the customer has registered. Also, on the System Information subtab of the customer record, you can use the **Assigned Web Site** field, to change the customer's website assignment. If you want to change the website assignment for multiple customers, use a mass update operation.

 **Note:** If you use custom customer record forms, you may not see the **Source Web Site** and **Assigned Web Site** fields on your custom form. You must customize the default customer form to enable these fields.

To enable automatic website assignment for customers:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website you want to modify.
3. Click the **Shopping** subtab.
4. Check the box next to **Assign New Customers to this Web Site**.

Registration Page

☐ PASSWORD-PROTECT ENTIRE SITE

TYPE OF CUSTOMER REGISTRATION
optional

☐ DISPLAY COMPANY FIELD ON REGISTRATION PAGE

☐ MANDATORY

☐ CREATE CUSTOMERS AS COMPANIES

☐ **ASSIGN NEW CUSTOMERS TO THIS SITE**

5. Click **Save**.

After a customer is assigned to a website, login access is only allowed to that one site. You can't assign a customer to more than one website. If you want to assign a customer to more than one website, leave the Assigned Web Site field empty and allow the customer access to all of your websites.

To change a customer website assignment:

1. Go to Lists > Relationships > Customers.
2. Click **Edit** next to the customer record you want to modify.
3. Click the **System Information** subtab.
4. Make a selection in the **Assigned Web Site** list.

System Notes • **Access** • Active Workflows

☒ GIVE ACCESS

ASSIGNED WEB SITE
SuiteStyles

ROLE
Customer Center

To use Mass Update to change the customer website assignments in bulk:

1. Go to Lists > Search > Mass Update > Mass Updates.
2. Find **Customer Web Site Assignment** in the list, and then click **Update Customer Web Site Assignment**.
3. Make a selection in the **Assigned Web Site** list.
4. Select the criteria for the records you want to change.
5. Click **Save**.

After clicking Save, all customer records will be changed based on the criteria you selected.

For example, if you want to change all customers from Website A to Website B, then select Website B in the Assigned Web Site list (Step 3). In the Criteria list (Step 4), select Assigned Web Site for the filter, and then select Website A for the description.

Managing Customers and Website Assignments

After you start using customer website assignment capabilities, new customers are automatically restricted to having a customer account for the site on which they registered. Customers can register on more than one website, but they'll have more than one customer account. A new customer record is created with a different source web site when customers register on more than one website associated with your NetSuite account. You can set up duplicate website customer email detection to identify and manage duplicate customer records. For more information, read, [Detect Duplicate Customer Email](#).

Website Specific Customers and OneWorld

For companies that use OneWorld, a customer must be assigned to a website associated with a subsidiary that is online. For example, suppose you have two subsidiaries: Subsidiary A and Subsidiary B. Only Subsidiary B is marked online and associated with Website B. The customer linked to Subsidiary A can't log into Website B when the Assigned Web Site is set to B or empty. Subsidiary A must be marked online for the customer to enable the customer to log in to a website.

SuiteCommerce and OneWorld

Applies to: SuiteCommerce | SuiteCommerce Advanced

With NetSuite OneWorld, an organization can use a single NetSuite account to manage records and transactions for multiple legal entities, or subsidiaries, conducting business across multiple tax jurisdictions, or nexuses, involving multiple currencies.

Although you can associate multiple subsidiaries to a Commerce web store, only the default subsidiary appears on the website.

To set a default subsidiary for a site, do the following:

1. In NetSuite, go to Commerce > Websites > Website List.
2. At the bottom of the **Setup** subtab, in the **Default** column, select the radio button for the default subsidiary and click the **Save** button.

For example, when parent company Wolfe Electronics creates a website, the administrator selects the parent subsidiary as the default subsidiary on the Web Site Setup record. Orders that are submitted on the website are posted to the parent subsidiary.

Move To Top		Move To Bottom	
ONLINE	DEFAULT	SUBSIDIARY	DISPLAY NAME
☒	☒	Wolfe Electronics US	Wolfe Electronics US
☒	☐	Wolfe Electronics West	Wolfe Electronics West

The site shows only the following types of information specifically associated with the default subsidiary with no option for the shopper to change the website subsidiary:

- Language options
- Currency options
- Minimum order amount
- Tax rates
- Shipping items
- Items

Website visitors also see items and shipping options associated with the default subsidiary. After registering or submitting an order, each customer created through the website is associated with the subsidiary set as the default.

Multi-Currency

Applies to: SuiteCommerce | SuiteCommerce Advanced

If your business uses more than one currency, you must configure multiple currencies as part of your initial accounting setup. This lets you create transactions for foreign customers and vendors you work with. The currency used to manage your company's financials is called the base currency, and other currencies used by customers and vendors are called foreign currencies. With NetSuite OneWorld, each subsidiary can have a separate base currency, which is used to manage the subsidiary's financials.

To set up Multi-Currency for your Commerce site:

1. Enable the Multiple Currencies feature. See the help topic [Enabling the Multiple Currencies Feature](#).
2. (Optional) Define additional currencies in NetSuite. By default, CAD, EUR, GBP, and USD currencies are available in NetSuite. To define additional currencies, see the help topic [Creating Currency Records](#).

Note: Ensure that you select the correct default locale on the currency record to avoid errors related to currency mismatch. For example, select New Zealand (English) as the default locale for New Zealand Dollar.

3. Set the base currency for your subsidiary as described in [Setting a Base Currency](#).
4. Configure the exchange rates so that the prices are dynamically updated based on the shopper's default currency. See the help topic [Adding Rates to the Currency Exchange Rates List](#).
5. Associate your Commerce site with a subsidiary. You can associate multiple subsidiaries with a Commerce site. However, only the subsidiary selected as the default shows up on the website. See [SuiteCommerce and OneWorld](#).
6. Set the chosen subsidiary's base currency as the default currency. Prices are displayed in the default currency for new shoppers visiting your website.

To set the currencies for your website, do the following:

1. In NetSuite, go to Commerce > Websites > Website List.
2. At the bottom of the **Shopping** tab, click the **Currency** subtab.
3. In the Default column, select the radio button for the default currency. Also, ensure that the box is checked in the Online column.
4. In the Online column, select the box for each currency in which you want to display item prices on your website.
The selected currencies appear in the Currency Selector list, which allows a shopper to switch from the default currency to other available currencies.
5. Click **Save**.

Shopper Currency Selection

Guest shoppers and registered shoppers who haven't yet placed their first order can choose their preferred currency from the Currency Selector list. The website shows prices in the currency they select.

After registered shoppers place their first order, the currency of the order becomes their default currency. Prices on the website are shown in their default currency and they can no longer choose a different currency from the Currency Selector list.

Cross-Subsidiary Fulfillment


Applies to: SuiteCommerce | SuiteCommerce Advanced

Commerce web stores support Cross-Subsidiary Fulfillment for OneWorld accounts.

With Cross-Subsidiary Fulfillment, users can order an item from a subsidiary website regardless of inventory level at that subsidiary if there is sufficient inventory to fulfill the order at a related subsidiary. The inventory available to the customer equals the inventory level at the subsidiary with the highest quantity of an item. It's not a combined total of inventory for the item at all subsidiary locations.

Examples:


Scenario One

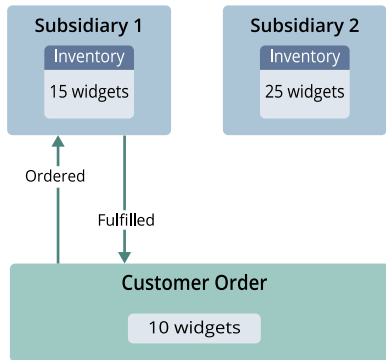

- Subsidiary One has 15 blue widgets in inventory.
- Subsidiary Two has 25 blue widgets in inventory.

Customer on Subsidiary One website wants to order 10 blue widgets. The order is fulfilled from Subsidiary One because there is sufficient inventory at that location to fulfill the order.


Scenario Two

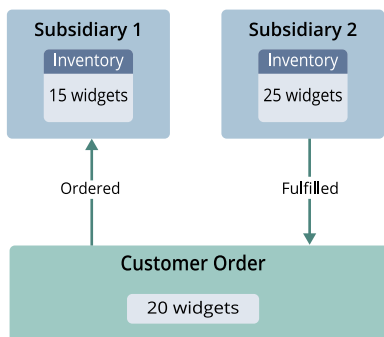

- Subsidiary One has 15 blue widgets in inventory.
- Subsidiary Two has 25 blue widgets in inventory.

Customer on Subsidiary One website wants to order 20 blue widgets. The order is fulfilled from Subsidiary Two.

Scenario Three

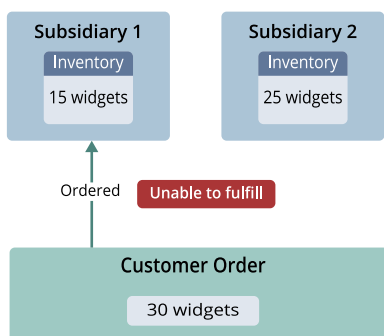

- Subsidiary One has 15 blue widgets in inventory.
- Subsidiary Two has 25 blue widgets in inventory.

Customer on Subsidiary One website wants to order 30 blue widgets. The order is not fulfilled because neither subsidiary has 30 blue widgets in inventory (even though the two subsidiaries have a combined total of 40 blue widgets in inventory).

Key Benefits:

- Potentially speeds up order fulfillment
- Sales and returns can be processed across more than one subsidiary. See the help topic [Processing Sales and Returns Using Intercompany Cross-Subsidiary Fulfillment](#).
- Reduces the entry and maintenance overhead associated with intercompany inventory transaction processing

To set up Intercompany Cross-Subsidiary Fulfillment for your SuiteCommerce site:

1. Set up items to display on your web store. See the help topic [Item Record Setup](#).

 **Note:** If you have an existing Commerce site with items displaying correctly, skip step 1.

2. Enable the Intercompany Cross-Subsidiary Fulfillment feature. See the help topic [Enabling Intercompany Cross-Subsidiary Fulfillment](#).
3. Set up Global Inventory Relationship records (GIRs). See the help topic [Creating a Global Inventory Relationship Record](#).
4. Associate shipping items to reflect Global Inventory Relationships. See the help topic [Associate Subsidiaries With Shipping Items](#).

Localization

Applies to: SuiteCommerce | SuiteCommerce Advanced

Commerce web stores support multiple languages and currencies by default, and you can customize them to add translated components. Setting up multiple languages needs some frontend configuration.

Note: Translation for the following fields is not supported when web pages are run through the SEO page generator:

- Meta Title
- Meta Tag HTML
- Schema Markup
- Open Graph Tags and all other social media meta tags

Your website shows the default language and currency instead of any others you've set up.

Set Up NetSuite for Localized Content

Applies to: SuiteCommerce | SuiteCommerce Advanced

To enable your website for localized content:

1. If setting up your site for multiple languages, verify that the Multi-Language feature is enabled:
 - a. In NetSuite, go to Setup > Company > Setup Tasks > Enable Features.
 - b. On the **Company** subtab, check the **Multi-Language** box.
 - c. Click **Save**.
2. Verify that all languages available on your site are defined in your Company General Preferences:
 - a. Go to Setup > Company > Preferences > General Preferences.
 - b. On the **Languages** subtab, select and add each language you want available in your NetSuite account and on your website.
 - c. Click **Save**.

Only languages enabled in your Company General Preferences are available. See the help topic [Configuring Multiple Languages](#) for more information.

3. Verify that all desired languages are enabled in the Web Site Setup page.
 - a. In NetSuite, go to Commerce > Websites > Website List.
 - b. Click Edit for the desired website.
 - c. Navigate to the **Shopping** tab and **Languages** subtab.
 - d. Check the box in the **Online** column for each language you want available on the site.

Currency • Languages •		
Move To Top Move To Bottom		
ONLINE	DEFAULT	LANGUAGE
☒	☒	English (U.S.)
☒	☐	Français (France)
☒	☐	Español (España)
☒	☐	Português (Brasil)

- e. Verify that item names and descriptions have associated translation fields for each language. When you fill in translation fields on the item record, the translated fields show up in the web store.

Note: Translation of custom fields on item records isn't supported, so data from custom fields in a web store won't have translated strings.

For detailed instructions, see the help topic [Working With Multi-Language Names and Descriptions](#).

- f. Click **Save**.
4. Verify that all desired currencies are enabled in the Web Site Setup page.
- a. In NetSuite, go to Commerce > Websites > Website List.

Note: Currencies must be set up in NetSuite to appear in this list. See the help topic [Currency Management](#) for information on adding currencies to NetSuite.


- b. Click **Edit** for the desired website.
- c. Navigate to the **Shopping** tab and **Currency** subtab.
- d. Check the box in the **Online** column for each currency you want available on the site.

Currency • Languages •		
Move To Top Move To Bottom		
ONLINE	DEFAULT	CURRENCY
☒	☒	USD
☒	☐	EUR
☐	☐	GBP
☐	☐	CAD

- e. Click **Save**.
5. If you're setting up your site for multiple languages and currencies, make sure you set up the hosts array

See [Configure Hosts for Sites with Multiple Languages](#).

After your website is set up and customized to support multiple languages, the location drop-down appears by default in the upper left corner.

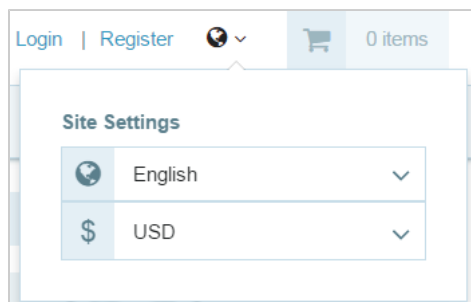

Create Custom String Literals

Applies to: SuiteCommerce | SuiteCommerce Advanced

You can add new or customize existing string literals to change the default language values and corresponding translated values. You can do this in two ways, depending on your implementation.

Method 1: Use the SuiteCommerce Configuration Record

This information refers to SuiteCommerce or the Vinson release of SuiteCommerce Advanced or later.

Use the SuiteCommerce Configuration record to specify new string literals that translate at runtime. NetSuite suggests this method for making small changes to translated content.

To configure properties in NetSuite:

1. Select the domain to configure at Commerce > Websites > Configuration.
2. In the SuiteCommerce Configuration record, go to the **Multi-Domain** tab and the **Translations** subtab.
3. Add custom strings in the available table as needed. See [Translations Subtab](#) for details.
4. Save the Configuration record.

Method 2: Extend the Application

This method is required for sites implementing the Kilimanjaro release of SCA and earlier. You can also use this method for any Commerce web store when making multiple changes, especially if Method 1 becomes cumbersome.

You can extend the application to change the string literals in the code and update the name-value pairs in the existing `SC.Translation` arrays.

Note: If using this method on a SuiteCommerce site or a site implementing the Aconcagua release of SCA or later, you must introduce these changes as an extension. See the help topic [Localize Text in an Extension](#).

You can also add new string literals that translate at runtime. When you extend an application, make sure new string literals you want to localize are wrapped in the `_.translate()` function and the language files are updated. If you only have a few customizations, manually add new translated name-value pairs to the

SC.Translations arrays for each language. But if your web store has a lot of new string literals, you should consider scripting the process. Every time you compile your website code, all string literals wrapped in the `_.translate()` function are processed to generate the right name-value pairs in each language file.



Important: These language files must use **UTF-8** character encoding to display international characters correctly.

Configure Hosts for Sites with Multiple Languages

Applies to: SuiteCommerce Advanced

The hosts array in the Configuration.js file provides language-specific and currency-specific site support for multiple languages and currencies. This functionality is off by default, so you need to configure the host for each language and set specific properties to turn it on.

Follow the instructions below based on your implementation. For information on configurable properties, regardless of your implementation, see [Hosts Subtab](#).

Configure Hosts with the SuiteCommerce Configuration Record

Applies to: SuiteCommerce | SuiteCommerce Advanced

This procedure applies to SuiteCommerce and the Vinson release of SCA or later.

To configure the hosts array:

1. Select the domain to configure at Commerce > Websites > Configuration.
2. In the SuiteCommerce Configuration record, go to the **Multi-Domain** tab and the **Hosts** subtab.
3. Set feature properties as required.
4. Save the Configuration record.

Configure the hosts Array

Applies to: SuiteCommerce Advanced

This procedure applies to the Mont Blanc and Denali releases of SCA.

To configure the hosts array:

1. Follow the steps presented in [Set Up NetSuite for Localized Content](#).
2. Set up a hosted domain for each language on your site. See [Domains](#) for details on how to create new hosted domains.
3. Set up the SspLibraries module for customization.
See the help topic [Develop Your SCA Customization](#) for detailed information.
4. Open the Configuration.js file in the newly created module.

5. In the hosts array, define a unique host for each location with the title property.
6. For each host, define the currencies and languages arrays using the properties in this section.



Note: For detailed information on the hosts array for Mont Blanc and Denali implementations, see [Hosts Array Parameters \(pre-Vinson\)](#).

For example, say you want to set up a multi-language site with three locations: the United States, South America, and France. For each, you could define specific currencies and languages as shown in the table below:

Location	Currencies	Languages
United States	U.S. Dollar	English
South America	U.S. Dollar	Spanish
	Argentinian Peso	Portuguese
	Uruguayan Peso	English
France	Euro	French
	U.S. Dollar	

You set up NetSuite for multiple languages and enable the right languages and currencies, then create hosted domains for each translated language. The locale string must specify the country code and culture code for each language, using ISO standards (ISO 639 and ISO 3166 respectively). For example: en_US or es_ES.

Here's an example of how your customization might look:

```

1  , hosts: [
2    {
3      title: 'United States'
4      , currencies: [
5        {
6          title: 'American Dollars'
7          , code: 'USD'
8        }
9      ]
10     , languages: [
11       {
12         title: 'English'
13         , host: 'en.mysite.com'
14         , locale: 'en_US'
15       }
16     ]
17   }
18   , {
19     title: 'South America'
20     , currencies: [
21       {
22         title: 'American Dollars'
23         , code: 'USD'
24       }
25       , {
26         title: 'Peso Argentino'
27         , code: 'ARS'
28       }
29       , {
30         title: 'Peso Uruguayo'
31         , code: 'UYU'
32       }
33     ]
34     , languages: [
35       {
36         title: 'Spanish'
37         , host: 'sa.mysite.dev'

```

```

38         , locale:'es_ES'
39     }
40     , {
41         title:'Portuguese'
42         , host:'pt.sa.mysite.dev'
43         , locale:'pt_BR'
44     }
45     , {
46         title:'English'
47         , host:'en.sa.mysite.dev'
48         , locale:'en'
49     }
50 ]
51 },
52 {
53     title:'French'
54     , currencies:[
55         {
56             title:'Euro'
57             , code:'EUR'
58         }
59         , {
60             title:'American Dollars'
61             , code:'USD'
62         }
63     ]
64     , languages:[
65         {
66             title:'French'
67             , host:'fr.mysite.com'
68             , locale:'fr_FR'
69         }
70     ]
71     }
72 ]

```


7. Deploy the module to your site.

The Translation Process

i Applies to: SuiteCommerce Advanced

This topic applies to the Kilimanjaro release of SCA and earlier. If you are localizing text using an extension, see the help topic [Localize Text in an Extension](#).

When you set a specific language for a website, any string literals wrapped in the `_.translate()` function get replaced with language-specific strings on the site. The diagram below shows how this works.

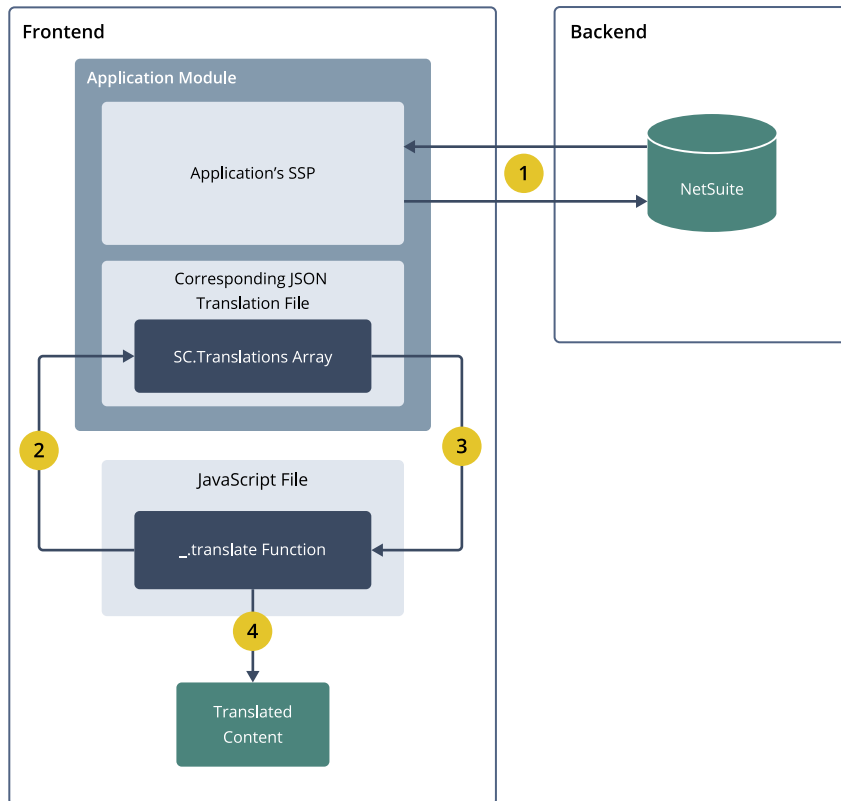

1. The application's SuiteScript Server Page (SSP) requests information from the backend to confirm that the requested language is properly set up in NetSuite.
2. All `_translate()` functions in your JavaScript files contain string literals to be translated, and these match up with name-value pairs in the `SC.Translations` array in JSON language files.

JSON language files are located in the Languages subfolder for each application module. For example, Modules > suitecommerce > ShoppingApplication@x.x.x > Languages.

Note: In the final Distribution folder, these files are located in the languages subfolder at the root level.

3. The name-value pairs in the `SC.Translations` array contain translated values for the active language, and the array sends these values back to the `_translate()` function.
4. The translated content appears on the site.

Important: If a literal in a `_translate()` function doesn't have a matching name-value pair in the `SC.Translations` array for the active language, it won't be replaced.

In addition to the localization elements the client handles, many elements—like NetSuite error messages, prices, and dates—are localized by the NetSuite backend and can't be customized or extended.

Pass String Literals

Applies to: SuiteCommerce Advanced

This topic applies to the Kilimanjaro release of SCA and earlier. If you are localizing text using an extension, see the help topic [Localize Text in an Extension](#).

In the following example, the string literal **Country is required** gets translated to **Se requiere país** when the site language is Spanish, matching the name-value pair in the SC.Translations array of the es_ES.js file.

_.translate() function used in Address.Model.js file:

```
1 validation: {
2   ...
3   , country: { required: true, msg: _('Country is required').translate() }
4   ...
5 }
```

Corresponding JSON used in ShoppingApplication@x.x.x > Languages > es_ES.js:

```
1 SC.Translations = {
2   ...
3   "Continue Shopping": "Continuar comprando",
4   "Continue Shopping on our ${0}": "Continuar comprando en nuestro ${0}",
5   "Country is required": "Se requiere país",
6   "Credit Card Number is invalid": "Número de tarjeta de crédito no válido",
7   "Credit Card type is not supported": "No se admite el tipo de tarjeta de crédito",
8   ...
9 };
```

Note: Values from the SC.Translations arrays go through a translation function, so the values you set in the array for a language might not always match exactly what shows up in your web store.

Many string literals are translated on the client side with the `_.translate()` function. When you set a specific language, string literals in `_.translate()` functions are replaced with language-specific strings from the SC.Translations arrays in the JavaScript language files.

The language JavaScript files are in the languages subfolder for each application module—for example, Modules > suite_commerce > ShoppingApplication.x.x.x > Languages. In the final Distribution folder, they're in the languages subfolder at the root.

Note: If a literal in a `_.translate()` function doesn't match a name-value pair in the SC.Translations array for the active language, it won't be replaced.

For example, the string literal `Country is required` gets translated to `Se requiere país` when Spanish is the active language, matching the name-value pair in the SC.Translations array of the es_ES.js file in the languages folder.

_.translate() function used in Address.Model.js file:

```
1 validation: {
2   ...
3   , country: { required: true, msg: _('Country is required').translate() }
4   ...
5 }
```

Corresponding JSON used in ShoppingApplication@x.x.x > Languages > es_ES.js:

```

1 SC.Translations = {
2   ...
3   "Continue Shopping":"Continuar comprando",
4   "Continue Shopping on our $(0)": "Continuar comprando en nuestro $(0)",
5   "Country is required":"Se requiere país",
6   "Credit Card Number is invalid":"Número de tarjeta de crédito no válido",
7   "Credit Card type is not supported":"No se admite el tipo de tarjeta de crédito",
8   ...
9 };

```

Note: Values from the SC.Translations arrays go to a translation function, so there might not always be a direct match between the values you set in the array and what actually appears in your web store.

Pass Parameters and HTML

Applies to: SuiteCommerce Advanced

This topic applies to the Kilimanjaro release of SCA and earlier. If you are localizing text using an extension, see the help topic [Localize Text in an Extension](#).

In addition to passing string literals to the `_.translate()` function, you can also pass parameters and HTML segments.

Pass Parameters

In the example below, the variable values of `$(0)` and `$(1)` are passed 20 and 43 respectively.

```

1 | _('Subtotal: $(0) of $(1)') .translate(20,43)

```

Pass HTML

In the example below, an HREF segment is passed to the translate function so the translated string is followed by the correct URL.

```

1 | _('Continue Shopping on our $(0)') .translate('<a href="/" data-touchpoint="home">' + _('Home Page') .translate() + '</a>')

```

Important: When you add new `_translate()` functions with parameters and HTML, make sure your translation vendor translates only the literal strings, not the parameter or HTML code segments.

Localize Content from the Content Delivery Service

Applies to: SuiteCommerce Advanced

SuiteCommerce Advanced supports the `locale` tag, so you can deliver localized content generated from the Content Delivery bundle.

To localize content generated from the Content Delivery bundle:

1. Create a new Content Record for each localized version you want to display.
For details on how to create a Content Delivery record see [Creating a Content Record](#).
2. Tag each record with the corresponding locale attribute.
For example, to specify a record as the American English version, use the locale tag **locale:EN_us**.
The locale attribute must match the language/locale parameters set by the system when languages are enabled.

NAME * Ad Banner ☐ INACTIVE	SITE * MattSuite	CONTENT TAG - New - locale:EN_us
---	--------------------------------	---

See [Using Content Delivery](#) for more information about setting up your site for content delivery.

Overview

i Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Integrating Commerce web stores with other NetSuite applications lets you take advantage of extra features they offer, like:

- NetSuite web store account access for shoppers directly from your existing website, no extra login needed
- Automated marketing features, like post-purchase campaigns, on your web store
- Easy access to NetSuite features for brick and mortar stores
- Easy creation of content pages and content areas on your website

See the following topics for more information about integration:

- [Single Sign-on Integration with External Websites](#) – Single Sign-on lets users access your Commerce web store from an external website, or conversely, access an external website from your Commerce web store, without having to log in to each site separately.
- [SuiteCommerce InStore Integration](#) – SCIS is a web-based point-of-sale application available for the U.S. market. It's built on the same platform as Commerce web stores and gives you access to NetSuite records through an intuitive interface made for touch tablet screens.
- [Content Delivery Integration](#) – The Content Delivery SuiteApp brings together customer forms, service files, and customer records so you can easily create and manage content pages and enhanced content areas for your website. You don't need any website scripting experience—marketing managers, site administrators, and others can easily add graphics, multimedia, and marketing content without writing any code.

Single Sign-on Integration with External Websites

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

Inbound single sign-on (SSO) lets your web store users log in to an external application and then go to your NetSuite web store without logging in again. Outbound SSO lets users access an external app from your web store.

You can use either of these methods to set up inbound SSO for your NetSuite web store:

- **SAML SSO** – This method uses authentication from a third-party identity provider. For more information, see [SAML Single Sign-on Access to Web Store](#).
- **OpenID Connect (OIDC)** – This is another option instead of SAML SSO. It uses authentication from a third-party OIDC Connect Provider (OP). For more information, see [OpenID Connect \(OIDC\) Access to Web Store](#).

Starting with the 2025.1 release, NetSuite doesn't support Outbound Single Sign-on (SuiteSignOn) anymore. If you need outbound SSO, use the NetSuite as OIDC Provider feature. See the help topic [NetSuite as OIDC Provider](#).

SAML Single Sign-on Access to Web Store

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

With SAML Single Sign-on (SSO), you can set up your site so users who've logged in to an external identity provider (IdP) can click a link and go straight to your NetSuite web store. They don't have to log in again, since the same IdP handles login for both the external app and your web store. When someone uses SAML SSO to get to your web store, they're sent to a landing page you set up in NetSuite. SAML SSO works with SuiteCommerce and SiteBuilder web stores.



Important: Before you attempt to set up SAML for your web store, make sure you read all the SAML SSO documentation in NetSuite. See the help topic [SAML Single Sign-on](#).

Any SAML 2.0-compliant application can be the IdP for SAML access to NetSuite web stores. You can use the same IdP for both your website and NetSuite, or set up different ones for each.

For more information about SAML SSO for web stores, see the following:

- [SAML SSO Restrictions for Web Store](#)
- [SAML SSO Setup for Web Store](#)
- [SAML SSO Configuration for Web Stores](#)

SAML SSO Restrictions for Web Store

The following restrictions apply to the SAML SSO service provider-initiated flow (SP-initiated flow):

- The SP-initiated flow is supported only works for sites on custom domains, not on netsuite.com.

- You can't use both SAML and OIDC Single Sign-on for the same website; you must choose one.
- Your website needs to be fully protected to use the SP-initiated flow. To protect your website, you must do the following:
 1. On the Set Up Web Site form, go to the Web Presence subtab. In the Web Site section, check the **Advanced Site Customization** box.
 2. Go to Commerce > Websites > Website List and edit the web store record. On the Shopping subtab, in the Registration Page section, check the **Password-Protect Entire Site** box.

For more information about the SP-initiated flow, see the help topic [Interactions with NetSuite Using SAML](#).



Important: SAML doesn't have to be the primary authentication method for web stores. Check the Primary Authentication Method box if you want users to be sent to the external IdP login page.

SAML SSO Setup for Web Store

The first step for SAML SSO setup is to make sure that the SAML SSO feature is enabled in your NetSuite account. Go to Setup > Company > Enable Features, and click the SuiteCloud tab. In the Manage Authentication section, check the **SAML Single Sign-on** box to enable SAML SSO. For more information, see the help topic [Complete Preliminary Steps in NetSuite for SAML SSO](#).

To set up SAML Single Sign-on for a web store, go to the SAML subtab of the SSO subtab of the Web Site Set Up page in your NetSuite account. Most fields on the SAML subtab of the SSO subtab of the Web Site Setup page are the same as those on the SAML Setup page for the NetSuite application. For more information, see the help topic [Complete the SAML Setup Page](#).

You can set up SAML for different web stores by completing the SAML subtab of the Web Site Setup page for each one. You can use the same IdP for multiple websites. You can also define different IdPs for each website if needed.



Important: You must use a unique value for the entityID parameter in the metadata file for each website.

SAML SSO Configuration for Web Stores

i Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

In the NetSuite Configuration section on the SAML subtab:

1. Configure NetSuite for SAML SSO with your identity provider (IdP) and set up your IdP in NetSuite. You must provide information from the NetSuite Service Provider Metadata file in NetSuite to your IdP. Follow the instructions provided by your IdP. For more information, see the help topic [Configure NetSuite with Your Identity Provider](#).



Note: The site ID (SAML attribute = site) and account ID (SAML attribute = account) parameters are required. See the help topic [Site Attribute](#).

2. Enter the URL where users go after logging out of your web store in the **Logout Landing Page** field.

 **Note:** Both IdP-initiated and SP-initiated SAML Single Logout (SLO) are supported for web stores.

3. The **Landing Page After Login** field is optional and specific to SAML setup for web stores. By default, SAML users land on your site home page, but you can enter a different URL in this field. If you enter a value for this field and use the secure Single Domain for your web store and checkout, the **Landing Page After Login** must be a secured URL.

 **Important:** The value of the **Landing Page After Login** field is not taken into account in the SP-initiated flow.

4. If you've used the SAML Single Sign-on feature for a web store before, the **Primary Authentication Method** box is checked by default. This box is not checked by default for new web stores.
 - If the **Primary Authentication Method** box is cleared, SAML users need to click a link to access NetSuite. If there's no active NetSuite session, users are sent to the NetSuite login page.
 - If the **Primary Authentication Method** box is checked, users can be redirected to the external IdP login page, but the site must be password protected and on the secure Single Domain.

Users are redirected to the IdP login page when their session times out.

 **Note:** If the **Primary Authentication** box is checked and a user clicks a link with the **c** or **compid** URL parameter or the account-specific domain URL, they're redirected to the external IdP login page. The original URL is passed as a RelayState parameter, following the SAML 2.0 specification. Then, the IdP directs the user back to the right NetSuite resource after authentication. If there's an active IdP session, the user returns to the NetSuite resource without having to enter credentials again.

In the **Set Up Identity Provider** section on the SAML subtab, you need to upload your IdP's metadata file into NetSuite or provide its URL. See the help topic [Set Up Your Identity Provider \(IdP\) in NetSuite](#) for more information.

After setting up an identity provider, you can click the links to view the **Current Identity Provider Metadata** or **Delete IDP Configuration** if needed.

OpenID Connect (OIDC) Access to Web Store

 **Applies to:** SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

OpenID Connect (OIDC) can be used as an alternative to SAML Single Sign-on. With OIDC, users have control over security administration, because an OpenID Connect provider (OP) manages it. OIDC access is supported for Commerce web stores.

 **Important:** Before setting up OIDC for your web store, make sure you read the full documentation for using OIDC in NetSuite. See the help topic [OpenID Connect \(OIDC\) Single Sign-on](#).

You can use any certified OpenID Connect provider (OP); to find one, go to <https://openid.net/certification>. You can use the same OP vendor for both website and NetSuite access, or choose a different OP for each.

The following restrictions apply to the use of OIDC for Commerce websites:

- OIDC access is supported only for websites on custom domains, not on netsuite.com.
- You can't use both SAML Single Sign-on and OIDC Single Sign-on for the same website. You must choose one single sign-on method.
- All users must use the same type of credentials, either logging in through the website form or the OP login form.
- Your website must be fully protected to support OIDC Single Sign-on. To do this, follow these steps:
 - On the Set Up Web Site, on the Web Presence subtab, in the Web Site section, check the **Advanced Site Customization** box.
 - Go to Commerce > Websites > Website List and edit the web store record. On the Shopping subtab, in the Registration Page section, check the **Password-Protect Entire Site** box.



Important: OIDC configuration isn't shared between the NetSuite application and Commerce websites. An Administrator needs to configure OIDC on the SSO tab of the website's setup page, and users must have a role with the OpenID Connect (OIDC) Single Sign-on permission to log in.

Before you begin, make sure the OpenID Connect (OIDC) feature is enabled in your NetSuite account. Go to Setup > Company > Enable Features. On the SuiteCloud tab, in the Manage Authentication section, check the **OpenID Connect OIDC Single Sign-on** box. See the help topic [Enable the OpenID Connect \(OIDC\) Single Sign-on Feature in NetSuite](#) for more information.

To set up OIDC for a web store, go to the Set Up Web Site page, on the SSO tab, and click the OIDC Provider Configuration subtab. Most fields on this subtab are the same as those on the OpenID Connect (OIDC) Setup page for the NetSuite application. For more information, see the help topic [Configure OpenID Connect \(OIDC\) in NetSuite](#).

Set up OIDC for different web stores by completing the OIDC Provider Configuration subtab for each one. You can use the same OP vendor for multiple sites, or pick different OP vendors for each if needed.

On the OIDC Provider Configuration subtab, you must configure the following:

1. **Client ID** and **Client Secret** – enter the values you get from your OP. See the help topic [Register NetSuite with Your OpenID Connect Provider](#) for more information.
2. Choose either **Set Configuration From URL** or **Set Configuration Manually**. For both, enter the values you get from your OP. See the help topic [Register NetSuite with Your OpenID Connect Provider](#) for more information.
3. Click **Save**.



Note: OpenID Connect provider-initiated (OP) flow, is not supported.

Outbound Single Sign-on (SuiteSignOn) Access from Your Web Store

Applies to: SuiteCommerce | SuiteCommerce MyAccount | SuiteCommerce Advanced

As of the 2025.1 release of NetSuite, the SuiteSignOn feature is no longer supported. If you need an integration using outbound single sign-on, use the NetSuite as OIDC Provider feature instead. See the help topic [NetSuite as OIDC Provider](#).

SuiteCommerce InStore Integration

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce InStore

Note: This information refers to SuiteCommerce or the Vinson release of SuiteCommerce Advanced or later.

SuiteCommerce InStore (SCIS) is a web-based point-of-sale application available for the U.S. market. It provides a touch-based user interface designed for tablets.

Commerce purchases can happen online through your web store or in-store with SCIS. NetSuite tracks these with different Transaction records based on where the order comes from. For example, an online order creates a Sales Order record in NetSuite. An in-store purchase with SCIS might use a Cash Sale or Invoice record, depending on the type.

When you connect your Commerce website with SCIS, those transactions get added to your site's order management and billing. Shoppers can then:

- See all online and in-store purchases in one list on the Purchase History page, or filter to show only in-store or only online purchases. If you view everything together, you can tell them apart using the **Origin** column.
- View and print a PDF of any purchase from the Purchase Details page.
- See if a purchase is linked to a sales quote.

Configure your Site for SCIS Integration

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce InStore

You must have the latest SuiteCommerce InStore (SCIS) and SuiteCommerce or SuiteCommerce Advanced bundles installed and set up in your account before you can integrate them. For information, see the help topics [SuiteCommerce InStore Installation](#) and [Install Your Commerce Website Applications](#).

You must also set up NetSuite for SCIS Integration before configuration. For information, see the help topic [Required Features and Settings for SCIS](#).

The correct configuration procedure depends on which version of SuiteCommerce Advanced you're using.

To configure your site for SCIS integration:

1. Select the domain to configure at Commerce > Websites > Configuration.
2. In the SuiteCommerce Configuration record, go to the **My Account** tab, **SCIS Integration** subtab.
3. Set the feature properties in this subtab as needed.
4. Save the Configuration record.

To configure your site for SCIS integration (SCA Denali and Mont Blanc):

1. Create a custom module that includes the backend Configuration object as a dependency. See [Configure Properties](#) for details.

 **Note:** Don't edit the original Configuration.js source file directly. For tips and best practices on customizing JavaScript, see the help topic [Develop Your SCA Customization](#).

2. Set the isSCISIntegrationEnabled property in the custom module to true.
3. Save and deploy to your site.

 **Important:** This information is for the Denali and Mont Blanc releases of SuiteCommerce Advanced.

 **Note:** For information about configurable properties, no matter which SCA version you're using, see [SCIS Integration Subtab](#).

Content Delivery Integration

Applies to: SuiteCommerce Advanced

Important: The Content Delivery Service is supported until the Denali R2 (revision 2) release of SuiteCommerce Advanced only. Customers should use Site Management Tools instead of Content Delivery for SuiteCommerce and for the Mont Blanc release of SuiteCommerce Advanced and later.

The Content Delivery SuiteApp combines customer forms, service files, and customer records to allow you to conveniently create and manage content pages and enhanced content areas for your website. You don't need any website scripting experience—marketing managers, site admins, and others can easily add graphics, multimedia, and marketing content without touching any code.

Configuring Content Delivery Service

To configure the content delivery service:

1. In NetSuite, go to Commerce > Websites> Configuration.
2. Select the **Website** and **Domain**.
3. Click **Continue**.
4. Click the **Advanced** tab.
5. Click the **Cache** subtab.
6. Set the **Content Page CDN** cache duration for content pages.
7. Set the **Content Page TTL**.

This is the Time To Live (TTL) cache for content pages, set in seconds. The value has to be between 300 (5 minutes) and 7200 (2 hours).

8. Click **Save**.

Note: The Content Delivery bundle is supported for the ShopFlow, Checkout, and My Account applications. Content displayed in the Shopping application is delivered using this content delivery system. You can extend SuiteCommerce Advanced applications by creating new content records for your own ecommerce solution, but you can't extend the Content Delivery SuiteApp itself.

Understanding Content Delivery

Applies to: SuiteCommerce Advanced

Important: The Content Delivery Service is supported until the Denali R2 (revision 2) release of SuiteCommerce Advanced only. Customers should use Site Management Tools instead of Content Delivery for SuiteCommerce and for the Mont Blanc release of SuiteCommerce Advanced and later.

There are two types of Content Delivery:

- **Landing Pages** : Let you create full custom pages with custom URLs. You can add as many different content areas as you want and swap out content based on a set of predefined custom rules.
- **Enhanced Pages** : Let you add custom content to existing pages. For example, on a page that shows item records based on search criteria from faceted navigation links, you could add a descriptive content area at the top. You can also customize this area to show different content based on attributes assigned to the enhanced page content area.ther customized to display different content based off of attributes assigned to the enhanced page content area.

Content administrators create pages with containers to display content and define custom content tags to characterize page attributes such as language, delivery method, geography, or domain. After pages are designed, you can create new content records with rules that let users decide how and when their content shows up on the website. Users can set up rules with different attributes to support marketing efforts or scheduled website changes.

Content is generated as JSON data and can be presented on your NetSuite-powered website, mobile applications, or third-party services, such as an externally hosted website or content marketing services.

 **Note:** Anchor Tags are not supported by Content Delivery.

 **Important:** Before you set up Content Delivery pages, work with your developer to figure out the initial page layout, including content layout, content tag definitions, and CSS selectors used to call the content pages. Good planning up front will make development and maintenance easier and let non-developers add custom content when needed.

Using Content Delivery

 **Applies to:** SuiteCommerce Advanced

 **Important:** The Content Delivery Service is supported until the Denali R2 (revision 2) release of SuiteCommerce Advanced only. Customers should use Site Management Tools instead of Content Delivery for SuiteCommerce and for the Mont Blanc release of SuiteCommerce Advanced and later.

Follow these steps to create new content areas for your website. To finish setting them up, you'll also need to create **content records** and **Content Tags**. You define these records live from the Content Delivery page forms.

You can set up Content Delivery pages after you've worked with your developer to define the templates, content tags, and CSS selectors you'll use on your website. Refer to [Understanding Content Delivery](#).

 **Important:** Don't use the Content Delivery service to load external scripts into Landing Pages or Enhanced Pages. Instead, create a custom module that includes the external script. See the help topic [Develop Your SCA Customization](#) for details.

To add content delivery records:

1. Go to Setup > SuiteCommerce Advanced > Content Delivery.
2. Click on one of the following:
 - **New Landing Page**
 - **New Enhanced Page**
3. In the **Name** field, enter a name for this content page record.

This name doesn't show up on your website; it's only for record identification. Each content record needs a unique name.

4. For **Landing Page Content** only, set the **URL** for this new page by entering a slash (/) followed by the desired URL—for example, /about_us.

 **Note:** The URL you set here gets added to the site's main URL to create the full address for this page. This URL has to be unique for the site. If you're duplicating an existing URL, be sure to deactivate any URLs you don't want to display anymore. You can't set a URL here when you're defining Enhanced Page Content.

5. If desired, check the **Inactive** checkbox. An inactive page can't be called from the website or previewed.
6. Select the website where you want this page to appear. To select more than one, hold down the Ctrl key.

 **Note:** Content Delivery pages are only available on SuiteCommerce Advanced websites.

7. In the **Content Tag** field, select the tags that must be available for this content to display.

 **Important:** Content Tags are used when customizing and developing your website. Work with your developer to get the list of available tags or to define new ones. Content Tag names have to match exactly with the tags your developer set up in the website assets.

Select existing tags or **New** to create a new one. You can select more than one tag by holding down the Ctrl button.

Tags aren't always required, but you can use them to further filter when the content area shows up on your site. Content Tags reflect page attributes set in the template files. When you define tags, enter the tag prefix (or group), a colon, and then the attribute.

For example, you could have a group of device attributes or a group of language attributes.

device:mobile	locale:en_US
device:desktop	locale:es_ES
device:iphone	locale:fr_CA

 **Important:** In the case of **Landing Pages** with locales, at least one app Content Tag is required. You can select one or more tags. For Example, app:shopping, app:checkout, or app:myaccount. Your selection depends on which application will display the content.

 **Note:** Reference Implementations support locale attributes by default. When you set content for a specific locale and your website supports multiple languages, shoppers see content in their chosen language. See [Localization](#) for more information.

8. For **Enhanced Pages**, add the following Content Tags: app:shopping, app:checkout and app:myaccount.

These tags let you specify content for a specific application. You need to add the tags even if you don't select them, since they're also used internally when each app interacts with Content Delivery pages.

9. For **Enhanced Pages** only, set the **Target URL**.

Pages at the Target URL use the enhanced content you set here to replace tags with your content. These are URLs that already exist on your site. You can target content to more than one URL. You can also use wildcards to specify a group of pages.

For example, your site might have faceted navigation so users can filter different types of shoes. When someone loads a URL based on selected filters, like `/shoes/women/*`, the enhanced content is displayed.

Note: This tab isn't available when you're setting up Landing Page Content. For Landing Page Content, you must provide a new, unique URL as described in [Step 4](#).

10. Define Content Rules:

The screenshot shows the 'Content Rule' dialog box with the 'Advanced' tab selected. It features a 'Main Body' dropdown menu. Below it is a table with two columns: 'TARGET' and 'CONTENT'. At the bottom of the dialog are four buttons: 'Add', 'Cancel', 'Insert', and 'Remove'.

Content rules let you define what content goes with each rule and where it shows up on the page. For Landing Pages, you might set up content for each area of the page. For Enhanced Pages, you might only replace a couple of areas with the content you set in these rules.

1. For **Landing Pages** only, select a content record to display in the **Main Body** of your page. You can select an existing content record or create a new one by selecting New. See [Creating a Content Record](#) for more information.

Note: Selecting content in this field makes sure your page doesn't show up blank if you haven't set other rules.

2. In the **Target** column, enter a container name.
Container names match the div areas in your Reference ShopFlow templates. What you enter here has to match those div names exactly. Your website developer can give you this information and make sure it matches the area where you want your content to show up.

Note: Developers, you can refer to [Preparing Pages for Content Delivery](#) for more information.

3. Select the content you want to display.
You can choose an existing content record or create a new one by selecting New. See [Creating a Content Record](#).

Note: In **Landing Pages**, the content record selected for the **Main Body** isn't available for other target areas.

11. Enter **Advanced** criteria.

1. Define page elements.
When you're creating content for a new Landing Page, the page always loads with the information you set here. For Enhanced Page Content, the page only loads when the enhanced page criteria are met.
 - **Page Title:** appears in the browser title bar.
 - **Meta Keywords and Meta Description:** helps search engines find your page.
 - **Page Header:** replaces the current header for the page.

- **Addition to <head> field:** adds information to the <head> HTML element for this page. For example, you could enter JavaScript that collects page hit information for marketing purposes.

2. Enter the **Name** of the template for this page.

You can usually leave this blank. But if your reference shopping site uses a custom template, add the template name here. Your website developer can give you this information.

12. Click **Save**.

Creating a Content Record


i Applies to: SuiteCommerce Advanced

Content records hold information about media and files you want to display. Then you set up delivery rules with the Content Delivery SuiteApp. You create a new Content Record when you're setting up main body content for Landing Pages, or when you're defining Content Rules for Landing Pages or Content Records as described in [Using Content Delivery](#).

When you create a new Content Record, you select either Merchandising Rule or HTML.

Using a Merchandising Rule

You can only pick Merchandising Rules you've already set up. Simply select the rule you want, and click Save. For details on defining Product Merchandising rules, see the help topic [Product Merchandising](#).

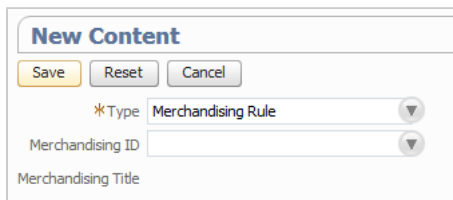

Using HTML

You can use your own custom HTML elements to define the content you want to show. You can add HTML content to your record in two ways:

- **File:** Select this to use an existing HTML file. You must upload the file to the file cabinet first. You can store these files anywhere, but it's best to keep them with your other website files in Web Site Hosting Files > Live Hosting Files.
- **Text Editor:** Use the WYSIWYG editor to add your content. Type your content in the Content field and use the editor to add any formatting you want.

i Note: When you set the Type field to image, enter the image URL. Use the absolute path from your Live Hosting Files/site folder—usually the top images folder, like /images/navbar.jpg.

You can also add client-side JavaScript to add custom logic to your Content Delivery pages.

Note: If you use jQuery methods in your code, make sure to use the jQuery prefix instead of \$. For example, use `jQuery(document).ready(function(){alert("Hello World");});` instead of `$(document).ready(function(){alert("Hello World");});`.

Important: While you can add client-side JavaScript to Content Delivery records, you can't reference external JavaScript libraries here. You would have to reference those from SSP application files or use more advanced customization.

Understanding Content Delivery Caching

Applies to: SuiteCommerce Advanced

When a page shows data from a content delivery record, it's stored in the CDN cache for 2 hours by default. If you make changes to a content delivery record, you won't see them right away—they'll show up after 2 hours or when you clear the cache. For more information about CDN caching, see [CDN Caching](#).

You can clear the cache manually on the Web Site Setup page. Go to Commerce > Websites > Website List, select your site, click Edit, and select Clear Cache from the More Actions drop-down menu.

SEO Considerations for Content Delivery

Applies to: SuiteCommerce Advanced



Important: The Content Delivery Service is supported up to the Denali R2 (revision 2) release of SuiteCommerce Advanced only. After that, you should use Site Management Tools for SuiteCommerce and for the Mont Blanc release and later.

Content Delivery lets you manage key SEO parts of your site, like page titles and meta descriptions. See the following help topics to set these up with Content Delivery.

- [Setting Page Titles with Content Delivery](#)
- [Setting Meta Descriptions with Content Delivery](#)



Note: If you use Site Management Tools, you can't use Content Delivery to set page titles or meta tags. You can set those on Site Management Tools landing and enhanced pages instead. See the help topic [Pages](#).

Setting Page Titles with Content Delivery

Page titles are a key part of your site's SEO. The title shows up in the browser's title bar or tab, and it's also what people see in search engine results. See the help topic [SEO and Page Titles](#)

If you use Content Delivery, follow these steps to set page titles for your site.

- [Home Page Title](#)
- [Item Detail Page Title](#)
- [Facet Search Page Title](#)
- [Landing Page Title](#)

Home Page Title

You can set your home page title with a SuiteCommerce Advanced custom module. See the help topic [Home Page Title](#).

Item Detail Page Title

You set the item detail page title on the Item Record in NetSuite. See the help topic [Item Detail Page Titles](#).

Facet Search Page Title

You can use Content Delivery enhanced pages to set SEO-friendly titles for your search pages.

To set facet search page titles with content delivery enhanced pages:

1. Go to Setup > SuiteCommerce Advanced > Content Delivery.
2. Click **New Enhanced Page**.

3. In the **Name** field, enter a name for this enhanced page.
4. In the **Site** list select the website for which you're creating the enhanced page.
5. On the Target URL subtab, in the **Target URL** field, enter the URL for which you want to set a page title.
6. Click **Add**.
7. Select the Content Rule subtab.
8. In the **Target** field, enter **#empty**.
9. In the **Content** dropdown list select **New**. Create a new blank HTML page.
10. On the Advanced subtab, enter the title for the page in the **Page Title** field.



Note: You can also set other important SEO elements here, such as the meta description.

Landing Page Title

You can use Content Delivery to set SEO-friendly titles for your landing pages. For more information about Content Delivery landing pages, see [Using Content Delivery](#).

To set landing page titles:

1. Go to Setup > SuiteCommerce Advanced > Content Delivery.
2. Click **Edit** for the landing page.
3. On the Advanced subtab, enter the title in the **Page Title** field.
4. Click **Save**.

Setting Meta Descriptions with Content Delivery

The meta description for your pages is important for SEO because it tells search engines what the page is about. It's also usually the summary that shows up in search results. See the help topic [SEO and Meta Descriptions](#). You can use Content Delivery to set the meta description for your home page, facet pages, and Content Delivery landing and enhanced pages.

Meta Description for the Home Page

You can use a Content Delivery enhanced page to add a meta description to your home page. Keep it short and informative to encourage people to visit your site.

To set the meta description for the home page:

1. Go to Setup > SuiteCommerce Advanced > Content Delivery.
2. Click **New Enhanced Page**.
3. In the **Name** field, enter a name for this enhanced page, for example **home page**.
4. In the **Site** list, select the site for this enhanced page.
5. In the **Target URL** field on the Target URL subtab, enter **/**. That means the home page of your site.
6. On the Content Rule subtab, enter **#empty** in the **Target** field.
7. Select **New** from the **Content** dropdown list. This opens the new content window. Create a blank HTML page.

 **Note:** If you already have a blank HTML page, you can use that instead of creating a new one.

8. On the Advanced subtab, enter your meta description in the **Meta Description** field.

 **Note:** You can also set other attributes, like the page title and page header.

Meta Description for Facet Pages

You can use Content Delivery to set the meta description for a facet search page. For example, for a men's shoes filter, your description could be: Shop the best deals on men's dress shoes, loafers, sneakers, boots, and more at YourSite.com.

To set the meta description for a facet page:

1. Go to Setup > SuiteCommerce Advanced > Content Delivery.
2. Click **New Enhanced Page**.
3. In the **Name** field, enter a name for this enhanced page, for example **mensshoes**.
4. In the **Site** list, select the site for this enhanced page.
5. In the **Target URL** field on the Target URL subtab, enter the URL for the facet listing. For example, if the URL for Men's Shoes is /mens/shoes, then enter **/mens/shoes**.
6. On the Content Rule subtab, enter **#empty** in the **Target** field.
7. Select New from the **Content** dropdown list. This opens the new content window. Create a blank HTML page.

 **Note:** If you already have a blank HTML page, you can use that instead of creating a new one.

8. On the Advanced Subtab, enter your meta description in the **Meta Description** field.

 **Note:** You can also set other attributes, like the page title and page header.

Meta Descriptions for Content Delivery Landing Pages

You set the meta description for a Content Delivery landing page on the Content Delivery landing page record. Enter the meta description in the **Meta Description** field on the **Advanced** subtab. For more information about creating landing pages, see [Using Content Delivery](#).

Preparing Pages for Content Delivery

 **Applies to:** SuiteCommerce Advanced

 **Important:** The Content Delivery Service is only supported up to the Denali R2 (revision 2) release of SuiteCommerce Advanced only. After that, you should use Site Management Tools for SuiteCommerce and for the Mont Blanc release and later.

This section shows you how to get Reference Implementation pages ready for content delivery. Your web application developers should handle this since it means editing code in the page.

Configuring the Reference Implementation

To show Content Delivery pages on your site, you must first set up the SuiteCommerce Advanced SSP to include the content delivery scripts.

If you use more than one Reference Application for your web store, you can select which applications use a Content Delivery record by adding the “app” tag with the application name, like Checkout, MyAccount, or Shopping. For example, app:Shopping means the content only shows in the Shopping application. If you don't use an app tag, the content is available for all Reference Applications.

You can also show Content Delivery content inside Backbone Modals. To do this, add the prefixViewId “in-modal-” to the target ID in the Content Delivery record. You can choose if the content shows only inside a modal, both inside and outside, or just outside a modal.

To include the Content Delivery scripts:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **Edit** next to the SuiteCommerce Advanced SSP application you use for the site with content delivery. For example, SuiteCommerce Advanced — Dev [version].
3. In the **Libraries** subtab under **Scripts**, click **Add**.
4. Go to the path of the content_delivery_service_library_v2.js file in the Content Delivery reference installation.



Important: If you're using a custom SSP application, you must define this library for your custom SSP application too.

5. Click **Save**.

Permission Validation

i Applies to: SuiteCommerce Advanced



Important: The Content Delivery Service is only supported up to the Denali R2 (revision 2) release of SuiteCommerce Advanced. After that, you should use Site Management Tools for SuiteCommerce and for the Mont Blanc release and later.

In some cases, you might not be able to access the Content Delivery page and instead receive the following error:

Permission Violation: You need the 'Lists -> Documents and Files' permission to access this page. Please contact your account administrator. This only applies to the Denali or Denali R2 implementations of SuiteCommerce Advanced.

If you see this error, you must edit the Script Deployment record for **NS CD - SL - Content Management Menu**.

To update the script deployment record:

1. In NetSuite, go to Customization > Scripting > Script Deployments.
2. Set the **Type** filter to **Suitelet**.
3. Click **Edit** next to the **NS CD - SL - Content Management Menu** script (ID: customdeploy_cds_sl_main_menu).

4. Change the **Execute as Role** field to **Administrator**.
5. Save the record.

Overview

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Site security features let you monitor changes made to your Commerce website and protect it from unauthorized access. You're able to:

- Restrict customer access to specific website features, such as Order History
- Restrict access to your entire website
- Restrict access to price information
- Track changes that have been made to your website records
- Prevent customers from performing key actions on your website if they use unverified email or email from untrusted domains
- Use CAPTCHA challenges to confirm visitors to your website are human before they can perform certain actions

NetSuite's SuiteCommerce platform uses a state-of-the-art content delivery network (CDN) to protect our customers and users from internet threats such as DDoS attacks, aggressive bots, and other fraudulent activities.

SuiteCommerce applies several protective measures, such as:

- Rate limiting
- Bot management
- Web application firewall
- IP reputation management
- Geo-blocking

All security controls are configured and fine-tuned to comply with Oracle policy. A dedicated team of network and security engineers constantly monitors and updates these measures.

See the following topics for more information about site security:

- [Feature Access Permissions](#) – Restrict access to specific features by modifying the Customer Center role permissions for each user.
- [Website Restriction](#) – Restrict access to either your entire website or to pricing information.
- [McAfee Secure](#) – Certify your website is secure with the McAfee SECURE service.
- [Website System Notes](#) – Use system notes to track changes that have been made to your website records.
- [SuiteCommerce Email Verification](#) – Require customers to verify their email addresses before completing key actions on your website.
- [SuiteCommerce Email Domains Blocklist](#) – Prevent customers from performing key actions on your website if they use an email from untrusted domains.
- [SuiteCommerce CAPTCHA](#) – Require customers to complete simple tasks, confirming that they're human before they can perform certain actions on your website.

Feature Access Permissions

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Commerce and Site Builder websites use the Customer Center permissions to enable some features and generate menu items for the My Account application. You configure these permissions in the NetSuite account that contains the website record for your site. For more information, see the help topic [Custom Centers](#).

My Account Menu Permissions

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

The My Account application contains a menu that provides links to different features within the application. The menu is available in two locations: the sidebar and application header.

Each menu is generated dynamically based on the feature areas the user has permission to access. By default, the user's NetSuite roles and permissions determine which menu actions are shown. For example, if a user doesn't have permission to view Order History in NetSuite, they won't see the Order History & Returns link in their My Account menu.

However, the mechanism for generating the menu items based on permissions is different for each menu. Permissions attributes are set for each view and then in the template files those permissions attributes are used to determine which links to display.

Header Menu

The Header application module displays the application header. The `header_menu_myaccount.tpl` template defines each menu and submenu item in the HTML. To determine which menu items the user can view, the HTML checks permissions based on the values of the `data-permissions` attribute.

For example, in the `header_menu_myaccount.tpl` code snippet, the `div` is displayed when the logged-in user's permissions match both listed `data-permissions` attributes

```
1 <a class="header-menu-myaccount-anchor-level3" href="#" data-touchpoint="customercenter" data-hashtag="#returns" data-permission
  s="transactions.tranFind.1,transactions.tranRtnAuth.1" name="returns">
2   {{translate 'Returns'}}
3 </a>
```

Account Overview Menu

The Account Overview menu is generated automatically when the My Account application loads. Each application module that defines a feature with a corresponding menu item returns a `MenuItems` object.

The `MenuItems` object is usually defined in the entry point module. For example, the following code snippet from the `Quote.js` file defines the menu item that appears in the Account Overview menu.

```
1 MenuItems: {
2   parent: 'orders'
3   , id: 'quotes'
4   , name: _('Quotes').translate()
}
```



```

5      , url: 'quotes'
6      , index: 5
7      , permission: 'transactions.tranFind.1,transactions.tranEstimate.1'
8    }

```

After all modules are loaded, the SC.MyAccount module's MyAccount.on method loads menu items into an array.

Forbidden Access

The My Account application only enables permitted features, but users may still try to access restricted pages. The ErrorManagement.ForbiddenError.View module of the ErrorManagement application module displays an error message if a user doesn't have permission to access a feature. By default, the template for this view displays the following error message:

Sorry! You have no permission to view this page. Please contact the website administrator, click here to continue.

You can customize this template to fit your web store's needs.

Customer Center Custom Permissions

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

When customizing or creating a module, make sure the customer center role has the right permissions. For more information, see the help topic [Customizing the Customer Center Role](#).

The following table lists web store features that need custom permissions. The table shows the minimum permissions required for each item in the Customer Center. When customizing or creating a feature, test different permission combinations to ensure it works as expected.

Feature	Subtab	Permission	Level
Orders menu	Transactions	- Find transactions - Sales orders	- View - View
Returns menu item	Transactions	- Find transactions - Return authorizations	- View - View
Quotes menu item	Transactions	- Find transactions - Estimates	- View - View
Invoices menu item	Transactions	- Find transactions - Invoice	- View - View
Transaction history menu item	Transactions	- Find transactions Additionally, you must grant permissions for at least one of the following: - Invoice - Credit Memo - Customer Deposit - Deposit Application	View

		The combination of permissions granted determines the items of the transaction type filter that is displayed.	
Print statement menu item	Transactions	Generate Statements	Create
Cases menu	Lists	Cases	Create
Continue to payment button (account balance)	Transactions	■ Customer Payment ■ Invoice	■ Create ■ View
Print statement button (account balance)	Transactions	Generate Statements	Create
Request return button (invoice details)	Transactions	Return Authorization	Create
Make a payment (invoice details)	Transactions	■ Customer Payment ■ Invoice	■ Create ■ View
Make a payment (invoice list)	Transactions	■ Customer Payment ■ Invoice	■ Create ■ View
Request a return (order history)	Transactions	Return Authorizations	Create
Recent orders (overview)	Transactions	■ Find Transactions ■ Sales Order	■ View ■ View

Website Restriction

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

 **Note:** This information refers to SuiteCommerce and the Mont Blanc release of SuiteCommerce Advanced (SCA) or later. Site Builder supports this functionality, but only if your implementation doesn't deploy SSP Applications to SCA reference implementations.

Commerce websites let you restrict access to your website in two ways:

- [Restrict Access to Your Entire Site](#)
- [Restrict Access to Pricing Information](#)

Both options are disabled by default and require some minor configuration to work.

 **Warning:** The CXM API is public and contains all the information exposed by the field set being used. Password protection restricts user access to some or all of your site when enabled. However, users who knows a URL that calls the different APIs can still access some information.

Restrict Access to Your Entire Site

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced

You can restrict your entire website to logged-in users only. When you enable restricted access, only registered and logged-in users can view your site's content. You can set up your website to redirect unauthenticated visitors to a login page with a registration link.

You can also restrict access to users who have been granted access by the Site Administrator. This flow is useful in B2B scenarios where you want to provide partners or customers with login credentials.

 **Warning:** The CXM API is public and contains all the information exposed by the field set being used. Password protection restricts user access to some or all of your site when enabled. However, users who knows a URL that calls the different APIs can still access some information.

 **Note:** If you're using a pre-Vinson version of SuiteCommerce Advanced, use the second setup procedure.

 **Note:** You can make specific URLs publicly available even with a password-protected site. For details, see the help topic [Set Public URLs](#).

To restrict access to your website:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website to which you want to restrict access.
3. Go to the **Shopping** tab and the **Registration Page** area.
4. Check the **Password-protect Entire Site** box.

5. Select one of the following options from the **Type of Customer Registration** list:
 - **Existing Customers Only** – This option restricts the site to customers with login access to complete the checkout process. This option is only available with the Advanced Site Customization feature.
 - **Required** – This option restricts the site to registered customers. New customers must register to be able to access the site. This option creates a record in NetSuite with contact information, even if the shopper doesn't complete checkout.

 **Note:** The “optional” and “disabled” site registration options are not available if the site is password protected.

To learn more about customer registration, see the help topic [Configure Site Registration](#).

To restrict access to your website (pre-Vinson SCA):

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website to which you want to restrict access.
3. Go to the **Shopping** tab and the **Registration Page** area.
4. Select one of the following options from the **Type of Customer Registration** list:
 - **Existing Customers Only** – This option restricts the site to customers with login access to complete the checkout process. This option is only available with the Advanced Site Customization feature.
 - **Required** – This option restricts the site to registered customers. New customers must register to be able to access the site. This option creates a record in NetSuite with contact information, even if the shopper doesn't complete checkout.

 **Important:** The Restrict Access feature won't work if this field is set to **Disabled** or **Optional**.

To learn more about customer registration, see the help topic [Configure Site Registration](#).

5. Create a custom module that includes the backend Configuration object as a dependency. For details, see [Configure Properties](#).

 **Note:** Don't edit the original Configuration.js source file directly. For guidance on customizing JavaScript, see the help topic [Develop Your SCA Customization](#).

6. Set the passwordProtectedSite property to true in your custom module.
7. Save your changes and deploy them to your site.

Known Limitations

Before restricting access to your Commerce website, be aware of the following information:

- After a user's session ends, clicking an item's Quick View link redirects them to the Checkout page, not the Login page. However, the user can't access the site without logging in.
- When a user changes languages on a password-protected site, the application recognizes the new domain and prompts them to log in again.
- When you enable password protection, it restricts access to some or all of your site. However, users who know a URL that calls the CXM Service API can still access some information.

Restrict Access to Pricing Information

i Applies to: SuiteCommerce | SuiteCommerce Advanced

You can control who sees pricing information on your website using two methods:

- **Personalized Catalog Views (PCV)** – Give different visitors access to different items. With PCV, you control what users can do: buy items, see item details and prices, or only see item details. For more information, see the help topic [Personalized Catalog Views](#).
- **Require Login for Pricing** – A good choice when you don't need PCV's detailed control and simply want to keep prices from unregistered users. When you enable this option, visitors can browse your site, but they must log in to see prices or make purchases. This feature lets you hide prices from competitors or wholesalers and encourages registration.

With this feature enabled, if a user is not logged in, Commerce web stores replace prices with a login message and link. The user can click the link to go to a Login/Registration page, where they must register to see prices or make purchases.

i Note: If you restrict access to your entire site, this feature won't apply.

i Note: If you're using a pre-Vinson version of SuiteCommerce Advanced, use the second setup procedure.

To restrict access to pricing information:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website where you want to restrict pricing information.
3. Go to the **Shopping** subtab.
4. Check the **Require Login for Pricing** box.

To restrict access to pricing information (pre-Vinson):

1. Create a custom module that includes the backend Configuration object as a dependency. For details, see [Configure Properties](#).

i Note: Don't edit the original Configuration.js source file directly. For guidance on customizing JavaScript, see the help topic [Develop Your SCA Customization](#).

2. Set the loginToSeePrices property to true in your custom module.
3. Save your changes and deploy them to your site.

McAfee Secure

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Note: This information refers to SuiteCommerce or the Aconcagua release of SuiteCommerce Advanced or later.

The SuiteCommerce McAfee Secure extension lets you integrate your Commerce website with the McAfee SECURE service, which checks your site for malware, viruses, phishing attacks, and other malicious activities.

SuiteCommerce McAfee Secure adds the McAfee code required to perform the initial security scan of your site. When this scan is complete, you're able to configure your site to display the McAfee SECURE trustmark to show visitors that your online store is tested and certified to be safe.

Important: Web store extensions are only available if provisioned, installed, and activated for a selected domain in your account. For more information, see the help topic [Commerce Extensions](#).

To display the McAfee SECURE trustmark on your website, complete the following steps:

1. Install and activate the McAfee Secure extension.
2. Submit a [Cache Invalidation Request](#).
3. Sign up for a McAfee SECURE plan.
Go to <https://www.mcafeesecure.com/start>.
4. Add your website URL to your McAfee account.
For more information, refer to McAfee support documentation on adding a website.
5. Submit a [Cache Invalidation Request](#).

Configure McAfee Secure

If you have signed up for a McAfee SECURE plan and added your site to be certified with McAfee, then you can use the SuiteCommerce Configuration record to display the McAfee SECURE trustmark on your website. You must sign up with McAfee Secure before this field displays the trustmark.

To configure McAfee Secure:

1. Go to Commerce > Websites > Configuration.
2. Select the website and domain where the McAfee Secure extension is activated and click **Configure**.
3. Click the **Extensions** subtab, then the **McAfee Secure** subtab.
4. Check the **Display Trustmark** box to display the McAfee SECURE trustmark on your site.
5. Click **Save**.

Website System Notes

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Note: This topic applies to System Notes only. For information about System Notes v2, see the help topic [System Notes v2 Overview](#).

You can use system notes to track important changes to website implementations. System notes are visible to account administrators and users with access to the Web Site Setup page. For more information, see the help topic [System Notes Overview](#).

To view system notes:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website.
3. Click the **System Notes** subtab.

System notes are also available in Saved Search. To create a saved search, click **System Note** in the New Saved Search list, and then filter the search for the website record type.

To create a saved search of Web Site record changes:

1. Go to Lists > Saved Search > New.
2. Click **System Notes**.
3. On the **Criteria** subtab in the list of **Filters**, select **Record Type**, and then select **Website**.
4. Click **Save & Run**.

Search results show changes made to your websites, including the date and who made them.

Note: Not all changes made to the Web Site Setup page are logged in system notes.

Overview

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

If a website is no longer required, you may want to remove it. However, it is inadvisable, and often impossible, to delete the website record because other NetSuite records are dependent on it. It may also be necessary to keep all database references to the unused website for audit or other purposes. In these situations, you can inactivate the website without deleting the website record.

However, in some cases it may be appropriate to permanently delete the website record, for example, if a website was created accidentally or was never used.

Furthermore, you may want to take your website offline temporarily while you make changes such as updating images, adding banners, or editing product descriptions. While the site is offline, your custom site maintenance page is displayed. If you don't have a custom site maintenance page, a default maintenance message is displayed.

Depending on why you're making a website inaccessible, you can do so by:

- [Making a Website Inactive](#)
- [Deleting a Website](#)
- [Taking a Website Offline for Maintenance](#)

You can also create a custom maintenance folder and content. See the help topic [Custom Maintenance Folder and Content](#).

For more information, see [Differences between Deleting, Inactivating, and Taking a Website Offline](#).

i Note: Before 2021.1, enabling a commerce-related feature (SuiteCommerce/SuiteCommerce Advanced/SuiteCommerce My Account/SuiteCommerce In Store) also enabled Site Builder and automatically created a website record using Suite Builder. If you don't use Site Builder, you can disable it in your account. For more information, see the help topic [Disabling Site Builder in your Account](#).

Deleting a Website

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Deleting a website removes it permanently and irrecoverably. Users are no longer able to access it and no history or audit trail is retained.

While you can usually delete simple websites, it's often not possible or desirable to delete a website entirely. For example, it is not possible to delete a website record if other NetSuite records are dependent on it or if there are database references to it that cannot be deleted.

When trying to delete a website, you can encounter two types of dependent record scenarios:

- Non-blocking records – These include Promotion and Item records. They don't block the website record deletion.
- Blocking records – These include Commerce Catalog and Shipping Item records, or instances when a Customer is assigned to the site. When you're trying to delete a website with blocking dependent records, website deletion gets blocked. Instead, you get a list of the dependent records for review.

If you can't delete your website record, you can inactivate it instead. For more information, see [Making a Website Inactive](#).

To delete a website:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website you want to delete.
3. Select **Delete** from the Actions menu.
4. Click **OK** to confirm that you want to delete the website.

If the website has no dependent records, it gets deleted.

If the website does have dependent records, it doesn't get deleted. Instead, a list of the dependant records is displayed.

In some cases, you may be able to delete a website with dependent records. To do this, access each of the dependent records and, if possible and desirable, delete them or remove their connection to the website. Then, attempt to delete the website again. Remember that not all websites can be deleted.

Note: You cannot delete the primary website.

Making a Website Inactive

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

If you want to make a website inaccessible to users without deleting it permanently, you can set the website record to inactive. An inactive website is no longer accessible to users, but retains its internal references to other areas of NetSuite.

Inactivating a website has the following effects:

- Makes all the website domains inaccessible.
- Deletes the website search index.
- Clears all caches, including CDN caches.
- Reduces the number of active websites, thereby freeing up a site license.
- Removes the inactive site from most related dropdowns and lists. For example, you can't select it from domain records.

All Commerce offerings can be made inactive. You can reactivate an inactive site if your NetSuite licence hasn't reached its site limit. If you reactivate a website, its search index needs rebuilding before it's accessible again. For more information about rebuilding a search index, see the help topic [Events that Trigger Search Index Rebuild](#).

To inactivate a website:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the website you want to make inactive.
3. Check the **Inactive** box.
Review the confirmation message to ensure you understand the effects of website inactivation. Click **OK** to continue.
4. Click **Save**.



Important: After you make a website inactive, it's no longer available for selection in dropdown lists. However, inactive websites are still included in reports and saved searches. To filter out inactive records from reports and search results, you set the Inactive filter to False. Similarly, if you don't want to see items from inactive sites, set the Web Site – Inactive filter to False in your item saved searches.

To view inactive websites:

1. Go to Commerce > Websites > Website List.
2. Check the **Show Inactives** box.
The page reloads to display inactive websites.

To reactivate an inactive website:

1. Check that you haven't reached the site limit in your NetSuite license. If you have, contact your account manager to purchase additional site licenses. You can also free up a site license by inactivating an unused site.
2. Go to Commerce > Websites > Website List.

3. Check the **Show Inactives** box at the top of the list of websites.
4. Click **Edit** next to the inactive website you want to reactivate.
5. Clear the **Inactive** box.
6. Click **Save**.

A search index rebuild is triggered for the website. Visitors can access the website after the rebuild finishes.



Note: If you have SuiteTax enabled, you can only reactivate inactive Site Builder websites if their Web Site Scope is set to "Information and Catalog" or "Information Only".


Taking a Website Offline for Maintenance

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

You may want to take your website offline while you make changes such as updating images, adding banners, or editing product descriptions.

When you take your site offline for maintenance, your custom site maintenance page is displayed. If you don't upload your own maintenance content to the File Cabinet, NetSuite displays a generic maintenance page.

Example of generic maintenance page:

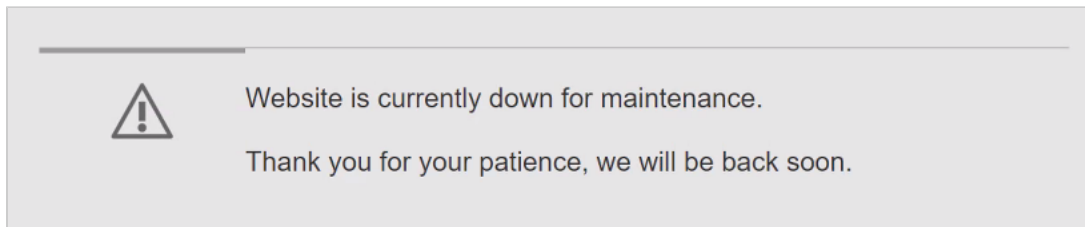

To set up your custom maintenance folder and content, see the help topic [Custom Maintenance Folder and Content](#).

To take your website offline for maintenance:

1. Go to Commerce > Websites > Website List.
2. Click **Edit** next to the site you want to take offline.
3. Check the **Take Website Offline for Maintenance** box.
4. Click **Save**.

Customers who visit your website will now be redirected to a URL on your web store domain. For example, <https://example.com/website-temporarily-unavailable>. Your custom maintenance content or the NetSuite generic maintenance page (if you have not provided custom maintenance content) will be displayed.

Note: If you check the **Take Website Offline for Maintenance** box, you can't rebuild the search index until you bring the website back online. If you try to rebuild the search index while your website is offline, the **Search Index Status** stays pending until you cancel the job or bring the website back online. For more information, see the help topic [Search Index Overview](#).

To bring your website back online:

1. Go to Commerce > Websites > Website List (Administrator).
2. Click **Edit** next to the site you want to bring online.
3. Clear the **Take Website Offline for Maintenance** box.
4. Click **Save**.

Customers who visit your website now see your Commerce web store.

Differences between Deleting, Inactivating, and Taking a Website Offline

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount

Your reasons for making a website inaccessible should determine whether you delete, inactivate, or take it offline for maintenance. The following table describes the differences:

	Offline Website	Inactive Website	Deleted Website
Purpose	Takes website offline temporarily for maintenance	Inactivates website permanently (reactivation is possible with restrictions)	Removes website permanently and irrecoverably
Feasibility	No restrictions.	No restrictions.	Possible only if there are no dependent records.
Website record	Retains website record together with all internal references.	Retains the website record and all internal references.	Deletes website record.
Cache (CDN and internal cache)	Retains the cache.	Deletes the cache.	Deletes the cache.
Search index	Retains the search index.	Deletes the search index.	Deletes the search index.
Alternative page	Displays custom maintenance page or default maintenance message.	Displays Site not found error.	Displays Site not found error.
Site license	Uses a site license.	Doesn't use a site license.	Doesn't use a site license.
Displayed in lists	Displayed in website lists, dropdowns etc.	Not displayed in most website lists, dropdowns etc.	Not displayed in any website lists, dropdowns, etc.
Search results and reports	Included	Included. Can be filtered out.	Not included.
Reactivation	You can bring it back online at any time.	You can reactivate it, but there are some restrictions: ■ A site license must be available. ■ The search index must be rebuilt before the website is accessible to visitors. The process takes longer with more items to index. ■ You must set the Web Site Scope to either Information and Catalog or Information Only if SuiteTax is enabled (only for Site Builder sites).	You can't reactivate it.

Overview

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

You can create SuiteScript Server Page (SSP) applications to add custom application to your web store. SSP applications have a front-end page that runs server side SuiteScript.

You can write SSP applications in both SuiteScript 1.0 and 2.0.

See the following topics for more information about SSP applications:

- [SSP Application Overview](#) – This topic gives you a broad overview of SSP apps, covers their components, compares them with Suitelets, RESTlets, and Scriptable Cart, and explains how they differ based on the SuiteScript version.
- [Create and Use SSP Applications](#) – These topics show you how to create an SSP application and an SSP application record, with code samples for both SuiteScript 1.0 and 2.0.
- [Integration with Third-Party Checkout Providers](#) – You can integrate your SSP application with third-party providers, such as Paypal express. This topic shows you how to create request handlers and call them from your application.
- [Bundle an SSP Application](#) – After you finish creating your SSP application, bundle it for installation in other NetSuite accounts.

SSP Application Overview

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

SuiteScript Server Pages (SSP) is the custom web application platform you use to build applications for Commerce web stores. SSP applications are an iteration on the Suitelet, letting you build frontend pages that run server-side SuiteScript to generate dynamic content. The technology emulates JSP, but uses SuiteScript as the underlying mechanism. You can also bundle and distribute SSP applications as SuiteApps, making it easier to share or sell custom applications.

SSP applications include .ssp files and a library of JavaScript files. The .ssp files make AJAX calls to backend services and keep frontend (website display) and backend (business) logic separate.

Every SSP application has entry points you can connect to different parts of your web store. The entry points for an SSP application depend on the SuiteScript version it uses. For SSP applications written in:

- **SuiteScript 1.0:** Entry points (or touch points) are set as Supported Touch Points on the SSP application record. Each touch point matches a part of the web store, such as View Homepage, Log In, and Log Out. When a user goes to a certain part of the store, the connected SSP application runs and generates dynamic content for that area.
- **SuiteScript 2.0:** The default SSP file selected on the SSP application record is the single entry point.

All files in an SSP application are grouped by author (application publisher) and stored together in Web Site Hosting files folder in the files cabinet.

The SuiteScript Server Pages feature works for both Site Builder and Commerce websites. This feature lets you package Commerce website assets as SSP applications. You can create SSP applications and link them to your website to customize it.

For more information, see [Create and Use SSP Applications](#).

SSP Application Structure

SSP files (.ssp) are user interface elements on a website. They can generate anything from a banner to a whole web page. A .ssp file has the presentation logic for the web page it replaces. These .ssp files let you to add HTML and generate dynamic content to show in the browser.

An important job of .ssp files is to generate dynamic content for supported web store touch points. SSP applications written in SuiteScript 1.0 support several touch points and you can select a different .ssp file for each one. In SuiteScript 2.0 SSP applications, the default .ssp file decides which .ssp file to use for each purpose.

Backend services go in .ss files, usually one .ss file per service. Ajax calls from an .ssp file let you access .ss file services. Note that besides the SuiteScript API, both .ssp and .ss files can use the Commerce API. For more information, see [File Types for SSP Applications](#).

SSP Applications and Commerce web stores

Commerce web store is a website and checkout solution delivered as a set of SSP applications, available as a SuiteApp you can install in your account. You can modify, test, and debug files for SSP applications in your NetSuite account. This setup lets you to manage multiple SSP applications to customize a single web store. SSP applications ensure that all assets are linked together. This setup also supports access with named URLs.

Components of SSP Applications

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

To customize and create SSP applications successfully, it is important to understand the different components involved:

- [SuiteScript Server Pages Feature](#)
- [SSP Application Record](#)
- [SSP Application Precedence](#)
- [File Types for SSP Applications](#)
- [Commerce API](#)

SuiteScript Server Pages Feature

To use SSP applications, enable the following features:

- **SuiteScript Server Pages** - to create, view, or customize SSP applications.
- **SuiteScript 2 Server Pages** - to use SuiteScript 2.0 in SSP applications. Note that SSP applications written in SuiteScript 1.0 will continue to work as normal when this feature is enabled.

For more information, see [Enable Required Features for SuiteScript 1.0 SSP Applications](#) and [SuiteScript 2.0 SSP Applications](#).



Important: You must have the SuiteScript permission to access SSP Application records. To set up permissions, go to Setup > Users/Roles > Manage Roles.

SSP Application Record

The SSP Application record is a single NetSuite object that stores details about a website customization. This record lets you group assets, debug script files, and package the customization for use in other NetSuite accounts. On this record, you can set and view these properties:

- **Application Folder** – the file cabinet folder where your customization files are stored. For more information, see [Create an SSP Application Folder](#).
- **URL Root** – the root used in web store links to SSP application assets. For more information, see [Create a SuiteScript 1.0 SSP Application Record](#).
- **Supported Touch Points** – the web store entry points where the SSP application can generate dynamic content. For more information, see [Select Supported Touch Points](#). Touch points are only defined on the application record only for SSP applications written in SuiteScript 1.0.
- **Default SSP File** – the file that controls the dynamic content the SSP application generates on the website or domain. Only SSP applications written in SuiteScript 2.0 have default SSP files. For more information, see [Select Default SSP File](#).
- **Sites and Domains where the SSP application is deployed** – the website or domain where the SSP application is deployed. This only applies to SSP applications written in SuiteScript 2.0. For more information, see [SSP Applications \(SuiteScript 1.0 Compared with SuiteScript 2.0\)](#) and [Deploy and Undeploy SSP Applications](#).

SSP Application Precedence

When SSP applications share a URL and hosting root, a system of precedence determines which SSP application handles a particular request. For more information, see [Change SSP Application Precedence](#).

Note: SSP application precedence does not apply to SSP applications written in SuiteScript 2.0 because such applications cannot share both a URL and a hosting root. If two SSP applications written in SuiteScript 2.0 have the same URL root, they cannot be deployed to the same domain or website.

File Types for SSP Applications

Web store customizations implemented through SSP applications support the following file types:

- **.ssp files:** These are **SuiteScript Server Pages** frontend pages you can write in HTML and/or server-side SuiteScript. They're similar to .jsp files, use a similar tag style, and support Includes so you can be pull in code from libraries. You can also call suitelets and RESTlets from .ssp files, and use them to build pages with JQuery.
- **.ss files:** These are request handlers written in SuiteScript, a special kind of suitelet. They can be frontend non-HTML pages, such as AJAX handlers, or backend pages that handle HTTP requests and do things like write HTML, XML, JSON, or JavaScript to the output or issue a redirect.

Both .ssp files and .ss files run on the server and support all the SuiteScript APIs that work server-side. SSP application files written in Suitescript 1.0 also support the Commerce API for web store customizations.

For basic examples of .ssp and .ss file content, see [Sample SSP Application Code \(SuiteScript 1.0\)](#) and [Sample SSP Application Code \(SuiteScript 2.0\)](#).

Commerce API

The API, supported by both Site Builder and Commerce web stores, includes all of the web store-specific objects and related methods that you need to fully customize your web store on the SuiteCloud platform.

For details about this API, see the help topic [Commerce API](#).

Note: The Commerce API is not available for use with SSP applications written in SuiteScript 2.0.

SSP Applications Compared to Customization with SuiteScript

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

The following tables compare SSP application capabilities with Suitelets, RESTlets, and Scriptable Cart:

- [Presentation](#)
- [Services](#)
- [Authentication and Authorization](#)

Deployment

KEY	
Symbol	Definition
S	Supported
U	Unsuported
—	Not Recommended
O	Optional

Presentation

	Suitelet	RESTlet	SSP Applications		Scriptable Cart
			.SSP	.SS	
Static HTML	S	X	S	X	—
UI Objects	S	X	—	—	X
Dynamic HTML	S	X	S	S	—
Standard Library Tags	X	X	S	X	—

Services

	Suitelet	RESTlet	SSP Application		Scriptable Cart
			.SSP	.SS	
JSON for nlobj	—	S	—	—	X
HTTP Methods	POST/GET	GET/POST/ PUT/DELETE	GET	GET/POST/ PUT/DELETE	—
nl APIs	S	S	S	S	S (only on SO form)
Ecommerce APIs	X	X	S	S	X

Authentication and Authorization

	Suitelet	RESTlet	SSP Application		Scriptable Cart
			.SSP	.SS	
Available Without Login	S	X	S		S
Recognized User (Cookies)	X	X	S		S
Shopper	X	X	S		S

	Suitelet	RESTlet	SSP Application		Scriptable Cart
			.SSP	.SS	
User (Entity Record)	S	S	S		S
Authentication Mechanism	JSessionId	JSessionId/nlAuth	JSessionId		JSessionId
Audience	S	S	X		X
Execute As Admin	S	X	X		X

Deployment

	Suitelet	RESTlet	SSP Application		Scriptable Cart
			.SSP	.SS	
Deployment Model	One per script	One per script	One per folder		many per form or Record Type
Named URLs	X	X	S		X
Touch Points to override NS pages	X	X	S		X
Touch Points to Extended Apps	S	S	X		X
Bundleable	S	S	S		S
Debugger	S	S	X		S

SSP Applications (SuiteScript 1.0 Compared with SuiteScript 2.0)

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

You can write SSP applications in either SuiteScript 1.0 or 2.0, but you can't combine both versions in a single SSP application. Each SSP application can have scripts written in either SuiteScript 1.0 or 2.0. The SuiteScript version affects how SSP applications are created, installed, and deployed.

Note: Enabling SuiteScript 2.0 doesn't affect how SuiteScript 1.0 SSP applications work.

Here are the main differences between SSP applications written in SuiteScript 1.0 and 2.0:

- Different syntax is used in SuiteScript 2.0 and SuiteScript 1.0**– SuiteScript 2.0 scripts in SSP applications must start with this declaration:

```
<%@ NapiVersion="2.x"%>
```

This declaration ensures that the script uses the latest minor version of SuiteScript 2.0. You don't need a declaration in SuiteScript 1.0 scripts. For more information and examples, see [Sample SSP Application Code \(SuiteScript 2.0\)](#).

- **Explicit deployment required for SuiteScript 2.0 SSP applications**– to be accessible on a website or domain. Deploying to a website makes it available on all domains associated with the website. Deploying to a domain makes it available only there. For more information, see [Deploy and Undeploy SSP Applications](#).
- **Single SuiteScript 2.0 SSP application permitted per path** – if you have more than one with the same URL root, you can't deploy them to the same domain or website.
- **Touch points aren't supported for SuiteScript 2.0 SSP applications**– instead they use a default SSP file as a single entry point.

Currently, there aren't any NetSuite SSP application with a default application file, but you can create and use your own.

You'll be able to select a default SSP file for a domain or website in a future release. In 2018.2, you can use SuiteScript 2.0 SSP applications for:

- Backend processing, like logging.
- Website services you can access with a direct link to the URL root where it's deployed.

For more information, see [Select Default SSP File](#).

Create and Use SSP Applications

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

SSP applications contain .ssp files and .ss files, which can be written in either SuiteScript 1.0 or SuiteScript 2.0. However, you cannot have both SuiteScript 1.0 and SuiteScript 2.0 files in the same SSP application.

The components of the URL root of an SSP application are the same for applications written in SuiteScript 1.0 and SuiteScript 2.0. For more details, see the help topic [The URL Root and its Components](#).

However, the processes to create an SSP application record and deploy it to domains and websites are different. See [SuiteScript 1.0 SSP Applications](#) and [SuiteScript 2.0 SSP Applications](#) for more information.

Note: All SSP applications written in SuiteScript 1.0 are available without login. The ability to configure this option, which can be set in a check box on other NetSuite script records, is not currently available for the SSP Application record. This does not apply to SSP applications written in SuiteScript 2.0, which must be explicitly deployed to a site or domain before they are available.

The URL Root and its Components

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Every SSP application has an **application publisher** and an **application name**. The application name is the name of the folder where all SSP application assets are stored and is therefore also called the **SSP application folder**.

The application publisher is the creator of the SSP application. You can create multiple application publishers in your NetSuite account, but the names must be unique across all NetSuite accounts. The default application publisher setting is your NetSuite account name.

Note: If you want to use SuiteCloud Development Framework (SDF) to create or edit SSP applications, you must use the SuiteApp application ID as the application publisher name. For information about SuiteApp application IDs, see the help topic [SuiteApp Application ID](#).

The SSP application folder and its subfolders contain all the SSP application scripts, libraries, images, and other assets. Each SSP application in your NetSuite account has its own SSP application folder and the SSP Application folders are grouped according to their application publishers.

The **URL root**, or base URL, for an SSP application specifies the path that points to the location of SSP application assets. By default, the URL root includes the application publisher and application name. However, the base URL may include as many path components as desired. The ability to set the base URL yourself provides flexibility and readability.

Note: The URL root can include letters, digits, hyphens (-), and underscores (_). Any other characters are **forbidden** when setting the URL root.

NetSuite recommends that the base URL include at least one path component that distinguishes SSP application assets from other root assets in the domain. You must specify the URL root of the SSP application when you create the SSP application record.

Note: For Aconcagua and later releases of SuiteCommerce and SuiteCommerce Advanced, make sure the URL root for each SSP application is unique. Using the same URL root for multiple SSP applications can cause confusion about which SSP application is handling requests. If for some reason you do specify the same URL root for more than one SSP application, remember that precedence plays a role in determining which SSP application is used first. For more information, see [Change SSP Application Precedence](#).

For example, an SSP application named NextGenSite with an application publisher of SCA-NextGen, has the following default URL root: **/SCA-NextGen/NextGenSite/**. For testing purposes, you can access SSP application assets by navigating directly to the URL. For example, you can use the URL, **http://www.example.com/SCA-NextGen/NextGenSite/index.ssp**.

Note: You must have the SuiteScript permission to access SSP application records.

You can either create an application publisher and an application folder when you create the SSP application record or you can create them in advance from the Web Site Hosting Files Folder in the file cabinet. For information on how to view and add an:

- Application publisher – see [View and Add Application Publishers](#)
- Application folder – see [Create an SSP Application Folder](#)

View and Add Application Publishers

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

To view a list of application publishers, go to Setup > Company > Application Publishers (Admin).

To create a new application publisher

1. Go to Setup > Company > Application Publishers (Admin).
2. Click **New Application Publisher**.
3. Enter a **Name** for the application publisher.

Important: An application publisher must be unique across all NetSuite accounts. If you enter a name that is already in use, an error is displayed. Also, if you want to use SuiteCloud Development Framework (SDF) to create or edit SSP applications, you must use the SuiteApp application ID as the application publisher name. For information about SuiteApp application IDs, see the help topic [SuiteApp Application ID](#).

4. Click **Save**.

The application publisher appears as a component in the URL root that points to the SSP application and all its assets. The SSP application folder path includes a subfolder named for the application publisher and a subfolder with the application name. (The default can be edited.)

The SSP application folder path has a format like the following:

<HTML Hosting Root>: /SSP Applications/<Application Publisher>/<Application Name>

Create an SSP Application Folder

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

All of the SSP application scripts, libraries, images and other assets are contained in the SSP application folder and subfolders within the SSP application folder. A separate SSP application folder exists for each SSP application in your NetSuite account.

To create an SSP application folder:

1. If this is your first SSP application, you must create a new application folder:
 - a. To create an SSP application folder from the SSP application record, click the + sign next to the **Application Folder** dropdown.
 - b. To create an SSP application folder from the file cabinet, go to Web Site Hosting Files > Live Hosting Files > SSP Applications. Click **New SSP Application**.

Note: Create the SSP application folder in the hosting root that stores all the assets for your website. This can be the Live Hosting Files folder, the Staging Hosting Files folder, or a different folder that you create.

2. In the SSP Application Folder popup, select an **HTML Hosting Root**.
The list includes the folders in the Web Site Hosting Files folder in the file cabinet. (You can go to the file cabinet and create a new folder if necessary.)

3. Select an **Application Publisher**.

To create a new application publisher, click the + sign, enter the application publisher, and then click Save.

Note: An application publisher must be unique across all NetSuite accounts.

4. Enter an **Application Name**. The application name becomes the name of the folder where all SSP application assets are stored. By default, this application name is included in the base URL that is visible to web store users. This application name can be different from the name on the SSP Application record, but it is desirable to keep them consistent to avoid confusion.
5. Click **Save**.

Notice the path for the SSP application folder. It uses the following format:

<HTML Hosting Root>: /SSP Applications/<Application Publisher>/<Application Name>

SuiteScript 1.0 SSP Applications

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Note: The procedure for creating, installing, and linking an SSP application to your website differs based on whether the SSP application is written in SuiteScript 1.0 or SuiteScript 2.0. If you are using an SSP application written in SuiteScript 2.0, see [SuiteScript 2.0 SSP Applications](#).

For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

To build an SSP application:

1. Turn on the required features in NetSuite. For more information, see [Enable Required Features for SuiteScript 1.0 SSP Applications](#).

2. Write the SuiteScripts that will implement your web store customization, including .ssp files to render the UI and .ss files to handle requests. For examples of these file types, see [Sample SSP Application Code \(SuiteScript 1.0\)](#).
3. Create and assemble other assets needed for your SSP application.
4. Create an SSP Application record in NetSuite. See [Create a SuiteScript 1.0 SSP Application Record](#).
5. Upload your SuiteScripts and other required assets to the file cabinet folder listed in the SSP Application record. See [Upload SSP Application Files](#).
6. Edit the SSP Application record to define supported touch points where the SSP application will integrate with the web store. See, [Select Supported Touch Points](#).
7. Link the website to the SSP application in your NetSuite account. See [Link a Website or Domain to an SSP Application](#) and [Remove Touch Points](#).
8. If you are working with multiple SSP applications in a single account, determine which one should be executed first. See [Change SSP Application Precedence](#).

Debug and Bundle an SSP Application

After you have created an SSP application, you can:

- Debug your web store customization by running your SuiteScripts and reviewing entries in the Script Execution Log on the SSP Application record. See [Debug a SuiteScript 1.0 SSP Application](#). Note that use of the SuiteScript Debugger is not currently supported for SSP application scripts.
- Use SuiteBundler to package your web store customization for installation in another NetSuite account. See [Bundle an SSP Application](#).

Enable Required Features for SuiteScript 1.0 SSP Applications

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Before you can create, view, or link a website to an SSP Application record, the SuiteScript Server Pages feature must be enabled in your NetSuite account. Other features are also required. An account administrator or another user with the Enable Features permission can complete this setup.

Note: For more information on SuiteScript 1.0, see  [SuiteScript 1.0 Guide](#).

To enable required features for SSP applications:

1. Go to Setup > Company > Enable Features.
2. On the **SuiteCloud** subtab, check the boxes for **Client SuiteScript**, **Server SuiteScript**, and **SuiteScript Server Pages**, and agree to the Terms of Service for each feature.
3. On the **Web Presence** subtab, check the boxes for **Web Site** and **Host HTML Files**.
4. Click **Save**.

Create a SuiteScript 1.0 SSP Application Record

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

The SSP Application record stores details about your website customization. This record enables you to group website assets, debug script files, and package your customization for use in other NetSuite accounts. You can define the following properties on the SSP application record:

- The folder in the NetSuite file cabinet where your website customization assets are stored.
- Supported touch points.
- URL root used in website links to website assets.

 **Note:** For more information on SuiteScript 1.0, see  [SuiteScript 1.0 Guide](#).

To create an SSP application record:

1. Do one of the following:
 - Go to Customization > Scripting > SSP Applications > New.
 - Go to Commerce > Hosting > SSP Applications > New.
 - If at least one SSP Application folder already exists in your file cabinet, go to Commerce > Hosting > Website Hosting Files, select a website hosting folder, click New SSP Application, select an application publisher, and then continue on to create a new SSP Application record.
2. Enter a **Name** for the SSP application.
This name is like a project name, and is used in NetSuite lists, for example, on the SSP Applications list page, and in the Bundle Builder. This name is not directly visible to web store users.
3. (Optional) Enter an **ID**.
This identifier is used for scripting purposes, for the SSP Application record to be called by a SuiteScript. If you do not enter a value, a default is provided, webapp###. This value cannot be edited after the SSP Application record is saved.
4. Select the SuiteScript **Version** that has been used in the SSP application. This field is available only if you have enabled the ability to create SSP applications in SuiteScript 2.0.



Warning: You cannot change the version after you have saved the SSP application record.

5. Select an **Application Folder**. The list contains all SSP Application folders in the WebSite Hosting Files Folder. If you have enabled the ability to create SSP applications in SuiteScript 2.0, any application folders already assigned to SuiteScript 2 SSP applications are not displayed. Application folders that contain SuiteScript 2.0 scripts are also not displayed.
You can also create a new application folder. For more information, see [Create an SSP Application Folder](#).
6. Review the **URL Root** and edit as desired.
This is the base URL that is used to link to the SSP application from the web store and may be visible to web store users. See the help topic [The URL Root and its Components](#) for more information.
7. (Optional) Enter a **Description**.
This is a description of the SSP application. The description is only displayed internally in NetSuite.
8. Select a **Status**.
Leave as the default of Testing while you are creating and debugging your SSP application. Set to Released after you have completed the SSP application and linked it to your website.
9. (Optional) Select a **Log Level**.
The value in this field determines the type of messages written to the script execution log for the SSP application. See [Debug a SuiteScript 1.0 SSP Application](#).
10. (Optional) Select an **Owner**.

Sets the owner of the SSP application. Default is the currently logged in user. After an SSP application is created, only the owner of the SSP application can modify it. The owner is different from the application publisher, as the owner refers to the individual user who is allowed to modify the SSP application record.

11. Add library script files on the **Scripts** subtab.

These are external files that are called from the SSP application's script files.

- Files in the SuiteBundles, SuiteScripts, and Web Site Hosting Files folders of your file cabinet can be selected as library files.
- After you add a library file to an SSP application, it can be referenced by any of the .ss or .ssp files in the SSP application.

For more information, see [Upload SSP Application Files](#).

12. Select **Supported Touch Points**.

These are the pages where website visitors can interact with the SSP application. For more information, see [Select Supported Touch Points](#).

Upload SSP Application Files

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

After you have created an SSP application record, you can upload all of the scripts, images, and other assets for your web store customization to SSP application folder.

To upload assets to an SSP application folder:

1. Go to Commerce > Hosting > Website Hosting Files.
2. Select the Web Site Hosting Files folder you need, and then select the SSP Applications folder.
3. Select the application publisher, and then the SSP application folder you want to work with.
 - Create new folders as desired. For example, you might create subfolders in your SSP application folder for style sheets, images, javascript, and SuiteScript.
 - Add files as desired.
 - For more information about uploading files to the file cabinet, see the help topic [File Cabinet Overview](#).

Note: For SuiteScript developers, notice that you need to upload your .ssp and .ss files to your SSP Applications folder. You should not upload these files to the SuiteScript folder in the file cabinet.

Using the include Tag instead of Library Files

For .ssp files, NetSuite recommends that you use the **include** tag to reference scripts rather than listing them as library script files. Use one of the following formats:

```
1 | <%@include file="file"%>, or <%@include file="/path"%>
```

When the path begins with /, it is always relative to the root folder of the SSP application; otherwise it refers to a file in the same folder as the referring asset. You cannot use the **include** tag to reference files outside of the SSP application.

Set Execute as Role Permissions for .ss and .ssp Files

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Administrators and users with privileges to use SuiteScript can set permissions on .ssp and .ss file records associated with an SSP application. There are two types of permissions:

- Execute as Role permissions associate a role with the .ssp and .ss files. Regardless of the actual role of the user who triggers the scripts, the scripts run as if they were triggered by a person with the role specified in the Execute as Role list.
- It is possible to choose specific individuals who can trigger a script. It is also possible to be more generic, for example, all users in a specific department may have permission to trigger a script. Alternatively, all users could have permissions to trigger a script.

With enhanced permissions enabled, a script can be triggered by an action performed by the users you specify. This enhanced permission capability is useful for creating website customizations. For example, you can create a personalized user interface for customers on your website. A script can be triggered when a customer navigates to the script page on your shopping domain.

Execute as Role permissions cannot be granted for all records. For a list of supported records, see [Records that Support Execute as Role Permissions](#).

To set permissions on an .ssp or .ss file:

1. Go to a folder in an SSP application. For example, Web Site Hosting Files > Live Hosting Files > SSP Applications > My SSP Application > My Script Files.

i Note: Permissions can be applied only to SuiteScript files and SSP files within an SSP application folder.

2. Click **Edit** next to the .ssp or .ss file you want to modify.
3. Click the **Permissions** subtab.
4. Check the **Enable** box.
5. In the **Execute as Role** list, select the role with which the script should be executed. When the script is executed, the outcome is only limited by the permissions associated with the role you select here. The script has access to the same permissions as the role you select.

i Note: The Administrator role cannot be used.

6. Select individuals who can trigger the script to run:
 - a. (Optional) To allow all visitors to the web store to execute the SS or SSP script, check the **Run Script Without Login** box, or the **Roles Select All** box. If you want to select specific roles or other criteria, then clear these boxes.
 - b. (Optional) To give a specific audience permissions to execute the script, select who can execute the script from the following multi-select boxes:
 - Roles
 - Departments
 - Subsidiaries
 - Groups
 - Employees
 - Partners
7. Click **Save**.

When you configure permissions for an SSP or SS file, consider creating a custom role to use in the **Execute As Role** list. The custom role that you create should have exactly the privileges needed for your script to do what is intended, and nothing more. Typically, this script file permission capability is used for website customization.

Select Supported Touch Points

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

An SSP application can contain customizations for one or more web store touch points. After you have uploaded SSP application files to the file cabinet, you can select the supported touch points on the SSP Application record and link them with the URL of the .ssp files that contain the customizations for each touch point. You can define parameters for each URL.

After selecting supported touch points on the SSP application record, you link your site or domain to one or more of the supported touch points by defining them on site and domain records.

Supported touch points include the following:

- Log In
- Log Out
- Proceed to Checkout
- Register
- View Cart
- View Customer Center
- View Homepage

If you need to remove touch points from an SSP application or from a website, see [Remove Touch Points](#).

To select supported touch points on an SSP application:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **Edit** next to an SSP application.
3. Click the **Supported Touch Points** subtab.
4. Select each touch point in the **Name** column. The **Entry Page** column shows the URL that points to assets in the SSP application.

Scripts Supported Touch Points Execution Log History				
NAME *	ENTRY PAGE *	URL	PARAMETERS	
Proceed to Checkout	/NetSuite Inc. - Checkout 2.04.0/Reference Checkout/index.ssp	/index.ssp	is=checkout	
Register	/NetSuite Inc. - Checkout 2.04.0/Reference Checkout/index.ssp	/index.ssp	is=register	
Log In	/NetSuite Inc. - Checkout 2.04.0/Reference Checkout/index.ssp	/index.ssp	is=login	
View Cart	/NetSuite Inc. - Checkout 2.04.0/Reference Checkout/cart.ssp	/cart.ssp		

Note the following:

- When installing a reference implementation, supported touch points are displayed by default.
 - If you use the website preference, Password Protect Entire Site, then the Log In touch point must be associated with an .ssp file. Other file types, such as HTML will not display in the website when used in this context.
5. In the **Entry Page** field, enter or select the page to be inserted at the selected entry point.
 6. Enter any URL parameters to be used.

All available touch points are displayed in the list. Note that some SSP applications are not compatible with every touch point. For more information about touch points available for specific reference implementations, see the help topic [Set Up SCA Developer Tools](#).

After you have selected touch points for the SSP application, you can link the SSP application to your website. For more information, see [Link a Website or Domain to an SSP Application](#).

Link a Website or Domain to an SSP Application

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Your website is linked to an SSP application when touch points are defined on the Web Site Setup page. After linking the website to an SSP application a URL is generated that points to assets in the SSP application for each supported touch point. You can use all the touch points supported by an SSP application, or only some of them.

You can also link a domain to an SSP application. In this way, your website customization is associated with a specific domain. For more information, see [Link a Domain to an SSP Application](#).

Note: Touch points configured for a domain override the touch points configured for the related web site. However, if you are linking a domain to an SSP application, you must also define touch points on the web site record; domain-only touch point configuration is not supported.

To link your site to an SSP application:

1. Do one of the following:
 - Go to Customization > Scripting > SSP Applications > New.
 - Go to Commerce > Hosting > SSP Applications > New.
2. On the list page, click **Edit** next to the SSP application you want to use on your website.
3. Verify that some **Supported Touch Points** are selected. For more information, see [Select Supported Touch Points](#).
4. Click the arrow in the **Save** button. Choose **Save & Link to Site**.
5. Select a site on the **Link Site To SSP Application** page.

Note: You can only link an SSP application to a website that has the same hosting root as the SSP application. For example, if you created an SSP application in the Staging Hosting Files folder, then you cannot link that SSP application to a website in the Live hosting root.

6. Click **Save**.

The touch points selected on the SSP Application record are listed on the Touch Points subtab of the Web Site Setup page, indicating the SSP application is live on the website. Note that you must complete additional setup tasks when installing a reference implementation. For more information, see the help topic [Set Up SCA Developer Tools](#).

Important: You should first try linking your website to an SSP application in a sandbox account or another test site.

Link a Domain to an SSP Application

You can link a domain to supported touch points to create a unique web store experience for that domain. For example, you may want a certain look and feel for an entry point to your site using a certain domain.

To link a domain to an SSP application:

1. Follow Steps 1 – 4 in [Link a Website or Domain to an SSP Application](#).
2. Click **Save and Link to Domain**.
3. Select a domain on the **Link Domain To SSP Application** page.

Note: You can only select a domain that is pointing to the same hosting root as the SSP application. For example, you cannot deploy an SSP application created in the Staging Hosting files folder to a domain pointing to the Live Hosting Files folder.

4. Click **Save**.

Alternatively, you can click the Link to Domain button when the SSP application record is in view mode. To verify the domain is linked to the SSP application, visit the Domains subtab on the Web Site Setup page to confirm that you see the same supported touch points that exist on the SSP application.

See also, [Select Supported Touch Points](#), and [Remove Touch Points](#).

Remove Touch Points

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

You can remove touch points from the Web Site Setup page, from the Domains page, or from an SSP application record.

To remove touch points linked to a site:

1. Go to Commerce > Websites > Website List.
2. Click the **Touch Points** subtab.
3. Here, you can remove the touch point from the list.

To remove touch points linked to a domain:

1. Go to Commerce > Hosting > Domains.
2. Click the Edit link for the domain you want to modify on the list.
3. Click the **Touch Points** field.
4. Click the Touch Points Set button.
This opens the touch points in a new window.
5. Here, you can remove the touch point from the domain.

Note that removing a touch point from a website or domain does not delete the touch point from the SSP application record. You can use the same touch point later.

To remove a touch point from an SSP application record:

1. Go to Customization > Scripting > SSP Applications.
2. Click **Edit** next to the SSP Application you want to modify.
3. Click the **Supported Touch Points** subtab.
4. Here, you can remove the touch point from the list.

Note that removing a touch point from the SSP application also removes that touch point from the Web Site Setup page. A touch point must exist on an SSP application for it to be accessible from the Web Site Setup page.

Change SSP Application Precedence

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

SSP applications allow you to store multiple website customizations in one account, including customizations for the same web store touch point. When a URL refers to an asset in multiple SSP applications, a system of precedence determines which SSP application handles a particular request.

Precedence for SSP Application Assets

Each SSP application has a precedence sequence number, such as 1, 2, 3, 4, and so on. The lower the precedence number, the higher the application precedence. Files within an SSP application of higher precedence are used first.

By default, newer SSP applications take precedence over existing SSP applications when added to an account. However, you can change the precedence of any SSP application in NetSuite.

For example, you install an SSP application. Because this is the latest addition, it bears a precedence of 1 by default. Any files within this application take a higher precedence over files within SSP application folders with a precedence of 2, 3, 4, and so on. You can configure NetSuite to change this precedence at any time.

To change SSP Application precedence:

1. Go to Customization > Scripting > SSP Applications.
2. Click the **Change Precedence** button.

SSP Applications								
Change Precedence New SSP Application								
FILTERS								
☐ Show Inactives								
EDIT VIEW	PRECEDENCE	NAME	FROM BUNDLE	ID	URL ROOT	APPLICATION PUBLISHER	HOSTING ROOT	APPLICATION FOLDER
Edit View	1	Custom My Account 1.03.0	53049	webapp_ns_cust_myaccount_1_03_0	/myaccount-1-03-0	NetSuite Inc. - My Account 1.03.0	Live Hosting Files	Web Site Hosting Files : Live Hosting Files : SSP Applications : NetSuite Inc. - My Account 1.03.0 : Custom My Account
Edit View	2	Reference My Account 1.03.0	53049	webapp_ns_myaccount_1_03_0	/myaccount-1-03-0	NetSuite Inc. - My Account 1.03.0	Live Hosting Files	Web Site Hosting Files : Live Hosting Files : SSP Applications : NetSuite Inc. - My Account 1.03.0 : Reference My Account

3. Change numbers in the **Precedence** column as desired and click **Submit**.

Sample SSP Application Code (SuiteScript 1.0)

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

The following examples are intended to provide you with a basic idea of how .ssp and .ss files are structured.

- [Sample_Cart.ssp](#)
- [Cart_WithService.ssp](#)
- [UpdateQuantity.ss](#)
- [AddCartItem.ss](#)
- [AddCustomerAddress.ss](#)
- [Example .ss File Code that Accesses a NetSuite Record](#)
- [ItemOption.ss](#)

Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

Note: For code samples that integrate with PayPal Express and 3DSecure, see [Integration with Third-Party Checkout Providers](#).

Sample_Cart.ssp

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

The following code creates a very basic View Cart touchpoint:

```

1 <html>
2 <head><%=getPageFullHead()%>
3 <!--add css, js packages here -->
4 <link rel="stylesheet" type="text/css" href="/checkout/css/style2.css" >
5 <% var order = nlapiGetWebContainer().getShoppingSession().getOrder().getFieldValues({'items': ['name', 'salesdesc', 'quantity', 'rate', 'amount'], 'summary': ''});%>
6 <script type="text/javascript"> var nlShoppingOrder = <%=JSON.stringify(order)%>; </script>
7 <script type="text/javascript">
8     function createCartItemRow(nlCartItem, itemAttributes)
9     {
10         var row = document.createElement('tr');
11
12         for (var i = 0; i < itemAttributes.length; i++)
13         {
14             row.appendChild(createCartItemCell(nlCartItem[itemAttributes[i]]));
15         }
16
17         return row;
18     }
19     function createCartItemCell(nlCartItemAttr)
20     {
21         var cell = document.createElement('td');
22         cell.setAttribute('class', 'texttable');
23         var txtCell = document.createTextNode(nlCartItemAttr);
24         cell.appendChild(txtCell);
25         return cell;
26     }
27
28     function createCartTableHeader(headerItems)
29     {
30         var theader = document.createElement('thead');
31         theader.setAttribute('id', 'carttableheader');
32         for (var i = 0; i < headerItems.length; i++)
33         {
34             theader.appendChild(createCartHeaderCell(headerItems[i]));
35         }
36         return theader;
37     }
38     function createCartHeaderCell(nlCartHeaderItem)
39     {
40         var cell = document.createElement('th');
41         var txtCell = document.createTextNode(nlCartHeaderItem);
42         cell.appendChild(txtCell);
43         return cell;
44     }
45
46     function createShoppingCart()
47     {
48         var headerItems = ['Name', 'Description', 'Quantity', 'Rate', 'Amount'];
49         var itemAttributes = ['name', 'salesdesc', 'quantity', 'rate', 'amount'];
50         var shoppingCart = document.createElement('table');
51         shoppingCart.setAttribute('id', 'carttable');
52         shoppingCart.setAttribute('width', '100%');

```



```

53
54     var theader = createCartTableHeader(headerItems);
55     shoppingCart.appendChild(theader);
56
57     var tbody = document.createElement('tbody');
58
59     if (nlShoppingOrder && nlShoppingOrder.items)
60     {
61         for (var i = 0; i < nlShoppingOrder.items.length; i++)
62         {
63             tbody.appendChild(createCartItemRow(nlShoppingOrder.items[i], itemAttributes));
64         }
65     }
66
67     shoppingCart.appendChild(tbody);
68     document.getElementById('mainContents').appendChild(shoppingCart);
69 }
70
71 </script>
72 </head>
73 <body onLoad="createShoppingCart()">
74
75 <table cellpadding=0 cellspacing=0 border=0 width=100%><NLPAGE TOP></table>
76
77 <table>
78 <%=nlapiGetWebContainer().getPageGenerator().setSelectedTab(3);%>
79
80 <div id="mainContents"></div>
81
82 </table>
83 </body>
84 </html>

```

Cart_WithService.ssp

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

i Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

The following code creates a View Cart touchpoint that references an UpdateQuantity backend function. To work, this code requires the UpdateQuantity.ss file.

```

1 <html>
2 <head>
3     <%=getPageFullHead()%>
4     <script language="JavaScript">
5
6     var xmlhttp = new XMLHttpRequest();
7
8     /*
9     * Dynamically build out the cart header
10    */
11    function buildCartHeader()
12    {
13        var tHead = cartTable.createTHead();
14        var row, cell;
15
16        row = tHead.insertRow(-1);
17        tHead.setAttribute("bgColor", "lightskyblue");
18
19        cell = row.insertCell(-1);
20        cell.align = "center";
21        cell.style.fontWeight = "bold";
22        cell.innerHTML = 'Item';
23
24        cell = row.insertCell(-1);
25        cell.align = "center";
26        cell.style.fontWeight = "bold";
27        cell.innerHTML = 'QTY';

```

```

28     cell = row.insertCell(-1);
29     cell.align = "center";
30     cell.style.fontWeight = "bold";
31     cell.innerHTML = 'Rate';
32
33
34     cell = row.insertCell(-1);
35     cell.align = "center";
36     cell.style.fontWeight = "bold";
37     cell.innerHTML = 'Amount';
38 }
39
40 /*
41  * Dynamically build out the cart
42  */
43 function buildCartItems(items)
44 {
45     var row, cell;
46
47     // Insert table rows and cells into body
48     for (var i=0; i<items.length; i++)
49     {
50         row = cartBody.insertRow(-1);
51         cell = row.insertCell(-1);
52
53         cell.innerHTML = items[i].name;
54
55         cell = row.insertCell(-1);
56         cell.innerHTML = items[i].quantity;
57
58         cell = row.insertCell(-1);
59         cell.innerHTML = items[i].rate;
60
61         cell = row.insertCell(-1);
62         cell.innerHTML = items[i].amount;
63     }
64
65     // Set the background color of the table body.
66     cartBody.setAttribute("bgColor", "white");
67 }
68
69
70 /*
71  * Process result of AJAX call to update quantity
72  */
73 function handleServiceResponse()
74 {
75     if (xmlhttp.readyState == 4 && xmlhttp.status == 200)
76     {
77         // remove the cart contents
78         document.getElementById('cartBody').innerHTML = '';
79
80         // parse the JSON result into JavaScript objects,
81         // and rebuild the cart
82         var items = JSON.parse(xmlhttp.responseText);
83         buildCartItems(items);
84     }
85 }
86
87 /*
88  * AJAX call to NetSuite service
89  * Service updates the quantity on line 1
90  */
91 function updateQuantity()
92 {
93     xmlhttp.onreadystatechange=handleServiceResponse;
94
95     xmlhttp.open('POST', 'updateQuantity.ss', true);
96
97
98
99     xmlhttp.setRequestHeader('Content-type','application/x-www-form-urlencoded');
100

```

```

101     try
102     {
103         xmlhttp.send('quantity=' +
104
105 document.getElementById('quantity').value);
106     }
107     catch (ex)
108     {
109         alert(ex);
110     }
111 }
112
113 </script>
114 </head>
115 <body>
116
117 <table cellpadding=0 cellspacing=0 border=0 width=100%>
118     <%=getPageTop()%>
119 </table>
120
121 <button id="updateqty" type="button" onclick="updateQuantity();">Update
122
123 QTY(line1)</button>
124 <input id="quantity" type="text"/>
125
126 <br><br>
127
128
129 <table id="cartTable" border="1" bgcolor="lightslategray">
130     <tbody id="cartBody"></tbody>
131 </table>
132
133 <script language="JavaScript">
134 <%var order = nlapiGetWebContainer().getShoppingSession().getOrder();%>
135
136 //JSON.parse not used here since client script is generated similar to...
137 //    var items = '[{"itemid":"Urban Dining Table","onlinecustomerprice":"1686.26"}'
138 // Setting a variable explicitly equal to a JSON string automatically converts to
139
140 objects
141 var items = <%=JSON.stringify(order.getItems())%>
142
143 buildCartHeader();
144 buildCartItems(items);
145
146 </script>
147
148 </body>
149 </html>

```

UpdateQuantity.ss

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

i Note: For more information on SuiteScript 1.0, see  [SuiteScript 1.0 Guide](#).

The following code contains the backend function for updating quantity in the Cart_WithService .ssp file:

```

1 function service(request,response)
2 {
3     // get incoming http parameter
4     var quantity = request.getParameter('quantity');
5     nlapiLogExecution('DEBUG', 'quantity', quantity);
6
7     // get active order in web container
8     var order = nlapiGetWebContainer().getShoppingSession().getOrder();
9

```

```

10 // get the items out of the order
11 var items = order.items;
12
13 var orderItemId = items[0].orderid;
14 nlapiLogExecution('DEBUG', 'order item id - line 1', orderItemId);
15
16 var currentQuantityLine1 = items[0].quantity;
17 nlapiLogExecution('DEBUG', 'order curr qty - line 1', currentQuantityLine1);
18
19 var updatedItem = new Object();
20 updatedItem.orderitemid = orderItemId;
21 updatedItem.quantity = quantity;
22
23 order.updateItemQuantity(updatedItem);
24
25 var itemsJSON = JSON.stringify(order.getItems());
26
27 // send items back out as JSON,
28 response.setContentType('JSON');
29 response.writeLine(itemsJSON);
30 }

```

AddCartItem.ss

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

```

1 function service(request,response)
2 {
3   var itemid = request.getParameter('itemid');
4   var qty = request.getParameter('quantity');
5
6   // create a plain object for the item
7   var item = {internalid : itemid, quantity: qty}
8
9   // Get a reference to the shopping order
10  var order = nlapiGetWebContainer().getShoppingSession().getOrder();
11
12  // Add the item to cart
13  try
14  {
15    var returnval = order.addItem(item);
16
17    response.writeLine(JSON.stringify(returnval));
18  }
19  catch (e)
20  {
21    var e2 = nlapiCreateError(e);
22    // Do error handling here
23  }
24
25 }

```

AddCustomerAddress.ss

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

```

1 function service(request,response) {

```

```

2  /*var addressee = request.getParameter('addressee');
3  var addr1 = request.getParameter('addr1');
4  var city = request.getParameter('city');
5  var state = request.getParameter('state');
6  var zip = request.getParameter('zip');
7  var country = request.getParameter('country');
8  var phone = request.getParameter('phone');
9
10 var address = {
11   addressee : addressee,
12   addr1 : addr1,
13   city : city,
14   state : state,
15   zip : zip,
16   country : country,
17   phone : phone,
18   defaultshipping : 'T',
19   defaultbilling : 'T'
20 };*/
21
22 // Or the object string can be passed from the request header
23 var address = JSON.parse(request.getHeader('customerAddress'));
24
25 // Get a reference to the customer
26 var customer = nlapiGetWebContainer().getShoppingSession().getCustomer();
27
28 try
29 {
30   // Add the address
31   var status = customer.addAddress(address);
32
33   var result = customer.getFieldValues();
34
35   // return the customer data through response
36   response.writeLine(JSON.stringify(result.customer));
37 }
38 catch (e)
39 {
40   var e2 = nlapiCreateError(e);
41   // Do error handling here
42 }
43 }

```

Example .ss File Code that Accesses a NetSuite Record

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

i Note: For more information on SuiteScript 1.0, see  [SuiteScript 1.0 Guide](#).

Code like the following can be used in an .ss file to access a NetSuite record rather than a shopping session object.

```

1  function service(request,response)
2  {
3      var salesOrder = nlapiCreateRecord('salesorder', true);
4
5      salesOrder.setFieldValue('customform', 88); // Cash Sale form.
6      salesOrder.setFieldValue('orderstatus', 'B');
7      salesOrder.selectNewLineItem('item');
8      salesOrder.setCurrentLineItemValue('item', 'item', 6);
9      salesOrder.setCurrentLineItemValue('item', 'quantity', 1);
10     salesOrder.setCurrentLineItemValue('item', 'rate', 500);
11     salesOrder.commitLineItem('item');
12     nlapiSubmitRecord(salesOrder);
13 }

```



Important: Running an .ss file with code accessing a NetSuite record requires a preexisting NetSuite session. Running this code without first logging in to NetSuite results in permission errors. Running this type of code from the shopping domain also results permission errors, because shoppers are only recognized in the shopping domain.

ItemOption.ss

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder



Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

```

1  /*
2  http://www.mystore.com/test/itemOption.ss
3  */
4
5  function service(request,response)
6  {
7      try
8      {
9          var thesize = request.getParameter('size');
10         var msg = request.getParameter('msg');
11
12         if (thesize == null || msg == null)
13         {
14             throw "Parameters 'size' and 'msg' need to be included";
15         }
16
17         var order = nlapiGetWebContainer().getShoppingSession().getOrder();
18
19         var itemid = '74';
20         var qty = '8';
21         var optionMap = { 'custcol_size':'2', 'custcol_message':'FIRST MESSAGE' };
22         var itemMap = { 'internalid' : itemid, 'quantity': qty, 'options' : optionMap };
23         order.addItem(itemMap);
24
25         response.writeLine("Finished adding new item");
26         writeOrder(order);
27
28         var itemArray = order.getFieldValues(['items']).items;
29         response.writeLine("Number of order lines "+itemArray.length);
30
31         // Get the order item ID from the order
32         var theitemid = itemArray[0].orderid;
33         response.writeLine("The order item ID is "+theitemid);
34
35         // Now update the item options
36         var thesize = request.getParameter('size');
37         var msg = request.getParameter('msg');
38
39         optionMap = { 'custcol_size' : thesize, 'custcol_message':msg};
40         order.setItemOptions(theitemid, optionMap);
41         response.writeLine("Updated item option");
42         writeOrder(order);
43
44         /*
45         response.writeLine("Clearing the cart");
46         order.removeAllItems();
47         */
48     }
49     catch (ex) {
50         response.writeLine(ex);
51     }
52 }
53
54 }
55

```

```

56
57 function writeOrder(order)
58 {
59     var orderDetails = order.getFieldValues(['items']);
60     var orderItems = new Array();
61     for (var i = 0; i < orderDetails.items.length; i++)
62     {
63         var orderItem = {};
64         orderItem.internalid = orderDetails.items[i].internalid;
65         orderItem.orderitemid = orderDetails.items[i].orderitemid;
66         orderItem.quantity = orderDetails.items[i].quantity;
67         orderItem.rate = orderDetails.items[i].rate;
68         orderItem.amount = orderDetails.items[i].amount;
69         orderItem.name = orderDetails.items[i].name;
70         orderItem.options = orderDetails.items[i].options;
71         orderItems[i] = orderItem;
72     }
73     response.writeLine(JSON.stringify(orderItems));
74 }

```

Known Issue with Internet Explorer and Plain Text Content

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

If the content type for a file is set to text/plain in the HTTP header and the file name ends with .ssp or .ss extension (in the response header or URL), Internet Explorer might try to save the file instead of showing it inline.

This is a known issue with Internet Explorer 9 and might happen in earlier versions too. This issue doesn't happen with files that have HTML content instead of plain text.

Note: For more information on SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

To ensure that Internet Explorer shows the file contents inline, use `response.setContentType()` to rename the file with a .txt extension, like in this example:

```

1 function service(request, response)
2 {
3     response.setContentType('PLAINTEXT', 'my_SSP.txt', 'inline');
4     response.writeLine('hey');
5 }

```

Debug a SuiteScript 1.0 SSP Application

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Creating an SSP Application record lets you write debugging details to the script execution log when SSP application scripts run. You'll see these details on the Execution Log subtab of the SSP Application record.

Note: For more information about SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

Use the SuiteScript API `nlapiLogExecution(type, title, details)` to debug SSP applications written in SuiteScript 1.0. This API requires the following parameters:

- **type** {string} [required] - One of the following log types:
 - DEBUG (the default when Status is set to Testing)
 - AUDIT

- ERROR
- EMERGENCY
- *title* {string} [required] - A title used to organize log entries (max 99 characters). The *title* argument is required, so you can't set it to *null* or an empty string.
- *details* {string} [optional] - The log entry details (max 3999 characters)

For more details about this API, see the SuiteScript Help.

Note: Currently, you can't use the SuiteScript Debugger for SSP application scripts.

SuiteScript 2.0 SSP Applications

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Note: The procedure for creating, installing, and linking an SSP application to your website differs based on whether the SSP application is written in SuiteScript 1.0 or SuiteScript 2.0. If you are using an SSP application written in SuiteScript 1.0, see section [SuiteScript 1.0 SSP Applications](#).

To build a SuiteScript 2.0 SSP application:

1. Turn on the required features in NetSuite.
All features required for SuiteScript 1.0 SSP applications must be enabled before SuiteScript 2.0 SSP applications can be enabled. See [Enable Required Features for SuiteScript 1.0 SSP Applications](#).
2. Write the SuiteScripts that will implement your web store customization, including .ssp files to render the UI and .ss files to handle requests. For examples, see [Sample SSP Application Code \(SuiteScript 2.0\)](#).
3. Create and assemble other assets needed for your SSP application.
4. Create an SSP Application record in NetSuite. See [Create a SuiteScript 2.0 SSP Application Record](#).
5. Upload your SuiteScripts and other required assets to the file cabinet folder listed in the SSP Application record. See [Upload SSP Application Files to the File Cabinet](#).
6. On the SSP Application record, select the default SSP file that defines how the SSP application will integrate with the web store. See [Select Default SSP File](#).
7. Deploy the SSP application to a website or a domain in your NetSuite account. If you deploy to a website, the SSP application is available on all domains associated with that website. If you deploy to a domain, the SSP application is available only on that domain. If an SSP application already exists at your chosen URL root, you will need to undeploy the existing application before you can deploy the new application. See [Deploy and Undeploy SSP Applications](#).

Debug and Bundle an SSP Application

After you have created an SSP application, you can:

- Debug your web store customization by running your SuiteScripts and reviewing entries in the Script Execution Log on the SSP Application record. See [Debug a SuiteScript 2.0 SSP Application](#).
- Use SuiteBundler to package your web store customization for installation in another NetSuite account. See [Bundle an SSP Application](#).

Create a SuiteScript 2.0 SSP Application Record

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

The SSP Application record stores details about your website customization. This record lets you group website assets, debug script files, and package your customization for use in other NetSuite accounts. You can define the following properties on the SSP application record:

- The folder in the NetSuite file cabinet where your website assets are stored.
- Default SSP file
- The URL root used in website links to your assets.

To create a SuiteScript 2.0 SSP Application Record

1. Do one of the following:
 - Go to Customization > Scripting > SSP Applications > New.
 - Go to Commerce > Hosting > SSP Applications > New.
 - If at least one SSP Application folder already exists in your file cabinet, go to Commerce > Hosting > Website Hosting Files, select a website hosting folder, click New SSP Application, select an application publisher, and then continue on to create a new SSP Application record.
 2. Enter a **Name** for the SSP application.
This name is like a project name, and is used in NetSuite lists, for example, on the SSP Applications list page, and in the Bundle Builder. This name is not directly visible to web store users.
 3. (Optional) Enter an **ID**.
This identifier is used for scripting purposes, for the SSP Application record to be called by a SuiteScript. If you do not enter a value, a default is provided, webapp###. This value cannot be edited after the SSP Application record is saved.
 4. Select the SuiteScript **Version** that has been used in the SSP application.
-  **Warning:** You cannot change the version after you have saved the SSP application record.
5. Select an **Application Folder**. The list contains all SSP Application folders in the Web Site Hosting Files Folder that are not already assigned to other SSP applications. Application folders that contain SuiteScript 1.0 scripts are also not displayed.
You can also create a new application folder. For more information, see [Create an SSP Application Folder](#).
 6. Review the **URL Root** and edit as desired.
This is the base URL that is used to link to the SSP application from the web store and may be visible to web store users. See the help topic [The URL Root and its Components](#) for more information.
-  **Warning:** You cannot change the URL root after you have saved the SSP application record.
7. (Optional) Enter a **Description**.
This is a description of the SSP application. The description is only displayed internally in NetSuite.
 8. Select a **Status**.
Leave as the default of Testing while you are creating and debugging your SSP application. Set to Released after you have completed the SSP application and linked it to your website.

9. (Optional) Select a **Log Level**.

The value in this field determines the type of messages written to the script execution log for the SSP application. See [Debug a SuiteScript 1.0 SSP Application](#)

10. (Optional) Select an **Owner**.

Sets the owner of the SSP application. Default is the currently logged in user. After an SSP application is created, only the owner of the SSP application can modify it. The owner is different from the application publisher, as the owner refers to the individual user who is allowed to modify the SSP application record.

11. (Optional) Check **Available on System Domain** if you want the SSP application to be available on your system domain. System domains have the format `system.netsuite.com`.

12. (Optional) In the **Default SSP File** field, enter the first few letters of the default SSP file for the SSP application and then press the Tab key to locate the file you need. See [Select Default SSP File](#) for more information.

13. Click Save.

Upload SSP Application Files to the File Cabinet

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

After you have created an SSP application record, you can upload all of the scripts, images, and other assets for your web store customization to SSP application folder.

To upload assets to an SSP application folder:

1. Go to Commerce > Hosting > Website Hosting Files.
2. Select the Web Site Hosting Files folder you need, and then select the SSP Applications folder.
3. Select the application publisher, and then the SSP application folder you want to work with.
 - Create new folders as desired. For example, you might create subfolders in your SSP application folder for style sheets, images, javascript, and SuiteScript.
 - Add files as desired.
 - For more information about uploading files to the file cabinet, see the help topic [File Cabinet Overview](#).

Note: For SuiteScript developers, notice that you need to upload your .ssp and .ss files to your SSP Applications folder. You should not upload these files to the SuiteScript folder in the file cabinet.

Set Execute as Role Permissions for .ss and .ssp Files

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Administrators and users with privileges to use SuiteScript can set permissions on .ssp and .ss file records associated with an SSP application. There are two types of permissions:

- Execute as Role permissions associate a role with the .ssp and .ss files. Regardless of the actual role of the user who triggers the scripts, the scripts run as if they were triggered by a person with the role specified in the Execute as Role list.
- It is possible to choose specific individuals who can trigger a script. It is also possible to be more generic, for example, all users in a specific department may have permission to trigger a script. Alternatively, all users could have permissions to trigger a script.

With enhanced permissions enabled, a script can be triggered by an action performed by the users you specify. This enhanced permission capability is useful for creating website customizations. For example, you can create a personalized user interface for customers on your website. A script can be triggered when a customer navigates to the script page on your shopping domain.

Execute as Role permissions cannot be granted for all records. For a list of supported records, see [Records that Support Execute as Role Permissions](#).

To set permissions on an .ssp or .ss file:

1. Go to a folder in an SSP application. For example, Web Site Hosting Files > Live Hosting Files > SSP Applications > My SSP Application > My Script Files.

 **Note:** Permissions can be applied only to SuiteScript files and SSP files within an SSP application folder.

2. Click **Edit** next to the .ssp or .ss file you want to modify.
3. Click the **Permissions** subtab.
4. Check the **Enable** box.
5. In the **Execute as Role** list, select the role with which the script should be executed. When the script is executed, the outcome is only limited by the permissions associated with the role you select here. The script has access to the same permissions as the role you select.

 **Note:** The Administrator role cannot be used.

6. Select individuals who can trigger the script to run:
 - a. (Optional) To allow all visitors to the web store to execute the SS or SSP script, check the **Run Script Without Login** box, or the **Roles Select All** box. If you want to select specific roles or other criteria, then clear these boxes.
 - b. (Optional) To give a specific audience permissions to execute the script, select who can execute the script from the following multi-select boxes:
 - Roles
 - Departments
 - Subsidiaries
 - Groups
 - Employees
 - Partners
7. Click **Save**.

When you configure permissions for an SSP or SS file, consider creating a custom role to use in the **Execute As Role** list. The custom role that you create should have exactly the privileges needed for your script to do what is intended, and nothing more. Typically, this script file permission capability is used for website customization.

Select Default SSP File

 **Applies to:** SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

In SuiteScript 1.0 SSP applications, the logic of which customizations should be applied at which web store entry point is defined by specifying supported touch points in the SSP application record and by selecting touch points in the domain and website setup records. In SuiteScript 2.0 SSP applications, the default

SSP file contains this logic. Defining this in a single SSP file removes the need to specify supported touch points on the SSP application record and also removes the need to select touch points on the domain and website setup records. Instead, the default SSP file contains within itself the logic of which customizations should be used for each web store entry point and acts as a single touch point for the domain or website.

At present there are no NetSuite SSP applications that contain a default SSP file; however, you can develop and use your own.

You can also use SuiteScript 2.0 SSP applications to perform background services, such as logging. This type of background SSP application does not need a default SSP file because it is not triggered by a user visiting the website.

As of 2018.2, it is not possible to select a default SSP file for a domain or website. This ability will be available in a future release. This means that, at present, you cannot select a default SSP file to trigger automatically when a user visits the website or domain. If you want to use a SuiteScript 2.0 SSP application on a commerce website, you must provide a direct link to the URL root at which it is deployed. SSP applications that use SuiteScript 2.0 can also be used for backend processing, for example, logging.

To select the default SSP file for an SSP application:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **Edit** next to an SSP application.
3. In the **Default SSP File** field, enter the first few letters of the default SSP file for the SSP application and then press the Tab key to locate the file you need.
4. Save the SSP application record.

Make SSP Application available on System Domain

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

SuiteScript 2.0 SSP applications must be explicitly made available on websites and domains; unlike SuiteScript 1.0 SSP applications, they are not available by default.

To make an SSP Application available on your system domain:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **Edit** next to an SSP application.
3. Check **Available on System Domain**. System domains are those that have the format `system.netsuite.com`.
4. Save the SSP application record.

To learn how to deploy an SSP application record to one or more custom domains, see [Deploy and Undeploy SSP Applications](#).

Deploy and Undeploy SSP Applications

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

SuiteScript 2.0 SSP applications must be explicitly deployed to websites and domains; unlike SuiteScript 1.0 SSP applications, they are not available by default. You can deploy to a single domain, or you can deploy to all the domains on a website.

It is important to remember that only one SSP application can be deployed to one URL root per domain. If you want to deploy an SSP application to a URL root at which an SSP application is already deployed, you must first undeploy the existing application before you can deploy the new one.

To deploy an SSP application to a single domain:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **View** next to the SSP application.
3. Click **Deploy to Domain**.
4. Select the domain to which you want to deploy from the **Domain** list.
5. Click **Save**.

To deploy an SSP application to all custom domains associated with a website:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **View** next to the SSP application.
3. Click **Deploy to Site**.
4. From the:
 - **Deploy to Checkout Domain on Site** list - select the site to whose checkout domain you want to deploy the SSP application.
 - **Deploy to all Shopping Domains on Site** list - select the site to whose shopping domains you want to deploy the SSP application.

If you want to deploy the SSP application to the checkout domain of one site and the shopping domains of the other, you can select different site names from the lists. Alternatively, if you want to deploy to just the checkout domain or just shopping domains, select - **Do Not Deploy** - for the domain type to which you do not want to deploy.

5. Click **Save**.

To undeploy an SSP application:

1. Go to Commerce > Hosting > SSP Applications.
2. Click **View** next to the SSP application.
3. On the Deployments tab, click on one of the following subtabs
 - Site Shopping - if the SSP application is deployed to all shopping domains of the site.
 - Site Checkout - if the SSP application is deployed to the site checkout domain.
 - Domain - if the SSP application is deployed only to specific domains.
4. Click **Undeploy** next to the SSP application you want to undeploy.

Sample SSP Application Code (SuiteScript 2.0)

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

SuiteScript 2.0 SSP application files must start with this directive:

```
<%@ NApiVersion="2.x"%>
```

This directive ensures that the script always uses the latest minor version of SuiteScript 2.0. If this isn't the first directive in the .ssp file, it's treated as a SuiteScript 1.0 file and throws an error.

Note: You can't use @NScriptType annotation in .ss or .ssp files.

The simple Email Form example below gives you a basic idea of how .ssp and .ss files are structured for SSP applications written in SuiteScript 2.0. It has three files:

- **Entry point:** [Entry Point: emailSender.ssp](#)

- **Service:** `Service: emailService.ss`
- **Custom module:** `Custom Module: emailHandler.js`

Entry Point: emailSender.ssp

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

i Note: Before you run this script, you must replace the URL root and the domain with one specific to your account.

```

1  <%% NApiVersion="2.x" %>
2  <html>
3  <head>
4  <!--add css, js packages here -->
5  <style>
6      input::placeholder, textarea::placeholder {
7          font-size: 12px;
8      }
9
10     .formfield * {
11         vertical-align: middle;
12     }
13 </style>
14 </head>
15 <body>
16 <div>
17     <h2>Email Sender</h2>
18     <form action="/" method="POST" id="email-form">
19         <fieldset>
20             <legend>Mandatory fields</legend>
21             <p>
22                 <label for="recipients"><b>Email</b></label>
23                 <input type="email" placeholder="recipient1@example.com, recipient2@example.com,..." name="recipients" size="50" re
quired>
24             </p>
25             <p>
26                 <label for="subject"><b>Subject</b></label>
27                 <input type="text" placeholder="Subject..." name="subject" size="50" required>
28             </p>
29             <p class="formfield">
30                 <label for="body"><b>Body</b></label>
31                 <textarea placeholder="Email body..." name="body" rows="10" cols="70"></textarea>
32             </p>
33         </fieldset>
34         <fieldset>
35             <legend>Optional fields</legend>
36             <p>
37                 <label for="cc"><b>Cc</b></label>
38                 <input type="cc" placeholder="cc1@example.com, cc2@example.com,..." name="cc" size="50">
39             </p>
40             <p>
41                 <label for="bcc"><b>Bcc</b></label>
42                 <input type="bcc" placeholder="bcc1@example.com, bcc2@example.com,..." name="bcc" size="50">
43             </p>
44         </fieldset>
45         <p>
46             <input type="submit" id="send-email-button" value="Send Email">
47             <input type="submit" id="send-email-in-bulk-button" value="Send Email In Bulk">
48         </p>
49     </form>
50     <div id="service-response" hidden>
51 </div>
52 </div>
53
54 <script language="JavaScript">
55     const XHR = new XMLHttpRequest();
56     XHR.onload = handleServiceResponse;

```

```

57 | XHR.onerror = handleServiceError;
58 | var sendEmailButton = document.getElementById('send-email-button');
59 | var sendEmailInBulkButton = document.getElementById('send-email-in-bulk-button');
60 |
61 | var submitForm = function(event) {
62 |     event.preventDefault ? event.preventDefault() : (event.returnValue = false);
63 |     var form = document.getElementById("email-form");
64 |     sendData(form, this.value);
65 | };
66 |
67 | sendEmailButton.addEventListener('click', submitForm, false);
68 | sendEmailInBulkButton.addEventListener('click', submitForm, false);
69 |
70 | function sendData(form, submitter) {
71 |     var formData = new FormData(form);
72 |     formData.append("emailtype", submitter);
73 |     XHR.open("POST", "https://advanced.localhostloopback.com/test-v2/emailService.ss", true);
74 |     XHR.setRequestHeader("Content-Type", "application/json");
75 |     XHR.send(formDataToJson(formData));
76 | }
77 |
78 | function formDataToJson(formData) {
79 |     var jsonObject = {};
80 |     for (const [key, value] of formData.entries()) {
81 |         jsonObject[key] = value;
82 |     }
83 |     return JSON.stringify(jsonObject);
84 | }
85 |
86 | function handleServiceResponse() {
87 |     if (XHR.readyState == 4 && XHR.status == 200) {
88 |         try {
89 |             var response = JSON.parse(XHR.responseText);
90 |
91 |             if(response.error) {
92 |                 showServiceResponse(response.error);
93 |             }
94 |             else {
95 |                 showServiceResponse("Email has been sent!");
96 |             }
97 |         }
98 |         catch(e) {
99 |             showServiceResponse(e.name + ": " + e.message);
100 |         }
101 |     }
102 |     else {
103 |         showServiceResponse("Error: " + XHR.statusText + " : " + XHR.responseText);
104 |     }
105 | }
106 |
107 | function handleServiceError() {
108 |     showServiceResponse("Error: " + XHR.statusText + " : " + XHR.responseText);
109 | }
110 |
111 | function showServiceResponse(response) {
112 |     var responseElement = document.getElementById("service-response");
113 |     responseElement.innerHTML = response;
114 |     responseElement.style.display = "block";
115 |     responseElement.style.fontWeight = "bold";
116 | }
117 | </script>
118 |
119 | </body>
120 | </html>

```

Service: emailService.ss

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

1 | /**

```

2  * @NApiVersion 2.x
3  * emailService.ss
4  */
5  define(['./emailHandler.js', 'N/https'],function(emailHandler, https){
6      function service(context) {
7          if(context.request.method == https.Method.POST) {
8              var result = {};
9              var emailData = JSON.parse(context.request.body);
10             emailData.author = -5;
11             emailData.recipients = convertToArray(emailData.recipients);
12             emailData.cc = convertToArray(emailData.cc);
13             emailData.bcc = convertToArray(emailData.bcc);
14
15             try {
16                 switch(emailData.emailtype) {
17                     case "Send Email":
18                         result.response = emailHandler.sendSingleEmail(emailData);
19                         break;
20                     case "Send Email In Bulk":
21                         result.response = emailHandler.sendBulkEmail(emailData);
22                         break;
23                     default:
24                         throw {name: "NotImplementedError", message: "Unknown email type!"};
25                 }
26             }
27             catch(e) {
28                 result.error = e.name + ': ' + e.message;
29             }
30
31             context.response.write(JSON.stringify(result));
32         }
33     }
34
35     function convertToArray(input)
36     {
37         if(input) {
38             return input.replace(/\s/g,'').split(",");
39         }
40     }
41
42     return{
43         service : service
44     };
45 });

```

Custom Module: emailHandler.js

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

```

1  /**
2  * @NApiVersion 2.x
3  * emailHandler.js
4  */
5  define(['N/email'], function(email){
6      function sendSingleEmail(data){
7          return email.send(data);
8      }
9
10     function sendBulkEmail(data){
11         throw {name: "NotImplementedError", message: "Bulk email not implemented!"};
12     }
13
14     return{
15         sendSingleEmail : sendSingleEmail,
16         sendBulkEmail : sendBulkEmail
17     };
18 });

```


Debug a SuiteScript 2.0 SSP Application

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Creating an SSP Application record lets you write debugging details to the script execution log when SSP application scripts run. You'll see these details on the Execution Log subtab of the SSP Application record.

There are two ways to debug SSP applications written in SuiteScript 2.0:

- Using the N/log module
- Without loading the N/log module

Debug using the N/log Module

```

1 <%@APIVersion="2.x"%>
2 <%@ require path="N/log" alias="testLog"%>
3 <%
4     var x = 'value';
5     testLog.audit({
6         title: 'audit log',
7         details: 'value of x is: '+x
8     });
9     testLog.debug({
10        title: 'debug log',
11        details: 'value of x is: '+x
12    });
13    testLog.emergency({
14        title: 'emergency log',
15        details: 'value of x is: '+x
16    });
17    testLog.error({
18        title: 'error log',
19        details: 'value of x is: '+x
20    });
21 %>

```

Debug without Loading the N/log Module

```

1 <%@APIVersion="2.x"%>
2 <%
3     var x = 'value';
4     log.audit({
5         title: 'audit log',
6         details: 'value of x is: '+x
7     });
8     log.debug({
9         title: 'debug log',
10        details: 'value of x is: '+x
11    });
12    log.emergency({
13        title: 'emergency log',
14        details: 'value of x is: '+x
15    });
16    log.error({
17        title: 'error log',
18        details: 'value of x is: '+x
19    });
20 %>

```

Records that Support Execute as Role Permissions

i Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

The following table lists all NetSuite records that support Execute as Role permissions. This table has:

- record names
- supported operations (whether the record can be created, loaded, edited, and deleted searched)
- links to information on using the record in the UI

i Note: Records not included in this table may also support Execute as Role permissions, particularly for Read operations. However, such records have not been tested nor confirmed to work with Execute as Role permissions.

Record ID	Supported Operations	More Information
assemblyitem	Create, Read, Update, and Delete	Assembly Item
couponcode	Create, Read, Update, and Delete	Coupon Code
currency	Read	Currency
Custom Record	Create, Read, Update, and Delete	Custom Record
department	Create, Read, Update, and Delete	Department
descriptionitem	Create, Read, Update, and Delete	Description Item
discountitem	Create, Read, Update, and Delete	Discount Item
downloaditem	Create, Read, Update, and Delete	Download Item
giftcertificateitem	Create, Read, Update, and Delete	Gift Certificate Item
inventoryitem	Create, Read, Update, and Delete	Inventory Item
itemgroup	Create, Read, Update, and Delete	Item Group
location	Read	Location
kititem	Create, Read, Update, and Delete	Kit Item
lotnumberedinventoryitem	Create, Read, Update, and Delete	Lot Numbered Inventory Item
markupitem	Create, Read, Update, and Delete	Markup Item
nexus	Create, Read, Update, and Delete	Nexus
noninventoryitem	Create, Read, Update, and Delete	Non-Inventory Part
■ noninventorysaleitem ■ noninventoryresaleitem ■ noninventorypurchaseitem		
partner	Create, Read, Update, and Delete	Partner
partnercategory	Create, Read, Update, and Delete	Partner Category
paymentitem	Create, Read, Update, and Delete	Payment Item

paymentmethod	Create, Read, Update, and Delete	Payment Method
pricelevel	Create, Read, Update, and Delete	Price Level
promotioncode	Create, Read, Update, and Delete	Promotion
serializedinventoryitem	Create, Read, Update, and Delete	Serialized Inventory Item
serviceitem ■ servicesaleitem ■ serviceresaleitem ■ servicepurchaseitem	Create, Read, Update, and Delete	Service
shipitem	Read	Shipping Item
supportcase	Create, Read, Update, and Delete	Case
taxgroup	Create, Read, Update, and Delete	Tax Group
unitstype	Create, Read, Update, and Delete	Unit of Measure

For more information about Execute as Role permissions, see [Set Execute as Role Permissions for .ss and .ssp Files](#) (SuiteScript 1.0 SSP applications) and [Set Execute as Role Permissions for .ss and .ssp Files](#) (SuiteScript 2.0 SSP applications).

Integration with Third-Party Checkout Providers

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

Note: Integration with third-party checkout providers is not available for SSP applications written in SuiteScript 2.0. For more information about SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

To integrate with third-party checkout providers such as PayPal Express and 3D Secure, you'll need to create request handlers (.ss files) for them and call these handlers from your frontend page (.ssp file). The request handlers must use `proceedToCheckout()`, as documented in [ShoppingSession Methods](#). This method needs to pass `checkoutsettings` JSON object values as parameters. Note that you can only call from a secure (https) scheme. For more details, see:

- [Integrating with PayPal Express](#)
- [Integrating with 3D Secure \(SCA Elbrus and Earlier\)](#)

Warning: The help topic, [Integrating with 3D Secure \(SCA Elbrus and Earlier\)](#), applies to 3D Secure 1 only. Support for 3D Secure 1 ended on October 15, 2022. Relying on 3D Secure 1 for your Site Builder or SuiteCommerce Advanced web store is expected to result in more failed or declined payment card transactions. See the help topic [End of Support for 3D Secure 1](#) for more information, including information about migrating your website technologies from 3D Secure 1 to 3D Secure 2.

Integrating with PayPal Express

Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

To integrate SSP application checkout with PayPal Express, do the following for the View Cart and Proceed to Checkout touch points:

- Get the `checkoutsettings` JSON object by calling `nlapiGetWebContainer().getShoppingSession().getSiteSettings()`.
- Ensure that the `checkout.paypalexpress.available` field is set to T in the `checkoutsettings` object.
- Get the image URL for PayPal Express from the `checkout.paypalexpress.imageurl` field in the `checkoutsettings` object
- Add the PayPal Express Checkout button to your touch point .ssp file and provide a handler, in an .ss file, that calls the `proceedToCheckout()` method on the shopping session, to integrate with the PayPal Express checkout flow.

Values for `checkoutsettings` fields should be passed as parameters for this method. You can set values for the following fields to customize the default PayPal Express checkout flow:

- **type** – set to `paypalexpress`
- **cancelurl** – the URL of redirect page when Cancel link is clicked at PayPal site
- **continueurl** – the URL for redirect page when Continue link is clicked at PayPal site
- **createorder** – if value is set to T, Backend submits the current shopping order when Continue link is clicked; default is F

Besides the .ss file, integration with PayPal Express requires client-side code to display PayPal Express information in the user interface. For code examples, see the following:

- [Sample .ss File for PayPal Express Integration](#)
- [Sample for Displaying PayPal Express Information](#)

Note: Integration with third-party checkout providers is not available for SSP applications written in SuiteScript 2.0. For more information about SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

Sample .ss File for PayPal Express Integration

The following code is in a samplePaypalCheckout.ss file:

```

1 function service(request,response)
2 {
3     var returnval = null;
4
5     try
6     {
7
8         var shoppingSession = nlapiGetWebContainer().getShoppingSession();
9         var siteSetting = shoppingSession.getSiteSettings(['touchpoints']);
10
11         var viewcart = siteSetting.touchpoints.viewcart;
12         var homeurl = siteSetting.touchpoints.home;
13
14         var checkoutSetting = {type: 'paypalexpress', continueurl: homeurl, cancelurl : viewcart};
15
16         nlapiGetWebContainer().getShoppingSession().proceedToCheckout(checkoutSetting);
17     }
18     catch (e)
19     {
20         var nle = nlapiCreateError(e);
21         returnval = {status : 'error', reasoncode : nle.getCode(), message : nle.getDetails()};
22
23         response.writeLine(JSON.stringify(returnval));
24     }
25 }

```

Sample for Displaying PayPal Express Information

You can use the following code for PayPal Express integration. Note how the getAbsoluteURL(domain, path) method is used for the Shopping Session object. You'll need the absolute path to avoid errors with cross-domain links (links that go between shopping and checkout domains).

```

1 <table border=0>
2 <% var checkoutSettings = nlapiGetWebContainer().getShoppingSession().getSiteSettings(['checkout']);
3 var paypalUrl = nlapiGetWebContainer().getShoppingSession().getAbsoluteUrl("checkout", "samplePaypalCheckout.ss");
4 var proceedToCheckoutUrl = nlapiGetWebContainer().getShoppingSession().getAbsoluteUrl("checkout", "sampleCheckout.ss");
5 <tr>
6 <td>
7     <form name='checkoutform' action='<%=proceedToCheckoutUrl%>' method='post'>
8         <input type="submit" name="placeorder" id="placeorder" value="Proceed To Checkout" class="nlbutton"/>
9     </form>
10 </td>
11 <td> </td>
12 <td>
13     <form name='paypalform' action='<%=paypalUrl%>' method='post'>
14         <input type='image' src='<%=checkoutSettings.checkout.paypalexpress.imageurl%>' class="nlbutton"/>
15     </form>
16 </td>
17 </tr>
18 </table>

```

```

1 function service(request,response)
2 {

```

```

3      var returnUrl = null;
4
5      try
6      {
7
8          var shoppingSession = nlapiGetWebContainer().getShoppingSession();
9          var siteSetting = shoppingSession.getSiteSettings(['touchpoints']);
10
11         var viewcart = siteSetting.touchpoints.viewcart;
12         var homeurl = siteSetting.touchpoints.home;
13
14         var checkoutSetting = {type: 'paypalexpress', continueurl: homeurl, cancelurl : viewcart};
15
16         nlapiGetWebContainer().getShoppingSession().proceedToCheckout(checkoutSetting);
17     }
18     catch (e)
19     {
20         var nle = nlapiCreateError(e);
21         returnUrl = {status : 'error', reasoncode : nle.getCode(), message : nle.getDetails()};
22
23         response.writeLine(JSON.stringify(returnval));
24     }
25 }

```

Integrating with 3D Secure (SCA Elbrus and Earlier)

Applies to: SuiteCommerce Advanced

Warning: This topic is only for 3D Secure 1. Support for 3D Secure 1 ended on October 15, 2022. If you rely on 3D Secure 1 for your SuiteCommerce Advanced web store, you'll probably see more failed or declined payment card transactions. See the help topic [End of Support for 3D Secure 1](#) for more information, including information about migrating your website technologies from 3D Secure 1 to 3D Secure 2.

Sites running the Elbrus release of SuiteCommerce Advanced or earlier don't support 3D Secure. To add 3D Secure 1.0 to these versions, you'll need to either upgrade to the latest SCA release or follow the customization steps for the **Proceed to Checkout** touch point.

In an .ss file, call the submit method on the order shopping object, and pass these paymentauthorization object fields as [checkoutsettings](#) parameters:

- type – set to “threedsecure”.
- noredirect – Tells the platform to return a status object with the required 3D Secure fields instead of redirecting when 3D Secure authorization is needed (default is F).

Note the following:

- If noredirect is set to F [threedsecure](#) , the redirect goes to the default 3D Secure authorization page.
- If noredirect is set to T when 3D Secure authorization is needed, the submit method returns an error status with a reason code of ERR_WS_REQ_PAYMENT_AUTHORIZATION and values for the paymentauthorization JSON object. You can use these values to handle the 3D Secure integration .
- termurl – The URL for your client-side handler to process the 3D Secure callback and submit the order with the 3D Secure response.

Besides the .ss file, 3D Secure 1 integration needs client-side code to show 3D Secure information in the UI and handle orders. For code examples, see the following:

- [Sample .ss File for 3D Secure 1 Integration](#)
- [Sample for Adding 3D Secure 1 iFrame in User Interface](#)
- [Sample Client-Side Handler for 3D Secure 1 Order Submission](#)

- sampleShoppingLib.js
- sampleClientLib.js
- samplePaypalCheckout.ss

Note: Integration with third-party checkout providers is not available for SSP applications written in SuiteScript 2.0. For more information about SuiteScript 1.0, see [SuiteScript 1.0 Guide](#).

Sample .ss File for 3D Secure 1 Integration

```

1 function service(request, response)
2 {
3     var returnUrl = null;
4
5     try
6     {
7         var shoppingSession = nlapiGetWebContainer().getShoppingSession();
8
9         var shipMethod = shoppingSession.getOrder().getShippingMethod();
10
11         if (!shipMethod || !shipMethod.shipMethod)
12         {
13             var shipMethods = shoppingSession.getOrder().getAvailableShippingMethods();
14             nlapiLogExecution("DEBUG", "setShippingMethod", JSON.stringify(shipMethods));
15             shoppingSession.getOrder().setShippingMethod(shipMethods[0]);
16         }
17
18         var orderHandlerUrl = shoppingSession.getAbsoluteUrl('checkout', 'samplePlaceOrder.ss');
19         var orderSetting = {paymentauthorization:{type: 'threedsecure', noredirect : 'T', termurl : orderHandlerUrl}};
20         returnUrl = shoppingSession.getOrder().submit(orderSetting);
21     }
22     catch (e)
23     {
24         var nle = nlapiCreateError(e);
25         returnUrl = {status : 'error', reasoncode : nle.getCode(), message : nle.getDetails()};
26     }
27     response.writeLine(JSON.stringify(returnUrl));

```

Sample for Adding 3D Secure 1 iFrame in User Interface

```

1 <html>
2 <head><%=getPageFullHead()%>
3 <!--add css, js packages here -->
4 <link rel="stylesheet" type="text/css" href="css/style2.css" >
5 <script language='JavaScript' type='text/javascript'>
6 try {
7     if (window.parent != window && window.parent.document.getElementById('threeSecureFrame') != null) { window.parent.location.href
8         = window.location.href; }
9     } catch(e){ }
10 </script>
11 <script type="text/javascript" src="lib/sampleShoppingLib.js"></script>
12 <script type="text/javascript" src="lib/sampleClientLib.js"></script>
13 </head>
14 <body onLoad="loadShoppingCart();">
15 <table cellpadding=0 cellspacing=0 border=0 width=100%><NLPAGETOP></table>
16
17 <%nlpapiGetWebContainer().getPageGenerator().setSelectedTab(3);%>
18 <table width="100%">
19 <tr>
20 <td><div id="mainContents"></div></td>
21 </tr>
22 </table>
23 <table border=0>
24 <% var checkoutSettings = nlpapiGetWebContainer().getShoppingSession().getSiteSettings(['checkout']);
25 var paypalUrl = nlpapiGetWebContainer().getShoppingSession().getAbsoluteUrl("checkout", "samplePaypalCheckout.ss");

```

```

26 <tr>
27 <td>
28 <input type="submit" name="placeorder" id="placeorder" value="Submit" style="" class="nlbutton" onclick="placeOrder()">
29 </td>
30 <td>&nbsp;</td>
31 <td >
32 <form name='paypalform' action='<%=paypalUrl%>' method='post'>
33 <input type='image' src='<%=checkoutSettings.checkout.paypalexpress.imageUrl%>' class="nlbutton"/>
34 </form>
35 </a>
36 </td>
37 </tr>
38 </table>
39 <div id="paymentauthenticator"></div>
40 </body>
41 </html>

```

Sample Client-Side Handler for 3D Secure 1 Order Submission

```

1 function placeOrderCallBack(req)
2 {
3   var responseObj = JSON.parse(req.responseText);
4   if (responseObj.statuscode && responseObj.statuscode == "error")
5   {
6     // Order is not successful since payment authorization is required
7     if (responseObj.reasoncode && responseObj.reasoncode == "ERR_WS_REQ_PAYMENT_AUTHORIZATION")
8     {
9       if (responseObj.paymentauthorization)
10      {
11        // grab the frame html for threedsecure and inject it into the page. this will trigger the authorization flow
12        document.getElementById('paymentauthenticator').innerHTML = responseObj.paymentauthorization.servicehtml;
13        var placeOrderBtn = document.getElementById('placeorder');
14        if (placeOrderBtn)
15          placeOrderBtn.parentNode.removeChild(placeOrderBtn);
16        var paypalBtn = document.getElementById('paypalcheckout');
17        if (paypalBtn)
18          paypalBtn.parentNode.removeChild(paypalBtn);
19      }
20    }
21  }
22 }
23
24 }

```

```

1 function service(request,response)
2 {
3   var returnval = null;
4
5   try
6   {
7     var shoppingSession = nlapiGetWebContainer().getShoppingSession();
8     var orderHandlerUrl = shoppingSession.getAbsoluteUrl('checkout', 'samplePlaceOrder.ss');
9     var orderSetting = {paymentauthorization:{type: 'threedsecure', noredirect : 'T', termurl : orderHandlerUrl}};
10    returnval = shoppingSession.getOrder().submit(orderSetting);
11  }
12  catch (e)
13  {
14    var nle = nlapiCreateError(e);
15    returnval = {status : 'error', reasoncode : nle.getCode(), message : nle.getDetails()};
16  }
17  response.writeLine(JSON.stringify(returnval));
18 }

```

```

1 function placeOrderCallBack(req)
2 {
3   var responseObj = JSON.parse(req.responseText);
4   if (responseObj.statuscode && responseObj.statuscode == "error")
5   {

```



```

6 // Order is not success since payment authorization is required
7 if (responseObj.reasoncode && responseObj.reasoncode == "ERR_WS_REQ_PAYMENT_AUTHORIZATION")
8 {
9     if (responseObj.paymentauthorization)
10     {
11         // grab the frame html for threedsecure and inject it into the page. this will trigger the authorization flow
12         document.getElementById('paymentauthenticator').innerHTML = responseObj.paymentauthorization.servicehtml;
13         var placeOrderBtn = document.getElementById('placeorder');
14         if (placeOrderBtn)
15             placeOrderBtn.parentNode.removeChild(placeOrderBtn);
16         var paypalBtn = document.getElementById('paypalcheckout');
17         if (paypalBtn)
18             paypalBtn.parentNode.removeChild(paypalBtn);
19     }
20 }
21 }
22
23 }

```

sampleShoppingLib.js

```

1 function createCartItemRow(nlCartItem, itemAttributes)
2 {
3     var row = document.createElement('tr');
4
5     for (var i = 0; i < itemAttributes.length; i++)
6     {
7         row.appendChild(createCartItemCell(getCartItemAttributeText(itemAttributes[i], nlCartItem[itemAttributes[i]])));
8     }
9
10    return row;
11 }
12 function getCartItemAttributeText(attrName, attrValue)
13 {
14     if (attrName === 'options')
15     {
16         var attrText = '';
17         if (attrValue)
18         {
19             for (var i = 0; i < attrValue.length; i++)
20             {
21                 var itemOption = attrValue[i];
22                 attrText += itemOption.name + ':' + itemOption.displayvalue + '\n';
23             }
24         }
25         return attrText;
26     }
27     else
28         return attrValue;
29 }
30
31 function createCartItemCell(nlCartItemAttr)
32 {
33     var cell = document.createElement('td');
34     cell.setAttribute('class', 'texttable');
35     var txtCell = document.createTextNode(nlCartItemAttr);
36     cell.appendChild(txtCell);
37     return cell;
38 }
39
40 function createCartTableHeader(headerItems)
41 {
42     var theader = document.createElement('thead');
43     theader.setAttribute('id', 'carttableheader');
44     for (var i = 0; i < headerItems.length; i++)
45     {
46         theader.appendChild(createCartHeaderCell(headerItems[i]));
47     }
48     return theader;
49 }

```

```

50 function createCartHeaderCell(nlCartHeaderItem)
51 {
52     var cell = document.createElement('th');
53     var txtCell = document.createTextNode(nlCartHeaderItem);
54     cell.appendChild(txtCell);
55     return cell;
56 }
57
58 function createShoppingCart(nlShoppingOrder)
59 {
60     var headerItems = ['Name', 'Description', 'Options', 'Quantity', 'Rate', 'Amount'];
61     var itemAttributes = ['name', 'salesdesc', 'options', 'quantity', 'rate', 'amount'];
62     var shoppingCart = document.createElement('table');
63     shoppingCart.setAttribute('id', 'carttable');
64     shoppingCart.setAttribute('width', '100%');
65
66     var theader = createCartTableHeader(headerItems);
67     shoppingCart.appendChild(theader);
68
69     var tbody = document.createElement('tbody');
70
71     if (nlShoppingOrder && nlShoppingOrder.items)
72     {
73         for (var i = 0; i < nlShoppingOrder.items.length; i++)
74         {
75             tbody.appendChild(createCartItemRow(nlShoppingOrder.items[i], itemAttributes));
76         }
77     }
78
79     shoppingCart.appendChild(tbody);
80     document.getElementById('mainContents').appendChild(shoppingCart);
81 }
82
83 function loadShoppingCart() {
84     sendRequest('sampleGetOrderFields.ss', loadShoppingCartCallback);
85     sendRequest('sampleGetCheckoutUrl.ss', loadCheckoutSettingCallback);
86 }
87
88 function loadCheckoutSetting() {
89     sendRequest('sampleGetCheckoutUrl.ss', loadCheckoutSettingCallback);
90 }
91
92 function loadCheckoutSettingCallback(req) {
93     var checkoutSetting = JSON.parse(req.responseText);
94     var paypalBtn = document.getElementById('paypalcheckout');
95     if (paypalBtn)
96         paypalBtn.href = checkoutSetting.paypalexpress;
97 }
98
99 function loadShoppingCartCallback(req) {
100     //render the items table
101     var order = JSON.parse(req.responseText);
102     createShoppingCart(order);
103 }
104
105 function placeOrder()
106 {
107     sendRequest('samplePlaceOrder.ss', placeOrderCallBack);
108 }
109 function placeOrderCallBack(req)
110 {
111     var responseObj = JSON.parse(req.responseText);
112     if (responseObj.statuscode && responseObj.statuscode == "error")
113     {
114         // Order is not success since payment authorization is required
115         if (responseObj.reasoncode && responseObj.reasoncode == "ERR_WS_REQ_PAYMENT_AUTHORIZATION")
116         {
117             if (responseObj.paymentauthorization)
118             {
119                 // grab the frame html for threesecure and inject it into the page. this will trigger the authorization flow
120                 document.getElementById('paymentauthenticator').innerHTML = responseObj.paymentauthorization.servicehtml;
121                 var placeOrderBtn = document.getElementById('placeorder');
122                 if (placeOrderBtn)

```

```

123         placeOrderBtn.parentNode.removeChild(placeOrderBtn);
124         var paypalBtn = document.getElementById('paypalcheckout');
125         if (paypalBtn)
126             paypalBtn.parentNode.removeChild(paypalBtn);
127     }
128 }
129 }
130
131 }

```

sampleClientLib.js

```

1 function sendRequest(url, callback, postObjName, postData) {
2     var req = createXMLHTTPObject();
3     if (!req) return;
4     var method = (postData ? "POST" : "GET");
5     req.open(method, url, true);
6     req.setRequestHeader('User-Agent', 'XMLHTTP/1.0');
7     if (postData) {
8         req.setRequestHeader('Content-type', 'application/x-www-form-urlencoded');
9         req.setRequestHeader(postObjName, JSON.stringify(postData));
10    }
11    req.onreadystatechange = function () {
12        if (req.readyState != 4) return;
13        if (req.status != 200 && req.status != 304) {
14            // alert('HTTP error ' + req.status);
15            return;
16        }
17        callback(req);
18    }
19    if (req.readyState == 4) return;
20    req.send();
21    //req.send(postData);
22 }
23
24 var XMLHttpRequestFactories = [
25     function () {return new XMLHttpRequest();},
26     function () {return new ActiveXObject("Msxml2.XMLHTTP");},
27     function () {return new ActiveXObject("Msxml3.XMLHTTP");},
28     function () {return new ActiveXObject("Microsoft.XMLHTTP");}
29 ];
30
31 function createXMLHTTPObject() {
32     var xmlhttp = false;
33     for (var i=0; i<XMLHttpRequestFactories.length; i++) {
34         try {
35             xmlhttp = XMLHttpRequestFactories[i]();
36         }
37         catch (e) {
38             continue;
39         }
40         break;
41     }
42     return xmlhttp;
43 }

```

samplePaypalCheckout.ss

```

1 function service(request, response)
2 {
3     var returnval = null;
4
5     try
6     {
7
8         var shoppingSession = nlapiGetWebContainer().getShoppingSession();

```

```

9      var siteSetting = shoppingSession.getSiteSettings(['touchpoints']);
10
11      var viewcart = siteSetting.touchpoints.viewcart;
12      var homeurl = siteSetting.touchpoints.home;
13      var checkouturl = siteSetting.touchpoints.checkout;
14
15      var testUrl = shoppingSession.getAbsoluteUrl('/sampleGcoCheckout.ss');
16      var testUrl2 = shoppingSession.getAbsoluteUrl('lib/sampleShoppoingLib.js');
17
18      var paypalSetting = {type: 'paypalexpress', continueurl : checkouturl, cancelurl : viewcart};
19
20      nlapiGetWebContainer().getShoppingSession().proceedToCheckout(paypalSetting);
21  }
22  catch (e)
23  {
24      var nle = nlapiCreateError(e);
25      returnval = {status : 'error', reasoncode : nle.getCode(), message : nle.getDetails()};
26
27      response.writeLine(JSON.stringify(returnval));
28  }
29  }

```

Bundle an SSP Application

① Applies to: SuiteCommerce | SuiteCommerce Advanced | SuiteCommerce MyAccount | Site Builder

After you've created an SSP Application record and uploaded its assets to the file cabinet, you can use the Bundle Builder in NetSuite to package the SSP application into a SuiteApp for distribution to other NetSuite accounts. For more information about creating a bundle, see the help topic [Creating a Bundle with the Bundle Builder](#). If you don't want users in target accounts to edit SSP application files, you can lock the SSP application when you create the bundle.

Additional notes on bundling SSP applications:

- SSP applications are listed in Step 3 of the Bundle Builder, where you select objects to include in the bundle.
- When you select an SSP application here, the SSP Application record and all files in its file cabinet are included in the bundle.
- When the bundle is installed in a target account, the full SSP Application record is copied there. All files are also copied to an application folder in the target account's file cabinet:
<Default Target HTML Hosting Root>: /SSP Applications/<Application Publisher>/<Application Name>
- As of 2019.1, when you update a bundle with an SSP application, script deployments aren't updated in the target account. That means, existing touch points aren't overwritten and the Log Level and Status fields are also not updated. You can see the Log Level and Status fields on the Script Deployment page.