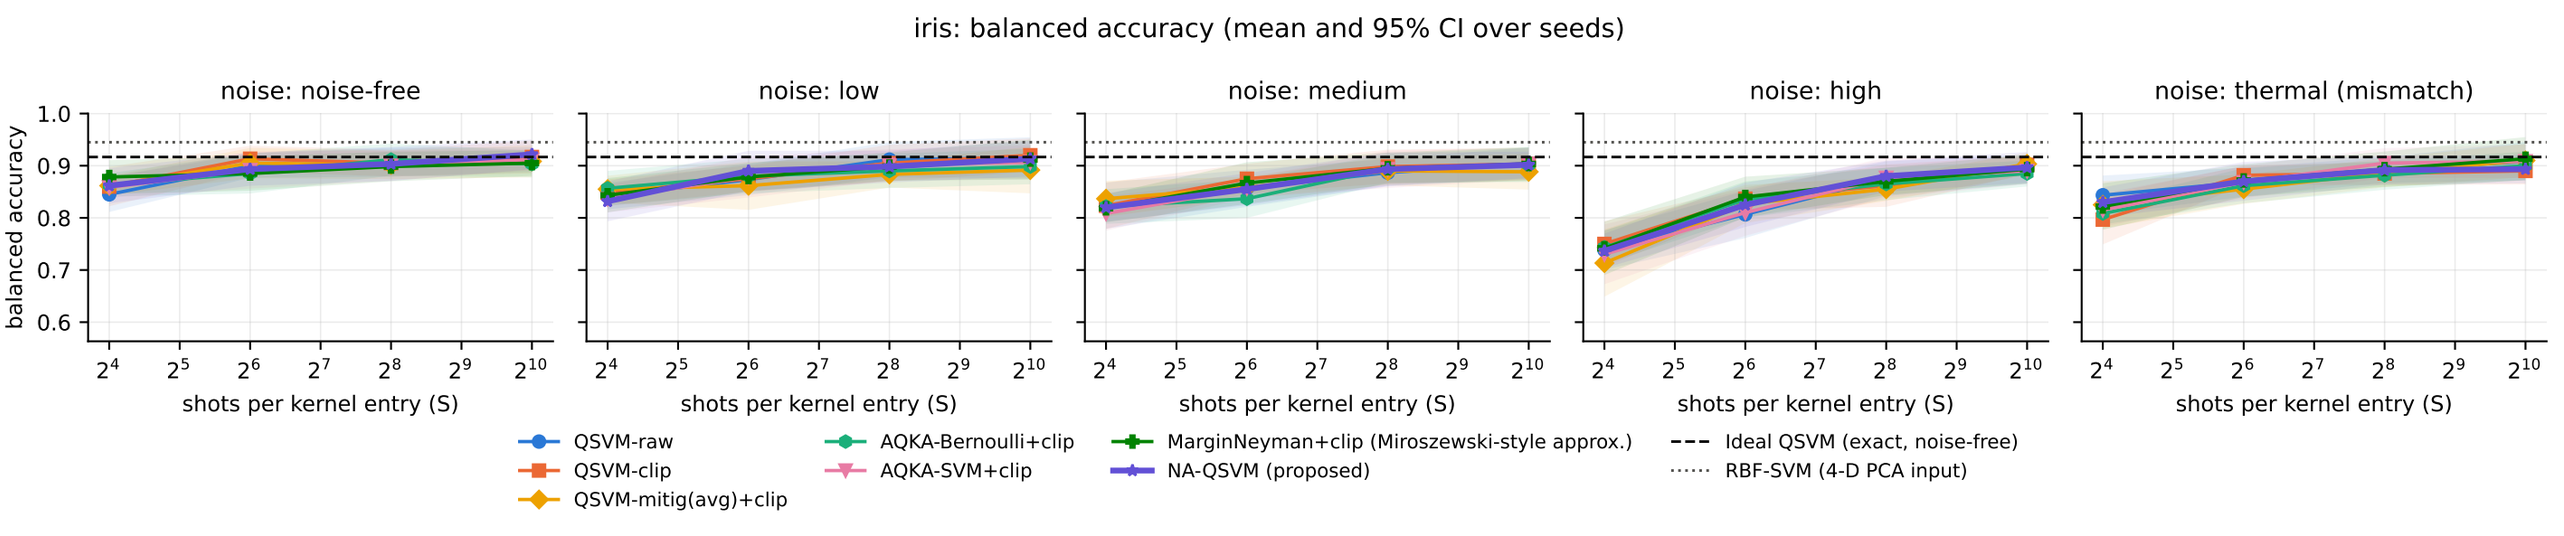
iris: balanced accuracy (mean and 95% CI over seeds)
noise: noise-free
noise: low
noise: medium
noise: high
noise: thermal (mismatch)
balanced accuracy
1.0
0.9
0.8
0.7
0.6
2^4 2^5 2^6 2^7 2^8 2^9 2^{10}
shots per kernel entry (S)
QSVM-raw
QSVM-clip
QSVM-mitig(avg)+clip
AQKA-Bernoulli+clip
AQKA-SVM+clip
MarginNeyman+clip (Miroszewski-style approx.)
NA-QSVM (proposed)
Ideal QSVM (exact, noise-free)
RBF-SVM (4-D PCA input)