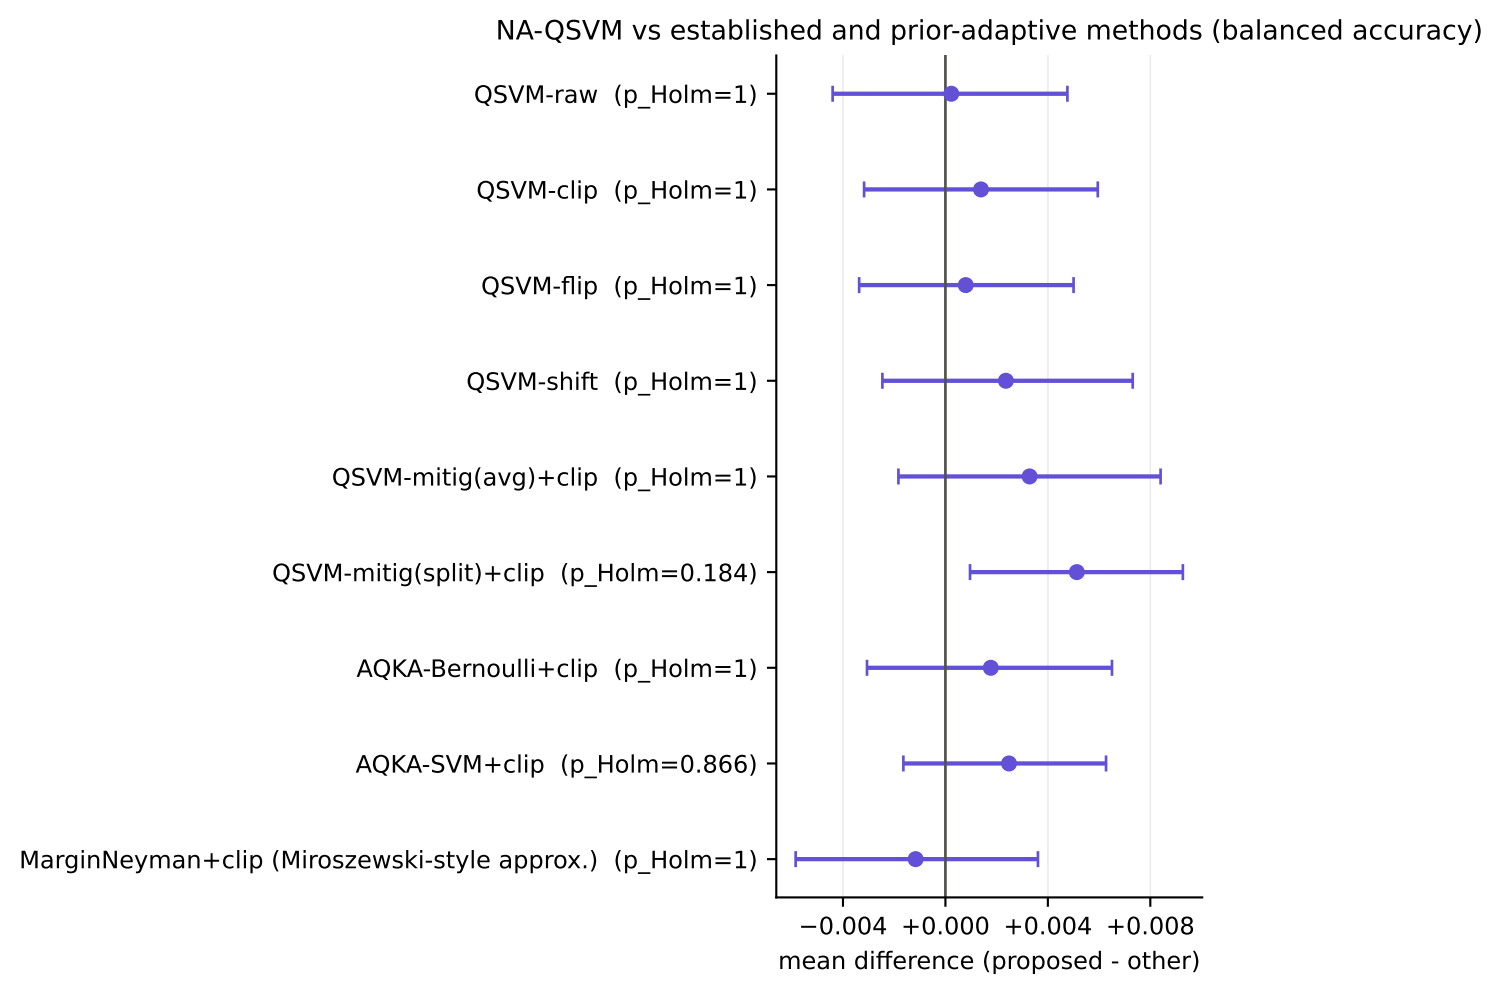
NA-QSVM vs established and prior-adaptive methods (balanced accuracy)
QSVM-raw (p_Holm=1)
QSVM-clip (p_Holm=1)
QSVM-flip (p_Holm=1)
QSVM-shift (p_Holm=1)
QSVM-mitig(avg)+clip (p_Holm=1)
QSVM-mitig(split)+clip (p_Holm=0.184)
AQKA-Bernoulli+clip (p_Holm=1)
AQKA-SVM+clip (p_Holm=0.866)
MarginNeyman+clip (Miroszewski-style approx.) (p_Holm=1)
−0.004
+0.000
+0.004
+0.008
mean difference (proposed - other)