



# AI-based mobile context-aware recommender systems from an information management perspective: Progress and directions

María del Carmen Rodríguez-Hernández <sup>a,\*</sup>, Sergio Ibarri <sup>b</sup>

<sup>a</sup> Aragon Institute of Technology (ITAINNOVA), María de Luna 7–8, 50018, Zaragoza, Spain

<sup>b</sup> I3A, University of Zaragoza, María de Luna 1, 50018, Zaragoza, Spain



## ARTICLE INFO

### Article history:

Received 14 April 2020

Received in revised form 29 December 2020

Accepted 1 January 2021

Available online 7 January 2021

### Keywords:

Context-Aware Recommender Systems

Mobile computing

Context-aware computing

Personalization

Information management

## ABSTRACT

In the Artificial Intelligence (AI) field, and particularly within the area of Machine Learning (ML), recommender systems have attracted significant research attention. These systems attempt to alleviate the increasing information overload that users can experience in the current Big Data era, by providing personalized recommendations of items that they may find relevant. Besides, given the importance of mobile computing, these systems have evolved to consider also the dynamic context of the mobile users (location, time, weather conditions, etc.) to offer them more appropriate suggestions and information while on the move.

In this paper, we provide an extensive survey of recent advances towards intelligent mobile Context-Aware Recommender Systems (mobile CARS) from an information management perspective, with an emphasis on mobile computing and AI techniques, along with an analysis of existing research gaps and future research directions. We focus on approaches that go beyond just considering the location of the user and exploit also other context information. In this study, we have identified that deep learning approaches are promising artificial intelligence models for mobile CARS. Additionally, in a near future, we expect a higher prominence of push-based recommendation solutions where at least part of the recommendation engine could be executed in the mobile devices, which could share data and tasks in a distributed way.

© 2021 Elsevier B.V. All rights reserved.

## 1. Introduction

Nowadays, the huge amount of information available may easily overwhelm users when they need to take a decision that involves choosing among a large set of options. For example, at the time of writing, a tourist who is visiting Madrid (Spain) could find more than 250 tourism apps for his/her mobile device when searching in Google Play [1]. *Recommender Systems* (RS) [2], that offer relevant items (articles, products, objects, or places) to the users, have been proposed as a potential solution to this problem. The main goal of these systems is to recommend certain items based on the (usually implicit) user preferences.

In the last decade of the 20th century, the use of these systems has increased in different application scenarios [3]. Recommender systems have been proposed to suggest a whole range of items, including books, music, movies, news, touristic destinations, friends in social networks, and others [2,4–6]. They are particularly popular in e-commerce [7,8], as providing relevant

recommendations to customers can help to improve their satisfaction and increase product sales; indeed, most major companies use RS within their services: for example, we can cite eBay [9,10], Facebook [11,12], Netflix [13,14], Amazon [15,16], Spotify [17,18], and Pandora [19], among others. On the other hand, they can also provide value-added to end users. So, in the new era of Big Data [20], given the continuous increase of the volume of information to which users are exposed, recommender systems are a very useful tool, able to learn from the behavior of users and discover their preferences.


Moreover, RS can be considered a key Artificial Intelligence (AI) and Information Management (IM) asset (see Fig. 1) that can bring benefits for both end users and companies. Indeed, according to a survey by 451 Research [21], predictive analytics and recommendations are the two most important types of Machine Learning (ML) technologies desired by current organizations. In the AI area, the term *recommender agent* has been used as a general term to refer to personalized search engines, intelligent software agents and recommender systems which assist users who help to find relevant information [22,23].

At an abstract level, recommender systems try to predict whether a given item will be appreciated by the user as relevant or not, and for this purpose a variety of AI techniques can be

\* Corresponding author.

E-mail addresses: [microdriguez@itainnova.es](mailto:microdriguez@itainnova.es)

(M. del Carmen Rodríguez-Hernández), [\(S. Ibarri\)](mailto:silarri@unizar.es).

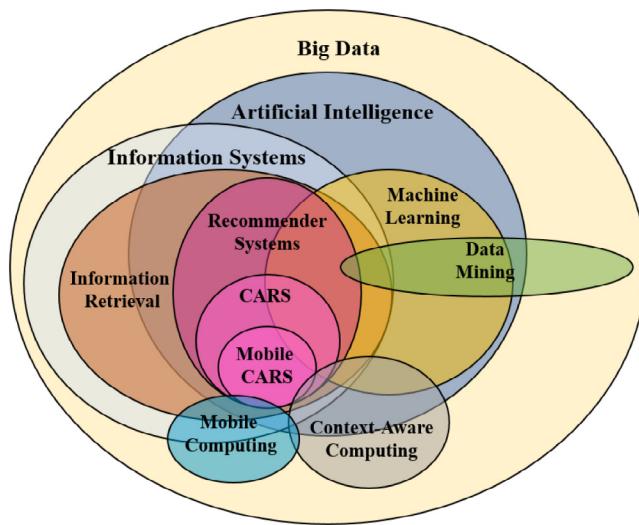

**Fig. 1.** Main fields related to this survey.

applied (classification, clustering, deep learning, regression, etc.). In this paper, we focus on recommender systems which are considered relevant for intelligent systems and use ML techniques to predict which items should be suggested to a user [24], analyzing those systems from an information management perspective (as systems that can help to reduce the information overload of users) and dealing with topics such as those observed in Fig. 2. In the figure, we include recommender systems within the global area of information systems and information retrieval, showing a significant overlap with artificial intelligence (machine learning and data mining), and also emphasizing the relation of some types of recommender systems with areas such as mobile computing and context-aware computing. The figure provides an overview of related fields, without detailing some subareas of the different fields; for example, within the area of information systems, cognitive information systems, such as those based on the idea of cognitive resonance, where hypothesis can be amplified or weakened during a semantic data analysis, could be mentioned [25]. Given its focus on machine learning techniques, this survey excludes papers on mobile CARS that exploit only pure statistical solutions (e.g., [26]), ontologies (e.g., [27]), or techniques from other fields such as spatial databases (e.g., [28]).

Moreover, our study is centered on recommender systems that are both context-aware and mobile:

- *Exploitation of context data.* Traditional recommender systems deal with applications having only two dimensions, users and items ( $User \times Item$ ), and do not consider contextual information (e.g., the location of the user, the time of the day, the day of the week, etc.) during the recommendation process. However, recent approaches have highlighted the importance of considering the context of the situation in which the recommendation process takes place, to offer more relevant and precise recommendations [29]. As a consequence, the integration of recommender systems and context-aware computing has given rise to the so-called *Context-Aware Recommender Systems (CARS)* [30–32].
- *Use in mobile scenarios.* As the context of a user in a mobile computing scenario is highly-dynamic (e.g., the location of the user and his/her surroundings usually change constantly), recommendation algorithms should be able to effectively and efficiently exploit the dynamic context of the user to offer him/her suitable recommendations and

keep them up-to-date. Hence, the combination of *context-aware recommendations* and *mobile computing* gives rise to the emergence of *mobile Context-Aware Recommender Systems (mobile CARS)* [33]. A particular case are the so-called *Location-Aware Recommender Systems (LARS)* [34], that consider only the context variable *location*.

How different authors integrate the contextual dimension into the traditional recommendation process for different application domains is explained in several surveys on CARS [35–39]. There are also a few studies that focus specifically on the mobile CARS field [33,40,41], but most of these surveys are more than 6 years old [33,40], and therefore they do not consider many recent relevant works that have been developed in the field. In addition, in [40] the authors have considered only CARS for vehicular ad hoc networks (VANETs) [42]. As far as we know, the most recent systematic review that provides an overview of CARS for mobile scenarios was presented in [41]. However, unlike our study, the authors do not focus on mobile CARS that apply AI techniques during the recommendation process, and they emphasize the aspects related to the context-aware field rather than those that are relevant in the mobile computing field; in fact, one of the main goals of that study was to identify and classify contextual information in categories, such as the location, social data, time, activity, and the multi-dimensional context. Instead, we propose a framework to analyze research in the field with an emphasis on mobile computing and AI techniques. Thus, our survey provides a relevant and complementary view over previous studies.

Due to the importance of CARS within the AI and IM areas, in this paper, we analyze and classify the most relevant literature of mobile CARS during the last 10 years (see Fig. 3, where key references are highlighted), considering approaches that take into account several context variables. Fig. 3 shows that some machine learning models have traditionally been exploited over the years, such as clustering techniques, while there are others whose use has become less prevalent (e.g., traditional supervised learning models). In recent years, these traditional techniques have started to be replaced by some advanced deep learning alternatives (e.g., Convolutional Neural Networks, Recurrent Neural Networks, etc.), which are currently being explored in the mobile CARS field.


The structure of the rest of this paper is as follows. In Section 2, we review the technological context of this survey. In Section 3, we describe the evolution of recommender systems from traditional recommender systems to mobile CARS. In Section 4, we provide an in-depth analysis of techniques applied for mobile context-aware recommendation approaches as well as examples of mobile CARS for specific use case scenarios. Finally, we conclude the paper with some open issues in Section 5.

## 2. Technological context


In this section, we introduce the technological context needed to facilitate the understanding of the problem of context-aware recommendations in mobile environments. First, in Section 2.1, we present the basics of mobile computing. Then, in Section 2.2, we focus on the role of sensors and present examples of applications that use sensors of mobile devices in dynamic environments. Finally, in Section 2.3, we describe the main features of context-aware computing as a specific paradigm within the mobile computing environment.

### 2.1. Mobile computing

The emergence of portable devices (e.g., smartphones, portable computers, tablets, smartwatches, etc.) and advances in wireless networking technologies gave rise to a new paradigm of

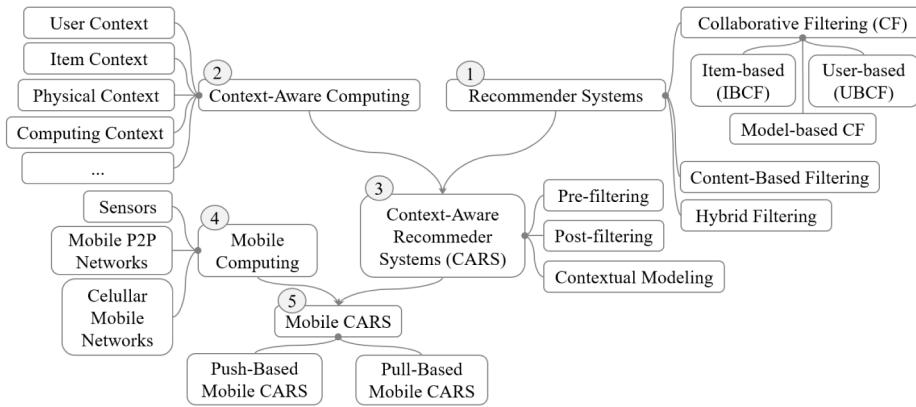

**Fig. 2.** Concept map showing the main mobile CARS topics covered and their relations.

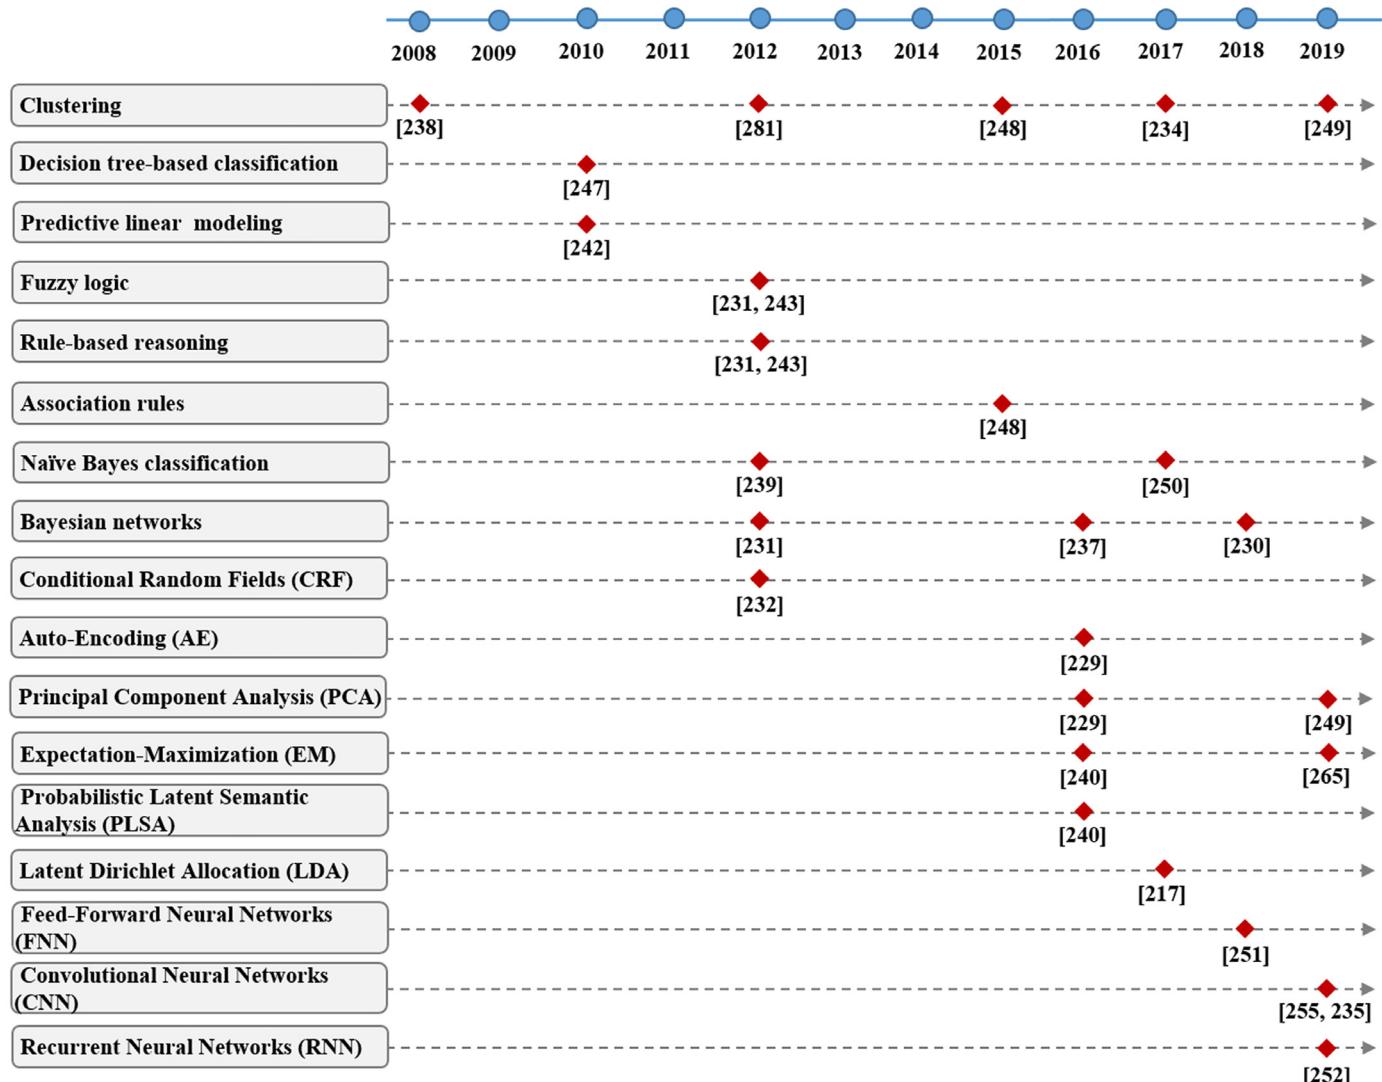

**Fig. 3.** Milestones in the development of mobile CARS that exploit artificial intelligence techniques.

computing, called *mobile computing*. In mobile computing, users with portable devices have access to a shared infrastructure independent of their physical location [43]. This provides flexible communication between people, as well as continuous access to data and network services *anywhere and at anytime*.

In Fig. 4, we show an overview of a mobile computing scenario, where we can see that there are alternatives for long-range communications (e.g., 3G, 4G, and 5G) [44–46], that require a wide-area infrastructure, and short-range communications (e.g., Wi-Fi and Bluetooth) [47,48]. A mobile environment infrastructure, represented in Fig. 4, is composed by portable devices and base

stations, which serve all the mobile devices within their coverage area or cell, by using wireless communications. The communication among base stations is wired; thus, base stations allow the communication between mobile devices and hosts of the fixed network. Moreover, mobile devices can directly interact without any supporting infrastructure through ad hoc P2P (peer-to-peer) interactions, by using technologies such as Wi-Fi or Bluetooth. In public places (e.g., coffee shops, hotels, airports, libraries, schools, supermarkets, etc.), there are hotspots that offer Internet access to the mobile devices, typically using Wi-Fi technology.

## 2.2. Sensors

A sensor is a device that converts a physical phenomenon of the environment into an electrical signal [49,50]. According to the way the data is captured, sensors can be classified into the following types [51,52]:

- *Physical or hardware sensors*: they provide certain raw data captured from the environment.
- *Virtual or software sensors*: they provide higher-level observations usually obtained by fusing the measurements of several sensors (e.g., a more precise location can be obtained by combining different positioning mechanisms) [53].
- *Social sensors*: they provide data based on social media, such as data posted in social networks (e.g., Facebook, Foursquare, and Flickr), blogs, or microblogs (e.g., Twitter) [54]; as an example, the proposal in [55] exploits microblogs to detect events in the vicinity.
- *Human sensors*: people can also provide interesting data using their own senses or managing other sensors in specific ways; so, they can provide *volunteered geographic information* (VGI) [56] or participate in *spatial crowdsourcing* [57,58] tasks.

Users with their mobile devices have become an important source of sensor data, as the sensors available in existing smartphones can be exploited [59–61]. These include inertial sensors, compasses, GPS receivers, microphones, cameras, proximity sensors, ambient light sensors, accelerometers, gyroscopes, temperature sensors, pressure sensors, and so forth. These sensors have facilitated the development of more flexible and dynamic systems in several domains, such as healthcare [62], social networks [63], environment monitoring [64], and transportation [65, 66]. In Fig. 5, we show examples of different types of sensors and contextual variables.

In recent years, the use of sensors is an essential element for context detection [52]. We mention below, for different types of context, the mechanisms or sensors typically used to capture the contextual information indicated [36,67]:

- *Computing context*. It describes hardware (e.g., storage, processing power of the CPU, amount of memory, current CPU and memory usage, battery level), software (e.g., operating system and active applications), and network characteristics (e.g., network connectivity, communication costs, and communication bandwidth) of the mobile device and nearby resources. It is captured implicitly by the device itself.
- *User context*. It describes the user's environment, including the location of the user, his/her social situation, the user's interests (or goals), and people nearby. The interests of the user can be obtained explicitly, for example, through a user registration process [68] or by using modules able to capture explicit interest indicators (e.g., a system can identify thematic groups by analyzing social annotations of each user's preferred resources) [69]. Implicit approaches obtain the user's context information based on interactions of the user with the system [70].

• *Location context*. It is the spatial location (e.g., latitude and longitude) of a person or object. In *outdoor scenarios*, it is often sensed by using positioning mechanisms (e.g., GPS) [71–75], while in *indoor scenarios* the positioning technologies commonly used are based on short-range signals (e.g., Bluetooth, Wi-Fi and infrared), or by using ZIP codes [76,77], trajectory data [78–80], and explicit methods that require scanning Radio Frequency Identification (RFID) tags [81–85], among others.

• *Social situation context*. It is the current relation between users (e.g., family members, friends, neighbors, co-workers, etc.). For example, this can be information about whether a user is with his/her manager, with a co-worker, or with a friend. The social situation can be explicitly captured from a manual representation of the group structure [86], or implicitly by capturing data from a system (e.g., enrollment data from learning management systems [87] or social networks [88]). To obtain indications of the level of collaboration between different members of a group, some systems infer the social relations by analyzing interactions between users [89].

• *Physical context*. It describes the environmental situation concerning the user or system; for example, the amount of lighting, traffic conditions, temperature, weather, and noise levels. It is typically acquired from the environment implicitly (e.g., with a thermometer sensor to determine the temperature of the environment, a light sensor to know if it is day or night, a microphone sensor to measure the noise level, etc.) [90], or captured explicitly by the user [91].

• *Time context*. It can be either entered explicitly by the user (e.g., available study time [91]) or determined implicitly by checking the device's internal clock (e.g., current time).


• *Activity context*. It is often achieved through mobile phone sensors (e.g., accelerometers, gravity sensors, magnetometers, microphones, and gyroscopes), without interfering with the user's lifestyle. Using these data, ML techniques can be applied to detect activities, such as the current activity that the user is performing (e.g., walking, running, driving a car, riding a bike, etc.). Some systems require explicit user interactions, such as scanning a QR (Quick Response) code [92] or providing manual text input [87], to obtain information about the activity context.

In Section 2.3, we revisit some concepts of context, determined by using these types of sensors, under the perspective of context-aware computing.


## 2.3. Context-aware computing

The interest of exploiting contextual information gave rise to the emergence of (mobile) context-aware computing as a paradigm within mobile computing [93,94]. Several perspectives on how mobile applications should consider the context have been presented in the literature [95–100]. Overall, the main goal of context-aware applications is to examine the user's context and react to the changes of the dynamic environment to discover information of interest [101].

In [102], the authors define the *context* as "any information that can be used to characterize the situation of an entity", where an entity could be "a person, place, or object that is considered relevant to the interaction between a user and an application, including the user and applications themselves". Other definitions of context have been introduced in the literature related to the context-aware computing field (e.g., [103,104]). The meaning of *context-aware* was defined in [102] by indicating that "a system is context-aware if it uses context to provide relevant information

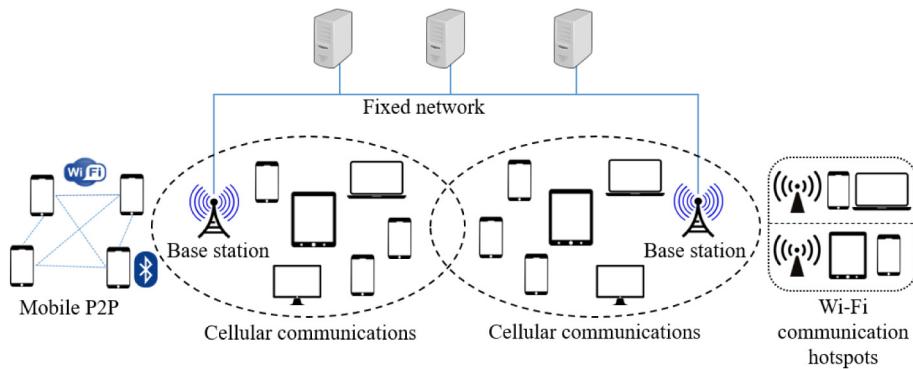

**Fig. 4.** Overview of a mobile computing scenario.

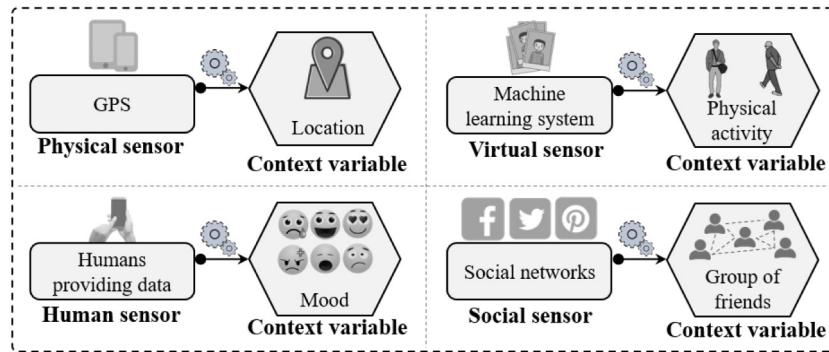

**Fig. 5.** Overview of different types of sensors and contextual variables.

and/or services to the user, where relevancy depends on the user's task".

Examples of elements defining the context could be the location, temperature, weather, noise level, activity, traffic conditions, lighting, time of the day, week, season of the year, network connectivity, nearby resources, communication bandwidth, and people accompanying the user, among others. There are certain types of context elements that, according to the circumstances, could be more important than others; for example, if it is raining a person could prefer to stay at home watching a movie rather than to go to run (i.e., the weather element in this case is more important than others). Sometimes authors classify the context by categories; for example, in Section 2.2 we showed some possible context categories. From the perspective of the source and the persistence of information, the context can be divided into two main types [29,105,106], which are:

- *Static context*, which does not change frequently. Examples are information regarding the address book, contact list, user profile, user preferences, hardware profile, etc.
- *Dynamic context*, which is highly variable. Examples of dynamic context features are the user's location, the user's current task, the closeness to other people or objects, the weather, the temperature, the speed, the time, the system status, the user's emotions, etc.

Context awareness represents a generalized model of relevant input data (both implicit and explicit) that allows an application to react to its environment. According to [29], the contextual information can be acquired in several ways, such as the following:

- *Explicit acquisition*: when the user enters contextual information directly into the system (through input fields of an application, by filling out a form or answering specific questions, etc.).

- *Implicit acquisition*: when the context is obtained by observing the user's behavior, relevant data, and/or the environment (e.g., the user's location detected by his/her mobile device).
- *Inferred acquisition*: when the system obtains context data using statistical or data mining methods.

Generally, the computing context is acquired implicitly by sensors embedded in mobile devices (see Section 2.2). In [90, 107, 108], surveys on context-aware systems, which highlight the different types of sensors used, are provided.


### 3. Towards mobile context-aware recommender systems

In this section, we describe the evolution of recommender systems. First, in Section 3.1, we present the basics of traditional recommender systems. Then, in Section 3.2, we focus on context-aware recommender systems. Finally, in Section 3.3, we tackle mobile context-aware recommender systems.

#### 3.1. Traditional recommender systems

A Recommender System (RS) is an application which suggests relevant items (e.g., articles, products, objects, or places) to users [4]. It tries to adapt its proposals to each user individually, based on his/her preferences. These recommendations can be seen as advice about relevant items that are considered of interest to a particular user. More formally, the task of recommendation can be formulated as indicated in Definition 1 [109].

**Definition 1.** Let  $U = \{u_1, u_2, \dots, u_k\}$  be the set of users and  $I = \{i_1, i_2, \dots, i_l\}$  the set of all possible items that can be recommended. Let  $f : U \times I \rightarrow R$  be a utility function that measures how useful item  $i$  is for user  $u$ , where  $R$  is a totally ordered set of utility values or ratings (e.g., non-negative integers

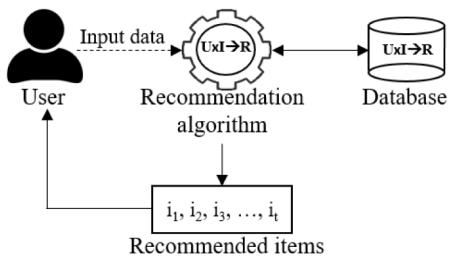

**Fig. 6.** Simplified overview of a recommendation process.

or real numbers within a certain range). Then, for each  $u \in U$  the goal of a recommender system is to find an item  $i_u^* \in I$ , not yet known to the user, that maximizes the utility function:

$$i_u^* = \operatorname{argmax}_i(u, i_{i \in I})$$

In Fig. 6, we show the main elements of a recommender system:

- The *input data* (e.g., the item type requested to the RS and information related to the user profile), which are entered (explicitly or implicitly) by the user to initialize the recommendation process.
- A *database*, which stores information about user and item profiles.
- The *recommendation algorithm*, which uses the input data and the database to suggest a list of items to the user (also known as target user, current user, or active user).

On the one hand, *user profiles* have information about the characteristics (e.g., age, sex, occupation, country, etc.) and preferences of the users (e.g., a value on a rating scale about an item seen, purchased, or visited). This profile information can be provided explicitly or implicitly by each user. In the explicit case, for example, the user is prompted to manually provide some profile information (e.g., the recommendation system asks the user to select some activities that he/she might like). In the implicit case, the preferences are obtained directly from the user's interaction with the system, without requiring his/her intervention. On the other hand, *item profiles* contain the features of items (products, places, or activities) to recommend (e.g., taxis, museums, restaurants, etc.), which are typically characterized by structured attributes (e.g., obtained from a catalog of products or provided by business owners), textual descriptions (e.g., extracted from external sources such as forums), and tags (e.g., generated by a user community), among other types of information that could describe the items. In Fig. 7, we show an example of basic information about the relationships between users and items in a restaurant recommender system. In this example, only binary ratings are shown (*like* or *not like*).

One of the fundamental tasks of a recommender system is thus the prediction of a rating: for a particular item not seen by the user, the system should be able to estimate how the user would evaluate it. If the predicted rating is above a predefined recommendation threshold, then the item can be recommended to the user. A list of suitable items to be recommended to a target user is usually sorted according to the ratings predicted by the system. Depending on how the recommendations are obtained, a recommender system can be classified usually in one of three categories [109]:


- *Collaborative filtering (CF) recommendations* [110,111]. It is the process of filtering information by using techniques involving the collaboration among several users, based on

their provided preferences (or ratings about items). Depending on the specific algorithm used, collaborative filtering methods can be classified into the following categories:

- *Memory-based collaborative filtering* [112]. It is one of the most popular collaborative recommendation techniques and it is based on algorithms to find the  $k$  nearest neighbors (kNN). For the prediction of new item ratings, this technique analyzes the entire *User × Item* matrix of ratings to identify users or items with patterns of similar ratings. In *user-based collaborative filtering (UBCF or user-user collaborative filtering)* [113], the user is recommended items that people with similar tastes and preferences liked. In *item-based collaborative filtering (IBCF or item-item collaborative filtering)* [114], the idea is similar, but based on the similarity between items instead of the similarity between users; in this case, the similarity between items is estimated based only on the ratings they receive (items with similar rating vectors are considered to be similar).
- *Model-based collaborative filtering* [112]. It applies machine learning or data mining techniques (e.g., Bayesian networks, linear classifiers, clustering, neural networks, association rules, etc.) to learn a model (or common patterns of behavior), by using available interaction information provided by the users to the system (i.e., the ratings provided by the users). The model learned is then used to generate the predictions about the missing interactions.
- *Content-based recommendation* [115,116]. It recommends to the user items similar to the ones the user preferred in the past. As opposed to the item-based collaborative filtering approach, the ratings provided by other users are not exploited; instead, the similarity between items is computed by taking into account their descriptions (i.e., their features or attributes). Sometimes, the information about the items is a textual description (or a document), which can be structured and exploited to provide content-based recommendations. In this scenario, text mining techniques, used in the *Information Retrieval (IR)* field [117–119], play an important role.
- *Hybrid recommendation* [120]. It combines several techniques, such as collaborative filtering and content-based methods. Most of the time, hybrid recommendation algorithms are motivated by the need to increase the quality of the recommendations and minimize the weaknesses of individual methods.

Overall, the use of recommender systems has been successful to alleviate the problem of information overload, increase the number of items sold, encourage sales of the most diverse and novel items, facilitate a better understanding of the user's needs, and increase the satisfaction and fidelity of the users [4,109]. However, there are still challenges and constraints that offer research opportunities, related to topics such as:

- The *cold start problem*, which occurs when a user or item is new for the recommender system [121–132].
- The incorporation of *contextual information* during the recommendation process [29,33,36,37,109,133].
- The *scalability* of recommendation algorithms, taking into account large real-world datasets [134–138]. An example of a potential solution to this problem is the exploitation of binary codes to represent users and items in a compact way while minimizing the quantization loss [139–142], to enable efficient and scalable recommendations.

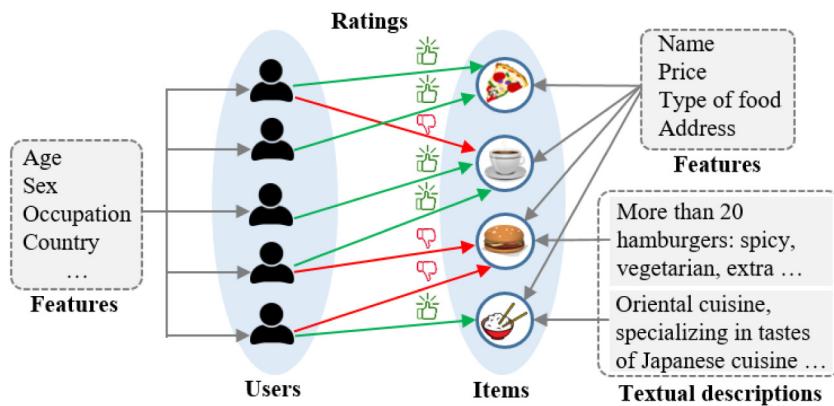

**Fig. 7.** Example of user and item profiles in a restaurant recommender system.

- The support of *multi-criteria ratings* [109,143–146]. For example, a user can evaluate a restaurant (e.g., on a scale of one to five) regarding different aspects or criteria (e.g., *rating\_food* = 3, *rating\_decoration* = 4, *rating\_service* = 5, and *rating\_price* = 4), rather than using a single criterion rating (e.g., *rating* = 4) like in traditional recommender systems.
- The *privacy-protection* between users in RS [144,147–151]. Recommender systems must be able to keep the personal information of the users private, including their preferences, as users should not be tracked against their will [152].
- The design of recommender systems that operate on *mobile devices* [153–161].
- The *proactive recommendation* of items without the need to generate explicit queries [162–167].
- The *diversity* of items recommended to a target user [168–172].
- The *serendipity* (or novelty and unexpectedness of items) in recommender systems [173–176].
- The application of strategies that deal with the *sparsity problem* that arises because the number of ratings provided by users is usually very small compared to the number of unknown ratings (and consequently the rating matrix is very sparse) [177–182].
- The use of *distributed architectures* (e.g., P2P networks) in recommender systems [183–188].
- Recommendations to *groups of users* with common interests [189–196].
- The delivery of *explanations*, that allow the user to know the reasons for the recommendations received. These explanations can be based on ratings of similar users, attributes that describe the items, or the use of conversational systems (e.g., questioning and answering techniques) [197–206]. Knowledge-based recommender systems can lead to useful explanations, which are often difficult to obtain with pure data-driven approaches based on statistics or subsymbolic AI techniques such as neural networks; as an example, motivated by this, Virtual Bartender [207] proposes a combination of data-driven and knowledge-based recommendations. A survey on the integration of symbolic and subsymbolic techniques for explainable artificial intelligence (XAI) appears in [208].

In-depth studies of some of these challenges can be found in [4–6].

### 3.2. Context-aware recommender systems

Most RS operate in a two-dimensional (2D) *User × Item* space. However, with advances in the fields of ubiquitous and mobile

computing, the lack of analysis of contextual information in recommender systems has been strongly criticized [29,109,209,210]. So, whereas researchers and developers had previously mainly focused on solving classic problems of recommender systems, such as the *cold start* problem [121–131], *high dimensionality* [211,212], *spam vulnerability* [213,214], and many others (see Section 3.1 for other challenges of traditional RS), researchers working on recommender systems have recently recognized the need to investigate them in domains where the contextual information is particularly relevant [32,215–217].

For example, considering only information about the users and items is not enough in applications such as the recommendation of vacation packages. In this case, it is important not only to determine which items should be recommended, but also when these recommendations should be provided and how to combine them in a ranked list. Moreover, traditional collaborative filtering techniques generally take into account all the collected ratings of the items to generate the recommendation models; these techniques assume that the context is homogeneous, but actually a user can assign different ratings to the same item in diverse contexts, as the relevance of a specific item may depend on the current context of the user. Therefore, additional contextual information (e.g., the time of the day, with whom the user is with, the weather conditions, what the user is doing, etc.) should be considered in the recommendation process. Examples like this one have motivated research on *Context-Aware Recommender Systems* (CARS) [30–32,38]. A pioneer proposal for CARS is the one by Adomavicius et al. [30–32]. To improve the recommendations based on contextual information, they extend the classical 2D paradigm to a multidimensional recommendation model that provides recommendations based on multiple dimensions: *User × Item × Context*. So, besides considering the information of users and items, CARS take into account context information, which is a set of contextual attributes  $C = \{c_1, c_2, \dots, c_q\}$ . In particular, those authors introduced three different context-aware recommendation paradigms:

- *Pre-filtering*, where the contextual information helps to filter the data before applying traditional recommendation algorithms.
- *Post-filtering*, where the contextual information is considered only in the final step of the process. So, contextual information is initially ignored and the ratings are predicted using any conventional 2D recommender system, taking all the potential items to recommend into account. Afterwards, the resulting set of recommendations is adjusted (contextualized) for each user by using contextual information.

- *Contextual modeling*, where the contextual information is used directly in the modeling technique as part of the estimation of ratings.

The pre-filtering and post-filtering methods consider the context as an additional filtering step that can be applied to any traditional recommendation algorithm, either to restrict its input (pre-filtering) or its output (post-filtering). On the other hand, contextual modeling recommender systems imply a radically different approach, as the contextual information directly affects the generation of the recommendation models.

In several studies, the pre-filtering, post-filtering and contextual modeling paradigms have been compared [133,218–221]. The experimental analysis provided in [133] shows that none of the considered context-aware recommendation paradigms dominates the others, considering their predictive performance and diversity measures. However, the performance was affected by several factors, such as the type of recommendation task (e.g., find all the relevant items or only the top-k items), the granularity of the context information, and the type of dataset (e.g., depending on features such as the existence of a high or low sparsity and the heterogeneity of data).

In certain occasions, the problems to be solved require the combination of several recommendation techniques. Hence, the combination of context-aware recommendation paradigms facilitates the emergence of new proposals. An example is the approach proposed in [30], which uses several pre-filtering models and combines their outputs. Another interesting hybridization could be to combine the pre-filtering and post-filtering paradigms [222]. For example, sometimes using the pre-filtering approach may be more useful for attributes such as the day of the week, while for context attributes like the weather the post-filtering approach might be more appropriate.

Many researchers apply AI techniques in the models they propose for the design of CARS. In Fig. 8, we show examples of artificial intelligence techniques applied for the development of context-aware recommendation approaches. We identified the use of these techniques only in the pre-filtering and contextual modeling paradigms. In post-filtering paradigms, traditional recommender systems are exploited and then the resulting item list is filtered or adjusted by using contextual constraints (e.g., filtering the items based on their distance from the user, and then adjusting the candidate list to solve conflicts). For example, in a scenario of recommendation of *points of interest* (POIs), the authors of [223,224] re-ordered the list of candidate items to recommend in such a way that the distance that the mobile user will need to traverse to access those items (e.g., museums, restaurants, etc.) is minimized. In the following, we will discuss in more detail the three paradigms separately.

### 3.2.1. Pre-filtering paradigm

In the *pre-filtering* approach, the contextual information helps to select the most relevant data ( $User \times Item$ ) for 2D recommendations. In Fig. 9, we show the general process of the pre-filtering paradigm. Firstly, the contextual information is used to filter out irrelevant ratings. Then, a traditional recommendation model based on contextualized data suggests appropriate items to the user.

The pre-filtering paradigm is also known as the *reduction-based approach*, as it reduces the problem of multidimensional contextual recommendations to the traditional 2D recommendation space [30]. For example, in a context-aware music recommender system, if a person enjoys listening to music while running and is at the moment practicing that activity, then the recommender system will only use rating data ( $User \times Item \rightarrow Rating$ ) related to the context *running*.

An advantage of this approach is that it supports all the 2D recommendation models proposed in the literature [109]. However, if it discards a large amount of data, then the model may not have enough data to generate reliable recommendations. Moreover, it would be interesting to enhance the pre-filtering paradigm with the incorporation of context hierarchies. For example, the context  $C = \{Girlfriend, Theater, Saturday\}$  could be generalized to  $C' = \{WithCompany, AnyPlace, AnyTime\}$ .

### 3.2.2. Post-filtering paradigm

The basic idea of the post-filtering approach is to consider the context as an additional constraint to verify a posteriori. As shown in Fig. 10, this paradigm does not take into account the contextual information in the initial data input of the 2D recommendation model. Only the ranked list of candidate items (obtained by using a traditional 2D recommendation model) will be adjusted with the contextual information. This adjustment can be performed in two ways [29]:

- *Filtering* (or selecting) the most relevant items in a given context. In a context-aware book recommender system, an example of item filtering would be the following: if a person usually reads science books over the weekend, the system may remove non-science books from the candidate list of books to recommend during that period.
- *Adjusting the ranking* of the list retrieved based on a given context. Following with the same scenario, if a ranking adjustment strategy is applied instead, books with more stars (i.e., better valued) written by the authors preferred by the user in that specific context could have a higher value in the ranked list.

In the filtering adjustment, if there are very few contexts similar to the one of the current user, then many items from the candidate list to recommend could be eliminated (even all the items, in the worst case). In the case of ranking adjustment, if there are no similar contexts, then an approach equivalent to a traditional recommendation would be applied.

Moreover, the contextual post-filtering approaches (for both forms of adjustment) can be classified into the following types [29]:

- *Heuristic* post-filtering approaches, which try to find the common item features for a user in a given context, and then use these features to adjust the list of recommendations.
- *Model-based* post-filtering approaches, which build models to predict the probability that the user will prefer an item type in a given context (e.g., likelihood of choosing books of a certain literary genre), and then use this probability to adjust the list of recommendations.




Like in the case of pre-filtering, a relevant advantage of the post-filtering paradigm is the ability to use any traditional recommendation model. In addition, similarly to the pre-filtering approaches, incorporating the ability to manage context generalization models (context hierarchies) into the post-filtering paradigm would be an interesting enhancement.

### 3.2.3. Contextual modeling paradigm

In the contextual modeling approach, the contextual information is used directly in the recommendation model. For this purpose, multidimensional (MD) predictive models (e.g., a probabilistic model, decision tree, etc.) or heuristics that incorporate a context dimension in the user and item data are applied (see Fig. 11). This contextual approach assumes that context attributes are appropriate features to learn a recommendation model.

In this paradigm, traditional 2D recommendation algorithms cannot be used directly (unlike in the case of the pre-filtering

<b>Pre-filtering</b>	<b>Probabilistic Classification</b> <ul style="list-style-type: none"><li>• Bayesian Networks</li></ul> <b>Statistical</b> <ul style="list-style-type: none"><li>• Principal Component Analysis</li></ul>	<b>Clustering</b> <ul style="list-style-type: none"><li>• k-means</li></ul> <b>Tree-based Classification</b> <ul style="list-style-type: none"><li>• Decision Tree</li></ul>
<b>Contextual Modeling</b>	<b>Statistical</b> <ul style="list-style-type: none"><li>• Probabilistic Latent Semantic Analysis</li><li>• Principal Component Analysis</li><li>• Latent Dirichlet Allocation</li><li>• Expectation-Maximization</li></ul> <b>Sequential classification</b> <ul style="list-style-type: none"><li>• Conditional Random Fields</li></ul> <b>Reasoning</b> <ul style="list-style-type: none"><li>• Fuzzy logic</li><li>• Rules</li></ul> <b>Clustering</b> <ul style="list-style-type: none"><li>• k-means</li><li>• Canopy</li></ul>	<b>Rule-based classification</b> <ul style="list-style-type: none"><li>• Association Rules</li></ul> <b>Probabilistic Classification</b> <ul style="list-style-type: none"><li>• Naïve Bayes</li><li>• Bayesian Networks</li></ul> <b>Neuronal Networks</b> <ul style="list-style-type: none"><li>• Convolutional Neural Networks</li><li>• Auto-Encoders</li><li>• Feed-Forward Neural Networks</li><li>• Recurrent Neural Networks</li></ul>
		<b>Fig. 8.</b> Examples of artificial intelligence techniques applied in contextual recommendation paradigms.

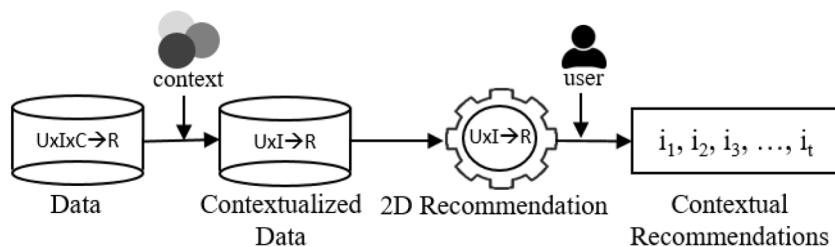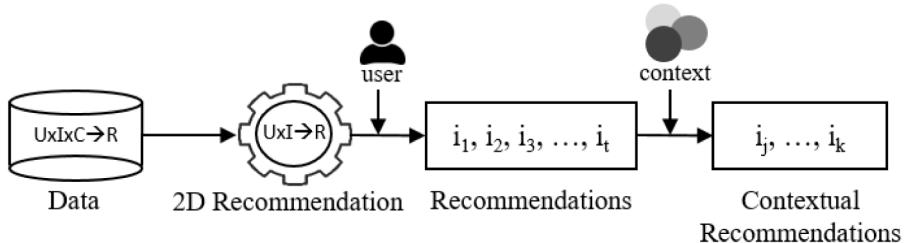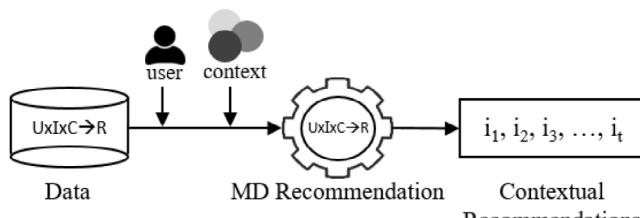**Fig. 9.** Pre-filtering paradigm.**Fig. 10.** Post-filtering paradigm.**Fig. 11.** Contextual modeling paradigm.

and post-filtering paradigms). However, these can be modified (or extended) with the purpose of incorporating the context dimension in the rating estimation. For example, a traditional

neighborhood-based recommendation approach [225] was extended to the multidimensional case in [30].

### 3.3. Context-aware recommender systems in mobile environments

Some context-aware recommendation architectures have been proposed in the literature [226–228]. However, these architectures are not designed with mobile users in mind, where the context and the movements of the users may be important factors to consider when deciding which items should be recommended. This problem is indeed now a future research direction.

Moreover, the widespread availability of mobile devices, such as smartphones and portable computers, implies that the relevance of mobile computing scenarios is nowadays undeniable. This, in turn, demands new approaches for the development of recommender systems that can handle and effectively exploit the

data available in those environments. Hence, the combination of *context-aware recommendations* and *mobile computing* gives rise to the emergence of *Mobile Context-Aware Recommender Systems (mobile CARS)* [33,40,41,67].

The main goal of mobile context-aware recommender systems is to suggest the right items (or services) to mobile users anywhere and at anytime, being the contextual information a key element in determining the relevance of the items. In mobile environments, where the user is moving and the context is highly dynamic, it is essential to provide precise recommendations and avoid overloading the user with the suggestion of many items. Regarding the specific recommendation method used, during the design of a mobile context-aware recommender system it is necessary to decide a suitable contextual recommendation paradigm (i.e., pre-filtering, post-filtering, or contextual modeling), or a combination of these, which best fits the problem to be solved. Besides, the appropriate way for the user to request or receive the recommendations (pull or push approach) has to be determined. Likewise, during the recommendation process, the answer to a user's query must be continuously re-evaluated by the system until the user decides to cancel it, as the recommended items can change continuously with context changes. From the perspective of mobile computing, recommender systems are characterized by the following elements [33]:

1. *User mobility*: the users can access a mobile information system in different locations, while moving.
2. *Device portability*: the device used to access the information system is mobile (e.g., a smartphone, a tablet, a portable computer, etc.).
3. *Wireless connectivity*: the device used to access the recommender system uses wireless communication technologies (e.g., Wi-Fi or Bluetooth).

In [244], the authors identified three important factors that can influence the accuracy of mobile CARS: the context, the recommendation method, and privacy considerations. On the one hand, the *type of context* (e.g., computing context, user context, physical context, etc.) to be included in the recommender system must be determined considering the target recommendation domain. On the other hand, traditional CARS include *static context* information (e.g., gender, age, contact list, etc.), generally provided explicitly by the users. However, in mobile scenarios, the context is highly changing. For example, in a taxi recommendation scenario both users and items to recommend can be on the move. Hence, an important aspect to consider in this type of recommender systems is the exploitation of *dynamic context* information (e.g., the location, transport way, mobility, time of the day, etc.), captured from the environment through sensors (e.g., accelerometers, optical sensors, microphones, etc.) embedded in mobile devices and other available data sources (e.g., social networks, traffic web services, etc.). In addition, mobile CARS must be able to automatically update the contextual information of users and items. An advantage of acquiring dynamic context information implicitly is that the users could avoid entering the information manually into the system. Currently, some mobile CARS use dynamic context information (e.g., mood, companion, etc.), but require the users to enter the information explicitly into the system. The problem is that many users do not usually enter this type of information (as it takes time and it is not convenient for them), and then the system lacks relevant contextual information needed to generate accurate recommendations. As an example, the STS dataset [245] (obtained with the South Tyrol Suggests mobile app) collects information about 14 context attributes, but 89.37% of the actual context values are missing [246].

To overcome the problem mentioned above, context data should be captured automatically, whenever it is possible, by using sensors. In Section 2.2, we emphasized the importance of sensors for the topic covered in this survey from a general perspective. Table 1 shows a summary of some physical sensors used in the literature of mobile CARS for the acquisition of highly-dynamic contextual information, which is of key importance for the particular case of mobile CARS. For example, the user's current location (e.g., home, college, campus, classroom, library, etc.) and movement trajectory are context data generally acquired from GPS sensors, which is one of the most commonly used sensors in mobile CARS. Through Wi-Fi, the mobile device can identify other nearby networks, as well as extract information that characterizes them. The noise level around the user (e.g., silent, normal, and loud) can be determined by using the microphone embedded in the user's device. By using the light detector, the ambient light level (illumination) can be obtained to infer the time of the day (e.g., morning, afternoon, evening, and night), in case a GPS receiver is not available (as otherwise the precise time of the day could be obtained through the GPS receiver). Accelerometer and gyroscope sensors measure the acceleration and rotation rate of the mobile device, respectively; using the values obtained from these sensors, the activity that the user is performing (e.g., walking, running, sitting) or his/her transport way (e.g., on foot, bicycle, car, bus, subway) can be inferred. On the other hand, the temperature is an example of useful contextual information (e.g., to determine if it is hot, normal, or cold) that is usually acquired through thermometer sensors. As a final example, a number of user's physiological conditions can be measured by using biomedical sensors or wearables (e.g., the stress level of the user can be determined by measuring his/her heart rate).

In Table 2, we show examples of virtual, human and social sensors used to obtain contextual information for mobile CARS. Regarding virtual sensors, some CARS exploit certain functionalities of the mobile device's operating system to capture relevant contextual information, such as the ringer mode (e.g., sound, vibrate, and silent), battery information (e.g., battery level, battery temperature, battery status), day of the week, time of the day, user activity (e.g., use of calls and SMS), mobile apps that are active, etc. On the other hand, some recommender systems use web services available on the Internet (e.g., external weather forecast services) to extract contextual information, such as the temperature (e.g., hot, normal, cold), humidity (e.g., dry, humid, normal) and weather conditions (e.g., sunny, cloudy, clear sky, rainy, snowing) of the environment. In university contexts, web services based on maps (for indoor and outdoor environments) have been used to obtain the locations of users on the campus [241]. Another way of detecting the location of mobile users is through the geolocation API of HTML 5, which abstracts the programmer from the use of specific sensors. An example of human sensors could be represented by physical actions performed by clinicians in operating rooms (e.g., surgical actions such as administering anesthesia, performing an intubation, or performing an incision), which are provided to the system to recommend virtual actions in cases of complications and emergencies. As a final example, social networks are used as sensors to capture relevant information from users, such as check-in records of POIs, as well as information about friends and their preferences.

#### 4. Mobile CARS in depth

In this section, we analyze mobile CARS in detail, as they are one of the most challenging and representative types of CARS. First, in Section 4.1, we present the main techniques used for mobile CARS, considering both pull-based recommendation approaches and push-based approaches. Then, in Section 4.2 we present specific examples of mobile CARS for different application domains.

**Table 1**  
Examples of physical sensors used by mobile CARS for context acquisition.

Work	Physical Sensors							
	GPS	Wi-Fi	Microphone	Accelerometer	Light detector	Gyroscope	Thermometer	Biomedical and ambient sensors
[229]	✓	✓	✓	✓	✓	✓		
[230]	✓		✓		✓			
[231]				✓			✓	
[232]	✓							
[233]								
[234]								
[26]								
[235]								
[236]								
[237]	✓			✓				
[238]	✓					✓		
[239]	✓	✓	✓	✓	✓	✓		
[240]							✓	

**Table 2**  
Examples of virtual, human and social sensors used by mobile CARS for context acquisition.

Work	Virtual sensors			Human sensors	Social sensors
	Operating systems' functionalities	Web services	Geolocation API		
[229]	✓				
[230]	✓	✓			
[231]	✓				
[241]		✓			
[242]		✓			
[243]			✓		
[238]	✓	✓			
[232]				✓	
[240]					✓
[235]					✓
[236]	✓				✓

#### 4.1. General approaches for mobile CARS

We classify mobile context-aware recommendation approaches into two main categories: pull-based approaches and push-based (proactive) approaches. In the first case, we assume that the user actively (or explicitly) requests recommendations. In the second case, the user, under certain contextual conditions, implicitly receives recommendations without explicit user requests. A common characteristic in both cases is that the contextual factors (e.g., location, temperature, transport way, etc.) are dynamic, in the sense that they can change continuously. Table 3 presents an overview of several approaches for mobile CARS and highlights the AI techniques used in each of them.

##### 4.1.1. Pull-based mobile CARS

Pull-based mobile CARS follow a request-response pattern. These systems only recommends items if a user makes an explicit (or query-based) request. Several pull-based context-aware recommendation approaches have been proposed for mobile environments [224].

In Fig. 12, we present an overview of pull-based recommendation models proposed in the literature, by taking into account their evolution and performance. There are authors who extend 2D recommender systems to achieve CARS (e.g., [253,254]; see in Fig. 12 the arrows from boxes labeled with “RS” to boxes labeled with “CARS”) while others evolve existing CARS (e.g., [229,255];

arrows from “CARS” to “CARS” in Fig. 12). As the figure shows, the proposed n-dimensional MF-based recommendation models have outperformed some classical MF-based recommenders (e.g., S-DEEPREC [251] outperforms LibFM [256] and SVD++ [257]), as well as other n-dimensional MF-based context-aware recommendation models (e.g., GeoMF [258]). On the other hand, the exploitation of DL-based techniques in CARS has represented a significant improvement regarding several state-of-the-art MF-based recommenders (e.g., [251,252,255]). In the following, we detail the most relevant contributions.

Most contextual modeling approaches proposed in the literature use supervised learning techniques to incorporate contextual information into the recommendation process. The training set of this type of model requires, for each vote of an item, information of each context attribute. Sometimes, contextual information is unknown, and therefore an increase of the number of context attributes could aggravate the data sparsity problem. In [229], the authors emphasized the need to limit the dimensionality of the context representation. Hence, they decided to extend the *Context-Aware Matrix Factorization* (CAMF) recommendation approach presented in [253] by proposing a *Latent Context Matrix Factorization Recommendation* (LCMF) approach. The main idea of this new approach is to extract latent context data from a rich set of mobile sensors and use them to improve the recommendation algorithm. To address the sparsity problem, it performs a selection of the best features (e.g., regarding the location, time, ringer

**Table 3**

AI techniques used in different approaches for mobile CARS.

References	Description	AI techniques
[243]	Situation-aware proactive recommender that pushes information about relevant restaurants to the user by applying AI techniques.	Fuzzy logic and rules.
[231]	Context-aware recommendation model that uses AI techniques to suggest services to mobile users.	Fuzzy logic, rules, and Bayesian networks.
[247]	Contextual advertisement recommender that understands the needs of the mobile users by applying data mining techniques.	Decision tree-based classification rules.
[238]	Context-aware mobile guide system that predicts future leisure activities.	Clustering algorithm.
[233]	Approach that recommends POIs to bank customers, based on the places visited by clients (according to their payments with a credit card), which are initially grouped by using unsupervised learning techniques.	Canopy and k-means clustering algorithms.
[248]	Intelligent Shopping-aid Sensing System, which facilitates the consumer shopping process by using ML techniques.	k-means clustering algorithm and association rules.
[234]	Context-aware recommendation application that guides the mobile users towards suggested POIs, by considering the location, the behavior and favorite category of users. The recommender exploits clustering techniques to identify similar users.	k-means clustering algorithm.
[249]	Intelligent transport system that applies ML techniques to solve logistics problems (recommending an optimal transporter to customers).	k-means clustering algorithm and Principal Component Analysis (PCA).
[239]	Probabilistic recommender that uses contextual information and music content to suggests music to users for daily activities.	Classification algorithm based on Naïve Bayes.
[250]	Recommender that suggests POIs based on contextual information obtained in the context of Internet of Things (IoT).	Classification algorithm based on Naïve Bayes.
[237]	Recommender that suggests restaurants by considering contextual information. Specifically, the transportation mode is inferred by using a Bayesian network classifier.	Classification algorithm based on Bayesian networks.
[230]	Context-aware Bayesian hybrid recommender system that combines the content-based and collaborative filtering recommendation models.	Classification algorithm based on Bayesian networks.
[242]	Context-aware recommendation approach that applies a predictive linear model to infer the relevance of a POI in a specific contextual situation.	Predictive linear model.
[217]	Context-aware probabilistic matrix factorization approach that addresses the data sparsity problem in POI recommendations by using information of friends.	Generative statistical model (Latent Dirichlet Allocation – LDA).
[232]	Context-aware recommendation approach for surgeons, that recognizes concurrent actions on the raw data obtained from sensors, by using ML techniques, to suggest relevant virtual actions in operating rooms.	Conditional Random Fields (CRF).
[240]	Recommendation framework that personalizes multimedia contents, by predicting the latent preferences of user's contexts through adaptive interfaces in an Ambient Intelligent (AmI) environment.	Probabilistic Latent Semantic Analysis (PLSA) and Expectation–Maximization (EM) algorithm.
[235]	Location-based social network recommender system that uses the user's location trajectory, user-shared images, and textual comments, to suggest POIs to mobile users.	Deep Learning – Convolutional Neural Networks (CNNs) – and clustering algorithms.
[251]	Location-aware recommendation model that exploits feed-forward neural networks to learn the latent factors of users and locations, by using check-in information.	Deep Learning – Feed-Forward Neural Networks (FNNs).
[229]	Latent Context Matrix Factorization (LCMF) recommendation algorithm that performs a selection of the best contextual features by using unsupervised techniques.	Unsupervised Deep learning (Auto-Encoding) and Principal Component Analysis (PCA).
[252]	Sequential latent context-aware recommendation model that uses RNNs to learn a nonlinear interaction function between users, items, and contexts.	Deep Learning – Recurrent Neural Networks (RNNs).

mode, speed, battery, activity, microphone, light, accelerometer, rotation, gyroscope, etc.) that can be used to infer unexplored user contexts, by using deep learning and Principal Component Analysis (PCA). The proposed model was evaluated with an Android application that, based on an explicit query provided by the user, recommends POIs nearby, such as restaurants, bars, entertainment centers, etc. Considering the RMSE (Root Mean Squared Error), the proposed LCMF approach was shown to be superior to the Context-Aware Matrix Factorization model [253] and the BiasSGD Traditional MF model [259].

Models based on Matrix Factorization (MF) are one of the most effective collaborative filtering recommenders [253]. However, in [251] the authors presented a deep learning based recommendation model that significantly outperforms several state-of-the-art recommendation models based on matrix factorization

(e.g., SVD++ [257], libFM [256], and GeoMF [258]). The authors explain an improvement in the *Normalized Discounted Cumulative Gain* (*NDCG*), due to the high capacity of neural networks to better detect latent factors related to user preferences and locations. Specifically, they implemented a location-aware recommendation model, called *S-DEEPR*, that exploits feed-forward neural networks to learn the latent factors of users and locations, by using check-ins of users. A novel aspect to highlight is the incorporation of spatial constraints into latent factors related to locations (e.g., geographically-close locations are given a higher preference, as opposed to the one assigned to geographically-distant locations). To implement time-aware location recommendation models, they proposed, as future work, to apply other types of neural networks, such as Recurrent Neuronal Networks (RNNs). Recently, in [255], the authors applied Convolutional Neural Networks (CNNs) in a time-aware recommender system to study

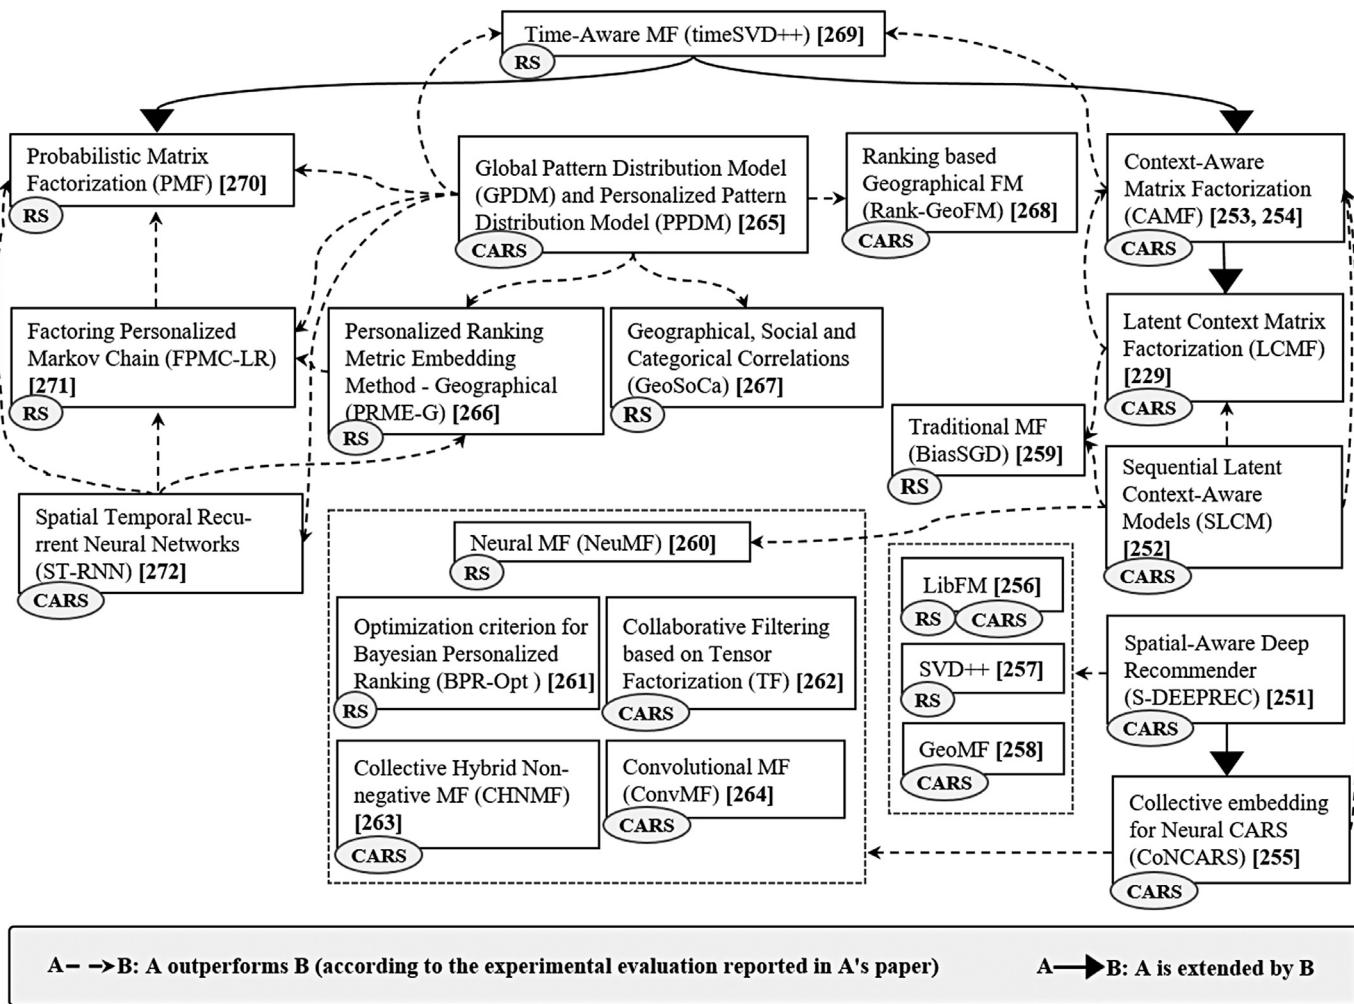


Fig. 12. Overview of related work considering the evolution and performance of pull-based recommendation models.

the changes of user preferences over time. The experimental results show improvements over the CAMF [253], NeuMF [260], BPR-Opt [261], TF [262], CHNMF [263], and ConvMF [264] models.

The sequential latent context-aware model (SLCM) [252] is another example that uses deep neural networks to address limitations of traditional MF (i.e., use of a fixed linear function to capture the complex structure of user and item interactions, and explicit definition of latent factors) for collaborative filtering recommenders. Specifically, the authors used RNNs to learn a nonlinear function of user, item, and context interactions. In movie and POI recommendation domains, the proposed model improves the recommendation accuracy (MAE, RMSE, and Hit@K) compared to other state-of-the-art context-aware models (e.g., [229,253,259]), which are also extensions of the neural network collaborative framework (NCF) [260]. A relevant aspect of this work is that the authors deal with the user's privacy problem, by using context sequences observed in the system for different users instead of individual context sequences per user; this is one of the few papers that tackle this challenge. As future work, the authors plan to solve "the new user problem" by extending the SLCM model (for example, studying recommenders based on user groups), and to apply other neural network architectures such as CNNs.

In the same line of collaborative filtering research based on MF, the authors of [265] addressed the *sparsity problem* using latent behavior patterns learned from implicit contextual features (e.g., the current location, the time of the day, and the day of the week). They proposed two POI recommendation methods: *Global*

*Pattern Distribution Model (GPDM)* and *Personalized Pattern Distribution Model (PPDM)*. Both methods differ in the way they learn the behavioral pattern distribution. The first method assumes that all the users have a fixed pattern distribution, while PPDM learns a personalized pattern distribution per user. The GPDM and PPDM models were compared with state-of-the-art models for next POI recommendation [266–272], by using the Foursquare and Gowalla datasets. The proposed models obtained better recall and NDCG.

Moreover, a context-aware Bayesian hybrid recommender system was proposed in [230]. The proposed model combines content-based and collaborative filtering recommendation models. It uses contextual information (e.g., the location, season, day of the week, time of the day, temperature, etc.) obtained from a mobile device, user ratings, and attributes that characterize the items. To improve the prediction accuracy, a Bayesian Network is applied in both recommendation models.

#### 4.1.2. Push-based mobile CARS

Generally, mobile devices such as smartphones have some limitations in comparison to traditional mobile or desktop computers; for example, they usually provide restricted input facilities (e.g., lack of a comfortable keyboard, small display sizes, etc.). So, a recommender system can try to relieve the user from having to type or introduce significant information as an input, by using push-based context-aware recommendations rather than pull-based context-aware recommendations. A push-based

context-aware recommendation approach automatically delivers recommendations to the mobile user in an appropriate context, without explicit requests from him/her.

For example, a proactive contextual recommendation approach that pushes suggestions to the mobile user when the current situation (i.e., the context) is considered appropriate, without explicit user requests, was proposed in [273]. The idea is to determine not only *which* items to recommend, but also *when* to make a recommendation. Hence, the proposed approach periodically analyzes the current contextual conditions and, if the current context is appropriate, then a second phase is activated to examine the suitable items to suggest. For example, a gas station recommender system can proactively suggest a gas station when the remaining fuel level is low and a gas station is nearby, without causing much (or any) detour.

From the perspective of AI techniques, a contextual recommendation approach for mobile environments was proposed in [231]. This approach for smartphone users automatically recommends services (or actions related to the volume adjustment, call settings, profile, applications, etc.) in a specific contextual situation. For example, when the user is in a library, the recommendation model activates the vibrating mode automatically and also offers services like book search. Contextual information (e.g., the day, time, location, temperature, etc.) is captured by the available sensors (e.g., accelerometer, temperature, humidity, etc.), and obtained from data stored by applications in electronic calendars, address books, task lists, etc. In this contextual recommendation model, the context values captured by the sensors are represented as fuzzy values to define the context situations, the actions to execute under the current context conditions are determined by using rules, and Bayesian Network techniques are used to classify the incoming calls (e.g., into high-priority calls, low-priority calls, and unknown calls).

An agent-based architecture for context-aware recommendation was introduced in [241]. The eAgora? application is an implementation of the proposed architecture in a university scenario, which is characterized by an environment which is dynamic (there are mobile users), heterogeneous (there are several mobile devices, social interactions, and services available), intelligent (when the system is able to react smartly to environment changes), and contextualized (when it is context-aware). The application learns the user preferences continuously, by using software agents, to adjust automatically to the context changes and proactively recommend events occurring in the campus (academic events and cultural events).

A context-aware recommender system that pushes information about different types of items (e.g., restaurants, gas stations, attractions, etc.) in an environment of Internet of Things (IoT) was proposed in [250]. It takes into account the user's contextual information (e.g., the time, outside temperature, human temperature, blood pressure, if the user is out of his/her country, if he/she is on holiday, the oil level in the car, if the car engine is working at the moment, and if it is lunchtime or not) during the recommendation process. When a type of recommendation (e.g., about a hospital, gas station, restaurant, or cinema) is triggered, then a Naïve Bayes classifier is used to provide information of interest to the user. For example, if the system detects that the user's blood pressure is high, it would recommend hospitals near his/her location.

Most push-based mobile CARS assume the availability of a centralized server that stores a large database about all the ratings that are released over time (e.g., [238,240,274,275]). In [276], the authors analyzed the possibility of using pure mobile P2P networks to exchange relevant data in contexts where no centralized database or server exists. They implemented a simulation application that allows testing a trajectory-based mobile CARS

able to proactively push relevant items to mobile users. The idea is to recommend to the user a trajectory to follow within a museum, taking into account the sequence of works of art to observe during the time available. In this scenario, the museum visitors propagate partial amounts of rating data opportunistically (i.e., when they meet each other in the physical space). The experimental results show that the mobile P2P-based recommendation approach shows a performance close to a centralized strategy but it does not outperform it. This is because the mobile P2P recommendation variant to learn the models only uses information collected opportunistically in the local database of the user's mobile device, rather than using a centralized server that contains all the information available. However, mobile P2P architectures have potential advantages over centralized solutions, such as the following: they do not imply costs to deploy a required support infrastructure; the mobile users do not incur any cost derived from the use of cellular communications (e.g., 3G, 4G, or 5G) when providing rating information; and they may provide better privacy guarantees, as no centralized server collects all the information provided by the users.

#### 4.2. Examples of mobile CARS in different domains

In this section, we present several examples of context-aware recommender systems for mobile environments in different domains (e.g., recommendation of restaurants, POIs, music, etc.). As a summary, in Table 4, we provide an overview of the context variables and example application domains of existing work for mobile CARS. Moreover, from the perspective of Information Systems (IS), in addition to contextual attributes, mobile CARS take into account additional information related to users and items. In Table 5, we present some application examples that use item and user attributes.

Regarding the evaluation of mobile CARS, some works apply rating prediction measures used to evaluate traditional recommender systems. These metrics determine the accuracy of the recommendations taking into account their error. We identified that, among these metrics, the *Mean Squared Error (MAE)* and *Root Mean Squared Error (RMSE)* measures are the ones mostly used by researchers in the mobile CARS field. In Table 6, we show some examples of mobile context-aware recommendation proposals that use these metrics. However, mobile CARS are a new generation of recommender systems, that probably require metrics adapted to dynamic environments and context-enriched data sets. On the other hand, some researchers apply Information Retrieval (IR) metrics for the evaluation of mobile CARS. Examples of these metrics are the *precision*, *recall*, *F-measure*, and *Mean Average Precision (MAP)*. Finally, there are ranking metrics focused on the evaluation of top-k recommendations, where the utility of a recommended item is proportional to its position in the ordered list of recommendations. Examples of these metrics are the *NDCG* and the *P@K* metric.

##### 4.2.1. Mobile CARS for the recommendation of POIs

In the domain of RS, the recommendation of POIs has received a considerable attention [277–279]. In the same way, this has happened in the specific research area of mobile CARS, characterized by a very dynamic environment and the fact that the user is moving. In [247], the authors emphasize the need to develop recommendation architectures that can be applied to real problems. Besides, they consider that many of the proposed approaches are developed based on the interests of service providers rather than clients. Hence, they proposed a location-based advertisement recommender for mobile users, called *LARMU*, where the classical collaborative filtering approach is modified to include several context dimensions related to mobile users (e.g., their

**Table 4**

Overview of example domains and context variables considered by existing proposals of mobile CARS.

Reference	Approach	Context variables considered	Domain
[247]	Pull	location, time, interest, satisfaction level	
[242]	Pull	distance, temperature, weather, season, companion, time of the day, day of the week, crowdedness, familiarity, mood, budget, travel length, transport way, travel goal	POIs
[233]	Pull	time, activity, location	
[235]	Pull	location, trajectory of the user's activity, time	
[234]	Pull	location, user's behavior or actions, POI categories preferred by users	
[265]	Pull	location, time of the day, day of the week	
[243]	Push	time, location, distance, budget, reachability	
[274]	Push	location, time, activity, companion, status of the mobile device (e.g., flight mode), distance	restaurants
[237]	Pull	location, transport way, distance, activity	
[273]	Push	location, time, transport way, companion, distance, fuel level of the car, detour needed, total length of the route, traffic	gas stations, restaurants
[254]	Pull	driving style, road type, landscape, sleepiness, traffic conditions, mood, weather, time of the day	music
[239]	Pull	activity, music audio content	
[240]	Pull / Push	location, companion, time of the day, date, emotions, weather, things (e.g., physical components, cellphone)	multimedia: news, music, movies
[238]	Push	time of the day, location, weather, user plans, price, noise level, availability of parking, smoking, venues' business hours	leisure activities
[26]	Pull	location, time, companion	food, shopping, health services, POIs (for tourists)
[248]	Pull	time, location, day of the week	movies, POIs
[236]	Pull	location, time	sessions and exhibitors of an event
[248]	Pull	location	products of a shop
[249]	Pull	location, car availability, car's maximum speed, car tank, year of manufacture of the car, car millage counter, car's CO <sub>2</sub> emissions, road congestion	transporters

location, time, interest, and satisfaction level). To understand the needs or interests of the users, they applied data mining techniques (e.g., decision tree-based classification rules and the CART algorithm). The proposed algorithm was evaluated in the context of the recommendation of places for shopping, eating, enjoying, drinking, and learning. Considering the MAE, LARMU was shown to outperform a traditional collaborative filtering model. The experimental results were obtained by using data collected from users, but the proposed architecture was not applied in a real-world mobile scenario. Due to this limitation, the initial motivation of the authors was not completely satisfied. In addition, the sparsity problem of ratings remains as a problem that needs to be addressed.

In [242], motivated by the idea of simplifying the user's effort to provide ratings of items seen in different contexts, the authors proposed a methodology that identifies the existing quantitative dependency between user ratings and context factors. Through this methodology, users first evaluate whether the context influences (increases or decreases the probability of, or has an impact on) the selection of POIs. Then, a predictive linear model is learned with this information to infer the relevance of a POI in a specific contextual condition. To put it in practice, a mobile context-aware recommendation prototype, called *ReRex*, was developed, that suggests interesting POIs for tourists, according to contextual conditions (e.g., distance, temperature, weather, season, etc.) that the system must consider during the recommendation process. Another important aspect to highlight is the ability of *ReRex* to explain the recommendations provided, thanks to the use of a predictive linear model which identifies the most relevant contextual factor for each user's request. For example, the system could explain the suggestion of visiting a museum by arguing that the climatic conditions are unfavorable to be outdoors. The experimental results show that users

prefer context-aware recommendations rather than traditional recommendations. However, the authors propose to improve the explanations provided, due to a low user satisfaction with them.

In the line of developing architectures designed for real-world problems, a mobile CARS based on real banking data (e.g., customer profiles, credit card transactions, etc.) was presented in [233]. The proposed model is used to recommend POIs (e.g., restaurants, stores, cinemas, supermarkets, etc.) to bank customers, by considering the places visited by clients where they used the bank's credit card. In a first phase, the model applies clustering techniques to the information extracted from customers' bank accounts in order to generate social clusters, to form groups of clients according to the purchases made with their credit cards, their age, their gender, etc. Once the social context of each user is known, in a second phase, the system filters these social contexts by considering the user's location to find places closer to the user that requested the recommendation. Finally, in a third phase, the user's context (inferred from sensor data) is considered to obtain personalized recommendations. For the evaluation of the architecture, the authors developed a prototype, called *Labs*. In general, users were shown to be satisfied with the recommended places. However, some users were concerned about privacy issues that could arise in real commercial environments. Moreover, the authors proposed the generation of proactive recommendations as future work.

The *UTravel* application is another example of context-aware mobile recommender system that applies clustering algorithms to identify profiles of similar users [234]. The architecture is composed of two main modules. The first module captures and generates user profiles. In addition, it exploits the k-means clustering model to identify groups of similar users, by taking into account two types of profiles: the demographic profile (with attributes like the age, gender and employment) and the preference

**Table 5**

Overview of user and item attributes considered by existing proposals of mobile CARS.

Application	Prototype?	User's attributes	Item's attributes	Item type
LARMU [247]		gender, location, interest, satisfaction level	type of the place, location	
ReRex [242]	✓	companion, crowdedness, familiarity, mood, budget, travel length, transport way, travel goal	descriptions of POIs	POIs
Labs [233]	✓	age, gender, average expense in credit card transactions per year, places where bank clients have spent their money, payment amount, time and date of the purchase, location	category, name, address, location	
UTravel [234]	✓	age, gender, employment, behavior (actions or interactions with mobile apps)	descriptions of POIs	
DCAPR [235]		location, activity trajectory, age, gender, education, nationality, textual comments, pictures shared in social networks	N/A	
SAPRS [243]		location	budget, reachability, location	
R <sup>2</sup> Proactive [274]	✓	activity, companion	name, cuisine type, description, name, average price	restaurants
Co-ARS [237]	✓	user's browsing history (real-time clicking on options to get information about specific restaurants), location, transport way	name, location, rating, cuisine type, address, pictures of the restaurant	
ProactiveRS [273]	✓	location, companion	price, location	gas stations, restaurants
InCarMusic [254]	✓	name, genre preferences, sleepiness, mood	genre	music
ACACF [239]	✓	user's activity	music audio content	
RecAm [240]	✓	social network, sex, age, location, companion, emotions	content category	multimedia: news, music, movies
iS <sup>3</sup> [248]	✓	age, gender, frequency of purchase, purchase habits	content, price, location, promotion	products of a shop
Magitti [238]	✓	user plans (content of emails, calendar, appointments, applications used, web pages and documents viewed, messages), location	price, noise level, availability of parking, smoking, location, venue's business hours	leisure activities
EventAware [236]	✓	areas of interest, time, location	name, description, location, session start time, days of the event, contact information	sessions, exhibitors
Transporter and Customer [249]	✓	name, availability status, location	location, max speed, CO <sub>2</sub> emissions (car tank, car model, car maker, year of manufacture of the car, millage counter)	transporters

profile (e.g., evaluation of POIs, by considering the quality of services, cost, reachability, waiting time, and overall rating). An important contribution of this work is the methodology applied by the authors to include behavioral information in user profiles at both the individual level and the group level, by analyzing user actions, such as the selection of categories, marking POIs as favorites, clicking on a POI to see its details, etc. The second module of the implemented architecture uses user behavior profiles to decide which POIs (e.g., shops, pubs, museums, etc.) to recommend to the user, by using different item filters, such as a location filter, a behavior filter, and a favorite category filter. As future research, the authors proposed to implement a decentralized version of the application for performance reasons.

As another example, TGSC-PMF [217] is a context-aware probabilistic matrix factorization approach proposed to address the data sparsity problem for the recommendations of POIs, by using information about friends. Specifically, this approach uses contextual information obtained from a Location-Based Social Network

(LBSN), where each POI is described using a topic model as well as geographical, social and categorical correlations, to generate a POI preference score, which is then integrated into a probabilistic matrix factorization model.

Recently, with the rise of the Big Data era, Deep Learning (DL) techniques (e.g., Convolutional Neuronal Networks –CNNs–, Recurrent Neuronal Networks, Attentional Models, etc.) have obtained promising results in several research fields, such as in the Computer Vision and Natural Language Processing (NLP) domains. The use of deep learning techniques in recommender systems has also been an emerging trend [280]. For example, a deep CNN-assisted personalized recommendation framework for mobile wireless network users, named DCAPR, was presented recently [235]. An interesting aspect of DCAPR is its ability to feed on multisource heterogeneous spatiotemporal data of mobile wireless network users and different input features, such as

**Table 6**  
Examples of evaluation metrics used in mobile CARS.

Reference	MAE	RMSE	Precision	Recall	F-measure	MAP	Survey scores	Hit@K	AVG Rank	NDCG
[247]	✓									
[217]	✓	✓	✓							
[248]			✓	✓	✓					
[254]	✓									
[235]			✓	✓	✓					
[240]			✓	✓		✓	✓			
[239]			✓				✓			
[229]		✓						✓	✓	✓
[250]							✓			
[242]							✓			
[233]							✓			
[243]							✓			
[274]							✓			
[273]							✓			
[238]							✓			
[236]							✓			
[234]			✓	✓	✓		✓			
[26]							✓			✓
[251]										✓
[252]	✓	✓						✓		
[265]				✓						✓

image features, text features, and mobile user trajectories. Information about users (e.g., the trajectory of the user activities, textual comments, pictures shared by them, etc.) is extracted from their social networks. In addition, other types of information are captured from user profiles in social networks (e.g., the age of the user, his/her gender, nationality, and education). Users' location information is also exploited to identify friends with common interests, through the use of clustering techniques; specifically, the authors assume that people who visit POIs located in the same region have common preferences. The CNN architecture has three layers: a rough layer, an enhanced layer, and an accurate layer. The first layer considers users with common trajectory activities as candidates, which are obtained by comparing the trajectories of mobile users in the social network. Some candidates can be *fake-friends*, as they can have similar trajectories but different visited POIs and therefore different interests (e.g., users visiting different types of stores in the same mall). In the second layer, the CNN model captures features from images published in a social network, to filter the candidate friends with similar POIs. In the last layer, a CNN classifier is exploited to extract text features from comments posted or articles of interest shared by the user in a social network. Concerning precision, recall, and F-measure, the proposed recommendation model outperforms the baselines considered in the paper. An important conclusion of this paper is that, despite the efforts, there is still a gap between deep learning, mobile wireless communication networks, context-aware recommender systems, and mobile computing. According to that work, another current challenge in this research field is how to combine multisource data to obtain more accurate recommendations.

Regarding the recommendation of POIs, we would also like to highlight that the tourism scenario has been the most exploited case study to implement and evaluate the effectiveness of mobile CARS [26,27,234,242]. On the one hand, this is because in this type of domain it is easy to appreciate the importance of including contextual information in recommender systems to obtain appropriate recommendations. For example, a travel recommender system that assists tourists during their trip may be influenced by various contextual factors, such as the distance to POIs, the weather, the season, whether the POIs are

places in open or closed spaces, etc. LOOKER [26] is an example of mobile recommendation application that takes into account the location and time before suggesting different travel-related services (e.g., food, shopping, health, and POIs) to tourists. On the other hand, tourists generally have limited time available and are constantly on the move (visiting POIs). Hence, from the perspective of mobile computing, the tourism domain is a suitable scenario to show the need to implicitly capture and update dynamic contextual information from the environment.

#### 4.2.2. Mobile CARS for the recommendation of restaurants

In the restaurant recommendation domain, several approaches have been proposed in the literature. For example, the *Situation-Aware Proactive Recommender System (SAPRS)* [243] pushes information about relevant restaurants to the user at the right contextual situation. In the first phase, SAPRS applies fuzzy logic as an inference technique to address the uncertainty of the current situation, and if the situation is appropriate then a collaborative filtering recommendation model is activated in a second phase.

A current challenge for mobile CARS is the proper design of mobile user interfaces. Along these lines, [274] evaluated the impact of proactivity on the user experience in a restaurant recommendation domain, to analyze if users would accept proactive recommendations, how to present the recommended items, and how to properly notify the users. To answer these questions, the authors evaluated two mobile user interfaces (a widget-based interface and a notification-based interface) for context-aware restaurant recommendation, based on the proactive recommendation model proposed in [273]. The experimental results showed that the widget-based interface was preferred by the users.

A pull-based context-aware recommender system for mobile environments, called *Co-ARS*, was presented in [237]. This system recommends restaurants by considering contextual information and attributes such as the user's location, restaurant's location, user's preferred transportation mode, network distance between the user's current location and the final destination, and overall rating of the restaurant. The user's location is automatically acquired from the GPS sensor embedded in a smartphone. The

transportation mode used (e.g., stationary, walking, biking, or driving) is detected by using a Bayesian Network classifier. During the rating prediction process, the proposed recommendation model favors nearby restaurants, by considering the mode of transportation and the distance between the user's current location and the restaurant's location. Besides recommending a list of nearby restaurants, for each of them the optimal route and travel mode is suggested, by using Google Maps.

#### 4.2.3. Mobile CARS for the recommendation of other items

To facilitate the consumer shopping process, several other mobile CARS have been implemented. An example is the *Intelligent Shopping-aid Sensing System (iS<sup>3</sup>)* [248]. The model incorporated in this system first uses the k-means clustering algorithm to generate customer clusters, by considering the gender, age, and frequency of purchase variables. Then, an association rule mining approach (Apriori algorithm) is applied to each cluster to provide product recommendations to customers. The proposed recommendation system integrates RFID technology to automatically show information about products (e.g., size and specifications) to users.

Other works focus on the user's activity to generate recommendations. For example, *Magitti* [238] is a scalable architecture for context-aware activity-detecting mobile recommender systems. It infers leisure time activities, based on the context and patterns of user behavior, to recommend relevant places for carrying activities. As another example, [232] presents an activity-aware recommender system for teams of medical professionals working in hospital operating rooms. It suggests relevant virtual actions (e.g., retrieval of information resources and initiation of communications with professionals outside the operating rooms) based on the current state of the operation (detected from sensor data) and considering similar past situations, by using ML techniques.

The *EventAware* [236] system is able to personalize the agenda of users participating in a congress (e.g., recommending them sessions and exhibitors of interest). For the recommendation process, the authors used a tag-based approach which determines the similarity between the tags that describe the items and the areas of interest of the users. To minimize the number of user interactions with the system, it implicitly incorporates some user's contextual information (e.g., the location and time) and tags obtained from Wikipedia (e.g., tags that describe the items) and LinkedIn (e.g., basic information of the user's account and his/her areas of interest, represented by tags). In addition, the user provides information about the days that he/she will be at the event. *EventAware* first applies the pre-filtering paradigm to ignore items that do not match the user's current context. Then, the tag-based approach is applied on the candidate items to generate recommendations that match the user's preferences. Depending on the user's current context, the final recommendation list will be dynamically modified. In [281], a similar approach was previously presented for the music domain in a web-based environment.

In the domain of context-aware music recommendation, the *InCarMusic* system [254] is a context-aware mobile recommender system that offers music recommendations to the passengers of a car by using collaborative filtering and matrix factorization. As another example related to music recommendation, a novel probabilistic model for the recommendation of songs for daily activities (e.g., studying, running, walking, sleeping, working, and shopping) was proposed in [239]; in this proposal, contextual information collected by mobile devices is integrated with music content analysis techniques.

A different and interesting example is the intelligent transport system presented in [249], which tackles logistics problems. It is a

clustering-based recommender system that suggests the optimal transporter (e.g., cars, trucks, etc.) to deliver a package for the customer in a smart city. During the recommendation process, the model uses contextual features of transporters (e.g., availability, current location, max speed, fuel consumption, year, mileage counter, and CO<sub>2</sub> emissions), the road congestion, and the customer's current location.


As a final example, a multimedia recommendation framework, called *RecAm*, was proposed in [240]. It incorporates contextual information (e.g., the time, health conditions, emotions, calendar and location data, etc.) into the recommendation process. The purpose of this framework is to facilitate the recommendation of multimedia content by identifying the user's context through adaptive user interfaces in Ambient Intelligent (Aml) environments. For example, a prototype that uses the proposed framework would be able to detect the stress level of a person (by capturing the heart signal) and recommend suitable songs that can decrease the stress level. Besides, the prototype could modify the environment of the room (e.g., adjusting the volume of the music and the light level) according to the preferences and current context of the user, by using Aml interfaces.

In Fig. 13, we show an overview of different types of items that have been considered in mobile CARS. In addition, we present the percentages of works that exploit these items (considering an overall of 29 representative papers). The figure clearly shows that CARS for mobile environments have mainly focused on three types of items: POIs, restaurants, and movies.

## 5. Conclusions and open issues

In this paper, we have provided an extensive survey of AI-based mobile CARS from an information management perspective. We have introduced the technological context needed to facilitate the understanding of context-aware recommendations in mobile environments, including mobile computing, the main features of traditional recommendation systems, and context-aware recommendation systems. In addition, we have examined in detail pull and push approaches of mobile CARS that exploit artificial intelligence techniques. We have also described some relevant examples of mobile CARS for different application domains.

In this study, we have identified several promising artificial intelligence models that have been applied to the development of traditional RS. Subsymbolic artificial intelligence approaches (where the models are not explicitly represented through elements such as formulas or rules, but learned from experience) are prevalent nowadays [282], and in particular deep learning approaches [283–285] have been recently explored in the specific context of mobile CARS (e.g., Auto-Encoding [229], Feed-Forward Neuronal Networks [251], Convolutional Neural Networks [255], and Recurrent Neural Networks [252]). We could expect an increasing consideration of these types of techniques, as well as improvements of more classical ones, to offer more relevant customized recommendations to mobile users in a variety of potential use cases. However, the use of these complex neural networks leads to important challenges in the domain of RS [280], such as the large amount of data required for each user during the training phase to achieve high-quality predictions and the difficulty to provide explanations of the items recommended to the users. Hence, traditional classification approaches (e.g., association rules, decision trees, Random Forest, Naïve Bayes, Bayesian Networks, and Conditional Random Fields) are still widely used to estimate user preferences and to recognize the activity being performed by the user [224,230–232,237,239,247,248,250,281]. Moreover, Canopy and k-means clustering techniques have been among the most frequently used approaches to find groups of

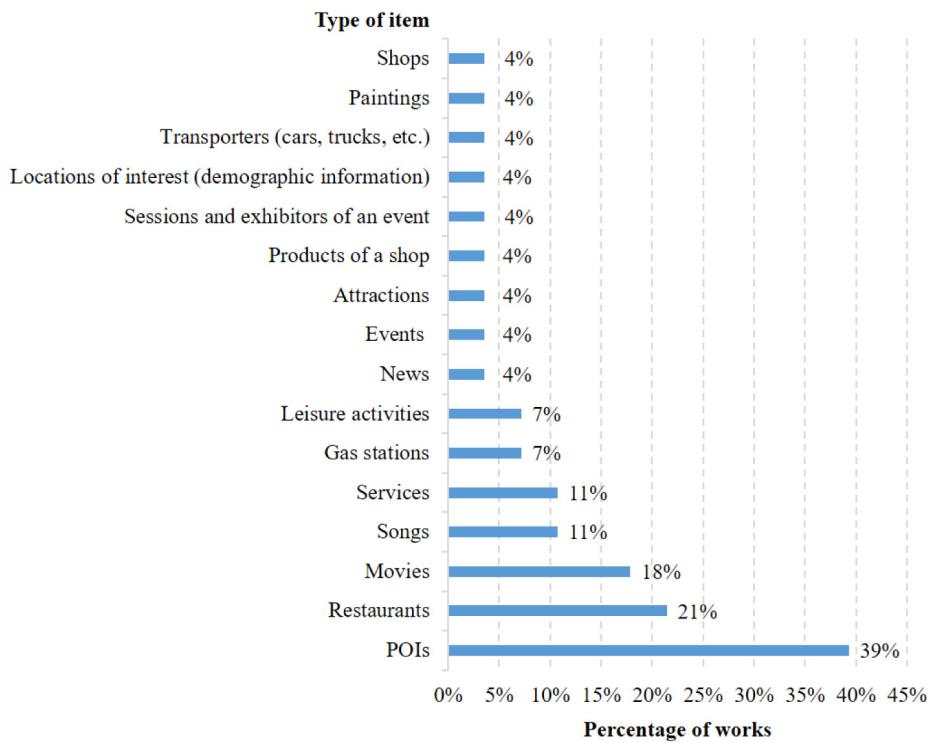

**Fig. 13.** Percentage of works that consider different types of items to be recommended.

similar users based on their profile information [217,233,234,248, 249]. Another observation in this study is that statistical techniques, such as Principal Component Analysis (PCA), Probabilistic Latent Semantic Analysis (PLSA), and Expectation–Maximization (EM), are also widely used [229,240,249]. For example, PCA is a relevant statistical technique used to alleviate high dimensionality and sparsity problems in CARS. An overview of these AI models and trends is shown on the left side of Fig. 14.

Although the number of proposals involving pull-based recommendation approaches found during the literature review was significantly higher than those considering push-based recommendation techniques, it is expected that push-based solutions will become a more relevant trend in the near future, thanks to advances in mobile computing and its widespread use. Currently, many proactive recommenders use reasoning approaches (e.g., Fuzzy Logic and rules) to handle the uncertainty during the initial assessment phase that determines if the current situation is appropriate to push recommendations (e.g., [231,243]).

From a technological point of view (see the right side of Fig. 14), we have noticed that most of the reviewed works have proposed mobile context-aware recommendation applications considering centralized (client–server) architectures [231–234, 237–240,242,243,248,249,274]. In this scenario, the server hosts the contextual recommendation engine and the needed databases to store information about users, contexts, items, and ratings. Java frameworks such as Mahout and Weka are commonly applied to develop the context-aware recommendation logic (e.g., see [224, 233,250,281]). Tools such as MATLAB (with its Fuzzy toolbox) have been successfully used to develop fuzzy inference systems (e.g., [243]). We believe that, in a near future, Python frameworks (e.g., TensorFlow, Theano, Keras, and PyTorch) will be widely used, due to the recent interest to apply deep learning techniques for mobile CARS. We also expect more solutions where at least part of the recommendation engine could be executed in the mobile clients; besides, several mobile devices could share data and tasks as part of a distributed recommendation process. Currently, in most approaches, the mobile device of a user manages

information about the user's profile and preferences and provides the graphical user interface of the recommendation system, but it does not usually play a relevant role in the recommendation algorithms. The majority of the mobile client applications identified in this review are Android prototypes implemented in Java with Android Studio. CoreLocation, Geo2tag, Geolocation, Google Maps, Google Places, and MapKit, are examples of tools and services used by researchers of mobile CARS to acquire the locations of users and items [26,237,242,243,274].

As we have seen in this survey, relevant work related to mobile CARS has already been performed. However, there are still significant open issues. Some challenges of context-aware recommender systems are inherited from traditional recommender systems (e.g., data sparsity, cold start, and high dimensionality problems, as well as security, privacy, and spam vulnerability concerns), while others arise as new ones. Among the additional challenges, the following can be highlighted for the general case of CARS [32,67,286,287]:

- The variety of application scenarios and user needs makes it difficult to determine what types of contexts are actually needed in CARS. Hence, the *efficient discovery of valid (or suitable) context types* for a specific domain is a serious challenge that CARS should overcome, to reduce the difficulty of context acquisition and the computational cost of recommendation algorithms, thus improving the performance accuracy of CARS. According to [30], this challenge can be treated as a problem of feature selection to reduce the dimensionality of the context, and thus make context comparisons more efficient.
- *Context acquisition and automatic discovery of dynamic user preferences* from several external data sources (e.g., social networks, sensors, RFID data, etc.) is a major research challenge for CARS. The resulting recommendations could be more effective if the characteristics of the dynamic environment were effectively exploited. For this purpose, the use of text mining techniques (applied on users' reviews,

AI Models	Technologies and architectures
<ul style="list-style-type: none"> <li>• Traditional classification approaches: <ul style="list-style-type: none"> <li>- Association rules</li> <li>- Decision trees</li> <li>- Random Forest</li> <li>- Naïve Bayes and Bayesian Networks</li> <li>- Conditional Random Fields</li> </ul> </li> <li>• Clustering techniques: <ul style="list-style-type: none"> <li>- Canopy</li> <li>- k-means</li> </ul> </li> <li>• Statistical techniques: <ul style="list-style-type: none"> <li>- PCA</li> <li>- PLSA</li> <li>- EM</li> </ul> </li> <li>• Reasoning approaches: <ul style="list-style-type: none"> <li>- Fuzzy logic</li> <li>- Rules</li> </ul> </li> </ul> <p><b>Main current trend: deep neural networks</b></p> <ul style="list-style-type: none"> <li>- Auto-Encoding</li> <li>- Feed-Forward NN</li> <li>- CNN</li> <li>- RNN</li> </ul> <p>Challenges:</p> <ul style="list-style-type: none"> <li>- Size of the datasets for training</li> <li>- Explainability</li> </ul>	<p><b>Recommendation engine:</b></p> <ul style="list-style-type: none"> <li>• Mainly on the server</li> <li>• Mahout, Weka</li> <li>• MATLAB (with the Fuzzy toolbox)</li> </ul> <p><b>User interaction (mobile devices):</b></p> <ul style="list-style-type: none"> <li>• Pull-based (reactive) approaches</li> <li>• Android prototypes (Android Studio)</li> <li>• Android tools and services (e.g., Google Maps, Google Places, Geolocation, etc.)</li> </ul> <p><b>Expected trends:</b></p> <ul style="list-style-type: none"> <li>• Algorithms (partly) on the mobile device</li> <li>• Distributed cooperative devices</li> <li>• Push-based (proactive) approaches</li> <li>• Python frameworks for deep learning</li> <li>• Consideration of new context attributes relevant to mobile users (such as the social distance between people)</li> </ul>

**Fig. 14.** Overview of models, technologies and expected trends for mobile CARS.

items' descriptions, and other user's texts like posts in social networks), such as sentiment analysis [288,289], could play a key role in the design of recommender systems [290]. As an example, the SenticNet 6 approach detects the polarity of a text through an ensemble of symbolic and subsymbolic AI tools [291]; this is motivated by the fact that, according to the authors, "Coupling symbolic and subsymbolic AI is key for stepping forward in the path from NLP to natural language understanding" [292]. Capturing and considering the current emotions of a user, to design affective recommenders (emotion-based recommendations) [293–297], is also a research avenue that would benefit from further research. Indeed, as mentioned in [298], affective computing and sentiment analysis can enhance the capabilities of recommendation systems.


- Another critical issue for CARS is the *development of generic contextual models*. The problem of the current proposals (e.g., [299–301]) is that they model information for a very specific application domain (e.g., tourism, movies, etc.) or more abstract domains but for specific types of items (e.g., products, web services, e-learning, etc.), and so their domain-specific models cannot be easily reused in other recommendation scenarios. Some proposals try to solve this challenge. As an example, [302] presents a generic model using an ontology, which can be used in different types of recommender systems, and models data, context, and the recommendation process itself. Moreover, a study to try to determine whether a more generic modeling approach could be applied for CARS was carried out in [303]; as a result of the study, the authors proposed a novel generic contextual model for CARS, which was theoretically evaluated with positive results.

- Very few proposals in the CARS literature combine the context's history and the user's behavior [304,305]. Hence, *understanding the user's behaviors* based on the context's history could be improved, which may lead to improve the accuracy of recommendations.

- According to [306], the *link between cognitive models and recommendation systems* has not received enough attention so far. However, decision-making is based on cognitive information [307]. Critique-based recommenders [307–310] establish a feedback-based recommendation process to refine the initial recommendations provided; in this way, the user can provide critiques of the previous recommendations until a suitable recommendation is received. Moreover, it has been reported that the use of cognitive approaches and linguistic formalism can lead to intelligent information sharing [311,312]. Although cognitive approaches can be applied for recommender systems in general [313], we believe that they could be particularly relevant to CARS, as the context can play a key role in decision-making.

Besides, we have identified several relevant open research issues for the specific case of mobile CARS, where the existence of a highly-dynamic context and the mobility of users play a key role:

- There is still a *gap between CARS and mobile computing*. For example, the recommended items are usually considered to be static (e.g., not moving). Besides, some data management techniques for mobile computing, for example approaches for distributed data processing and mobile P2P data management, could be needed for the effective deployment of mobile CARS in certain environments [314]. For example, mixed RS and mobile computing solutions would be useful in the case of a user who is walking down the street and uses a mobile application that suggests to him/her an appropriate taxi in real-time (in this case, both the user and the

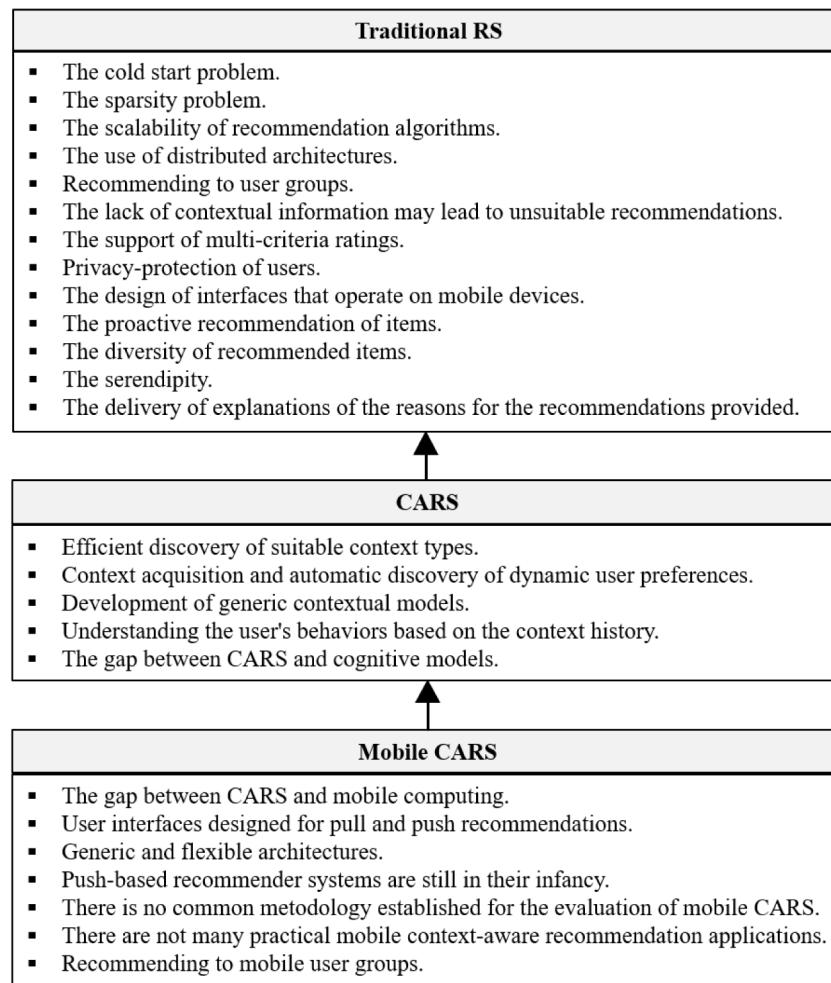

**Fig. 15.** Summary of challenges related with RS, CARS and mobile CARS.

target items may be moving). Most of the proposed mobile CARS operate on centralized infrastructures (client–server architectures) [231–234,237–240,242,243,248,249,274], and so they are subject to the traditional limitations of centralized approaches. Besides, new attributes relevant to mobile users in the context of the COVID-19 pandemic, such as the social distance between people, should be considered [315].

- *User interfaces designed for recommendation purposes* (explicit or implicit recommendations) should be simple and easy to understand. However, very few studies have evaluated the usability of interfaces for recommender systems [274] or have studied in depth the best way to present the information to recommend. Usability aspects could be particularly relevant in the case of recommender systems designed for mobile users, as the users may need to interact with a recommender system using a mobile device while on the move. For example, more research could be devoted to the design of critique-based recommenders for mobile users, such as MobyRek [316] and Shopr [197].
- There is a need for the development of *generic and flexible architectures* that facilitate the creation of context-aware recommender systems for mobile environments. This aspect should be analyzed, given the interest of having a generic solution that can be extended and adapted to different applications and domains [224,317]. As described in Section 4.1, some context-aware mobile recommender systems have already been developed, but they focus mostly on

specific domains (e.g., restaurants, museums, gas stations, supermarkets, foods, etc.) [273,318–321].

- Research on *push-based recommender systems* is still in its infancy. Most context-aware recommender systems require users to explicitly express their interests and information needs as a query (explicit request). Currently, due to limitations of mobile devices (e.g., typing data using a small device is inconvenient), a key challenge is how to *proactively deliver relevant recommendations* to the user's mobile device [273, 274].
- There is *no common methodology established for the evaluation of mobile CARS*. Some works deploy real implementations and test the usability of the systems by asking the users to fill out questionnaires to capture the user satisfaction [233,239,240,242,243,273,274]. The *lack of public datasets available* and the emergence of *new evaluation measures* different from the classical ones (e.g., MAE, RMSE, precision, recall, and F-measure score), such as the combination of metrics (e.g., combining the accuracy and the diversity with the latency) or the incorporation of context parameters in existing measures, are currently critical challenges [322]. As claimed in [323], determining what makes a good recommendation is not an easy task and the expected utility of a recommendation is a function of the item's features, the context, and the user's goals (indeed, "What we like may not be what we choose"). Besides, many of the mobile CARS presented in this paper are evaluated with custom-built datasets (e.g., [229,238,241,248]) and through

- survey scores (questions) [26,233,234,236,238–240,242,243, 250,273,274], which limits the generality of the results.
- There are not many *practical mobile context-aware recommendation applications*, especially in real business domains. Indeed, most research on CARS has been conceptual and there has been little work done on developing practical applications for CARS [32]. Generally, researchers implement a context-aware recommendation model, which is tested (using datasets) and compared with other models proposed in the literature of the same domain.
  - Another current challenge is to guarantee a suitable *privacy protection*. Mobile CARS must be able to include privacy protection techniques that protect users' personal and contextual information (e.g., location, preferences, etc.).
  - Only a few approaches have recently considered that mobile users may move in groups. As this situation may happen frequently, it is relevant to study in more depth how to develop mobile CARS that offer item recommendations to *groups of users* (e.g., a tourism group) [240,324]. These approaches should consider the preferences of the different persons in the group and criteria such as fairness for all the users and maximum utility for the group.

In Fig. 15, we show a summary of relevant challenges hierarchically related considering traditional RS, CARS and mobile CARS.

#### CRediT authorship contribution statement

**María del Carmen Rodríguez-Hernández:** Conceptualization, Investigation, Writing - original draft. **Sergio Ilarri:** Conceptualization, Investigation, Methodology, Writing - review & editing, Project administration, Funding acquisition.

#### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

#### Acknowledgments

This research has been supported by the project TIN2016-78011-C4-3-R (AEI/FEDER, UE) and the Government of Aragon (Group Reference T64\_20R, COSMOS research group). We are also exploring mobile CARS in the context of the TRAFAIR project (2017-EU-IA-0167), co-financed by the Connecting Europe Facility of the European Union.

#### References

- [1] Google, Google Play, 2020, Last (Access: 29 December 2020), URL <https://play.google.com/store/search?q=tourism%20madrid&c=apps&hl=es>.
- [2] D.H. Park, H.K. Kim, I.Y. Choi, J.K. Kim, A literature review and classification of recommender systems research, Expert Syst. Appl. 39 (11) (2012) 10059–10072, <http://dx.doi.org/10.1016/j.eswa.2012.02.038>.
- [3] J. Lu, D. Wu, M. Mao, W. Wang, G. Zhang, Recommender system application developments: A survey, Decis. Support Syst. 74 (Suppl. C) (2015) 12–32, <http://dx.doi.org/10.1016/j.dss.2015.03.008>.
- [4] F. Ricci, L. Rokach, B. Shapira, P.B. Kantor, Recommender Systems Handbook, Springer, 2011, <http://dx.doi.org/10.1007/978-0-387-85820-3>.
- [5] J. Bobadilla, F. Ortega, A. Hernando, A. Gutiérrez, Recommender systems survey, Knowl.-Based Syst. 46 (2013) 109–132, <http://dx.doi.org/10.1016/j.knosys.2013.03.012>.
- [6] B. Kumar, N. Sharma, Approaches, issues and challenges in recommender systems: A systematic review, Indian J. Sci. Technol. 9 (47) (2016) 1–12, <http://dx.doi.org/10.17485/ijst/2016/v9i47/94892>.
- [7] K. Wei, J. Huang, S. Fu, A survey of E-commerce recommender systems, in: International Conference on Service Systems and Service Management, ICSSSM, IEEE, 2007, pp. 1–5, <http://dx.doi.org/10.1109/ICSSSM.2007.4280214>.
- [8] Z. Lin, An empirical investigation of user and system recommendations in E-commerce, Decis. Support Syst. 68 (2014) 111–124, <http://dx.doi.org/10.1016/j.dss.2014.10.003>.
- [9] P. Omidyar, eBay, Multinational E-commerce corporation, 1995, Last (Access: 29 December 2020), URL <http://www.ebay.com>.
- [10] J.B. Schafer, J.A. Konstan, J. Riedl, E-commerce recommendation applications, in: R. Kohavi, F. Provost (Eds.), Applications of Data Mining To Electronic Commerce, Vol. 5, Springer, Boston, MA (USA), 2001, pp. 115–153, [http://dx.doi.org/10.1007/978-1-4615-1627-9\\_6](http://dx.doi.org/10.1007/978-1-4615-1627-9_6), A Special Issue of Data Mining and Knowledge Discovery.
- [11] M. Zuckerberg, E. Saverin, C. Hughes, D. Moskovitz, Facebook, 2007, Last (Access: 29 December 2020), URL <https://www.facebook.com>.
- [12] B. Shapira, L. Rokach, S. Freilikhman, Facebook single and cross domain data for recommendation systems, User Model. User-Adapt. Interact. 23 (2) (2013) 211–247, <http://dx.doi.org/10.1007/s11257-012-9128-x>.
- [13] R. Hastings, M. Randolph, Netflix, American entertainment company, 1997, Last (Access: 29 December 2020), URL <https://www.netflix.com>.
- [14] C.A. Gomez-Uribe, N. Hunt, The Netflix recommender system: Algorithms, business value, and innovation, ACM Trans. Manage. Inf. Syst. 6 (4) (2016) 1–19, <http://dx.doi.org/10.1145/2843948>.
- [15] J. Bezos, Amazon, American electronic commerce and cloud computing company, 1994, Last (Access: 29 December 2020), URL <https://www.amazon.com>.
- [16] B. Smith, G. Linden, Two decades of recommender systems at Amazon.com, IEEE Internet Comput. 21 (3) (2017) 12–18, <http://dx.doi.org/10.1109/MIC.2017.72>.
- [17] Startup Spotify AB, Spotify, 2008, Last (Access: 29 December 2020), URL <https://www.spotify.com>.
- [18] K. Jacobson, V. Murali, E. Newett, B. Whitman, R. Yon, Music personalization at spotify, in: 10th ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2016, p. 373, <http://dx.doi.org/10.1145/2959100.2959120>.
- [19] J. Kraft, W. Glaser, T. Westergren, Pandora, Pandora internet radio and music genome project, 2000, Last (Access: 29 December 2020), URL <http://www.pandora.com>.
- [20] M. Chen, S. Mao, Y. Liu, Big Data: A survey, Mob. Netw. Appl. 19 (2) (2014) 171–209, <http://dx.doi.org/10.1007/s11036-013-0489-0>.
- [21] C. Lehmann, K. Roy, B. Winter, The state of enterprise data quality: 2016 – perception, reality and the future of DQM, 2016, Last (Access: 29 December 2020), URL [https://siliconangle.com/files/2016/01/Blazent\\_State\\_of\\_Data\\_Quality\\_Management\\_2016.pdf](https://siliconangle.com/files/2016/01/Blazent_State_of_Data_Quality_Management_2016.pdf).
- [22] V.F. López, R.E. Salamanca, M.N. Moreno, A.B. Gil, J.M. Corchado, A knowledge-based recommender agent to choosing a competition system, in: J. Bajo, J.Z. Hernández, P. Mathieu, A. Campbell, A. Fernández-Caballero, M.N. Moreno, V. Julián, A. Alonso-Betanzos, M.D. Jiménez-López, V. Botti (Eds.), Trends in Practical Applications of Agents, Multi-Agent Systems and Sustainability, AISC, in: Advances in Intelligent Systems and Computing, vol. 372, Springer, Cham, 2015, pp. 143–150, [http://dx.doi.org/10.1007/978-3-319-19629-9\\_16](http://dx.doi.org/10.1007/978-3-319-19629-9_16).
- [23] E. Majd, V. Balakrishnan, A trust model for recommender agent systems, Soft Comput. 21 (2) (2017) 417–433, <http://dx.doi.org/10.1007/s00500-016-2036-y>.
- [24] I. Portugal, P. Alencar, D. Cowan, The use of machine learning algorithms in recommender systems: a systematic review, Expert Syst. Appl. 97 (2017) 205–227, <http://dx.doi.org/10.1016/j.eswa.2017.12.020>.
- [25] L. Ogiela, Cognitive informatics in automatic pattern understanding and cognitive information systems, in: Y. Wang, D. Zhang, W. Kinsner (Eds.), Studies in Computational Intelligence, in: Studies in Computational Intelligence (SCI), vol. 323, Springer, Berlin, Heidelberg, 2010, pp. 209–226, [http://dx.doi.org/10.1007/978-3-642-16083-7\\_11](http://dx.doi.org/10.1007/978-3-642-16083-7_11).
- [26] S. Missaoui, F. Kassem, M. Viviani, A. Agostini, R. Faiz, G. Pasi, LOOKER: a mobile, personalized recommender system in the tourism domain based on social media user-generated content, Pers. Ubiquitous Comput. 23 (2) (2019) 181–197, <http://dx.doi.org/10.1007/s00779-018-01194-w>.
- [27] A.V. Smirnov, A.M. Kashevnik, A. Ponomarev, Context-based infomobility system for cultural heritage recommendation: Tourist assistant-TAIS, Pers. Ubiquitous Comput. 21 (2) (2017) 297–311, <http://dx.doi.org/10.1007/s00779-016-0990-0>.
- [28] R. Hermoso, S. Ilarri, R. Trillo-Lado, Re-CoSKQ: Towards POIs recommendation using collective spatial keyword queries, in: ACM RecSys Workshop on Recommenders in Tourism (RecTour), in Conjunction with the 13th ACM Conference on Recommender Systems, Vol. 2435, RecSys, 2019, pp. 42–45, CEUR Workshop Proceedings.
- [29] G. Adomavicius, A. Tuzhilin, Context-aware recommender systems, in: F. Ricci, L. Rokach, B. Shapira, P.B. Kantor (Eds.), Recommender Systems Handbook, Springer, 2011, pp. 217–253, [http://dx.doi.org/10.1007/978-0-387-85820-3\\_7](http://dx.doi.org/10.1007/978-0-387-85820-3_7).
- [30] G. Adomavicius, R. Sankaranarayanan, S. Sen, A. Tuzhilin, Incorporating contextual information in recommender systems using a multidimensional approach, ACM Trans. Inf. Syst. 23 (1) (2005) 103–145, <http://dx.doi.org/10.1145/1055709.1055714>.

- [31] G. Adomavicius, A. Tuzhilin, Context-aware recommender systems, in: Second ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2008, pp. 335–336, <http://dx.doi.org/10.1145/1454008.1454068>.
- [32] G. Adomavicius, B. Mobasher, F. Ricci, A. Tuzhilin, Context-aware recommender systems, *AI Mag.* 32 (3) (2011) 67–80, <http://dx.doi.org/10.1609/aimag.v32i3.2364>.
- [33] Q. Liu, H. Ma, E. Chen, H. Xiong, A survey of context-aware mobile recommendations, *Int. J. Inf. Technol. Decis. Mak.* 12 (1) (2013) 139–172, <http://dx.doi.org/10.1142/S0219622013500077>.
- [34] M. del Carmen Rodríguez-Hernández, S. Ilarri, R. Trillo-Lado, R. Hermoso, Location-aware recommendation systems: Where we are and where we recommend to go, in: International Workshop Location-Aware Recommendations, Vol. 1405, LocalRec, 2015, pp. 1–8, CEUR Workshop Proceedings.
- [35] K. Verbert, E. Duval, S.N. Lindstaedt, D. Gillet, Context-aware recommender systems, *J. UCS* 16 (16) (2010) 2175–2178.
- [36] N.Y. Asabere, Towards a viewpoint of context-aware recommender systems (CARS) and services, *Int. J. Comput. Sci. Telecommun.* 4 (1) (2013) 10–29.
- [37] A. Abbas, L. Zhang, S.U. Khan, A survey on context-aware recommender systems based on computational intelligence techniques, *Computing* 97 (7) (2015) 667–690, <http://dx.doi.org/10.1007/s00607-015-0448-7>.
- [38] N.M. Villegas, C. Sánchez, J. Díaz-Cely, G. Tamura, Characterizing context-aware recommender systems: A systematic literature review, *Knowl.-Based Syst.* 140 (2018) 173–200, <http://dx.doi.org/10.1016/j.knosys.2017.11.003>.
- [39] S. Raza, C. Ding, Progress in context-aware recommender systems – An overview, *Comp. Sci. Rev.* 31 (2019) 84–97, <http://dx.doi.org/10.1016/j.cosrev.2019.01.001>.
- [40] W. Woerndl, M. Brocco, R. Eigner, Context-aware recommender systems in mobile scenarios, *Int. J. Inf. Technol. Web Eng.* 4 (1) (2009) 67–85, <http://dx.doi.org/10.4018/jitwe.2009010105>.
- [41] I.B. Sassi, S. Mellouli, S.B. Yahia, Context-aware recommender systems in mobile environment: On the road of future research, *Inf. Syst.* 72 (2017) 27–61, <http://dx.doi.org/10.1016/j.is.2017.09.001>.
- [42] S. Ilarri, T. Delot, R. Trillo-Lado, A data management perspective on vehicular networks, *IEEE Commun. Surv. Tutor.* 17 (4) (2015) 2420–2460, <http://dx.doi.org/10.1109/COMST.2015.2472395>.
- [43] G.H. Forman, J. Zahorjan, The challenges of mobile computing, *Computer* 27 (4) (1994) 38–47, <http://dx.doi.org/10.1109/2.274999>.
- [44] S. Frattasi, H. Fathi, F.H. Fitzek, R. Prasad, M.D. Katz, Defining 4G technology from the users perspective, *IEEE Netw.* 20 (1) (2006) 35–41, <http://dx.doi.org/10.1109/MNET.2006.1580917>.
- [45] A. Agarwal, K. Agarwal, The next generation mobile wireless cellular networks—4G and beyond, *Am. J. Electr. Electron. Eng.* 2 (3) (2014) 92–97, <http://dx.doi.org/10.12691/ajeee-2-3-6>.
- [46] M. Agiwal, A. Roy, N. Saxena, Next generation 5G wireless networks: A comprehensive survey, *IEEE Commun. Surv. Tutor.* 18 (3) (2016) 1617–1655, <http://dx.doi.org/10.1109/COMST.2016.2532458>.
- [47] J.-S. Lee, Y.-W. Su, C.-C. Shen, A comparative study of wireless protocols: Bluetooth, UWB, ZigBee, and Wi-Fi, in: 33rd Annual Conference of the IEEE Industrial Electronics Society, IECON, IEEE, 2007, pp. 46–51, <http://dx.doi.org/10.1109/IECON.2007.4460126>.
- [48] M. Sengaliappan, K. Kumaravel, Analysis study of wireless technology and its communication standards using IEEE 802.11, *Analysis* 4 (6) (2017) 4061–4066.
- [49] J.S. Wilson, *Sensor Technology Handbook*, Elsevier, 2004.
- [50] C. Jouvray, S. Gerard, F. Terrier, S. Bouaziz, R. Reynaud, UML methodology for smart transducer integration in real-time embedded systems, in: IEEE Intelligent Vehicles Symposium, IEEE, 2005, pp. 688–693, <http://dx.doi.org/10.1109/IVS.2005.1505183>.
- [51] S. Ilarri, O. Wolfson, T. Delot, Collaborative sensing for urban transportation, in: D. Maier, V.M. Megler, K. Tufte (Eds.), *IEEE Data Eng. Bull.* 37 (4) (2014) 3–14, Special Issue on Urban Informatics.
- [52] S. Ilarri, R. Hermoso, R. Trillo-Lado, M. del Carmen Rodríguez-Hernández, A review of the role of sensors in mobile context-aware recommendation systems, *Int. J. Distrib. Sens. Netw.* 11 (11) (2015) 1–30, <http://dx.doi.org/10.1155/2015/489264>.
- [53] S. Kabadyai, A. Pridgen, C. Julien, Virtual sensors: Abstracting data from physical sensors, in: International Symposium on World of Wireless, Mobile and Multimedia Networks, WOWMOM, IEEE, Washington (USA), 2006, pp. 587–592, <http://dx.doi.org/10.1109/WOWMOM.2006.115>.
- [54] A. Rosi, M. Mamei, F. Zambonelli, Integrating social sensors and pervasive services: Approaches and perspectives, *Int. J. Pervasive Comput. Commun.* (2013) 294–310, <http://dx.doi.org/10.1108/IJPC-09-2013-0022>.
- [55] M.-D. Albakour, C. Macdonald, I. Onnis, Identifying local events by using microblogs as social sensors, in: 10th Conference on Open Research Areas in Information Retrieval, OAIR, ACM, Paris (France), 2013, pp. 173–180.
- [56] M.F. Goodchild, Citizens as sensors: The world of volunteered geography, *GeoJournal* 69 (4) (2007) 211–221.
- [57] L. Kazemi, C. Shahabi, GeoCrowd: Enabling query answering with spatial crowdsourcing, in: 20th SIGSPATIAL International Conference on Advances in Geographic Information Systems, GIS, ACM, New York (USA), 2012, pp. 189–198, <http://dx.doi.org/10.1145/2424321.2424346>.
- [58] O. Urra, S. Ilarri, Spatial crowdsourcing with mobile agents in vehicular networks, *Veh. Commun.* 17 (2019) 10–34, <http://dx.doi.org/10.1016/j.vehcom.2019.03.004>.
- [59] A.T. Campbell, S.B. Eisenman, N.D. Lane, E. Miluzzo, R.A. Peterson, People-centric urban sensing, in: Second Annual International Workshop on Wireless Internet, WICON, ACM, New York (USA), 2006, pp. 1–14, <http://dx.doi.org/10.1145/1234161.1234179>.
- [60] R.K. Ganti, F. Ye, H. Lei, Mobile crowdsensing: Current state and future challenges, *IEEE Commun. Mag.* 49 (11) (2011) 32–39, <http://dx.doi.org/10.1109/MCOM.2011.6069707>.
- [61] N.D. Lane, E. Miluzzo, H. Lu, D. Peebles, T. Choudhury, A.T. Campbell, A survey of mobile phone sensing, *Commun. Mag.* 48 (9) (2010) 140–150, <http://dx.doi.org/10.1109/MCOM.2010.5560598>.
- [62] S. Consolvo, D.W. McDonald, T. Toscos, M.Y. Chen, J. Froehlich, B. Harrison, P. Klasnja, A. LaMarca, L. LeGrand, R. Libby, I. Smith, J.A. Landay, Activity sensing in the wild: A field trial of Ubifit Garden, in: SIGCHI International Conference on Human Factors in Computing Systems, CHI, ACM, New York (USA), 2008, pp. 1797–1806, <http://dx.doi.org/10.1145/1357054.1357335>.
- [63] E. Miluzzo, N.D. Lane, K. Fodor, R. Peterson, H. Lu, M. Musolesi, S.B. Eisenman, X. Zheng, A.T. Campbell, Sensing meets mobile social networks: The design, implementation and evaluation of the CenceMe application, in: Sixth ACM Conference on Embedded Network Sensor Systems, SenSys, ACM, New York (USA), 2008, pp. 337–350, <http://dx.doi.org/10.1145/1460412.1460445>.
- [64] M. Mun, S. Reddy, K. Shilton, N. Yau, J. Burke, D. Estrin, M. Hansen, E. Howard, R. West, P. Boda, PEIR, the Personal Environmental Impact Report, as a platform for participatory sensing systems research, in: Seventh International Conference on Mobile Systems, Applications, and Services, MobiSys, ACM, New York (USA), 2009, pp. 55–68, <http://dx.doi.org/10.1145/1555816.1555823>.
- [65] A. Thiagarajan, L. Ravindranath, K. LaCurts, S. Madden, H. Balakrishnan, S. Toledo, J. Eriksson, VTrack: Accurate, energy-aware road traffic delay estimation using mobile phones, in: Seventh ACM Conference on Embedded Networked Sensor Systems, SenSys, ACM, New York (USA), 2009, pp. 85–98, <http://dx.doi.org/10.1145/1644038.1644048>.
- [66] B. Fleming, Sensors – A forecast [Automotive Electronics], *IEEE Veh. Technol. Mag.* 8 (3) (2013) 4–12, <http://dx.doi.org/10.1109/MVT.2013.2268420>.
- [67] K. Verbert, N. Manouselis, X. Ochoa, M. Wolpers, H. Drachsler, I. Bosnic, E. Duval, Context-aware recommender systems for learning: A survey and future challenges, *IEEE Trans. Learn. Technol.* 5 (4) (2012) 318–335, <http://dx.doi.org/10.1109/TLT.2012.11>.
- [68] O.C. Santos, J. Granado, E. Raffenae, J.G. Boticario, Offering recommendations in OpenACS/dotLRN, in: Seventh International Conference on Community Based Environments, 2008, pp. 37–46.
- [69] R. Schirru, S. Baumann, M. Memmel, A. Dengel, Extraction of contextualized user interest profiles in social sharing platforms, *J. UCS* 16 (16) (2010) 2196–2213, <http://dx.doi.org/10.3217/jucs-016-16-2196>.
- [70] R. Zhou, K. Rechert, Personalization for location-based E-learning, in: Second International Conference on Next Generation Mobile Applications, Services, and Technologies, NGMAST, IEEE, 2008, pp. 247–253, <http://dx.doi.org/10.1109/NGMAST.2008.20>.
- [71] N. Bulusu, J. Heidemann, D. Estrin, GPS-less low-cost outdoor localization for very small devices, *IEEE Personal Commun.* 7 (5) (2000) 28–34, <http://dx.doi.org/10.1109/98.878533>.
- [72] J. Bao, Y. Zheng, M.F. Mokbel, Location-based and preference-aware recommendation using sparse geo-social networking data, in: 20th International Conference on Advances in Geographic Information Systems, SIGSPATIAL, ACM, New York (USA), 2012, pp. 199–208, <http://dx.doi.org/10.1145/2424321.2424348>.
- [73] M. Braunhofer, M. Kaminskas, F. Ricci, Location-aware music recommendation, *Int. J. Multimedia Inf. Retr.* 2 (1) (2013) 31–44, <http://dx.doi.org/10.1007/s13735-012-0032-2>.
- [74] H. Zou, H. Jiang, Y. Luo, J. Zhu, X. Lu, L. Xie, BlueDetect: An iBeacon-Enabled scheme for accurate and energy-efficient indoor-outdoor detection and seamless location-based service, *Sensors* 16 (2) (2016) 268.
- [75] X. Teng, D. Guo, Y. Guo, X. Zhou, Z. Ding, Z. Liu, IONavi: An indoor-outdoor navigation service via mobile crowdsensing, *ACM Trans. Sensor Netw.* 13 (2) (2017) 12:1–12:28, <http://dx.doi.org/10.1145/3043948>.
- [76] T. Horozov, N. Narasimhan, V. Vasudevan, Using location for personalized POI recommendations in mobile environments, in: International Symposium on Applications and the Internet, SAINT, IEEE, 2006, pp. 124–129, <http://dx.doi.org/10.1109/SAINT.2006.55>.

- [77] J. Das, S. Majumder, P. Gupta, Voronoi based location aware collaborative filtering, in: Third National Conference on Emerging Trends and Applications in Computer Science, NCETACS, IEEE, 2012, pp. 179–183, <http://dx.doi.org/10.1109/NCETACS.2012.6203322>.
- [78] Y. Takeuchi, M. Sugimoto, An outdoor recommendation system based on user location history, in: H. Ko, A. Krüger, S.-G. Lee, W. Woo (Eds.), First International Workshop on Personalized Context Modeling and Management for UbiComp Applications, UbiPCMM, CEUR Workshop Proceedings, 2005, pp. 91–100.
- [79] Y. Takeuchi, M. Sugimoto, CityVoyager: An outdoor recommendation system based on user location history, in: J. Ma, H. Jin, L.T. Yang, J.J.P. Tsai (Eds.), Third International Conference on Ubiquitous Intelligence and Computing, UIC, in: Lecture Notes in Computer Science (LNCS), vol. 4159, Springer, Berlin, Heidelberg, 2006, pp. 625–636, [http://dx.doi.org/10.1007/11833529\\_64](http://dx.doi.org/10.1007/11833529_64).
- [80] M. Clements, P. Serdyukov, A.P. de Vries, M.J.T. Reinders, Personalised travel recommendation based on location co-occurrence, 2011, pp. 1–30, CoRR abs/1106.5213.
- [81] M.M. El-Bishouty, H. Ogata, Y. Yano, PERKAM: Personalized knowledge awareness map for computer supported ubiquitous learning, *J. Educ. Technol. Soc.* 10 (3) (2007) 122–134.
- [82] L. Mainetti, L. Patrono, I. Sergi, A survey on indoor positioning systems, in: 22nd International Conference on Software, Telecommunications and Computer Networks, SoftCOM, IEEE, 2014, pp. 111–120, <http://dx.doi.org/10.1109/SOFTCOM.2014.7039067>.
- [83] P. Davidson, R. Piche, A survey of selected indoor positioning methods for Smartphones, *IEEE Commun. Surv. Tutor.* 19 (2) (2016) 1347–1370, <http://dx.doi.org/10.1109/COMST.2016.2637663>.
- [84] J. Xiao, Z. Zhou, Y. Yi, L.M. Ni, A survey on wireless indoor localization from the device perspective, *ACM Comput. Surv.* 49 (2) (2016) 1–31, <http://dx.doi.org/10.1145/2933232>.
- [85] T. Haute, E. Poorter, P. Crombez, F. Lemic, V. Handziski, N. Wirström, A. Wolisz, T. Voigt, I. Moerman, Performance analysis of multiple indoor positioning systems in a healthcare environment, *Int. J. Health Geogr.* 15 (1) (2016) 1–15, <http://dx.doi.org/10.1186/s12942-016-0034-z>.
- [86] S.A. Petersen, J.-K. Markiewicz, PALLAS: Personalised language learning on mobile devices, in: Fifth IEEE International Conference on Wireless, Mobile, and Ubiquitous Technology in Education, WMUTE, IEEE, 2008, pp. 52–59, <http://dx.doi.org/10.1109/WMUTE.2008.17>.
- [87] G.-D. Chen, P.-Y. Chao, Augmenting traditional books with context-aware learning supports from online learning communities, *J. Educ. Technol. Soc.* 11 (2) (2008) 27–40.
- [88] Y. Liu, T.-A.N. Pham, G. Cong, Q. Yuan, An experimental evaluation of Point-of-Interest recommendation in location-based social networks, *VLDB Endow.* 10 (10) (2017) 1010–1021.
- [89] S.E. Helou, C. Salzmann, D. Gillet, The 3A personalized, contextual and relation-based recommender system, *J. UCS* 16 (16) (2010) 2179–2195, <http://dx.doi.org/10.3217/jucs-016-16-2179>.
- [90] M. Baldauf, S. Dustdar, F. Rosenberg, A survey on context-aware systems, *Int. J. Ad Hoc Ubiquitous Comput.* 2 (4) (2007) 263–277, <http://dx.doi.org/10.1504/IJAHUC.2007.014070>.
- [91] Y. Cui, S. Bull, Context and learner modelling for the mobile foreign language learner, *System* 33 (2) (2005) 353–367, <http://dx.doi.org/10.1016/j.system.2004.12.008>.
- [92] D.C.-E. Teng, N.-S. Chen, C.-H. Lee, Enhancing English reading comprehension by integrating direct access to digital materials and Scaffolded questionings in paper prints, in: 11th IEEE International Conference on Advanced Learning Technologies, ICALT, IEEE, 2011, pp. 244–248, <http://dx.doi.org/10.1109/ICALT.2011.77>.
- [93] G. Chen, D. Kotz, A survey of context-aware mobile computing research, Tech. Rep., (TR2000-381) Dartmouth College, Dartmouth College, Department of Computer Science, Hanover (USA), 2000.
- [94] G.W. Musumba, H.O. Nyongesa, Context awareness in mobile computing: A review, *Int. J. Mach. Learn. Appl.* 2 (1) (2013) 1–10, <http://dx.doi.org/10.4102/ijmla.v2i1.5>.
- [95] B. Schiltz, N. Adams, R. Want, Context-aware computing applications, in: First Workshop on Mobile Computing Systems and Applications, WMCSA, IEEE, 1994, pp. 85–90, <http://dx.doi.org/10.1109/WMCSA.1994.16>.
- [96] B. Chihani, E. Bertin, F. Jeanne, N. Crespi, Context-aware systems: A case study, in: H. Cherifi, J.M. Zain, E. El-Qawasmeh (Eds.), International Conference on Digital Information and Communication Technology and Its Applications, DICTAP, in: Communications in Computer and Information Science (CCIS), vol. 167, Springer, Berlin, Heidelberg, 2011, pp. 718–732, [http://dx.doi.org/10.1007/978-3-642-22027-2\\_60](http://dx.doi.org/10.1007/978-3-642-22027-2_60).
- [97] A. Fortier, C. Challiol, J.L. Fernández, S. Robles, G. Rossi, S. Gordillo, Exploiting personal web servers for mobile context-aware applications, *Knowl. Eng. Rev.* 29 (02) (2014) 134–153.
- [98] S. Bobek, G.J. Nalepa, Uncertainty handling in rule-based mobile context-aware systems, *Pervasive Mob. Comput.* (2016) 1–21, <http://dx.doi.org/10.1016/j.pmcj.2016.09.004>.
- [99] A. Alti, A. Lakehal, S. Laborie, P. Roose, Autonomic semantic-based context-aware platform for mobile applications in pervasive environments, *Fut. Internet* 8 (4) (2016) 1–48, <http://dx.doi.org/10.3390/fi8040048>.
- [100] F. Clarizia, S. Lemma, M. Lombardi, F. Pascale, A mobile context-aware information system to support tourism events, in: M. Au, A. Castiglione, K.-K. Choo, F. Palmieri, K.-C. Li (Eds.), 12th International Conference on Green, Pervasive, and Cloud Computing, GPC, in: Lecture Notes in Computer Science (LNCS), vol. 10232, Springer, 2017, pp. 553–566, [http://dx.doi.org/10.1007/978-3-319-57186-7\\_40](http://dx.doi.org/10.1007/978-3-319-57186-7_40).
- [101] C. Hoareau, I. Satoh, Modeling and processing information for context-aware computing: A survey, *New Gener. Comput.* 27 (3) (2009) 177–196, <http://dx.doi.org/10.1007/s00354-009-0060-5>.
- [102] G.D. Abowd, A.K. Dey, P.J. Brown, N. Davies, M. Smith, P. Steggles, Towards a better understanding of context and context-awareness, in: H.-W. Gellersen (Ed.), First International Symposium on Handheld and Ubiquitous Computing, HUC, in: Lecture Notes in Computer Science (LNCS), vol. 1707, Springer, Berlin, Heidelberg, 1999, pp. 304–307, [http://dx.doi.org/10.1007/3-540-48157-5\\_29](http://dx.doi.org/10.1007/3-540-48157-5_29).
- [103] A.K. Dey, Understanding and using context, *Pers. Ubiquitous Comput.* 5 (1) (2001) 4–7, <http://dx.doi.org/10.1007/s007790170019>.
- [104] P. Dourish, What we talk about when we talk about context, *Pers. Ubiquitous Comput.* 8 (1) (2004) 19–30, <http://dx.doi.org/10.1007/s00779-003-0253-8>.
- [105] K. Henricksen, J. Indulska, A. Rakotonirainy, Modeling context information in pervasive computing systems, in: F. Mattern, M. Naghshineh (Eds.), First International Conference on Pervasive Computing, in: Lecture Notes in Computer Science (LNCS), vol. 2414, Springer, Berlin, Heidelberg, 2002, pp. 167–180, [http://dx.doi.org/10.1007/3-540-45866-2\\_14](http://dx.doi.org/10.1007/3-540-45866-2_14).
- [106] A. Pashtan, *Mobile Web Services*, Cambridge University Press, 2005, p. 263.
- [107] C. Perera, A. Zaslavsky, P. Christen, D. Georgakopoulos, Context aware computing for the Internet of Things: A survey, *IEEE Commun. Surv. Tutor.* 16 (1) (2014) 414–454, <http://dx.doi.org/10.1109/SURV.2013.042313.00197>.
- [108] Ö. Yürür, C.H. Liu, Z. Sheng, V.C.M. Leung, W. Moreno, K.K. Leung, Context-awareness for mobile sensing: A survey and future directions, *IEEE Commun. Surv. Tutor.* 18 (1) (2016) 68–93, <http://dx.doi.org/10.1109/COMST.2014.2381246>.
- [109] G. Adamavicius, A. Tuzhilin, Towards the next generation of recommender systems: A survey of the state-of-the-art and possible extensions, *IEEE Trans. Knowl. Data Eng.* 17 (6) (2005) 734–749, <http://dx.doi.org/10.1109/TKDE.2005.99>.
- [110] J.B. Schafer, D. Frankowski, J. Herlocker, S. Sen, *The Adaptive Web: Methods and Strategies of Web Personalization*, Springer, 2007, pp. 291–324, [http://dx.doi.org/10.1007/978-3-540-72079-9\\_9](http://dx.doi.org/10.1007/978-3-540-72079-9_9).
- [111] Y. Shi, M. Larson, A. Hanjalic, Collaborative filtering beyond the user-item matrix: A survey of the state of the art and future challenges, *ACM Comput. Surv.* 47 (1) (2014) 1–45, <http://dx.doi.org/10.1145/2556270>.
- [112] X. Su, T.M. Khoshgoftaar, A survey of collaborative filtering techniques, *Adv. Artif. Intell.* 2009 (2009) 1–19, <http://dx.doi.org/10.1155/2009/421425>.
- [113] Z. Jia, Y. Yang, W. Gao, X. Chen, User-based collaborative filtering for tourist attraction recommendations, in: 2015 IEEE International Conference on Computational Intelligence Communication Technology, IEEE, 2015, pp. 22–25, <http://dx.doi.org/10.1109/CICT.2015.20>.
- [114] B. Sarwar, G. Karypis, J. Konstan, J. Riedl, Item-based collaborative filtering recommendation algorithms, in: 10th International Conference on World Wide Web, WWW, ACM, New York (USA), 2001, pp. 285–295, <http://dx.doi.org/10.1145/371920.372071>.
- [115] M.J. Pazzani, D. Billsus, *The Adaptive Web: Methods and Strategies of Web Personalization*, Springer, 2007, pp. 325–341, [http://dx.doi.org/10.1007/978-3-540-72079-9\\_10](http://dx.doi.org/10.1007/978-3-540-72079-9_10).
- [116] P. Lops, M.D. Gemmis, G. Semeraro, *Recommender Systems Handbook*, Springer, Boston (USA), 2011, pp. 73–105, [http://dx.doi.org/10.1007/978-0-387-85820-3\\_3](http://dx.doi.org/10.1007/978-0-387-85820-3_3).
- [117] G. Salton, M.J. McGill, *Introduction to Modern Information Retrieval*, McGraw-Hill, Inc., New York (USA), 1986.
- [118] R. Baeza-Yates, B. Ribeiro-Neto, *Modern Information Retrieval*, Vol. 463, ACM Press New York, 1999.
- [119] C.D. Manning, P. Raghavan, H. Schütze, *Introduction to Information Retrieval*, Vol. 1, Cambridge University Press Cambridge, 2008.
- [120] R. Burke, Hybrid web recommender systems, in: P. Brusilovsky, A. Kobsa, W. Nejdl (Eds.), *The Adaptive Web: Methods and Strategies of Web Personalization*, Springer, 2007, pp. 377–408, [http://dx.doi.org/10.1007/978-3-540-72079-9\\_12](http://dx.doi.org/10.1007/978-3-540-72079-9_12).
- [121] H.J. Ahn, A new similarity measure for collaborative filtering to alleviate the new user cold-starting problem, *Inform. Sci.* 178 (1) (2008) 37–51, <http://dx.doi.org/10.1016/j.ins.2007.07.024>.

- [122] A.I. Schein, A. Popescul, L.H. Ungar, D.M. Pennock, Methods and metrics for cold-start recommendations, in: 25th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR, ACM, New York (USA), 2002, pp. 253–260, <http://dx.doi.org/10.1145/564376.564421>.
- [123] X.N. Lam, T. Vu, T.D. Le, A.D. Duong, Addressing cold-start problem in recommendation systems, in: Second International Conference on Ubiquitous Information Management and Communication, ICUIMC, ACM, New York (USA), 2008, pp. 208–211, <http://dx.doi.org/10.1145/1352793.1352837>.
- [124] J. Bobadilla, F. Ortega, A. Hernando, J. Bernal, A collaborative filtering approach to mitigate the new user cold start problem, *Knowl.-Based Syst.* 26 (2012) 225–238, <http://dx.doi.org/10.1016/j.knosys.2011.07.021>.
- [125] D. Zhang, Q. Zou, H. Xiong, CRUC: Cold-start recommendations using collaborative filtering in Internet of Things, 2013, pp. 1–8, CoRR abs/1306.0165.
- [126] B. Liká, K. Kolomvatsos, S. Hadjiefthymiades, Facing the cold start problem in recommender systems, *Expert Syst. Appl.* 41 (4) (2014) 2065–2073, <http://dx.doi.org/10.1016/j.eswa.2013.09.005>.
- [127] L. Hu, L. Cao, J. Cao, Z. Gu, G. Xu, D. Yang, Learning informative priors from heterogeneous domains to improve recommendation in cold-start user domains, *ACM Trans. Inf. Syst.* 35 (2) (2016) 13:1–13:37, <http://dx.doi.org/10.1145/2976737>.
- [128] L.H. Son, Dealing with the new user cold-start problem in recommender systems: A comparative review, *Inf. Syst.* 58 (2016) 87–104, <http://dx.doi.org/10.1016/j.is.2014.10.001>.
- [129] J. Wei, J. He, K. Chen, Y. Zhou, Z. Tang, Collaborative filtering and deep learning based recommendation system for cold start items, *Expert Syst. Appl.* 69 (2017) 29–39, <http://dx.doi.org/10.1016/j.eswa.2016.09.040>.
- [130] A. Hernando, J. Bobadilla, F. Ortega, A. Gutiérrez, A probabilistic model for recommending to new cold-start non-registered users, *Inform. Sci.* 376 (2017) 216–232, <http://dx.doi.org/10.1016/j.ins.2016.10.009>.
- [131] J. Xu, Y. Yao, H. Tong, X. Tao, J. Lu, RaPare: A generic strategy for cold-start rating prediction problem, *IEEE Trans. Knowl. Data Eng.* 29 (6) (2017) 1296–1309, <http://dx.doi.org/10.1109/TKDE.2016.2615039>.
- [132] P. Mazumdar, B.K. Patra, K.S. Babu, Cold-start Point-of-Interest recommendation through crowdsourcing, *ACM Trans. Web* 14 (4) (2020) 1–36, <http://dx.doi.org/10.1145/3407182>.
- [133] U. Panniello, A. Tuzhilin, M. Gorgoglion, Comparing context-aware recommender systems in terms of accuracy and diversity: Which contextual modeling, pre-filtering and post-Filtering methods perform the best, *User Model. User-Adapt. Interact.* 24 (1–2) (2014) 35–65, <http://dx.doi.org/10.1007/s11257-012-9135-y>.
- [134] B. Sarwar, G. Karypis, J. Konstan, J. Riedl, Incremental Singular Value Decomposition algorithms for highly scalable recommender systems, in: Fifth International Conference on Computer and Information Technology, ICCIT, East West Univ., 2002, pp. 1–6.
- [135] B.M. Sarwar, J.A. Konstan, J.T. Riedl, Distributed recommender systems for internet commerce, in: M. Khosrow-Pour (Ed.), Encyclopedia of Information Science and Technology, first, Idea Group, 2005, pp. 907–911, <http://dx.doi.org/10.4018/978-1-56377-5.ch159>.
- [136] G. Takács, I. Pilászy, B. Németh, D. Tikk, Scalable collaborative filtering approaches for large recommender systems, *J. Mach. Learn. Res.* 10 (22) (2009) 623–656.
- [137] A.M. Yagci, T. Aytekin, F.S. Gurgen, Scalable and adaptive collaborative filtering by mining frequent item co-occurrences in a user feedback stream, *Eng. Appl. Artif. Intell.* 58 (2017) 171–184, <http://dx.doi.org/10.1016/j.engappai.2016.10.011>.
- [138] D. Lanza, F. Chávez, F. Fernandez, M. García-Valdez, L. Trujillo, G. Olague, Profiting from several recommendation algorithms using a scalable approach, in: O. Schütze, L. Trujillo, P. Legrand, Y. Maldonado (Eds.), Results of the Numerical and Evolutionary Optimization Workshop NEO, in: Studies in Computational Intelligence (SCI), vol. 663, Springer, Cham, 2017, pp. 357–375, [http://dx.doi.org/10.1007/978-3-319-44003-3\\_14](http://dx.doi.org/10.1007/978-3-319-44003-3_14).
- [139] K. Zhou, H. Zha, Learning binary codes for collaborative filtering, in: 18th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD, ACM, New York (USA), 2012, pp. 498–506, <http://dx.doi.org/10.1145/2339530.2339611>.
- [140] Y. Li, S. Wang, Q. Pan, H. Peng, T. Yang, E. Cambria, Learning binary codes with neural collaborative filtering for efficient recommendation systems, *Knowl.-Based Syst.* 172 (2019) 64–75, <http://dx.doi.org/10.1016/j.knosys.2019.02.012>.
- [141] W.-C. Kang, J. McAuley, Candidate generation with binary codes for large-scale Top-N recommendation, in: 28th ACM International Conference on Information and Knowledge Management, CIKM, ACM, New York (USA), 2019, pp. 1523–1532, <http://dx.doi.org/10.1145/3357384.3357930>.
- [142] C. Liu, T. Lu, X. Wang, Z. Cheng, J. Sun, S.C.H. Hoi, Compositional coding for collaborative filtering, in: 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR, ACM, New York (USA), 2019, pp. 145–154, <http://dx.doi.org/10.1145/3331184.3331206>.
- [143] H.-H. Lee, W.-G. Teng, Incorporating multi-criteria ratings in recommendation systems, in: 2007 IEEE International Conference on Information Reuse and Integration, IRI, IEEE, 2007, pp. 273–278, <http://dx.doi.org/10.1109/IRI.2007.4296633>.
- [144] J. Zhan, C.-L. Hsieh, I.-C. Wang, T.-S. Hsu, C.-J. Liau, D.-W. Wang, Privacy-preserving collaborative recommender systems, *IEEE Trans. Syst. Man Cybern. C* 40 (4) (2010) 472–476, <http://dx.doi.org/10.1109/TSMCC.2010.2040275>.
- [145] D. Jannach, Z. Karakaya, F. Gedikli, Accuracy improvements for multi-criteria recommender systems, in: 13th ACM Conference on Electronic Commerce, EC, ACM, New York (USA), 2012, pp. 674–689, <http://dx.doi.org/10.1145/2229012.2229065>.
- [146] G. Adomavicius, Y. Kwon, Multi-criteria recommender systems, in: F. Ricci, L. Rokach, B. Shapira (Eds.), Recommender Systems Handbook, Springer, Boston, MA, 2015, pp. 847–880, [http://dx.doi.org/10.1007/978-1-4899-7637-6\\_25](http://dx.doi.org/10.1007/978-1-4899-7637-6_25).
- [147] A. Machanavajjhala, A. Korolova, A.D. Sarma, Personalized social recommendations: Accurate or private, *VLDB Endow.* 4 (7) (2011) 440–450, <http://dx.doi.org/10.14778/1988776.1988780>.
- [148] K. Shyong, D. Frankowski, J. Riedl, Do you trust your recommendations? An exploration of security and privacy issues in recommender systems, in: G. Müller (Ed.), International Conference on Emerging Trends in Information and Communication Security (ETRICS), in: Lecture Notes in Computer Science (LNCS), vol. 3995, Springer, Berlin, Heidelberg, 2006, pp. 14–29, [http://dx.doi.org/10.1007/11766155\\_2](http://dx.doi.org/10.1007/11766155_2).
- [149] A. Bilge, H. Polat, An improved privacy-preserving DWT-based collaborative filtering scheme, *Expert Syst. Appl.* 39 (3) (2012) 3841–3854, <http://dx.doi.org/10.1016/j.eswa.2011.09.094>.
- [150] N. Polatidis, C.K. Georgiadis, E. Pimenidis, H. Mouratidis, Privacy-preserving collaborative recommendations based on random perturbations, *Expert Syst. Appl.* 71 (2017) 18–25, <http://dx.doi.org/10.1016/j.eswa.2016.11.018>.
- [151] K. Dou, B. Guo, L. Kuang, A privacy-preserving multimedia recommendation in the context of social network based on weighted noise injection, *Multimedia Tools Appl.* (2017) 1–20, <http://dx.doi.org/10.1007/s11042-017-4352-3>.
- [152] E. Aïmour, G. Brassard, J.M. Fernandez, F.S.M. Onana, ALAMBIC: A privacy-preserving recommender system for electronic commerce, *Int. J. Inf. Secur.* 7 (5) (2008) 307–334, <http://dx.doi.org/10.1007/s10207-007-0049-3>.
- [153] H.-W. Tung, V.-W. Soo, A personalized restaurant recommender agent for mobile E-service, in: 2004 IEEE International Conference on E-Technology, E-Commerce and E-Service, EEE, 2004, pp. 259–262, <http://dx.doi.org/10.1109/EEE.2004.1287319>.
- [154] R. Kramer, M. Modsching, K. ten Hagen, Field study on methods for elicitation of preferences using a mobile digital assistant for a dynamic tour guide, in: 2006 ACM Symposium on Applied Computing, SAC, ACM, New York (USA), 2006, pp. 997–1001, <http://dx.doi.org/10.1145/1141277.1141515>.
- [155] H. Ahn, K. jae Kim, I. Han, Mobile advertisement recommender system using collaborative filtering: MAR-CF, in: 2006 Conference of the Korea Society of Management Information Systems, KGSF, 2006, pp. 709–715.
- [156] S. Park, S. Kang, Y.-K. Kim, A channel recommendation system in mobile environment, *IEEE Trans. Consum. Electron.* 52 (1) (2006) 33–39, <http://dx.doi.org/10.1109/TCE.2006.1605022>.
- [157] H. Lee, S.J. Park, MONERS: A news recommender for the mobile web, *Expert Syst. Appl.* 32 (1) (2007) 143–150, <http://dx.doi.org/10.1016/j.eswa.2005.11.010>.
- [158] O. Averjanova, F. Ricci, Q.N. Nguyen, Map-based interaction with a conversational mobile recommender system, in: Second International Conference on Mobile Ubiquitous Computing, Systems, Services and Technologies, UBICOMM, IEEE, 2008, pp. 212–218, <http://dx.doi.org/10.1109/UBICOMM.2008.16>.
- [159] R. Schifanella, A. Panisson, C. Gena, G. Ruffo, MobHinter: Epidemic collaborative filtering and self-organization in mobile ad-hoc networks, in: Second ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2008, pp. 27–34, <http://dx.doi.org/10.1145/1454008.1454014>.
- [160] D. Gavalas, C. Konstantopoulos, K. Mastakas, G. Pantziou, Mobile recommender systems in tourism, *J. Netw. Comput. Appl.* 39 (2014) 319–333, <http://dx.doi.org/10.1016/j.jnca.2013.04.006>.
- [161] C. Ren, J. Chen, Y. Kuo, D. Wu, M. Yang, Recommender system for mobile users, *Multimedia Tools Appl.* 77 (4) (2018) 4133–4153, <http://dx.doi.org/10.1007/s11042-017-4527-y>.
- [162] S. Sae-Ueng, S. Pinyapong, A. Ogino, T. Kato, Personalized shopping assistance service at ubiquitous shop space, in: 22nd International Conference on Advanced Information Networking and Applications-Workshops,AINAW, IEEE, 2008, pp. 838–843, <http://dx.doi.org/10.1109/WAINA.2008.287>.
- [163] M.C.P. Melguizo, L. Boves, O.M. Ramos, A proactive recommendation system for writing: Helping without disrupting, *Int. J. Ind. Ergon.* 39 (3) (2009) 516–523, <http://dx.doi.org/10.1016/j.ergon.2008.10.004>.

- [164] K.F. Yeung, Y. Yang, A proactive personalized mobile news recommendation system, in: Developments in E-Systems Engineering, DESE, IEEE, 2010, pp. 207–212, <http://dx.doi.org/10.1109/DeSE.2010.40>.
- [165] A. Smirnov, A. Kashevnik, A. Ponomarev, N. Shilov, N. Teslya, Proactive recommendation system for m-Tourism application, in: B. Johansson, B. Andersson, N. Holmberg (Eds.), 13th International Conference on Perspectives in Business Informatics Research (BIR), LNBIP, in: Lecture Notes in Business Information Processing, vol. 194, Springer, Cham, 2014, pp. 113–127, [http://dx.doi.org/10.1007/978-3-319-11370-8\\_9](http://dx.doi.org/10.1007/978-3-319-11370-8_9).
- [166] S. Asthana, R. Strong, A. Megahed, HealthAdvisor: Recommendation system for wearable technologies enabling proactive health monitoring, 2016, arXiv preprint [arXiv:1612.00800](https://arxiv.org/abs/1612.00800), abs/1612.00800.
- [167] A. Sobic, Proactive recommendation delivery, in: 10th ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2016, pp. 459–462, <http://dx.doi.org/10.1145/2959100.2959108>.
- [168] M. Zhang, N. Hurley, Avoiding monotony: improving the diversity of recommendation lists, in: Second ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2008, pp. 123–130, <http://dx.doi.org/10.1145/1454008.1454030>.
- [169] T. Zhou, Z. Kuscsik, J.-G. Liu, M. Medo, J.R. Wakeling, Y.-C. Zhang, Solving the apparent diversity-accuracy dilemma of recommender systems, Natl. Acad. Sci. 107 (10) (2010) 4511–4515, <http://dx.doi.org/10.1073/pnas.100048107>.
- [170] S. Vargas, P. Castells, Rank and relevance in novelty and diversity metrics for recommender systems, in: Fifth ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2011, pp. 109–116, <http://dx.doi.org/10.1145/2043932.2043955>.
- [171] N. Hurley, M. Zhang, Novelty and diversity in top-N recommendation – analysis and evaluation, ACM Trans. Internet Technol. 10 (4) (2011) 1–30, <http://dx.doi.org/10.1145/1944339.1944341>.
- [172] G. Adomavicius, Y. Kwon, Improving aggregate recommendation diversity using ranking-based techniques, IEEE Trans. Knowl. Data Eng. 24 (5) (2012) 896–911, <http://dx.doi.org/10.1109/TKDE.2011.15>.
- [173] L. Iaquinta, M.D. Gemmis, P. Lops, G. Semeraro, M. Filannino, P. Molino, Introducing serendipity in a content-based recommender system, in: Eighth International Conference on Hybrid Intelligent Systems, HIS, IEEE, 2008, pp. 168–173, <http://dx.doi.org/10.1109/HIS.2008.25>.
- [174] Y.C. Zhang, D. Séaghhdha, D. Quercia, T. Jambor, Auralist: Introducing serendipity into music recommendation, in: Fifth ACM International Conference on Web Search and Data Mining, WSDM, ACM, New York (USA), 2012, pp. 13–22, <http://dx.doi.org/10.1145/2124295.2124300>.
- [175] D. Kotkov, S. Wang, J. Veijalainen, A survey of serendipity in recommender systems, Knowl.-Based Syst. 111 (2016) 180–192, <http://dx.doi.org/10.1016/j.knosys.2016.08.014>.
- [176] V. Maccatrazzo, M. Terstall, L. Aroyo, G. Schreiber, SIRUP: Serendipity in recommendations via user perceptions, in: 22nd International Conference on Intelligent User Interfaces, IUI, ACM, New York (USA), 2017, pp. 35–44, <http://dx.doi.org/10.1145/3025171.3025185>.
- [177] Z. Huang, H. Chen, D. Zeng, Applying associative retrieval techniques to alleviate the sparsity problem in collaborative filtering, ACM Trans. Inf. Syst. 22 (1) (2004) 116–142, <http://dx.doi.org/10.1145/963770.963775>.
- [178] M. Papagelis, D. Plexousakis, T. Kutsuras, Alleviating the sparsity problem of collaborative filtering using trust inferences, in: P. Herrmann, V. Issarny, S. Shiu (Eds.), Third International Conference on Trust Management (ITrust), in: Lecture Notes in Computer Science (LNCS), vol. 3477, Springer, Berlin, Heidelberg, 2005, pp. 224–239, [http://dx.doi.org/10.1007/11429760\\_16](http://dx.doi.org/10.1007/11429760_16).
- [179] H. Yildirim, M.S. Krishnamoorthy, A random walk method for alleviating the sparsity problem in collaborative filtering, in: Second ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2008, pp. 131–138, <http://dx.doi.org/10.1145/1454008.1454031>.
- [180] Y. Koren, R. Bell, C. Volinsky, Matrix factorization techniques for recommender systems, Computer 42 (8) (2009) 30–37, <http://dx.doi.org/10.1109/MC.2009.263>.
- [181] P. Pirasteh, D. Hwang, J.J. Jung, Exploiting Matrix Factorization to asymmetric user similarities in recommendation systems, Knowl.-Based Syst. 83 (2015) 51–57, <http://dx.doi.org/10.1016/j.knosys.2015.03.006>.
- [182] A.N. Nikolakopoulos, M.A. Kouneli, J.D. Garofalakis, Hierarchical Itemspace Rank: Exploiting hierarchy to alleviate sparsity in ranking-based recommendation, Neurocomputing 163 (2015) 126–136, <http://dx.doi.org/10.1016/j.neucom.2014.09.082>.
- [183] M. Mordacchini, R. Baraglia, P. Dazzi, L. Ricci, A P2P recommender system based on gossip overlays (PREGO), in: 10th IEEE International Conference on Computer and Information Technology, CIT, IEEE, 2010, pp. 83–90, <http://dx.doi.org/10.1109/CIT.2010.502>.
- [184] A. Moreno, H. Castro, M. Riveill, Decentralized recommender systems for mobile advertisement, in: International Workshop on Personalization in Mobile Applications (PeMA), in Conjunction with the Fifth ACM Conference on Recommender Systems, RecSys, 2011, pp. 1–4.
- [185] J.V. del Campo, J. Pegueroles, J. Hernández-Serrano, M. Soriano, Design of a P2P content recommendation system using affinity networks, Comput. Commun. 36 (1) (2012) 90–104, <http://dx.doi.org/10.1016/j.comcom.2012.07.018>.
- [186] W.-S. Yang, S.-Y. Hwang, iTravel: A recommender system in mobile Peer-to-Peer environment, J. Syst. Softw. 86 (1) (2013) 12–20, <http://dx.doi.org/10.1016/j.jss.2012.06.041>.
- [187] A. Smirnov, A. Ponomarev, A hybrid Peer-to-Peer recommendation system architecture based on locality-sensitive hashing, in: 15th Conference of Open Innovations Association FRUCT, IEEE, 2014, pp. 119–125, <http://dx.doi.org/10.1109/FRUCT.2014.6872418>.
- [188] E. Karydi, K. Margaritis, Parallel and distributed collaborative filtering: A survey, ACM Comput. Surv. 49 (2) (2016) 1–37, <http://dx.doi.org/10.1145/2951952>.
- [189] M. O’Connor, D. Cosley, J.A. Konstan, J. Riedl, PolyLens: A recommender system for groups of users, in: W. Prinz, M. Jarke, Y. Rogers, K. Schmidt, V. Wulf (Eds.), Seventh European Conference on Computer Supported Cooperative Work, ECSCW, Springer, Dordrecht, 2001, pp. 199–218, [http://dx.doi.org/10.1007/0-306-48019-0\\_11](http://dx.doi.org/10.1007/0-306-48019-0_11).
- [190] A. Jameson, More than the sum of its members: challenges for group recommender systems, in: International Working Conference on Advanced Visual Interfaces, AVI, ACM, New York (USA), 2004, pp. 48–54, <http://dx.doi.org/10.1145/98963.989869>.
- [191] A. Jameson, B. Smyth, Recommendation to groups, in: P. Brusilovsky, A. Kobsa, W. Nejdl (Eds.), The Adaptive Web: Methods and Strategies of Web Personalization, in: Lecture Notes in Computer Science (LNCS), vol. 4321, Springer, Berlin, Heidelberg, 2007, pp. 596–627, [http://dx.doi.org/10.1007/978-3-540-72079-9\\_20](http://dx.doi.org/10.1007/978-3-540-72079-9_20).
- [192] J.A. Recio-García, G. Jiménez-Díaz, A.A. Sanchez-Ruiz, B. Diaz-Agudo, Personality aware recommendations to groups, in: Third ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2009, pp. 325–328, <http://dx.doi.org/10.1145/1639714.1639779>.
- [193] H.-N. Kim, M. Rawashdeh, A.E. Saddik, Tailoring recommendations to groups of users: A graph walk-based approach, in: International Conference on Intelligent User Interfaces, IUI, ACM, New York (USA), 2013, pp. 15–24, <http://dx.doi.org/10.1145/2449396.2449401>.
- [194] W. Zhang, J. Wang, W. Feng, Combining latent factor model with location features for event-based group recommendation, in: 19th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD, ACM, New York (USA), 2013, pp. 910–918, <http://dx.doi.org/10.1145/2487575.2487646>.
- [195] T.D. Pessemier, J. Dhondt, L. Martens, Hybrid group recommendations for a travel service, Multimedia Tools Appl. 76 (2) (2017) 2787–2811, <http://dx.doi.org/10.1007/s11042-016-3265-x>.
- [196] S. Feng, J. Cao, Improving group recommendations via detecting comprehensive correlative information, Multimedia Tools Appl. 76 (1) (2017) 1355–1377, <http://dx.doi.org/10.1007/s11042-015-3135-y>.
- [197] B. Lamche, Ü. Adıgüzel, W. Wörndl, Interactive explanations in mobile shopping recommender systems, in: Joint Workshop on Interfaces and Human Decision Making for Recommender Systems (IntRS), Co-Located with ACM Conference on Recommender Systems, RecSys, Vol. 1253, 2014, pp. 14–21, CEUR Workshop Proceedings.
- [198] S. Cleger, J.M. Fernández-Luna, J.F. Huete, Learning from explanations in recommender systems, Inform. Sci. 287 (2014) 90–108, <http://dx.doi.org/10.1016/j.ins.2014.07.031>.
- [199] G. Peake, J. Wang, Explanation mining: Post hoc interpretability of latent factor models for recommendation systems, in: 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, KDD, ACM, New York (USA), 2018, pp. 2060–2069, <http://dx.doi.org/10.1145/3219819.3220072>.
- [200] C. Musto, F. Narducci, P. Lops, M. de Gemmis, G. Semeraro, Linked Open Data-based explanations for transparent recommender systems, Int. J. Hum.-Comput. Stud. 121 (2019) 93–107, <http://dx.doi.org/10.1016/j.ijhcs.2018.03.003>.
- [201] P. Kouki, J. Schaffer, J. Pujara, J. O’Donovan, L. Getoor, Personalized explanations for hybrid recommender systems, in: 24th International Conference on Intelligent User Interfaces, IUI, ACM, New York (USA), 2019, pp. 379–390, <http://dx.doi.org/10.1145/3301275.3302306>.
- [202] X. Chen, Y. Zhang, Z. Qin, Dynamic explainable recommendation based on neural attentive models, in: 33th AAAI Conference on Artificial Intelligence, Vol. 33, AAAI, (1) Association for the Advancement of Artificial Intelligence, 2019, pp. 53–60.
- [203] D.C. Hernandez-Bocanegra, T. Donkers, J. Ziegler, Effects of argumentative explanation types on the perception of review-based recommendations, in: 28th ACM Conference on User Modeling, Adaptation and Personalization, UMAP, ACM, New York (USA), 2020, pp. 219–225, <http://dx.doi.org/10.1145/3386392.3399302>.
- [204] M. Li, Y. Li, Y. Xu, L. Wang, Explanatory Q&A recommendation algorithm in community question answering, Data Technol. Appl. 54 (4) (2020) 437–459, <http://dx.doi.org/10.1108/DTA-11-2019-0201>.

- [205] X. Ren, H. Yin, T. Chen, H. Wang, N.Q.V. Hung, Z. Huang, X. Zhang, CRSAL: Conversational recommender systems with adversarial learning, *ACM Trans. Inf. Syst.* 38 (4) (2020) 1–40, <http://dx.doi.org/10.1145/3394592>.
- [206] A. Iovine, F. Narducci, G. Semeraro, Conversational Recommender Systems and natural language:: A study through the ConveRSE framework, *Decis. Support Syst.* 131 (2020) 113250, <http://dx.doi.org/10.1016/j.dss.2020.113250>.
- [207] K. Hinkelmann, M. Blaser, O. Faust, A. Horst, C. Mehli, Virtual bartender: A dialog system combining data-driven and knowledge-based recommendation, in: AAAI Spring Symposium on Combining Machine Learning with Knowledge Engineering, AAAI-MAKE, Vol. 2350, 2019, p. 6, CEUR Workshop Proceedings.
- [208] R. Calegari, G. Ciatto, A. Omicini, On the integration of symbolic and sub-symbolic techniques for XAI: A survey, *Intell. Artif.* 14 (1) (2020) 7–32, <http://dx.doi.org/10.3233/IA-190036>.
- [209] W. Woerndl, J. Schlichter, Introducing context into recommender systems, in: AAAI Workshop on Recommender Systems in E-Commerce, 2007, pp. 138–140.
- [210] C. Mettouris, G. Papadopoulos, Ubiquitous recommender systems, *Computing* 96 (3) (2014) 223–257, <http://dx.doi.org/10.1007/s00607-013-0351-z>.
- [211] M. Nilashi, O.B. Ibrahim, N. Ithnin, R. Zakaria, A multi-criteria recommendation system using dimensionality reduction and Neuro-Fuzzy techniques, *Soft Comput.* 19 (11) (2015) 3173–3207, <http://dx.doi.org/10.1007/s00500-014-1475-6>.
- [212] P. Symeonidis, Matrix and tensor decomposition in recommender systems, in: 10th ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2016, pp. 429–430, <http://dx.doi.org/10.1145/2959100.2959195>.
- [213] B. Mehta, T. Hofmann, P. Fankhauser, Lies and propaganda: Detecting spam users in collaborative filtering, in: 12th International Conference on Intelligent User Interfaces, IUI, ACM, New York (USA), 2007, pp. 14–21, <http://dx.doi.org/10.1145/1216295.1216307>.
- [214] R. Vignesh, D. Kavitha, A recommendation system with spam reduction based on clustering with on demand service, *Int. Res. J. Eng. Technol.* 3 (2016) 959–966.
- [215] V. Codina, F. Ricci, L. Ceccaroni, Distributional semantic pre-filtering in context-aware recommender systems, *User Model. User-Adapt. Interact.* 26 (1) (2016) 1–32, <http://dx.doi.org/10.1007/s11257-015-9158-2>.
- [216] C. Chen, K.C.-C. Chang, X. Zheng, Towards context-aware social recommendation via individual trust, *Knowl.-Based Syst.* (2017) 1–9, <http://dx.doi.org/10.1016/j.knosys.2017.02.032>.
- [217] X. Ren, M. Song, E. Haihong, J. Song, Context-aware probabilistic Matrix Factorization modeling for Point-of-Interest recommendation, *Neurocomputing* 241 (2017) 38–55, <http://dx.doi.org/10.1016/j.neucom.2017.02.005>.
- [218] U. Panniello, A. Tuzhilin, M. Gorgoglion, C. Palmisano, A. Pedone, Experimental comparison of pre- versus post-filtering approaches in context-aware recommender systems, in: Third ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2009, pp. 265–268, <http://dx.doi.org/10.1145/1639714.1639764>.
- [219] U. Panniello, M. Gorgoglion, Context-aware recommender systems: A comparison of three approaches, in: Fifth International Workshop on New Challenges in Distributed Information Filtering and Retrieval, Vol. 771, 2011, pp. 1–12, CEUR Workshop Proceedings.
- [220] P.G. Campos, I. Fernández-Tobías, I. Cantador, F. Díez, Context-aware movie recommendations: An empirical comparison of pre-filtering, post-filtering and contextual modeling approaches, in: C. Huemer, P. Lops (Eds.), 14th International Conference E-Commerce and Web Technologies, EC-Web, Springer, Berlin, Heidelberg, 2013, pp. 137–149, [http://dx.doi.org/10.1007/978-3-642-39878-0\\_13](http://dx.doi.org/10.1007/978-3-642-39878-0_13).
- [221] U. Panniello, A. Tuzhilin, M. Gorgoglion, Comparing context-aware recommender systems in terms of accuracy and diversity, *User Model. User-Adapt. Interact.* 24 (1) (2014) 35–65, <http://dx.doi.org/10.1007/s11257-012-9135-y>.
- [222] M. Sharma, L. Ahuja, V. Kumar, A hybrid context aware recommender system with combined pre and post-filter approach, *Int. J. Inf. Technol. Proj. Manage.* 10 (4) (2019) 1–14, <http://dx.doi.org/10.4018/IJITPM.2019100101>.
- [223] R. Hermoso, S. Ilarri, R. Trillo, M. del Carmen Rodríguez-Hernández, Push-based recommendations in mobile computing using a multi-layer contextual approach, in: 13th International Conference on Advances in Mobile Computing and Multimedia, MoMM, ACM, New York (USA), 2015, pp. 149–158, <http://dx.doi.org/10.1145/2837126.2837128>.
- [224] M. del Carmen Rodríguez-Hernández, S. Ilarri, Pull-based recommendations in mobile environments, *Comput. Stand. Interfaces* 44 (2016) 185–204, <http://dx.doi.org/10.1016/j.csi.2015.08.002>.
- [225] J.S. Breese, D. Heckerman, C. Kadie, Empirical analysis of predictive algorithms for collaborative filtering, in: 14th Conference on Uncertainty in Artificial Intelligence, UAI, Morgan Kaufmann, San Francisco (USA), 1998, pp. 43–52.
- [226] W. Beer, W. Hargassner, S. Herrmann, C. Derwein, General framework for context-aware recommendation of social events, in: Second International Conference on Intelligent Systems and Applications, INTELLI, IARIA, 2013, pp. 141–146.
- [227] T. Hussein, T. Linder, W. Gaulke, J. Ziegler, Hybreed: A software framework for developing context-aware hybrid recommender systems, *User Model. User-Adapt. Interact.* 24 (1) (2014) 121–174, <http://dx.doi.org/10.1007/s11257-012-9134-z>.
- [228] Y. Zheng, B. Mobasher, R. Burke, CARSKIT: A java-based context-aware recommendation engine, in: IEEE International Conference on Data Mining Workshop, ICDMW, IEEE, 2015, pp. 1668–1671, <http://dx.doi.org/10.1109/ICDMW.2015.222>.
- [229] M. Unger, A. Bar, B. Shapira, L. Rokach, Towards latent context-aware recommendation systems, *Knowl.-Based Syst.* 104 (2016) 165–178, <http://dx.doi.org/10.1016/j.knosys.2016.04.020>.
- [230] H.-M. Lee, J.-S. Um, A study on the context-aware hybrid Bayesian recommender system on the mobile devices, *IAENG Int. J. Comput. Sci.* 45 (1) (2018) 1–6.
- [231] T.G. S., U.P. Kulkarni, Design and implementation of user context aware recommendation engine for mobile using Bayesian network, Fuzzy Logic and rule base, *Int. J. Pervasive Comput. Commun.* 8 (2) (2012) 133–157, <http://dx.doi.org/10.1108/17427371211245364>.
- [232] A. Doryab, J. Togelius, J. Bardram, Activity-aware recommendation for collaborative work in operating rooms, in: 17th ACM International Conference on Intelligent User Interfaces, IUI, ACM, 2012, pp. 301–304, <http://dx.doi.org/10.1145/2166966.2167023>.
- [233] D. Gallego, G. Huecas, An empirical case of a context-aware mobile recommender system in a banking environment, in: Third International Conference on Mobile, Ubiquitous, and Intelligent Computing, MUSIC, IEEE, 2012, pp. 13–20, <http://dx.doi.org/10.1109/MUSIC.2012.11>.
- [234] M. Amoretti, L. Belli, F. Zanichelli, UTravel: Smart mobility with a novel user profiling and recommendation approach, *Pervasive Mob. Comput.* 38 (2017) 474–489, <http://dx.doi.org/10.1016/j.pmcj.2016.08.008>.
- [235] Y. Zheng, X. Xu, L. Qi, Deep CNN-assisted personalized recommendation over Big Data for mobile wireless networks, *Wirel. Commun. Mob. Comput.* 2019 (2019) 1–16, <http://dx.doi.org/10.1155/2019/6082047>.
- [236] D. Horowitz, D. Contreras, M. Salamó, EventAware: A mobile recommender system for events, *Pattern Recognit. Lett.* 105 (2018) 121–134, <http://dx.doi.org/10.1016/j.patrec.2017.07.003>.
- [237] X. Zou, M. Gonzales, S. Saeedi, A context-aware recommendation system using smartphone sensors, in: Seventh Annual Information Technology, Electronics and Mobile Communication Conference, IEMCON, IEEE, 2016, pp. 1–6, <http://dx.doi.org/10.1109/IEMCON.2016.7746307>.
- [238] V. Bellotti, et al., Activity-based serendipitous recommendations with the Magitti mobile leisure guide, in: SIGCHI Conference on Human Factors in Computing Systems, CHI, ACM, New York (USA), 2008, pp. 1157–1166, <http://dx.doi.org/10.1145/1357054.1357237>.
- [239] X. Wang, D. Rosenblum, Y. Wang, Context-aware mobile music recommendation for daily activities, in: 20th International Conference on Multimedia, MM, ACM, New York (USA), 2012, pp. 99–108, <http://dx.doi.org/10.1145/2393347.2393368>.
- [240] M.F. Alhamid, M. Rawashdeh, H. Dong, M.A. Hossain, A. Alelaiwi, A.E. Saddik, RecAm: A collaborative context-aware framework for multimedia recommendations in an ambient intelligence environment, *Multimedia Syst.* 22 (5) (2016) 587–601, <http://dx.doi.org/10.1007/s00530-015-0469-2>.
- [241] A.R. de M. Neves, Á.M.G. Carvalho, C.G. Ralha, Agent-based architecture for context-aware and personalized event recommendation, *Expert Syst. Appl.* 41 (2) (2014) 563–573, <http://dx.doi.org/10.1016/j.eswa.2013.07.081>.
- [242] L. Baltrunas, B. Ludwig, S. Peer, F. Ricci, Context-aware places of interest recommendations for mobile users, in: A. Marcus (Ed.), International Conference of Design, User Experience, and Usability, DUXU, in: Lecture Notes in Computer Science (LNCS), Springer, Berlin, Heidelberg, 2011, pp. 531–540, [http://dx.doi.org/10.1007/978-3-642-21675-6\\_61](http://dx.doi.org/10.1007/978-3-642-21675-6_61).
- [243] P. Bedi, S.K. Agarwal, A situation-aware proactive recommender system, in: 12th International Conference on Hybrid Intelligent Systems, HIS, IEEE, 2012, pp. 85–89, <http://dx.doi.org/10.1109/HIS.2012.6421314>.
- [244] E. Pimenidis, N. Polatidis, H. Mouratidis, Mobile recommender systems: Identifying the major concepts, *J. Inf. Sci.* 45 (3) (2019) 387–397, <http://dx.doi.org/10.1177/0165551518792213>.
- [245] M. Braunhofer, M. Elahi, F. Ricci, STS: A context-aware mobile recommender system for Places of Interest, in: 22nd International Conference on User Modeling, Adaptation, and Personalization (UMAP)—Posters, Demos, Late-Breaking Results and Workshop, Vol. 1181, 2014, pp. 75–80, CEUR Workshop Proceedings.
- [246] S. Ilarri, R. Trillo-Lado, R. Hermoso, Datasets for context-aware recommender systems: Current context and possible directions, in: First Workshop on Context in Analytics (CiA 2018), in Conjunction with the 34th International Conference on Data Engineering, ICDE 2018, IEEE, 2018, pp. 25–28, <http://dx.doi.org/10.1109/ICDEW.2018.00011>.

- [247] K.-J. Kim, H. Ahn, S. Jeong, Context-aware recommender systems using data mining techniques, *Int. J. Soc. Behav. Educ. Econ. Bus. Ind. Eng.* 4 (4) (2010) 381–3862.
- [248] C.-C. Chen, T.-C. Huang, J.J. Park, N.Y. Yen, Real-time smartphone sensing and recommendations towards context-awareness shopping, *Multimedia Syst.* 21 (1) (2015) 61–72, <http://dx.doi.org/10.1007/s00530-013-0348-7>.
- [249] M.Y. Gheraibia, C. Gouin-Vallerand, Intelligent mobile-based recommender system framework for smart freight transport, in: Fifth EAI International Conference on Smart Objects and Technologies for Social Good, GoodTechs, ACM, New York (USA), 2019, pp. 219–222, <http://dx.doi.org/10.1145/3342428.3342697>.
- [250] A. Abu-Issa, H. Nawawreh, L. Shrethet, Y. Salman, Y. Hassounah, I. Tumar, M. Hussein, A smart city mobile application for multitype, proactive, and context-aware recommender system, in: 2017 International Conference on Engineering and Technology, ICET, IEEE, 2017, pp. 1–5, <http://dx.doi.org/10.1109/ICEngTechnol.2017.8308181>.
- [251] S. Mudda, D. Lian, S. Giordano, D. Liu, X. Xie, Spatial-aware deep recommender system, in: 2018 IEEE SmartWorld, Ubiquitous Intelligence & Computing, Advanced & Trusted Computing, Scalable Computing & Communications, Cloud & Big Data Computing, Internet of People and Smart City Innovations, IEEE, 2018, pp. 983–990, <http://dx.doi.org/10.1109/SmartWorld.2018.00174>.
- [252] A. Livne, M. Unger, B. Shapira, L. Rokach, Deep context-aware recommender system utilizing sequential latent context, in: Workshop on Context-Aware Recommender Systems (CARS 2.0), in Conjunction with the 13th ACM Conference on Recommender Systems, RecSys, 2019, pp. 1–7.
- [253] L. Baltrunas, B. Ludwig, F. Ricci, Matrix factorization techniques for context aware recommendation, in: Fifth ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2011, pp. 301–304, <http://dx.doi.org/10.1145/2043932.2043988>.
- [254] L. Baltrunas, et al., InCarMusic: Context-aware music recommendations in a car, in: C. Huemer, T. Setzer (Eds.), 12th International Conference on E-Commerce and Web Technologies, EC-Web, in: Lecture Notes in Business Information Processing (LNBIP), vol. 85, Springer, Berlin, Heidelberg, 2011, pp. 89–100, [http://dx.doi.org/10.1007/978-3-642-23014-1\\_8](http://dx.doi.org/10.1007/978-3-642-23014-1_8).
- [255] F.S. da Costa, P. Dolog, Collective embedding for neural context-aware recommender systems, in: 13th ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2019, pp. 201–209, <http://dx.doi.org/10.1145/3298689.3347028>.
- [256] S. Rendle, Factorization machines with libFM, *ACM Trans. Intell. Syst. Technol. (TIST)* 3 (3) (2012) 57, <http://dx.doi.org/10.1145/2168752.2168771>.
- [257] Y. Koren, Factorization meets the neighborhood: A multifaceted collaborative filtering model, in: 14th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD, ACM, New York (USA), 2008, pp. 426–434, <http://dx.doi.org/10.1145/1401890.1401944>.
- [258] D. Lian, C. Zhao, X. Xie, G. Sun, E. Chen, Y. Rui, GeoMF: Joint geographical modeling and Matrix Factorization for Point-of-Interest recommendation, in: 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD, ACM, New York (USA), 2014, pp. 831–840, <http://dx.doi.org/10.1145/2623330.2623638>.
- [259] E. Hazan, T. Koren, N. Srebro, Beating SGD: Learning SVMs in sublinear time, in: *Advances in Neural Information Processing Systems*, Curran Associates, Inc., 2011, pp. 1233–1241.
- [260] X. He, L. Liao, H. Zhang, L. Nie, X. Hu, T.-S. Chua, Neural collaborative filtering, in: 26th International Conference on World Wide Web, WWW, ACM, Republic and Canton of Geneva, CHE, 2017, pp. 173–182, <http://dx.doi.org/10.1145/3038912.3052569>.
- [261] S. Rendle, C. Freudenthaler, Z. Gantner, L. Schmidt-Thieme, BPR: Bayesian personalized ranking from implicit feedback, in: 25th Conference on Uncertainty in Artificial Intelligence, UAI, AUAI Press, Arlington, Virginia, USA, 2009, pp. 452–461.
- [262] A. Karatzoglou, X. Amatriain, L. Baltrunas, N. Oliver, Multiverse recommendation: N-dimensional tensor factorization for context-aware collaborative filtering, in: Fourth ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2010, pp. 79–86, <http://dx.doi.org/10.1145/1864708.1864727>.
- [263] F. Costa, P. Dolog, Hybrid learning model with Barzilai-Borwein optimization for context-aware recommendations, in: 31st International Florida Artificial Intelligence Research Society Conference, FLAIRS, AAAI Publications, 2018, pp. 456–461.
- [264] D. Kim, C. Park, J. Oh, S. Lee, H. Yu, Convolutional Matrix Factorization for document context-aware recommendation, in: 10th ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2016, pp. 233–240, <http://dx.doi.org/10.1145/2959100.2959165>.
- [265] X. Li, D. Han, J. He, L. Liao, M. Wang, Next and next new POI recommendation via latent behavior pattern inference, *ACM Trans. Inf. Syst.* 37 (4) (2019) 46:1–46:28, <http://dx.doi.org/10.1145/3354187>.
- [266] S. Feng, X. Li, Y. Zeng, G. Cong, Y.M. Chee, Q. Yuan, Personalized ranking metric embedding for next new POI recommendation, in: 24th International Conference on Artificial Intelligence, IJCAI, AAAI Press, 2015, pp. 2069–2075.
- [267] J.-D. Zhang, C.-Y. Chow, GeoSoCa: Exploiting geographical, social and categorical correlations for Point-of-Interest recommendations, in: 38th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR, ACM, New York (USA), 2015, pp. 443–452.
- [268] X. Li, G. Cong, X.-L. Li, T.-A.N. Pham, S. Krishnaswamy, Rank-GeoFM: A ranking based geographical factorization method for Point of Interest recommendation, in: 38th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR, ACM, New York (USA), 2015, pp. 433–442, <http://dx.doi.org/10.1145/2766462.2767722>.
- [269] Y. Koren, Collaborative filtering with temporal dynamics, in: 15th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD, ACM, New York (USA), 2009, pp. 447–456, <http://dx.doi.org/10.1145/1557019.1557072>.
- [270] A. Mnih, R.R. Salakhutdinov, Probabilistic Matrix Factorization, in: J.C. Platt, D. Koller, Y. Singer, S.T. Roweis (Eds.), Conference on Advances in Neural Information Processing Systems, NIPS, Curran Associates, Inc., 2007, pp. 1257–1264.
- [271] C. Cheng, H. Yang, M.R. Lyu, I. King, Where you like to go next: Successive Point-of-Interest recommendation, in: 23rd International Joint Conference on Artificial Intelligence, IJCAI, AAAI Press, 2013, pp. 2605–2611.
- [272] Q. Liu, S. Wu, L. Wang, T. Tan, Predicting the next location: A recurrent model with spatial and temporal contexts, in: 30th AAAI Conference on Artificial Intelligence, AAAI, AAAI Press, 2016, pp. 194–200.
- [273] W. Woerndl, J. Huebner, R. Bader, D. Gallego-Vico, A model for proactivity in mobile, context-aware recommender systems, in: Fifth Conference Recommender Systems, RecSys, ACM, New York (USA), 2011, pp. 273–276, <http://dx.doi.org/10.1145/2043932.2043981>.
- [274] D. Gallego, W. Woerndl, G. Huecas, Evaluating the impact of proactivity in the user experience of a context-aware restaurant recommender for Android smartphones, *J. Syst. Archit.* 59 (9) (2013) 748–758, <http://dx.doi.org/10.1016/j.sysarc.2013.02.004>.
- [275] M. del Carmen Rodríguez-Hernández, S. Ibarri, R. Hermoso, R. Trillo-Lado, Towards trajectory-based recommendations in museums: Evaluation of strategies using mixed synthetic and real data, in: Eighth International Conference on Emerging Ubiquitous Systems and Pervasive Networks, Vol. 113, EUSPN, Elsevier, 2017, pp. 234–239, <http://dx.doi.org/10.1016/j.procs.2017.08.355>.
- [276] M. del Carmen Rodríguez-Hernández, S. Ibarri, R. Trillo, R. Hermoso, Context-aware recommendations using mobile P2P, in: 15th International Conference on Advances in Mobile Computing & Multimedia, MoMM, ACM, New York (USA), 2017, pp. 82–91, <http://dx.doi.org/10.1145/3151848.3151856>.
- [277] C. Zhang, H. Liang, K. Wang, J. Sun, Personalized trip recommendation with POI availability and uncertain traveling time, in: 24th ACM Conference on Information and Knowledge Management, CIKM, ACM, New York (USA), 2015, pp. 911–920, <http://dx.doi.org/10.1145/2806416.2806558>.
- [278] W. Zhang, J. Wang, Location and time aware social collaborative retrieval for new successive Point-of-Interest recommendation, in: 24th ACM Conference on Information and Knowledge Management, CIKM, ACM, New York (USA), 2015, pp. 1221–1230, <http://dx.doi.org/10.1145/2806416.2806564>.
- [279] J. Manotumruksa, C. Macdonald, I. Ounis, A personalised ranking framework with multiple sampling criteria for venue recommendation, in: 26th ACM Conference on Information and Knowledge Management, CIKM, ACM, New York (USA), 2017, pp. 1469–1478, <http://dx.doi.org/10.1145/3132847.3132985>.
- [280] S. Zhang, L. Yao, A. Sun, Y. Tay, Deep learning based recommender system: A survey and new perspectives, *ACM Comput. Surv.* 52 (1) (2019) 5:1–5:38, <http://dx.doi.org/10.1145/3285029>.
- [281] M. Kaminskas, F. Ricci, M. Schedl, Location-aware music recommendation using auto-tagging and hybrid matching, in: Seventh ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2013, pp. 17–24, <http://dx.doi.org/10.1145/2507157.2507180>.
- [282] G. Hurlburt, How much to trust artificial intelligence? *IT Prof.* 19 (4) (2017) 7–11, <http://dx.doi.org/10.1109/mipt.2017.3051326>.
- [283] P. Covington, J. Adams, E. Sargin, Deep neural networks for YouTube recommendations, in: 10th ACM Conference on Recommender Systems, RecSys, ACM, New York (USA), 2016, pp. 191–198, <http://dx.doi.org/10.1145/2959100.2959190>.
- [284] J. Manotumruksa, C. Macdonald, I. Ounis, A deep recurrent collaborative filtering framework for venue recommendation, in: 26th ACM Conference on Information and Knowledge Management, CIKM, ACM, New York (USA), 2017, pp. 1429–1438, <http://dx.doi.org/10.1145/3132847.3133036>.
- [285] J. Bobadilla, S. Alonso, A. Hernando, Deep learning architecture for collaborative filtering recommender systems, *Appl. Sci.* 10 (7) (2020) 1–14, <http://dx.doi.org/10.3390/app10072441>.

- [286] Z. Yujie, W. Licai, Some challenges for context-aware recommender systems, in: Fifth International Conference on Computer Science and Education, ICCSE, IEEE, 2010, pp. 362–365, <http://dx.doi.org/10.1109/ICCE.2010.5593612>.
- [287] S. Kulkarni, S.F. Rodd, Context aware recommendation systems: A review of the state of the art techniques, *Comp. Sci. Rev.* 37 (2020) 1–33, <http://dx.doi.org/10.1016/j.cosrev.2020.100255>.
- [288] B. Liu, Sentiment Analysis and Opinion Mining, in: *Synthesis Lectures on Human Language Technologies*, Morgan & Claypool Publishers LLC, 2012, pp. 1–167, <http://dx.doi.org/10.2200/s00416ed1v01y201204hlt016>.
- [289] R. Bakshi, N. Kaur, R. Kaur, G. Kaur, Opinion mining and sentiment analysis in: Third International Conference on Computing for Sustainable Global Development, INDIACom, 2016, pp. 452–455.
- [290] Y. Betancourt, S. Ibarri, Use of text mining techniques for recommender systems, in: 22nd International Conference on Enterprise Information Systems, Vol. 1, ICEIS, SCITEPRESS (Science and Technology Publications, Lda.), 2020, pp. 780–787, <http://dx.doi.org/10.5220/0009576507800787>.
- [291] E. Cambria, Y. Li, F.Z. Xing, S. Poria, K. Kwok, SenticNet 6: Ensemble application of symbolic and subsymbolic AI for sentiment analysis, in: 29th ACM International Conference on Information & Knowledge Management, CIKM, ACM, New York (USA), 2020, pp. 105–114, <http://dx.doi.org/10.1145/3340531.3412003>.
- [292] E. Cambria, S. Poria, D. Hazarika, K. Kwok, *SenticNet 5: Discovering conceptual primitives for sentiment analysis by means of context embeddings*, in: S.A. McIlraith, K.Q. Weinberger (Eds.), 32nd AAAI Conference on Artificial Intelligence, AAAI, AAAI Press, 2018, pp. 1795–1802.
- [293] F.-F. Kuo, M. Chiang, M.-K. Shan, S. Lee, Emotion-based music recommendation by association discovery from film music, in: 13th Annual ACM International Conference on Multimedia, MULTIMEDIA, ACM, 2005, pp. 507–510, <http://dx.doi.org/10.1145/1101149.1101263>.
- [294] M. Tkalcic, A. Košir, J. Tasić, Affective recommender systems: the role of emotions in recommender systems, in: Workshop on Human Decision Making in Recommender Systems (Decisions), Affiliated with the Fifth ACM Conference on Recommender Systems, RecSys, Vol. 811, 2011, pp. 9–13, CEUR Workshop Proceedings.
- [295] R. Katarya, O.P. Verma, Recent developments in affective recommender systems, *Physica A* 461 (2016) 182–190, <http://dx.doi.org/10.1016/j.physa.2016.05.046>.
- [296] J. Mizgajski, M. Morzy, Affective recommender systems in online news industry: How emotions influence reading choices, *User Model. User-Adapt. Interact.* 29 (2) (2018) 345–379, <http://dx.doi.org/10.1007/s11257-018-9213-x>.
- [297] M. Tkalcic, Emotions and personality in recommender systems, in: *Encyclopedia of Social Network Analysis and Mining*, Springer, 2018, pp. 750–759, [http://dx.doi.org/10.1007/978-1-4939-7131-2\\_110161](http://dx.doi.org/10.1007/978-1-4939-7131-2_110161).
- [298] E. Cambria, Affective computing and sentiment analysis, *IEEE Intell. Syst.* 31 (2) (2016) 102–107.
- [299] Z. Yu, X. Zhou, D. Zhang, C.-Y. Chin, X. Wang, J. Men, Supporting context-aware media recommendations for smart phones, *IEEE Pervasive Computing* 5 (3) (2006) 68–75, <http://dx.doi.org/10.1109/MPRV.2006.61>.
- [300] O. Santos, J. Boticario, Modeling recommendations for the educational domain, *Procedia Comput. Sci.* 1 (2) (2010) 2793–2800, <http://dx.doi.org/10.1016/j.procs.2010.08.004>, First Workshop on Recommender Systems for Technology Enhanced Learning (RecSysTEL).
- [301] G. Sielis, C. Mettouris, G. Papadopoulos, A. Tzanavari, R. Dols, Q. Siebers, A context aware recommender system for creativity support tools, *J. UCS* 17 (12) (2011) 1743–1763, <http://dx.doi.org/10.3217/jucs-017-12-1743>.
- [302] A. Loizou, S. Dasmahapatra, Recommender systems for the Semantic Web, in: ECAI 2006 Recommender Systems Workshop, 2006, pp. 76–81.
- [303] C. Mettouris, G. Papadopoulos, Contextual modelling in context-aware recommender systems: A generic approach, in: A. Haller, G. Huang, Z. Huang, H. young Paik, Q.Z. Sheng (Eds.), 2011 and 2012 Web Information Systems Engineering (WISE) Workshops, in: Lecture Notes in Computer Science (LNCS), vol. 7652, Springer, Berlin, Heidelberg, 2013, pp. 41–52, [http://dx.doi.org/10.1007/978-3-642-38333-5\\_6](http://dx.doi.org/10.1007/978-3-642-38333-5_6).
- [304] C. Palmisano, A. Tuzhilin, M. Gorgoglione, Using context to improve predictive modeling of customers in personalization applications, *IEEE Trans. Knowl. Data Eng.* 20 (11) (2008) 1535–1549, <http://dx.doi.org/10.1109/TKDE.2008.110>.
- [305] J. Hong, E.-H. Suh, J. Kim, S. Kim, Context-aware system for proactive personalized service based on context history, *Expert Syst. Appl.* 36 (4) (2009) 7448–7457, <http://dx.doi.org/10.1016/j.eswa.2008.09.002>.
- [306] C. Angulo, I.Z. Falomir, D. Anguita, N. Agell, E. Cambria, Bridging cognitive models and recommender systems, *Cogn. Comput.* 12 (2) (2020) 426–427, <http://dx.doi.org/10.1007/s12559-020-09719-3>, Introduction to the special issue.
- [307] D. Contreras, M. Salamó, A cognitively inspired clustering approach for critique-based recommenders, *Cogn. Comput.* 12 (2) (2020) 428–441, <http://dx.doi.org/10.1007/s12559-018-9586-5>.
- [308] L. McGinty, J. Reilly, On the evolution of critiquing recommenders, in: *Recommender Systems Handbook*, Springer, 2010, pp. 419–453, [http://dx.doi.org/10.1007/978-0-387-85820-3\\_13](http://dx.doi.org/10.1007/978-0-387-85820-3_13).
- [309] P. Pu, B. Faltings, L. Chen, J. Zhang, P. Viappiani, Usability guidelines for product recommenders based on example critiquing research, in: *Recommender Systems Handbook*, Springer, 2010, pp. 511–545, [http://dx.doi.org/10.1007/978-0-387-85820-3\\_16](http://dx.doi.org/10.1007/978-0-387-85820-3_16).
- [310] L. Chen, P. Pu, Critiquing-based recommenders: Survey and emerging trends, *User Model. User-Adapt. Interact.* 22 (1–2) (2011) 125–150, <http://dx.doi.org/10.1007/s11257-011-9108-6>.
- [311] M.R. Ogiela, U. Ogiela, Secure information management in hierarchical structures, in: T. hoon Kim, H. Adeli, R.J. Robles, M. Balitanas (Eds.), *Communications in Computer and Information Science*, in: *Communications in Computer and Information Science (CCIS)*, vol. 195, Springer, Berlin, Heidelberg, 2011, pp. 31–35, [http://dx.doi.org/10.1007/978-3-642-24267-0\\_5](http://dx.doi.org/10.1007/978-3-642-24267-0_5).
- [312] L. Ogiela, M.R. Ogiela, Cognitive security paradigm for cloud computing applications, *Concurr. Comput.: Pract. Exper.* 32 (8) (2020) <http://dx.doi.org/10.1002/cpe.5316>.
- [313] L.V. Nguyen, M.-S. Hong, J.J. Jung, B.-S. Sohn, Cognitive similarity-based collaborative filtering recommendation system, *Appl. Sci.* 10 (12) (2020) 1–14, <http://dx.doi.org/10.3390/app10124183>.
- [314] M. del Carmen Rodríguez-Hernández, S. Ibarri, R. Trillo, R. Hermoso, Context-aware recommendations using mobile P2P, in: 15th International Conference on Advances in Mobile Computing and Multimedia, MoMM, ACM, New York (USA), 2017, pp. 82–91, <http://dx.doi.org/10.1145/3151848.3151856>.
- [315] S. Ibarri, R. Trillo-Lado, T. Delot, Social-distance aware data management for mobile computing, in: 18th International Conference on Advances in Mobile Computing & Multimedia, MoMM 2020, ACM, ISBN: 978-1-4503-8922-8, 2020, pp. 138–142, <http://dx.doi.org/10.1145/3428690.3429164>, Position paper. Conference initially planned to be held in Chiang Mai (Thailand) but finally reconverted to an online conference due to the COVID-19 pandemic.
- [316] F. Ricci, Q.N. Nguyen, Acquiring and revising preferences in a critique-based mobile recommender system, *IEEE Intell. Syst.* 22 (3) (2007) 22–29, <http://dx.doi.org/10.1109/mis.2007.43>.
- [317] M. del Carmen Rodríguez-Hernández, S. Ibarri, Towards a context-aware mobile recommendation architecture, in: I. Awan, M. Younas, X. Franch, C. Quer (Eds.), 11th International Conference on Mobile Web Information Systems, MobiWIS, in: *Lecture Notes in Computer Science (LNCS)*, vol. 8640, Springer, Cham, 2014, pp. 56–70, [http://dx.doi.org/10.1007/978-3-319-10359-4\\_5](http://dx.doi.org/10.1007/978-3-319-10359-4_5).
- [318] K. Oku, S. Nakajima, J. Miyazaki, S. Uemura, Context-aware SVM for context-dependent information recommendation, in: Seventh International Conference on Mobile Data Management, MDM, IEEE, Washington (USA), 2006, p. 109, <http://dx.doi.org/10.1109/MDM.2006.56>.
- [319] Q. Li, C. Wang, G. Geng, R. Dai, A novel collaborative filtering-based framework for personalized services in M-commerce, in: 16th International Conference on World Wide Web, WWW, ACM, New York (USA), 2007, pp. 1251–1252, <http://dx.doi.org/10.1145/1242572.1242792>.
- [320] M. Hosseini-Pozveh, M. Nematabakhsh, N. Movahhedinia, A multidimensional approach for context-aware recommendation in mobile commerce, 2009, CoRR abs/0908.0982, Available at <http://arxiv.org/abs/0908.0982>. (Last Access: 29 December 2020).
- [321] D.G. Vico, G. Huecas, J.S. Rodríguez, Generating context-aware recommendations using banking data in a mobile recommender system, in: Sixth International Conference on Digital Society, ICDS, IARIA, 2012, pp. 73–78.
- [322] A. Gunawardana, G. Shani, A survey of accuracy evaluation metrics of recommendation tasks, *J. Mach. Learn. Res.* 10 (December) (2009) 2935–2962.
- [323] F. Ricci, Building useful recommender systems for tourists – keynote, in: ACM RecSys Workshop on Recommenders in Tourism (RecTour), in Conjunction with the 13th ACM Conference on Recommender Systems, RecSys, 2019, Available at <http://www.ec.tuwien.ac.at/rectour2019/keynote>. (Last Access: 29 December 2020).
- [324] L. Boratto, S. Carta, G. Fenu, F. Mulas, P. Pilloni, Influence of rating prediction on the accuracy of a group recommender system that detects groups, *IEEE Intell. Syst.* 31 (6) (2017) 22–27, <http://dx.doi.org/10.1109/MIS.2017.265120539>.