

Preparing to install Turbonomic on TechZone AWS, Azure and IBM Cloud Environments

This document will walk you through the steps on how to prepare your environment to demonstrate the Turbonomic on TechZone. This will include various steps such as

How to request a demo environment, Logging into your cloud of choice, and Step by Step guide for running the Automation.

Goals for the Demo:

- Prepare your TechZone environment to demo Turbonomic AWS, Azure and IBM Cloud which are supported with ROSA, ARO and ROKS OpenShift clusters.
- Configuration steps for Turbonomic including enabling license key and your first target environment to monitor.

Prerequisites:

- A valid IBM ID that can be used to access
 - o TechZone https://techzone.ibm.com/
- A valid GitHub ID that can be used to create a repository in your own organization
 - o GitHub https://github.com/
- Install a code editor, we recommend VSCode
 - VS Code https://code.visualstudio.com/
- Install a **Colima** a replacement for Docker Desktop https://github.com/abiosoft/colima
 - brew install Colima

Obtaining a License Key:

To use Turbonomic, you are required to install a license key. For Proof of Concepts, IBM Partners and IBMers can obtain it using the steps below.

Partners

For Partners follow these steps:

- 1. For PoCs/PoTs, Partners can download a license key from **PartnerWorld** https://www.ibm.com/partnerworld/public
- 2. You can search the software catalog for M05C4EN IBM Turbonomic Application Resource Management On-Prem 8.4.6 for install on Kubernetes English,
- 3. Download the package containing a license file for Turbonomic, with a name like CP4MCM_IBM_ARM_OEM_Premier_License_July_2022.lic
- 5. This file is covered by Turbonomic ARM P/N and are currently available under IBM PPA terms and conditions

IBMers

IBMers, can download a license key using these steps:



- 1. Go to XL Leverage https://w3-03.ibm.com/software/xl/download/ticket.wss
- 2. Search with keyword: turbonomic
- 3. Select the package M05C4EN IBM Turbonomic Application Resource Management On-Prem
- 8.4.6 for install on Kubernetes English and download
- 4. Extract this download package to get the turbonomic license key
 This package contains license file for turbonomic, with a name like


CP4MCM_IBM_ARM_OEM_Premier_License_July_2022.lic



Requesting TechZone Environment


Demo Steps:

- 1. If you have not already done so, access the Tech Zone collection for Turbonomic Automation for AWS, Azure, and IBM Cloud
 - a. https://techzone.ibm.com/collection/turbonomic-automation-multicloud

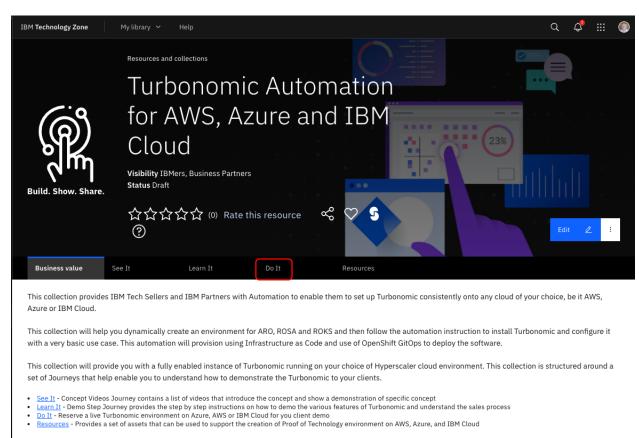


2. The first thing you need to do is to request an access to the demo environment. Click on **Do It**



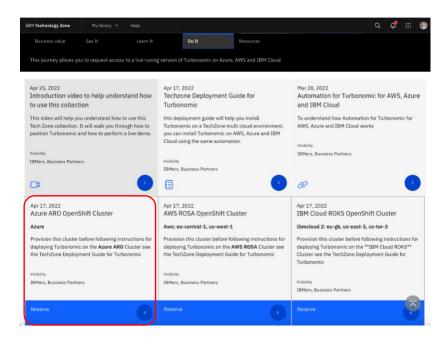


3. Click on the cloud type of your choice. For this guide we will use **Azure ARO OpenShift Cluster** environment

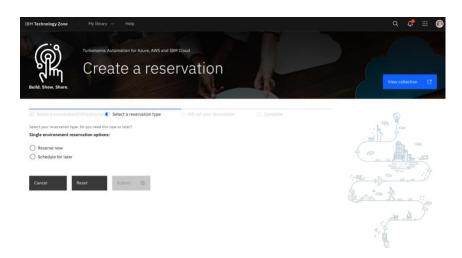


4. Click on the **Reserve now** radio button



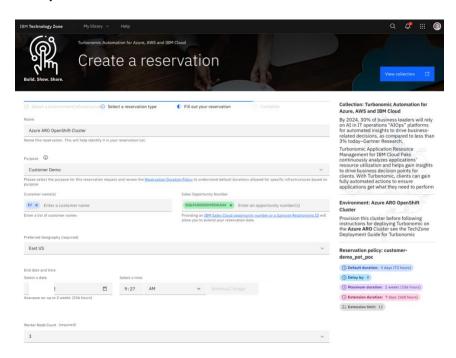

- 5. Complete the Reservation Type form. Please make sure all the fields are complete, you may want to select **Customer Demo** as the Purpose of your request
 - a. As these are real AWS, Azure, and IBM Cloud environment, you will need to use a real customer opportunity value from IBM Sales Cloud https://w3.ibm.com/w3publisher/ibm-sales-cloud
- 6. Enter the **Sales Opportunity Number** as you will not be able to proceed without a valid and live opportunity
- 7. Select your duration for the environment, and for the size for Turbonomic keep it as a **3 Worker Node Count** and **4 CPU x 16GB** worker node flavor
- 8. Click on **Submit** once all the fields are entered correctly
- 9. Once the **Submit** has completed you will see the following screen with a THANK YOU message to confirm that your reservation is being processed

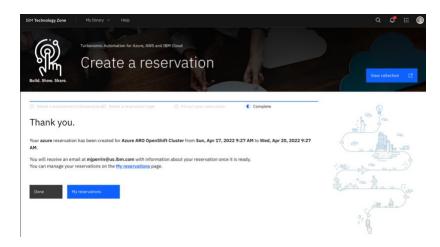




10. Check your email for confirmation.



Receive Confirmation Email Log in for the First Time


Steps:

1. Once you have reserved the demo environment, you will receive the confirmation email.

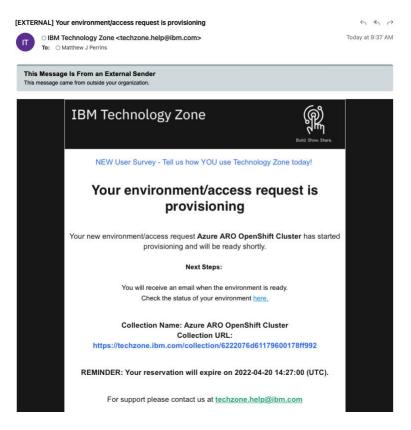

- 2. It is important that you read the email to follow the instructions on how to log into the Tech Zone Demo Account.
- 3. You will receive a second email once your reservation has been processed; Click on **My reservations** to see the status of your reservation.




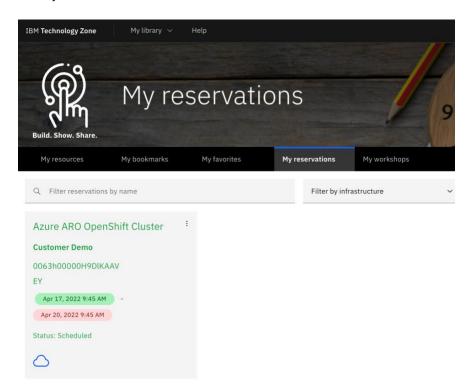

Log into your TechZone Environment


Steps:

1. Navigate to **TechZone** and **Your Reservations**, click on the reservation you created in the previous steps.

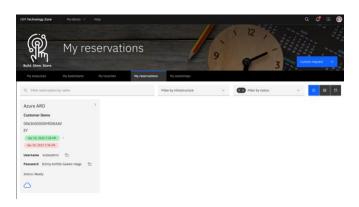


2. You will see the reservation view in detail, copy the **password** and click on the **Open your Azure environment** button.





- 3. This will display the OpenShift login screen for the cluster, enter the user ID and password details from the previous reservation screen. Typically, it is **kubeadmin** for the user id and the system generated password.
- 4. Once you have logged in you will see the main OpenShift administration screen

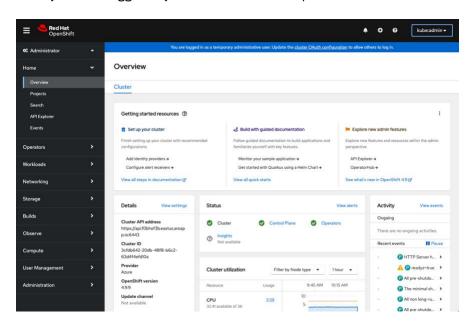

5. You have successfully logged into your TechZone environment. You can now start the installation process

Installing Turbonomic into your TechZone environment



IBM GSI Ecosystem Lab

The installation process will use standard Terraform git repository that has been built using the modules you need to make Turbonomic installation consistent across the three cloud environments AWS, Azure, and IBM Cloud.

Steps:

1. First step is to clone the automation code to your local machine. Run this git command in your favorite command line shell.

\$ git clone https://github.com/IBM/automation-turbonomic

- 2. Navigate into the **automation-turbonomic** folder using your command line.
 - a. The **README.md** has a comprehensive instruction on how to install this into cloud environments other than TechZone. This document focuses on getting it running in a TechZone requested environment.
- 3. The first step is setup your **credentials.properties** file. This will enable a secure access to your cluster.

\$ cp credentials.template credentials.properties \$ code credential.properties

Add the values for the Credentials to access the OpenShift Environment
Instructions to access this information can be found in the README.MD
This is a template file and the ./launch.sh script looks for a file based on this template named credentials.properties

gitops_repo_host: The host for the git repository

TF_VAR_gitops_repo_host=github.com

gitops_repo_username: The username of the user with access to the repository

TF_VAR_gitops_repo_username=

gitops_repo_token: The personal access token used to access the repository

TF_VAR_gitops_repo_token=

TF_VAR_server_url: The url for the OpenShift api server

TF_VAR_cluster_login_token: Token used for authentication to the api server

TF_VAR_cluster_login_token=

- 4. You will need to populate these values. Add your **Git Hub** username and your Personal Access Token to **repo_username** and **repo_token**
- 5. From you **OpenShift console** click on top right menu and select **Copy login command** and click on **Display Token**



IBM GSI Ecosystem Lab

Your API token is

sha256~uSjFiiAvvc1TBGK4gRhVIbWknF5tVvVxEZ790yyTENo

Log in with this token

oc login --token=sha256~uSjFiiAvvc1TBGK4gRhVIbWknF5tVvVxEZ790yyTENo --server=https://api.hr9czzi9.eastus.aroapp.io:6443

Use this token directly against the API

curl -H "Authorization: Bearer sha256~uSjFiiAvvc1TBGK4gRhVIbWknF5tVvVxEZ790yyTENo"
 "https://api.hr9czzi9.eastus.aroapp.io:6443/apis/user.openshift.io/v1/users/~"

Request another token

Logout

- 6. Copy the API Token value into the login_token value
- 7. Set the **repo_username** value to your GitHub User Name
- 8. Copy the **Server URL** into the **server_url** value, only the part starting with **https**
- 9. You need to make sure you are not running **Docker Desktop** as this is not currently allowed under the new terms and conditions. You will need to install **Colima** as an alternative

\$ brew install colima

\$ colima start

10. We are now ready to install Turbonomic, run the **launch.sh** command, make sure you are in the root of the **automation-turbonomic** repository

\$./launch.sh

Cleaning up old container: cli-tools-WljCg

Initializing container cli-tools-WIjCg from quay.io/cloudnativetoolkit/cli-tools:v1.1

Attaching to running container...

/terraform \$

- 11. **Launch.sh** will download a container image that contains all the command line tools to enable easy installation of the software. Once the download is complete, , it will mount the local file system and exec into the container for you to start running commands from within this custom container.
- 12. Next step is to create a workspace to run the Terraform automation.
- 1. Run the command **setup-workspace.sh** you will need to provide the **-p** platform value which can be **azure** | **aws** or **ibm** then supply a prefix name
 - \$./setup-workspace.sh -p azure -n tubro01
- 13. The default **terraform.tfvars** file is symbolically linked to the new workspaces folder. This is to enable you to edit the file in your native operating system of your choice.
- 14. Edit the default terraform.tfvars file to enable you to setup the GitOps parameters.



IBM GSI Ecosystem Lab

Name: Turbonomic Terraform Variable File

 $\hbox{\# Desc: Initial input variables to support installation of Turbonomic into the cloud provider of your choice}\\$

gitops-ocp-turbonomic_storage_class_name: Name of the block storage class to use - if multizone deployment then waitforfirstconsumer must be set on storageclass binding mode
<your block storage on aws: gp2, on azure: managed-premium, on ibm: ibmc-vpc-block-10iops-tier>
gitops-ocp-turbonomic_storage_class_name="managed-premium"

gitops-repo_host: The host for the git repository.
gitops_repo_host="github.com"

gitops-repo_type: The type of the hosted git repository (github or gitlab).
gitops_repo_type="github"

gitops-repo_org: The org/group where the git repository exists/will be provisioned. ## your gitorg - if left blank the value will default to your username gitops_repo_org="mjperrins"

gitops-repo_repo: The short name of the repository (i.e. the part after the org/group name) gitops_repo_repo="turbo-gitops-01"

gitops-cluster-config_banner_text: The text that will appear in the top banner in the cluster gitops-cluster-config_banner_text="Software Everywhere Turbonomic"

- 15. Change the storage_class_name value will have already been set to **managed_premium** for Azure and other values for AWS. If we are on IBM Cloud, you will need to run the **202** automation to configure Storage for that environment
- 16. You will see that the repo_type and repo_host are set to GitHub, you can change these to other Git Providers, like Git Hub Enterprise or GitLab.
- 17. For the repo_org value, set it to your default org name, or specific a custom org value. This is the organization that the GitOps Repository will be created in. Click on top right menu and select **Your Profile** to take you to your default organization.
- 18. Set the repo_repo value to a unique name for you to recognize as the place where the GitOps configuration is going to be placed before Turbonomic is installed into the cluster.
- 19. You can change the Banner text to something useful for you client project or demo.
- 20. Once in the container, check out the file system with **ls -al** command to see the workspace directory is now configured for you.
- 21. Navigate into the /workspaces/current folder
- 22. Navigate into the 200 folder and run the following commands

\$ cd 200-openshift-gitops

\$ terraform init

\$ terraform apply --auto-approve

......

\$ Apply complete! Resources: 78 added, 0 changed, 0 destroyed.

- 23. This will kick off the automation for setting up the GitOps Operator into your **TechZone** cluster.
- 24. You can check the progress by looking at two places, first look in your git hub repository. You will see the git repository has been created based on the name you have provided. The Turbonomic install will populate this with information to let OpenShift GitOps install the



IBM GSI Ecosystem Lab

software. The second place to look is the OpenShift console, Click **Workloads->Pods** and you will see the GitOps operator being installed.

If you are using IBM Cloud and set the `-p` flag to `ibm` you and navigate into the `202-turbonomic-ibmcloud-storage-class` folder and run the following commands, this will configure the storage correctly for IBM Cloud. If you are installing on AWS or Azure you can skip this step and move to the 250 installation of Turbonomic

\$ cd 202-turbonomic-ibmcloud-storage-class


- \$ terraform init
- \$ terraform apply --auto-approve
- 25. Now GitOps is installed in the cluster, and, we have bound the git repository to OpenShift GitOps operator. We are now ready to populate this with some Software configuration that will cause OpenShift GitOps to install the software into the cluster. Navigate into the **250** folder and run the following commands, this will install Turbonomic into the cluster.

\$ cd 250-turbonomic-multicloud

- \$ terraform init
- \$ terraform apply --auto-approve


.....

- \$ Apply complete! Resources: 38 added, 0 changed, 0 destroyed.
- 26. Once the installation has finished you will see a message from Terraform defining the state of the environment.
- 27. You will see the first change with a purple banner describing what was installed



28. The next step is to validate everything installed correctly. Open your git repository where your git ops configuration was defined.




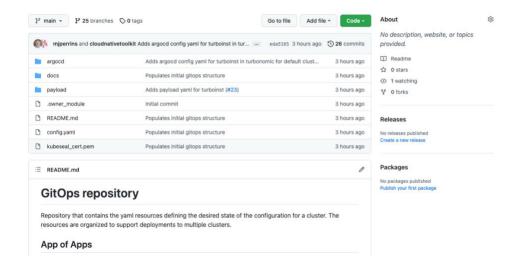

29. Check if the **payload** folder has been created with the correct definitions for GitOps. Navigate to the **payload/2-services/namespace/turbonomic** folder and look at the content of the installation YAML files.




- 30. You should see the **Operator** CR definitions
- 31. Final Step is to Open up **Argo CD** (OpenShift GitOps) check if it is correctly configured, click on the Application menu 3x3 Icon on the header and select **Cluster Argo CD** menu item.



32. Complete the authorization with OpenShift and then narrow the filters by selecting the **Turbonomic** namespace.



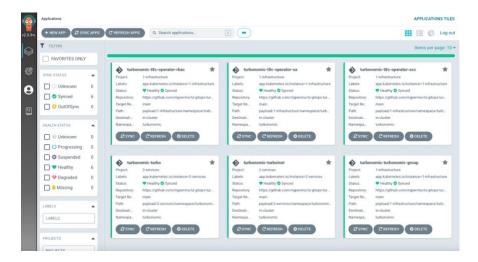

- 33. This will show you the GitOps dashboard of the software you have installed using GitOps techniques
- 34. Click on **turbonomic-turboinst** tile
- 35. You will see all the microservices that Turbonomic uses to install and their enablement state

THIS CONCLUDES THE GITOPS INSTALLATION STEPS




Configuring Turbonomic after installation into TechZone

Now the installation process is complete it is time to configure Turbonomic and load your downloaded license key.

Steps:

- In the OpenShift console navigate to the Networking->Routes and change the project from to turbonomic, you will see the route to launch dashboard for Turbonomic. Click on the Location URL to open Turbonomic
- 2. The first time you launch the dashboard it will ask you to define an **Administration** password. Enter your new password and confirm it. **Don't forget to store it in your password manager**
- 3. Once the account is created, you will be greeted with the default screen.

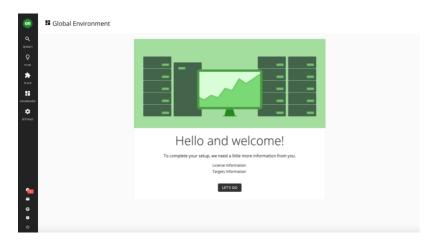


- 4. Make sure you have downloaded the Tech Sales license key following the instructions provided in the pre-requisites section of this document.
- 5. Click on **Settings** on left menu, then click on **License** icon, click **Import license**
- 6. Drag you license key into the drop area, and you will get a screen stating it has been added
- 7. Now we need to point Turbonomic at an environment to monitor
- 8. Click on the Add Targets button.



- 9. Click on Kubernetes-Turbonomic then Validate button to complete the validation
- 10. Then click on the **On** icon at the top of the left menu to see a monitor view of **Turbonomic**



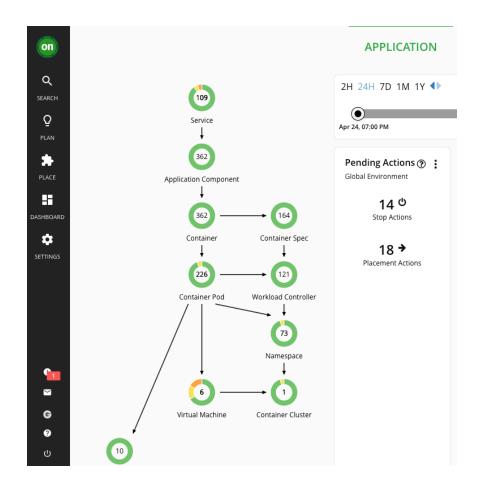

THIS CONCLUDES SETUP OF TURBONOMIC