

User Guide: fn_utilities_v2.0.0

Table of Contents

- [App Host Setup](#)
- [Function - Utilities: Attachment Hash](#)
- [Function - Utilities: Attachment to Base64](#)
- [Function - Utilities: Attachment Zip Extract](#)
- [Function - Utilities: Attachment Zip List](#)
- [Function - Utilities: Base64 to Artifact](#)
- [Function - Utilities: Base64 to Attachment](#)
- [Function - Utilities: Call REST API](#)
- [Function - Utilities: Domain Distance](#)
- [Function - Utilities: Email Parse](#)
- [Function - Utilities: Excel Query](#)
- [Function - Utilities: Expand URL](#)
- [Function - Utilities: Extract SSL Cert From Url](#)
- [Function - Utilities: Get Contact Info](#)
- [Function - Utilities: JSON2HTML](#)
- [Function - Utilities: Parse SSL Certificate](#)
- [Function - Utilities: PDFID](#)
- [Function - Utilities: Resilient Search](#)
- [Function - Utilities: Shell Command](#)
- [Function - Utilities: String to Attachment](#)
- [Function - Utilities: Timer](#)
- [Function - Utilities: XML Transformation](#)
- [Rules](#)

Release History

Version	Date	Notes
2.0.0	7/2020	Numerous fixes and Python 3 support ongoing
		Shell Command support for Remote Linux Execution

App Host Setup

This integration is available for use in App Host. There are a few differences to be aware of:

- When using Shell Command, several Linux commands have been installed on the container including: dig, nslookup, traceroute and whois. These commands can be specified within the app.config file directly such as: `nslookup=nslookup ""`. Other commands not loaded within the container can be accessed via remote shell execution. See the section [Function - Utilities: Shell Command](#) for more information.

Function - Utilities: Attachment Hash

Calculate hashes for a file attachment. Returns **md5**, **sha1**, **sha256** and other hashes of the file content. Those hashes can then be used as artifacts or in other parts of your workflows.

The screenshot shows the 'Customization Settings' page for a workflow named 'Example: Attachment Hash'. The page has a top navigation bar with 'Resilient' logo and links for Dashboards, Simulations, Incidents, and Create. The 'Workflows' tab is selected. The workflow details include:

- Name:** Example: Attachment Hash
- API Name:** example_attachment_hash
- Description:** An example that calculates hash artifacts from an attachment.
- Object Type:** Attachment
- Creator:** Orchestration Engine
- Last Modified:** 07/17/2019 14:20
- Last Modified By:** Orchestration Engine
- Associated Rules:** Example: Attachment Hash

Below the settings is a workflow diagram showing a sequence of steps. The first step is a circle, followed by a rectangle labeled 'Utilities: Attachment Hash' with a 'f(x)' icon. A callout box points to this step with the text: 'Calculate hashes of a file attachment. The results are added to the incident as new artifacts.' The diagram ends with another circle.

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Attachment to Base64

Reads a file attachment in the incident, and produces a base64-encoded string with the file attachment content. This content can then be used in combination with other workflow functions to create an artifact, a new file attachment, or to analyze the contents using various tools.

The screenshot shows the 'Customization Settings' page for a workflow named 'Example: Attachment to Base64'. The page has a top navigation bar with 'Resilient' logo and links for Dashboards, Simulations, Incidents, and Create. The 'Workflows' tab is selected. The workflow details include:

- Name:** Example: Attachment to Base64
- API Name:** example_attachment_to_base64
- Description:** Convert an Attachment of any type to a Base64 Encoded string
- Object Type:** Attachment
- Creator:** Orchestration Engine
- Last Modified:** 07/17/2019 14:20
- Last Modified By:** Orchestration Engine
- Associated Rules:** Example: Attachment to Base64

Below the settings is a workflow diagram showing a sequence of steps. The first step is a circle, followed by a rectangle labeled 'Utilities: Attachment to Base64' with a 'f(x)' icon. A callout box points to this step with the text: 'This function will convert/transform any attachment to Base64 string and will return the converted string.' The diagram ends with another circle.

- Inputs:

Customization Settings


[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: Zip List

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *
 API Name *
 Description
 Object Type *

Creator Orchestration Engine
 Last Modified 07/17/2019 14:20
 Last Modified By Orchestration Engine
 Associated Rules [Example: Zip List](#)

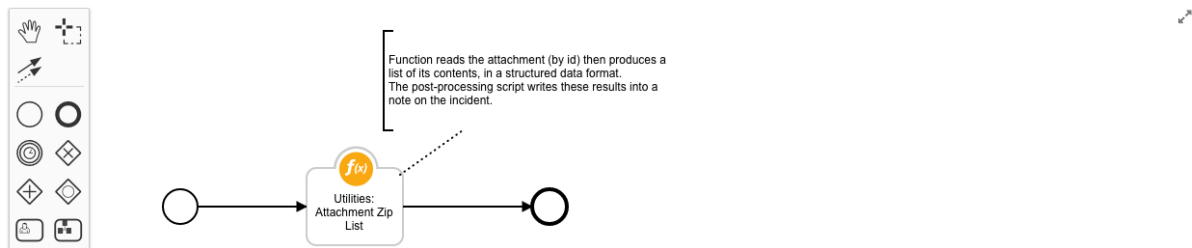

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Base64 to Artifact

Creates a new artifact from a Base64 string. You can also specify the artifact type and description.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)

Artifacts

Functions / utilities_base64_to_artifact

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *
 API Name *
 Message Destination *
 Description

Creator Orchestration Engine
 Last Modified 07/19/2019 16:17
 Last Modified By Orchestration Engine
 Associated Workflows *Function is not currently referenced by any workflow.*

Inputs

base64content	x
incident_id	x
artifact_file_type	x
file_name	x
content_type	x

Input Fields

Search...

artifact_file_type	
artifact_id	
attachment_id	
attachment_name	

- Inputs:
- Outputs:
- Example Pre-Process Script:

Function - Utilities: Base64 to Attachment

Creates a new attachment from a base64 string. You can also specify the file name and content type to use.

resilient Dashboards ▾ Simulations Incidents **Create** Admin User
Test Organization

Customization Settings

Layouts Rules Scripts Workflows Functions Message Destinations Phases & Tasks Incident Types Breach

Artifacts

Functions / utilities_base64_to_attachment Cancel Save & Close Save

Name * Utilities: Base64 to Attachment

API Name * utilities_base64_to_attachment

Message Destination * fn_utilities

Description Create a new attachment from a base64 string.

Inputs

- base64content
- incident_id
- task_id
- file_name
- content_type

Input Fields Add Field

- artifact_file_type
- artifact_id
- attachment_id
- attachment_name

Metadata:
Creator Orchestration Engine
Last Modified 07/19/2019 16:17
Last Modified By Orchestration Engine
Associated Workflows Example: Zip Extract

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Call REST API

This function calls a REST web service. It supports the standard REST methods: GET, HEAD, POST, PUT, DELETE and OPTIONS.

The function parameters determine the type of call, the URL, and optionally the headers, cookies and body. The results include the text or structured (JSON) result from the web service, and additional information including the elapsed time.

Customization Settings

Layouts
Rules
Scripts
Workflows
Functions
Message Destinations
Phases & Tasks
Incident Types
Breach
Artifacts

Workflows / Example: Call REST API

Cancel
Save & Close
Save

Name *

Example: Call REST API

API Name *

example_call_rest_api

Description

An example of calling a REST API webservice from a workflow.

Object Type *

Artifact

Creator

Orchestration Engine

Last Modified


07/17/2019 14:20

Last Modified By

Orchestration Engine

Associated Rules

Example: Call REST API

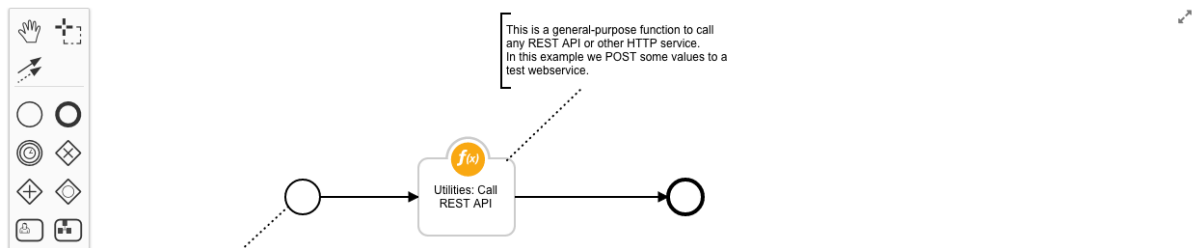

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Domain Distance

Identifies similarity between a suspicious domain name and a list of valid domain names. Low distance result indicates a possible spoof attempt. For example, www.ibm.com and www.1bm.com would have a low distance. This can used for urls, dns names and email addresses.

Customization Settings

Layouts
Rules
Scripts
Workflows
Functions
Message Destinations
Phases & Tasks
Incident Types
Breach
Artifacts

Workflows / Example: Domain Distance

Cancel
Save & Close
Save

Name *

Example: Domain Distance

API Name *

example_domain_distance

Description

An example testing for confusable domain names

Object Type *

Artifact

Creator

Orchestration Engine

Last Modified


07/17/2019 14:20

Last Modified By

Orchestration Engine

Associated Rules

Example: Domain Distance

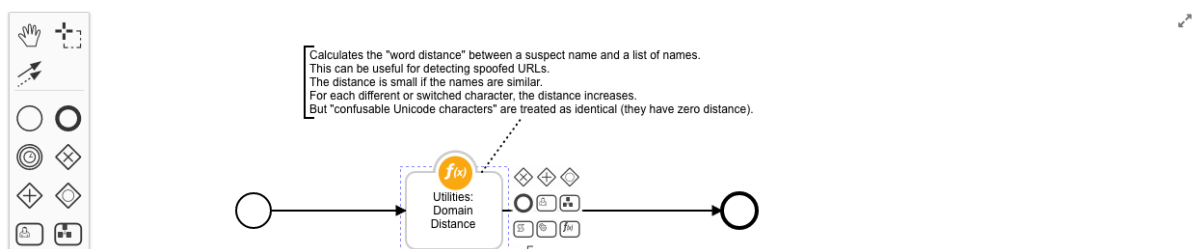

- Inputs:
- Outputs:
- Example Pre-Process Script:

► Example Post-Process Script:

Function - Utilities: Email Parse

Extracts message headers and body parts from an email message (.eml or .msg).

Any attachments found are added to the incident as artifacts if `utilities_parse_email_attachments` is set to True.

Resilient Dashboards Simulations Incidents **Create** Admin User Test Organization

Customization Settings

Layouts Rules Scripts **Workflows** Functions Message Destinations Phases & Tasks Incident Types Breach Artifacts

Workflows / Example: Email Parsing (Attachment) [Cancel] [Save & Close] [Save]

Name * Example: Email Parsing (Attachment)

API Name * example_email_parsing_attachment

Description Example Workflow showing to parse an Email File (.eml or .msg) from Incident/Task Attachments. Sender and recipient email addresses are added as Artifacts. URLs and IPs found in the email headers or body are also added as Artifacts. The body of the email is added as a Note to the Incident. If attachments are found in the parsed email message, they are added as Email Attachment Artifacts.

Object Type * Attachment

Creator Admin User
Last Modified 07/17/2019 14:20
Last Modified By Orchestration Engine
Associated Rules Example: Email Parsing (Attachment)

Workflow Diagram: Start Node → Utilities: Email Parse → End Node

Supporting Outlook .msg files

- This function relies on `mail-parser>=3.9.3`

For Integrations Servers:

- To support parsing of Outlook email files (.msg), you need to install the `msgconvert` tool
- `msgconvert` is a tool written in Perl and can be found in `Email::Outlook::Message` (Centos/RHEL).
- See <https://github.com/SpamScope/mail-parser> for more information on the packaged used.

Install `msgconvert` on CentOS/RHEL based systems:

```
$ sudo yum install cpan
$ sudo cpan -fTi install Email::Outlook::Message
```

For App Host Environments:

- The packages required to parse Outlook .msg files is built into the container.

► Inputs:

► Outputs:

- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Excel Query

Extracts ranges of data or named ranges specified by the user from a Microsoft Excel document.

The function uses a Python library called openpyxl (<http://openpyxl.readthedocs.io/en/stable/>) to interface with Excel files.

The screenshot displays the Resilient interface for customizing a workflow. The top navigation bar includes 'Resilient', 'Dashboards', 'Simulations', 'Incidents', and 'Create'. The 'Customization Settings' section is active, showing the 'Example: Create Artifacts From Excel Data' workflow. The settings form includes fields for Name, API Name, Description, and Object Type. The workflow diagram shows a single step 'Utilities: Excel Query'.

Customization Settings

Layouts Rules Scripts Workflows Functions Message Destinations Phases & Tasks Incident Types Breach Artifacts

Workflows / Example: Create Artifacts From Excel Data

Name * Example: Create Artifacts From Excel Data

API Name * example_create_artifacts_from_excel_data

Description Created artifacts with information extracted from an excel sheet.

Object Type * Attachment

Creator Orchestration Engine

Last Modified 07/17/2019 14:20

Last Modified By Orchestration Engine

Associated Rules Example: Use Excel Data

Workflow Diagram:

```
graph LR; Start(( )) --> Function[Utilities: Excel Query]; Function --> End(( ))
```

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Expand URL

Takes a shortened URL and follows it through redirects as it expands. The results include each URL, which are added to a new artifact.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: Expand URL

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *

API Name *

Description

Take a url (mostly shortened) and follow it through redirects as it's expanded

Object Type *

Artifact

Creator Orchestration Engine
Last Modified 07/17/2019 14:20
Last Modified By Orchestration Engine
Associated Rules [Example: Expand URL](#)



- ▶ Inputs:
- ▶ Outputs:
- ▶ Example Pre-Process Script:
- ▶ Example Post-Process Script:

Function - Utilities: Extract SSL Cert From Url

This function takes in a HTTPS URL or DNS input, establishes a connection and then attempts to acquire the SSL certificate. If successful, the function then saves the certificate as an artifact of type 'X509 Certificate File'. Works on most URLs including those with self-signed or expired certificates.

The output of this function is a string representation of the certificate saved in PEM format.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: Extract SSL Cert from URL

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *

API Name *


Description

This workflow takes in a HTTPS URL and attempts to acquire its Certificate, saving it as an artifact. The workflow runs at the artifact level

Object Type *

Artifact

Creator Orchestration Engine
Last Modified 07/17/2019 14:20
Last Modified By Orchestration Engine
Associated Rules [Example: Extract SSL Certificate](#)

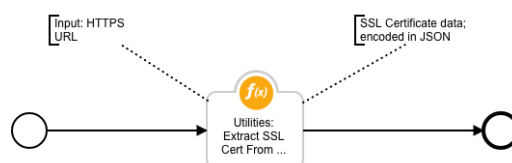

- ▶ Inputs:
- ▶ Outputs:

- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Get Contact Info

Retrieves contact information of the owner and members of an incident or task.

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: JSON2HTML

Produces an HTML representation of JSON data. All data is converted into tables of key / value pairs or lists.

Provide an optional parameter `json2html_keys` to limit the JSON data to display.

For the example below, specifying `key1.key2.key3` will only convert the JSON data associated with that key path.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: JSON2HTML

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *	Example: JSON2HTML
API Name *	example_json2html
Description	Example to extract json to html table
Object Type *	Artifact

Creator Orchestration Engine
Last Modified 07/17/2019 14:20
Last Modified By Orchestration Engine
Associated Rules [Example: JSON2HTML](#)



- ▶ Inputs:
- ▶ Outputs:
- ▶ Example Pre-Process Script:
- ▶ Example Post-Process Script:

Function - Utilities: Parse SSL Certificate

This function produces the structured data from a provided SSL certificate. Three inputs are accepted by the function. There are 2 defined ways to use this function for parsing certificates.

Option 1 involves providing a JSON-encoded representation of a certificate. In this case the certificate input parameter should be this JSON string.

Option 2 involves providing a certificate file for parsing. When the rule is triggered on an artifact, both the incident_id for that incident and the artifact_id for the specified certificate file must be provided.

NOTE: The Parse SSL Certificate function expects a certificate of type PEM. If you require a way to get a PEM formatted certificate from a URL consider using this in conjunction with the Extract SSL Cert from URL function.

Customization Settings


[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: Parse SSL Certificate

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *	Example: Parse SSL Certificate
API Name *	example_parse_ssl_certificate
Description	An example workflow that takes a in a PEM encoded SSL certificate as input and returns structured information about the certificate.
Object Type *	Artifact

Creator Orchestration Engine
Last Modified 07/17/2019 14:20
Last Modified By Orchestration Engine
Associated Rules [Example: Parse SSL Certificate](#)

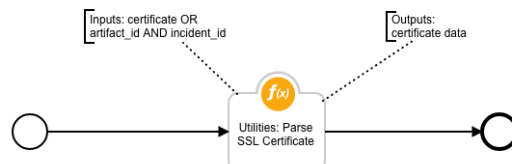

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: PDFiD

Produces summary information about the structure of a PDF file, using Didier Stevens' pdfid (<https://blog.didierstevens.com/programs/pdf-tools/>). Provide the PDF file content as a base64-encoded string, for example the output from the "Attachment to Base64" function.

This function is useful in initial triage of suspicious email attachments and other files. It allows you to identify PDF documents that contain (for example) JavaScript or that execute an action when opened. PDFiD also handles name obfuscation. The combination of PDF automatic action and JavaScript makes a document very suspicious.

Customization Settings

Layouts
Rules
Scripts
Workflows
Functions
Message Destinations
Phases & Tasks
Incident Types
Breach
Artifacts

Workflows / Example: PDFID

Cancel

Save & Close

Save

Name *

Example: PDFID

API Name *

example_pdfid

Description

An example of using the PDFID function to get summary information about a PDF file attachment.

Object Type *

Attachment

Creator

Orchestration Engine

Last Modified


07/17/2019 14:20

Last Modified By

Orchestration Engine

Associated Rules

Example: PDFID

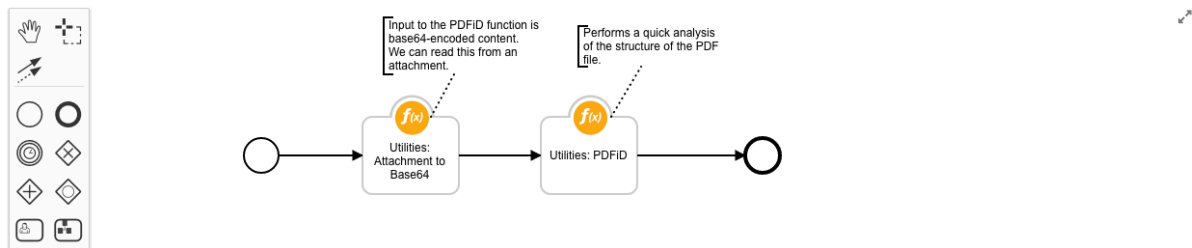

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Resilient Search

This function searches the Resilient platform for incident data according to the criteria specified, and returns the results to your workflow. It can be used to find incidents containing data that matches any string, or incidents currently assigned to a given user, or a very wide range of other search conditions.

NOTE: The search results may include data from incidents that the current Resilient user (the person who triggered the workflow) cannot access. Often your Resilient users have the **Default** role that allows them to only see incidents where they are members. This function runs with the permissions of your integration account, which typically may have much wider access privileges. **Use with caution, to avoid information disclosure.**

Customization Settings


[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: Resilient Search

[Cancel](#)
[Save & Close](#)
[Save](#)

Name *	Example: Resilient Search
API Name *	example_resilient_search
Description	An example of searching Resilient.
Object Type *	Attachment

Creator Orchestration Engine
Last Modified 07/17/2019 14:20
Last Modified By Orchestration Engine
Associated Rules [Example: Resilient Search](#)

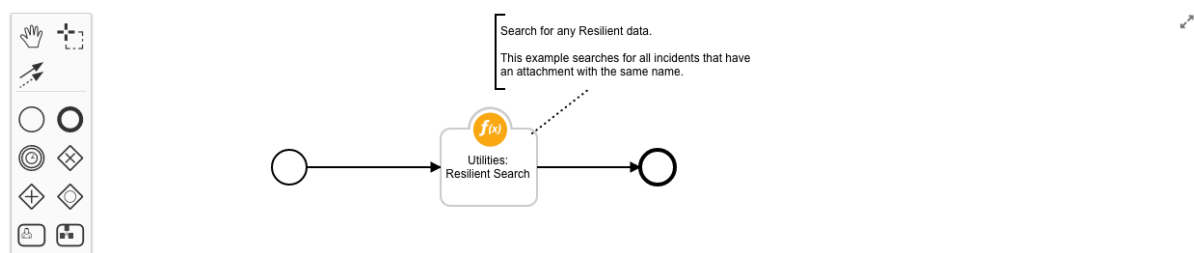

- ▶ Inputs:
- ▶ Outputs:
- ▶ Example Pre-Process Script:
- ▶ Example Post-Process Script:

Function - Utilities: Shell Command

This function allows your workflows to execute shell-scripts locally or remotely, and return the result into the workflow. The results include the **stdout** and **stderr** streams, the return code, and information about the execution time. If the output of the shell script is JSON, it is returned as structured data. Results can then be added to the incident as file attachments, artifacts, data tables, or any other uses.

These functions can be run on any platform. Different modes supported:

- Remote Linux execution
- Remote Windows command and powershell execution
- Local command execution of Linux commands such as nslookup, dig, traceroute and whois
- Local execution of Windows Powershell commands if resilient-circuits is installed on a Windows platform.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

[Workflows](#) / Example: Shell Command

Cancel
Save & Close
Save

Name *
example: Shell Command
API Name *
example_shell_command
Description
An example running shell commands for integration
Object Type *
Artifact

Creator
Orchestration Engine
Last Modified
07/17/2019 14:20
Last Modified By
Orchestration Engine
Associated Rules
Example: Shell Command

- For security, the list of available shell commands must be **configured explicitly by the administrator**. To do this, edit the [fn_utilities] section of the [app.config](#) file.
- NOTE:** The parameter values , , may contain spaces, dashes and other characters. In your command configuration, they must be surrounded with double-quotes. Failure to properly quote your command parameters creates a security risk, since the parameter values usually come from artifacts and other untrusted data.

For local and remote Windows environments:

- Remote commands must specify a target Windows machine that has Windows Remote Management (WinRM) enabled. This can be done by running [winrm qc](#) in the remote computer's command prompt.
- Remote shells have a max memory that may not be sufficient to run your script; to change this value you must set [MaxMemoryPerShellMB](#).
- For remote powershell scripts the, [shell_param2](#), and [shell_param3](#) values map [\\$args\[0\]](#), [\\$args\[1\]](#), and [\\$args\[2\]](#) respectively in the Powershell script.

[app.config](#) examples:

- Linux Operating Systems basic examples:

```
# Remote Linux and Windows servers:
remote_computer=(usr1:password@192.168.1.186)
remote_computer_windows=(usr2:password@192.168.1.184)

# Remote Windows commands:
tracert_windows_ps=[\Users\ms\tracert.ps1]
tracert_windows_cmd=[tracert.exe -h 10 ]

# Remote Linux command:
tracertpath=(tracertpath -m 10 ")

# Local Linux server commands:
nslookup=nslookup ""
```

```
dig=dig ""
traceroute=traceroute -m 15 ""
```

- The following examples use the Volatility forensics framework, the first parameter is filename of the memory image, assuming \$VOLATILITY_LOCATION is set in the environment (such as in the system unit configuration). The second parameter is the Volatility profile ("Win7SP0x64" etc).

```
imageinfo=python /path/to/vol.py -f "" imageinfo -- output=json
kdbgscan=python /path/to/vol.py -f "" -- profile="" kdbgscan --output=json
psscan=python /path/to/vol.py -f "" -- profile="" psscan --output=json
dlllist=python /path/to/vol.py -f "" -- profile="" dlllist --output=json
```

Running Powershell Scripts Remotely:

To configure running scripts remotely, the user must make these changes to the config file:

- Specify acceptable powershell compatible extensions of script files, comma separated:
 - `remote_powershell_extensions=ps1,psc1`
- Specify the transport authentication method
 - `remote_auth_transport=ntlm`
- Specify remote commands in the config file wrapped in square brackets []
 - `remote_command=[C:\remote_directory\remote_script.ps1]`
- Specify a remote computer in the config file to run the script wrapped in parentheses ()
 - `remote_computer=(username:password@server)`

Examples of remote commands:

```
# Remote commands
remote_command1=[C:\scripts\remote_script.ps1]
remote_command2=[C:\scripts\another_script.ps1]

# Remote computers
remote_computer1=(domain\administrator:password@server1)
remote_computer2=(domain\admin:P@ssw0rd@server2)
```

- These remote commands can then be run in the workflow using the syntax `remote_command:remote_computer` as the input for `shell_command`. Examples:
 - `remote_command1:remote_computer1` runs `remote_command1` remotely on `remote_computer1`
 - `remote_command2:remote_computer1` runs `remote_command2` remotely on `remote_computer1`

► Inputs:

► Outputs:

► Example Pre-Process Script:

► Example Post-Process Script:

Function - Utilities: String to Attachment

Creates a new file (.txt) attachment in the incident or task from a string that your workflow provides as input.

resilient Dashboards Simulations Incidents Create Admin User Test Organization

Customization Settings

Layouts Rules Scripts Workflows Functions Message Destinations Phases & Tasks Incident Types Breach Artifacts

Workflows / Example: String to Attachment

Cancel Save & Close Save

Name * Example: String to Attachment

API Name * example_string_to_attachment

Description An example of creating an attachment from an inputted string

Object Type * Artifact

Creator Orchestration Engine

Last Modified 07/17/2019 14:20

Last Modified By Orchestration Engine

Associated Rules Example: String to Attachment

Utilities: String to Attachment

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Function - Utilities: Timer

This function implements a timer (sleep) function that when called from a workflow will cause the workflow to pause for the specified amount of time. The function takes one of two parameters as input: **utilities_time** or **utilities_epoch**.

The **utilities_time** parameter is a string that specifies the total amount of time to pause. The input string is of format **time value** concatenated with a **time unit** character, where character is: • **s** for seconds • **m** for minutes • **h** for hours • **d** for days

For example: **30s** = 30 seconds; **20m** = 20 minutes; **5h** = 5 hours; **6d** = 6 days

The **utilities_epoch** parameter is the epoch time that the timer function should stop sleeping. An epoch time value is returned from the date time picker UI widget.

The timer function will break down the total amount of time to pause into smaller sleep time intervals and check in between sleep time whether the workflow has been terminated while the function is running. If the workflow has been terminated, the function will end execution.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: Timer

[Cancel](#)
[Save & Close](#)
[Save](#)


Name *

API Name *

Description

Object Type *

Creator [Orchestration Engine](#)
Last Modified 07/17/2019 15:44
Last Modified By [Admin User](#)
Associated Rules [Example: Timer Epoch](#)

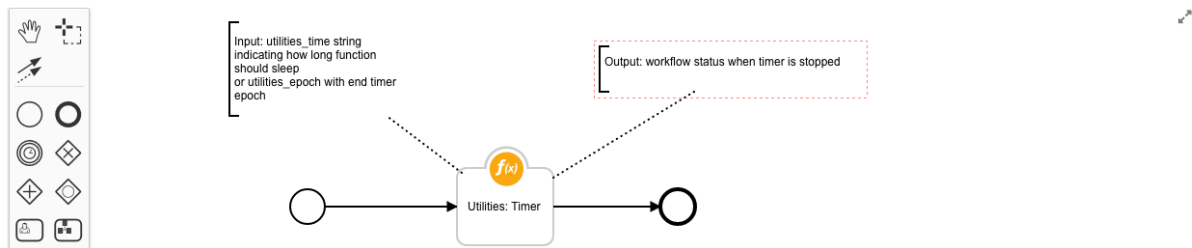

- ▶ Inputs:
- ▶ Outputs:
- ▶ Example Pre-Process Script:
- ▶ Example Post-Process Script:

Function - Utilities: XML Transformation

Transforms an XML document using a preexisting **xsl** stylesheet. The resulting content is returned.

Customization Settings

[Layouts](#)
[Rules](#)
[Scripts](#)
[Workflows](#)
[Functions](#)
[Message Destinations](#)
[Phases & Tasks](#)
[Incident Types](#)
[Breach](#)
[Artifacts](#)

Workflows / Example: XML Transformation

[Cancel](#)
[Save & Close](#)
[Save](#)


Name *

API Name *

Description

Object Type *

Creator [Orchestration Engine](#)
Last Modified 07/17/2019 14:20
Last Modified By [Orchestration Engine](#)
Associated Rules [Example: XML Transformation](#)

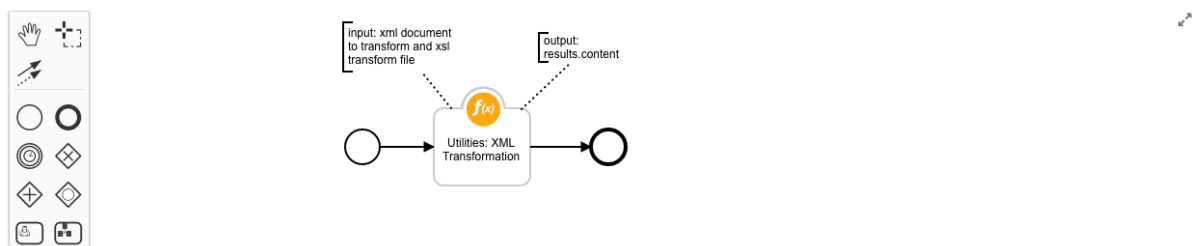

For App Host Environments:

- Set the app.config **xml_stylesheet_dir** setting as follows:

```
xml_stylesheet_dir= /var/rescircuits/xmltransformation
```

- Add your transformation file to the App Configuration tab to refer to the same directory as used in `xml_stylesheet_dir`.

[← Apps List](#)

fn_utilities

Status: Ready For Use!

[Details](#)

[Customizations](#)

[Configuration](#)

App Settings / cdcatalog.xslt

Edit the settings in the file below. File Path specifies a directory path starting at root. If changing location, the system creates the directory if it does not exist. Use a forward slash (/) only to place the file at the root directory. When done, click Save and Push Changes to implement your changes and restart the app.

Cancel

Save and Push Changes

Created Date: 2020-04-23 13:22
Last Modified Date: 2020-04-23 13:22

File Name

cdcatalog.xslt

File Path

/var/rescircuits/xmltransformation

File Description

Purpose of the file.

File Content

Text or code as appropriate.

[Show more](#)

Theme

File Type

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
3   <xsl:template match="/">
4     <html>
5       <body>
6         <h2>My CD Collection</h2>
7         <table border="1">
8           <tr bgcolor="#9acd32">
9             <th style="text-align:left">Title</th>
10            <th style="text-align:left">Artist</th>
11          </tr>
12          <xsl:for-each select="catalog/cd">
13            <tr>
14              <td><xsl:value-of select="title"/></td>
15              <td><xsl:value-of select="artist"/></td>
16            </tr>
17          </xsl:for-each>
18        </table>
19      </body>
```

- Inputs:
- Outputs:
- Example Pre-Process Script:
- Example Post-Process Script:

Rules

Rule Name	Object	Workflow Triggered
Example: (Artifact) Attachment to Base64	artifact	example_artifact_attachment_to_base64
Example: Attachment Hash	attachment	example_attachment_hash
Example: Attachment to Base64	attachment	example_attachment_to_base64
Example: Call REST API	artifact	example_call_rest_api
Example: Domain Distance	artifact	example_domain_distance
Example: Email Parsing (Artifact)	artifact	example_email_parsing_artifact
Example: Email Parsing (Attachment)	attachment	example_email_parsing_attachment
Example: Expand URL	artifact	utilities_expand_url
Example: Extract SSL Certificate	artifact	example_extract_ssl_cert_from_url
Example: Get Incident Contact Info	incident	example_get_incident_contact_info

Rule Name	Object	Workflow Triggered
Example: JSON2HTML	artifact	example_json2html
Example: Parse SSL Certificate	artifact	example_parse_ssl_certificate
Example: PDFiD	attachment	example_pdfid
Example: Resilient Search	attachment	example_resilient_search
Example: Shell Command	artifact	example_shell_command
Example: String to Attachment	artifact	example_string_to_attachment
Example: Timer Epoch	incident	example_timer
Example: Timers in Parallel	incident	example_timer_parallel
Example: Use Excel Data	attachment	example_create_artifacts_from_excel_data
Example: XML Transformation	artifact	example_xml_transformation
Example: Zip Extract	attachment	example_zip_to_artifact
Example: Zip List	attachment	example_zip_list