


16-BIT ML

Bayesian Classifier

Can we decide if a word is English or not-English without using a dictionary?

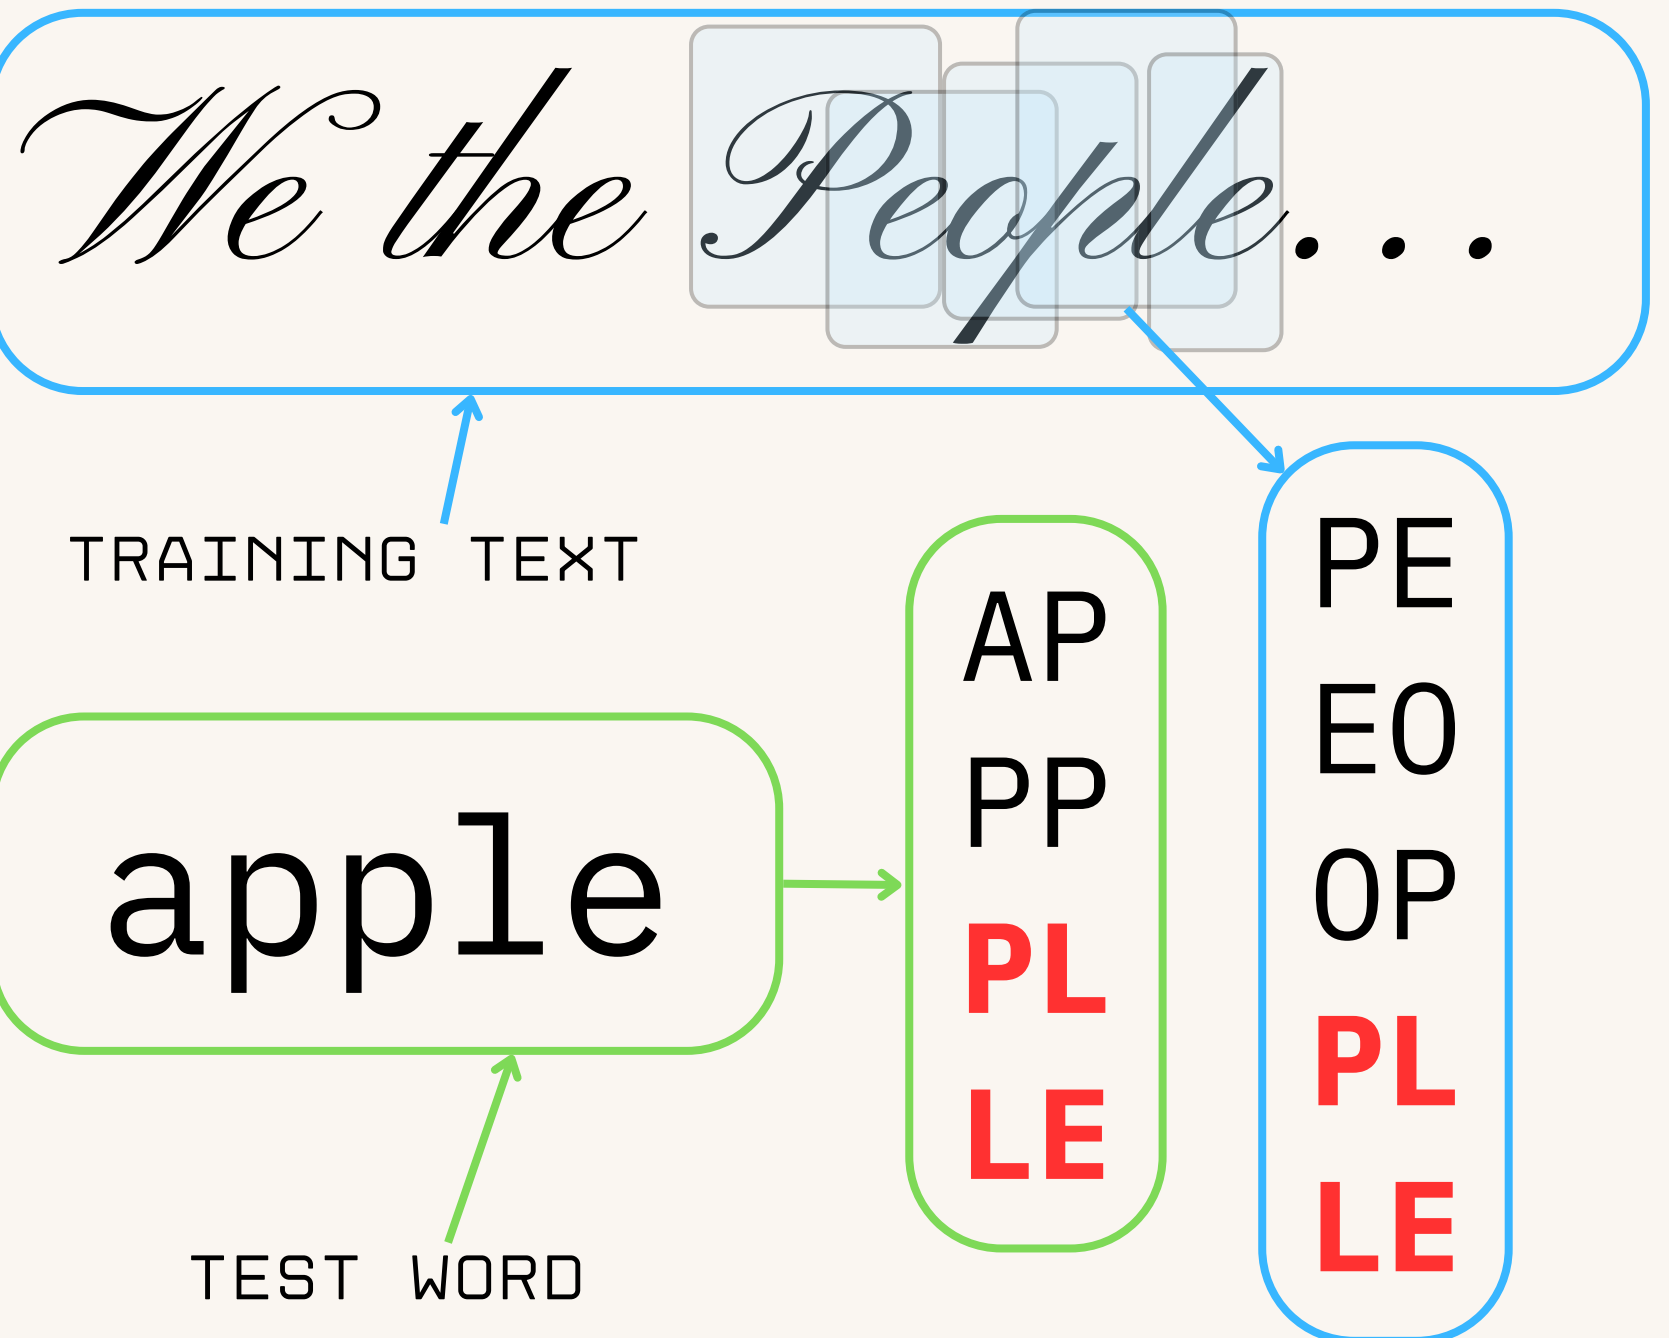

ALGORITHM

- Count instances of bigrams (letter pairs) in some training text, like the preamble to the US Constitution
- Apply **Bayes' Theorem** to calculate class probabilities
- Computationally simple (just counting)
- Just increment counts to update model

THINGS TO TRY

- Try *Tokyo*, *ziti*, or *manzana*
- If the model guesses wrong, try again and see if the result changes
- Visualize a heatmap of the accumulated bigrams

IMPLEMENTATION

- BASIC 1.35 on Sanyo MBC-555 (~1983)
- CPU: 8088 @ 3.6 MHz
- RAM: 192 kB

