

KOMPUTASI AWAN

UTS


Oleh:

HIDAYATULLAH IBRAHIM SYAIFUL NIM. 1941720235




**PROGRAM STUDI TEKNIK INFORMATIKA
JURUSAN TEKNOLOGI INFORMASI
POLITEKNIK NEGERI MALANG**


1. Membuat bucket untuk website . sign-in ke OCI kemudian pilih object storage

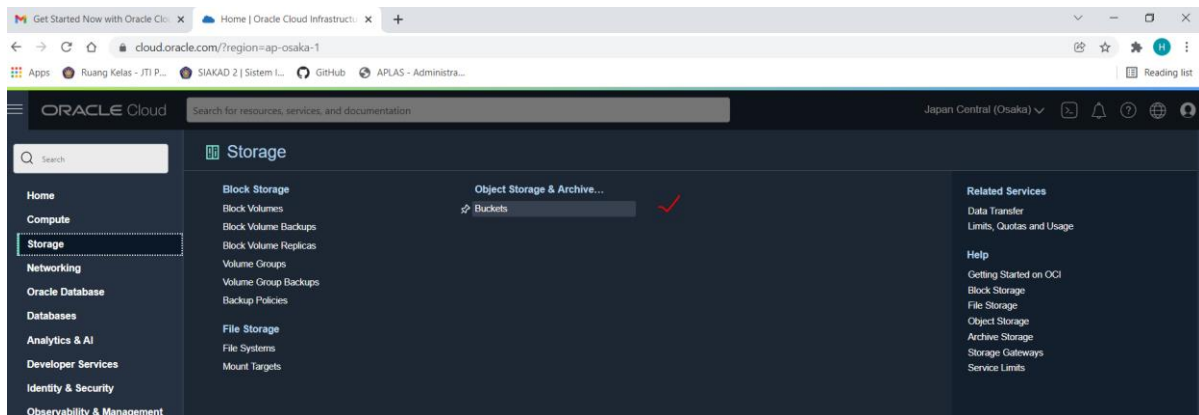


2. Create bucket

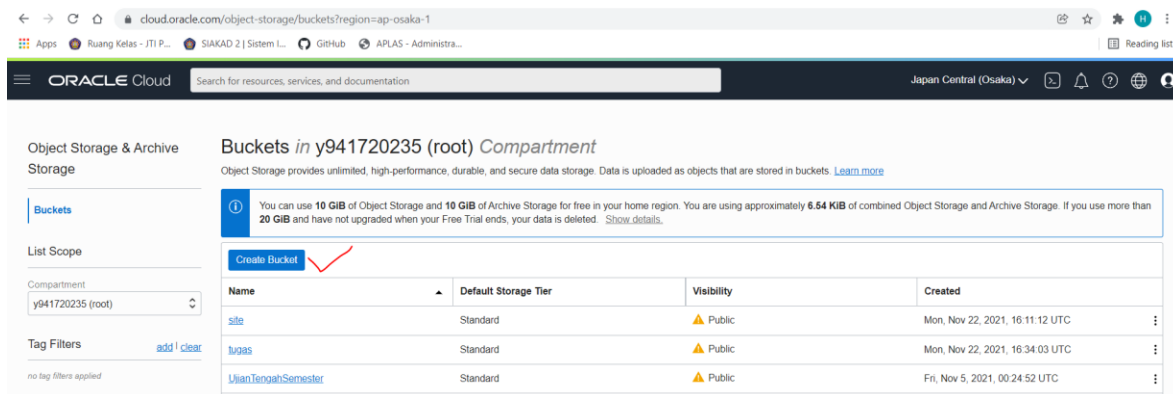

➤ Membuat nama bucket

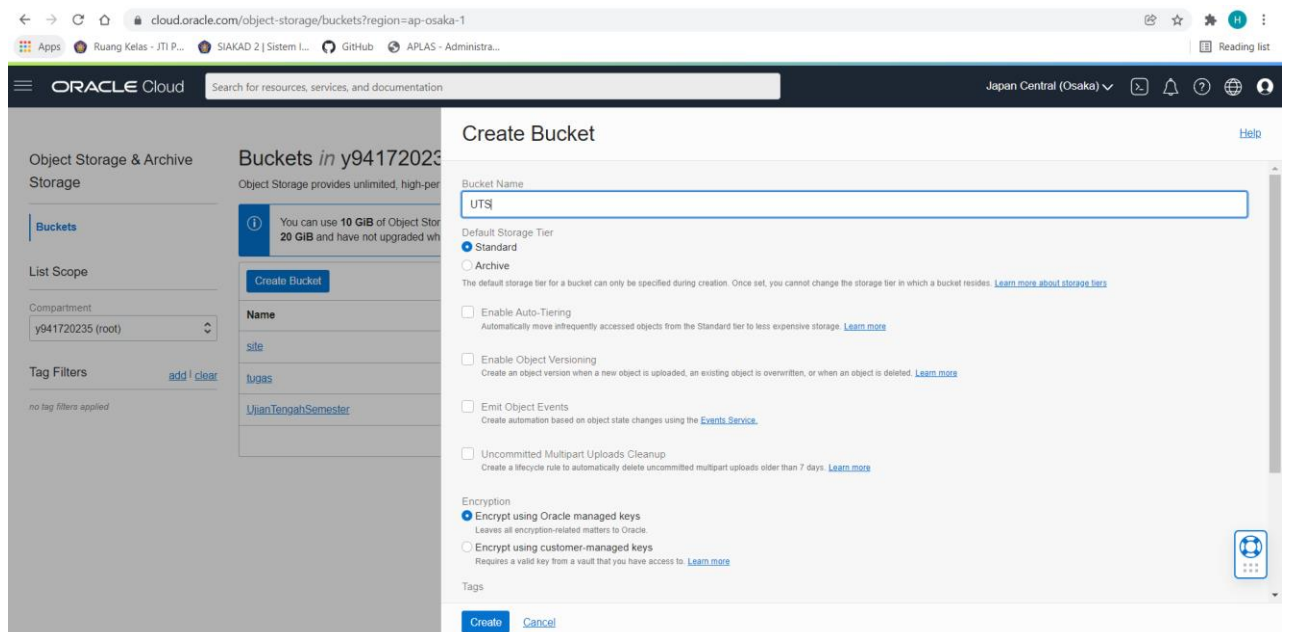

➤ Edit visibility

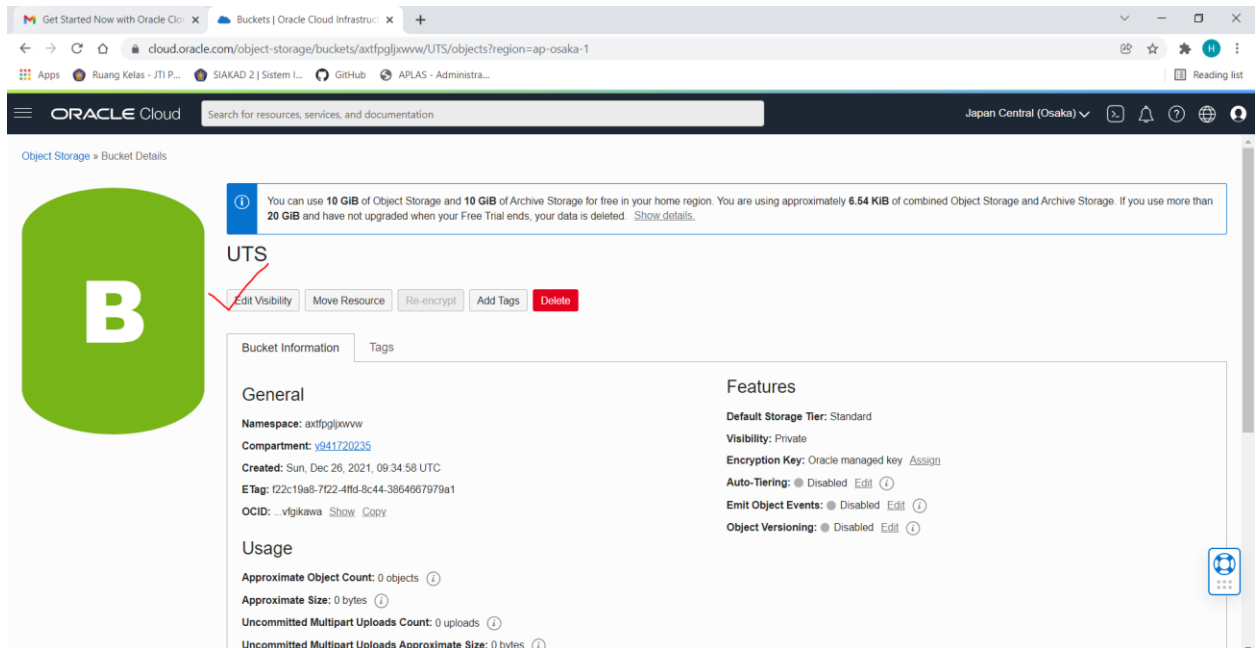

The screenshot shows the Oracle Cloud console interface for a bucket named 'UTS'. A red checkmark is placed over the 'Edit Visibility' button. The console displays various details about the bucket, including its namespace, compartment, creation date, and usage statistics.

Object Storage » Bucket Details

UTS

[Edit Visibility](#) [Move Resource](#) [Re-encrypt](#) [Add Tags](#) [Delete](#)

Bucket Information **Tags**

General


Namespace: axtfpgljxwww
Compartment: y941720235
Created: Sun, Dec 26, 2021, 09:34:58 UTC
ETag: f22c19a8-7f22-4fd-8c44-3864667979a1
OCID: ..vlgkawa [Show](#) [Copy](#)

Usage

Approximate Object Count: 0 objects ⓘ
Approximate Size: 0 bytes ⓘ
Uncommitted Multipart Uploads Count: 0 uploads ⓘ
Uncommitted Multipart Uploads Approximate Size: 0 bytes ⓘ

Features

Default Storage Tier: Standard
Visibility: Private
Encryption Key: Oracle managed key [Assign](#)
Auto-Tiering: ● Disabled [Edit](#) ⓘ
Emit Object Events: ● Disabled [Edit](#) ⓘ
Object Versioning: ● Disabled [Edit](#) ⓘ

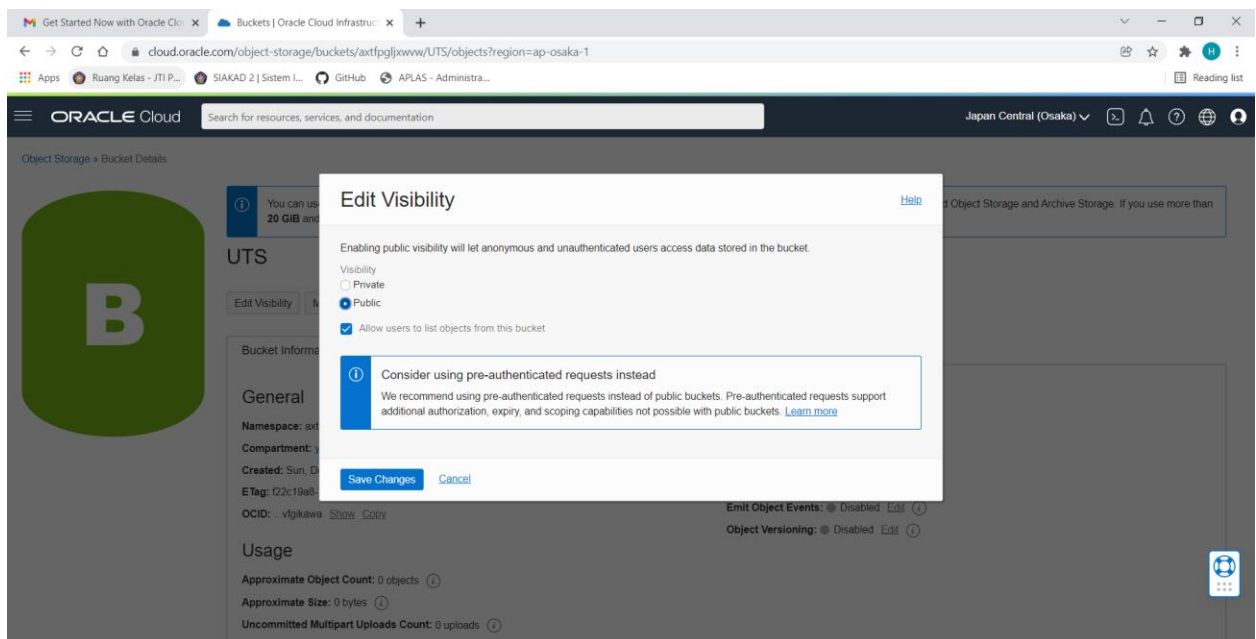

The screenshot shows the same Oracle Cloud console interface, but with the 'Edit Visibility' dialog box open. The dialog box allows users to change the bucket's visibility from Private to Public and includes a warning about the security implications of public buckets.

Edit Visibility

Enabling public visibility will let anonymous and unauthenticated users access data stored in the bucket.

Visibility

☐ Private

☒ Public

☒ Allow users to list objects from this bucket

Consider using pre-authenticated requests instead

We recommend using pre-authenticated requests instead of public buckets. Pre-authenticated requests support additional authorization, expiry, and scoping capabilities not possible with public buckets. [Learn more](#)

[Save Changes](#) [Cancel](#)

cloud.oracle.com/object-storage/buckets/axtfgljxwww/UTS/objects?region=ap-osaka-1

Apps Ruang Kelas - JTI P... SIAKAD 2 | Sistem L... GitHub APLAS - Administra... Reading list

ORACLE Cloud Search for resources, services, and documentation Japan Central (Osaka) Object Versioning: Disabled Edit

Usage

Approximate Object Count: 0 objects
Approximate Size: 0 bytes
Uncommitted Multipart Uploads Count: 0 uploads
Uncommitted Multipart Uploads Approximate Size: 0 bytes

Resources

- Objects
- Metrics
- Pre-Authenticated Requests
- Work Requests
- Lifecycle Policy Rules
- Replication Policy
- Retention Rules
- Uncommitted Multipart Uploads
- Logs

Objects

Upload More Actions Search by prefix

<input type="checkbox"/>	Name	Last Modified	Size	Storage Tier
No items found.				

Get Started Now with Oracle Cloud Buckets | Oracle Cloud Infrastructure

cloud.oracle.com/object-storage/buckets/axtfgljxwww/UTS/objects?region=ap-osaka-1

Apps Ruang Kelas - JTI P... SIAKAD 2 | Sistem L... GitHub APLAS - Administra... Reading list

ORACLE Cloud Search for resources, services, and documentation Japan Central (Osaka) Object Versioning: Disabled Edit

Usage

Approximate Object Count: 1 objects
Approximate Size: 0 bytes
Uncommitted Multipart Uploads Count: 0 uploads
Uncommitted Multipart Uploads Approximate Size: 0 bytes

Resources

- Objects
- Metrics
- Pre-Authenticated Requests
- Work Requests
- Lifecycle Policy Rules
- Replication Policy
- Retention Rules
- Uncommitted Multipart Uploads
- Logs


Objects

Upload More Actions Search by prefix


<input type="checkbox"/>	Name	Last Modified	Size	Storage Tier
<input type="checkbox"/>	> assets	-	-	-
<input type="checkbox"/>	> css	-	-	-
<input type="checkbox"/>	> fonts	-	-	-

Upload asset ke DB Instance

1. Buka FileZilla

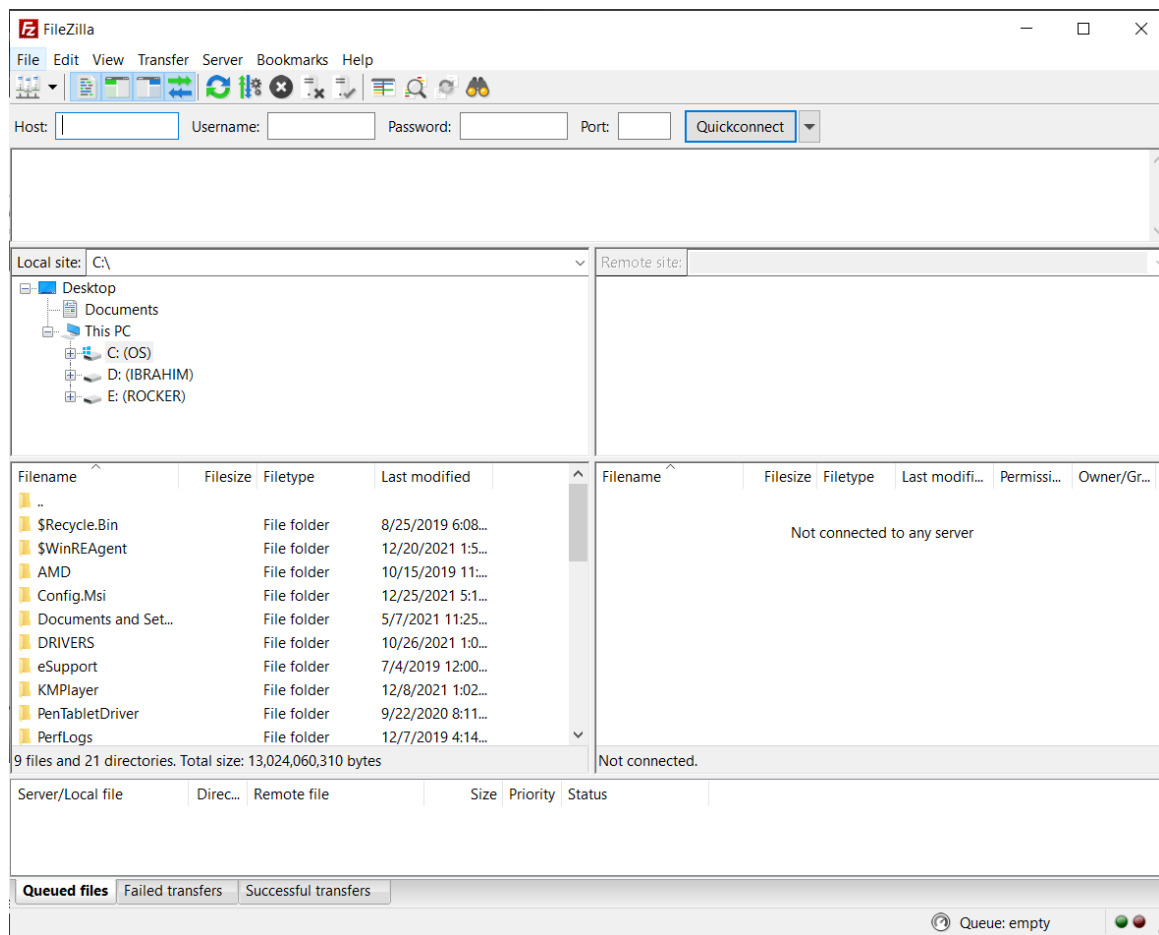

2. Klik file, lalu klik site manager

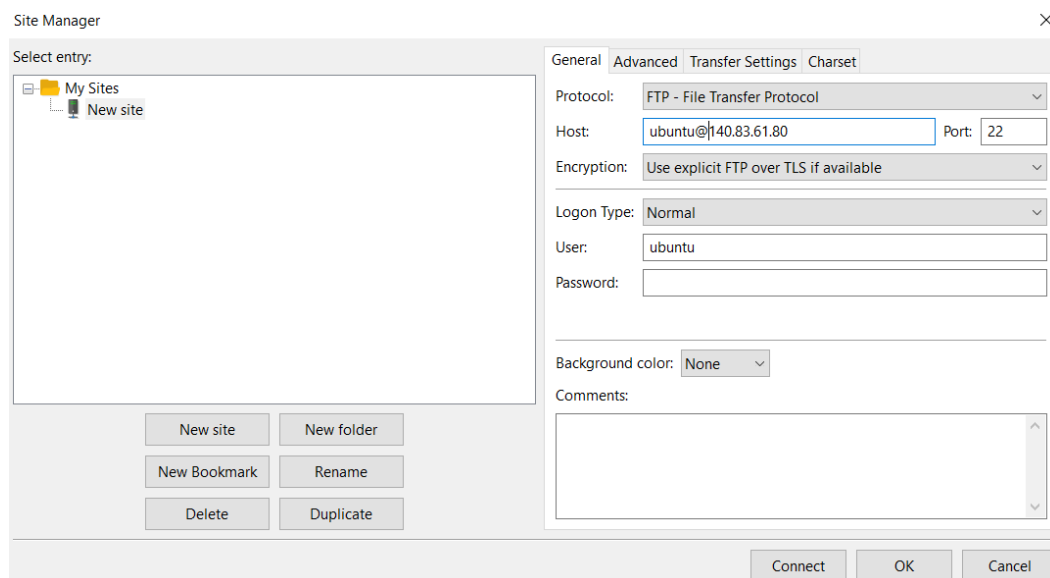

ubuntu@vm-ubuntu1: ~

login as: ubuntu

Authenticating with public key "imported-openssh-key"

Welcome to Ubuntu 20.04.3 LTS (GNU/Linux 5.11.0-1019-oracle x86_64)

* Documentation: <https://help.ubuntu.com>
* Management: <https://landscape.canonical.com>
* Support: <https://ubuntu.com/advantage>

System information as of Sun Dec 26 10:12:22 UTC 2021

System load:	0.0	Processes:	137
Usage of /:	8.4% of 44.97GB	Users logged in:	0
Memory usage:	27%	IPv4 address for ens3:	10.0.0.225
Swap usage:	0%		

* Super-optimized for small spaces - read how we shrank the memory footprint of MicroK8s to make it the smallest full K8s around.

<https://ubuntu.com/blog/microk8s-memory-optimisation>

28 updates can be applied immediately.

To see these additional updates run: `apt list --upgradable`

*** System restart required ***

Last login: Thu Nov 4 19:50:50 2021 from 103.119.66.3

ubuntu@vm-ubuntu1:~\$

ubuntu@vm-ubuntu1:~\$ sudo apt-get install proftpd

Reading package lists... Done

Building dependency tree

Reading state information... Done

Note, selecting 'proftpd-basic' instead of 'proftpd'

The following additional packages will be installed:

libhiredis0.14 libmemcached11 libmemcachedutil2 proftpd-doc

Processing triggers for libc-bin (2.31-0ubuntu9.2) ...

ubuntu@vm-ubuntu1:~\$

ubuntu@vm-ubuntu1:~\$ sudo chmod 777 /var/www/html

ubuntu@vm-ubuntu1:~\$

FileZilla

File Edit View Transfer Server Bookmarks Help

Host:

Username:

Password:

Port:

Quickconnect

Command: open "ubuntu@140.83.61.80" 22

Status: Using username "ubuntu".

Status: Server refused our key

Error: Could not connect to server

Local site: C:\xampp\htdocs\inventory.sql\

cg-bin

contrib

FileZillaFTP

htdocs

dasarweb

dashboard

img

inventory.sql

Remote site:

Filename	Filesize	Filetype	Last modified
..			
inventory.sql		File folder	12/26/2021 5:1...

Filename	Filesize	Filetype	Last modified	Permissi...	Owner/Gr...
Not connected to any server					

Selected 1 directory.

Not connected.