


Process Management stack

1. Stack definition

- Process = Program in RAM

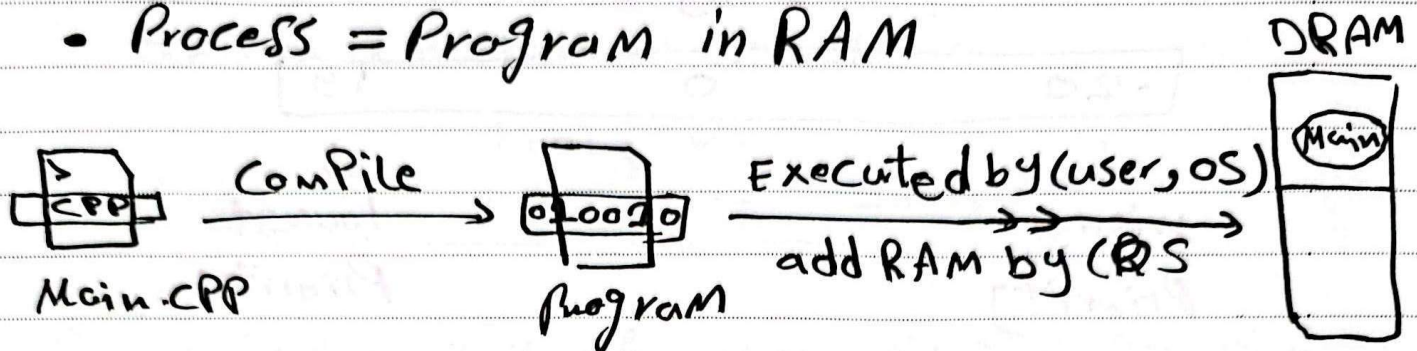

- after Process add to RAM

- Process Properties:- (OS) → هو المسؤول

- Has Priority
- State
- Has a Portion from RAM (stack/heap)
- PID

2. Commands

- Run Processes mode

- Terminal Foreground → Child

Block Parent till finish execution

يتوقف ال Terminal ما كان Child Process يعمل

→ ./Program_name

- Terminal Background → Child

Run background without blocking Parent

→ ./Program_name &

killall Process_name

• kill Pid "number of Process" this ring for user space

← Priority Bar →

-20 0 19

↓
highest
Priority

↓
lowest
Priority

• by default any Process has zero Priority
if I want to change Process Priority use:-

→ renice # at Run time

→ nice # Before Runtime

Ps tree # get the relation between Processes

no one can force kernel to do anything

بمعنى ان لو عملت renice مثلا من طرف ان ال kernel
تعمل التي انت تديره حسب هي شايعة اليه

Ps # Monitoring Process

top # Monitoring Process in Real time

3. How interaction

on CPU