


introduction to Terminal

Terminal: text editor deals with 2 device drivers
"standard input: keypad" and "standard output: screen", and retrieve commands to the kernel to execute

terminal life cycle:

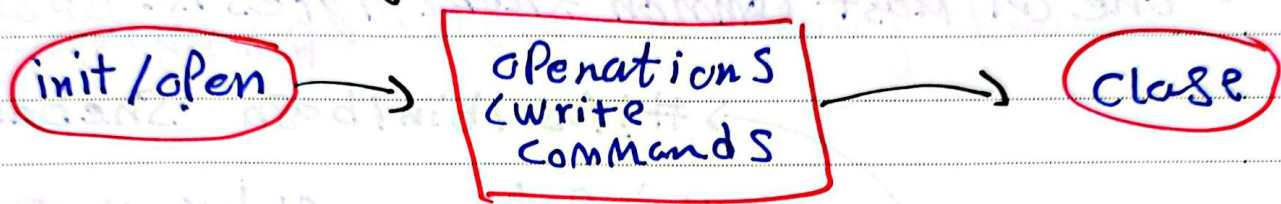

→ init/open:-

- loading variables
(Environment ~~Wans~~ from set of files)

→ operations

- Pass input commands to command executor (bash)
- Print result on standard output (screen)

→ close

- save all commands that have been executed to a database

< Bash basics >

• SHELL → • Scripting Language

compile and execute line
by line

one of most common shell types is: **BASH**
Run by 2

→ #!/usr/bin/bash • Shebang

→ # inputs.

• **Bash**

Global Vars
Positional Parameter
→ another bash
files
↳ interactive
Mode

→ # operations

↳ operations
on inputs

→ # results

→ stdout
→ Redirection
↳ status Code

Script.sh :-

chmod +x <Script_name>

./Script_name Positional Parameters

"Customizing your Development Machine"

#alias - command we can use for display all alias commands

*alias command: that a command or simple abbreviation to long process

ex:-

before alias

cd gocto/pkg/build



- after alias → alias cdgoc = "cd gocto"

cdgoc

More simpler

but if we closed terminal session all aliases will deleted

Solution! → store this aliases in "bashrc" file

nano ~/.bashrc

"write any command in this file"

after adding alias to bashrc

reset terminal or use

source ~/.bashrc to reset