Emkan BNPL – Merchant Integration, Customer Journey, and Merchant Portal Guide

Buy Now Pay Later

Emkan Finance

Table of Contents

Table of Contents 2
1. Introduction 3
1.1 Purpose of the Document 3
1.2 Merchant BNPL Onboarding Flow 4
3. Integration Overview 5
3.1 High-Level Integration Flow 5
4. Technical Integration 6
4.1 Authentication 6
4.2 Order Creation 6
4.3 Webhook Configuration 6
4.4 Channel Configuration 6
4.5 BNPL Shopping Widget Integration 7
5. Integration API Specification 9
5.1 Network Connectivity Details 9
5.2 Authentication 9
5.3 Integration Services 9
6. UAT Testing Guidelines 33
6.1 Test Data Usage 33
6.2 National ID (NID) Requirements 33
6.3 Mobile Number Rules 33
6.4 OTP Handling 33
6.5 Nafath Authentication 33
6.6 Additional Information 33
6.7 IVR Call Behavior 33
6.8 Test Card Details (Down Payment) 33
6.9 Order Verification 34
7. Merchant Portal 35
7.1 Portal Access 35
7.2 Dashboard Overview 35
7.3 Orders Page 36
7.4 Creating a New Order 36
7.5 Order Status & Refund Requests 37
7.6 Merchant Profile 38
8. Customer Journey (UAT Environment) 39
8.1 New Customer Flow 39
8.2 Existing Customer Flow 45
8.3 LMS Journey 50
9. Support 51

1. Introduction

1.1 Purpose of the Document


This document explains:

- The required steps to integrate Emkan BNPL APIs
- The end-to-end customer payment journey
- The usage of the Merchant Portal for order tracking and monitoring

The guide is intended to support both technical and business teams by presenting the integration process and customer flow in a clear and easy-to-follow manner.

> **Scope Notice**
> Unless stated otherwise, all information provided in this document applies to the System Integration Testing (UAT) environment and is intended for testing purposes only.

1.2 Merchant BNPL Onboarding Flow

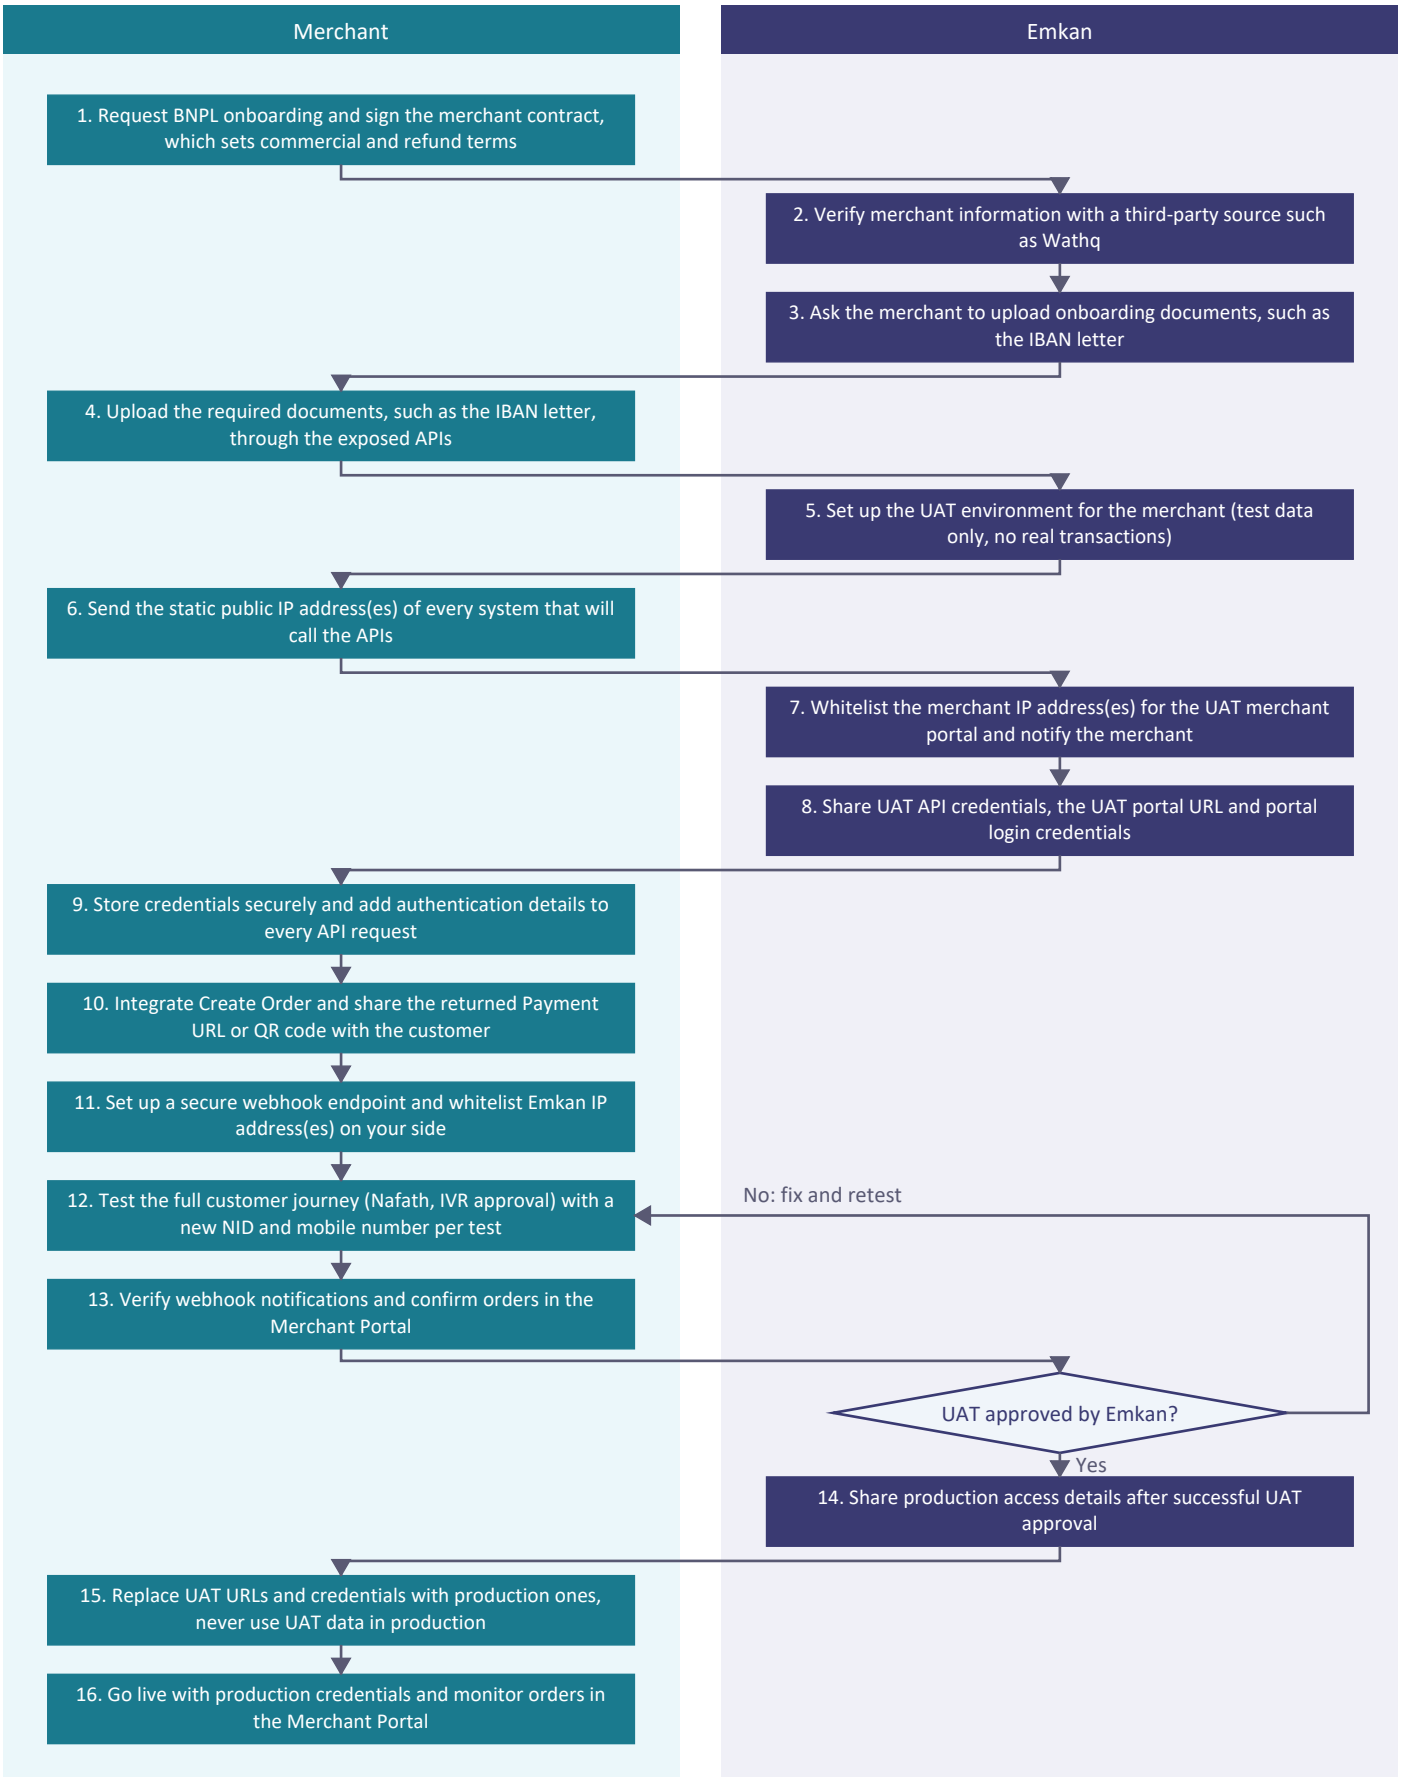

3. Integration Overview

This section provides a high-level overview of how merchant systems integrate with Emkan BNPL, from order creation through payment completion.

3.1 High-Level Integration Flow

The high-level integration flow between the merchant and Emkan BNPL is as follows:

1. The merchant initiates an order by calling the Create Order API.
2. Emkan generates a Payment URL and/or QR code for the customer.
3. The merchant shares the Payment URL or QR code with the customer.
4. The customer completes the BNPL journey through Emkan channels.
5. Emkan sends order status updates to the merchant via webhook notifications.
6. The merchant can track and monitor the order through the Merchant Portal or Order Inquiry API.

This flow ensures seamless customer experience while allowing merchants to maintain full visibility over the order lifecycle.

4. Technical Integration

This section describes the technical requirements and steps needed to integrate with Emkan BNPL APIs.

4.1 Authentication

All API requests to Emkan BNPL must be authenticated using the supported authentication mechanism. Merchants are required to:

- Use the authentication credentials provided by Emkan for the relevant environment (UAT or Production)
- Include authentication details in every API request
- Ensure credentials are stored and handled securely

> **Security Note**
> Authentication credentials are environment-specific and must not be shared or reused across environments.

4.2 Order Creation

To initiate a BNPL transaction, the merchant must call the Create Order API. This API is responsible for:

- Registering a new order with Emkan
- Generating a Payment URL and/or QR code for the customer
- Linking the order to the merchant and channel configuration

Upon successful order creation, Emkan returns a response containing the Payment URL, which must be shared with the customer to begin the payment journey.

4.3 Webhook Configuration

Webhook notifications are used to inform merchants about order status changes during the BNPL journey. Merchants are required to:

- Expose a secure webhook endpoint to receive notifications (refer to the integration document)
- Whitelist Emkan IP address(es) as communicated during integration
  - Emkan IP: 150.230.55.82
- Ensure their systems can handle webhook retries, if applicable

Webhook events allow merchants to stay informed about order progress, including successful completion or failure.

4.4 Channel Configuration

The channel parameter identifies the source through which the order is created. Supported channel values include:

Channel Value	Description
BNPL	Default channel for online transactions
BNPL_POS	Channel used for Point of Sale (POS) transactions

Merchants must ensure that the correct channel value is sent during order creation, as it impacts the processing and flow of the transaction.

4.5 BNPL Shopping Widget Integration

Emkan provides three types of JavaScript widgets that merchants can embed directly into their webUATe or application. Each widget is instantiated using the EmkanWidget class and configured with a simple options object.

Widget Configuration Parameters

Parameter	Description
merchantId	Your unique Emkan merchant identifier. Required for all widget types.
type	The widget type to render. Accepted values: "product", "checkout", "logo".
amount	The order or product amount in SAR. Required for "product" and "checkout" widget types.
lang	Display language. Use "en" for English (LTR) or "ar" for Arabic (RTL). Defaults to "en".
theme	Logo colour theme. Use "dark" for a dark logo or "light" for a light logo. Defaults to "dark".

4.5.1. Product Widget

Displays on the product page to show the customer how the price can be split into up to 5 interest-free payments. The widget automatically calculates and shows the per-instalment amount based on the provided total.

```
let widget = new EmkanWidget({
    merchantId: "YOUR_MERCHANT_ID",
    type:       "product",
    amount:     500,          // Total product price in SAR
    lang:       "en",         // "en" = English (LTR) | "ar" = Arabic (RTL)
    theme:      "dark",       // "dark" | "light"
});
widget.render("widget-container");
```

4.5.2. Checkout Widget

Displays on the checkout page as a selectable payment method option. It shows the Emkan BNPL option with a radio button, the minimum down payment amount, and a "no fees, no interest" message alongside the Emkan logo.

```
let widgetCheckout = new EmkanWidget({
    merchantId: "YOUR_MERCHANT_ID",
    type:       "checkout",
    amount:     500,          // Total order amount in SAR
    lang:       "en",         // "en" = English (LTR) | "ar" = Arabic (RTL)
    theme:      "dark",       // "dark" | "light"
});
widgetCheckout.render("widget-container-checkout");
```

4.5.3. Logo Widget

Renders the Emkan logo only, with no additional text or payment information. Can be placed anywhere on the webUATe — for example, in the footer, on the homepage, or on an accepted payment methods section. The lang and theme parameters control which version of the logo is displayed.

```
let widgetLogo = new EmkanWidget({
    merchantId: "YOUR_MERCHANT_ID",
    type:       "logo",
    lang:       "en",         // "en" = English (LTR) | "ar" = Arabic (RTL)
    theme:      "dark",       // "dark" | "light"
});
widgetLogo.render("widget-container-logo");
```

Note: Replace "YOUR_MERCHANT_ID" with the MerchantID provided by Emkan. The container IDs passed to the render() method (e.g. "widget-container") must match the id attributes of the HTML elements where the widgets should appear on your page.

🔗 **Developer Tools URL :** https://merchants.emkanfinance.com.sa/developer-tools

5. Integration API Specification

This section details the integration requirements for Retail Finance Buy Now Pay Later Ecommerce services. The document highlights connectivity requirements, service endpoints and service specifications.

5.1 Network Connectivity Details

Connection between merchants and Emkan will happen via HTTPs connection. IP whitelisting will be implemented.

The hostname to be used in the production environment is: https://gw-pub.emkanfinance.com.sa/retail/bnpl

The hostname to be used in the sandbox environment is: https://uat-gw-pub.emkanfinance.com.sa/retail-uat/bnpl

5.2 Authentication

Merchants will receive a username and password that should be used for every API call in basic authentication format.

The credentials will be shared with merchants via email.

5.3 Integration Services

This section describes the service specifications and endpoints. The following services are identified as part of the current integration scope:

- Get BNPL Merchant Configuration
- Create BNPL Order
- Get BNPL Order Status
- Submit Refund Request
- Get Refund Details
- Cancel Order
- Merchant Notifier
- Get Merchant Customer Orders

5.3.1 Get BNPL Merchant Configuration

The service is used to retrieve the merchant's configuration.

Service URI: `/partner-management/v1/{merchantId}/merchantConfig`

Protocol: REST

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Allowed Values: 'BNPL'	NO
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes.	NO

Table 1 Get BNPL Merchant Configuration HTTP Headers

Path Parameters

Field Name	Description	Type	Example Value	Nullable
merchantId	Merchant ID	String	354	NO

Table 2 Get BNPL Merchant Configuration Path Parameters

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW5aef23cc3401a9146f13e06c2f80d	NO
callerReferenceNumber	A unique reference to be used for tracking purposes generated by the calling system.	String	1	NO
code	Response result code	String	I000000	NO
description	Response result description	String	Successful Operation	NO
merchantId	MerchantID	Number	354	NO
orderUpperLimit	Maximum Order	Number	20000	NO
orderLowerLimit	Minimum Order	Number	400	NO
bnplUpperLimit	BNPL installment Maximum limit	Number	10000	NO
bnplLowerLimit	BNPL installment Minimum limit	Number	50	NO
allowedInstallments	Max Number of Allowed installments	Number	12	NO

Field Name	Description	Type	Example Value	Nullable
serviceStatus	Merchant Service Status	String	ACTIVE	YES
pif	PIF	Boolean	true	NO
processingFeePercentage	Processing Fee Percentage	Number	2.5	NO
pnblRedirectBaseUrl	Buy now pay later redirection base URL	String	https://UAT-bnpl.emkanfinance.com.sa /auth	NO
merchantCode	Merchant Code	String	Jarir	NO

Table 3 Get BNPL Merchant Configuration Response Body

Request Example

/partner-management/v1/379426/merchantConfig

Response Example


```
{
  "requestId": "AGW9a39fb8d9483f8fb231522989eede",
  "callerReferenceNumber": "9dcbe733-a2d6-4fb0-b483-4a6831e90510",
  "code": "I000000",
  "description": "Successful Operation",
  "merchantID": 379426,
  "orderUpperLimit": 20000,
  "orderLowerLimit": 200,
  "bnplUpperLimit": 10000,
  "bnplLowerLimit": 50,
  "allowedInstallments": 5,
  "serviceStatus": "ACTIVE",
  "pif": false,
  "processingFeePercentage": 0,
  "pnblRedirectBaseUrl": "https://UAT-bnpl.emkanfinance.com.sa/auth",
  "merchantCode": "SAU1"
}
```

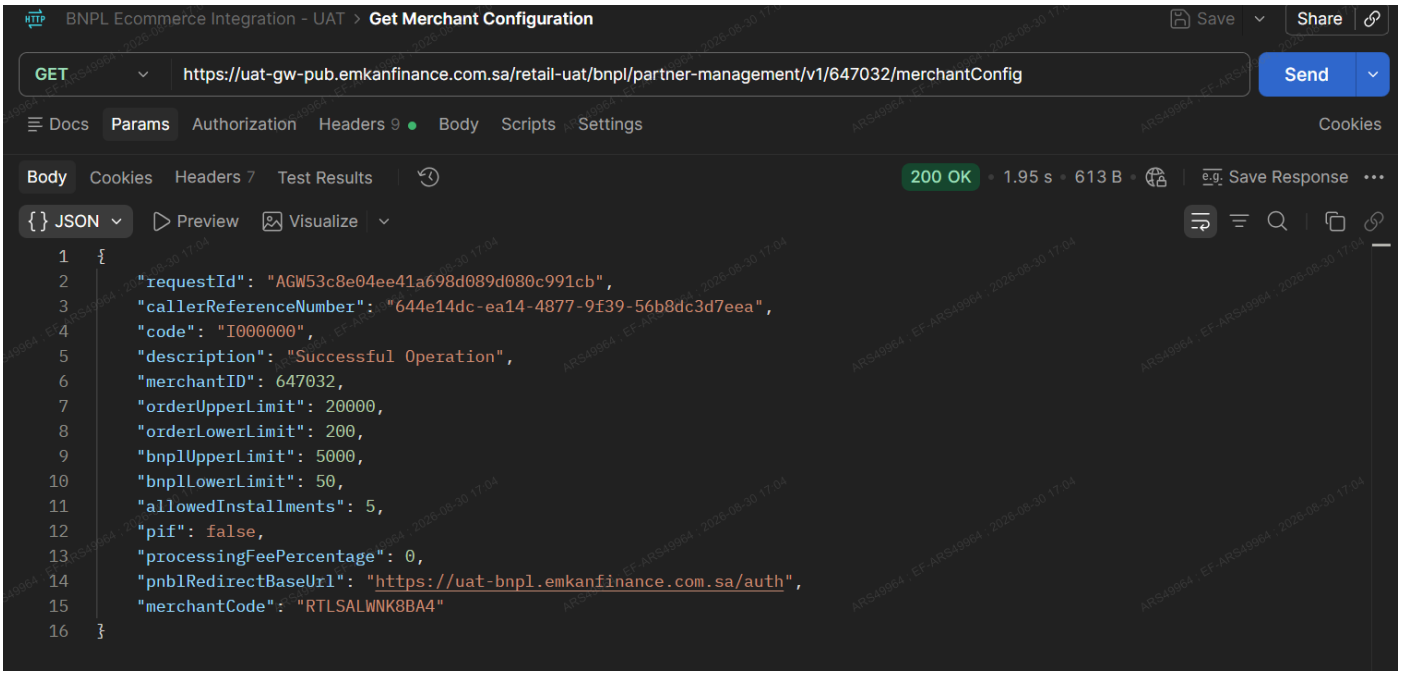


Figure 1 Get BNPL Merchant Configuration Postman Sample

Error Codes

Code	HTTP Status	English Message	Arabic Message
BNPLO-2003	404	Requested merchant not found.	التاجر غير موجود

Table 4 Get BNPL Merchant Configuration Error Codes

5.3.2 Create BNPL Order

The service is used to create a BNPL order.

Service URI: `/bff/v1/order-create`

Protocol: REST

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Default: BNPL Channel should be 'BNPL_POS' for POS machines.	NO
origin-source-channel	String	The origin channel through which sub-channel the request is made. Default: Neoleap_POS	Yes
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes. Using a used caller-reference-number will result in the same response.	YES
MERCHANT_CODE	String	Merchant Code	YES

Table 5 Create BNPL Order HTTP Headers

Request Body

Field Name	Description	Type	Example Value	Nullable
orderId	Order ID	String	ORD12345	YES
aggregatorId	Aggregator ID	String	AGGREGATOR112	YES
merchantId	Merchant ID	String	354	NO
billAmount	Bill amount	Number	250.75	NO
mobileNumber	Mobile Number	String	966541710298	NO
successRedirectionUrl	URL that will redirect the user to the success page chosen by the merchant (in case user paid successfully)	String	https://uat-bnpl.emkanfinance.com.sa/auth/f5090c57-7aee-4b15-8f0d-9f3d1c967bd8	YES
failureRedirectionUrl	URL that will redirect the user to the failure page chosen by the merchant (in case any failure occurs)	String	https://uat-bnpl.emkanfinance.com.sa/auth/f5090c57-7aee-4b15-8f0d-9f3d1c967bd8	YES
callbackUrl	Url to notify the merchant of the order status (in case order is completed successfully)	String	https://uat-bnpl.emkanfinance.com.sa/auth/f5090c57-7aee-4b15-8f0d-9f3d1c967bd8	YES
expiresInMinutes	Order expiry time in minutes (Default : 10)	Number	30	YES

Field Name	Description	Type	Example Value	Nullable
orderItems	Array containing the details of the order items	Array	N/A	YES
orderItems[i].itemPrice	Item price	Number	100	YES
orderItems[i].quantity	Quantity	Number	1	YES
orderItems[i].orderId	Order ID of the item	Number	101	YES
orderItems[i].createAt	When the order item was created	String	2023-05-19T10:20:30Z	YES
orderItems[i].updatedAt	When the order item was created	String	2023-05-19T10:20:30Z	YES
orderItems[i].itemName	Order item Name	String	Product 1	YES
additionalInfo	An object containing additional merchant-related information as a set of predefined key-value fields. Unlike a generic key-value array, additional Info has a fixed structure — each key below is a dedicated field within the object.	Object	`{"Branch": "0001", "employeeId":"ATCL", "storeName":"ada"}`	YES
companyNumber	Company Number (SME_BNPL)	String	1100123456	YES
unifiedNumber	Unified Number (SME_BNPL)	String	1012131516	YES
companyName	Company Name (SME_BNPL)	String	Company	YES
email	Email (SME_BNPL)	String	email@example.com	YES
dateOfBirth	Date of Birth (SME_BNPL)	String	22/10/1999	YES

Table 6A Create BNPL Order Request Body

Additional Info keys	Type	Nullable
Branch	String	YES
employeeId	String	YES
branchType	String	YES
employeeName	String	YES
department	String	YES
storeId	String	YES
storeName	String	YES

Table 7B Create BNPL Order Additional Info keys

> ⚠ **Note:** Additional Info keys can be added upon request from merchant

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW5aef23cc3401a9146f13e06c2f80d	NO
callerReferenceNumber	A unique reference to be used for tracking purposes generated by the calling system.	String	eb59af02-7845-45db-8853-042fee31a4df	NO
code	Response result code	String	I000000	NO
description	Response result description	String	Successful Operation	NO
orderId	Order ID	String	eb59af02-7845-45db-8853-042fee31a4df	NO
paymentURL	Payment URL	String	uat-bnpl.emkanfinance.com.sa/auth/f5090c57-7aee-4b15-8f0d-9f3d1c967bd8	NO
additionalInfo	An object containing additional merchant-related information as a set of predefined key-value fields. Unlike a generic key-value array, additional Info has a fixed structure — each key below is a dedicated field within the object.	Object	`{"Branch": "0001", "employeeId":"ATCL", "storeName":"ada"}`	YES

Table 8 Create BNPL Order Response Body

Request Example


```
{
  "orderId": "123914",
  "aggregatorId": "13",
  "merchantId": 354,
  "billAmount": 600,
  "mobileNumber": "501390294",
  "callbackUrl": "https://api.development.qawafel.dev/bnpl/v1/webhooks/emkan/orders",
  "successRedirectionUrl": "https://google.com",
  "failureRedirectionUrl": "https://facebook.com",
  "nationalId": "1751439512",
  "expiresInMinutes":"5",
  "orderItems": [
    {
      "itemPrice": 2700.1,
      "quantity": 2700,
      "orderId": "123914",
      "createdAt": "2025-07-07T06:51:06Z",
      "updatedAt": "2025-07-07T06:51:09Z"
    }
  ],
  "additionalInfo": {
    "Branch": "0001",
    "employeeId": "ATCL",
    "branchType": "12304",
    "employeeName": "2101012304",
    "department": "150019",
    "storeId": "SKECHERS",
    "storeName": "SKECHERS"
  }
}
```


Response Example


```
{
  "requestId": "AGWdba734f3542288ae6a2e9aa47f2fc",
  "callerReferenceNumber": "0000000000008",
  "code": "I000000",
  "description": "Successful Operation",
  "orderId": "6e2c9ad9-ca6c-4870-bf82-36bae119cc30",
  "paymentURL": https://uat-bnpl.emkanfinance.com.sa/auth/6e2c9ad9-ca6c-4870-bf82-36bae119cc30,
  "additionalInfo": {
    "Branch": "0001",
    "employeeId": "ATCL",
    "branchType": "12304",
    "employeeName": "2101012304",
    "department": "150019",
    "storeId": "SKECHERS",
    "storeName": "SKECHERS"
  }

}
```

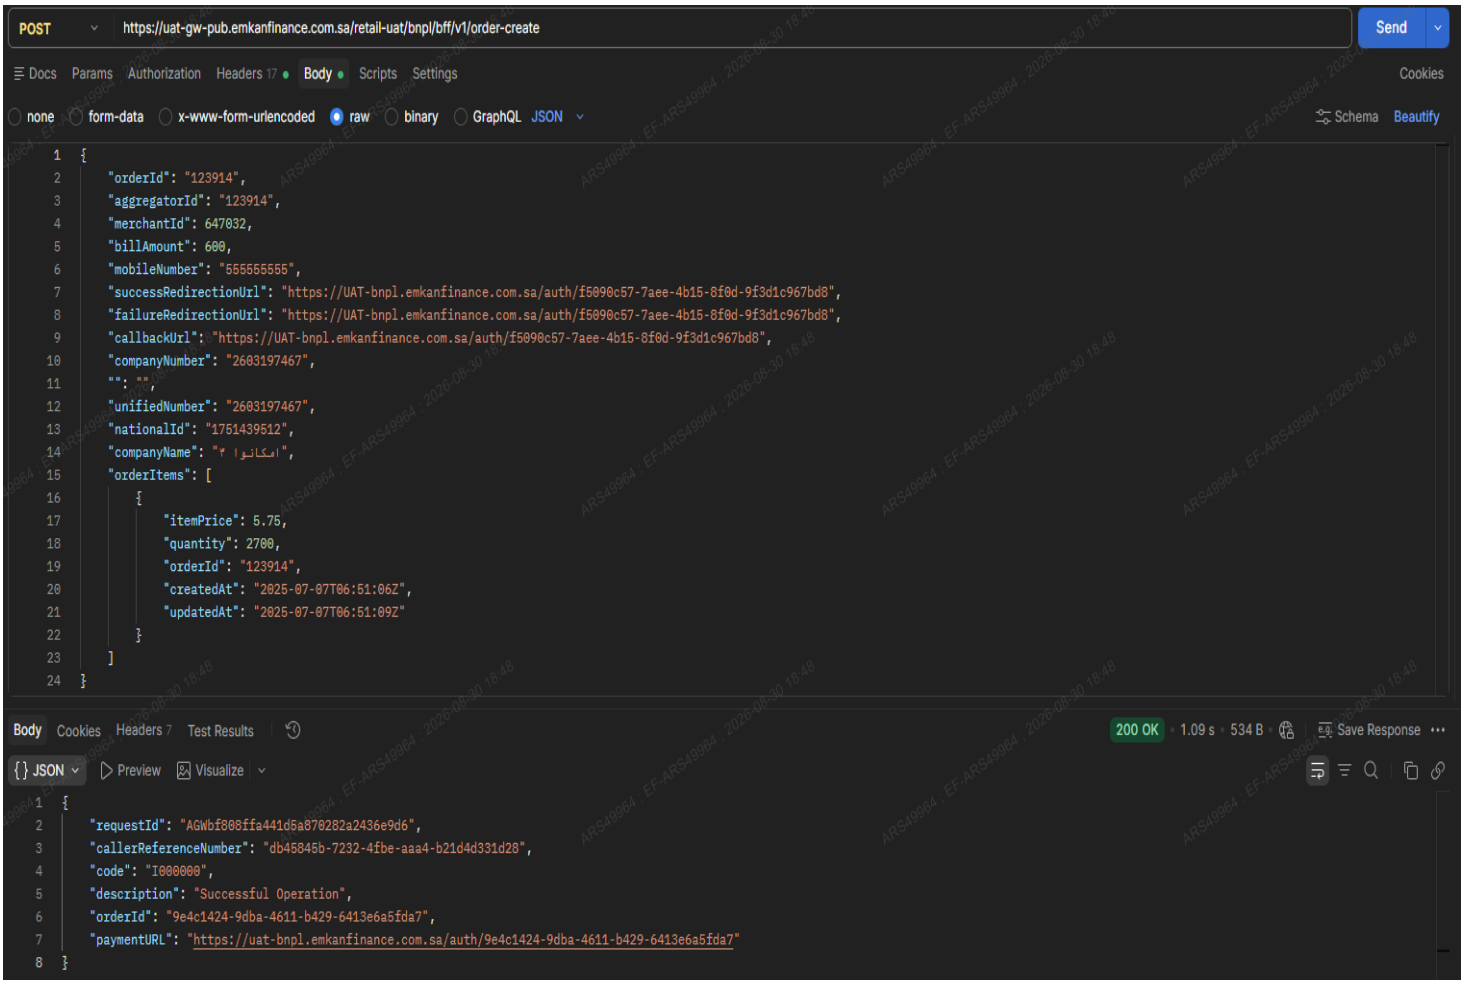


Figure 2 Create BNPL Order Postman Sample

Error Codes

Code	HTTP Status	English Message	Arabic Message
BNPLO-2001	400	The bill amount less than 400	المبلغ المطلوب أقل من الحد الأدنى 400
BNPLO-2002	400	The bill amount greater than 20000	المبلغ المطلوب أعلى من الحد الأقصى 20000
BNPLO-2003	400	Requested merchant not found	التاجر غير موجود
BNPLO-2004	400	The provided credentials are not correct, make sure you are registered with emkan	صلاحيات الدخول غير صحيحة، تأكد من تسجيل المتجر عن طريق منصة إمكان
BNPLO-2012	400	Merchant code is not related to merchant Id	رمز التاجر غير مرتبط برمز التعريف

Table 9 Create BNPL Order Error Codes

5.3.3 Get BNPL Order Status

The service is used to retrieve the status of a BNPL order.

Service URI: `/bff/v1/order-status/{orderId}?merchantId={merchantId}`

Protocol: REST

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Allowed Values: 'BNPL'	NO
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes.	NO

Table 10 Get BNPL Order Status HTTP Headers

Path Parameters

Field Name	Description	Type	Example Value	Nullable
orderId	Order ID	String	984dff36-b604-4a13-9c9c-bf4cfc0481ad	NO

Table 11 Get BNPL Order Status Path Parameters

Query Parameters

Field Name	Description	Type	Example Value	Nullable
merchantId	Merchant ID	String	MERCHANT6789	NO

Table 12 Get BNPL Order Status Path Parameters

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW5aef23cc3401a9146f13e06c2f80d	NO
callerReferenceNumber	A unique reference to be used for tracking purposes generated by the calling system.	String	1	NO
code	Response result code	String	I000000	NO
description	Response result description	String	Successful Operation	NO
nationalId	National ID	String	1009264628	YES
orderCode	Order Code	String	984dff36-b604-4a13-9c9c-bf4cfc0481ad	NO

Field Name	Description	Type	Example Value	Nullable
statusCode	Status Code	String	CREATED	NO
createdAt	Order Creation Time	String	2024-06-27T16:18:33.451546	NO
channel	Channel	String	BNPL_MERCHANT	NO
orderItems	Array containing the details of the order items	Array	N/A	NO
orderItems[i].itemPrice	Item price	Number	100	NO
orderItems[i].quantity	Quantity	Number	1	NO
orderItems[i].createAt	When the order item was created	String	2024-06-27T16:18:33.45263075	NO
orderItems[i].itemCode	Item Code	String	8mlTSU7dhQKTrpofRabSmvRkr17r5HRC	NO
orderItems[i].programId	Program Id	String	test	YES
additionalInfo	An object containing additional merchant-related information as a set of predefined key-value fields. Unlike a generic key-value array, additional Info has a fixed structure — each key below is a dedicated field within the object.	Object	`{"Branch": "0001", "employeeId":"ATCL", "storeName":"ada"}`	YES

Table 13 Get BNPL Order Status Response Body

Request Example

/bff/v1/order-status/984dff36-b604-4a13-9c9c-bf4cfc0481ad?merchantId=MERCHANT6789

Response Example


```
{
  "requestId": "AGW31affc5dd40faa75cd74cde9272d2",
  "callerReferenceNumber": "eac6da11-8633-453d-8a8b-1ca4ae1d002a",
  "code": "I000000",
  "description": "Successful Operation",
  "orderCode": "984dff36-b604-4a13-9c9c-bf4cfc0481ad",
  "statusCode": "CREATED",
  "orderItems": [
    {
      "itemPrice": 100,
      "quantity": 1,
      "createAt": "2024-06-27T16:18:33.45263075",
      "itemCode": "8mlTSU7dhQKTrpofRabSmvRkr17r5HRC"
    }
  ],
  "createdAt": "2024-06-27T16:18:33.451546",
  "channel": "BNPL_MERCHANT",
  "additionalInfo": {
    "Branch": "0001",
    "employeeId": "ATCL",
    "storeId": "SKECHERS",
    "storeName": "SKECHERS" }
}
```

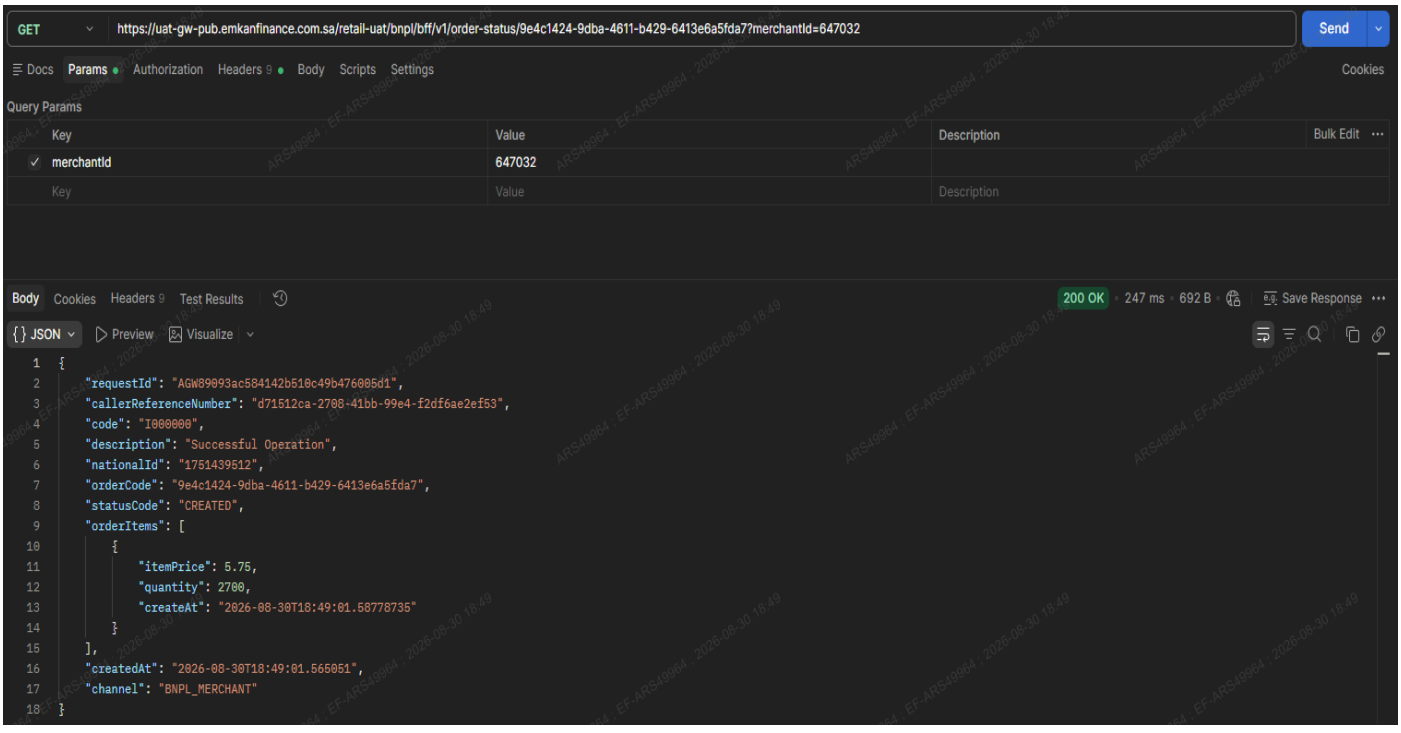



Figure 3 Get BNPL Order Status Postman Sample

Error Codes

Code	HTTP Status	English Message	Arabic Message
BNPLO-2000	400	Requested order not found.	رقم الطلب غير موجود

Table 14 Get BNPL Order Status Error Codes

Order Status	Business definitions
CANCELED	The order has been cancelled from the customer
CREATED	The request has been raised by the merchant waiting for the customer to make the entry process and complete the journey
INITIATED	The customer has reviewed the payment schedule only
ACCEPTED_IVR	The customer has approved the IVR call
PENDING_IVR	The request is pending confirmation of the customer by answering the IVR call to the customer by Emkan to confirm the transaction and verify the customer
REJECTED_IVR	The customer has rejected the IVR call
COMPLETED	The customer has paid the down payment (successful transaction)

Merchant Action Guidance

- Orders in CREATED, INITIATED, PENDING_IVR, and ACCEPTED_IVR statuses are still in progress and should not be fulfilled.
- Orders in COMPLETED status have successfully completed the BNPL journey and may be fulfilled by the merchant.
- Orders in CANCELED or REJECTED_IVR statuses should be considered unsuccessful and should not be fulfilled.

Refund Process & Business Rules

Review these rules before using the refund APIs.

1. Cooling Period

After any payment-related action - including a down payment, installment payment, or refund request - allow up to 5 minutes before initiating another payment action. This gives the previous transaction enough time to complete safely and helps prevent overlapping or conflicting requests.

2. Refund Window (RMA - Return Merchandise Authorization)

RMA is the configured period during which an eligible refund may be returned to the customer's original card. The RMA setting is maintained per merchant and is also subject to the commercial terms agreed in the merchant contract.

Refund availability. Refunds requested within the RMA window are supported for all merchants. Refunds requested after the RMA window are available only when after-RMA refunds are enabled in the signed merchant contract or explicitly approved for the merchant.

Within the RMA window. If the customer has paid only the down payment, the eligible amount is refunded to the original card through the payment gateway. If the gateway refund fails, the amount is credited to the customer's Emkan Wallet as a fallback. If any installment has already been paid, the refunded amount is credited to the Emkan Wallet instead of the payment gateway.

After the RMA window. If the merchant contract allows after-RMA refunds, the refund is credited to the customer's Emkan Wallet. The customer can then transfer the available wallet balance to a bank IBAN at any time. If after-RMA refunds are not enabled for the merchant, the refund request will be rejected.

3. Notifications

Once a refund is completed and confirmed, both the customer and the merchant will be notified confirming that the refund was successful and is being processed.

4. Validation Rules Before Submitting a Refund

- **Refund amount:** must be greater than 0 and must not exceed the remaining refundable amount.
- **Order eligibility:** refunds are allowed only for eligible order statuses. Failed or inactive orders are not refundable.
- **Existing refund request:** if a refund request for the same order is already In-Progress, a new request cannot be submitted until the previous request is Completed or Failed.
- **RMA expiry:** if the merchant supports refunds only within RMA and the configured window has expired, the refund request will be rejected.

> **Important Operational Note**
> Keep the order code (orderCode) available for refund tracking, reconciliation, and support inquiries.

Note: After-RMA scenarios apply only to merchants whose signed contract enables refunds after the RMA window.

Refund Scenarios

1. Full Refund *(refund amount = full order amount)*

- **Within RMA, no installments paid:** the paid down payment is refunded through the payment gateway to the original card.
- **Within RMA, installments already paid:** all refundable paid amounts are credited to the customer's Emkan Wallet.
- **After RMA, no installments paid:** if after-RMA refunds are contractually enabled, the paid down payment is credited to the Emkan Wallet.
- **After RMA, installments already paid:** if after-RMA refunds are contractually enabled, all refundable paid amounts are credited to the Emkan Wallet.

2. Partial Refund *(refund amount = part of the order amount)*

If a partial refund includes any amount from an installment that has already been paid, that refunded portion is credited to the Emkan Wallet rather than the payment gateway, regardless of whether the request is within the RMA window.

- **Two or more installments remain:** the refund adjusts the number and/or value of the remaining installments according to the refund amount and installment values.
- **Only one installment remains:** the refund may fully cover the remaining installment or extend into part of the down payment, depending on the requested amount.
- **Only the down payment remains:** within RMA, the eligible amount is refunded through the payment gateway; after RMA, it is credited to the Emkan Wallet if after-RMA refunds are enabled for the merchant.

5.3.4 Submit Refund Request

The service is used to submit a refund request.

Service URI: `/bff/v1/order/refund/submit`

Protocol: REST

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Default: BNPL	NO
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes.	NO

Table 17 Submit Refund Request HTTP Headers

Request Body

Field Name	Description	Type	Example Value	Nullable
orderCode	Order Code	String	2eeaa9b7-b230-4151-94e7-35f8e00806aa	NO
merchantCode	Merchant Code	String	Jarir	NO
merchantId	Merchant Id	String	354	NO
refundAmount	Refund Amount	String	250.75	NO

Table 18 Submit Refund Request Request Body

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW5aef23cc3401a9146f13e06c2f80d	NO
callerReferenceNumber	A unique UUID to be used for tracking generated by the calling system.	String	18f7b5fd-0aa1-4ffe-bf6f-4e482aff443f	NO
code	Response result code	String	I000000	NO

Field Name	Description	Type	Example Value	Nullable
description	Response result description	String	Successful Operation	NO

Table 19 Submit Refund Request Response Body

Request Example

```
{
        "orderCode": "2eeaa9b7-b230-4151-94e7-35f8e00806aa",
        "merchantCode": "Jarir",
        "refundAmount": "150",
        "merchantId": "354"
}
```

Response Example

```
{
  "requestId": "AGWdba734f3542288ae6a2e9aa47f2fc",
  "callerReferenceNumber": "0000000000008",
  "code": "I000000",
  "description": "Successful Operation"
}
```

Error Codes

Code	HTTP Status	English Message	Arabic Message
401	401	This user is unauthorized to submit this request.	
31	400	The provided merchant ID does not exist in our records	رقم التاجر المقدم غير موجود في سجلاتنا.
106	400	The order could not be found. Please verify the order code.	لم يتم العثور على الطلب. يرجى التحقق من رمز الطلب.
141	400	Application ID not found. Please make sure the application exists.	لم يتم العثور على رقم الطلب. يرجى التأكد من وجود الطلب.
218	400	The refund amount must be less than or equal to the total order amount.	يجب أن يكون مبلغ الاسترداد أقل من أو يساوي إجمالي قيمة الطلب.
219	400	Refund period has expired based on the refund policy.	تم تجاوز فترة الاسترداد المحددة وفقًا لسياسة الاسترداد.
221	400	Sorry, it is not possible to request a refund due to the customer's payment of his full dues with emkan, as per the refund policy	عذرا، لا يمكن طلب استرداد الأموال بسبب قيام العميل بدفع مستحقاته بالكامل مع إمكان، وفقا لسياسة الاسترداد.
222	400	Refund is only allowed for orders marked as 'Completed'.	يمكن طلب الاسترداد فقط للطلبات التي حالتها "مكتملة".
224	400	Sorry, it is not possible to request a refund due to the customers payment of his	عذرا، لا يمكن طلب استرداد الأموال بسبب قيام العميل بدفع مستحقاته بالكامل مع إمكان، وفقا لسياسة الاسترداد.

Code	HTTP Status	English Message	Arabic Message
		full dues with emkan, as per the refund policy.	
226	400	A refund request is already pending for this order.	يوجد طلب استرداد قيد الانتظار لهذا الطلب.
227	400	This order has already been refunded.	تم استرداد هذا الطلب مسبقًا.
2012	400	The provided merchant code does not match the associated merchant ID.	رمز التاجر المقدم لا يتطابق مع رقم التاجر المرتبط به.
2014	400	Please wait a few moments before requesting another refund.	يرجى الانتظار لبضع لحظات قبل طلب استرداد جديد.

Table 20 Submit Refund Request Error Codes

5.3.5 Get Refund Details

The service is used to inquire about refunded amount.

Service URI: `/bff/v1/order/refund-details/{orderCode}`

Protocol: REST

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Default: BNPL	NO
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes.	NO

Table 21 Get Refund Details HTTP Headers

Path Parameters

Field Name	Description	Type	Example Value	Nullable
orderCode	Order Code	String	2eeaa9b7-b230-4151-94e7-35f8e00806aa	NO

Table 22 Get Refund Details Path Parameters

Query Parameters

Field Name	Description	Type	Example Value	Nullable
merchantCode	Merchant Code	String	Jarir	NO
merchantId	Merchant Id	String	354	NO

Table 23 Get Refund Details Query Parameters

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW5aef23cc3401a9146f13e06c2f80d	NO
callerReferenceNumber	A unique reference to be used for tracking purposes generated by the calling system.	String	18f7b5fd-0aa1-4ffe-bf6f-4e482aff443f	NO
code	Response result code	String	I000000	NO
description	Response result description	String	Successful Operation	NO
orderAmount	Total order amount	String	10000	NO
totalCancelledAmount	Total cancelled/refunded amount	String	4000	NO
remainingOrderAmount	Remaining amount	String	6000	NO

Table 24 Get Refund Details Response Body

Request Example

```
GET  /bff/v1/order/refund-details/0ef1b0e1-01d8-4e80-a166-0bc5c5b0ef61?merchantCode=Jarir&merchantId=354
```

Response Example


```
{
  "requestId": "AGWbfc887acb4d618dfce2dd5ed9ad65",
  "callerReferenceNumber": "1768afc2-e6a1-5a22-80d3-6fe3d8b26193",
  "code": "I000000",
  "description": "Successful Operation",
  "orderAmount": "5684",
  "totalCancelledAmount": "2000",
  "remainingOrderAmount": "3684"
}
```


Error Codes

Code	HTTP Status	English Message	Arabic Message
401	401	This user is unauthorized to submit this request.	

Table 25 Get Refund Details Error Codes

5.3.6 Cancel Order

The service is used to update order status.

Order Cancellation Guidelines

- Orders can only be cancelled while they are still in progress and before successful completion of the BNPL journey.
- Orders in **COMPLETED** status cannot be cancelled and should use the refund process instead, if applicable.
- Merchants should verify the current order status using the **Get BNPL Order Status** API before submitting a cancellation request.
- Upon successful cancellation, the merchant will receive a **CANCELED** webhook notification through the Merchant Notifier service.

Service URI: `/bnpl-bff/order/v1/cancelOrder`

Protocol: REST | Method: POST

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Default: BNPL	NO
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes.	NO
MERCHANT_CODE	String	Merchant Code	YES

Table 26 Cancel Order HTTP Headers

Request Body

Field Name	Description	Type	Example Value	Nullable
orderCode	Order Code	String	2eeaa9b7-b230-4151-94e7-35f8e00806aa	NO
merchantId	Merchant Id	String	354	NO

Table 27 Cancel Order Request Body

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW5aef23cc3401a9146f13e06c2f80d	NO
callerReferenceNumber	A unique reference to be used for tracking purposes generated by the calling system.	String	18f7b5fd-0aa1-4ffe-bf6f-4e482aff443f	NO
code	Response result code	String	I000000	NO

Field Name	Description	Type	Example Value	Nullable
description	Response result description	String	Successful Operation	NO

Table 28 Cancel Order Response Body

Request Example

```
{
        "orderCode": "2eeaa9b7-b230-4151-94e7-35f8e00806aa",
        "merchantId": "354"
}
```

Response Example

```
{
  "requestId": "AGWdba734f3542288ae6a2e9aa47f2fc",
  "callerReferenceNumber": "0000000000008",
  "code": "I000000",
  "description": "Successful Operation"
}
```

Error Codes

Code	HTTP Status	English Message	Arabic Message
401	401	Credentials are invalid	
401	401	This user is unauthorized to submit this request	
401	401	Merchant Id is not related to Merchant Code.	
BNPLO-2003	404	Requested merchant not found.	التاجر غير موجود
3000	400	You cannot cancel the order at this stage	لا يمكن الغاء الطلب في هذه المرحلة

Table 29 Cancel Order Error Codes

5.3.7 Merchant Notifier

The service should be provided by the merchant to receive asynchronous order and refund status notifications from Emkan throughout the order lifecycle, including order completion, cancellation, and refund status updates.

Notification Guidelines

- The merchant endpoint must return HTTP 200 OK upon successful receipt and processing of a notification.
- If the endpoint does not return HTTP 200 OK, or if the endpoint is unreachable, Emkan will automatically retry the notification delivery up to 3 times, with a 1-minute interval between each retry attempt.
- Merchants should ensure that notification processing is idempotent, as the same notification may be delivered more than once due to retry attempts.

Protocol: REST

Method:POST

Request Body

Field Name	Description	Type	Example Value	Nullable
orderCode	Emkan orderCode	String	81366fb4-8a2c-4722-ae7c-782380b84a9b	NO
merchantId	Merchant Id	String	354	NO
eventCode	Order status	String	DOWN_PAYMENT_SUCCESS	NO
nationalId	Customer NID	String	1023761275	NO
merchantOrderCode	Merchant Order Code	String	5914	Yes

Table 30 Merchant Notifier Request Body

Response: HTTP Status Code 200

Request Example

```
{
  "orderCode": "81366fb4-8a2c-4722-ae7c-782380b84a9b",
  "eventCode": "DOWN_PAYMENT_SUCCESS",
  "nationalId": "1023761275",
  "merchantId": "354",
  "merchantOrderCode": "5914"
}
```

Response Example

HTTP 200 OK

Event Code	Business definitions
DOWN_PAYMENT_SUCCESS	Customer paid downpayment successfully and they are now eligible to receive their order from the customer.
CANCELED	Order has been cancelled.
FULLY_REFUND	Order has been fully refunded.
PARTIAL_REFUND	Order has been partially refunded.
EXPIRED	Order has been Expired

5.3.8 Get Merchant Customer Orders

The service is used to retrieve a customer's orders for a merchant using the merchant ID and either the customer National ID or mobile number. The response groups each result under customerOrders and provides the associated order, refund, and contract information when available.

Service URI: `/bff/v1/customer/orders`

Protocol: REST | Method: GET

HTTP Headers

Header Name	Type	Description	Required
channel	String	The channel through which the request is made. Default: BNPL	NO
language	String	The language of the request Default: EN	NO
caller-reference-number	String	A unique request ID for logging purposes.	NO
origin-source-channel	String	The origin channel through which the sub-channel request is made. Default: Merchant Code	YES

Table 31 Get Merchant Customer Orders HTTP Headers

Query Parameters

Field Name	Description	Type	Example Value	Nullable
merchantId	Merchant ID	String	354	NO
nationalId	Customer National ID	String	1234567890	YES*
mobileNumber	Customer Mobile Number	String	966506844867	YES*

Table 32 Get Merchant Customer Orders Query Parameters

** At least one of nationalId or mobileNumber must be provided.*

Response Body

Field Name	Description	Type	Example Value	Nullable
requestId	Unique identifier for this API request.	String	AGW12b3383f645f4b7cfb43e74915e4f	NO
callerReferenceNumber	A unique reference used for tracking purposes.	String	c1a3644e-c0d7-435d-8be5-c18fa35e3ecf	NO
code	Response result code.	String	I000000	NO
description	Response result description.	String	Successful Operation	NO
customerOrders	Customer orders returned by the service.	Array	1..n orders	YES

Field Name	Description	Type	Example Value	Nullable
customerOrders[].order	Order information.	Object	N/A	NO
customerOrders[].order.customerId	Customer identifier / National ID associated with the order.	String	1234567890	NO
customerOrders[].order.mobileNumber	Customer mobile number.	String	966501234567	NO
customerOrders[].order.orderNumber	Merchant/customer order number.	String	ORD-2026-001	NO
customerOrders[].order.orderStatus	Current order status.	String	COMPLETED	NO
customerOrders[].order.cancellationDate	Order cancellation date, when applicable.	String	2026-08-15	YES
customerOrders[].refund	Refund records associated with the order. May be an empty array when no refund exists.	Array	0..n refunds	YES
customerOrders[].refund[].refundId	Refund identifier.	String	REF-001	YES
customerOrders[].refund[].refundDate	Refund date.	String	2026-09-05	YES
customerOrders[].refund[].refundAmount	Refund amount.	Number	500.00	YES
customerOrders[].contract	Contract information associated with the order. May be null when no contract exists.	Object	N/A	YES
customerOrders[].contract.contractId	Contract identifier.	String	CNT-123456	YES
customerOrders[].contract.contractStatus	Current contract status.	String	ACTIVE	YES
customerOrders[].contract.settlementDate	Contract settlement date.	String	2026-09-01	YES
customerOrders[].contract.settlementStatus	Contract settlement status.	String	Y	YES

Table 33 Get Merchant Customer Orders Response Body

Request Example - Search by National ID

GET /bff/v1/customer/orders?merchantId=354&nationalId=1234567890

Response Example


```
{
  "requestId": "AGW12b3383f645f4b7cfb43e74915e4f",
  "callerReferenceNumber": "c1a3644e-c0d7-435d-8be5-c18fa35e3ecf",
  "code": "I000000",
  "description": "Successful Operation",
  "customerOrders": [
    {
      "order": {
        "customerId": "1234567890",
        "mobileNumber": "966501234567",
        "orderNumber": "ORD-2026-001",
        "orderStatus": "COMPLETED",
        "cancellationDate": null
      },
      "refund": [
        {
          "refundId": "REF-001",
          "refundDate": "2026-09-05",
          "refundAmount": 500.00
        }
      ],
      "contract": {
        "contractId": "CNT-123456",
        "contractStatus": "ACTIVE",
        "settlementDate": "2026-09-01",
        "settlementStatus": "Y"
      }
    }
  ]
}
```


Note: *This API is still under development and is planned to be live in the Production environment by the beginning of October 202*

6. UAT Testing Guidelines

This section outlines the rules, data, and configurations required to successfully test the Emkan BNPL integration in the UAT environment. All testing activities must strictly follow the guidelines below.

6.1 Test Data Usage

All data provided for UAT testing is for testing purposes only and must not be used in the Production environment. This includes API and portal credentials, National IDs (NIDs), mobile numbers, OTP values, card details, URLs and identifiers. No real customers or real financial transactions are involved in the UAT environment.

6.2 National ID (NID) Requirements

- A new National ID (NID) must be used for each test transaction.
- Test NIDs can be generated using:
  - https://www.devtools.tools/national-identity-generator (only use ids starting with 1)
- Reusing the same NID across multiple tests may cause the transaction to fail or behave unexpectedly.

6.3 Mobile Number Rules

- Use a new random mobile number for each test transaction.
- The mobile number must start with 5.
- Each National ID must be associated with a unique mobile number.

6.4 OTP Handling

During the OTP verification step, use the following static OTP code:

> **Static OTP (UAT only): 1234**

6.5 Nafath Authentication

Nafath authentication is required as part of the customer journey. Once Nafath verification is completed successfully, the journey will continue automatically.

6.6 Additional Information

The customer may be asked to provide additional information (e.g., number of family members). Any values entered in this step will not affect the testing journey or decision outcome in the UAT environment.

6.7 IVR Call Behavior

- After offering confirmation, the customer will receive an automated IVR call.
- The IVR call will typically be auto approved within approximately 30 seconds.
- If approval does not occur within 60 seconds, the IVR call can be re-initiated.

6.8 Test Card Details (Down Payment)

Use any of the following test cards to complete the down payment step in the UAT environment:

Card Number	Expiry Date	CVV	Card OTP	Network
5105 1051 0510 5100	12/26	123	123123	Mastercard
4012 0010 3714 1112	12/26	207	123123	Visa

> ⚠ **Reminder**
> These cards are not valid for real transactions and must not be used outside the UAT environment.

6.9 Order Verification

After successful completion of the payment journey:


- The order status will be updated accordingly.
- Merchants can view and track the order through the Merchant Portal (UAT) or through the Order Inquiry API.

7. Merchant Portal

The Merchant Portal enables merchants to manage BNPL orders, track order statuses, create new orders, and view merchant profile details. This section provides an overview of the main portal features after IP whitelisting and credential setup.

7.1 Portal Access


Merchant Portal — Login Page

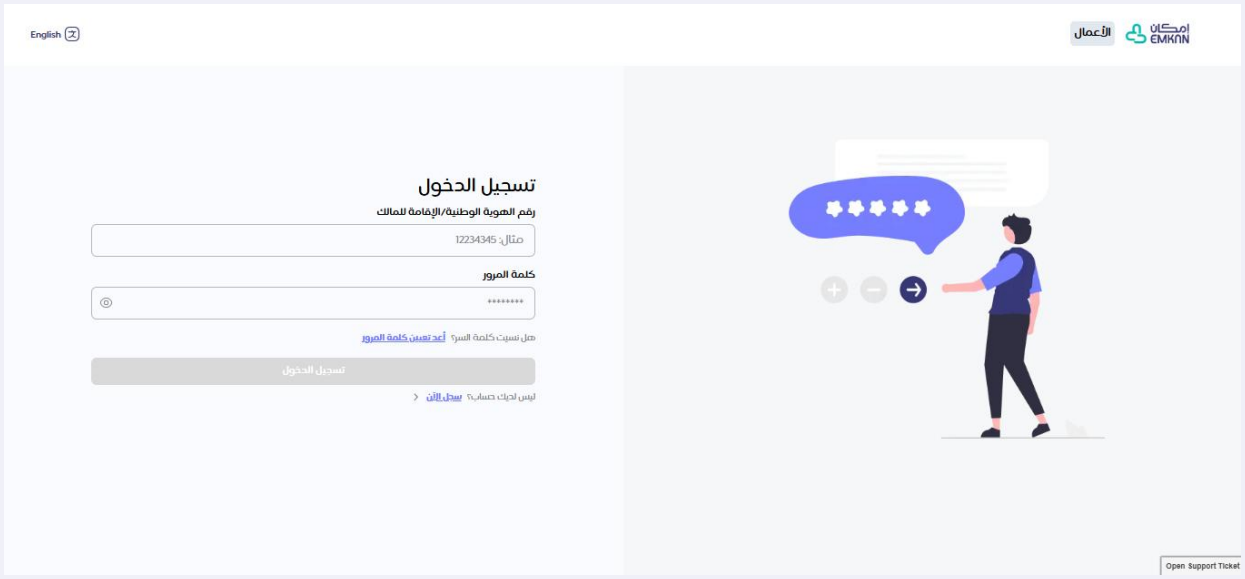

7.2 Dashboard Overview

The Dashboard provides a high-level overview of BNPL orders. Key features include a visual summary of order statuses and the ability to filter data by Today, This Week, or This Month, enabling merchants to quickly monitor transaction activity.

Merchant Portal — Dashboard Landing Page

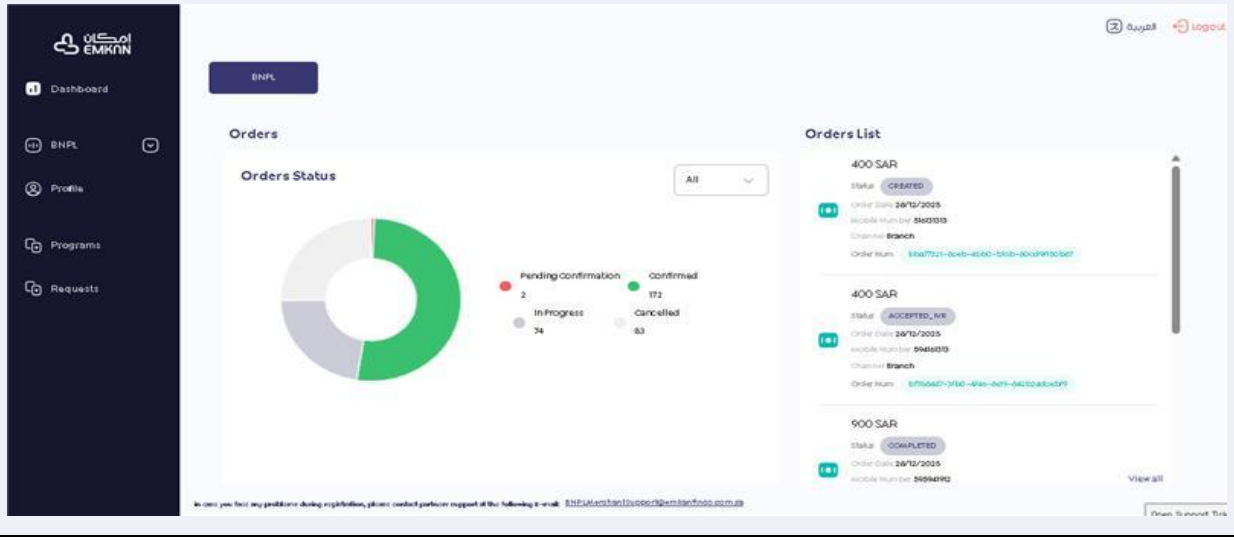


7.3 Orders Page

The Orders page displays all BNPL orders created by the merchant. From this page, merchants can:

- View all orders in a tabular format
- Filter orders by mobile number
- Check the status of each order (e.g., Created, Accepted, Completed)
- View refund status for each order
- Download the full list of orders
- Create a new order directly from the portal


Dashboard — Order Status Chart & Date Filter

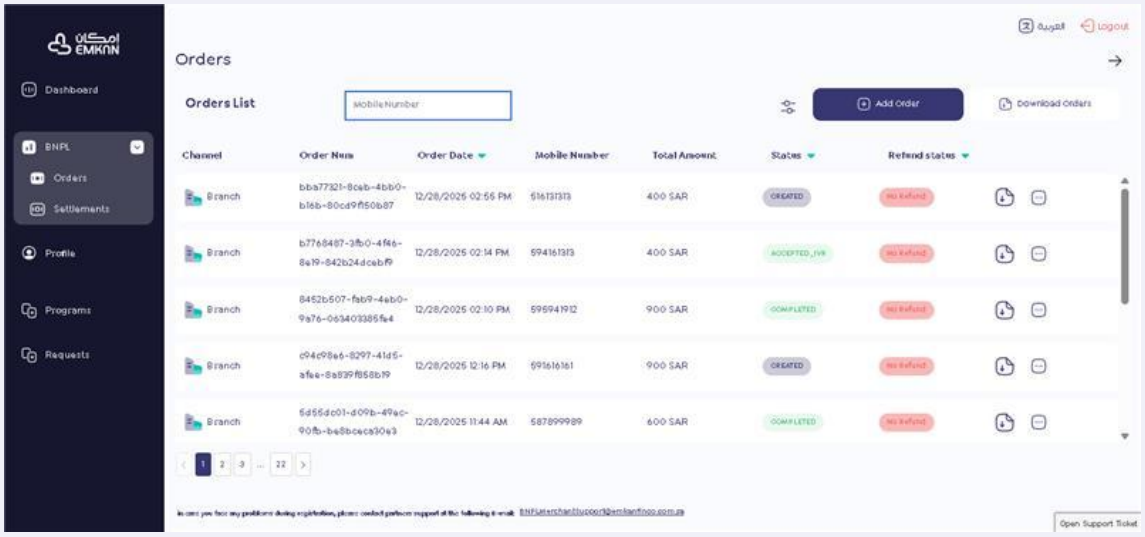

7.4 Creating a New Order


Merchants can create a new BNPL order directly from the Orders page. To create an order, the merchant must enter the customer's mobile number, total bill amount, and order expiration time.

Create Order — Form

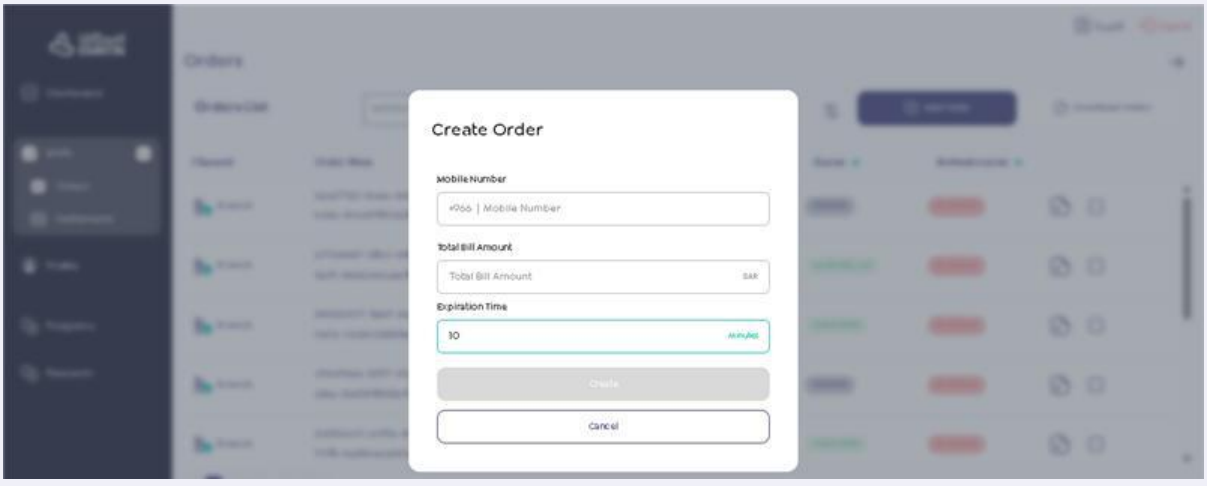

After the order is created, a QR code is generated, or a payment link is provided. The merchant can either ask the customer to scan the QR code or share the payment link with the customer (e.g., via SMS)

QR Code Generated Successfully

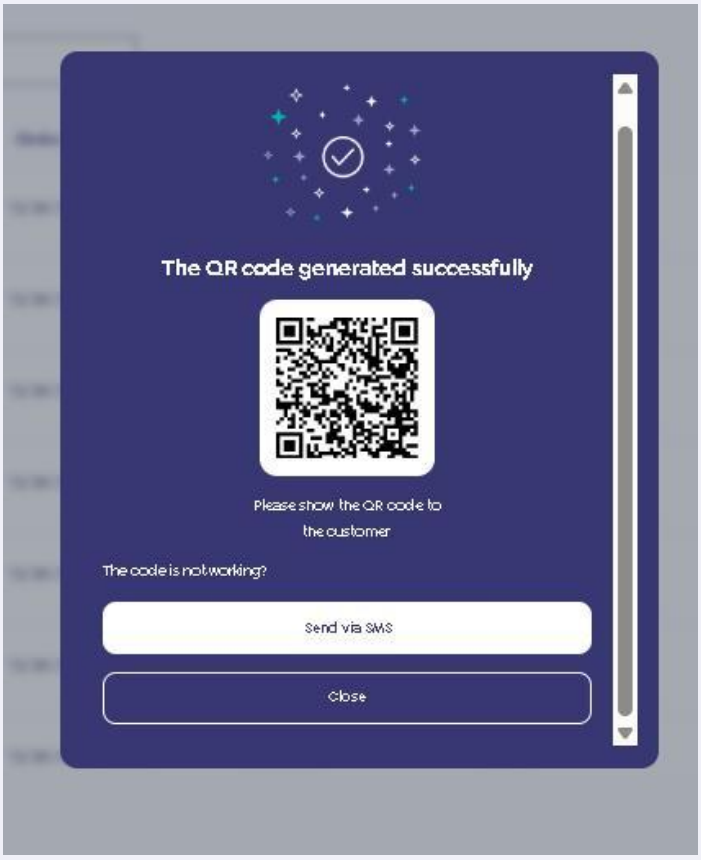

7.5 Order Status & Refund Requests

For each order, merchants can view detailed information, track the current order status, submit refund requests (if applicable), and verify whether a refund has been successfully processed.

Order Status & Actions Bar




7.6 Merchant Profile

The Profile section displays the merchant's registered details, including:

- Merchant ID and Merchant Code
- Merchant name (Arabic and English)
- API credentials (as applicable)
- Configuration and redemption channel settings

Merchant Profile Page

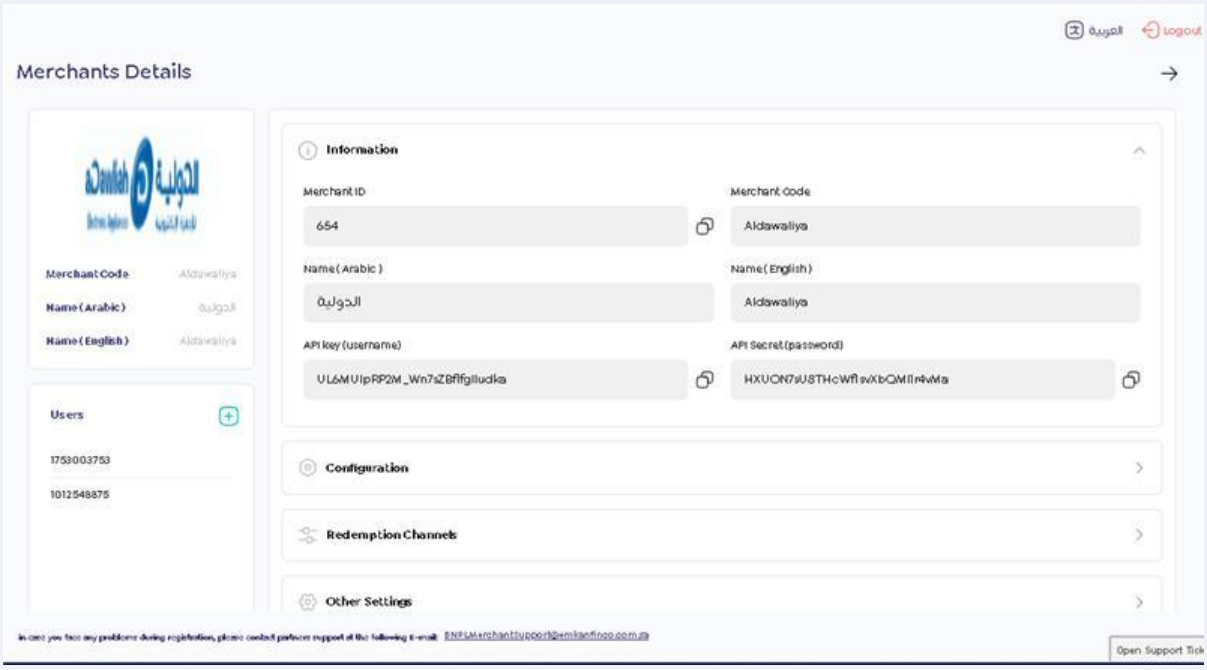

8. Customer Journey (UAT Environment)

This section describes the end-to-end customer journey after the merchant successfully creates an order and shares the payment link or QR code with the customer. Only key screens are documented below.


8.1 New Customer Flow


This flow describes the journey for a new customer completing a BNPL application for the first time, including identity verification via Nafath and collection of additional information.

8.1.1 Order Creation

The customer journey begins once the merchant successfully creates an order using the Create Order API or through the Merchant Portal. After order creation, a Payment URL and/or QR code is generated, and the merchant shares it with the customer.

Order Creation — Via Merchant Portal (down) & Via API Response (up)

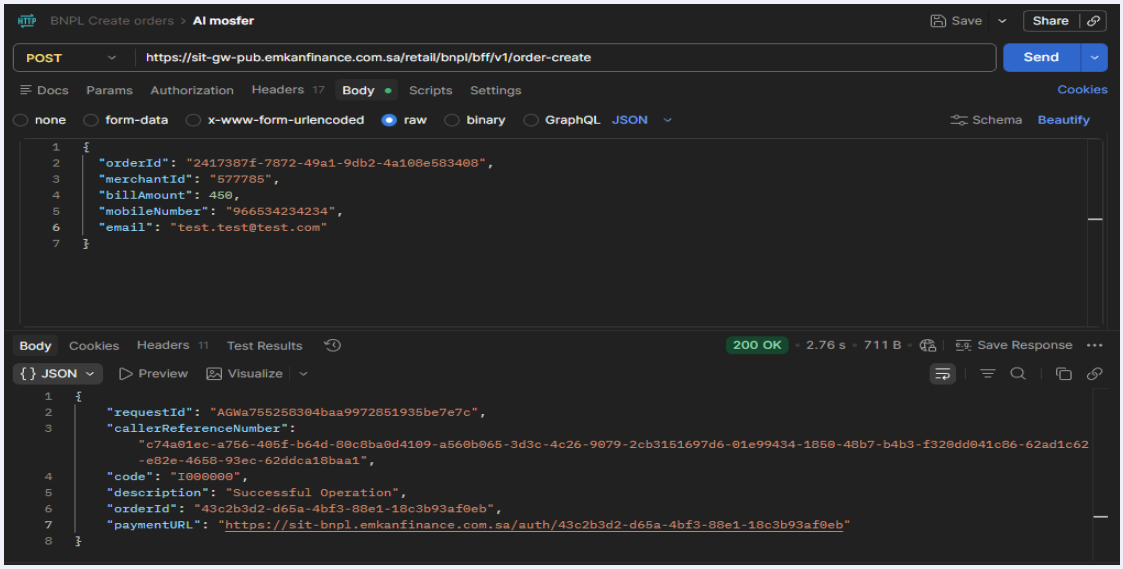

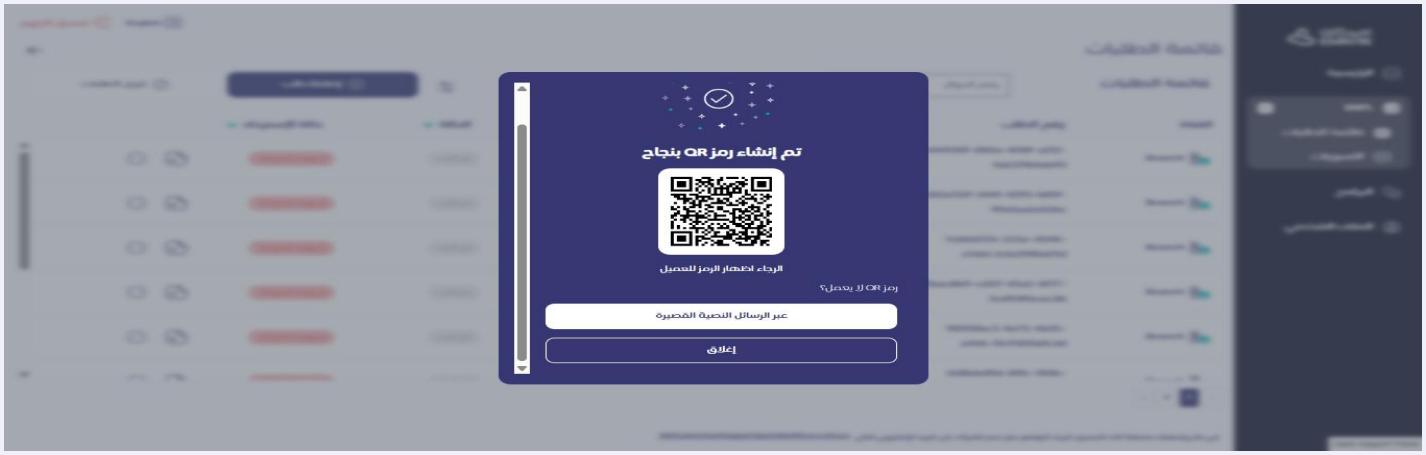

8.1.2 Access Payment Link / QR Code

The customer initiates the journey by opening the payment link or scanning the QR code provided by the merchant. Kindly refer to Section 5.2 for generating a National ID

Landing Page after Opening the Payment URL



8.1.3 Customer Information

The customer is required to enter their National ID (NID), mobile number, and date of birth. Kindly refer to Section 5.3 for mobile number requirements.


Customer Information Input Screen



8.1.4 OTP Verification and Nafath Authentication

An OTP is sent to the customer's registered mobile number to proceed. In UAT, a mocked OTP (as provided in Section 5.4) is used instead. The customer is then redirected to Nafath for identity authentication; however, in UAT, the customer is automatically authenticated.


OTP Verification Screen (left) | Nafath Authentication Screen (right)

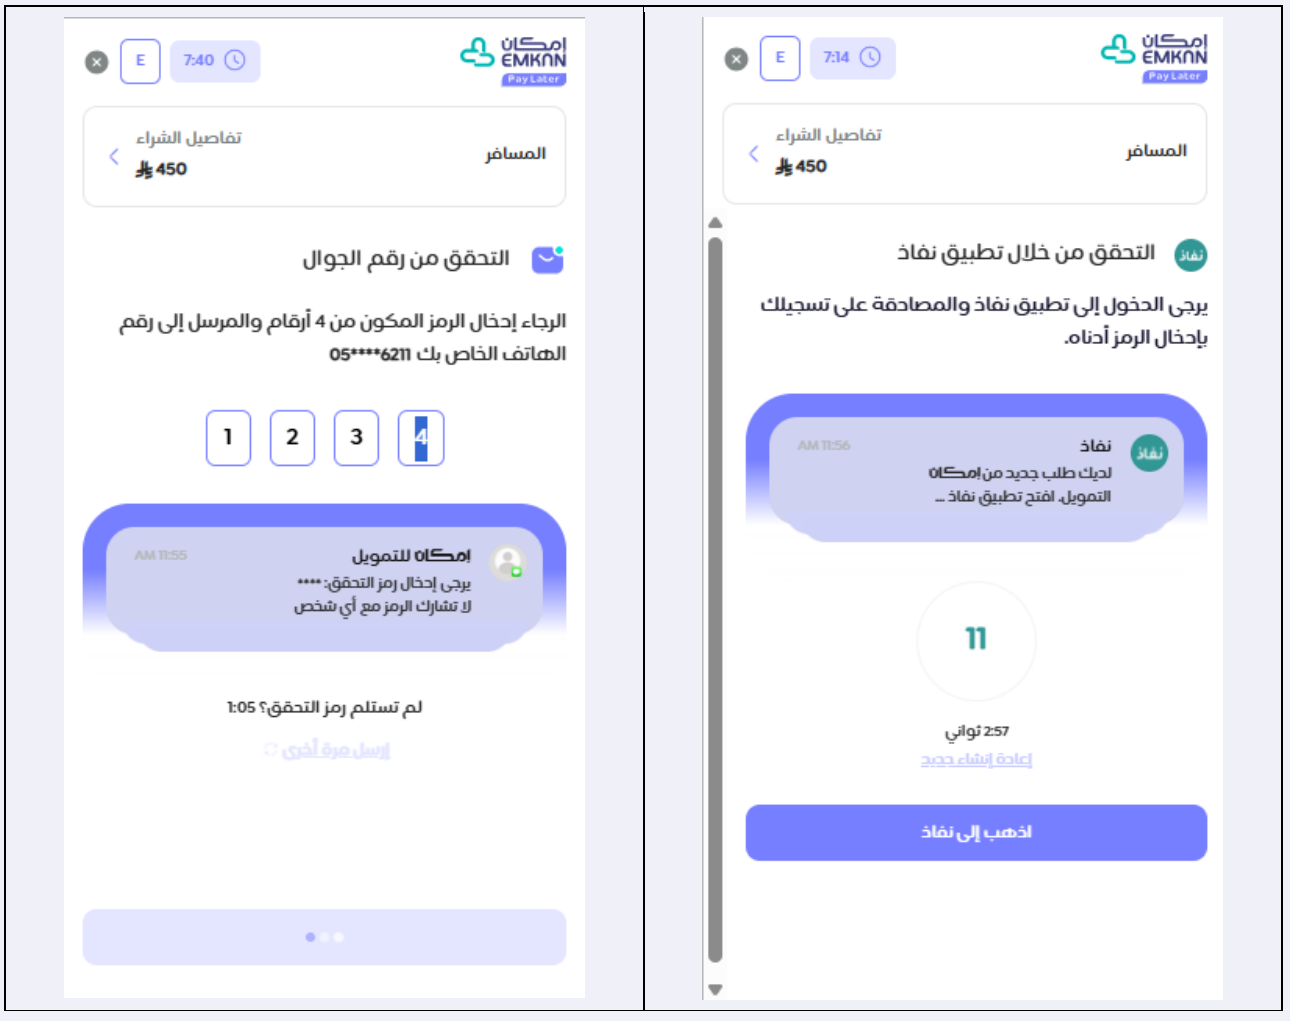

8.1.5 Additional Information

The customer may be asked to provide additional information (e.g., number of family members). This step does not affect the decision-making outcome.


Additional Information Screen

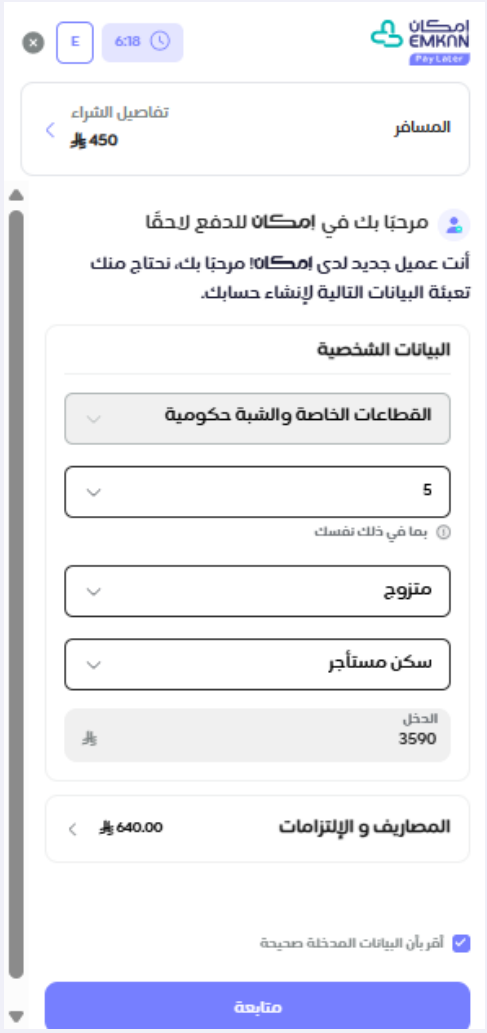

8.1.6 Final Offer & Installment Selection

The final financing offer is presented, enabling the customer to choose the installation period or adjust the down payment within the allowed minimum and maximum limits.

Final Offer & Installment Selection

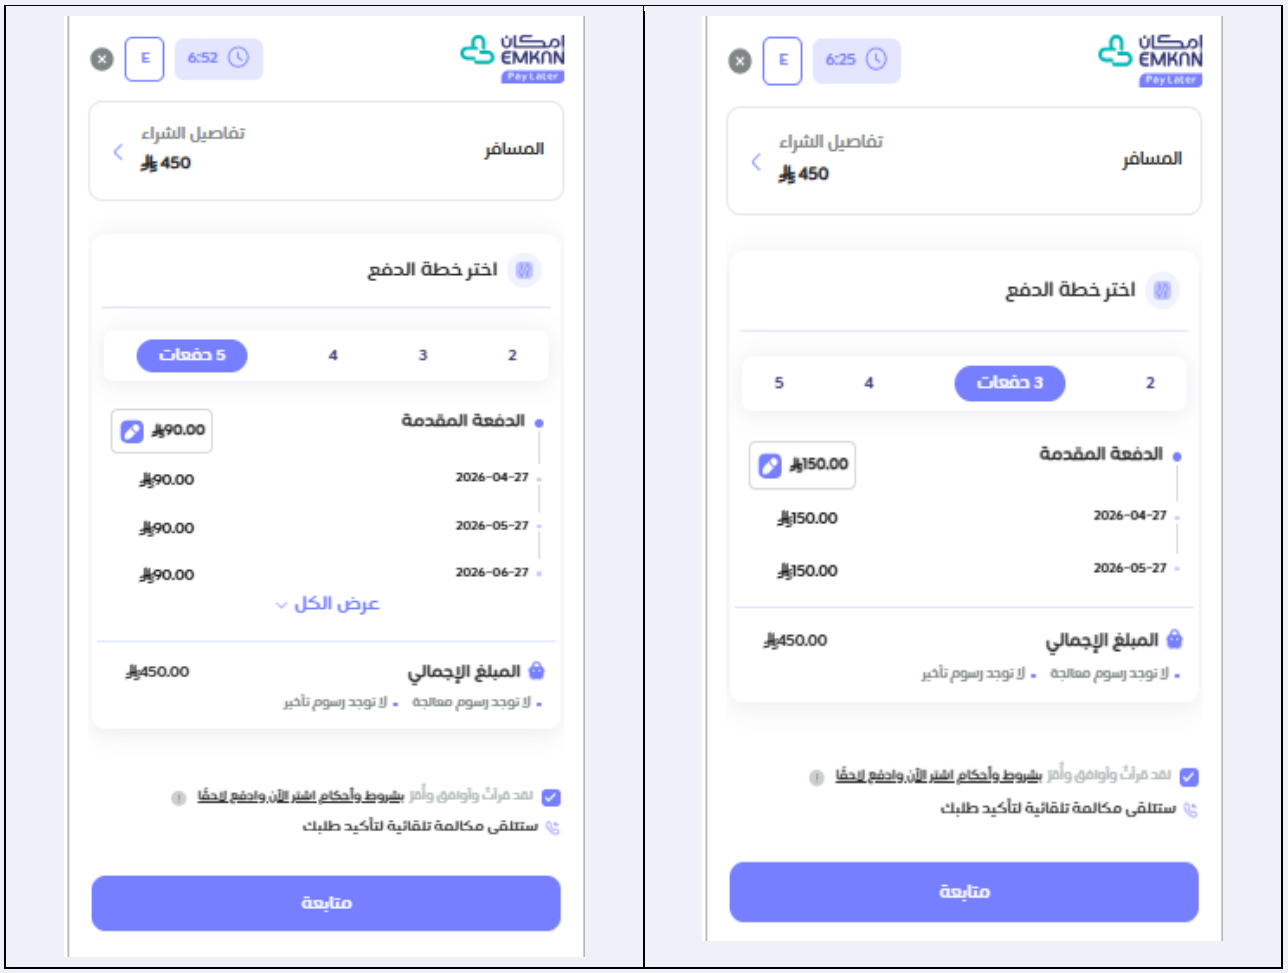

8.1.7 IVR Call Verification

After confirming the offer, the customer receives an automated IVR call. The IVR is typically auto approved within 30 seconds.


IVR Call Confirmation Screen



8.1.8 Down Payment

The customer is redirected to the Neoleap down payment page to complete the payment using the test card details provided in section 5.8. After entering card details, an OTP screen for the card will be presented.


Down Payment — Neoleap Card Entry

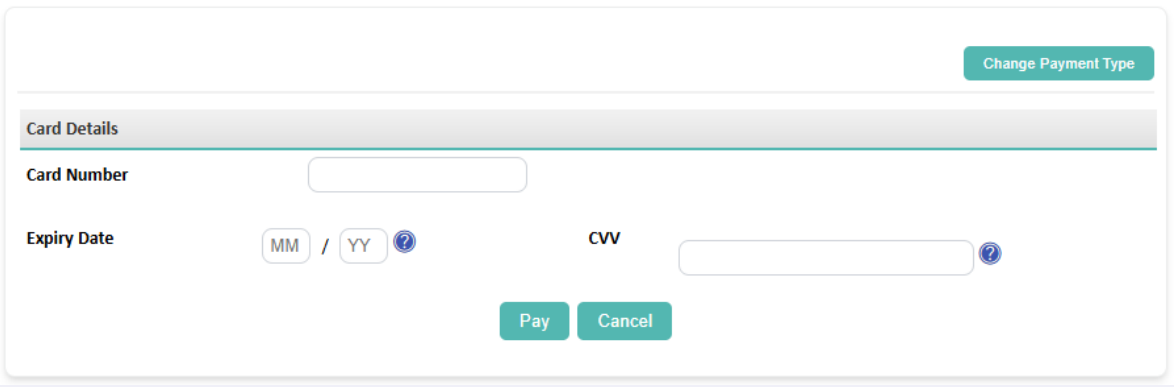

8.1.9 Payment Confirmation & Order Completion

After successful payment, a confirmation message is displayed, and the order is completed successfully.

Payment Success / Order Completion Screen

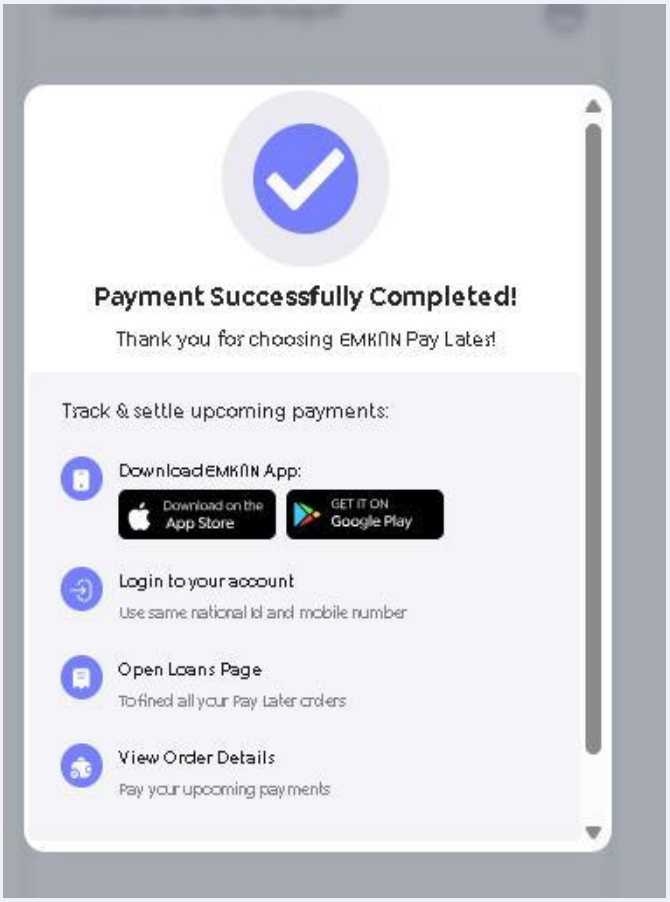


8.2 Existing Customer Flow

This flow describes the journey for an existing customer who has already completed identity verification and Nafath authentication in a previous application. Only OTP verification is required before proceeding to the final offer.

8.2.1 Order Creation

The customer journey begins once the merchant successfully creates an order using the Create Order API or through Portal. After order creation, a Payment URL and/or QR code is generated, and the merchant shares it with customer.

Order Creation — Via Merchant Portal (left) & Via API Response (right)

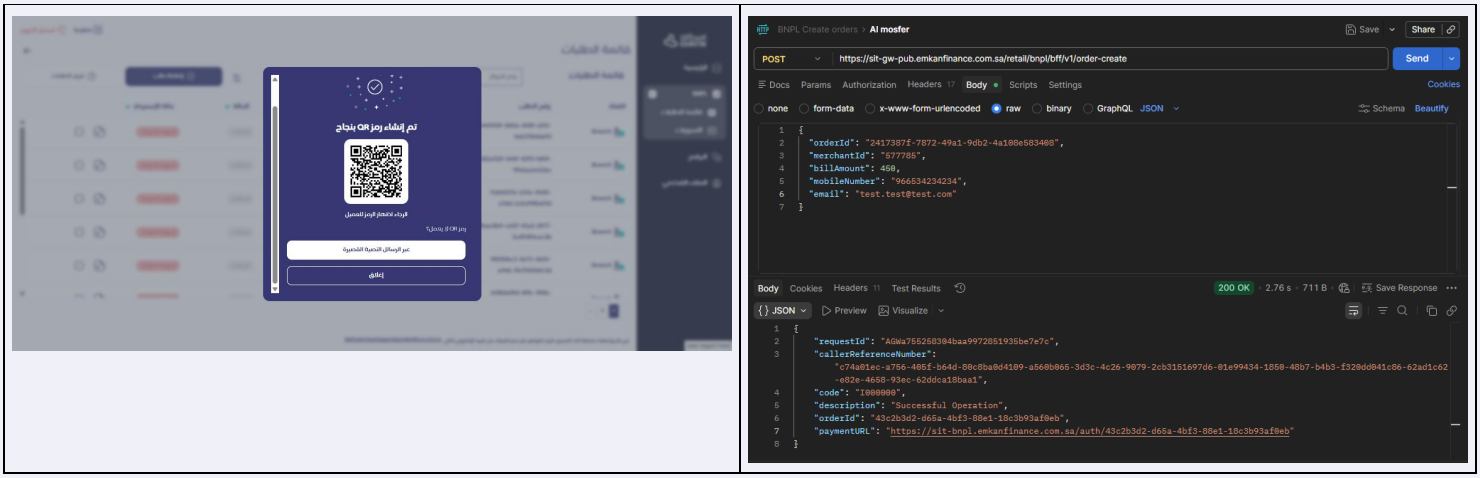

8.2.2 OTP Verification

An OTP is sent to the customer's registered mobile number to proceed. In UAT, a mocked OTP is used instead.


OTP Verification Screen



8.2.3 Final Offer & Installment Selection

The final financing offer is presented, enabling the customer to choose the installation period or adjust the down payment within the allowed minimum and maximum limits.

Final Offer & Installment Selection

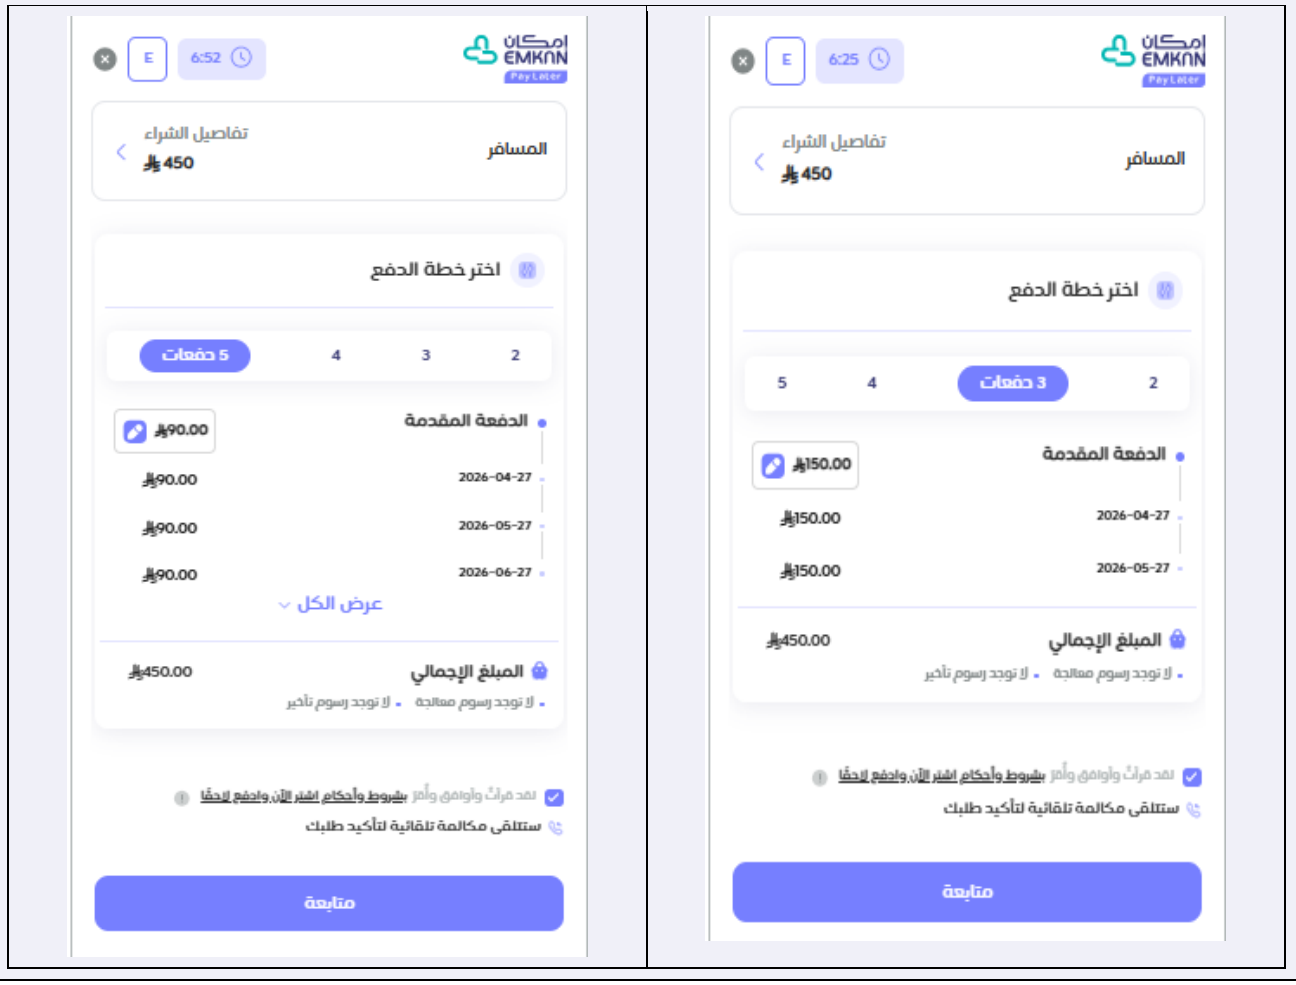

8.2.4 IVR Call Verification

After confirming the offer, the customer receives an automated IVR call. The IVR is typically auto approved within 30 seconds.


IVR Call Confirmation Screen



8.2.5 Down Payment

The customer is redirected to the Neoleap down payment page to complete the payment using the test card details provided in section 5.8. After entering card details, an OTP screen for the card will be presented.


Down Payment — Neoleap Card Entry

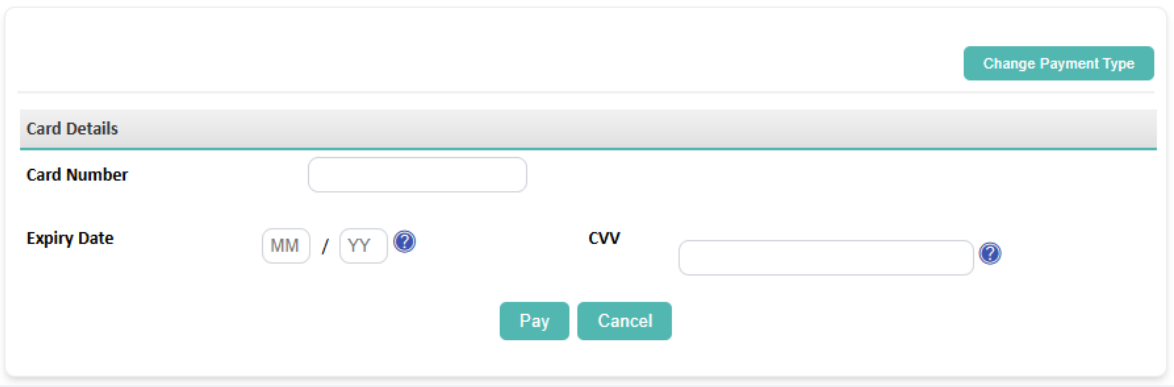


8.2.6 Payment Confirmation & Order Completion

After successful payment, a confirmation message is displayed, and the order is completed successfully.

Payment Success / Order Completion Screen

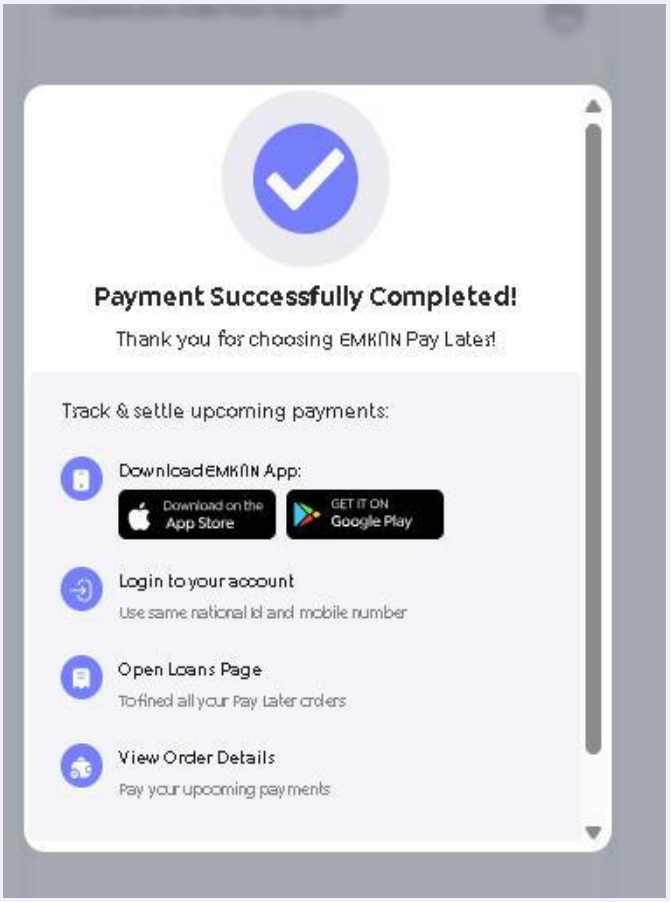

8.3 LMS Journey

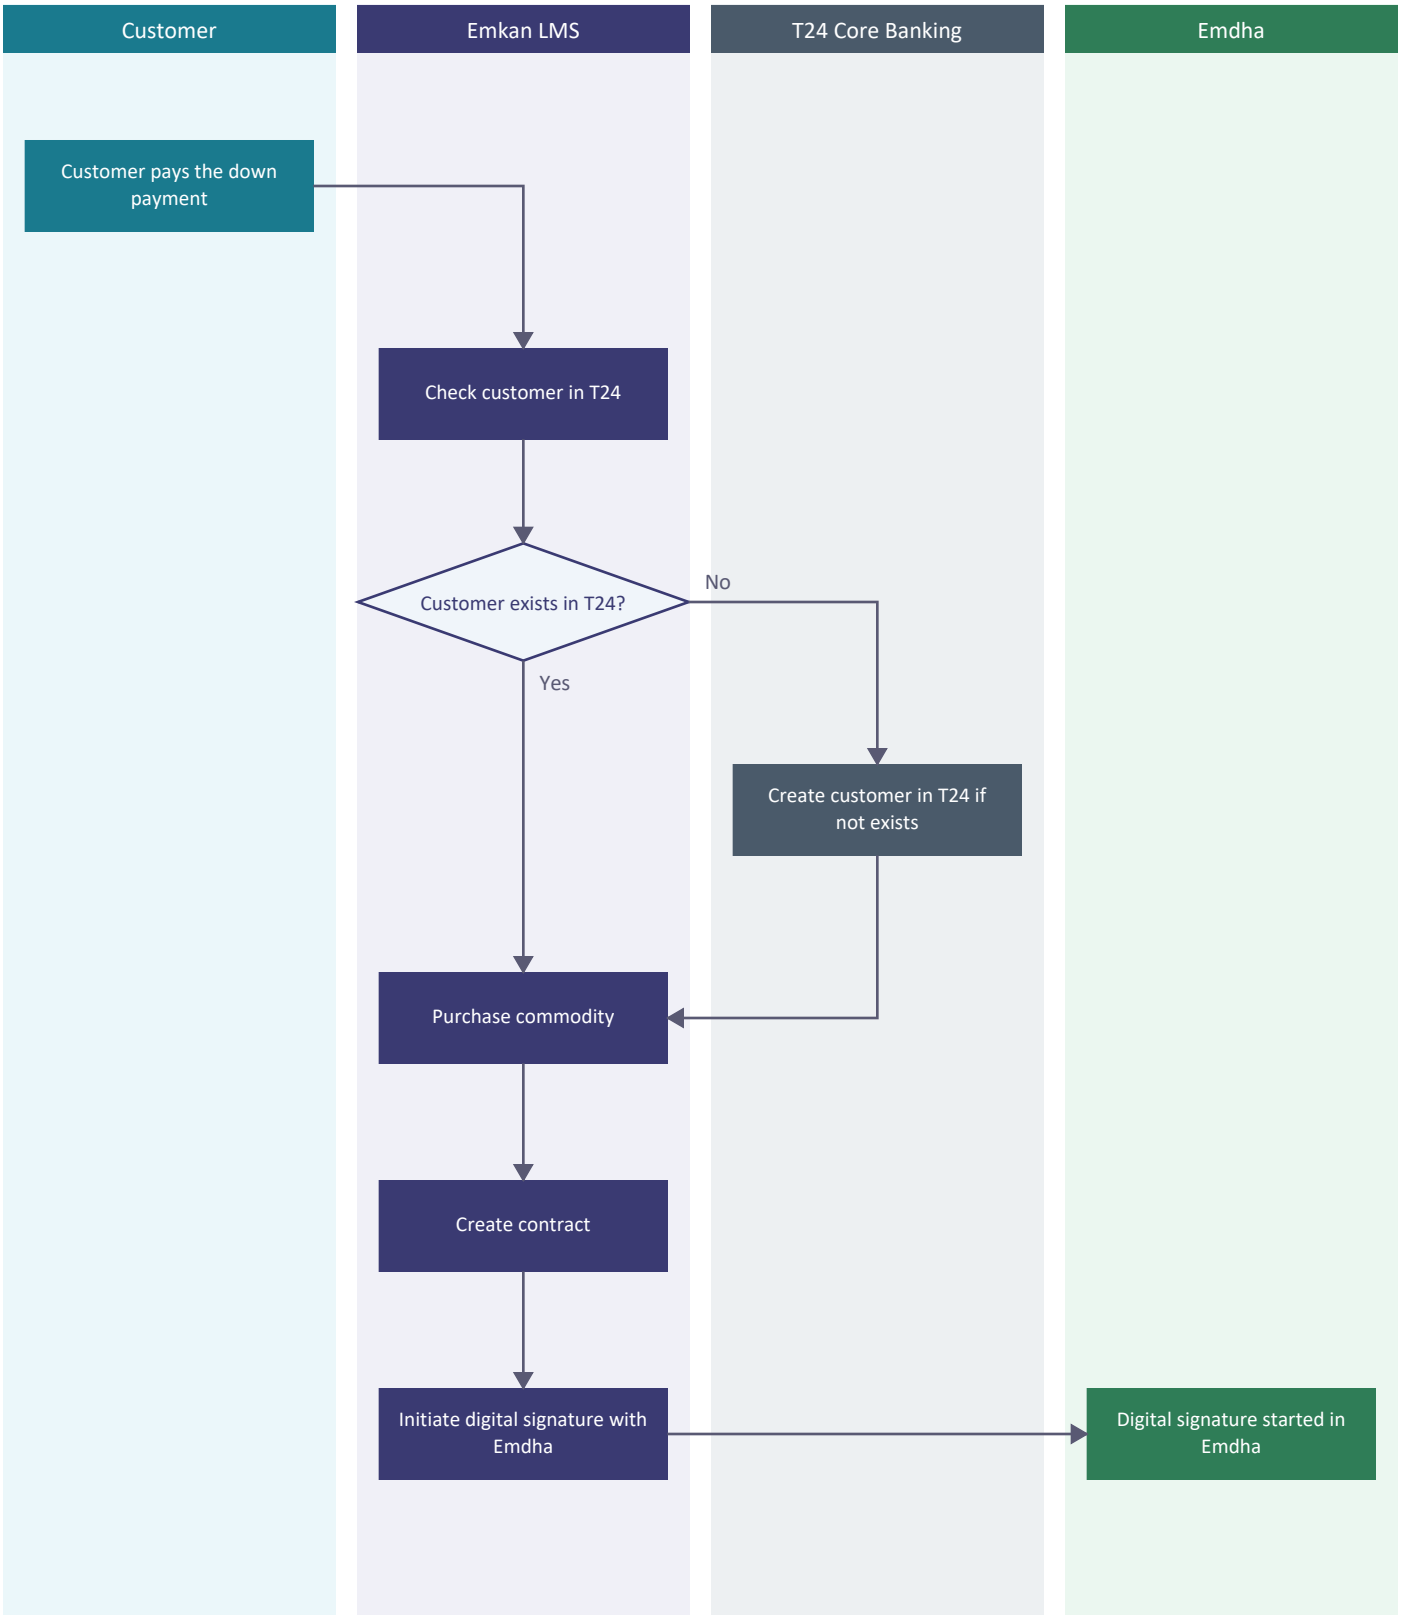

9. Support

For any questions or issues related to the Emkan BNPL integration, customer journey, or Merchant Portal, merchants may contact Emkan support using the support channels shared during onboarding.

> *When reaching out, please include relevant details such as environment, order reference, or screenshots to help speed up the resolution.*