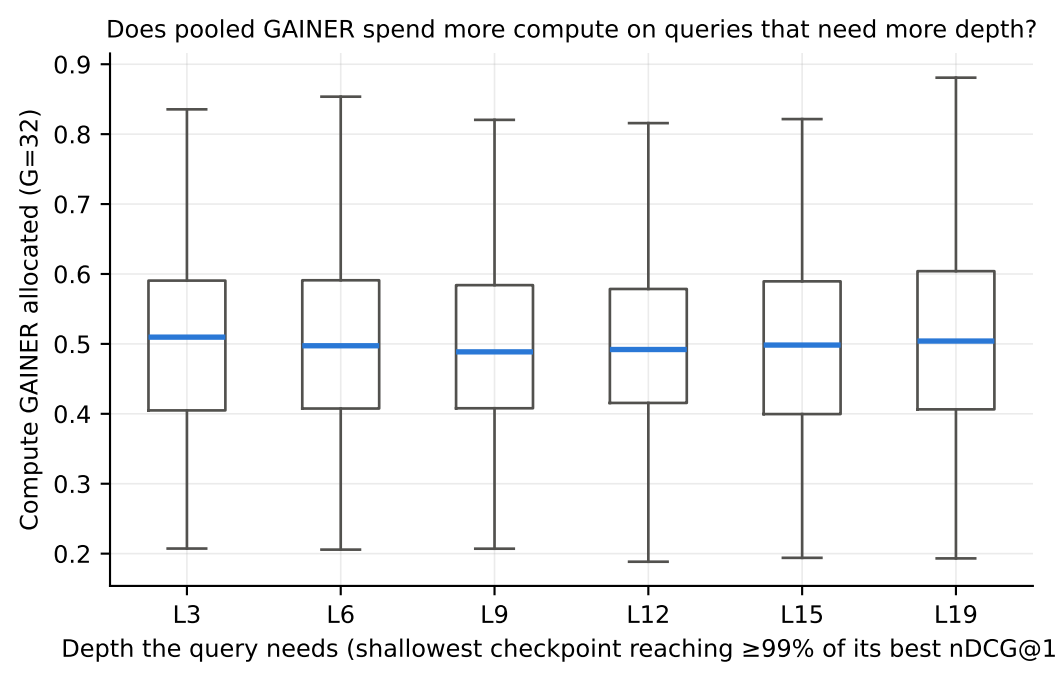
Does pooled GAINER spend more compute on queries that need more depth?
Compute GAINER allocated (G=32)
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
L3
L6
L9
L12
L15
L19
Depth the query needs (shallowest checkpoint reaching ≥99% of its best nDCG@1