
01 | Landing-zone governance and ownership

PROPOSED TARGET — not deployed by this lab. Dashed connectors mean policy/RBAC inheritance, not routed traffic.

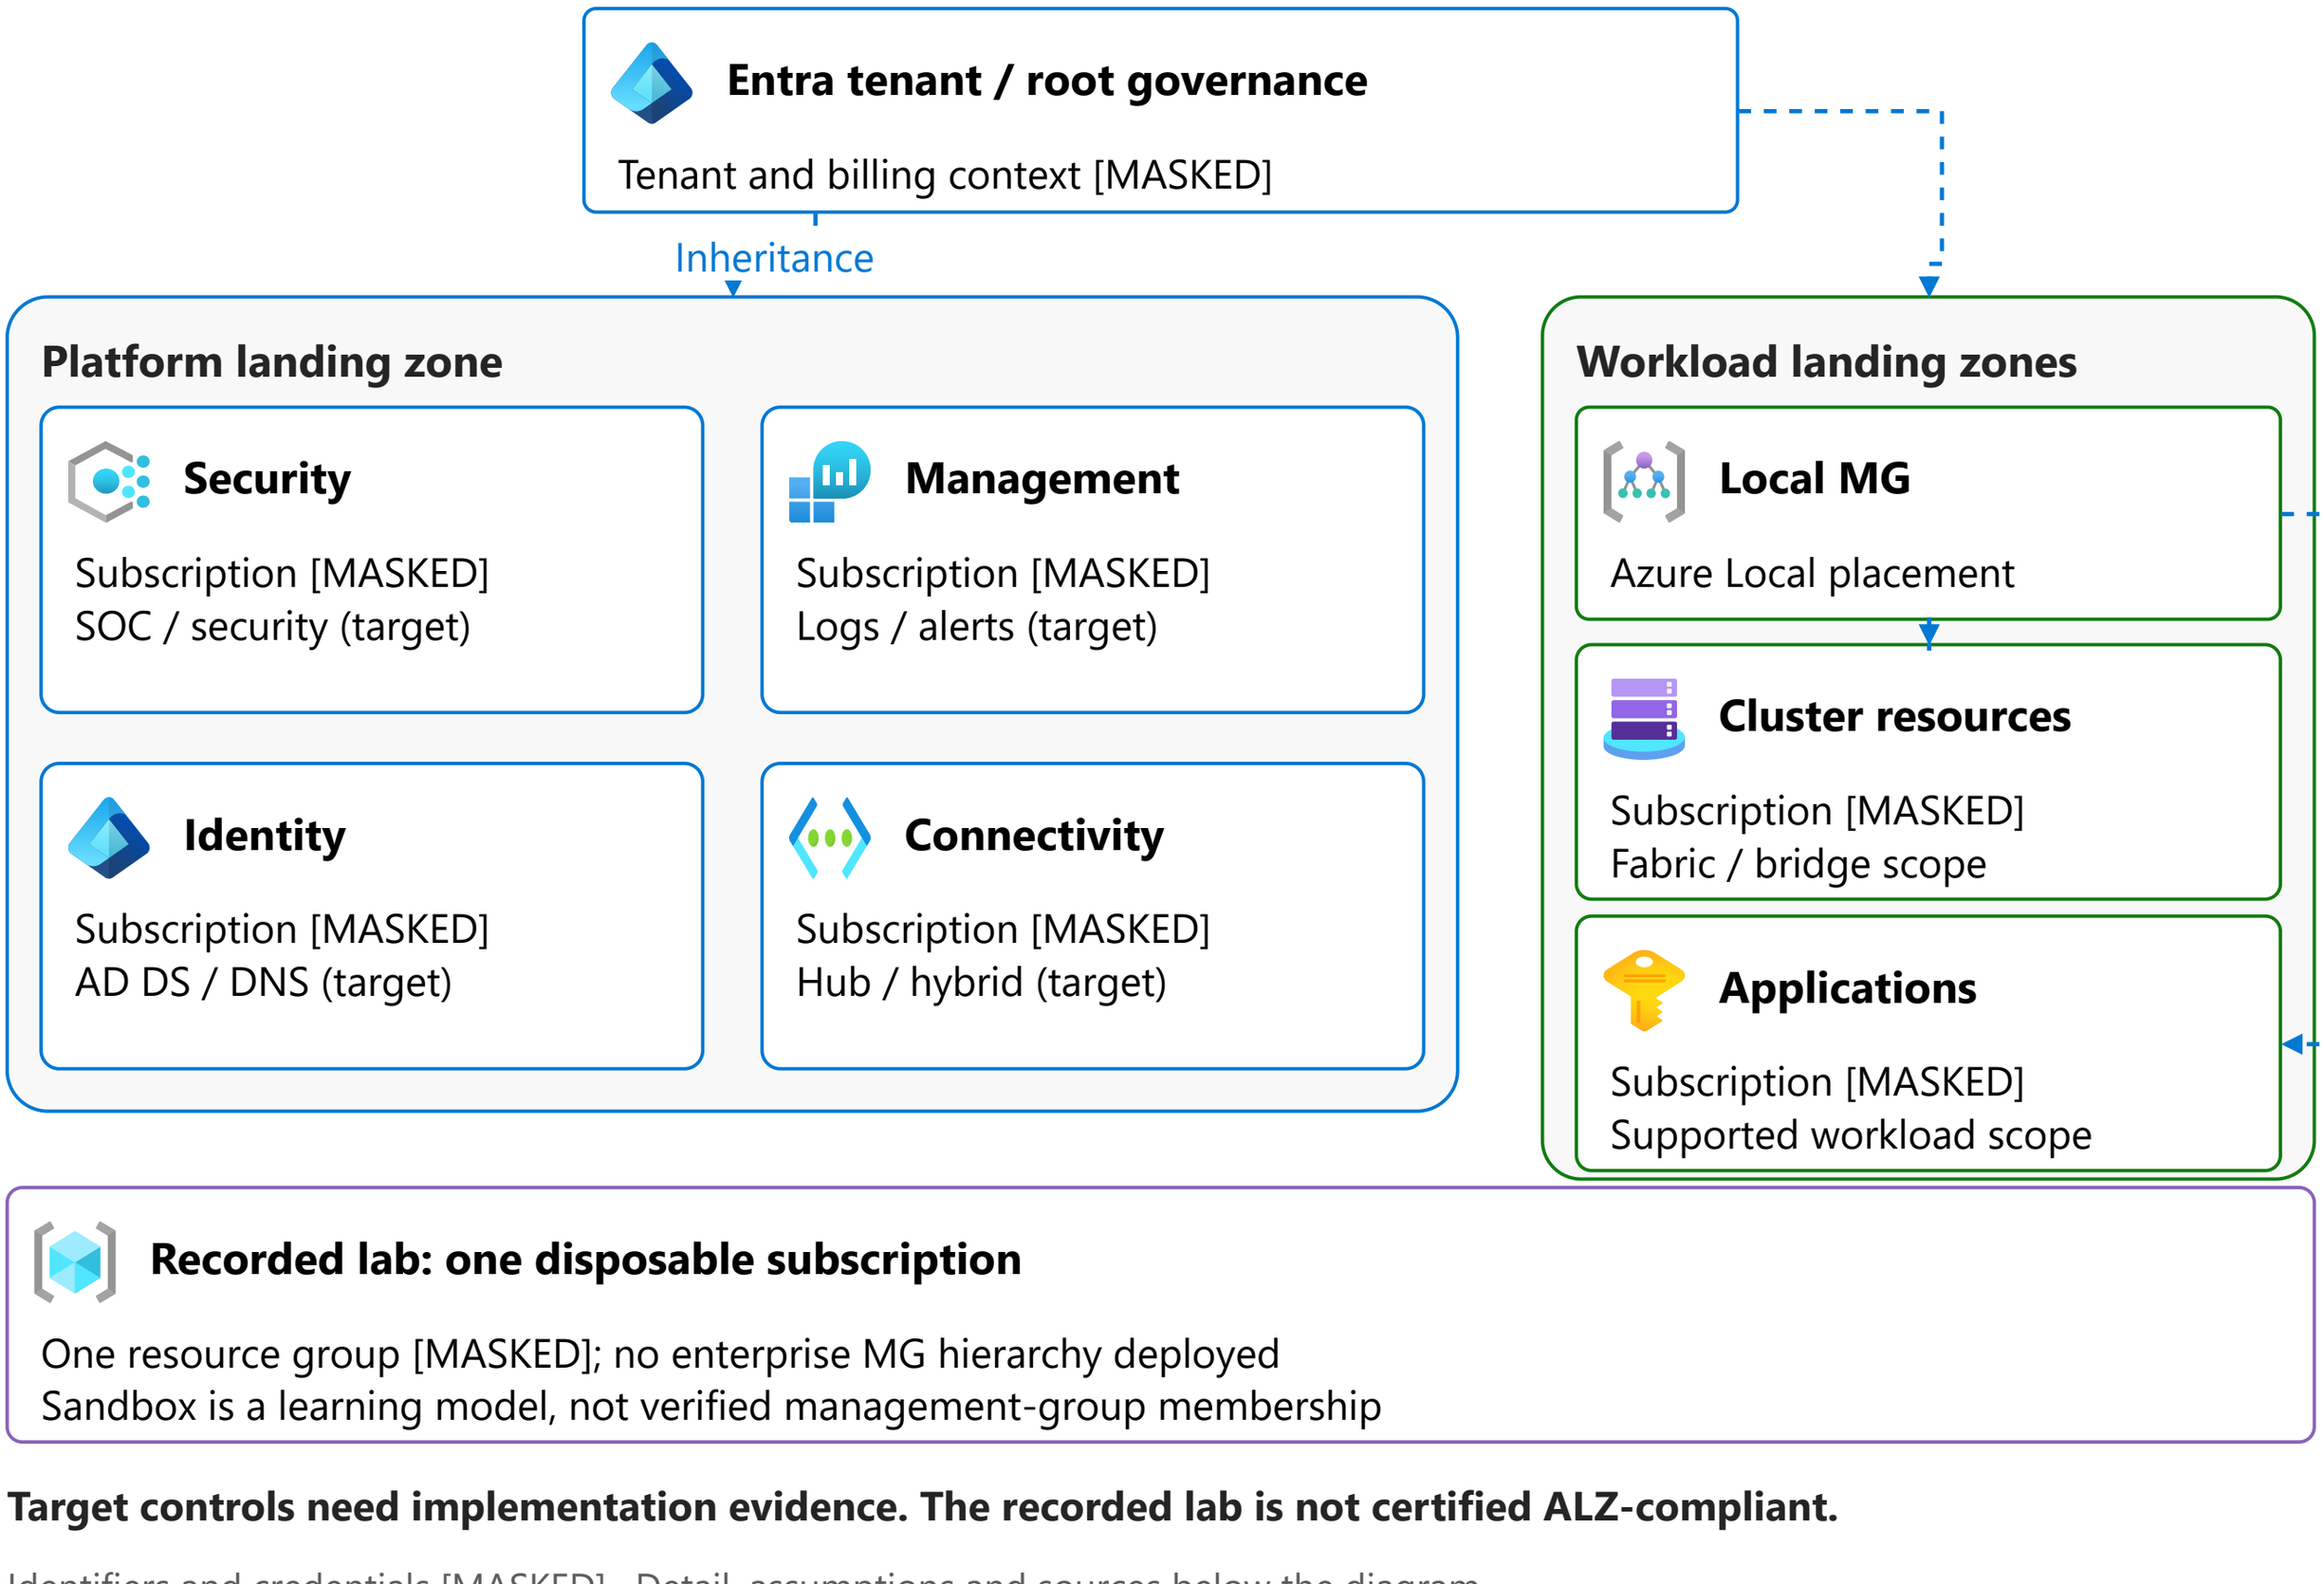


Target controls need implementation evidence. The recorded lab is not certified ALZ-compliant.

Identifiers and credentials [MASKED] · Detail, assumptions and sources below the diagram

02 | Azure and nested-network boundaries

RECORDED LAB — Australia East. Azure VNet subnets and nested workload networks are different routing boundaries.

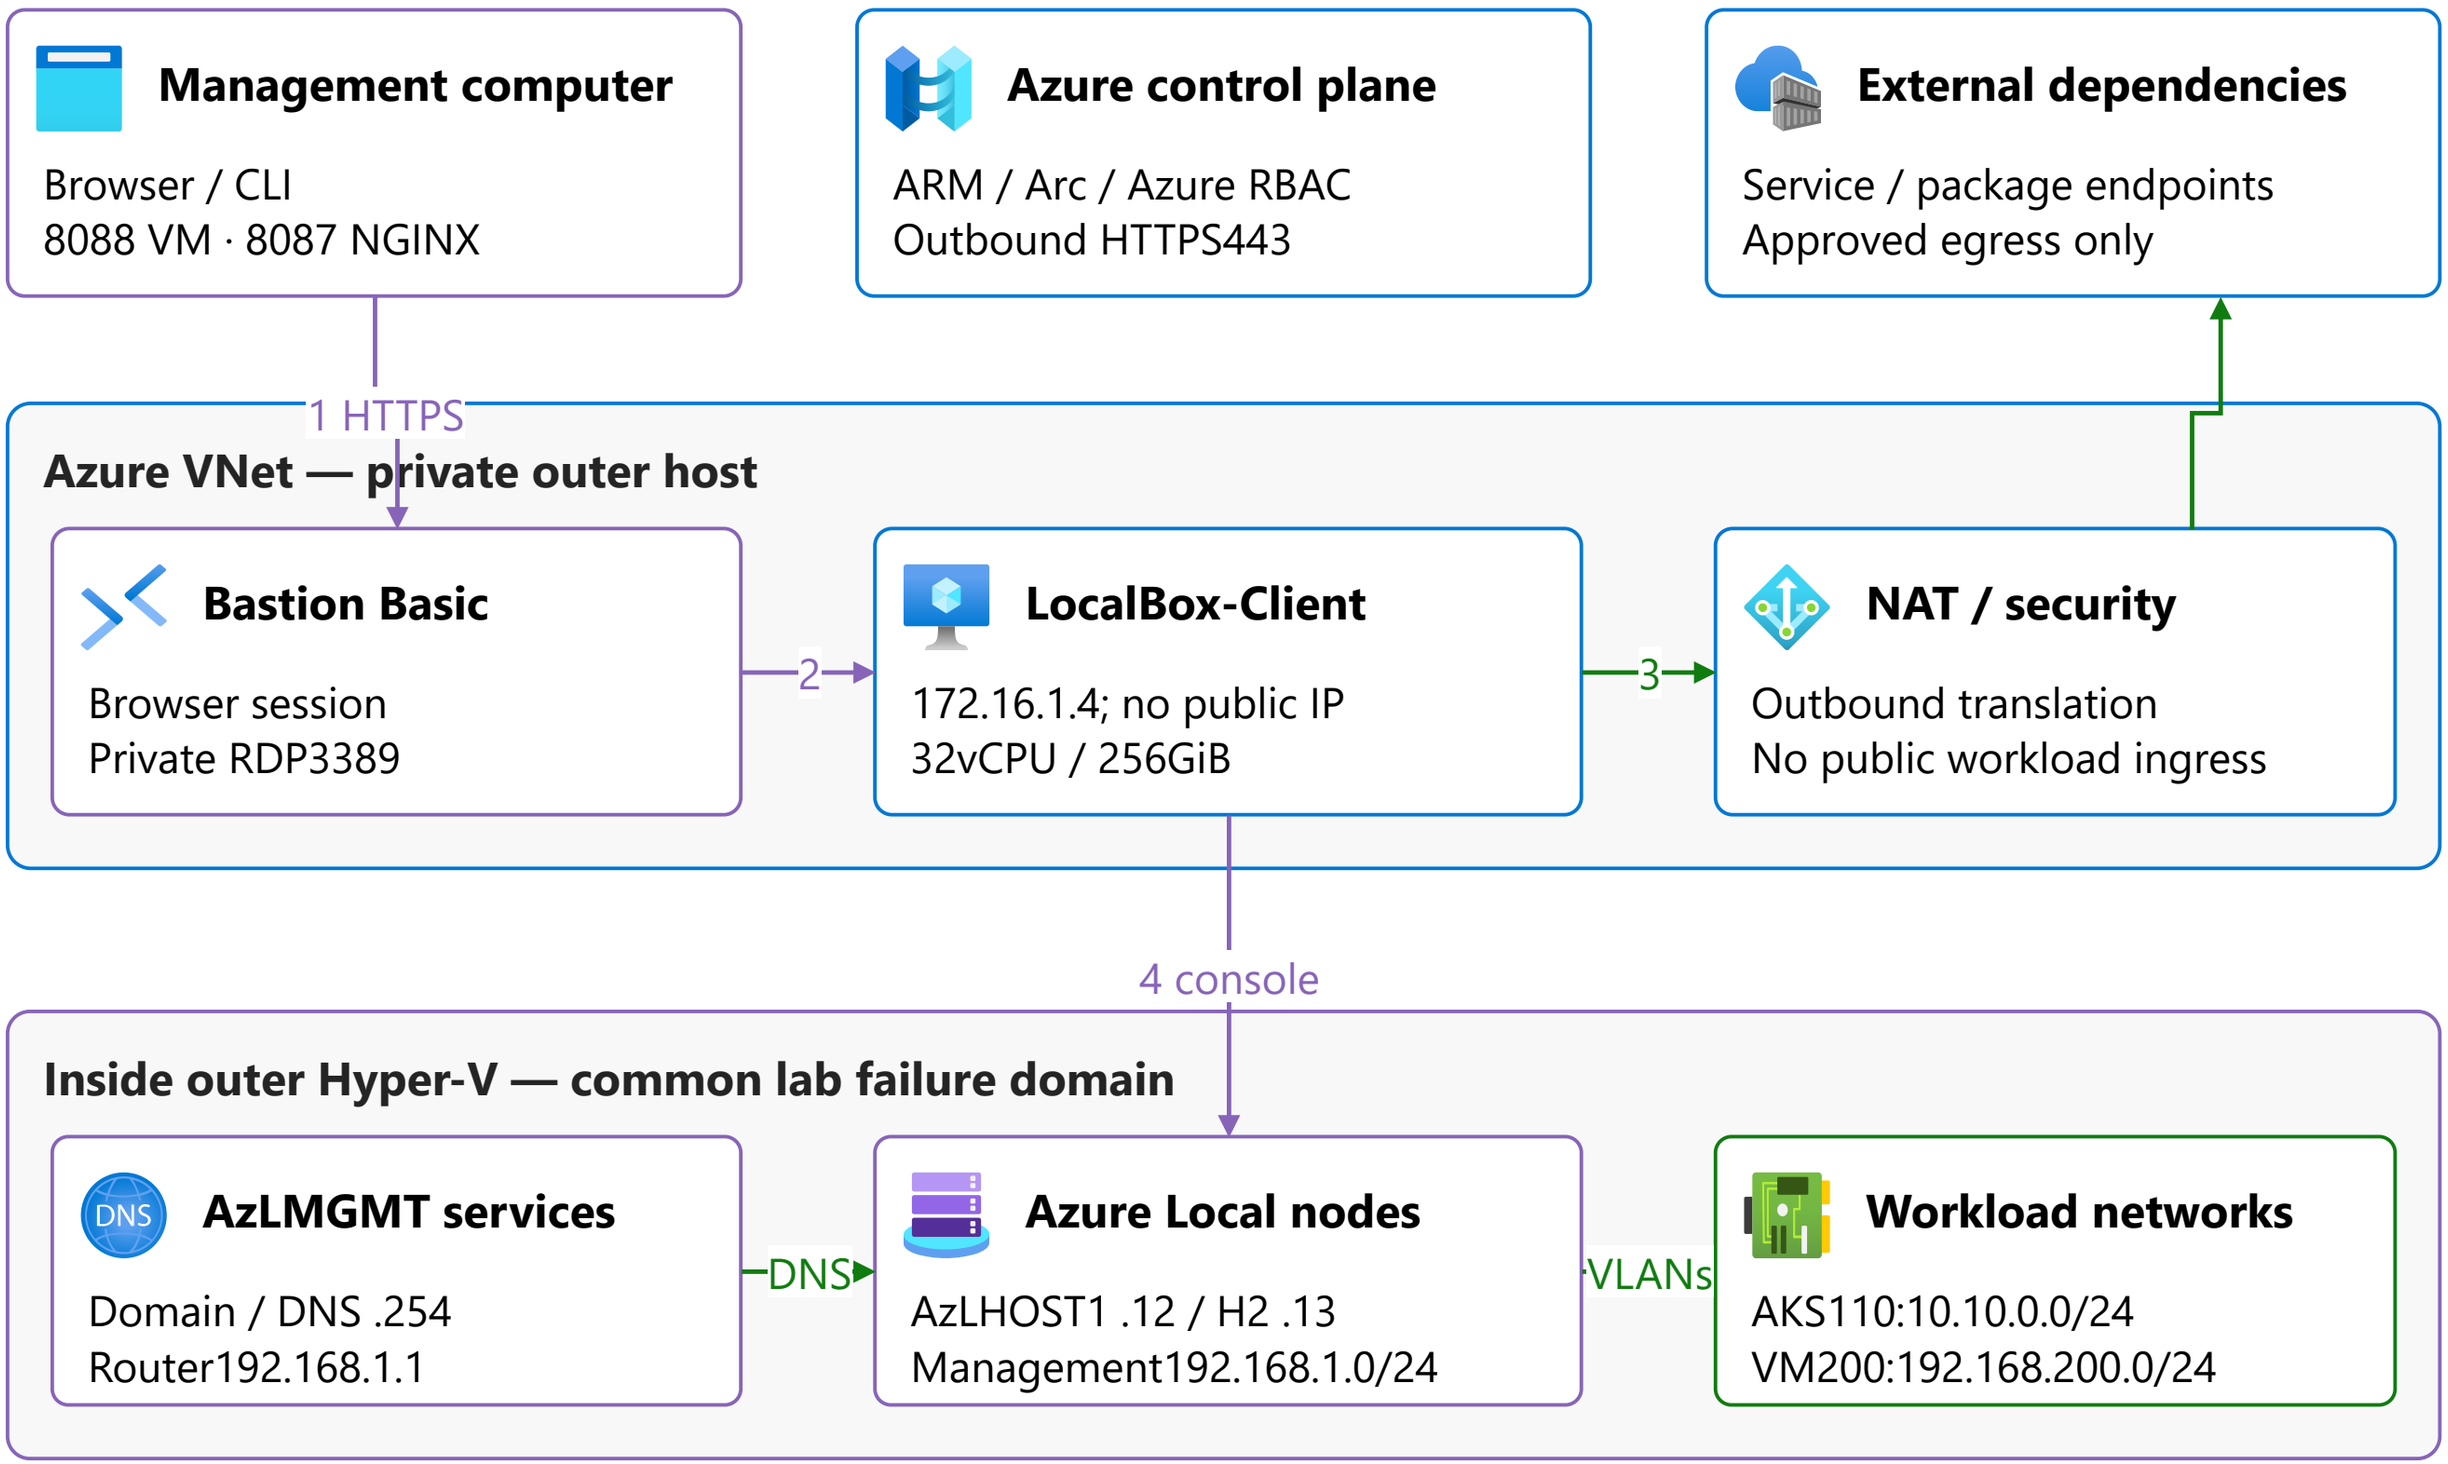


Bastion opens the outer VM. Arc is not a VPN; NAT is not a firewall or a production hub.

Identifiers and credentials [MASKED] · Detail, assumptions and sources below the diagram

03 | Cluster fabric, storage and identity

RECORDED FABRIC — node membership, VM ownership, CSV coordination and witness quorum have different responsibilities.

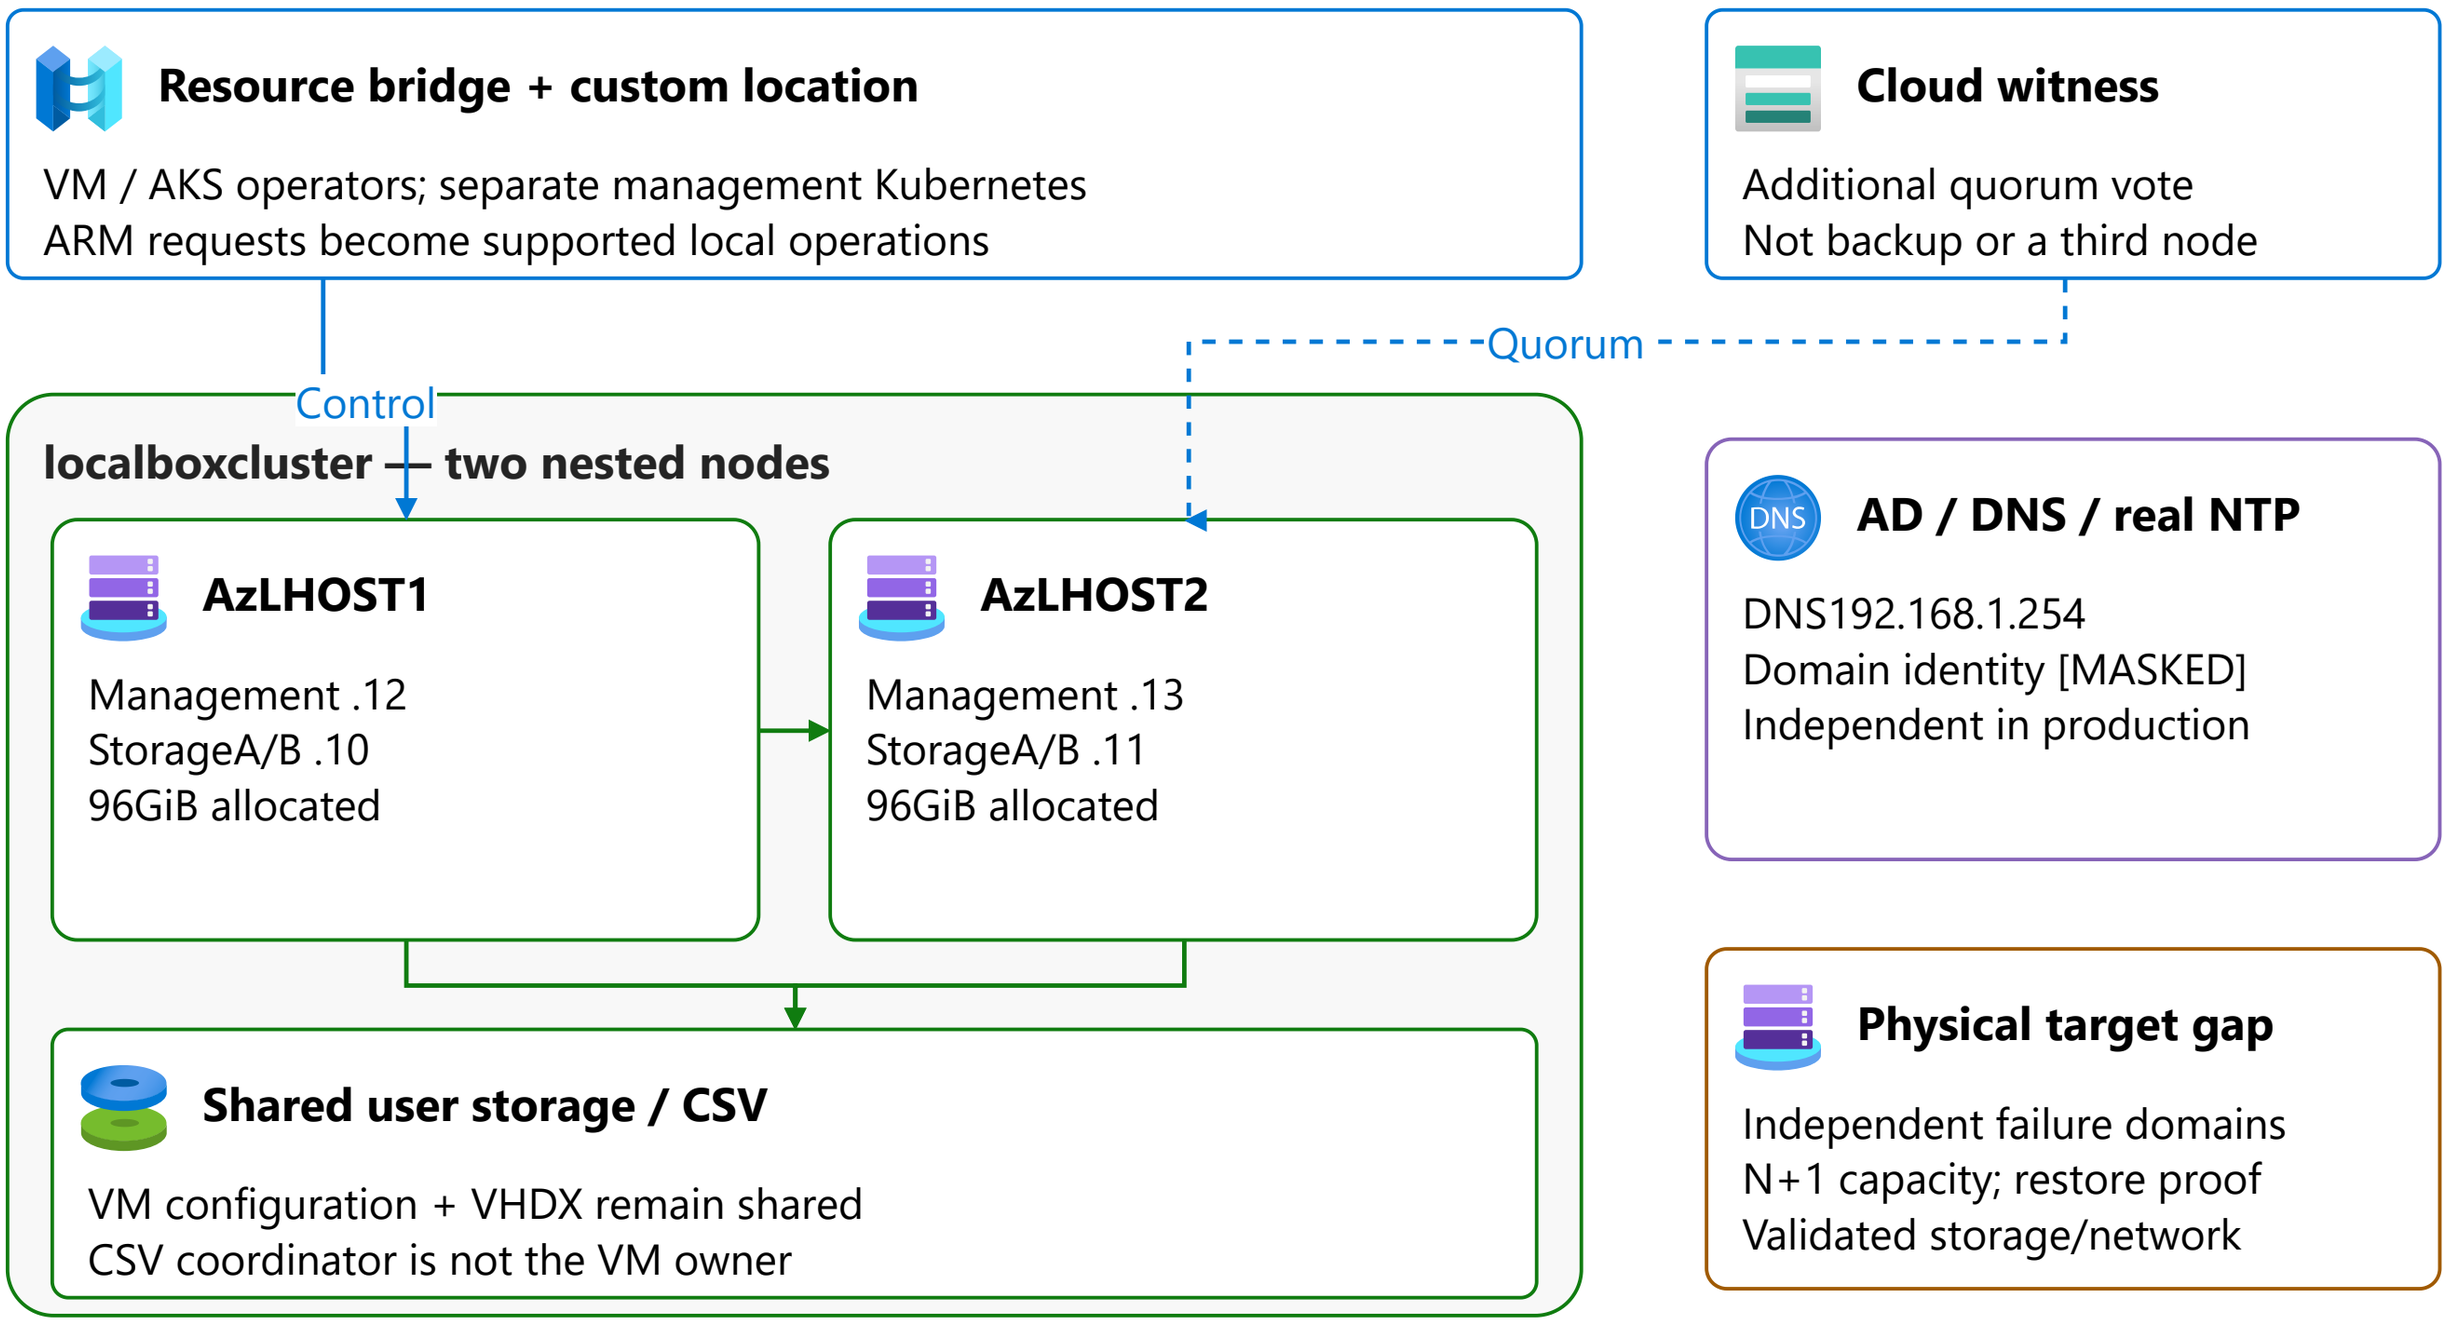


Witness is quorum only. Storage resiliency, live moves, backup and restore solve different failures.

Identifiers and credentials [MASKED] · Detail, assumptions and sources below the diagram

04 | AKS Local and private NGINX access

LAB SIZING — one worker plus a mandatory control plane. Resource bridge Kubernetes is not the application AKS cluster.

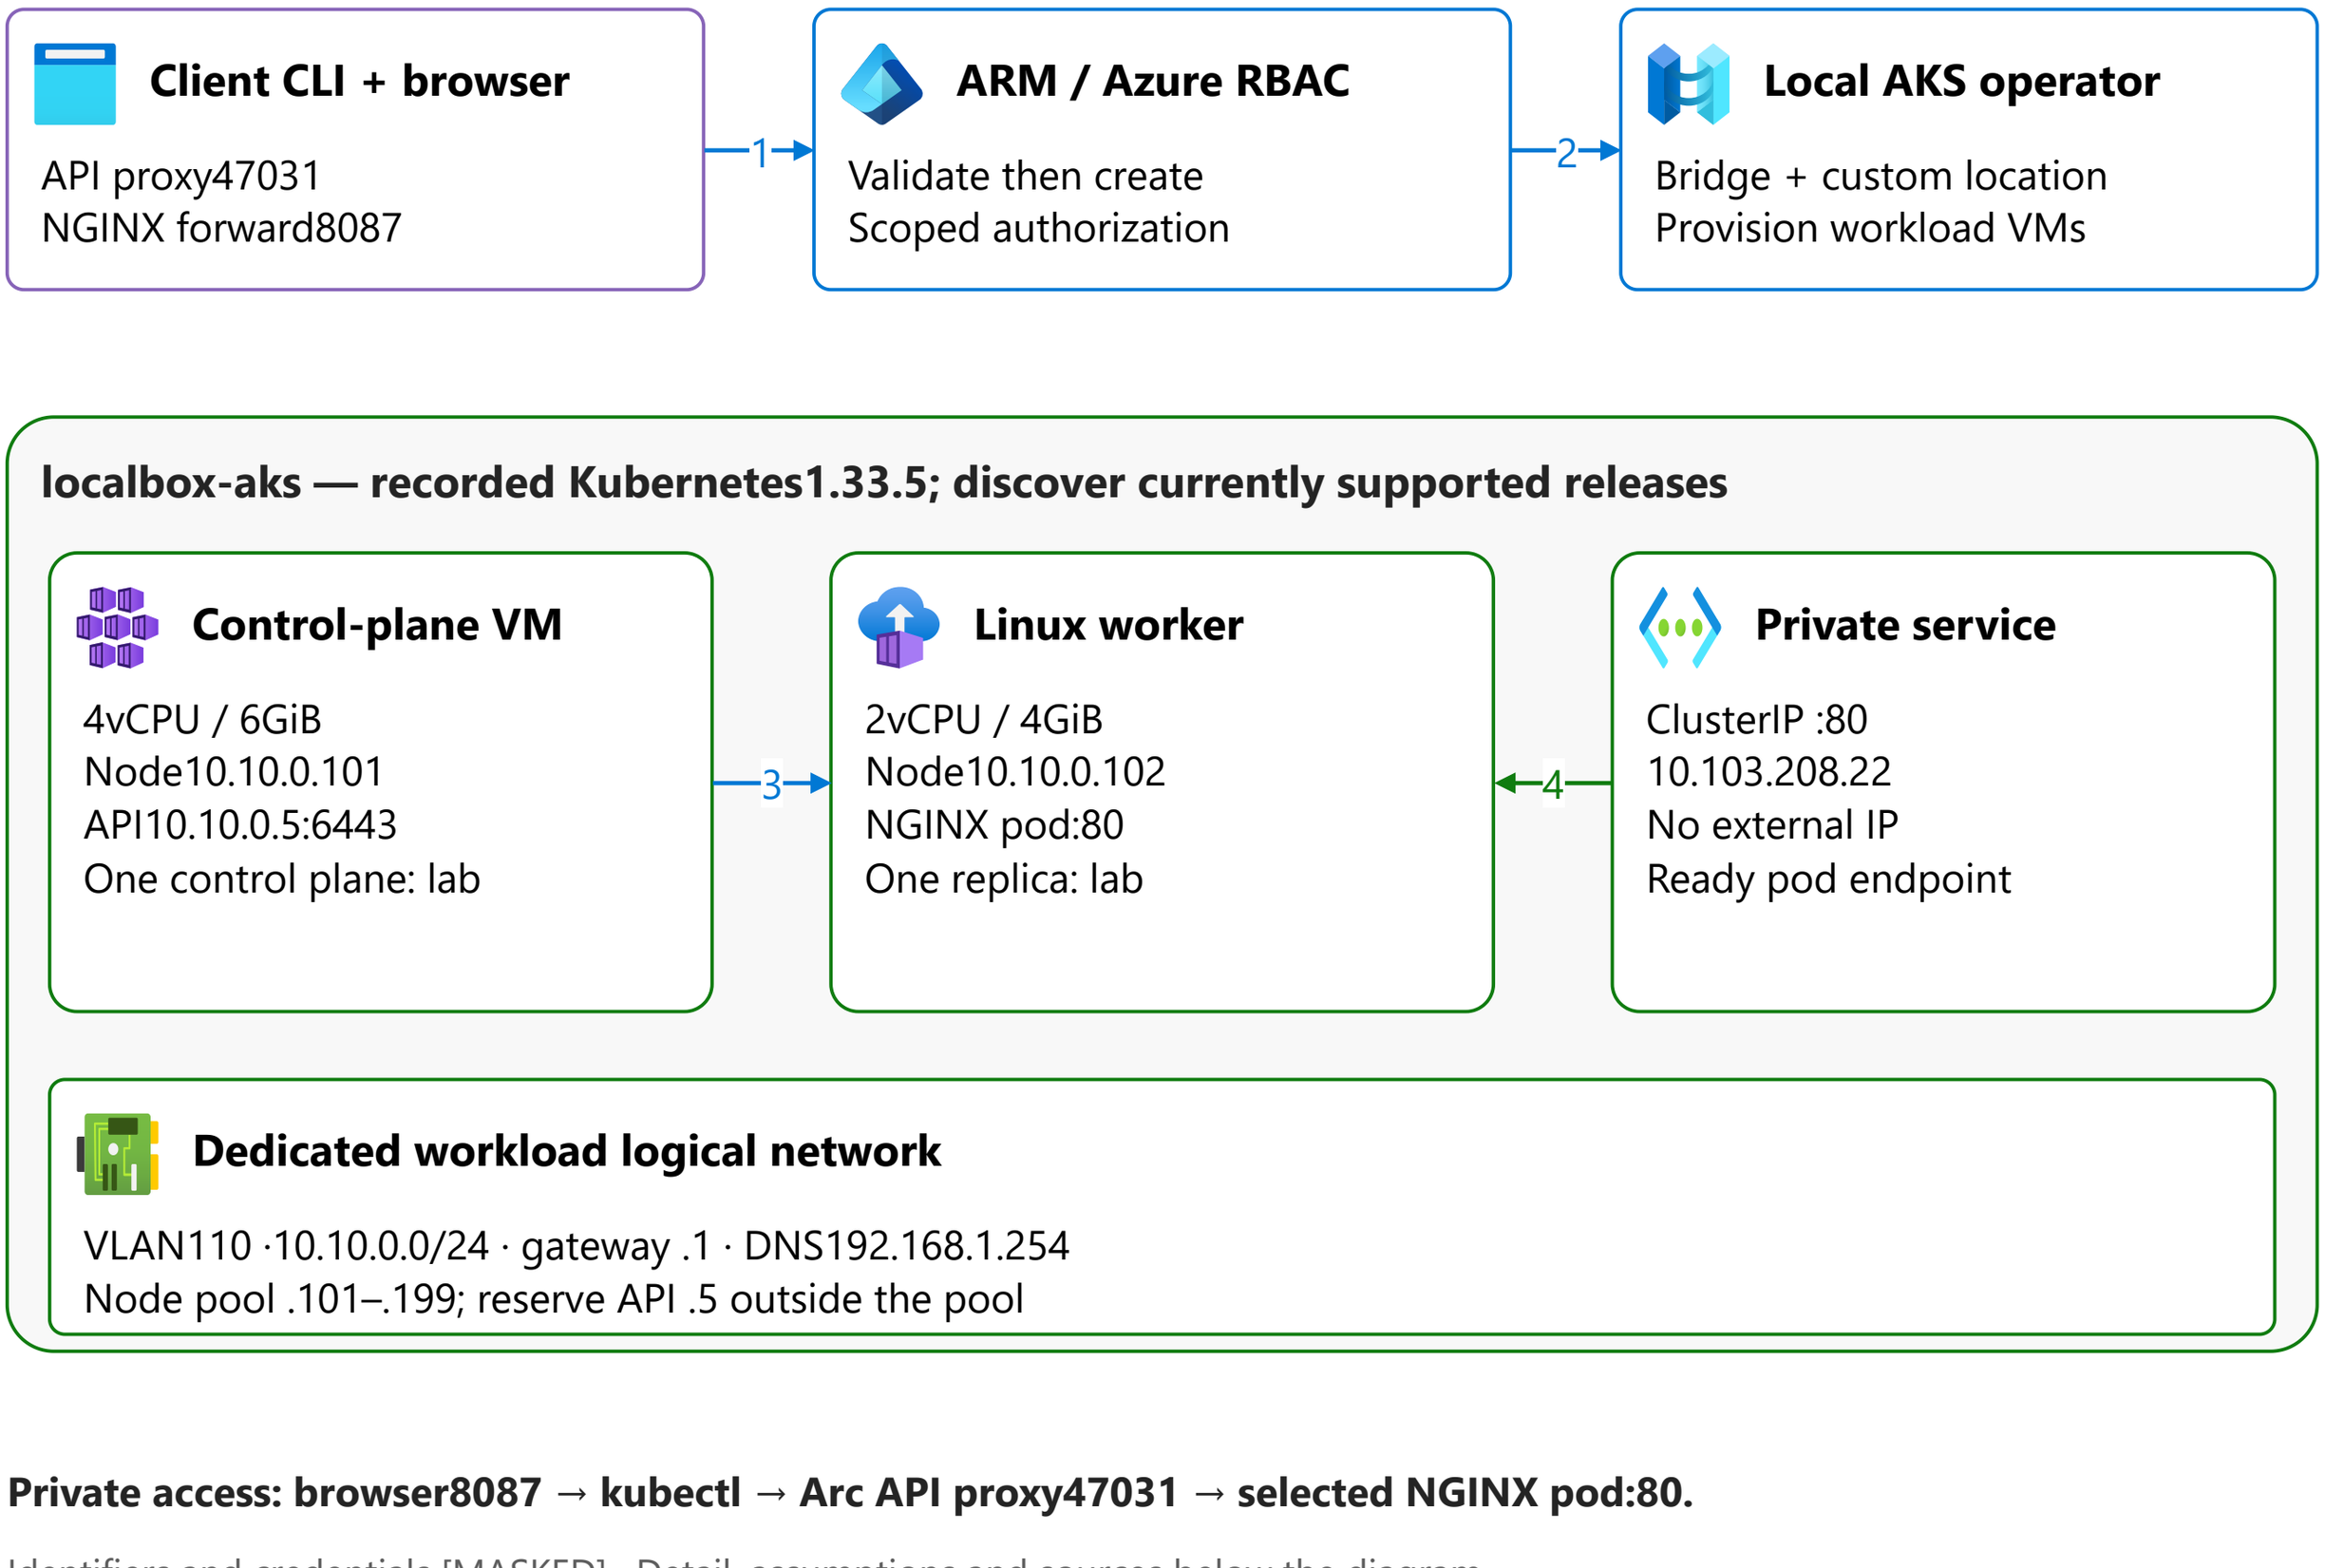


Private access: browser8087 → kubectl → Arc API proxy47031 → selected NGINX pod:80.

Identifiers and credentials [MASKED] · Detail, assumptions and sources below the diagram

05 | Live move, owner proof and VM web access

PLANNED USER ACTION — both nodes stay on. A diagram or menu screenshot is not evidence of completed migration.

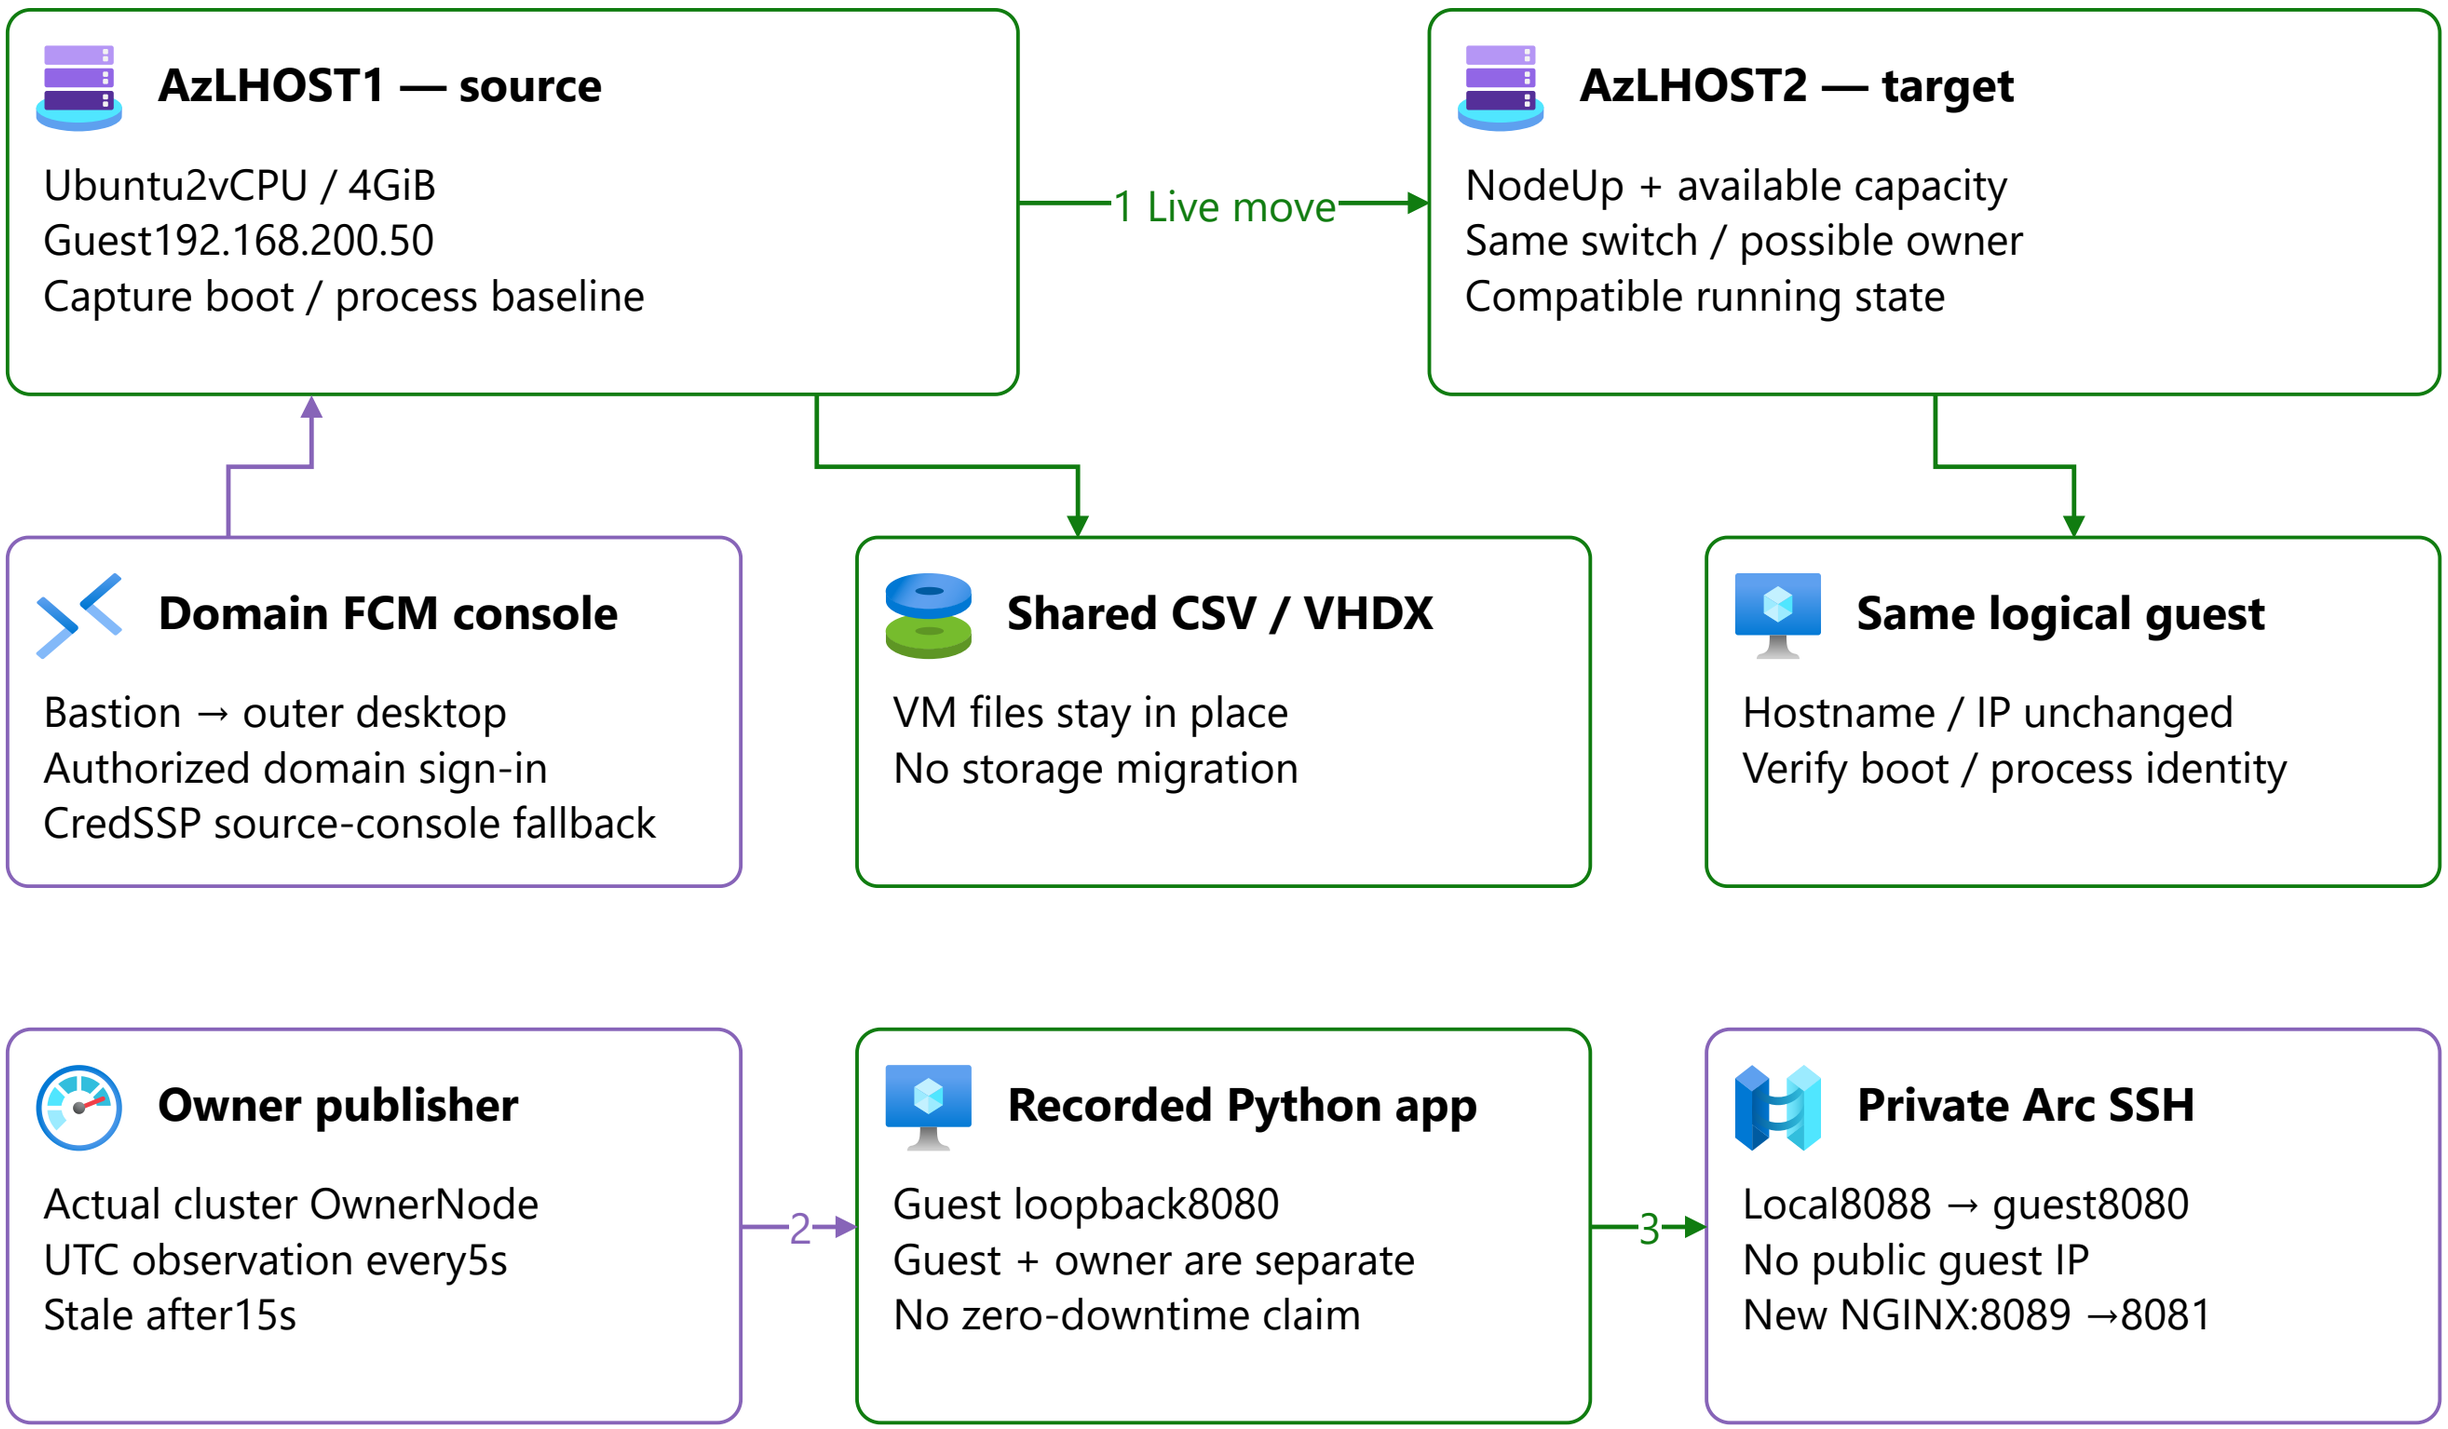

Confirm cluster completion + new owner + guest continuity. Record every actual HTTP or relay gap.

Identifiers and credentials [MASKED] · Detail, assumptions and sources below the diagram

06 | Stage gates and operational acceptance

Each stage needs an accountable owner, evidence, stop conditions and a supported recovery boundary.

G0 | Scope + landing zone

Ownership / RBAC / budget
Lab versus production target

G1 | Media + foundation

Provenance / quota / what-if
Stop on access or checksum failure

G2 | Nodes + cluster

AD / DNS / NTP / Arc
Validate → Deploy → healthy CSV

G3 | AKS + NGINX

Nonoverlapping network pool
NodesReady + appReady + HTTP200

G4 | VM + guest web

Gen2 / NoCloud / shared disk
ArcConnected + SSH + HTTP200

G5 | Manual live move

Source / target preflight
Owner change + continuity evidence

ALZ controls not demonstrated remain unverified. No automatic shutdown, storage reset or broad ACL grant.

Identifiers and credentials [MASKED] · Detail, assumptions and sources below the diagram