

Continuum Mobile Live QA

Agent Forge run, Codex verification. 2026-05-31.

Flutter tests

PASS

154 Flutter tests passed after structured timeline and live dashboard changes.

Host daemon tests

PASS

38 daemon tests passed after aligning pairing code generation to six numeric digits.

iOS simulator build

PASS


XcodeBuildMCP built and launched Runner on iPhone 17 Pro, iOS 26.3.

Known gap

OPEN

Model switching is not implemented because no ASCP/daemon contract for model selection exists yet.

Simulator Evidence

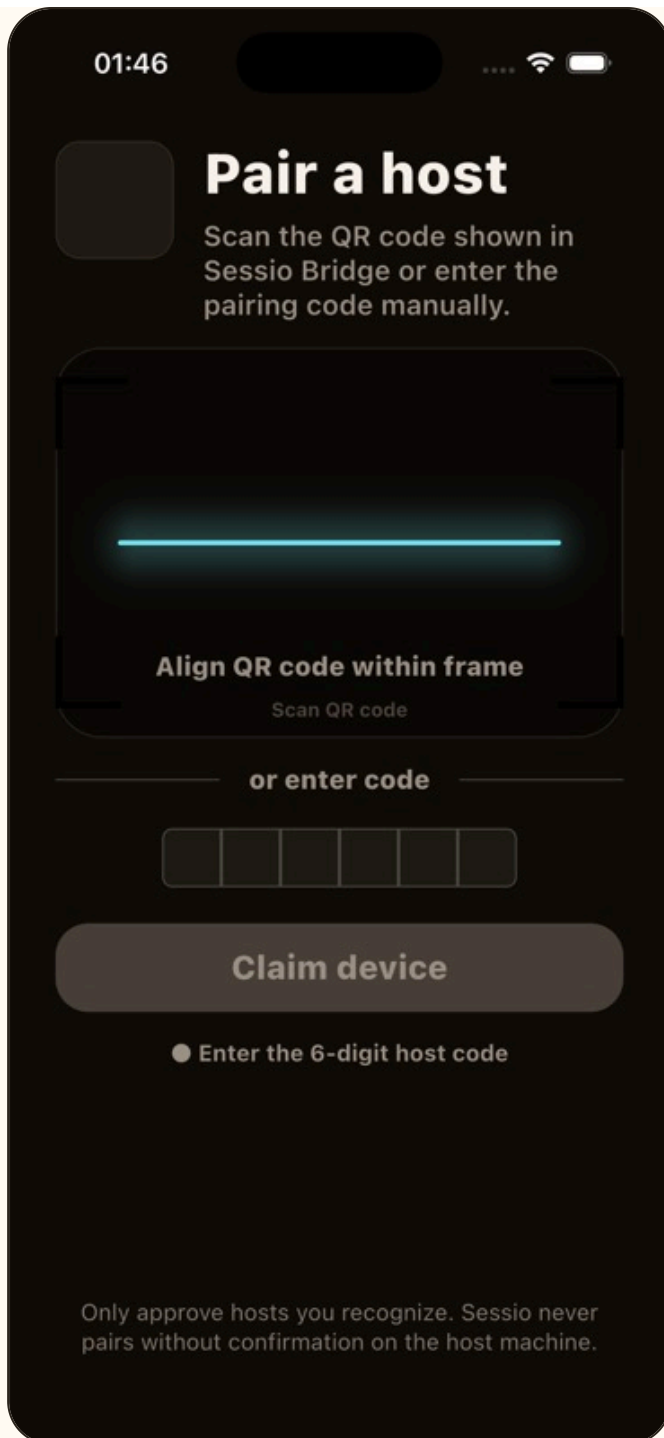

Screen: Pair a host

Live daemon:

127.0.0.1:9875 , admin
127.0.0.1:9876

Generated pairing code:

063892

Result: six-digit daemon code now matches the Flutter shadcn InputOTP screen.

What Changed

- Timeline events now preserve ASCP type, payload, role/content/tool/status/model metadata instead of only flattened labels.
- Session detail header now derives title/status/model from live data and removes fake static duration.
- Home dashboard no longer falls back to hardcoded sessions, fake host name, fake health stats, or default badge count when live data is absent.

- Host daemon pairing codes now generate unique six-digit numeric values for the mobile OTP contract.
- OpenCode subagent audit was run through Agent Forge and captured below.

Verification Commands

```
flutter analyze
flutter test
flutter_shadcn validate --json
flutter_shadcn audit --json
flutter_shadcn deps --json
npm --workspace @ascp/host-daemon run test
XcodeBuildMCP build_run_sim on iPhone 17 Pro
```

Subagent Audit

```
# Agent-Forge OpenCode Live Audit Report

**Project:** Flutter ASCP Mobile Companion (`apps/mobile`)
**Auditor:** OpenCode (Agent-Forge pipeline)
**Date:** 2026-05-31
**Scope:** Live-readiness and hardcoded/demo value leakage.
**Constraint:** Source files were not modified during this audit.

---

## Executive Summary

The app has a well-structured live mode wired through
`MobileDependencies.live()` and `MobileRuntimeConfig.fromEnvironment()`.
Core protocol methods (pairing, sessions, approvals, inspect, settings)
have live ASCP/daemon repository implementations that are correctly
instantiated when `CONTINUUM_MOBILE_MODE=live` is passed via dart-
define.

However, multiple screens contain hardcoded demo data that leaks into
live mode—either by rendering unconditionally or by falling back to
synthetic data when live responses are empty or error. In addition,
model switching is not implemented, and integration tests are
significantly misaligned with the current UI, making them non-
functional as written.
```

Area	Status	Notes
Pairing	Live-ready	Daemon claim/poll and secure-store write are correct.
Sessions (list/get/subscribe/send_input)	Live-ready	WebSocket

```
events stream into timeline via `AscpSessionSubscriptionRepository`. |  
| Chat event distinguishability | **Implemented** | User, agent, tool,  
approval, terminal, and generic events each have distinct renderers. |  
| Model switching | **Missing** | No UI, repository method, or protocol  
parameter for model selection. |  
| Hardcoded data in live mode | **Leaks found** | Dashboard, session  
detail, approvals, devices, inspect, and settings screens render  
hardcoded strings regardless of mode. |  
| iOS test readiness | **Partial** | README provides daemon start and  
`flutter run` dart-defines, but integration test UI selectors do not  
match current presentation code. |
```
